

# TEST REPORT

**Application No.:** SHEM2006004381CR  
**FCC ID:** 2AC8UA2001  
**IC:** 21806-A2001  
**Applicant:** Anhui Huami Information Technology Co., Ltd.  
**Address of Applicant:** Room 1201, Building A4, National Animation Industry Base, No.800 Wangjiang West Road, Gaoxin District, Hefei, Anhui, China  
**Manufacturer:** Anhui Huami Information Technology Co., Ltd.  
**Address of Manufacturer:** Room 1201, Building A4, National Animation Industry Base, No.800 Wangjiang West Road, Gaoxin District, Hefei, Anhui, China  
**Factory:** Hi-P (Suzhou) Electronics & Technology Co., Ltd.  
**Address of Factory:** No. 86, Liufeng Road, Wuzhong District, Suzhou, Jiangsu Province, P.R.China.

**Equipment Under Test (EUT):**  
**EUT Name:** Amazfit Neo  
**Model No.:** A2001  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
 RSS-247 Issue 2, February 2017  
 RSS-Gen Issue 5, April 2018

**Date of Receipt:** 2020-06-04  
**Date of Test:** 2020-06-12 to 2020-06-24  
**Date of Issue:** 2020-06-24

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

*Parlam Zhan*

Parlam Zhan  
E&E Section Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**



Revision Record			
Version	Description	Date	Remark
00	Original	2020-06-24	/

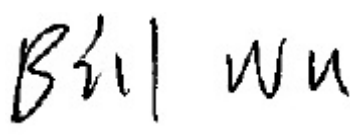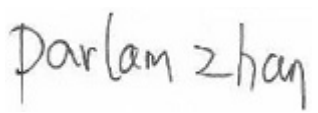Authorized for issue by:			
			
		<hr/> Bill Wu / Project Engineer	
			
		<hr/> Parlam Zhan/ Reviewer	

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.1	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.2	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY.....</b>	<b>3</b>
<b>3 CONTENTS.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION .....</b>	<b>5</b>
4.1 DETAILS OF E.U.T. ....	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY .....	6
4.4 TEST LOCATION .....	7
4.5 TEST FACILITY .....	7
4.6 DEVIATION FROM STANDARDS .....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
<b>5 EQUIPMENT LIST .....</b>	<b>8</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>	<b>9</b>
6.1 ANTENNA REQUIREMENT.....	9
<b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>	<b>10</b>
7.1 MINIMUM 6dB BANDWIDTH .....	10
7.2 CONDUCTED PEAK OUTPUT POWER .....	11
7.3 POWER SPECTRUM DENSITY .....	12
7.4 CONDUCTED BAND EDGES MEASUREMENT .....	13
7.5 CONDUCTED SPURIOUS EMISSIONS .....	14
7.6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	15
7.7 RADIATED SPURIOUS EMISSIONS .....	26
7.8 99% BANDWIDTH.....	43
<b>8 TEST SETUP PHOTOGRAPHS.....</b>	<b>44</b>
<b>9 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>44</b>
<b>APPENDIX A FOR SHEM200600438101 .....</b>	<b>45</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC 3.8V 0.61Wh rechargeable battery  
 Serial Number: A200118360023  
 Firmware Version: V4.1.7  
 Test voltage: DC 3.8V  
 Cable: DC Cable 10cm  
 Antenna Gain: -2.8dBi  
 Antenna Type: Integral Antenna  
 Bluetooth Version: V5.0 LE  
 Data rate: 1Mbps & 2Mbps  
 Channel Spacing: 2MHz  
 Modulation Type: GFSK  
 Number of Channels: 40  
 Operation Frequency: 2402MHz to 2480MHz

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
BT test board	/	Test Plate 2	/
Laptop	Lenovo	ThinkPad X100e	/

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.1dB (Below 1GHz)
		4.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (LAB CODE: 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

- **FCC (Designation Number: CN5033)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

## 5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
<b>Conducted Emission at Mains Terminals (150kHz-30MHz)</b>					
EMI test receiver	R&S	ESR7	SHEM162-1	2019-12-20	2020-12-19
LISN	Schwarzbeck	NSLK8127	SHEM061-1	2019-12-20	2020-12-19
LISN	EMCO	3816/2	SHEM019-1	2019-12-20	2020-12-19
Pulse limiter	R&S	ESH3-Z2	SHEM029-1	2019-12-20	2020-12-19
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2019-12-20	2020-12-19
CE test Cable	/	CE01	/	2019-12-20	2020-12-19
<b>RF Conducted Test</b>					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2019-12-20	2020-12-19
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2019-08-13	2020-08-12
Signal Generator	R&S	SMR20	SHEM006-1	2019-08-13	2020-08-12
Signal Generator	Agilent	N5182A	SHEM182-1	2019-08-13	2020-08-12
Communication Tester	R&S	CMW270	SHEM183-1	2019-08-13	2020-08-12
Switcher	Tonscend	JS0806	SHEM184-1	2019-08-13	2020-08-12
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2019-08-13	2020-08-12
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2017-09-25	2020-09-24
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2019-12-20	2020-12-19
DC Power Supply	MCH	MCH-303A	SHEM210-1	2019-12-20	2020-12-19
Conducted test Cable	/	RF01~RF04	/	2019-12-20	2020-12-19
<b>RF Radiated Test</b>					
EMI test Receiver	R&S	ESU40	SHEM051-1	2019-12-20	2020-12-19
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2019-12-20	2020-12-19
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2019-12-20	2020-12-19
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2019-10-14	2021-10-13
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2019-04-30	2021-04-29
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2019-10-14	2021-10-13
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-10-31	2020-10-30
Pre-amplifier (9kHz-2GHz)	CLAVIIO	BDLNA-0001	SHEM164-1	2019-08-13	2020-08-12
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118	SHEM050-2	2019-08-13	2020-08-12
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2019-12-19	2020-12-18
Signal Generator	R&S	SMR40	SHEM058-1	2019-08-13	2020-08-12
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
RE test Cable	/	RE01, RE02, RE06	/	2019-12-19	2020-12-18



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Integral Antenna and no consideration of replacement. The best case gain of the antenna is -2.8dBi.

Antenna location: Refer to Appendix (Internal Photos)

## 7 Radio Spectrum Matter Test Results

### 7.1 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2013) Section 11.8.1  
Limit:  $\geq 500$  kHz


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

#### 7.1.2 Test Setup Diagram

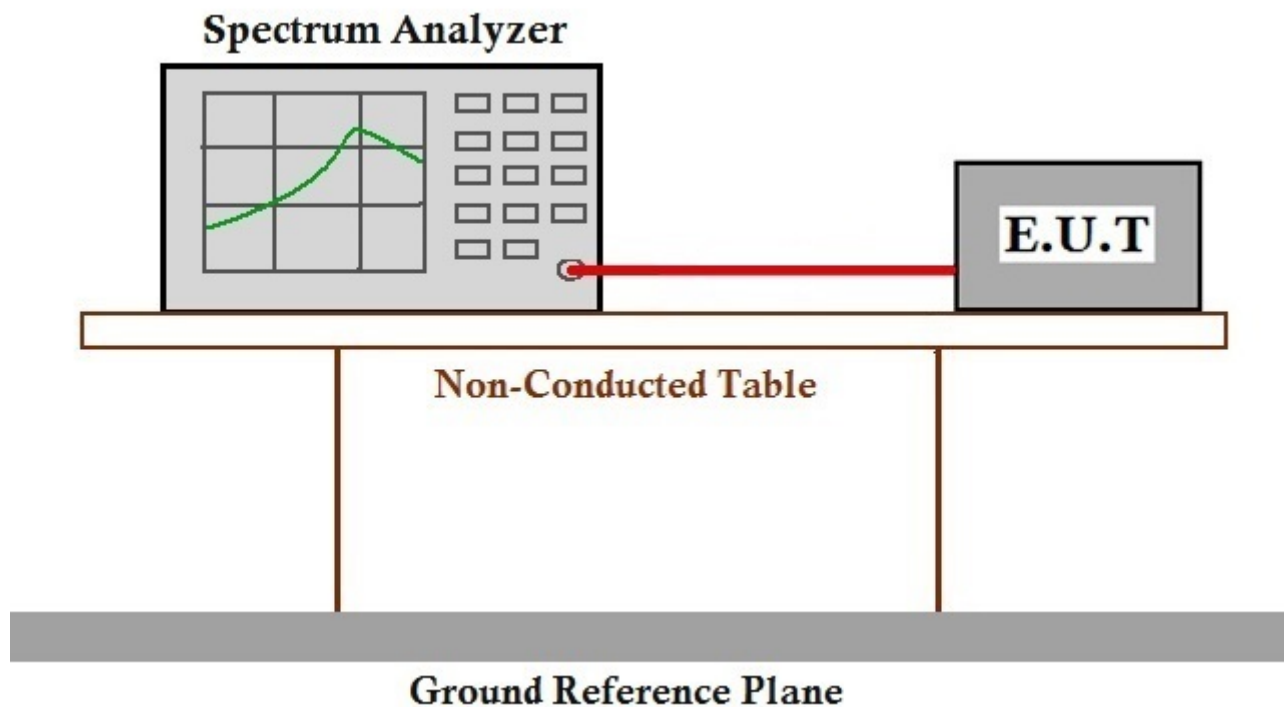

#### 7.1.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101

## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

### 7.2.2 Test Setup Diagram

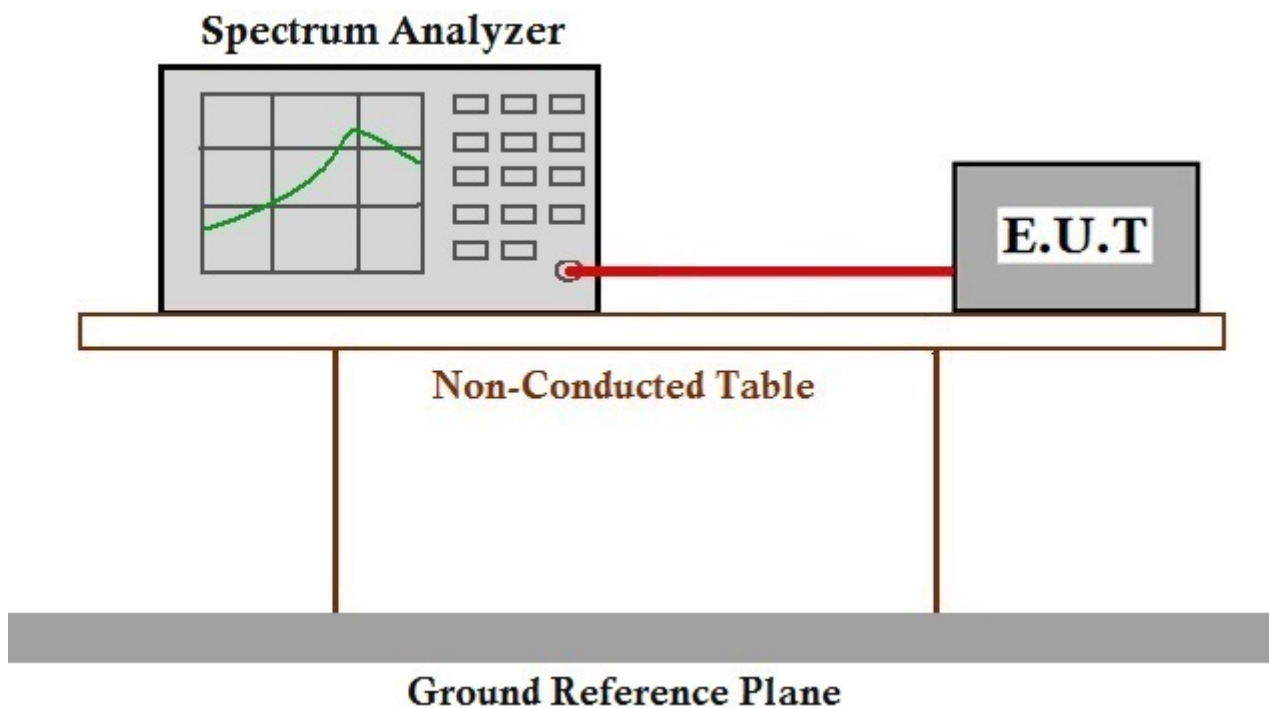

### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101


### 7.3 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)  
 Test Method: ANSI C63.10 (2013) Section 11.10.2  
 Limit:  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

#### 7.3.1 E.U.T. Operation

Operating Environment:  
 Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar  
 Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

#### 7.3.2 Test Setup Diagram

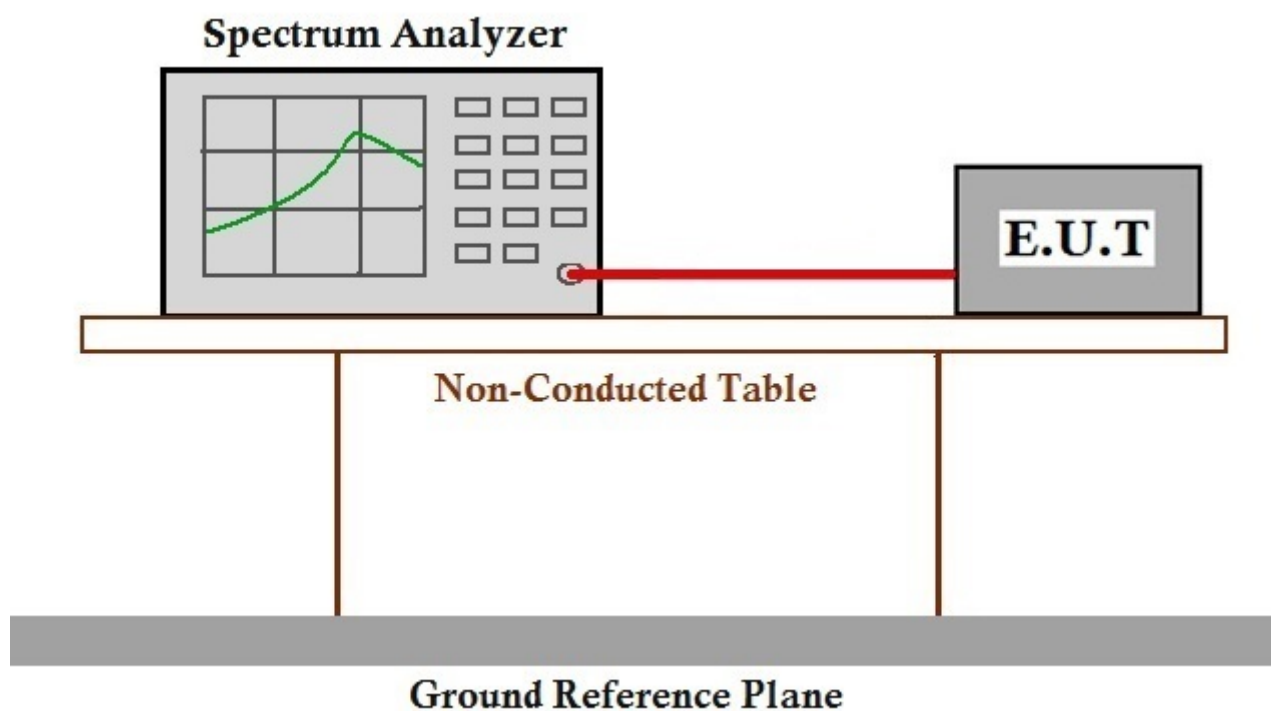

#### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101


### 7.4 Conducted Band Edges Measurement

**Test Requirement** 47 CFR Part 15, Subpart C 15.247(d)  
**Test Method:** ANSI C63.10 (2013) Section 11.13.3.2  
**Limit:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

#### 7.4.1 E.U.T. Operation

**Operating Environment:**  
 Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar  
**Test mode** a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

#### 7.4.2 Test Setup Diagram

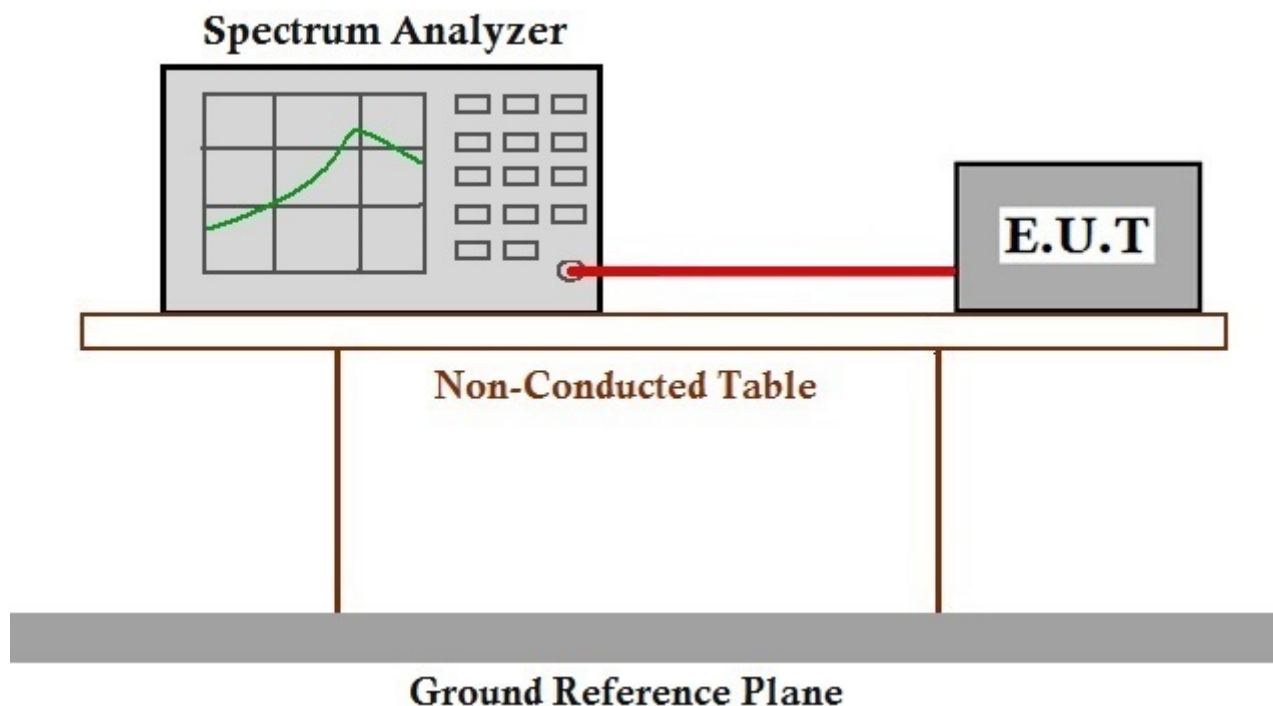

#### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101


### 7.5 Conducted Spurious Emissions

**Test Requirement** 47 CFR Part 15, Subpart C 15.247(d)  
**Test Method:** ANSI C63.10 (2013) Section 11.11  
**Limit:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

#### 7.5.1 E.U.T. Operation

**Operating Environment:**  
 Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar  
**Test mode** a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

#### 7.5.2 Test Setup Diagram

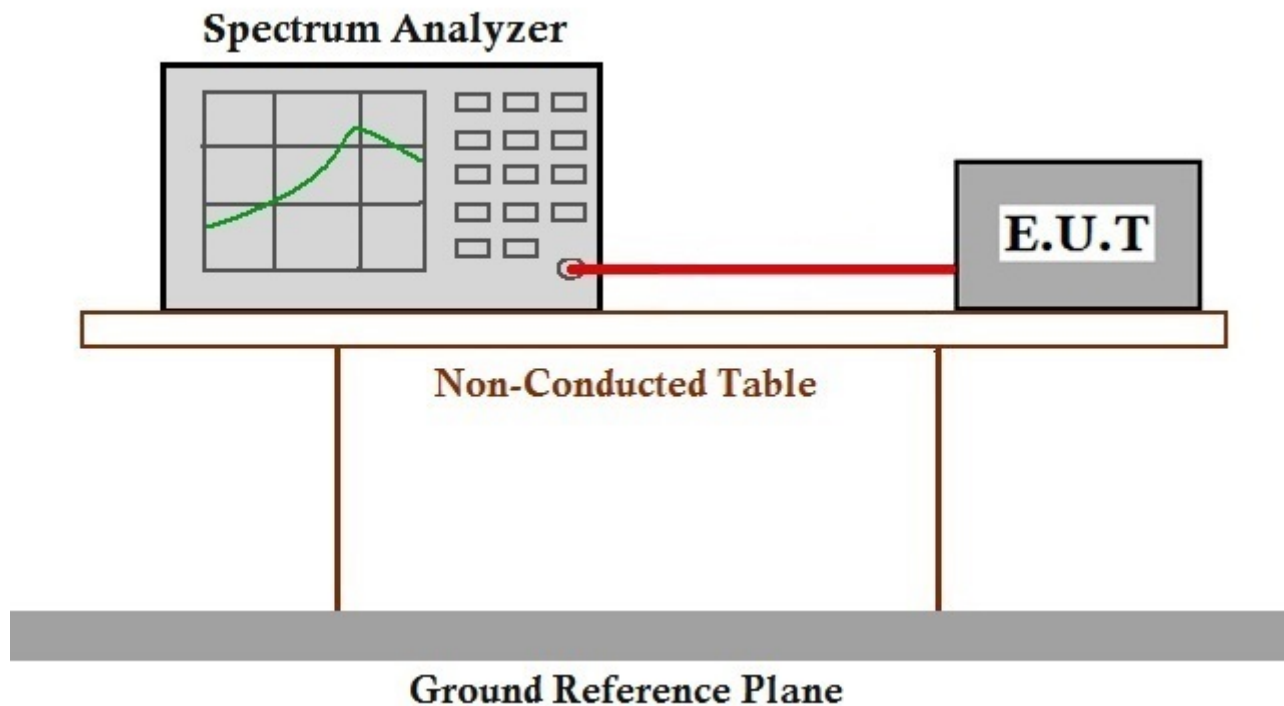

#### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101

**7.6 Radiated Emissions which fall in the restricted bands**

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
 Test Method: ANSI C63.10 (2013) Section 6.10.5  
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

### 7.6.2 Test Setup Diagram

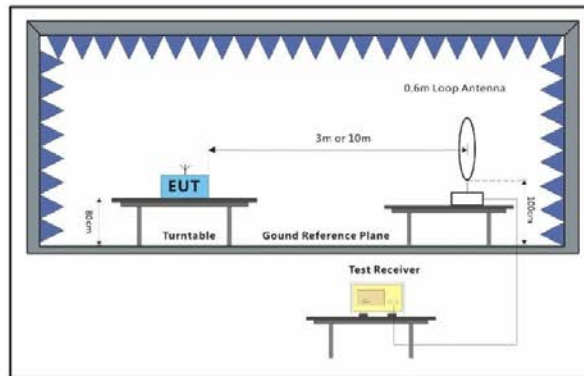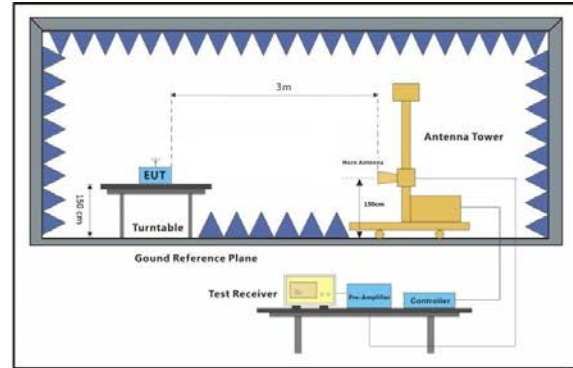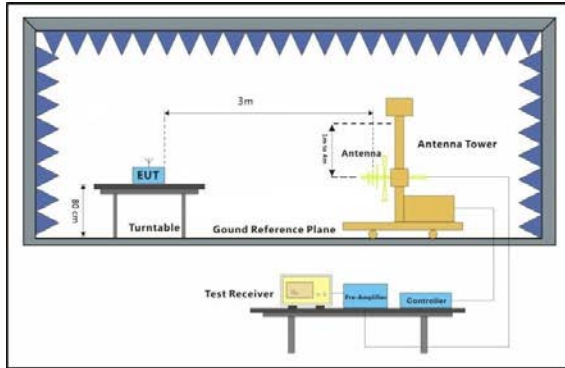




### 7.6.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low; Data Rate:1M

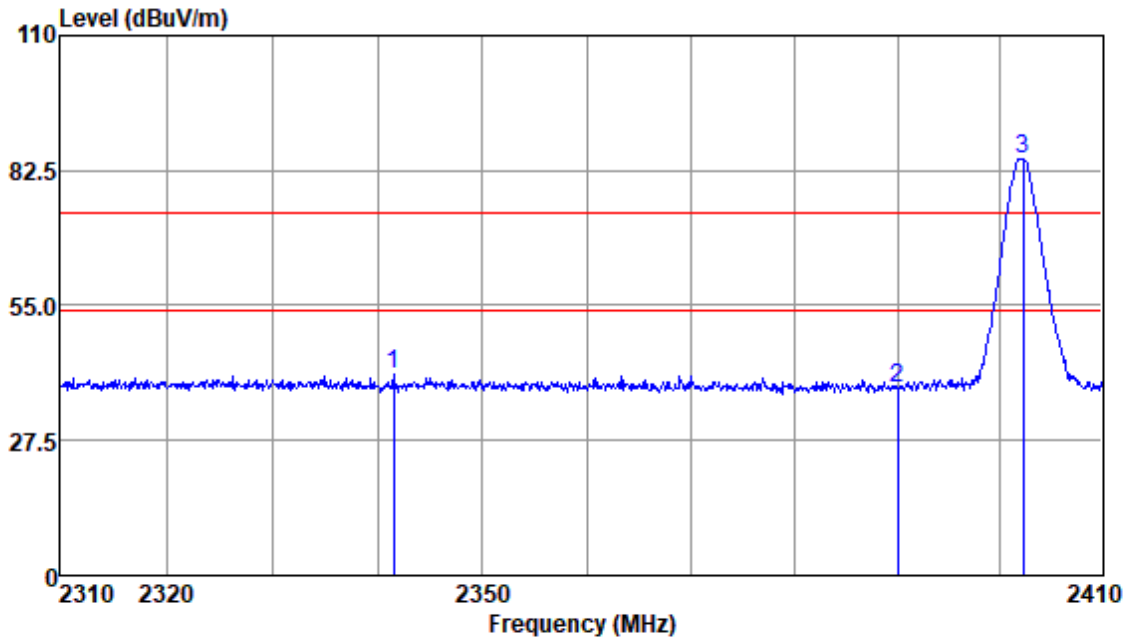


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2341.54	49.20	25.96	3.08	40.87	74.00	-33.13	Peak
2390.00	46.21	26.03	3.15	37.99	74.00	-36.01	Peak
2402.25	93.08	26.05	3.14	84.87	74.00	10.87	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low; Data Rate:1M

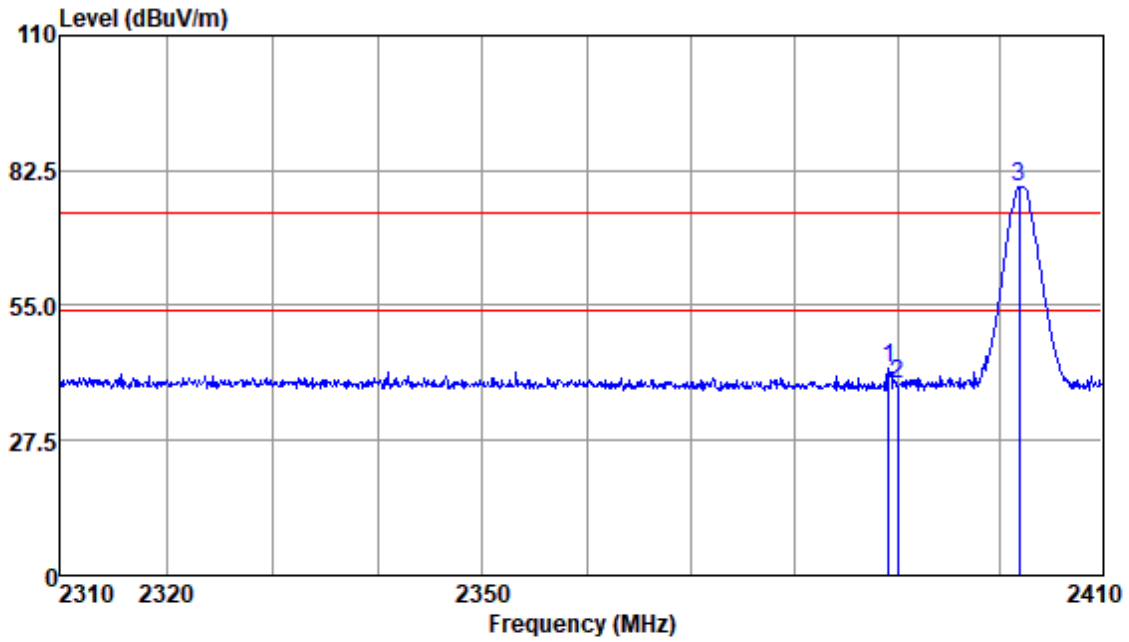


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2389.15	50.52	26.03	3.15	42.30	74.00	-31.70	Peak
2390.00	47.34	26.03	3.15	39.12	74.00	-34.88	Peak
2401.84	87.40	26.05	3.15	79.20	74.00	5.20	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High; Data Rate:1M

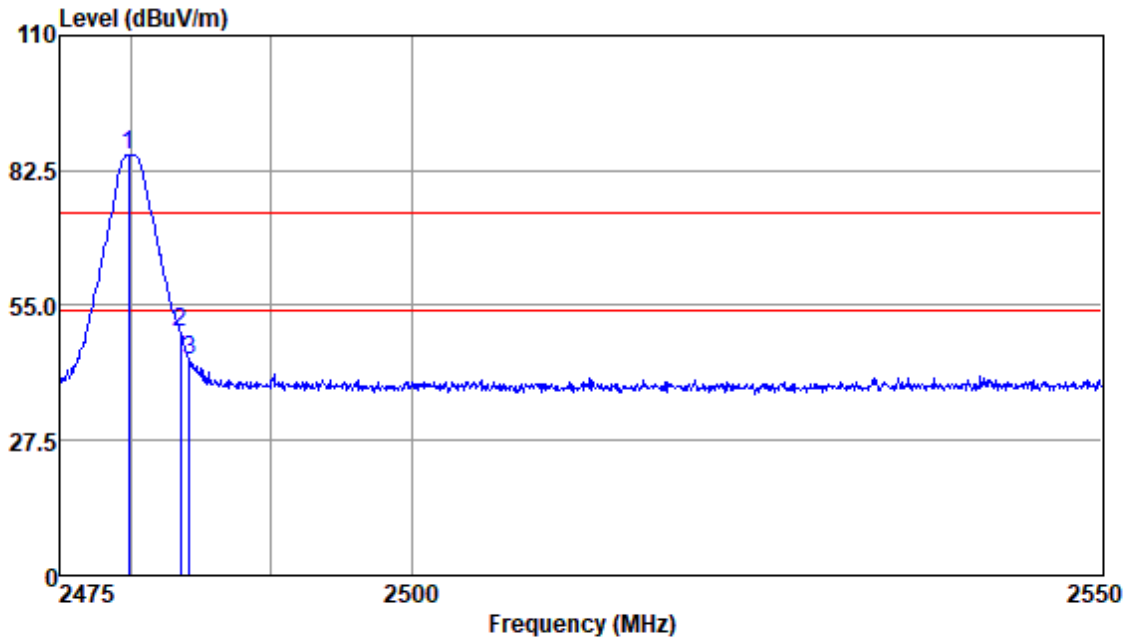


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2479.81	93.87	26.17	3.14	85.61	74.00	11.61	Peak
2483.50	57.77	26.18	3.14	49.52	74.00	-24.48	Peak
2484.18	52.22	26.18	3.14	43.97	74.00	-30.03	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High; Data Rate:1M

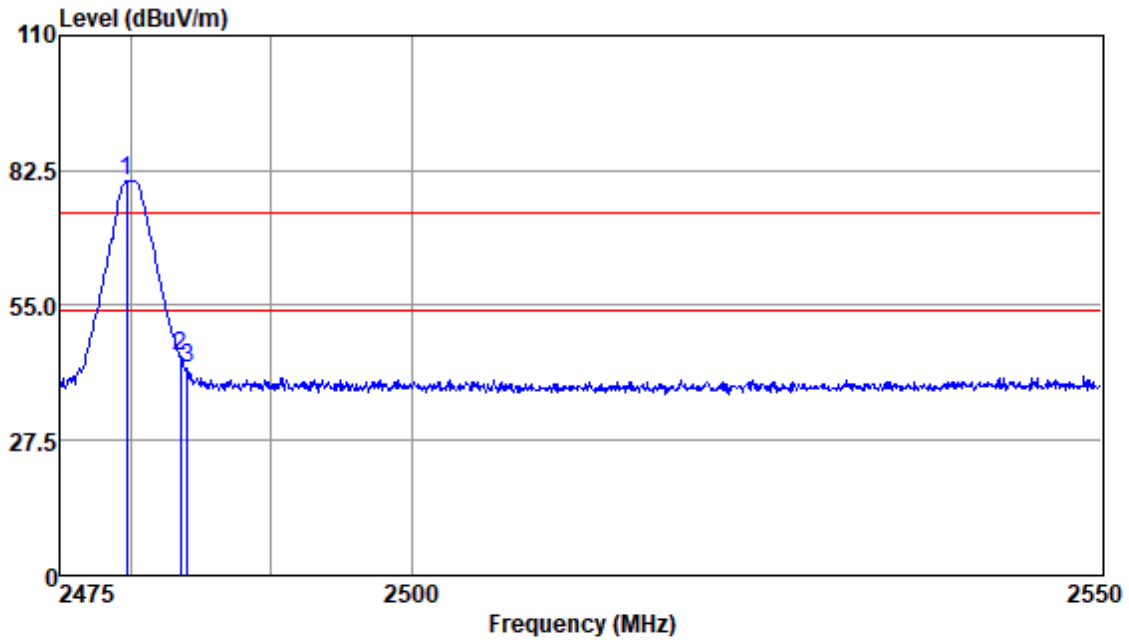


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2479.73	88.69	26.17	3.14	80.43	74.00	6.43	Peak
2483.50	52.70	26.18	3.14	44.45	74.00	-29.55	Peak
2484.03	50.40	26.18	3.14	42.15	74.00	-31.85	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low; Data Rate:2M

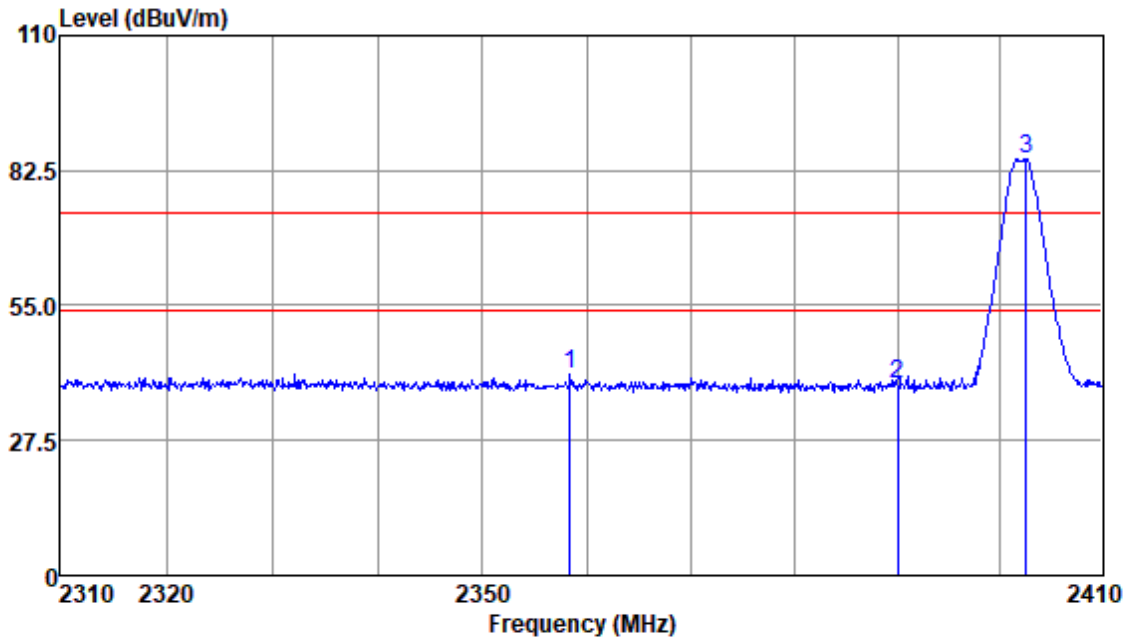


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2358.37	49.15	25.99	3.12	40.88	74.00	-33.12	Peak
2390.00	47.17	26.03	3.15	38.95	74.00	-35.05	Peak
2402.56	93.01	26.05	3.14	84.77	74.00	10.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low; Data Rate:2M

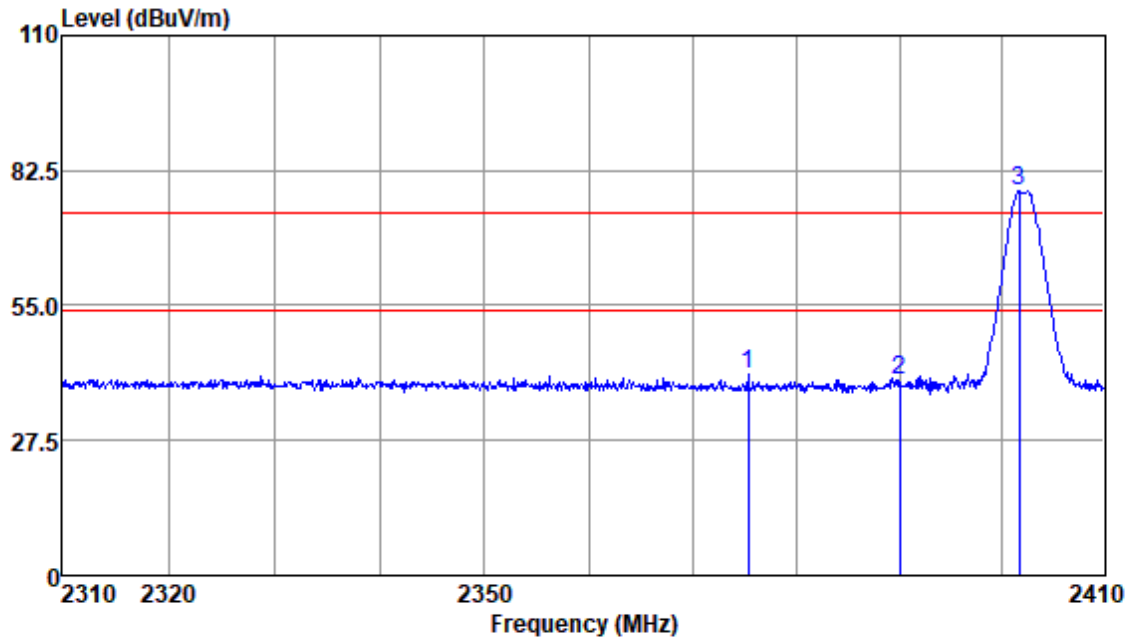


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2375.32	49.20	26.01	3.17	40.99	74.00	-33.01	Peak
2390.00	48.14	26.03	3.15	39.92	74.00	-34.08	Peak
2401.64	86.41	26.05	3.15	78.21	74.00	4.21	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High; Data Rate:2M

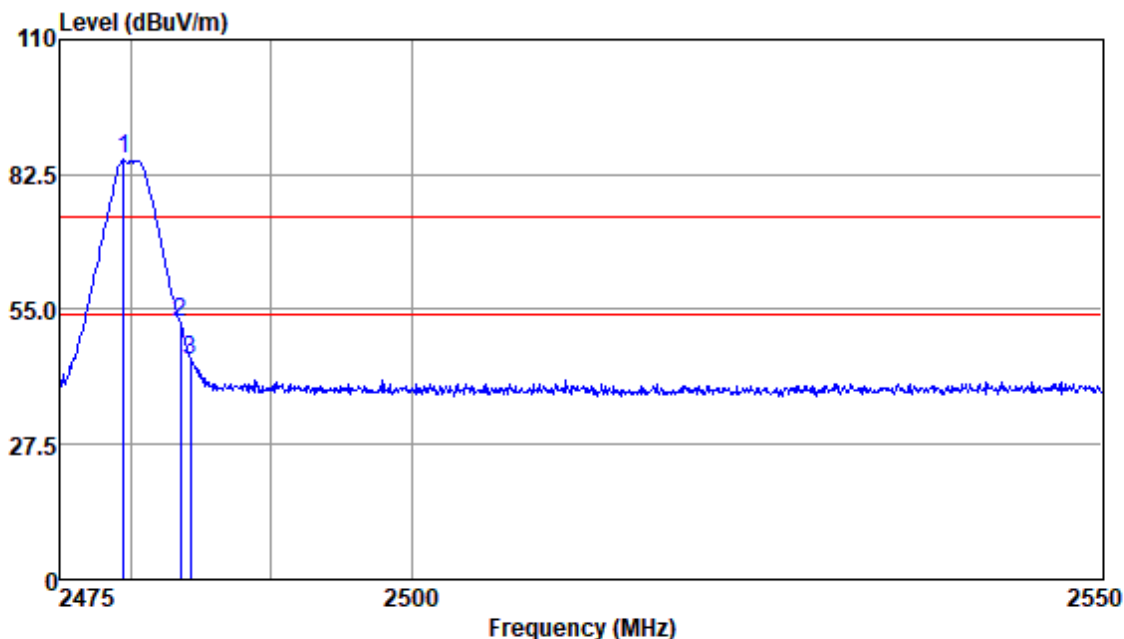


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2479.51	93.71	26.17	3.14	85.45	74.00	11.45	Peak
2483.50	60.51	26.18	3.14	52.26	74.00	-21.74	Peak
2484.25	52.98	26.18	3.14	44.73	74.00	-29.27	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss



Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High; Data Rate:2M

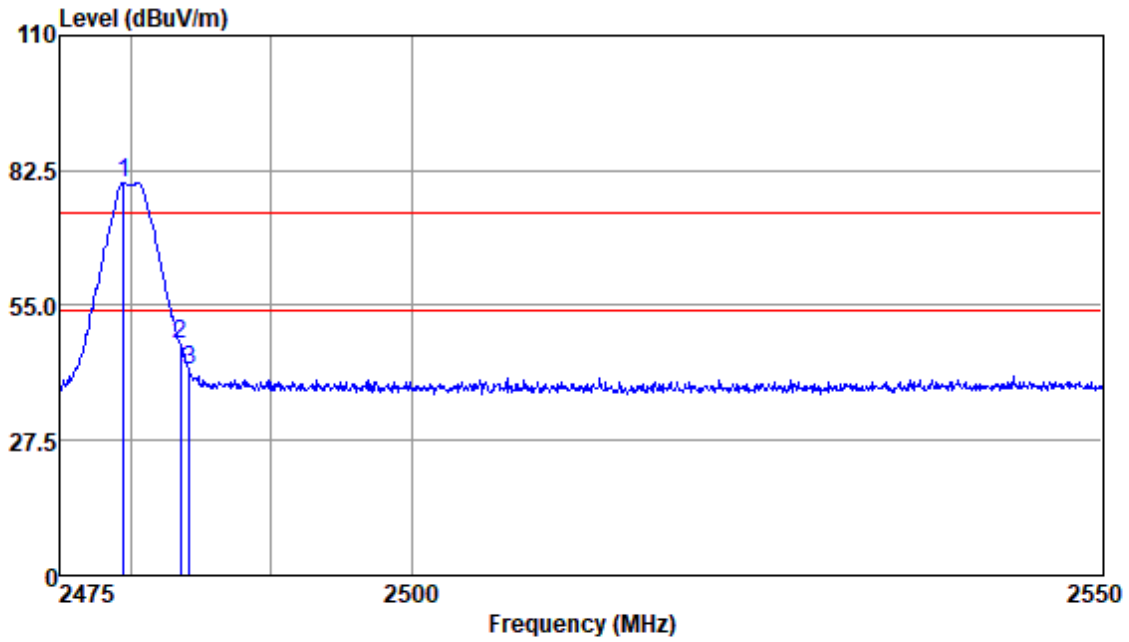

Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
2479.51	88.29	26.17	3.14	80.03	74.00	6.03	Peak
2483.50	55.46	26.18	3.14	47.21	74.00	-26.79	Peak
2484.18	50.16	26.18	3.14	41.91	74.00	-32.09	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

### 7.7 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
 Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6  
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

### 7.7.2 Test Setup Diagram

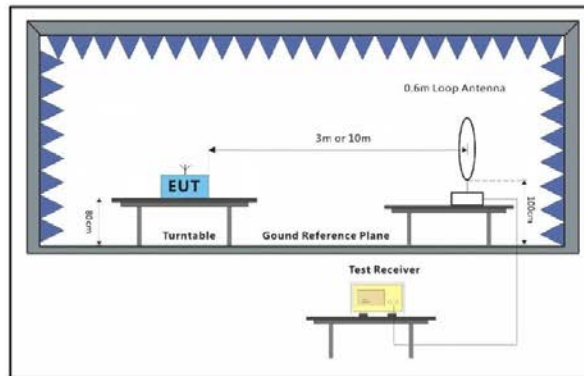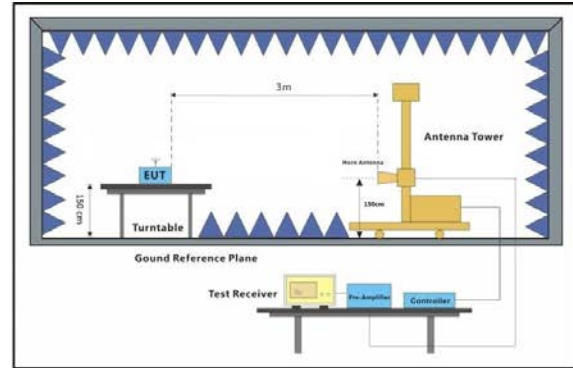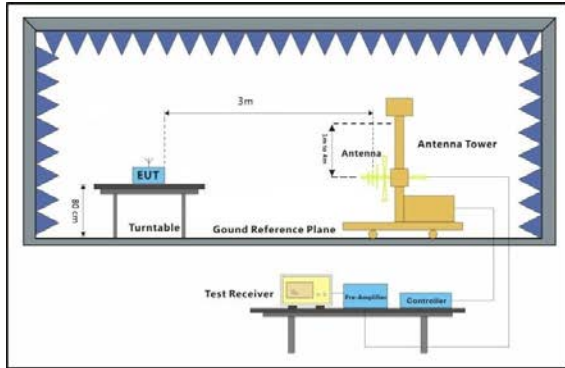

### 7.7.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

30MHz-1GHz

Mode:a; Polarization:Horizontal

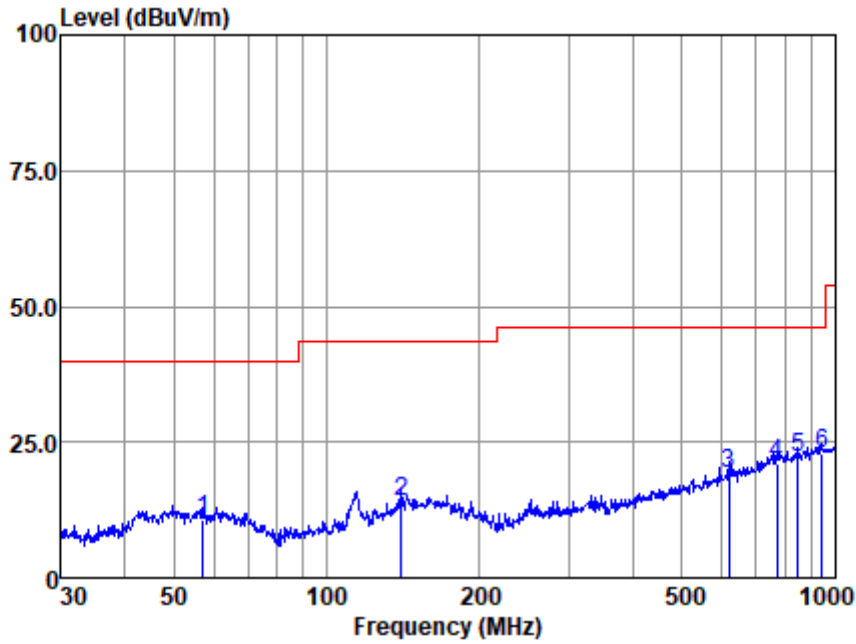


Antenna Polarity :HORIZONTAL  
Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	57.191	38.80	13.26	1.10	42.33	10.83	40.00	-29.17	QP
2	140.342	42.16	12.52	1.63	42.25	14.06	43.50	-29.44	QP
3	618.537	37.91	19.87	3.27	41.69	19.36	46.00	-26.64	QP
4	768.748	37.19	22.18	3.65	41.99	21.03	46.00	-24.97	QP
5	848.056	37.42	22.58	3.79	41.79	22.00	46.00	-24.00	QP
6	942.131	36.35	23.92	4.00	41.44	22.83	46.00	-23.17	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:a; Polarization:Vertical

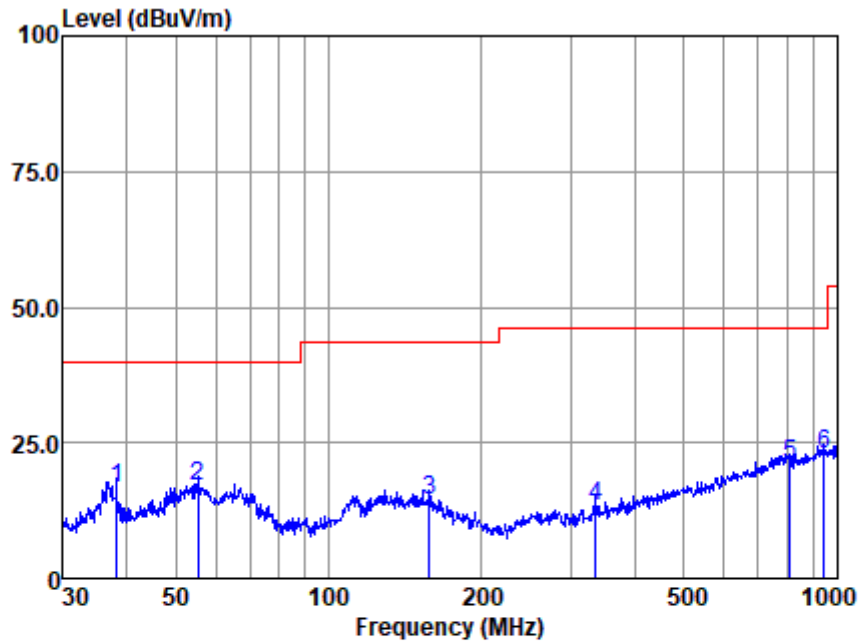

Antenna Polarity :VERTICAL


Test mode :a

	Read	Antenna	Cable	Preamp	Emission	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	38.212	44.89	12.93	0.94	42.34	16.42	40.00	-23.58	QP
2	55.221	44.74	13.38	1.08	42.33	16.87	40.00	-23.13	QP
3	158.112	41.62	13.15	1.77	42.22	14.32	43.50	-29.18	QP
4	336.035	38.77	14.14	2.51	41.99	13.43	46.00	-32.57	QP
5	807.429	36.80	22.35	3.73	41.95	20.93	46.00	-25.07	QP
6	945.440	36.29	23.96	4.00	41.44	22.81	46.00	-23.19	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Above 1GHz

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low; Date Rate:1Mbps

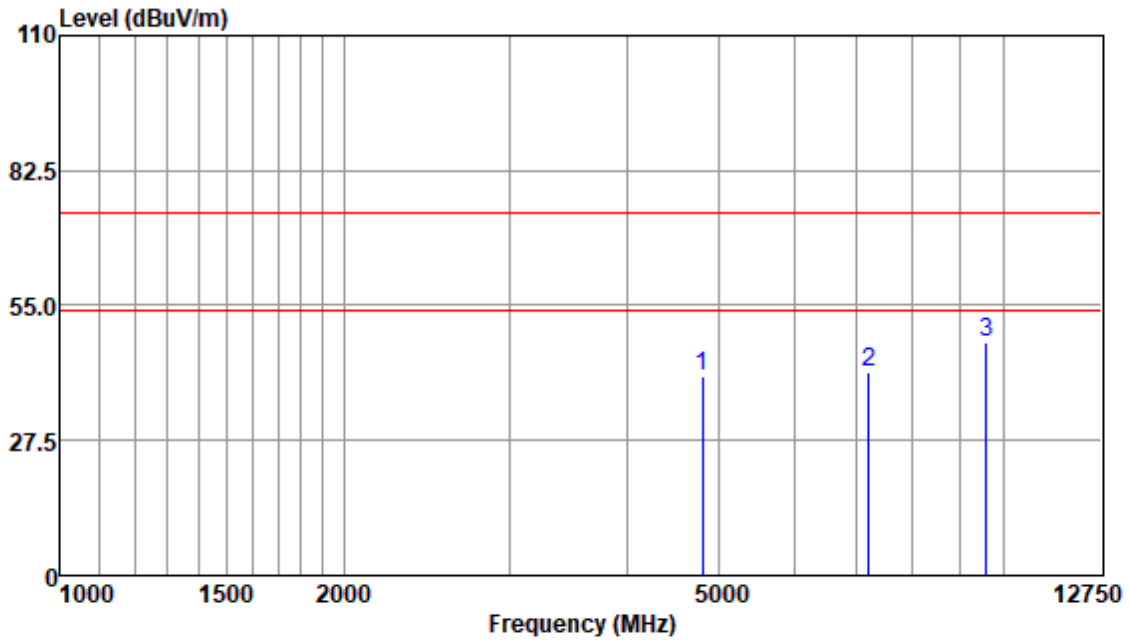


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4804.00	43.21	30.87	5.09	40.46	74.00	-33.54	Peak
7206.00	39.36	33.35	5.75	41.28	74.00	-32.72	Peak
9608.00	39.56	35.16	6.78	47.32	74.00	-26.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low; Date Rate:1Mbps

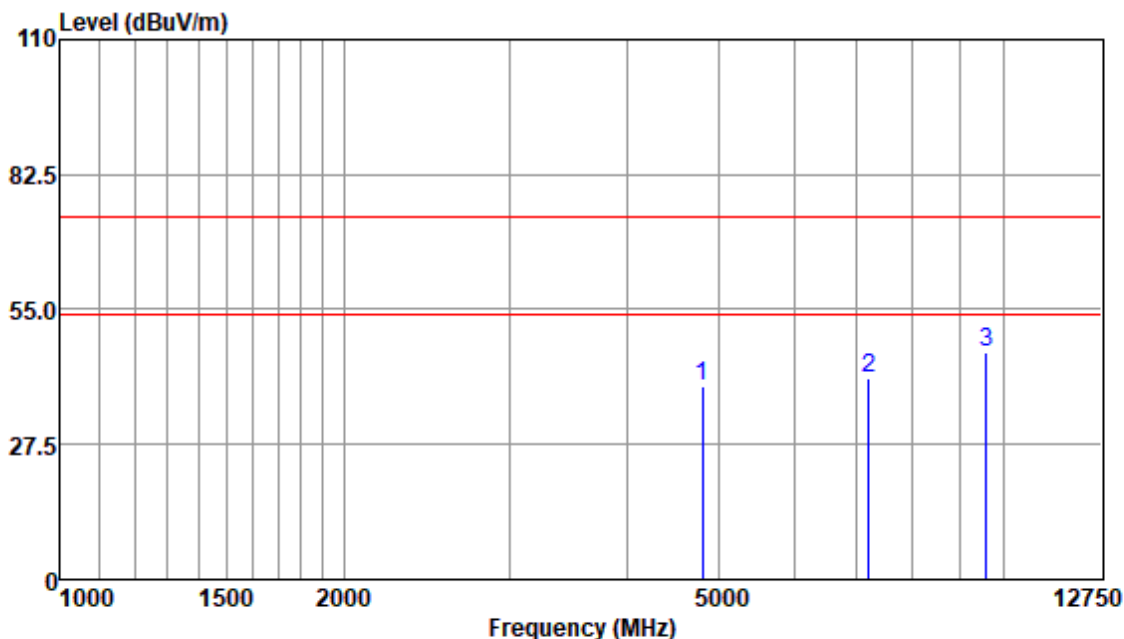


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4804.00	42.08	30.87	5.09	39.33	74.00	-34.67	Peak
7206.00	39.28	33.35	5.75	41.20	74.00	-32.80	Peak
9608.00	38.63	35.16	6.78	46.39	74.00	-27.61	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss



Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle; Date Rate:1Mbps

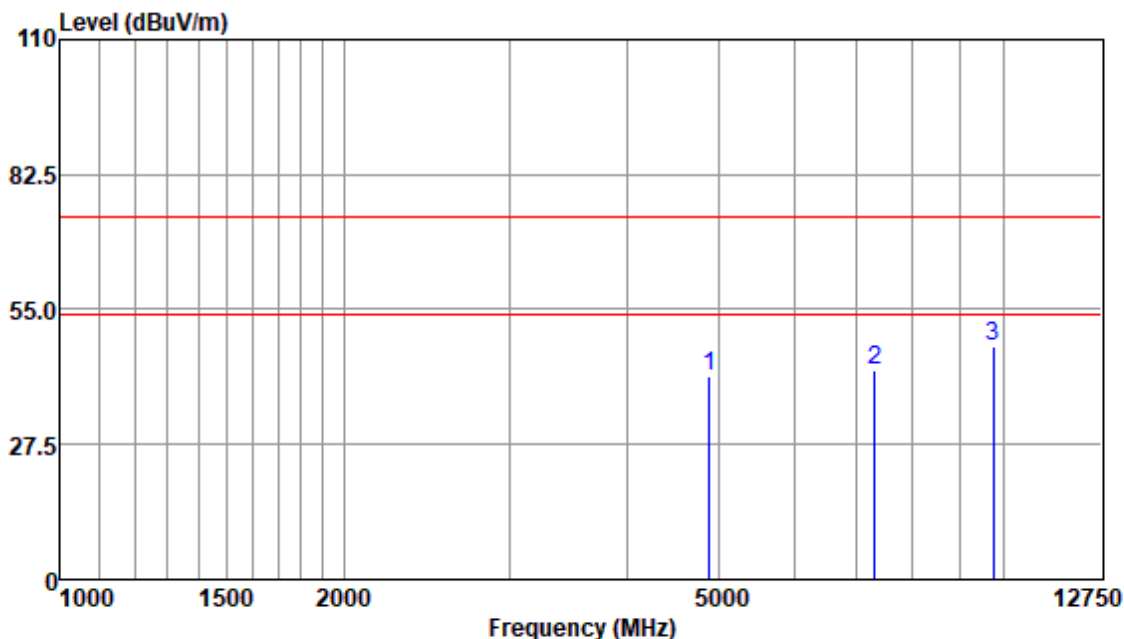


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4880.00	44.52	31.06	4.48	41.28	74.00	-32.72	Peak
7320.00	40.56	33.50	5.80	42.76	74.00	-31.24	Peak
9760.00	39.87	35.10	6.48	47.30	74.00	-26.70	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:middle; Date Rate:1Mbps

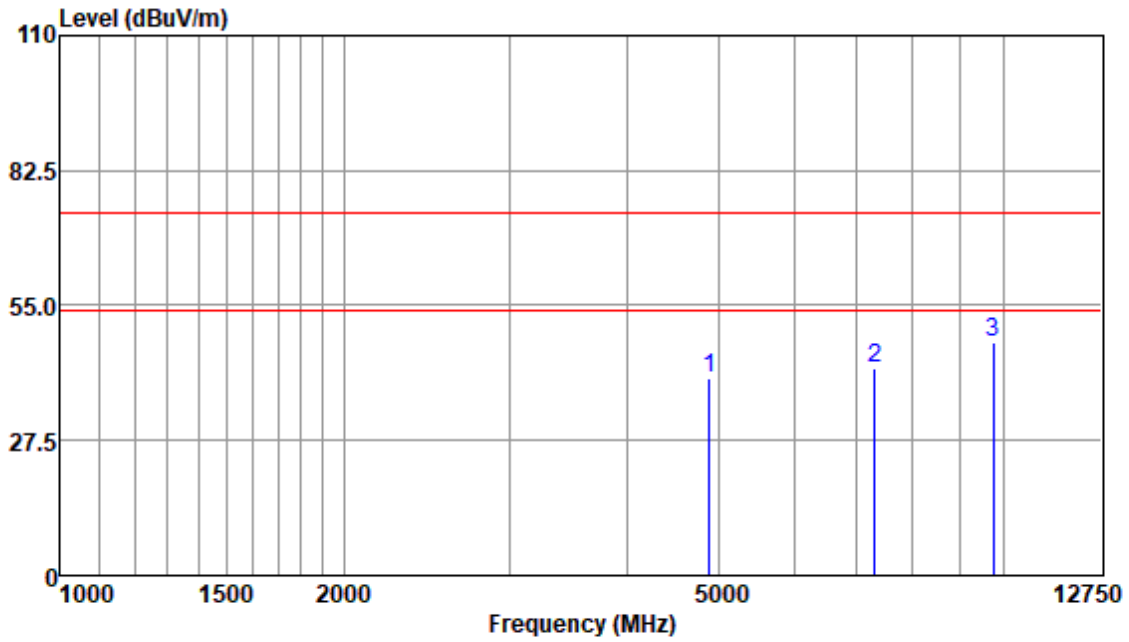


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4880.00	43.57	31.06	4.48	40.33	74.00	-33.67	Peak
7320.00	40.10	33.50	5.80	42.30	74.00	-31.70	Peak
9760.00	40.19	35.10	6.48	47.62	74.00	-26.38	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High; Date Rate:1Mbps

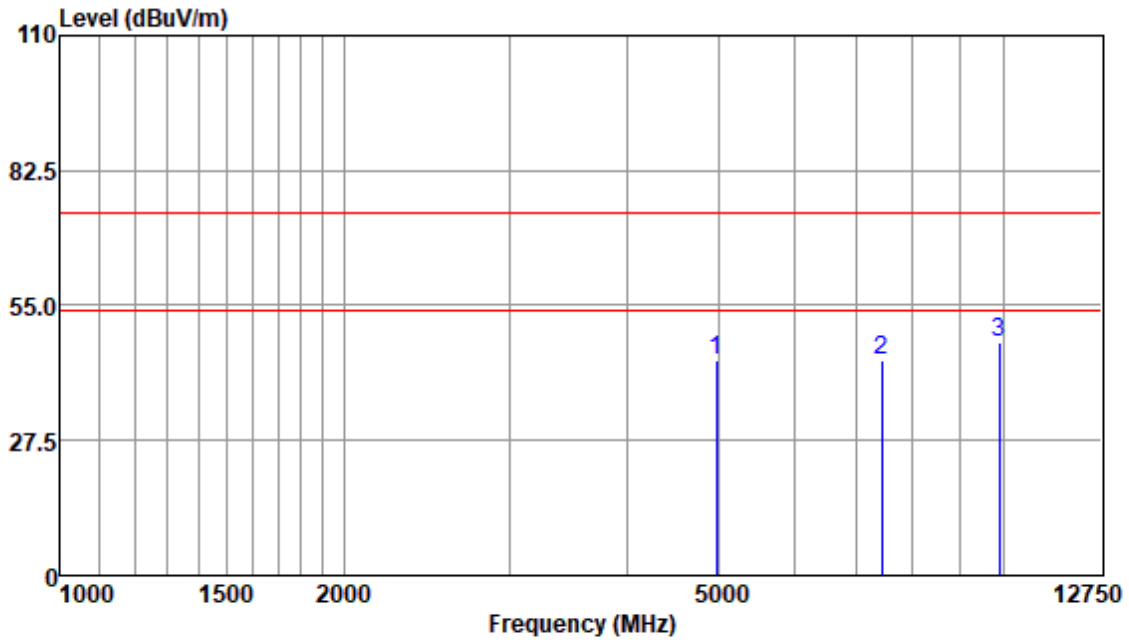


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4960.00	46.28	31.29	5.04	43.74	74.00	-30.26	Peak
7440.00	41.36	33.62	6.09	44.04	74.00	-29.96	Peak
9920.00	40.11	35.03	6.53	47.56	74.00	-26.44	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High; Date Rate:1Mbps

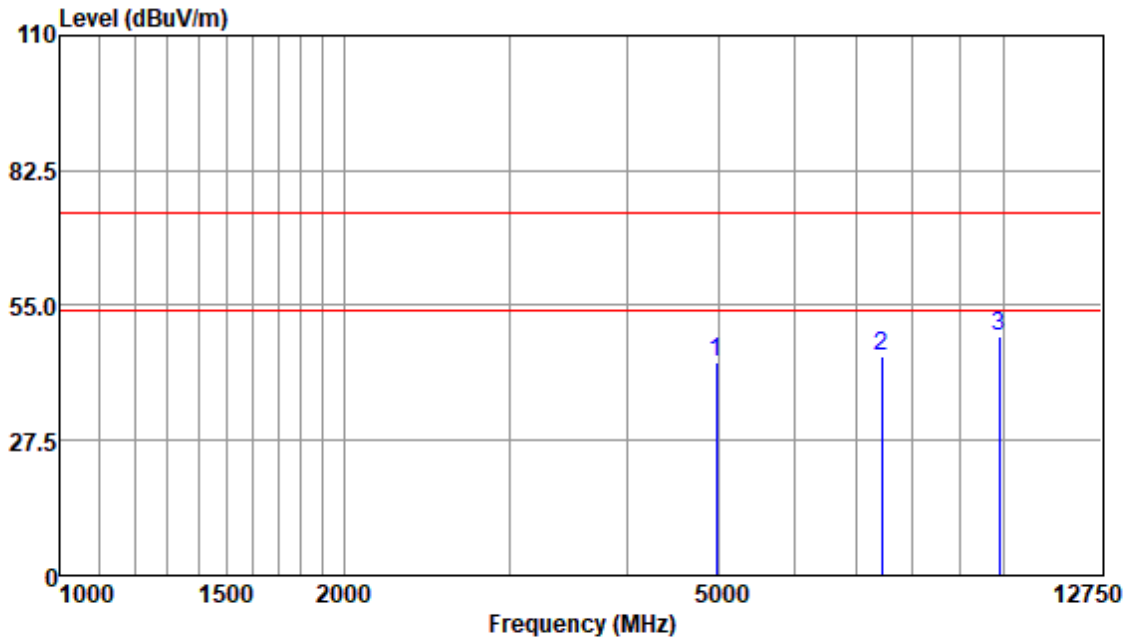


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4960.00	45.91	31.29	5.04	43.37	74.00	-30.63	Peak
7440.00	41.93	33.62	6.09	44.61	74.00	-29.39	Peak
9920.00	41.12	35.03	6.53	48.57	74.00	-25.43	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low; Date Rate:2Mbps

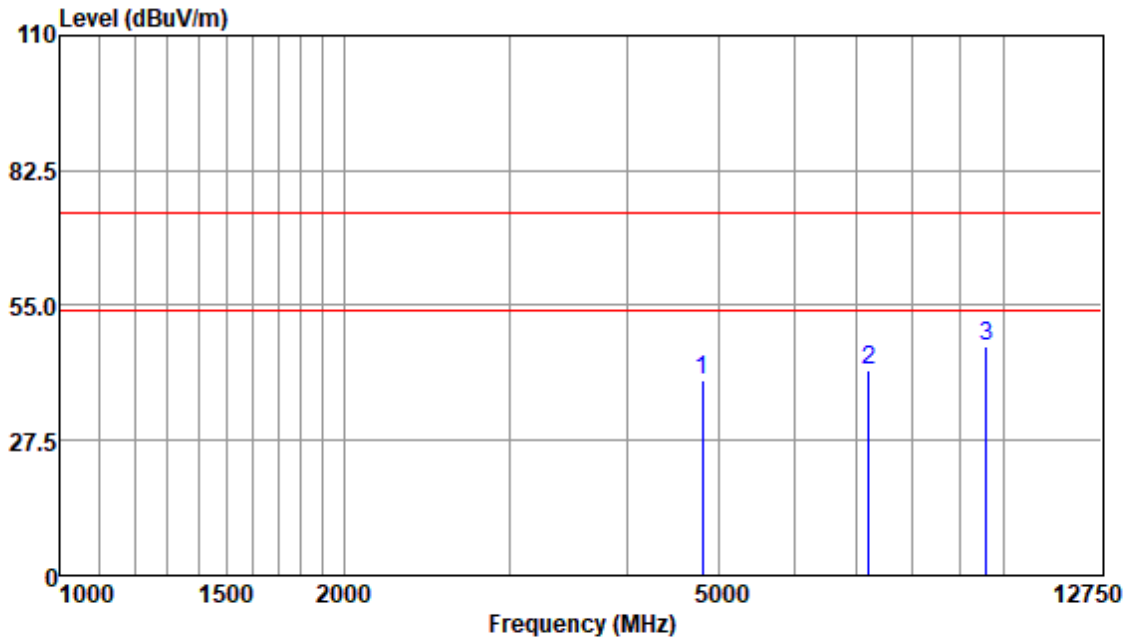


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4804.00	42.35	30.87	5.09	39.60	74.00	-34.40	Peak
7206.00	39.95	33.35	5.75	41.87	74.00	-32.13	Peak
9608.00	39.02	35.16	6.78	46.78	74.00	-27.22	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low; Date Rate:2Mbps

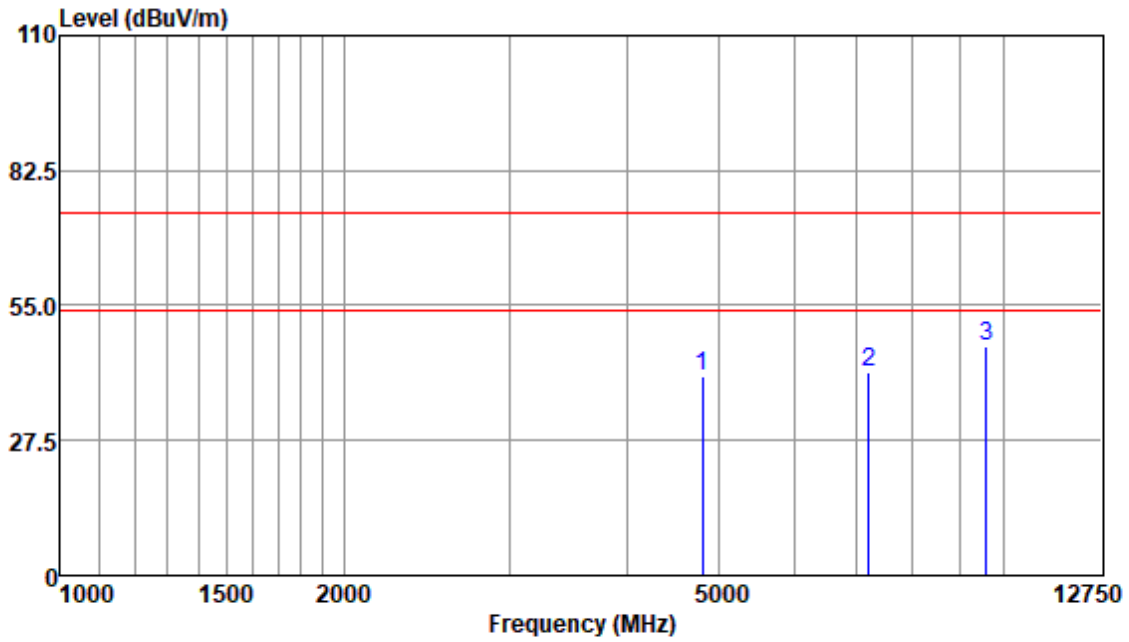


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4804.00	43.23	30.87	5.09	40.48	74.00	-33.52	Peak
7206.00	39.45	33.35	5.75	41.37	74.00	-32.63	Peak
9608.00	39.09	35.16	6.78	46.85	74.00	-27.15	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle; Date Rate:2Mbps

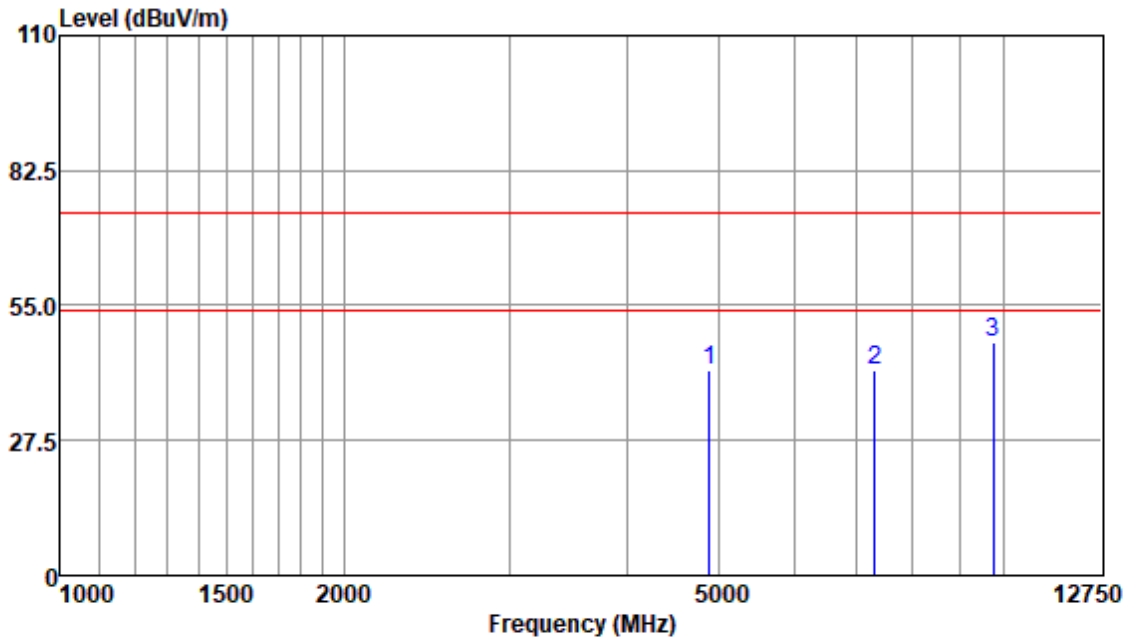


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4880.00	45.08	31.06	4.48	41.84	74.00	-32.16	Peak
7320.00	39.53	33.50	5.80	41.73	74.00	-32.27	Peak
9760.00	40.09	35.10	6.48	47.52	74.00	-26.48	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:middle; Date Rate:2Mbps

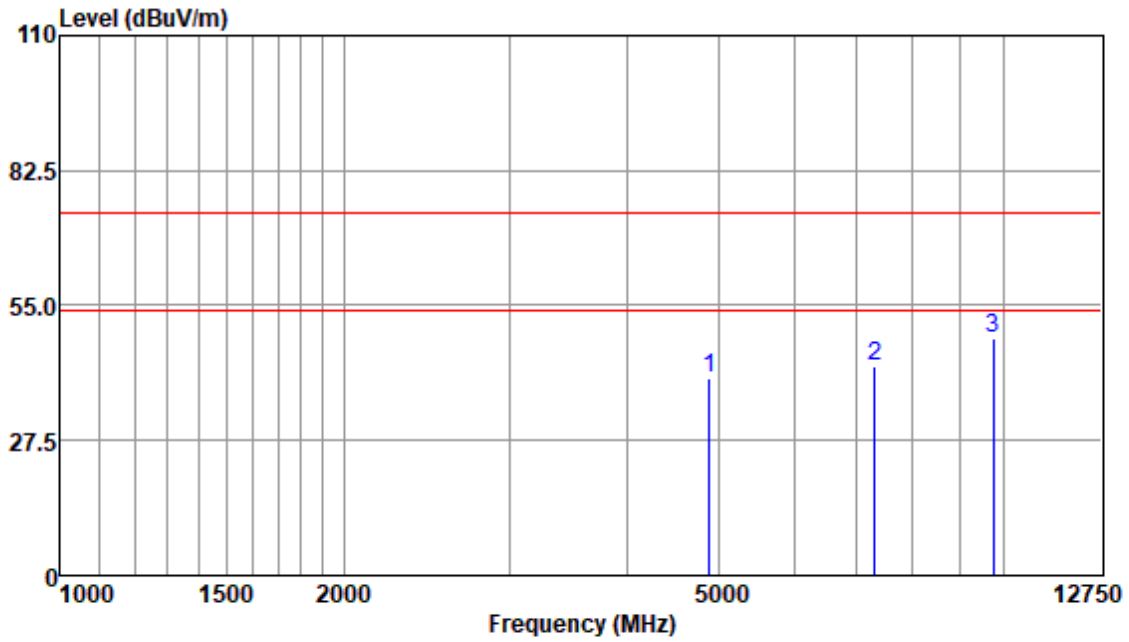


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4880.00	43.49	31.06	4.48	40.25	74.00	-33.75	Peak
7320.00	40.55	33.50	5.80	42.75	74.00	-31.25	Peak
9760.00	40.71	35.10	6.48	48.14	74.00	-25.86	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss



Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High; Date Rate:2Mbps

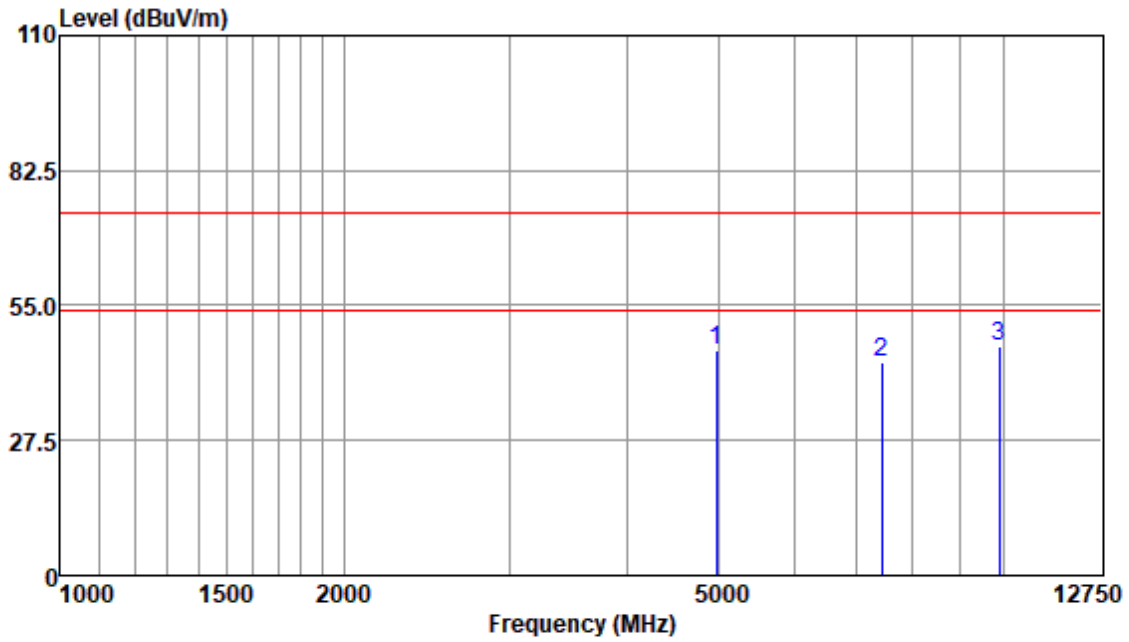


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4960.00	48.51	31.29	5.04	45.97	74.00	-28.03	Peak
7440.00	40.62	33.62	6.09	43.30	74.00	-30.70	Peak
9920.00	39.23	35.03	6.53	46.68	74.00	-27.32	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High; Date Rate:2Mbps

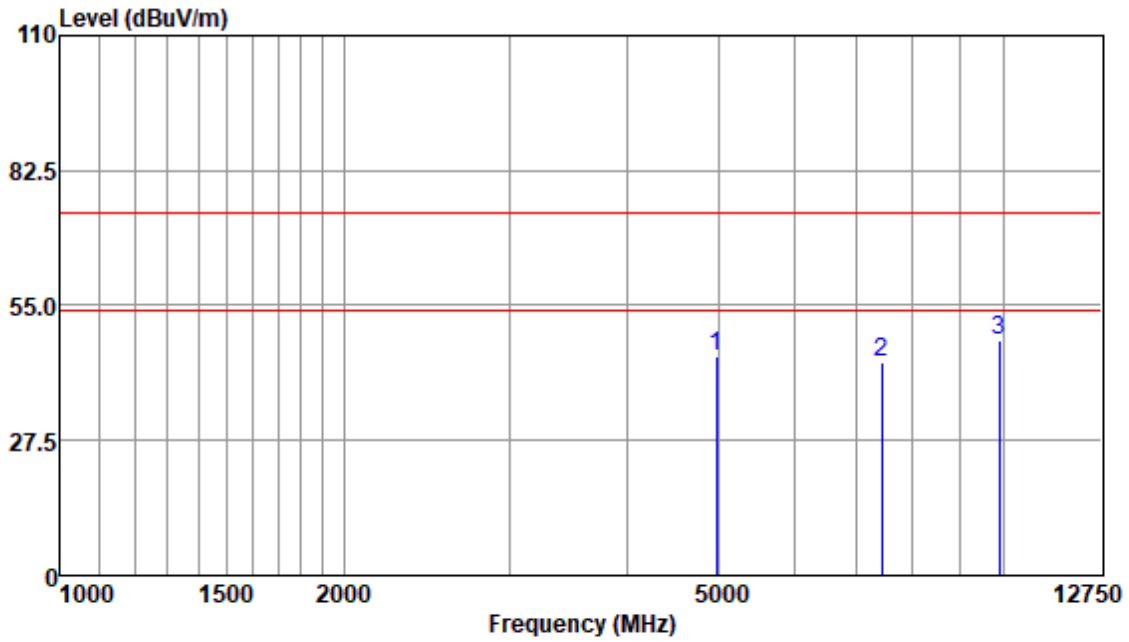

Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dBuv/m	dBuv/m	dB	
4960.00	47.02	31.29	5.04	44.48	74.00	-29.52	Peak
7440.00	40.71	33.62	6.09	43.39	74.00	-30.61	Peak
9920.00	40.48	35.03	6.53	47.93	74.00	-26.07	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss


### 7.8 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
 Test Method: ANSI C63.10 Section 6.9.3

#### 7.8.1 E.U.T. Operation

Operating Environment:  
 Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar  
 Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK modulation

#### 7.8.2 Test Setup Diagram

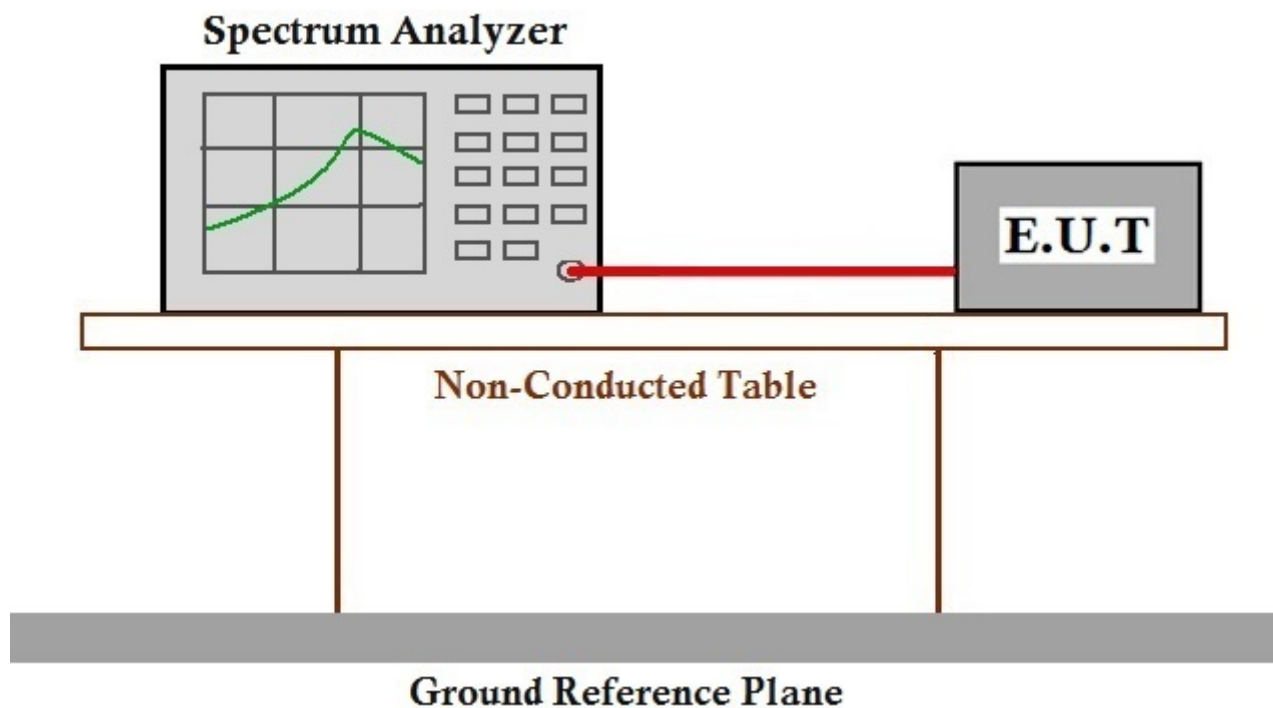

#### 7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM200600438101



## 8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

## 9 EUT Constructional Details


Refer to the < External Photos > & < Internal Photos >.

## Appendix A for SHEM200600438101


### 1.6dB Bandwidth

Test Mode	Test Channel	EBW[MHz]		Limit	Verdict
		1M Rate	2M Rate		
BLE	2402	0.74	1.37	0.5	PASS
BLE	2440	0.72	1.37	0.5	PASS
BLE	2480	0.71	1.39	0.5	PASS


6dB Bandwidth\_BLE\_2402(1M Rate)

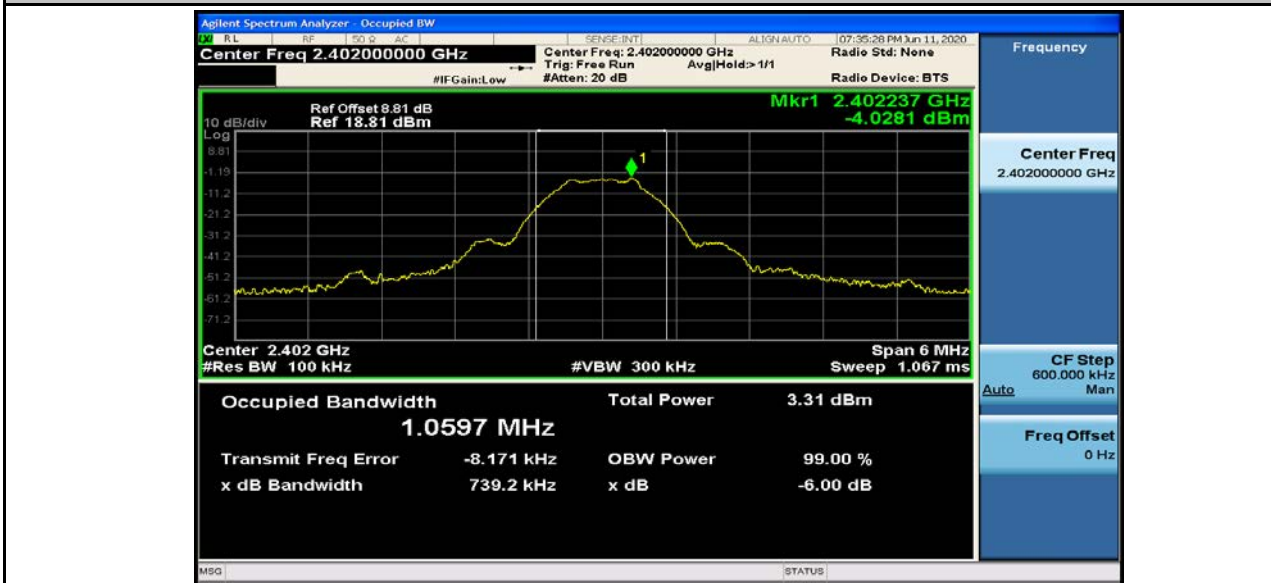

6dB Bandwidth\_BLE\_2440(1M Rate)

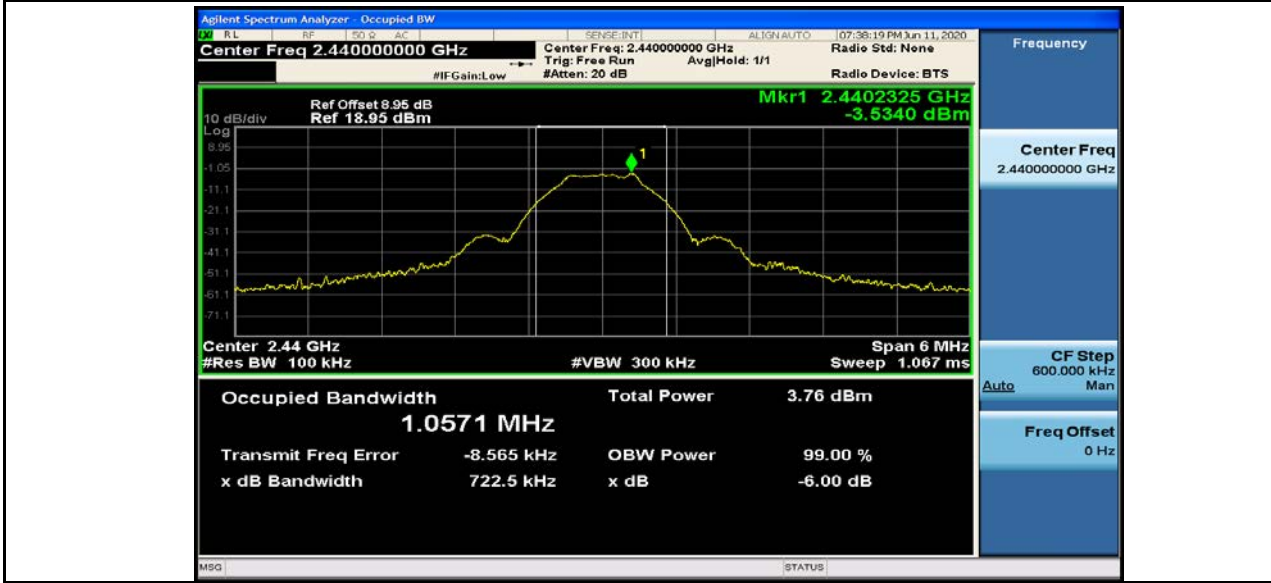

6dB Bandwidth\_BLE\_2480(1M Rate)

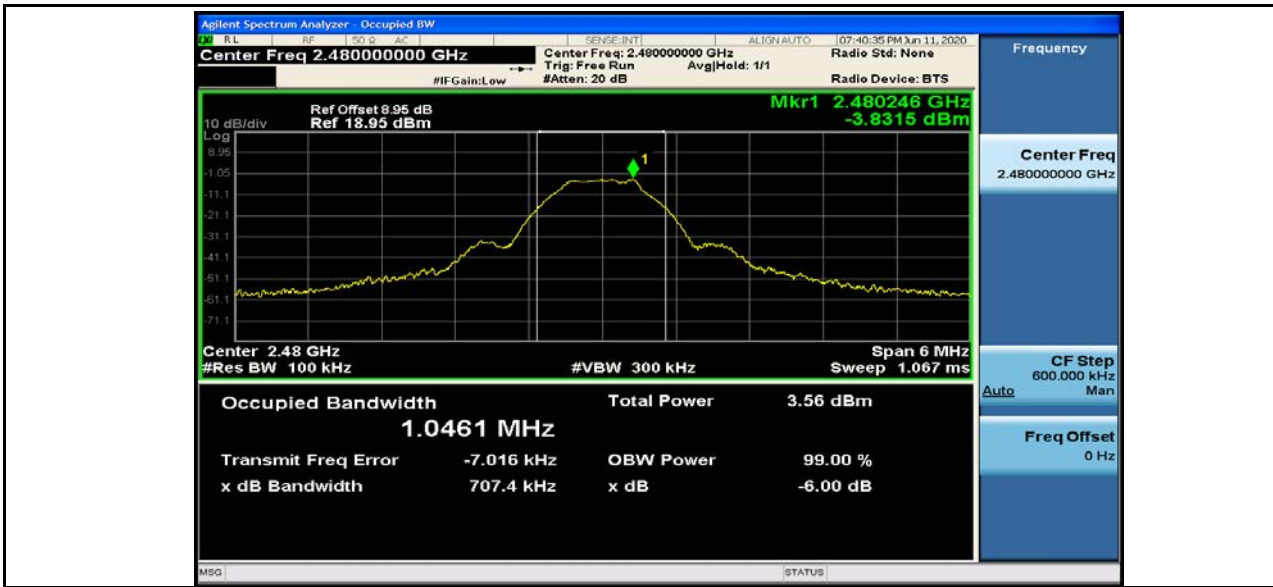


6dB Bandwidth\_BLE\_2402(2M Rate)



6dB Bandwidth\_BLE\_2440(2M Rate)



6dB Bandwidth\_BLE\_2480(2M Rate)

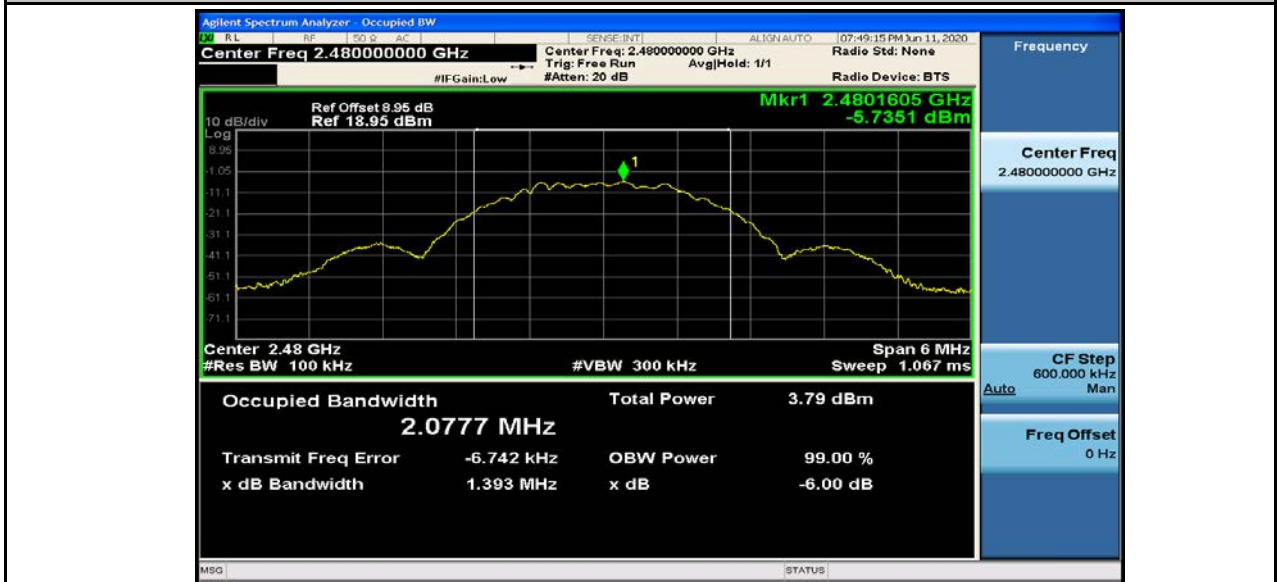





2.Occupied Bandwidth

Test Mode	Test Channel	OBW[MHz]		Limit[MHz]	Verdict
		1M Rate	2M Rate		
BLE	2402	1.06	2.10	---	PASS
BLE	2440	1.06	2.09	---	PASS
BLE	2480	1.05	2.11	---	PASS

Occupied Bandwidth\_BLE\_2402(1M Rate)

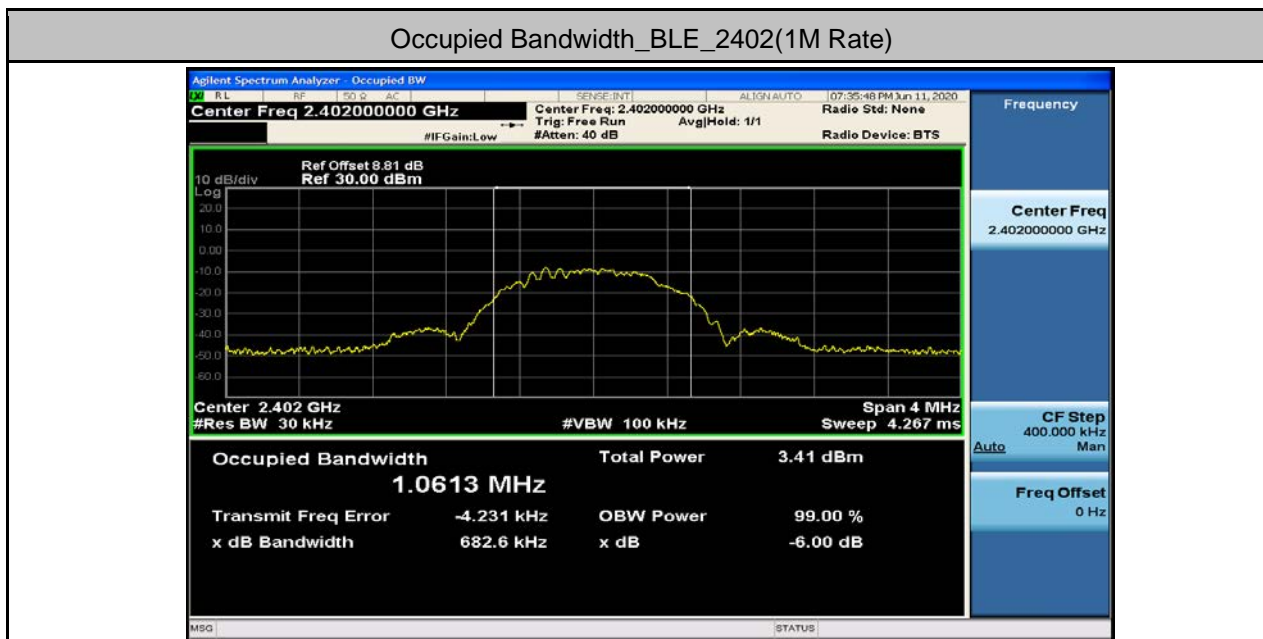


Occupied Bandwidth\_BLE\_2440(1M Rate)

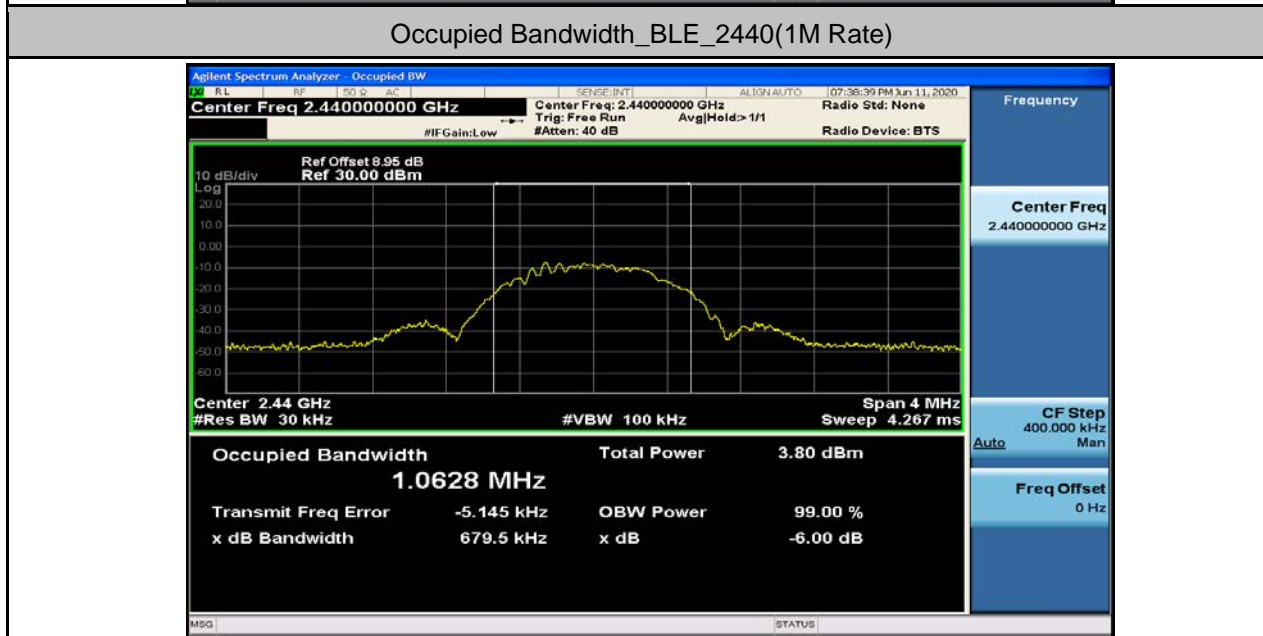


Occupied Bandwidth\_BLE\_2480(1M Rate)




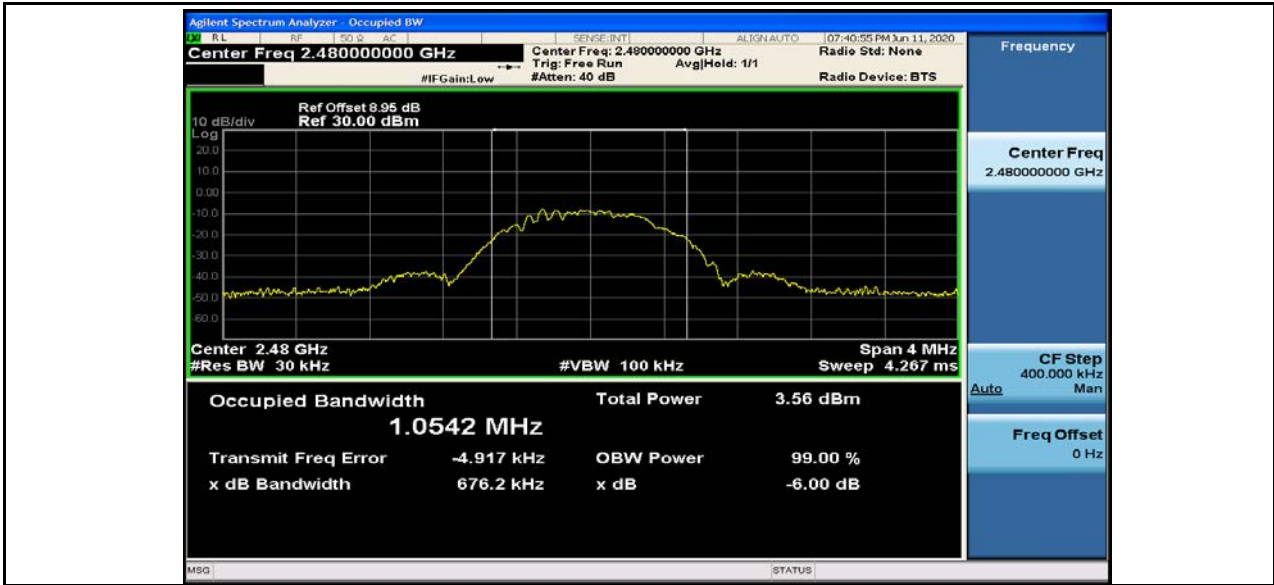


Occupied Bandwidth\_BLE\_2402(2M Rate)

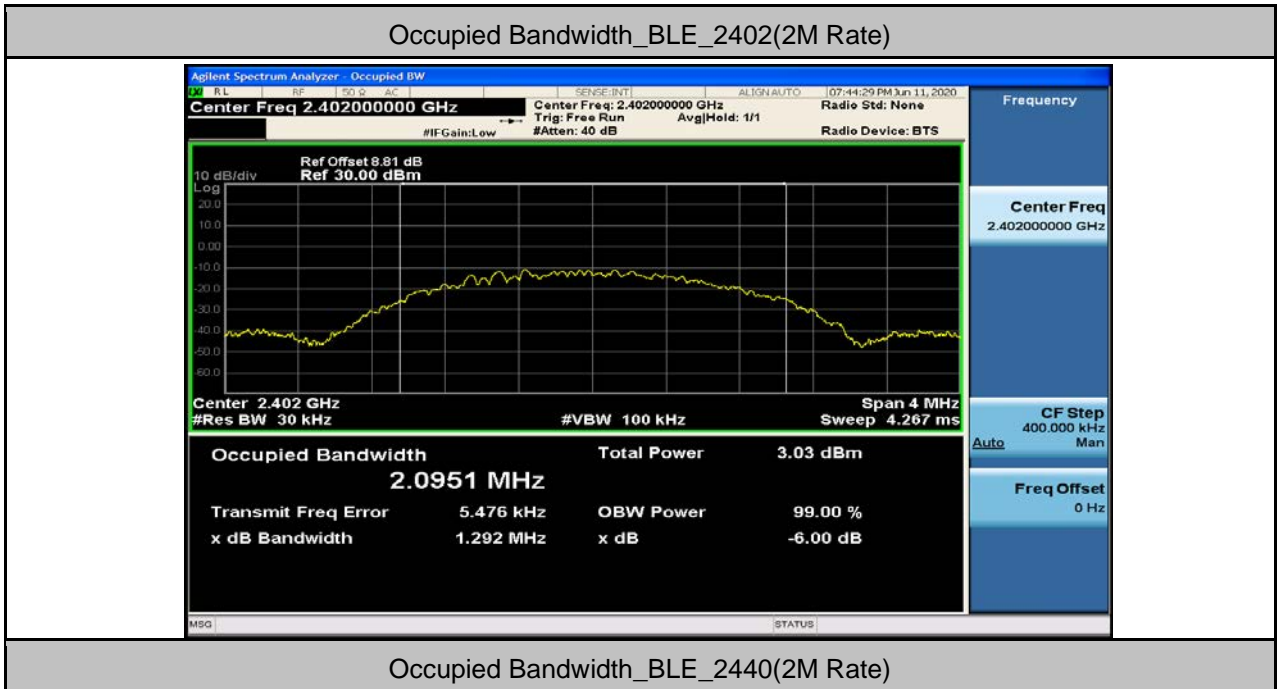

Occupied Bandwidth\_BLE\_2440(2M Rate)

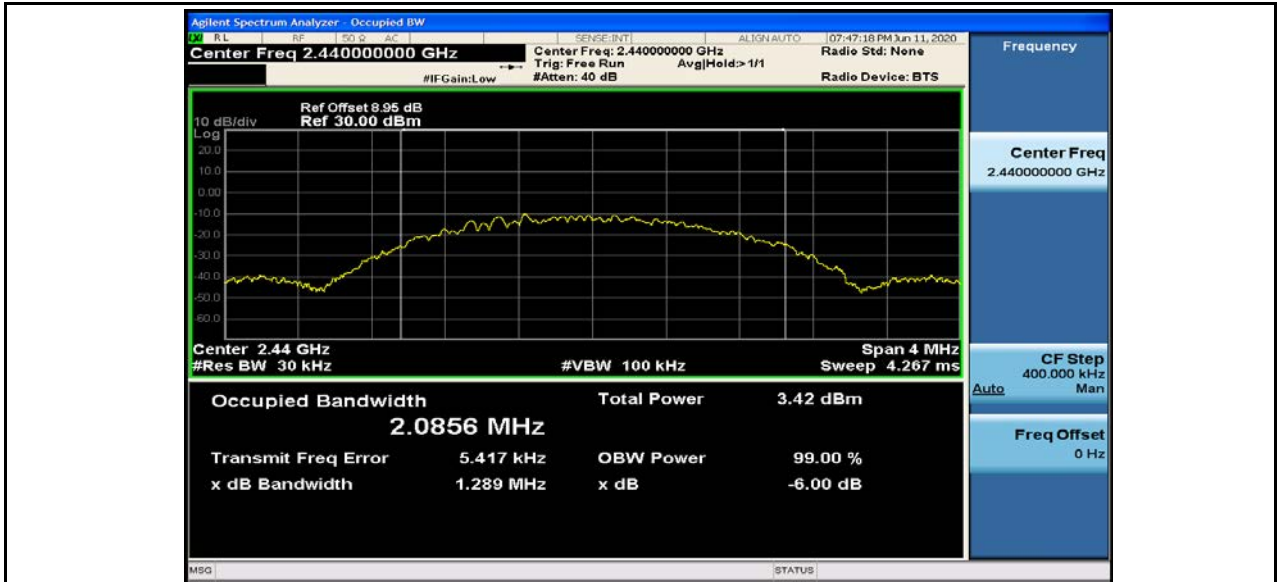


Occupied Bandwidth\_BLE\_2480(2M Rate)

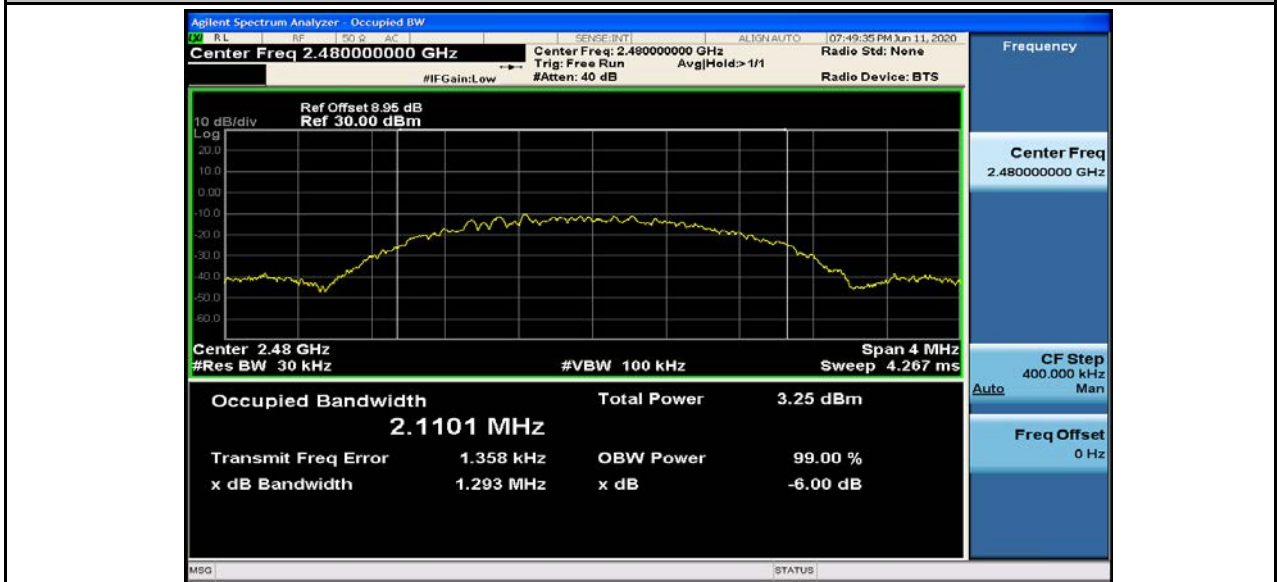


3. Maximum peak conducted output power

Test Mode	Test Channel	Power[dBm]		Limit[dBm]	Verdict
		1M Rate	2M Rate		
BLE	2402	-3.12	-3.11	30	PASS
BLE	2440	-2.71	-2.7	30	PASS
BLE	2480	-2.91	-2.88	30	PASS


Maximum peak conducted output power\_BLE\_2402(1M Rate)

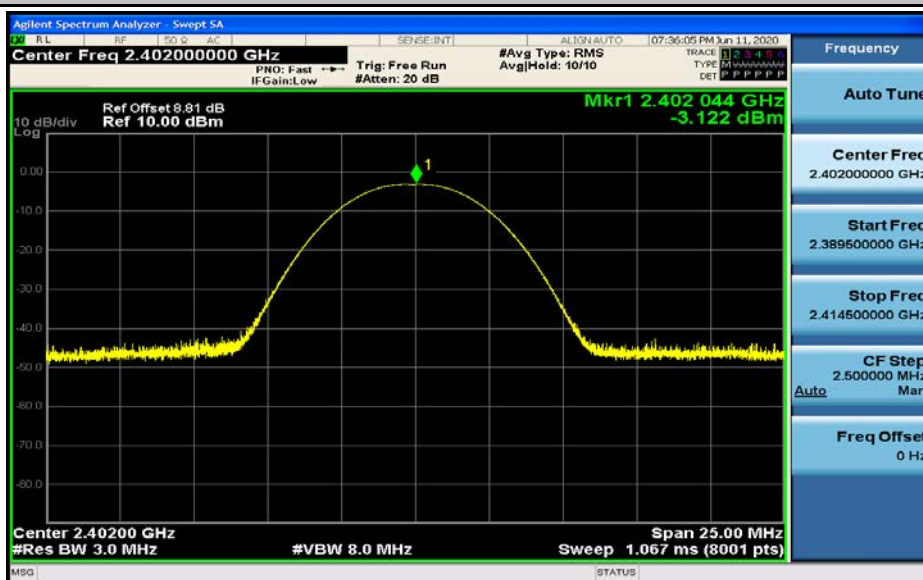


Maximum peak conducted output power\_BLE\_2440(1M Rate)

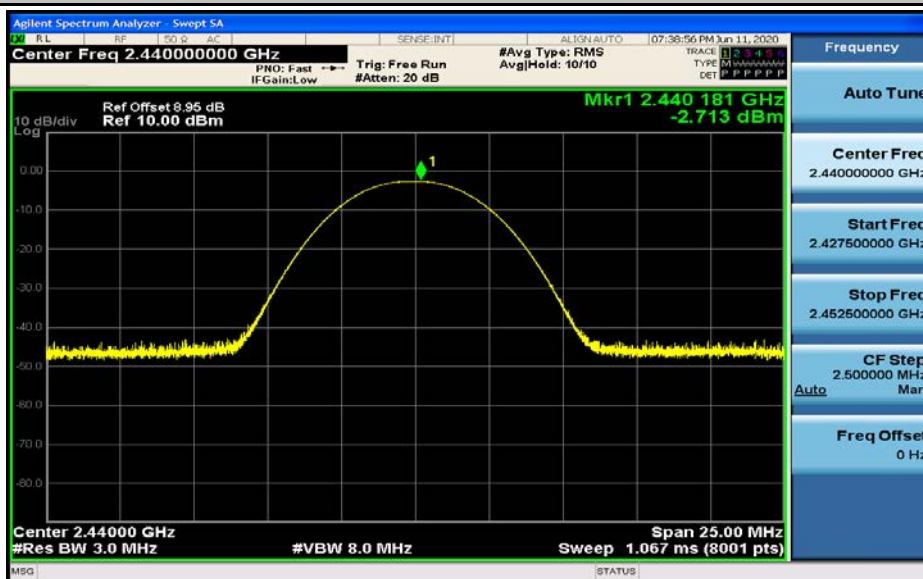


Maximum peak conducted output power\_BLE\_2480(1M Rate)

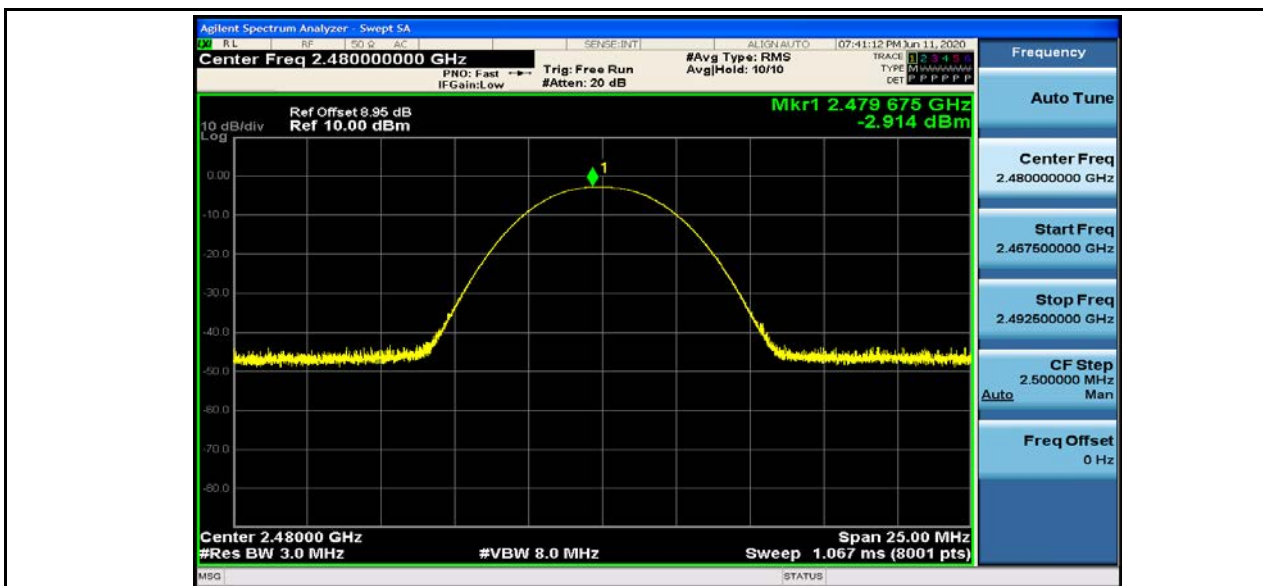


Maximum peak conducted output power\_BLE\_2402(2M Rate)

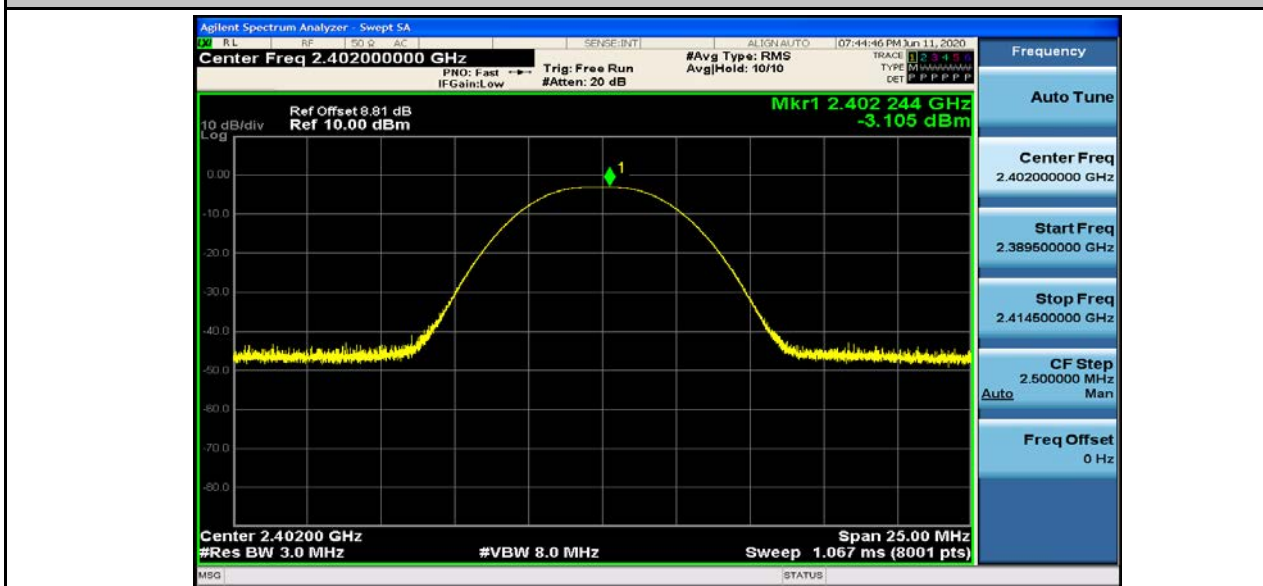

Maximum peak conducted output power\_BLE\_2440(2M Rate)

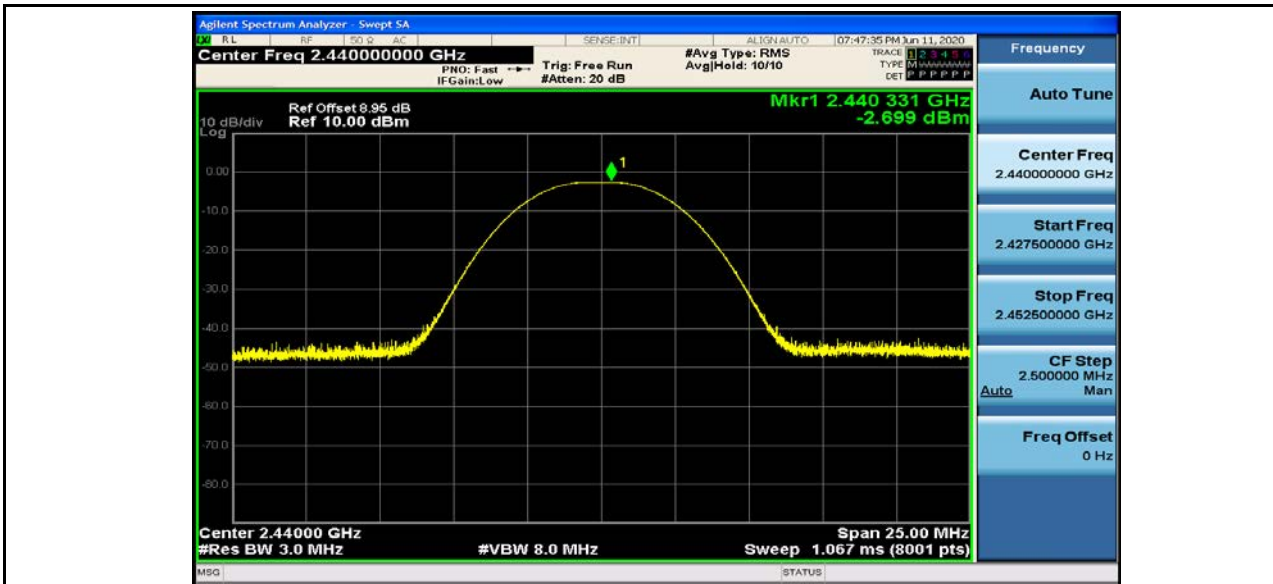

Maximum peak conducted output power\_BLE\_2480(2M Rate)

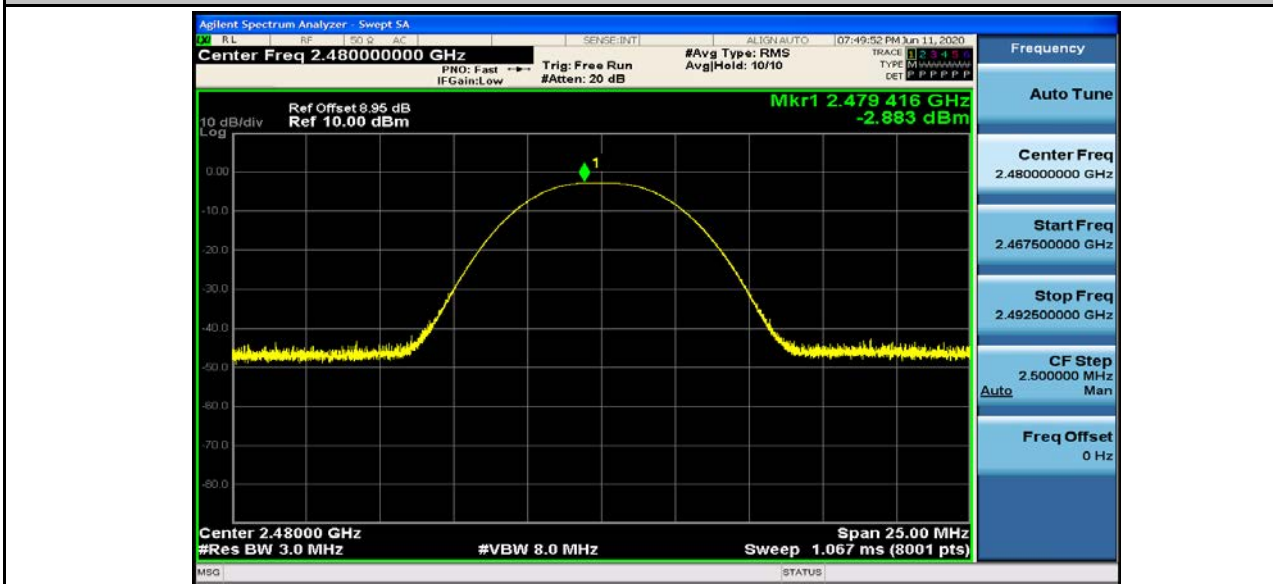



4. Maximum Peak power spectral density

Test Mode	Test Channel	PSD[dBm/3kHz]		Limit[dBm/3kHz]	Verdict
		1M Rate	2M Rate		
BLE	2402	-19.7	-24.82	8.00	PASS
BLE	2440	-19.15	-24.31	8.00	PASS
BLE	2480	-18.96	-24.56	8.00	PASS

Maximum Peak power spectral density\_BLE\_2402(1M Rate)




Maximum Peak power spectral density\_BLE\_2440(1M Rate)



Maximum Peak power spectral density\_BLE\_2480(1M Rate)



Maximum Peak power spectral density\_BLE\_2402(2M Rate)

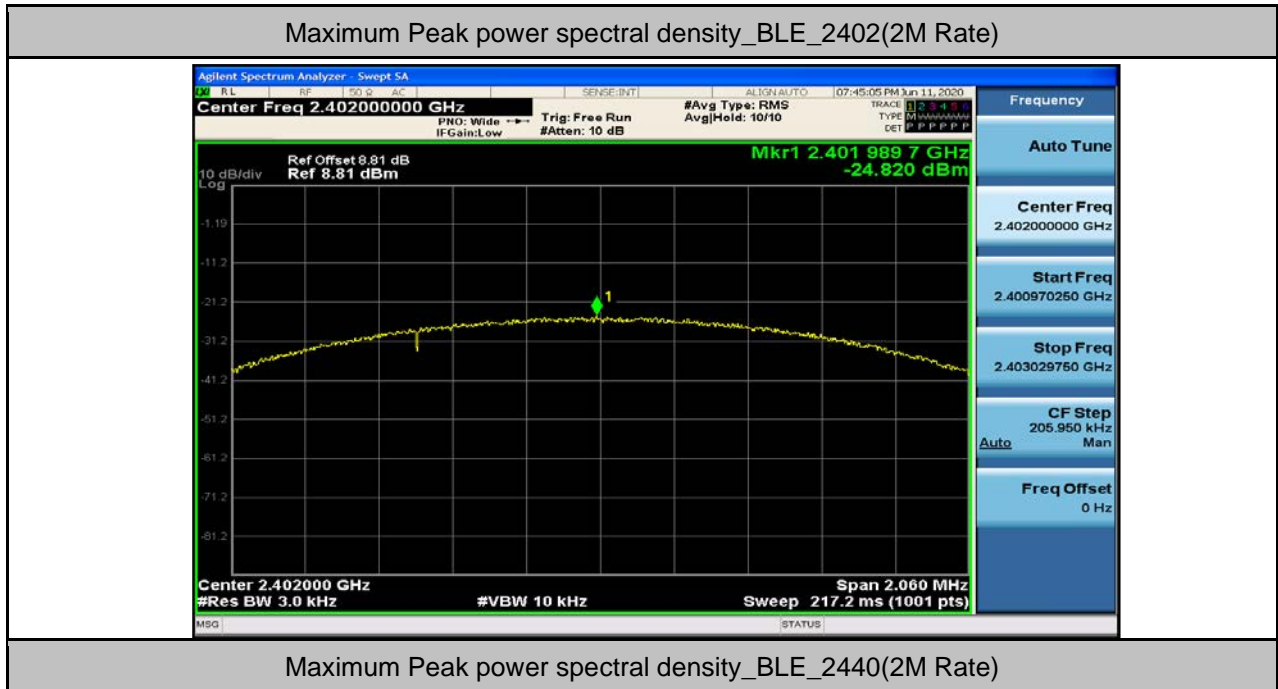

Maximum Peak power spectral density\_BLE\_2440(2M Rate)



Maximum Peak power spectral density\_BLE\_2480(2M Rate)







5. Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]		Max. Spurious Level [dBm]		Limit [dBm]		Verdict
		1M Rate	2M Rate	1M Rate	2M Rate	1M Rate	2M Rate	
BLE	2402	-3.93	-5.57	-48.48	-37.30	-23.93	-25.57	PASS
BLE	2480	-3.67	-5.41	-59.17	-62.40	-23.67	-25.41	PASS


Band-edge for RF Conducted Emissions\_BLE\_2402(1M Rate)

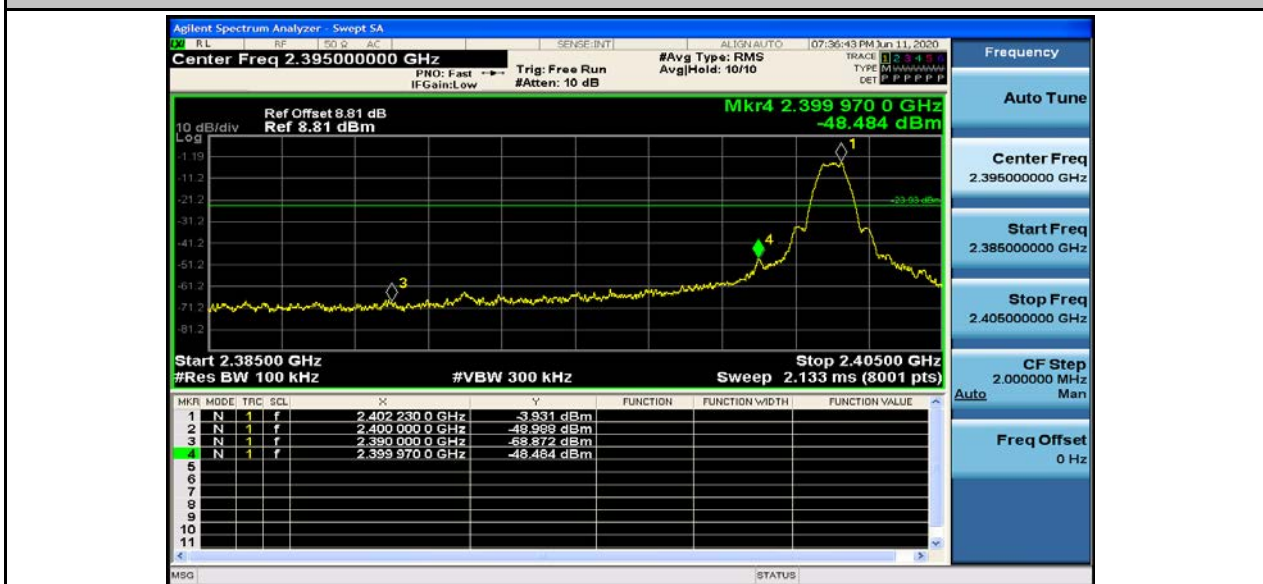


Band-edge for RF Conducted Emissions\_BLE\_2480(1M Rate)

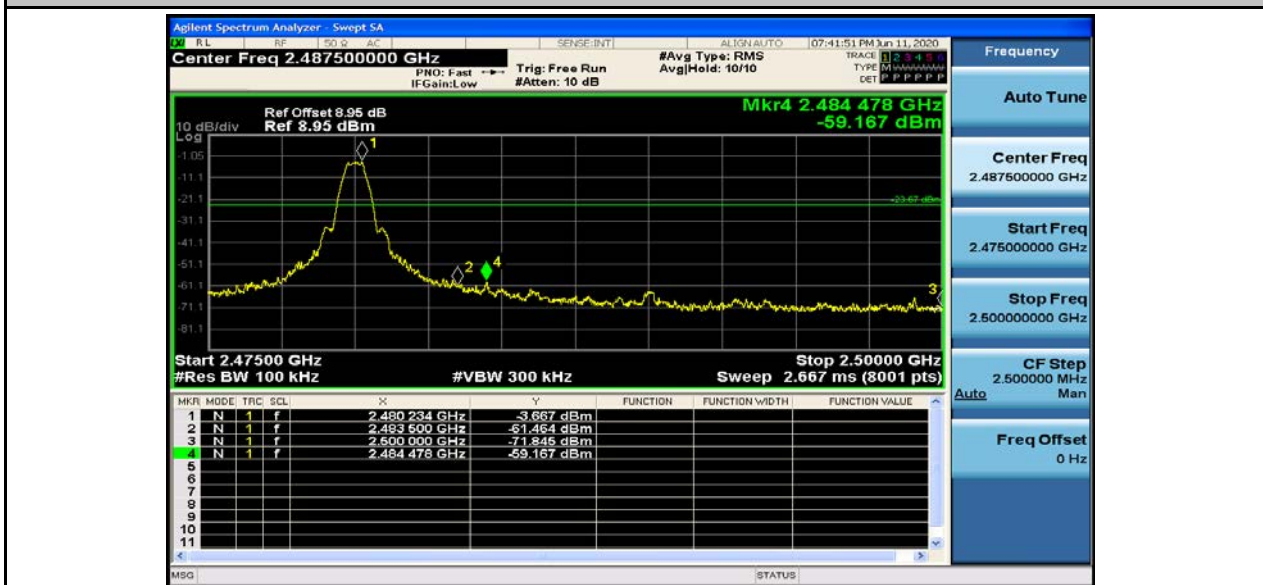

Band-edge for RF Conducted Emissions\_BLE\_2402(2M Rate)

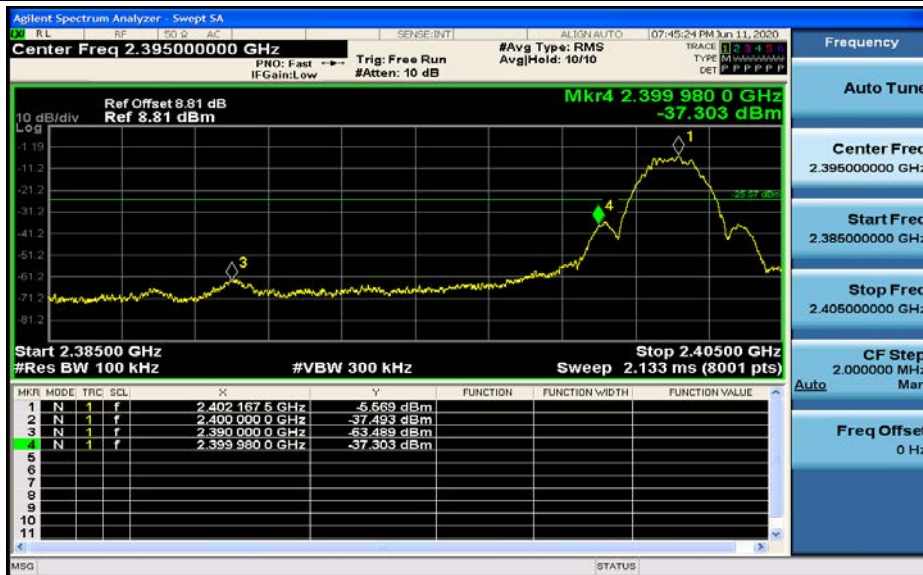


Band-edge for RF Conducted Emissions\_BLE\_2480(2M Rate)

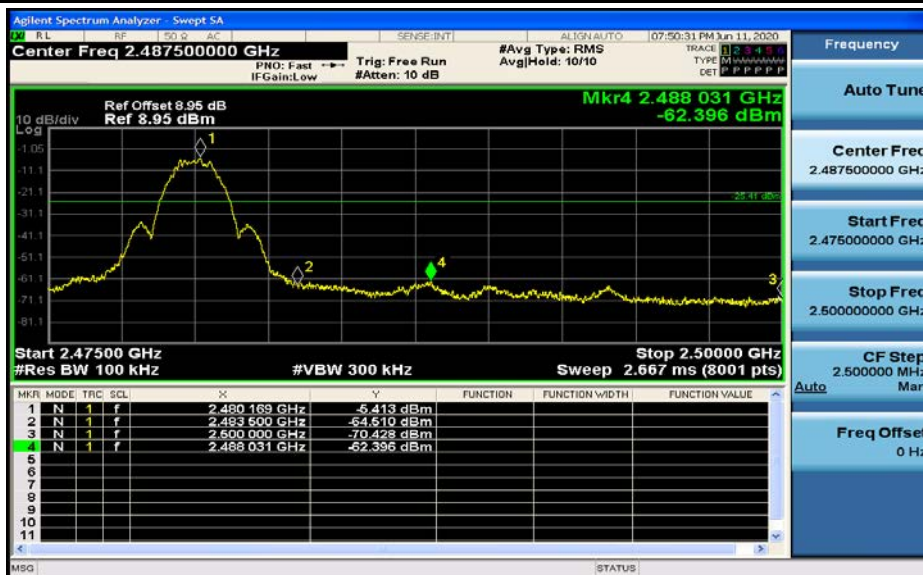


6.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]		Max. Level [dBm]		Limit [dBm]		Verdict
						1M Rate	2M Rate	1M Rate	2M Rate	1M Rate	2M Rate	
BLE	2402	30	10000	100	300	-4.06	-6.06	-53.63	-53.61	<- 24.06	<- 26.06	PASS
BLE	2402	10000	26000	100	300	-4.06	-6.061	-	-	<- 24.06	<- 26.061	PASS
BLE	2440	30	10000	100	300	-3.63	-5.69	-54.02	-54.31	<- 23.63	<- 25.69	PASS
BLE	2440	10000	26000	100	300	-3.628	-5.693	-	-	<- 23.628	<- 25.693	PASS
BLE	2480	30	10000	100	300	-3.81	-5.93	-53.22	-53.83	<- 23.81	<- 25.93	PASS
BLE	2480	10000	26000	100	300	-3.806	-5.931	-	-	<- 23.806	<- 25.931	PASS

RF Conducted Spurious Emissions\_BLE\_2402(1M Rate)

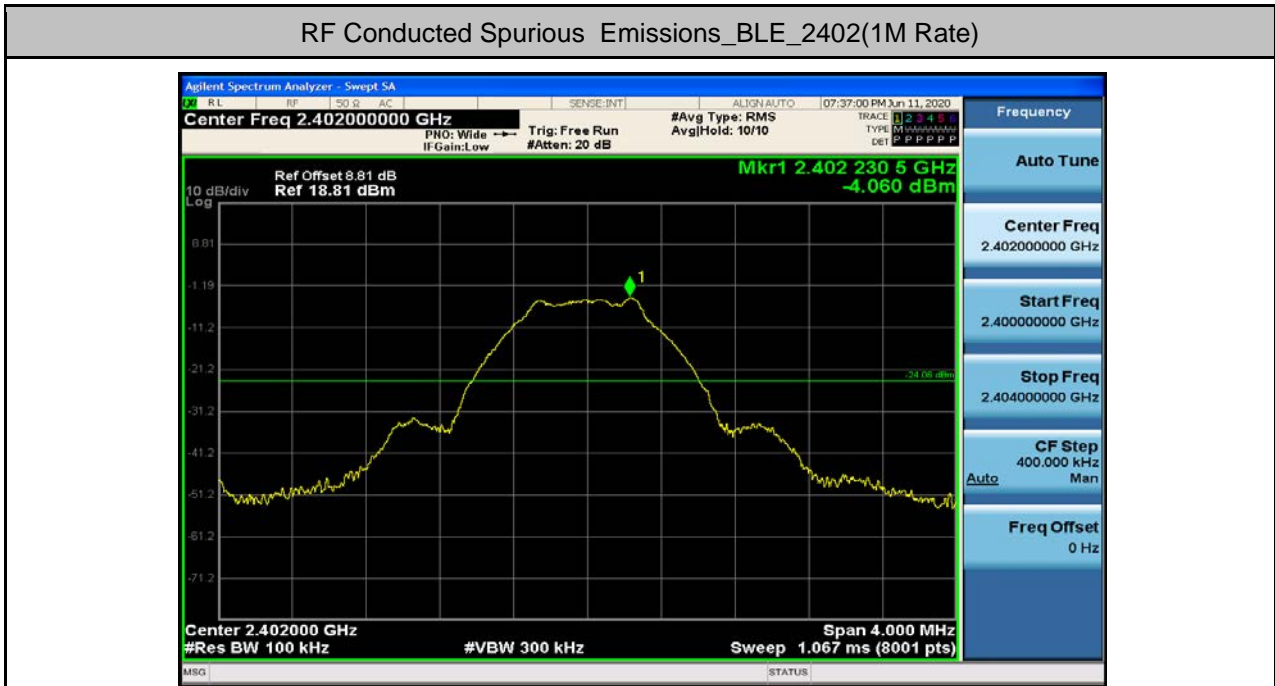


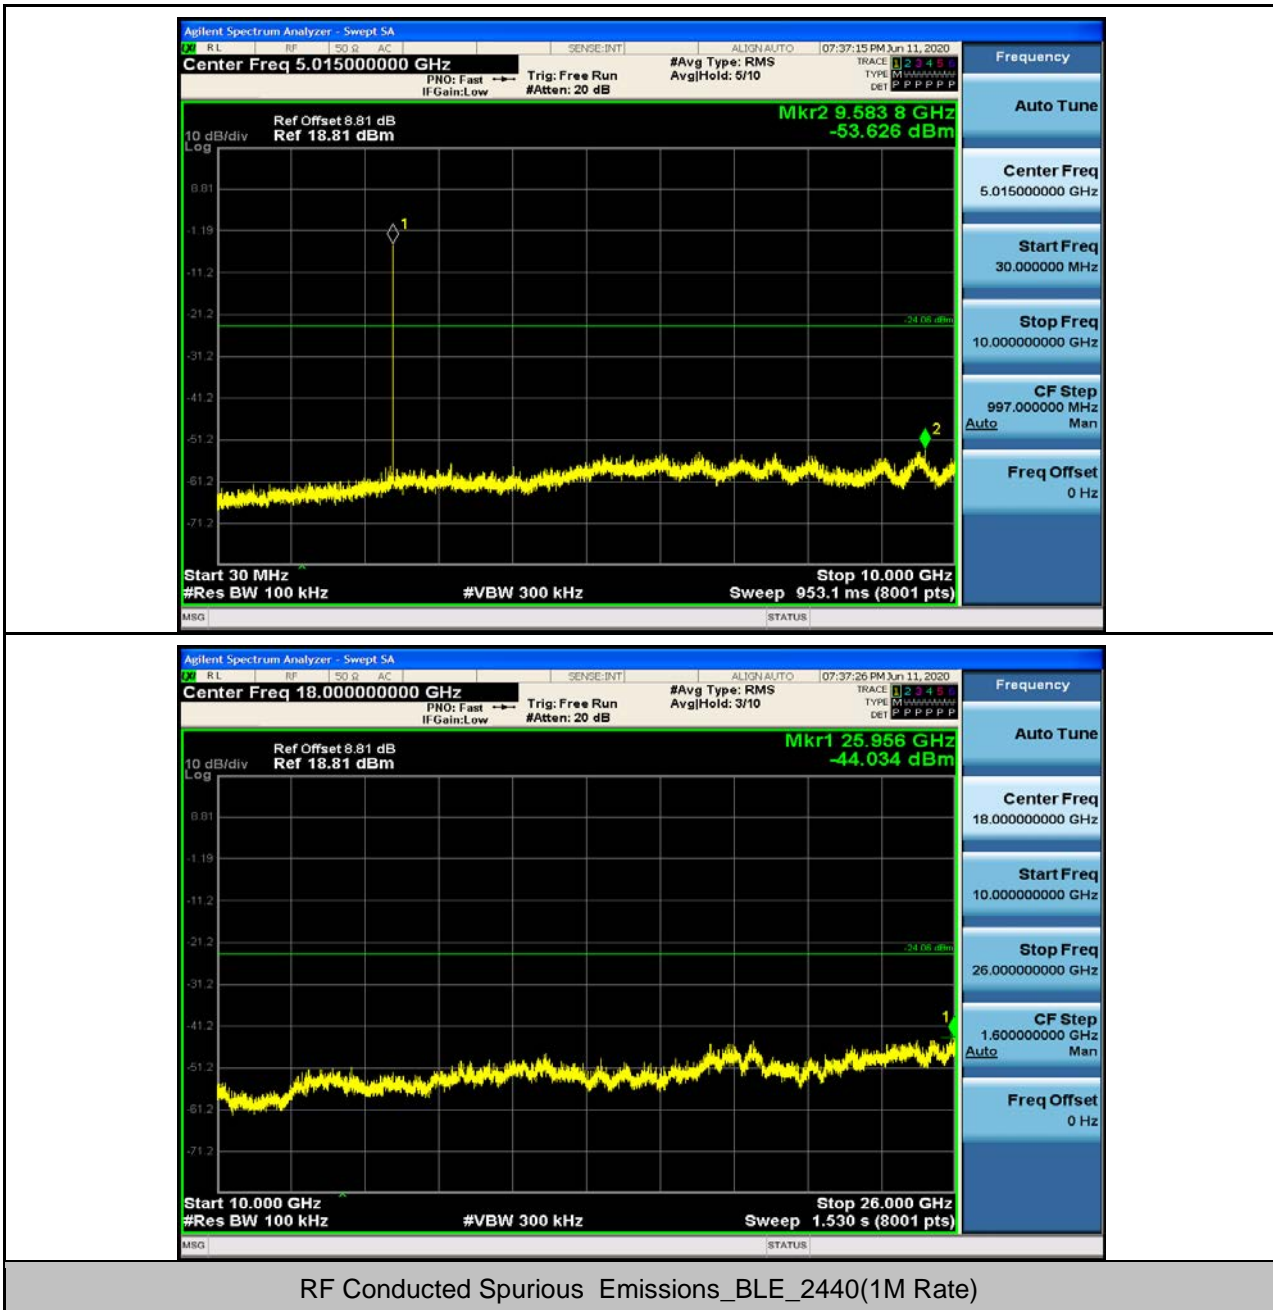

RF Conducted Spurious Emissions\_BLE\_2440(1M Rate)






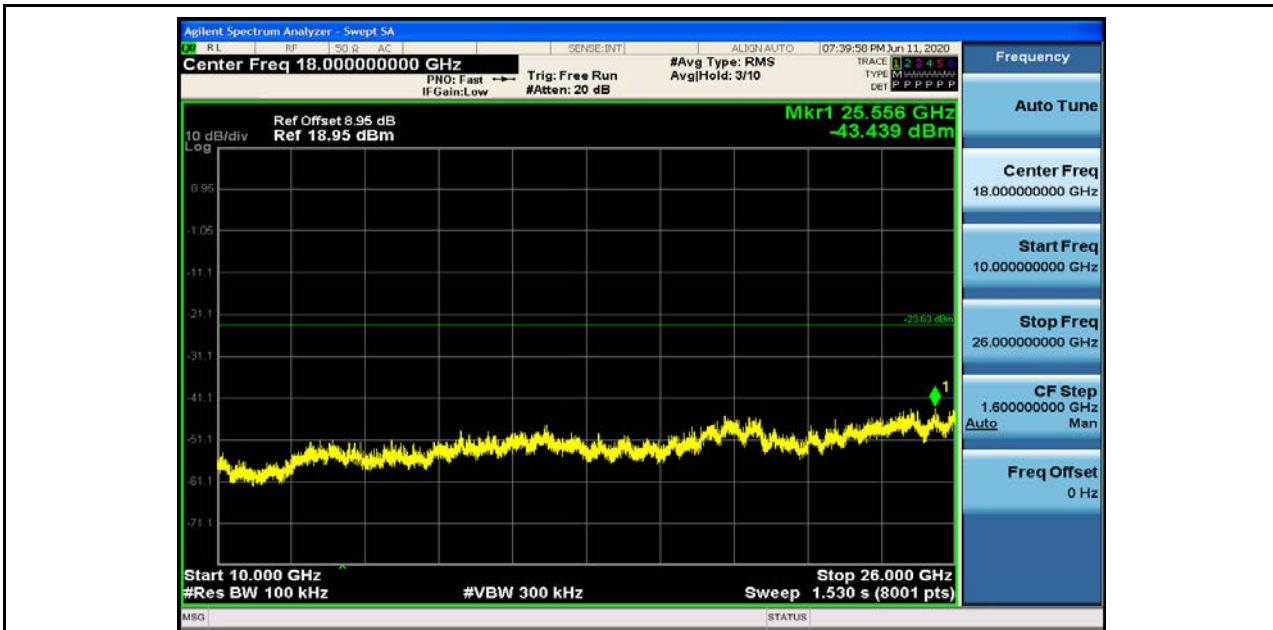


RF Conducted Spurious Emissions\_BLE\_2480(1M Rate)



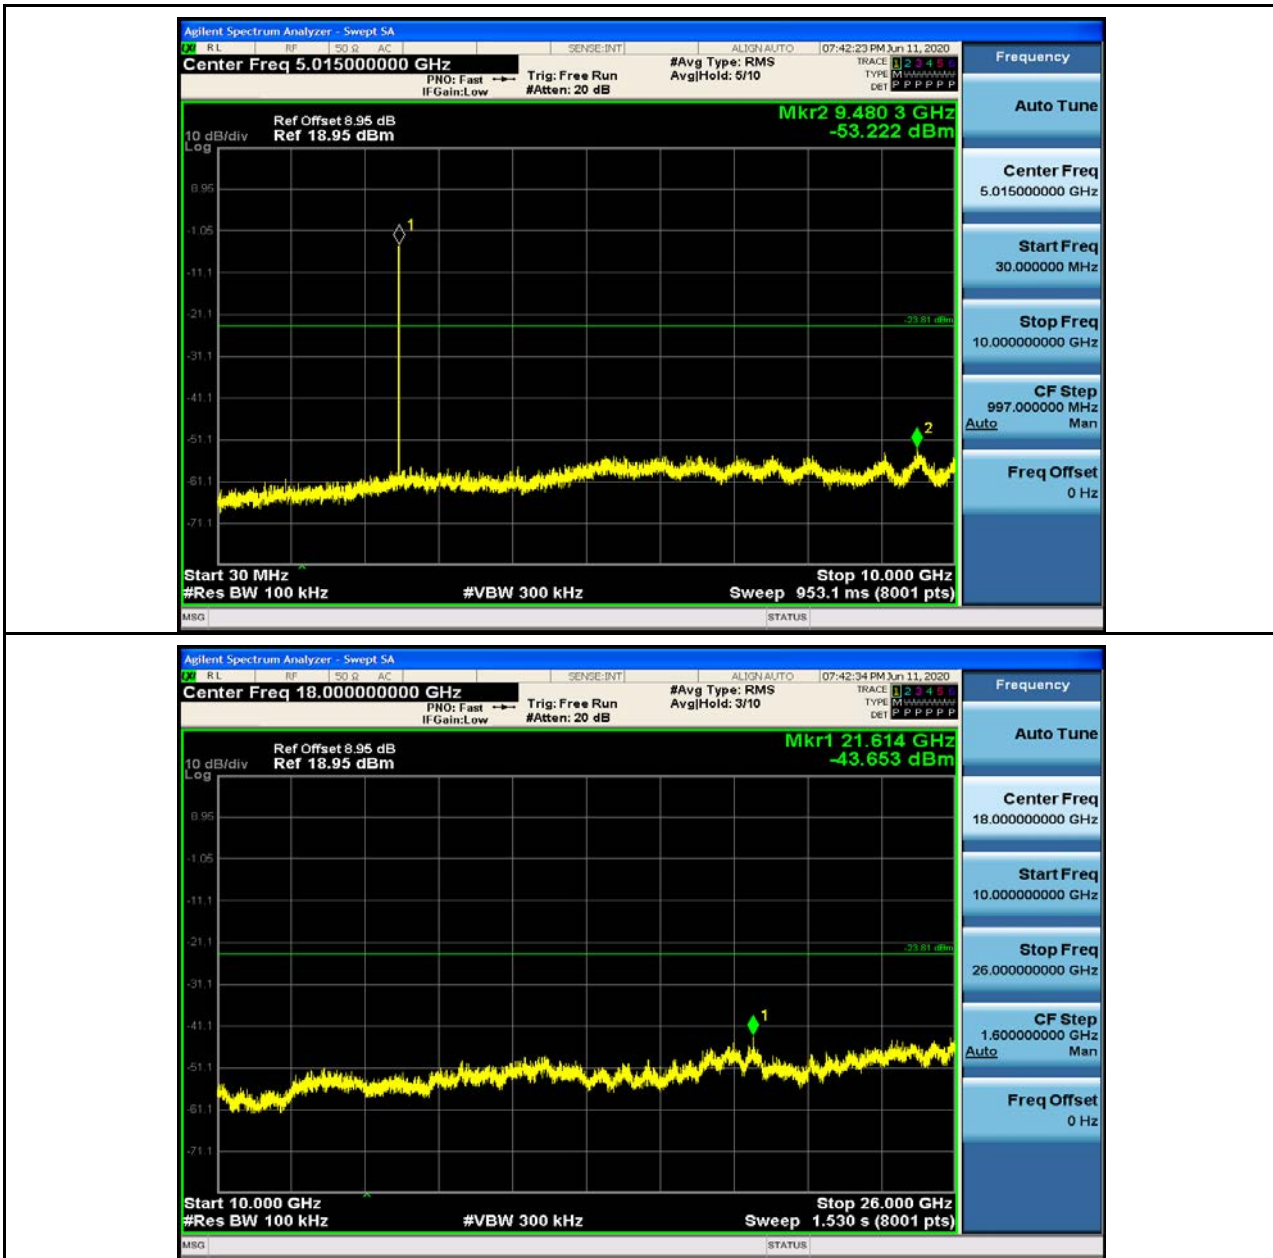







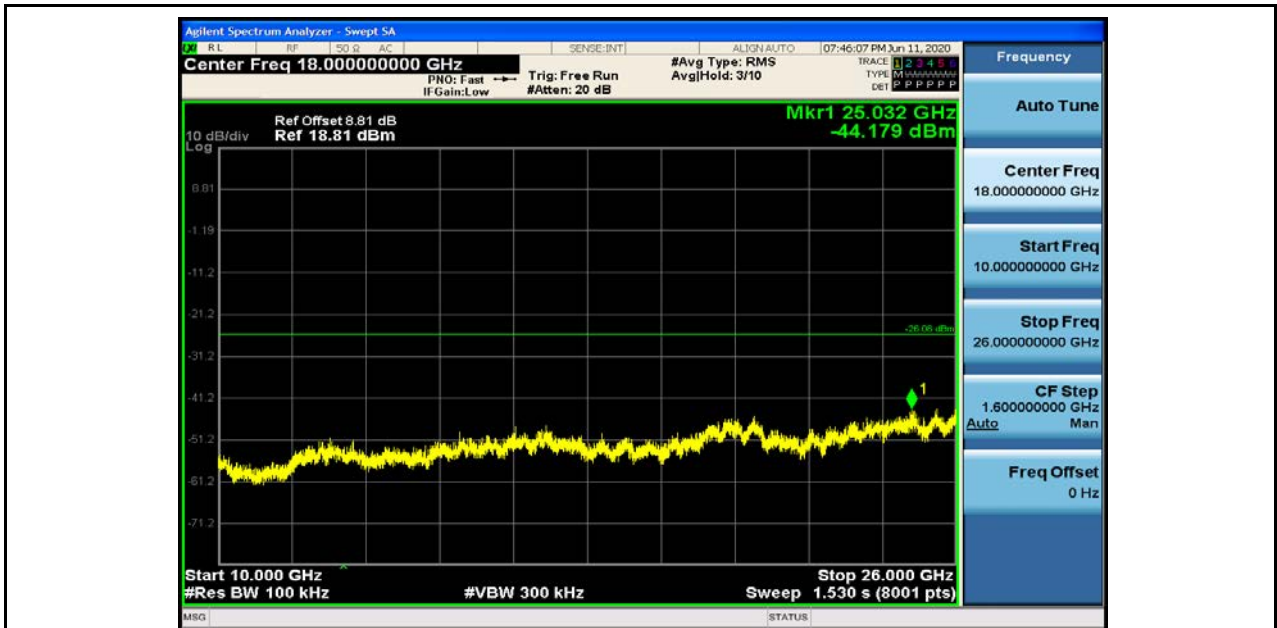


RF Conducted Spurious Emissions\_BLE\_2440(2M Rate)



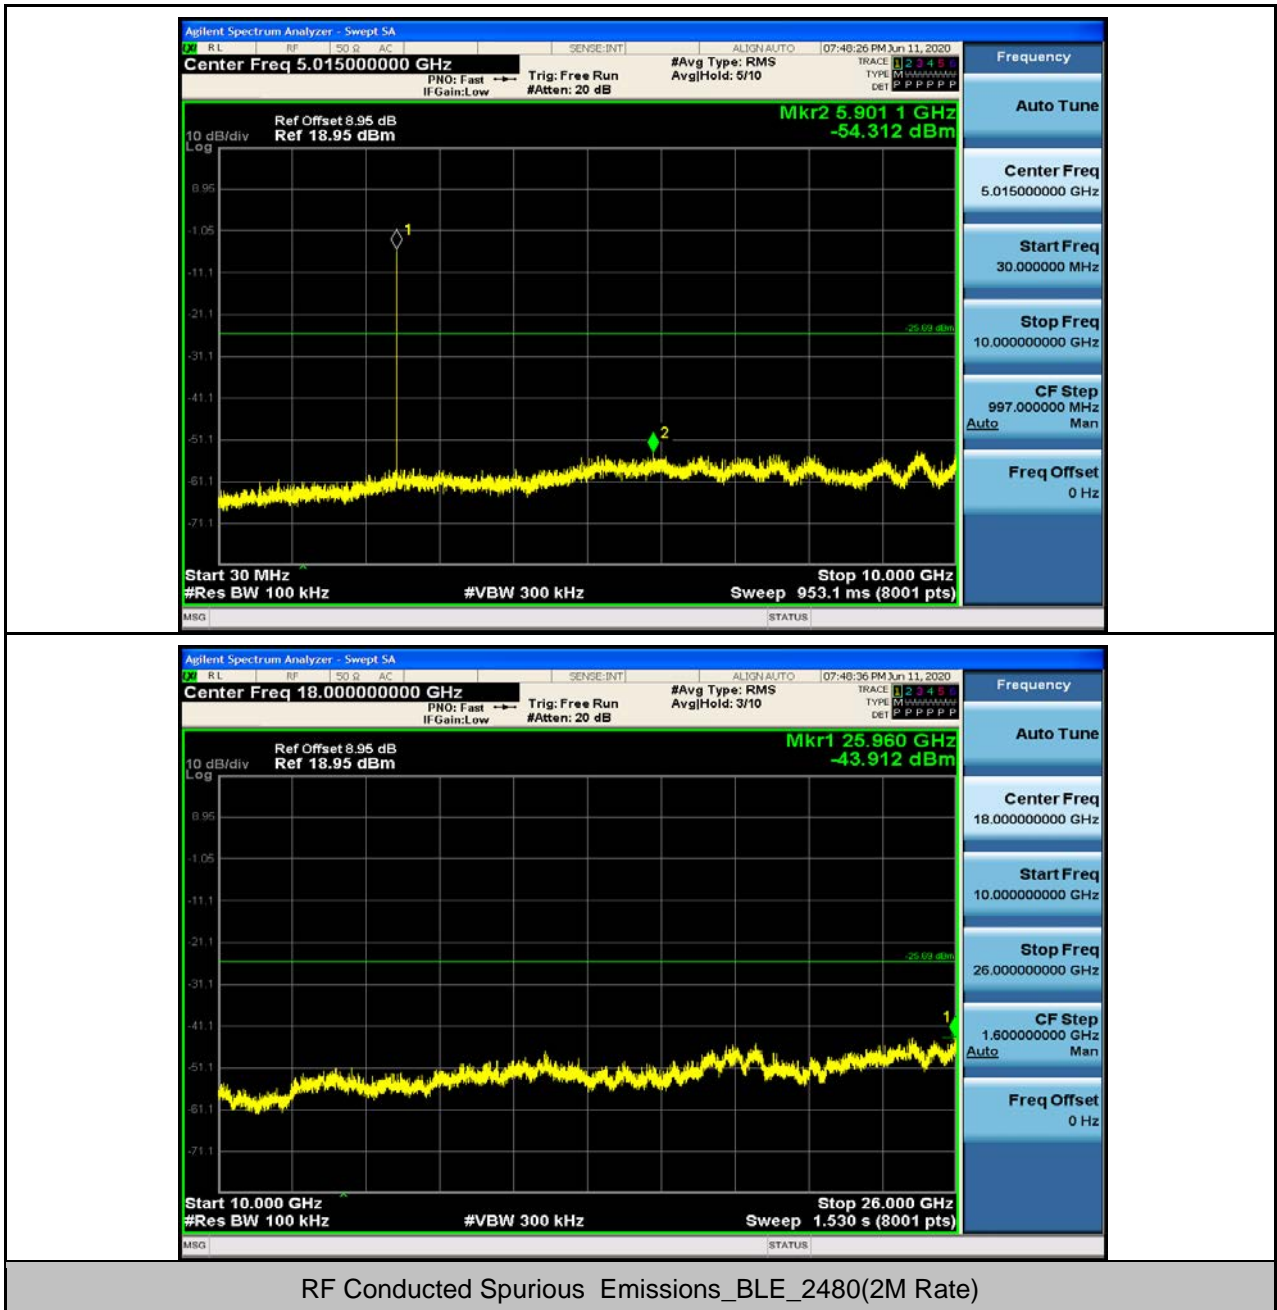

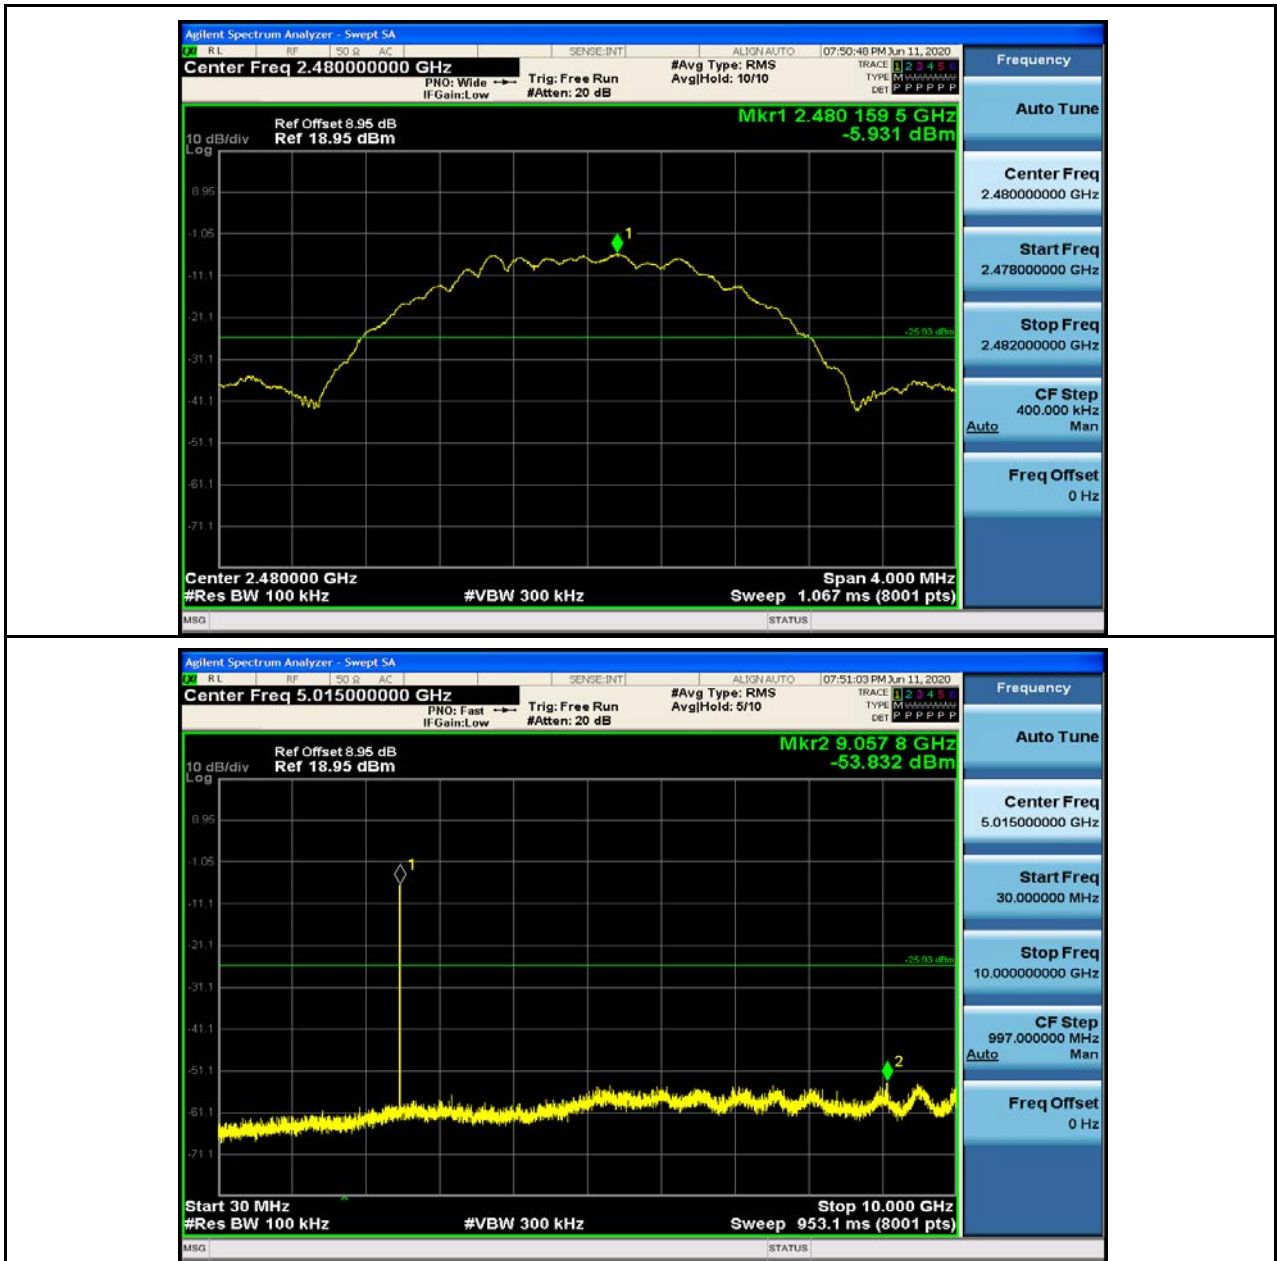

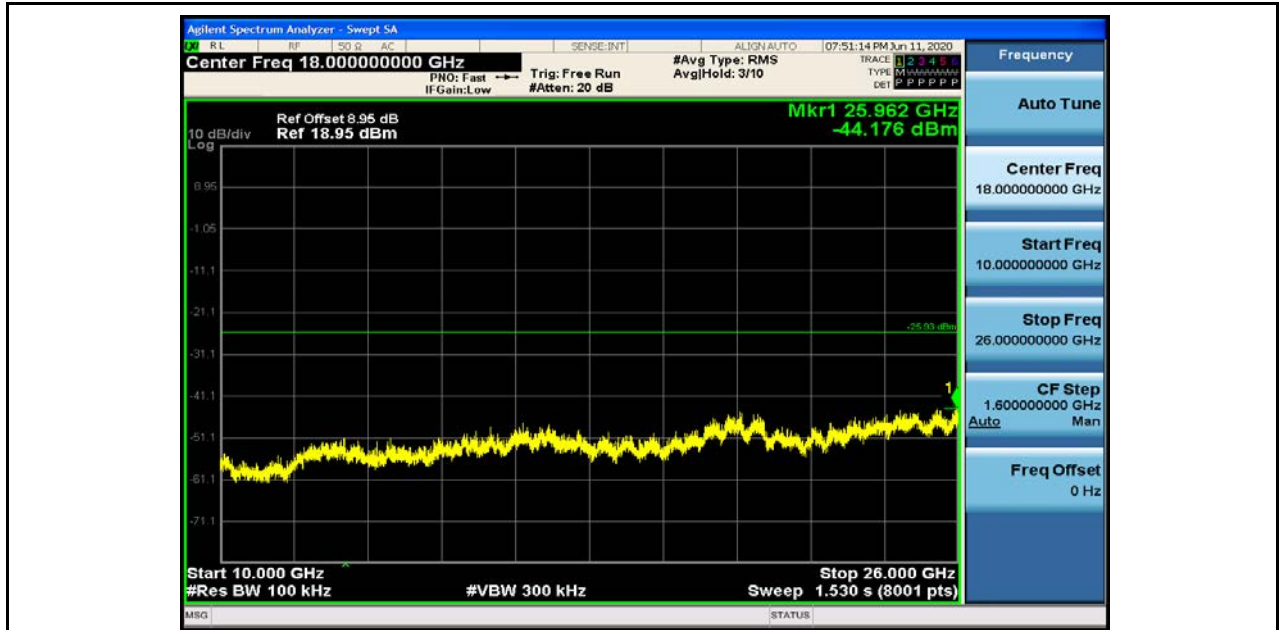

- End of the Report -