

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

According to ANSI C63.10-2013, section 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	44-45 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-03 and 2023-06-05.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots:



Test Mode	Antenna	Channel	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.379	330	0.125	<=0.4	PASS
DH3	Ant1	Hop	1.628	180	0.293	<=0.4	PASS
DH5	Ant1	Hop	2.868	80	0.229	<=0.4	PASS
2DH1	Ant1	Hop	0.388	330	0.128	<=0.4	PASS
2DH3	Ant1	Hop	1.631	200	0.326	<=0.4	PASS
2DH5	Ant1	Hop	2.873	130	0.373	<=0.4	PASS
3DH1	Ant1	Hop	0.388	320	0.124	<=0.4	PASS
3DH3	Ant1	Hop	1.631	140	0.228	<=0.4	PASS
3DH5	Ant1	Hop	2.874	90	0.259	<=0.4	PASS

Note 1: A period time=0.4*79=31.6(s), Result=Burst Width*Total Hops


Note 2: Total Hops =Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)


DH1_Ant1_Hop

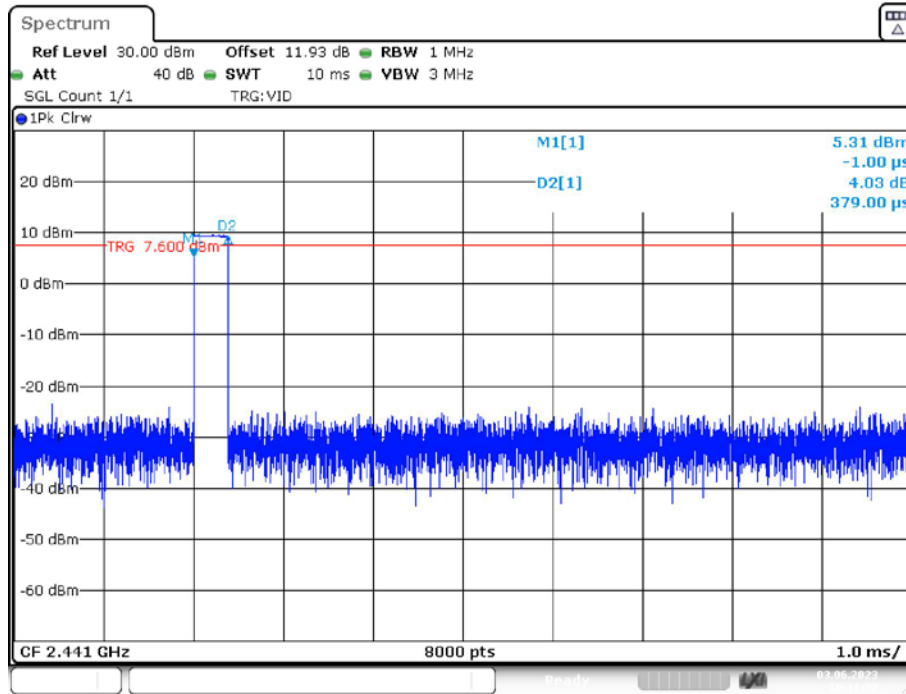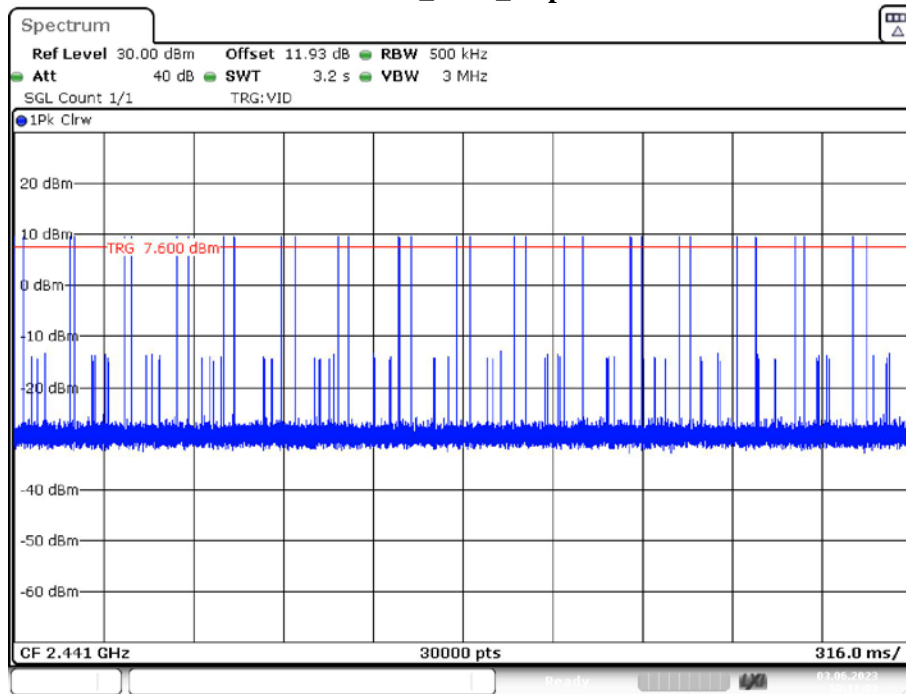

DH3_Ant1_Hop

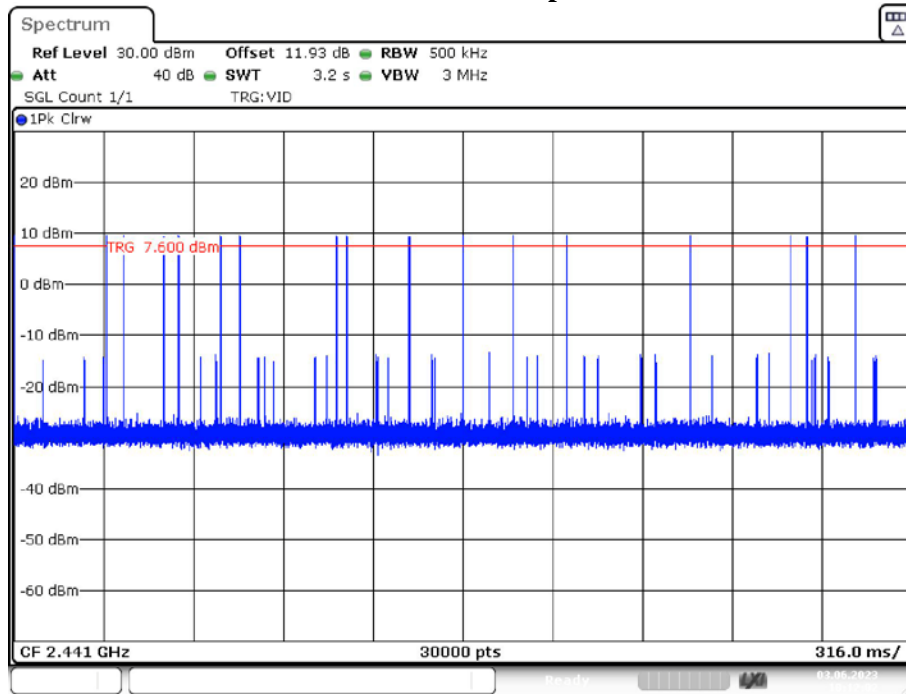


Date: 3.JUN.2023 10:12:01

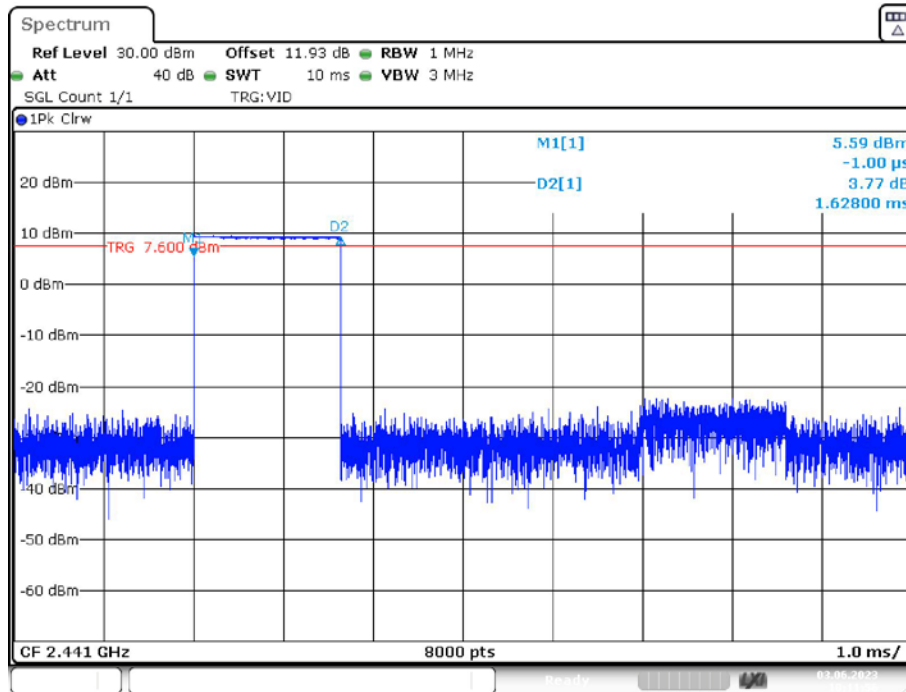


Date: 3.JUN.2023 10:11:56

DH5_Ant1_Hop

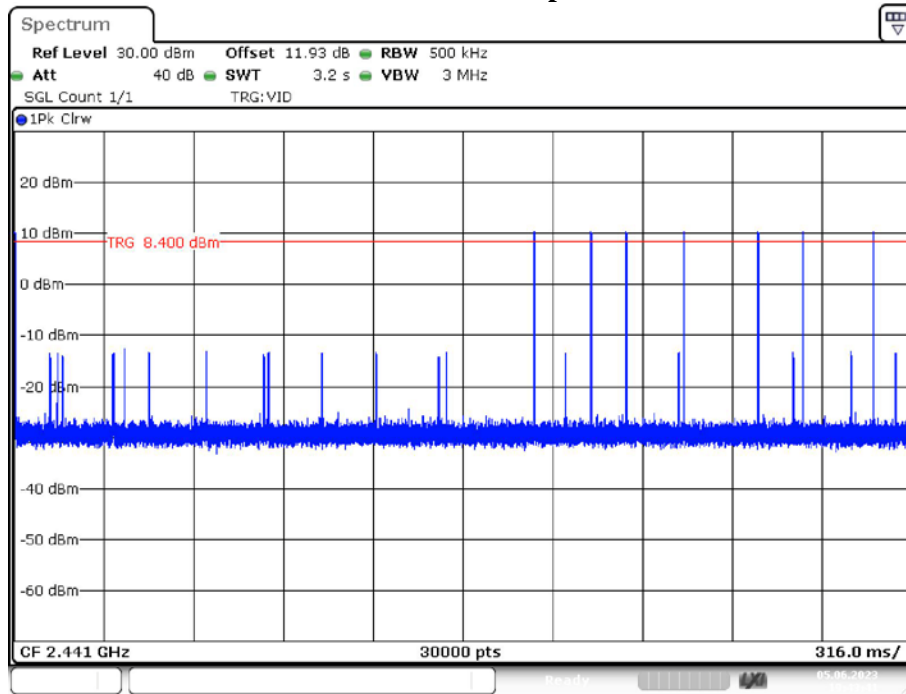


Date: 5.JUN.2023 19:43:41

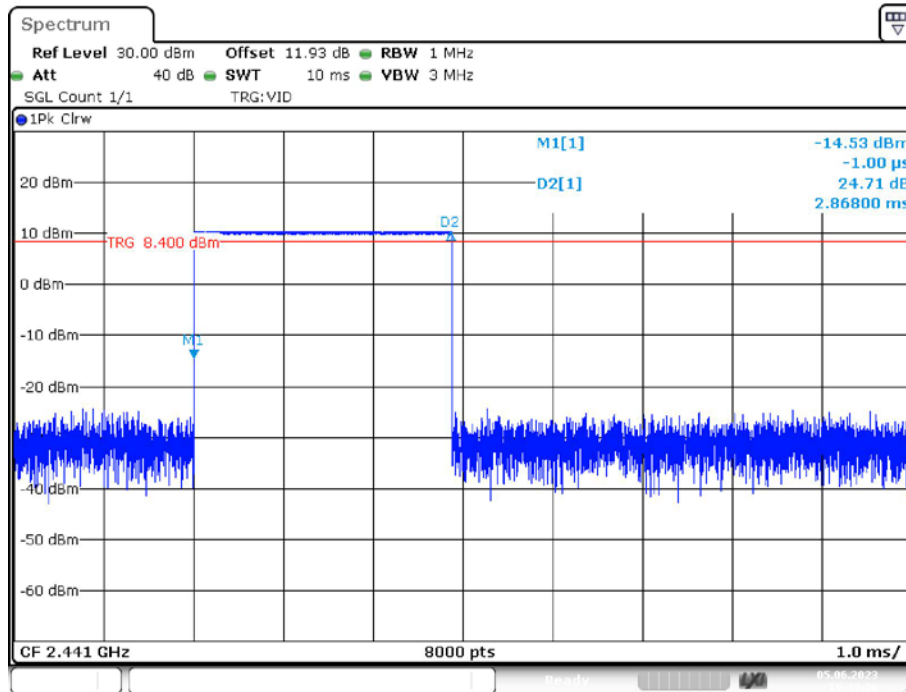


Date: 5.JUN.2023 19:43:36

2DH1_Ant1_Hop

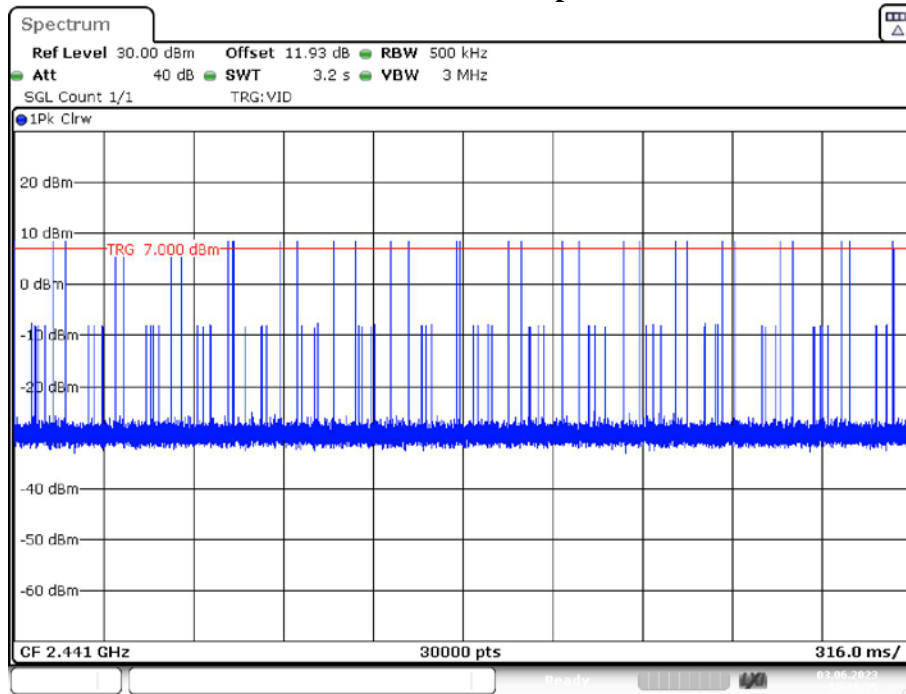


Date: 3.JUN.2023 10:15:25

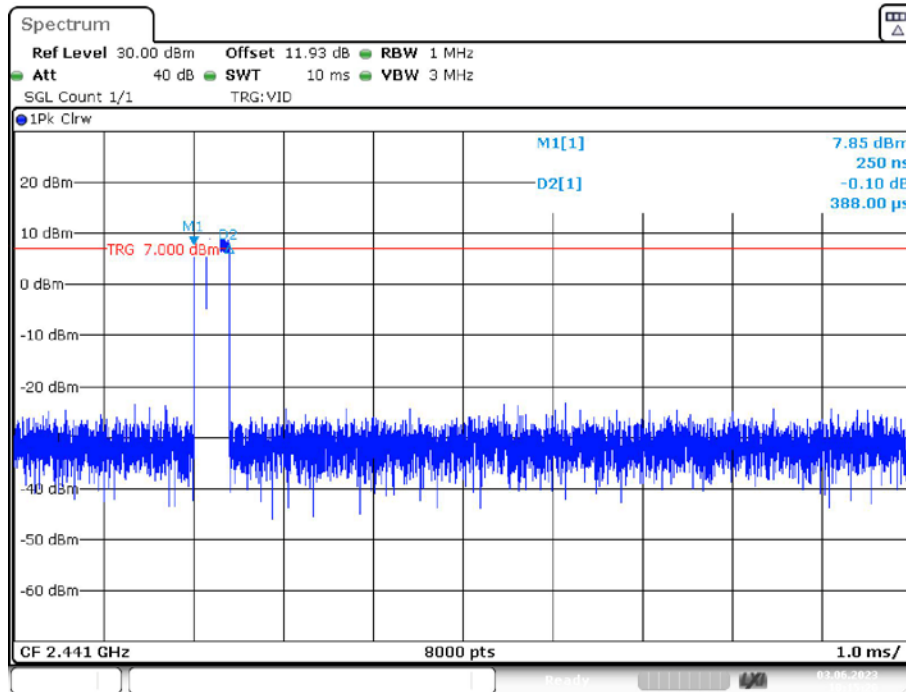


Date: 3.JUN.2023 10:15:19

2DH3_Ant1_Hop

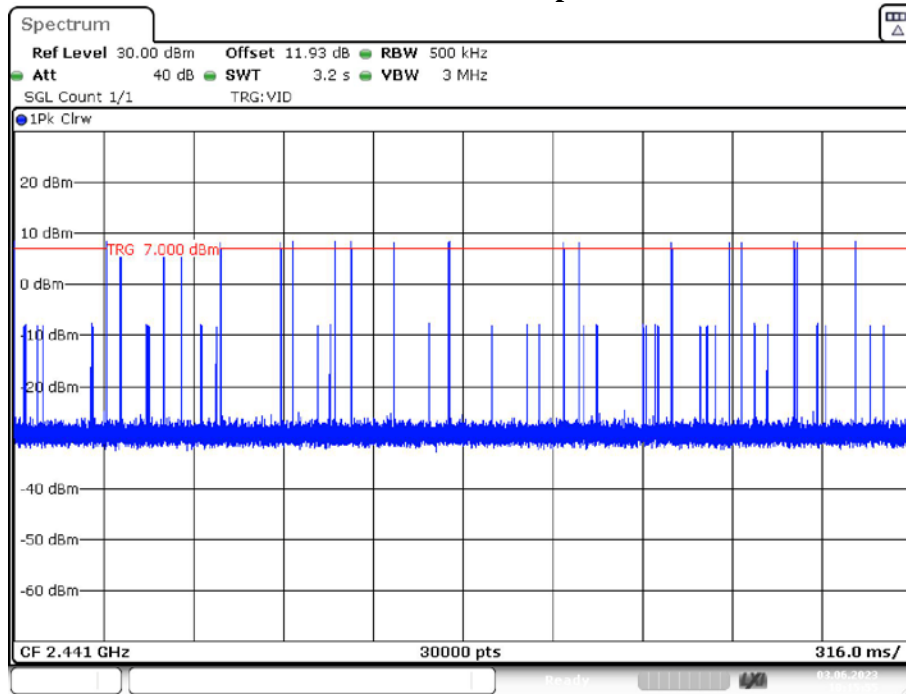


Date: 3.JUN.2023 10:15:55

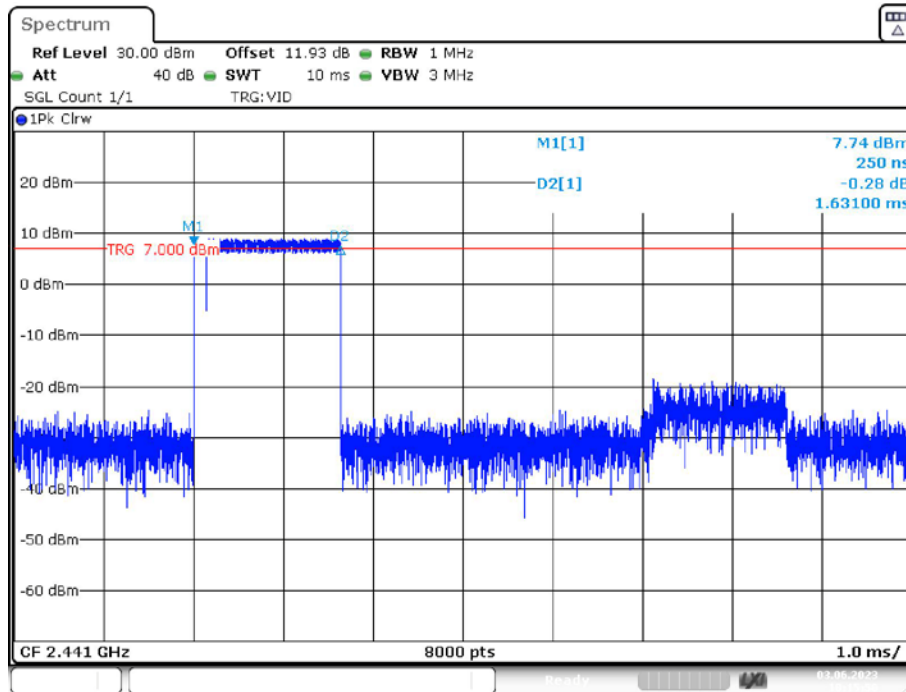


Date: 3.JUN.2023 10:15:50

2DH5_Ant1_Hop


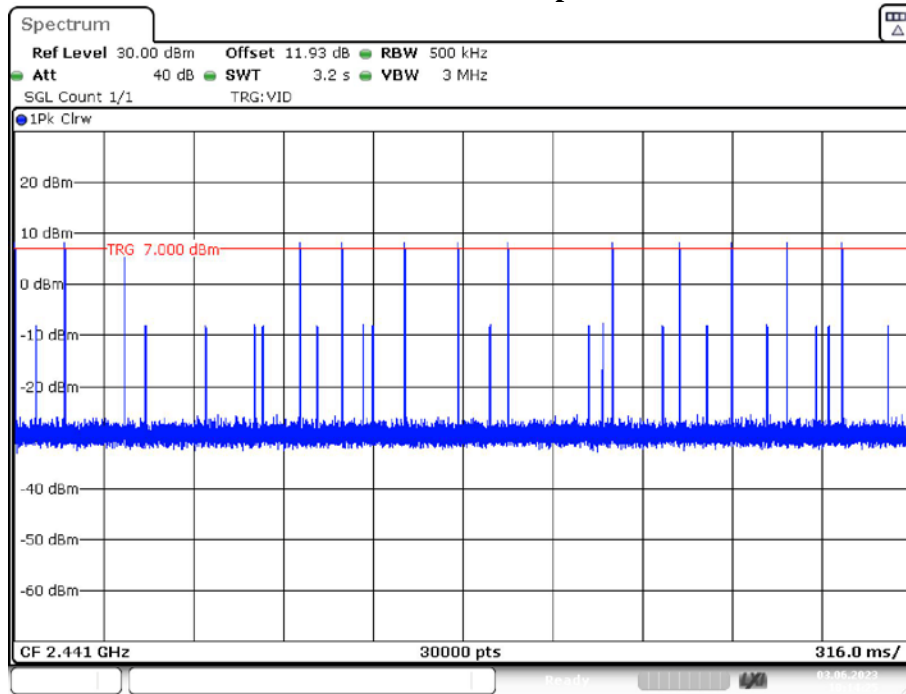


Date: 3.JUN.2023 10:14:25

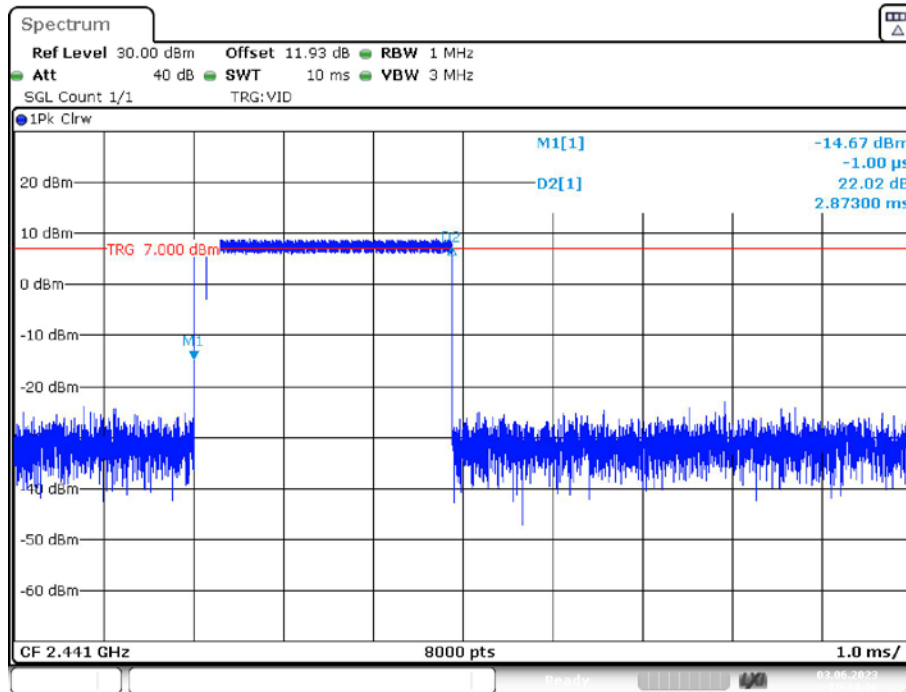


Date: 3.JUN.2023 10:14:20


3DH1_Ant1_Hop

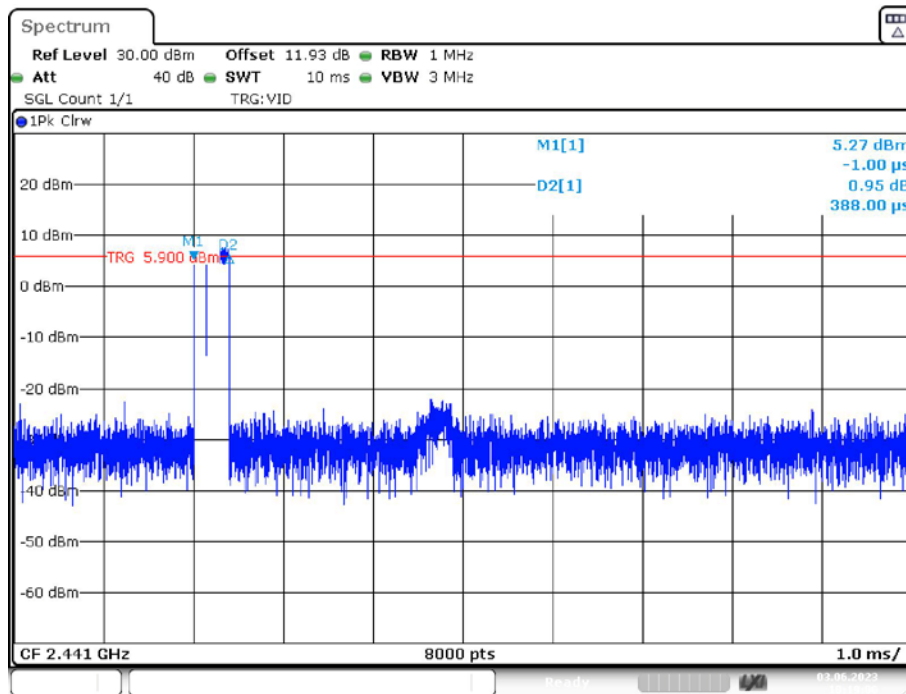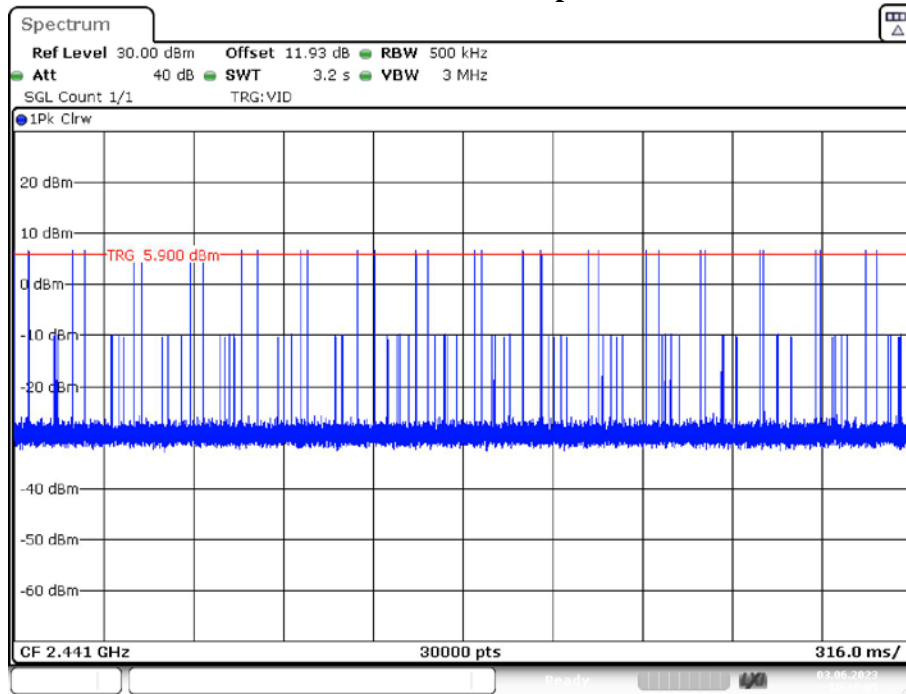

3DH3_Ant1_Hop

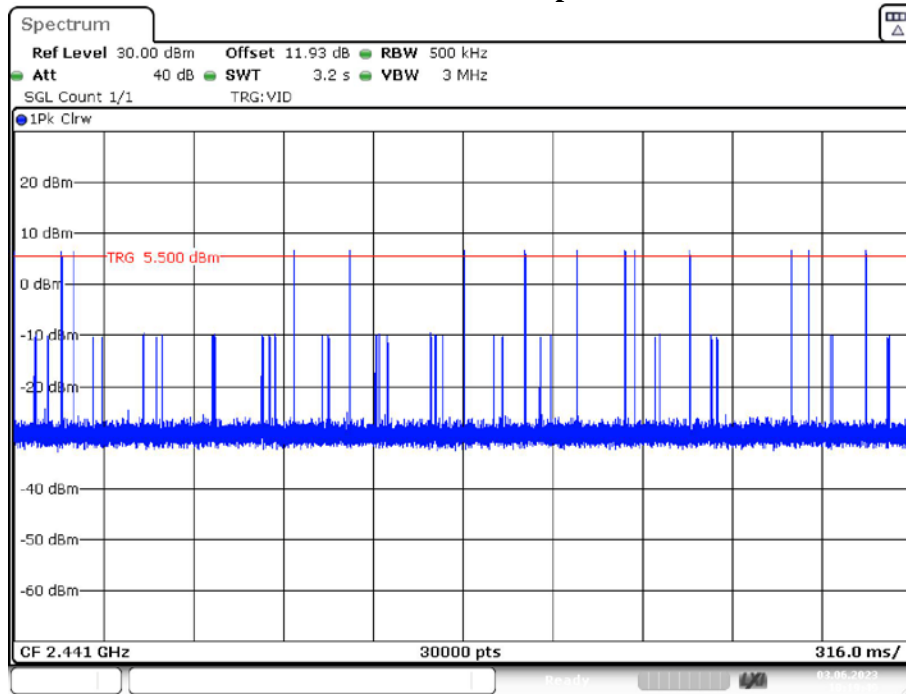


Date: 3.JUN.2023 10:19:49

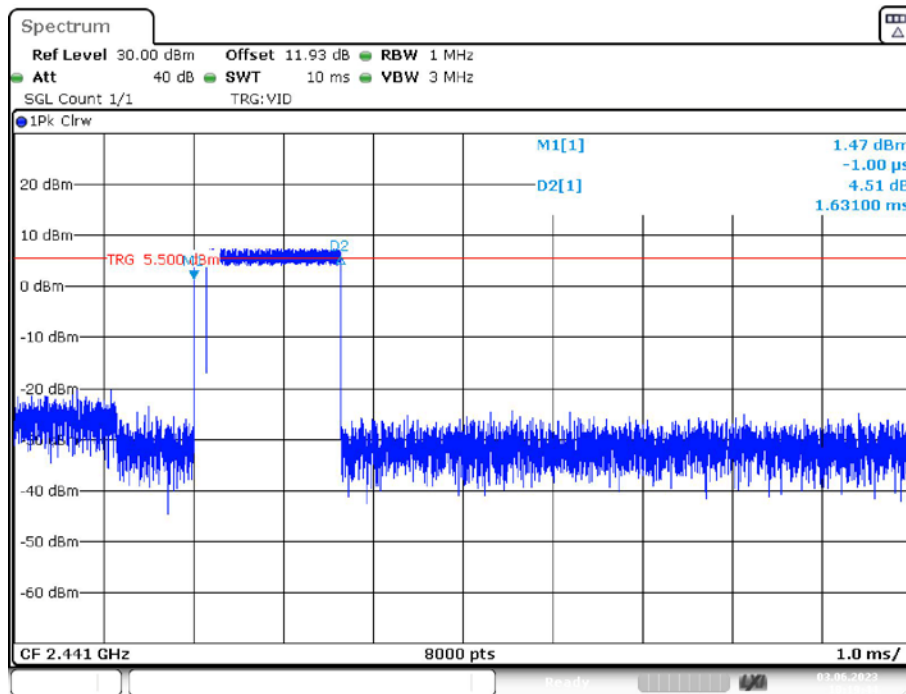


Date: 3.JUN.2023 10:19:44

3DH5_Ant1_Hop

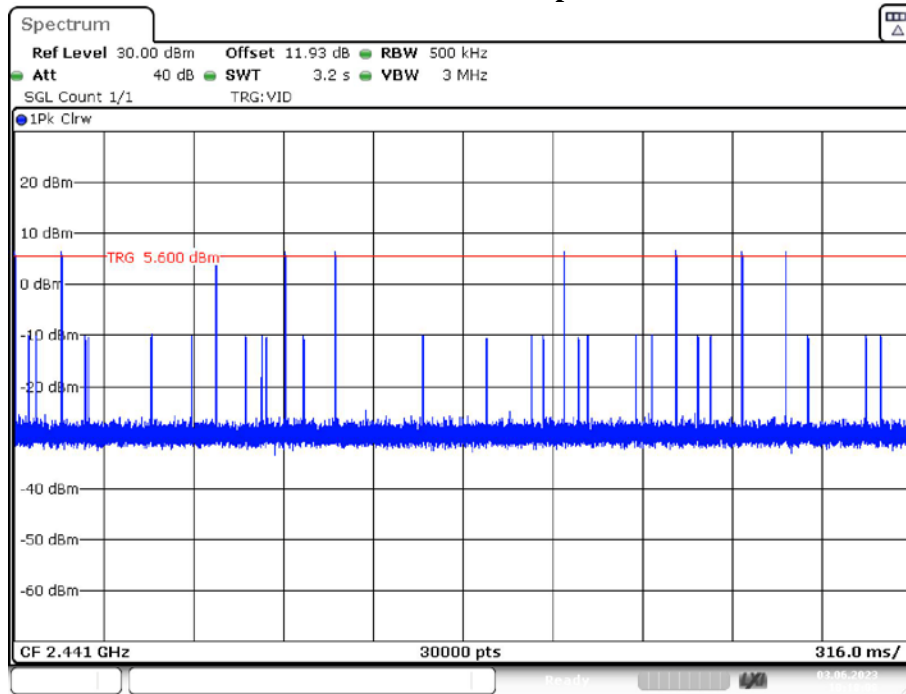

Date: 3.JUN.2023 10:18:08

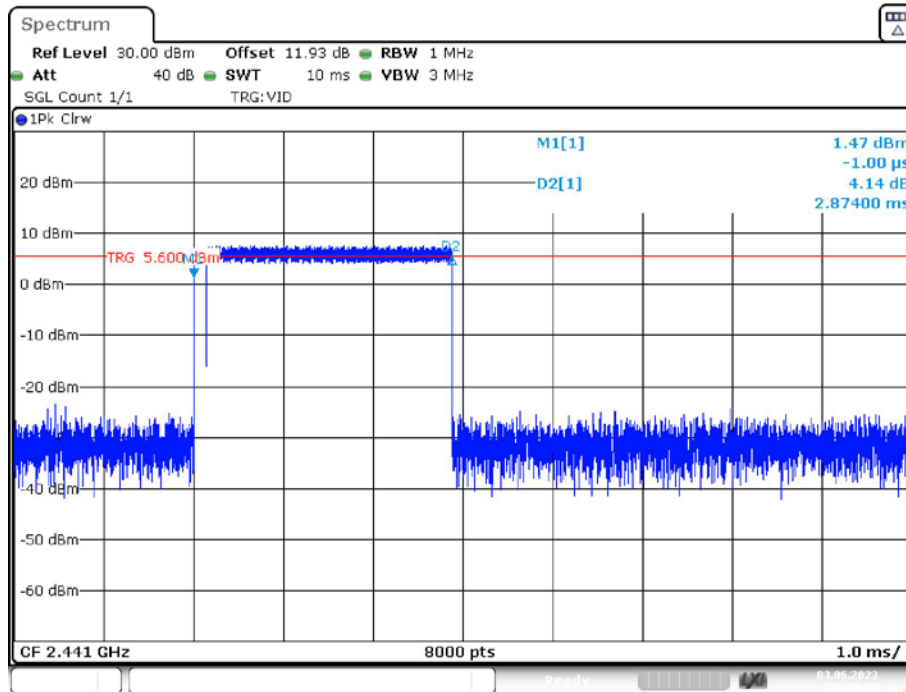

Date: 3.JUN.2023 10:18:03

FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247§ 5.1(b) &§ 5.4(b):


For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

According to ANSI C63.10-2013, section 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-03.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots:


Test Mode	Antenna	Channel	Conducted peak output power [dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	9.11	<=20.97	PASS
		2441	9.53	<=20.97	PASS
		2480	8.64	<=20.97	PASS
2DH5	Ant1	2402	8.99	<=20.97	PASS
		2441	9.51	<=20.97	PASS
		2480	8.61	<=20.97	PASS
3DH5	Ant1	2402	7.67	<=20.97	PASS
		2441	8.02	<=20.97	PASS
		2480	7.25	<=20.97	PASS

Note: the antenna gain=-3.46dBi, the maximum EIRP=9.53dBm-3.46dBi=6.07dBm<36dBm


DH5_Ant1_2402

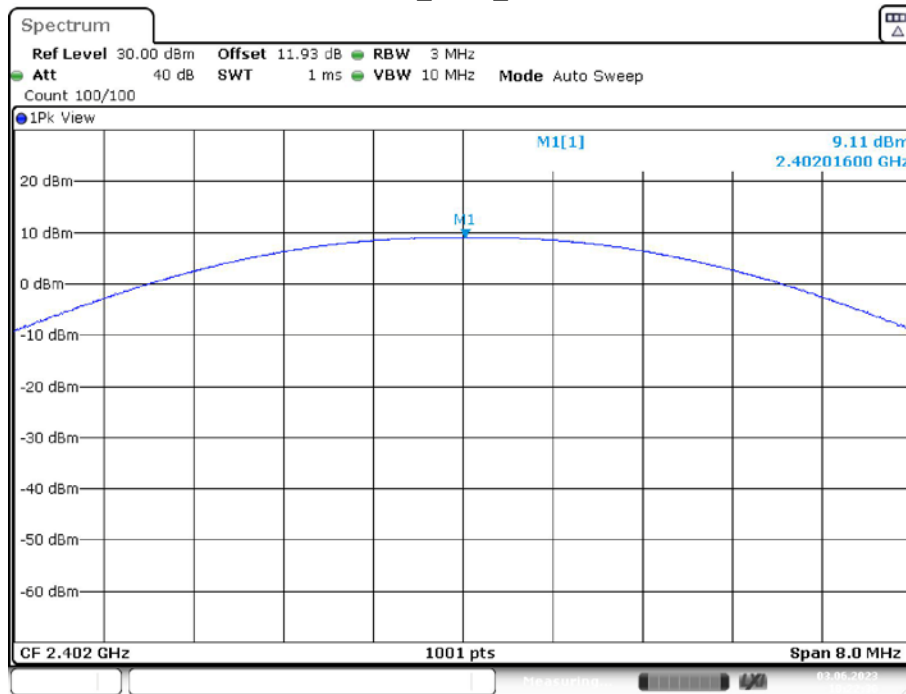


DH5_Ant1_2441

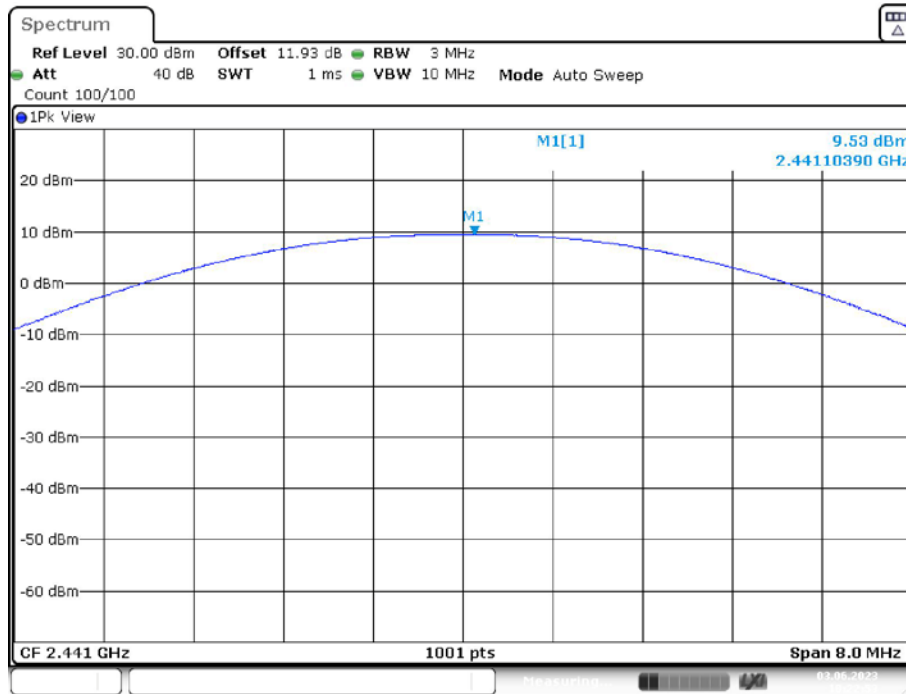


DH5_Ant1_2480

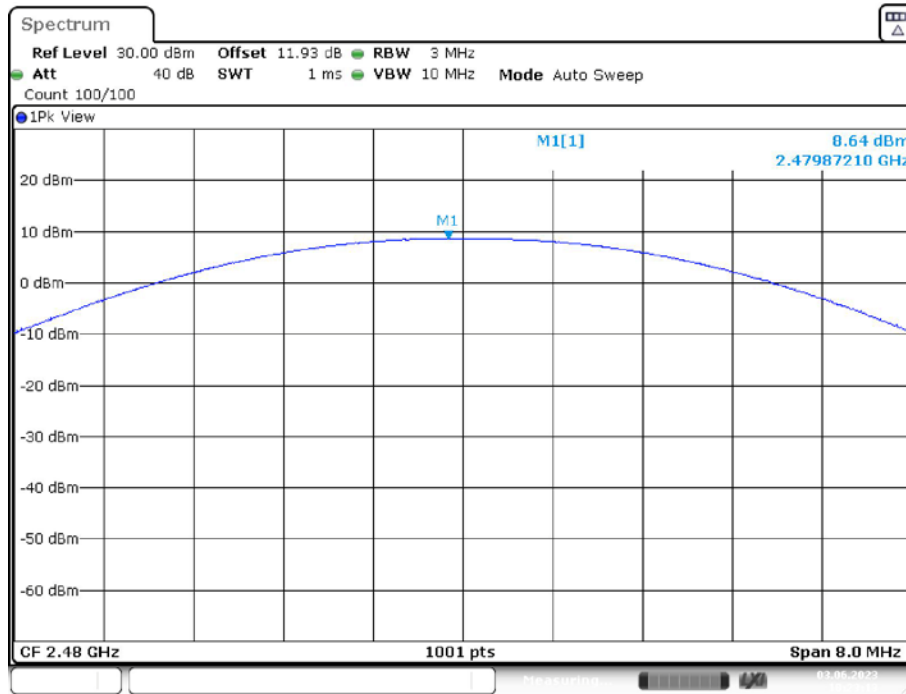


2DH5_Ant1_2402

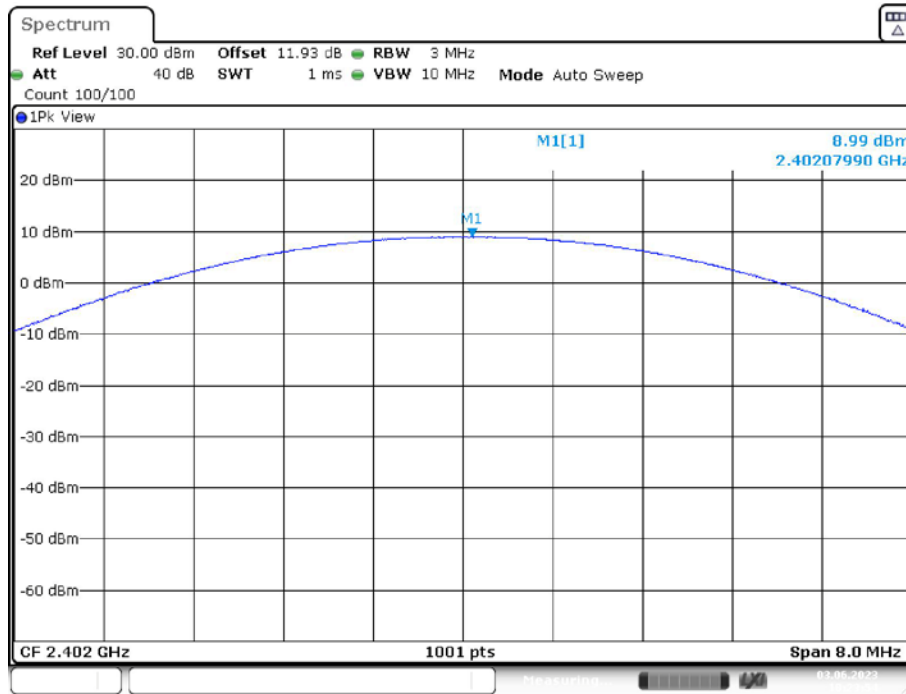


2DH5_Ant1_2441

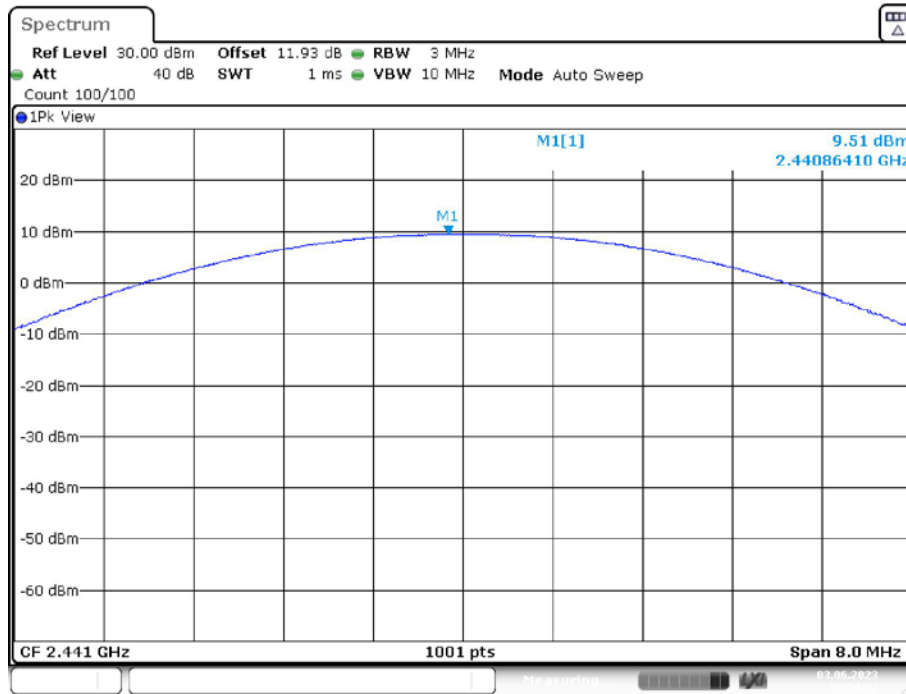


2DH5_Ant1_2480

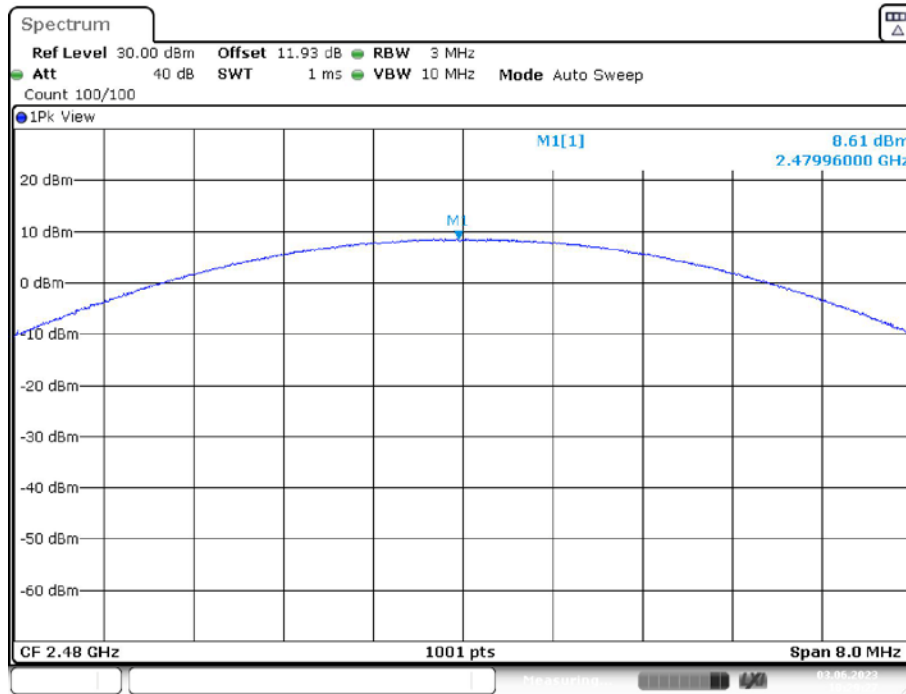


3DH5_Ant1_2402

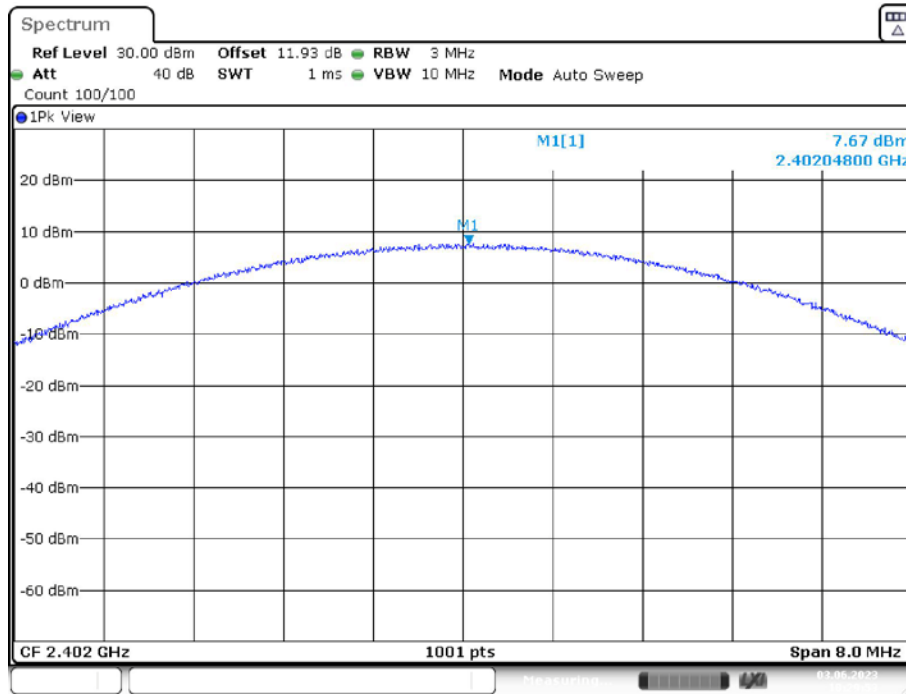

3DH5_Ant1_2441

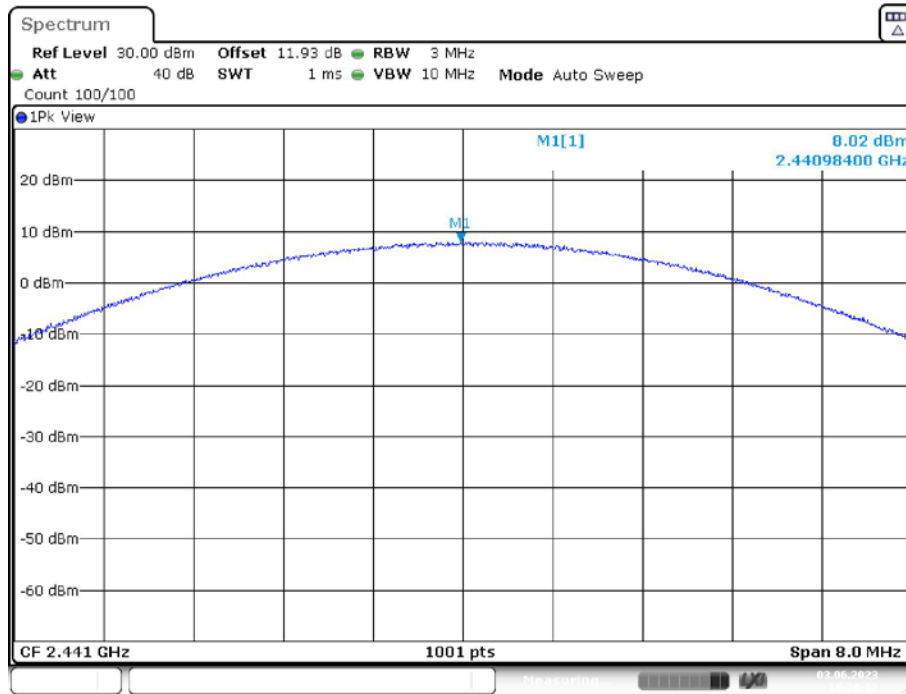

3DH5_Ant1_2480

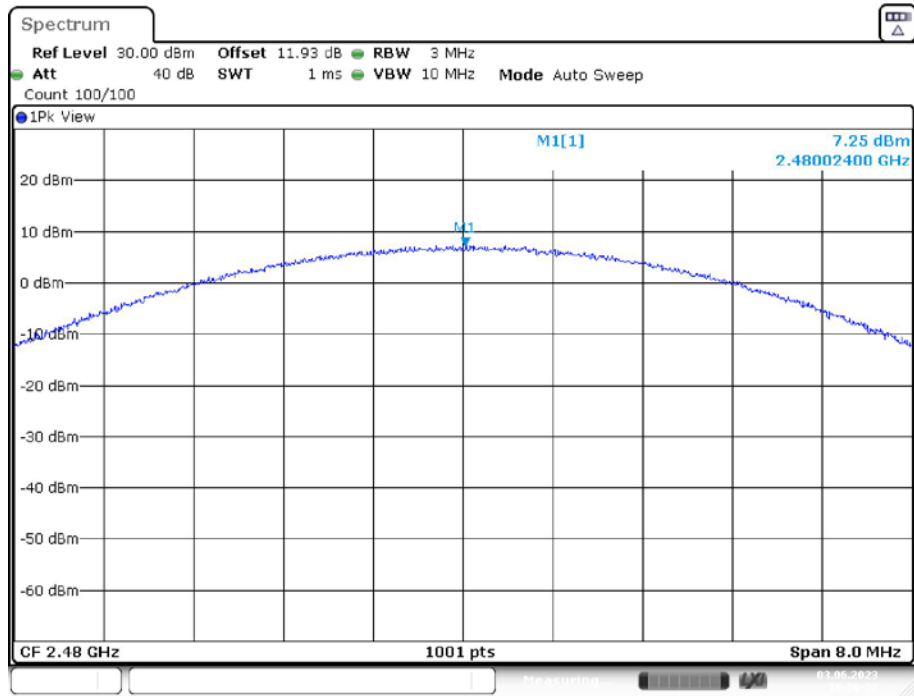

Date: 3.JUN.2023 10:30:32

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

According to ANSI C63.10-2013, section 7.8.6 and section 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data**Environmental Conditions**


Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-03.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the below plots:

DH5: Band Edge-Left Side Hopping

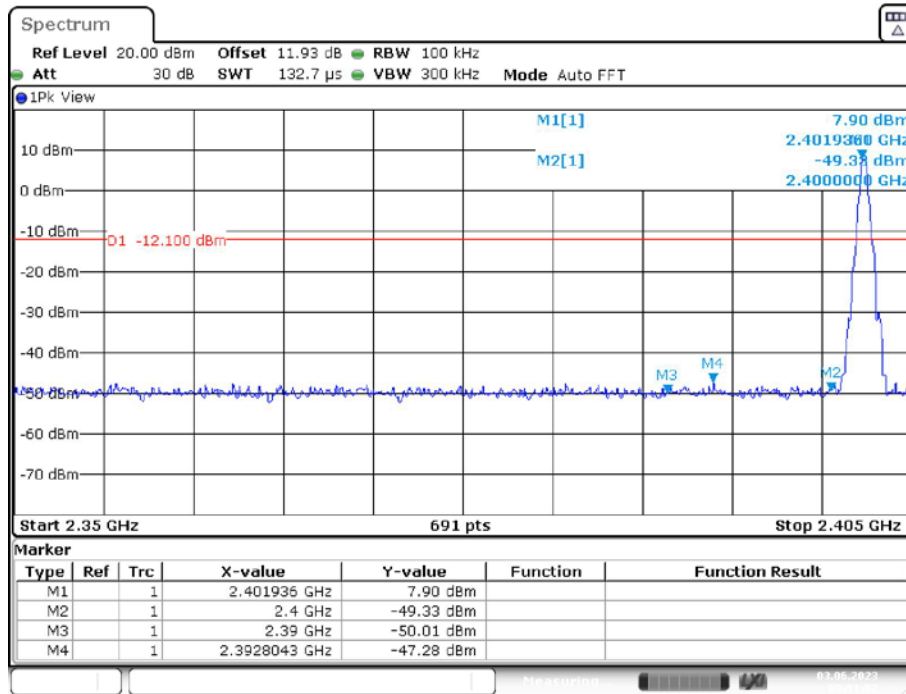


Date: 3.JUN.2023 09:51:52

Single

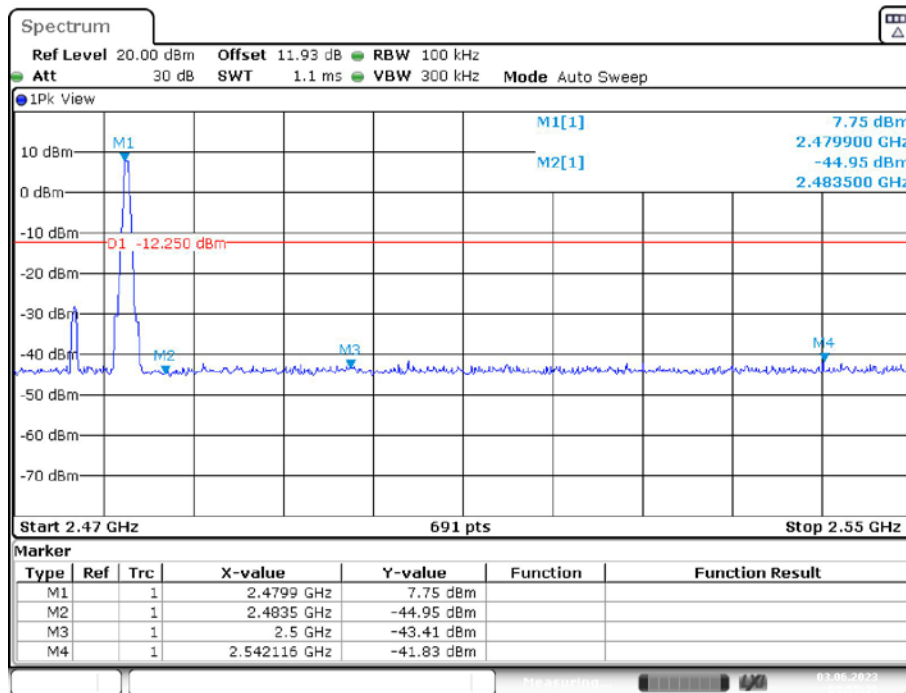


Date: 3.JUN.2023 09:55:39


DH5: Band Edge- Right Side Hopping

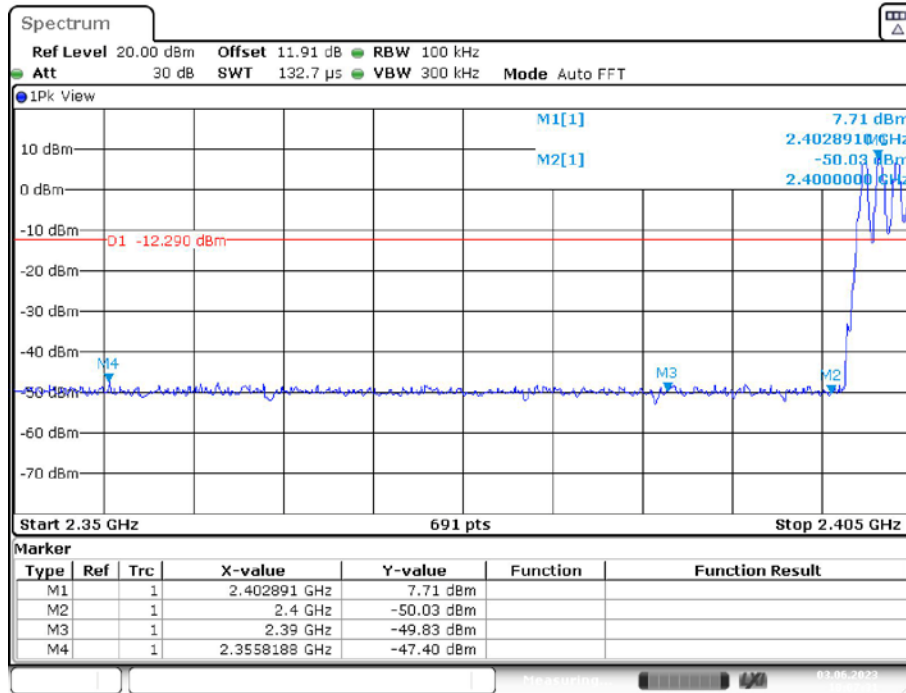


Single

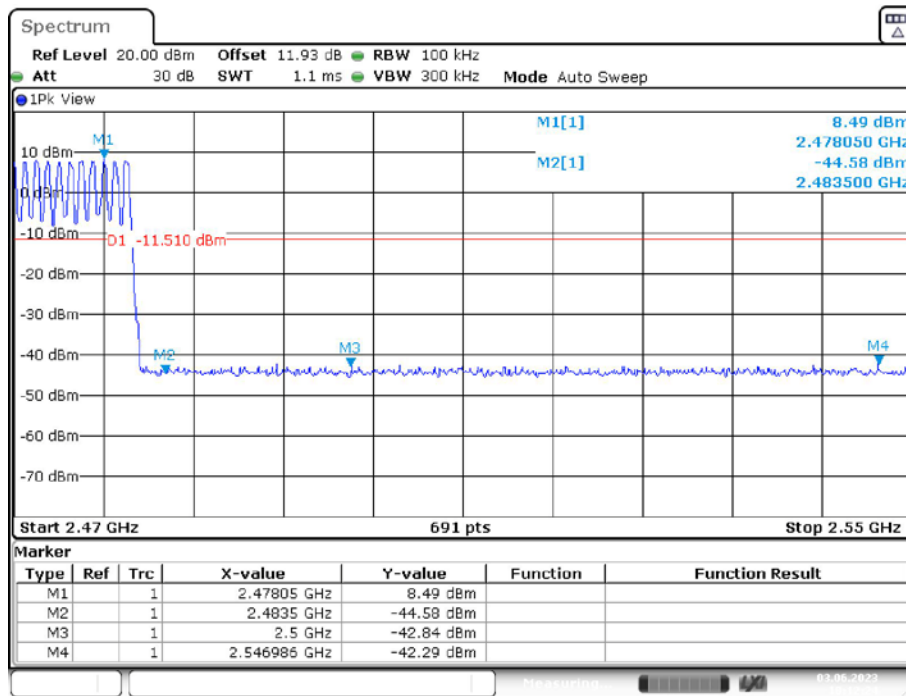


2DH5: Band Edge-Left Side Hopping

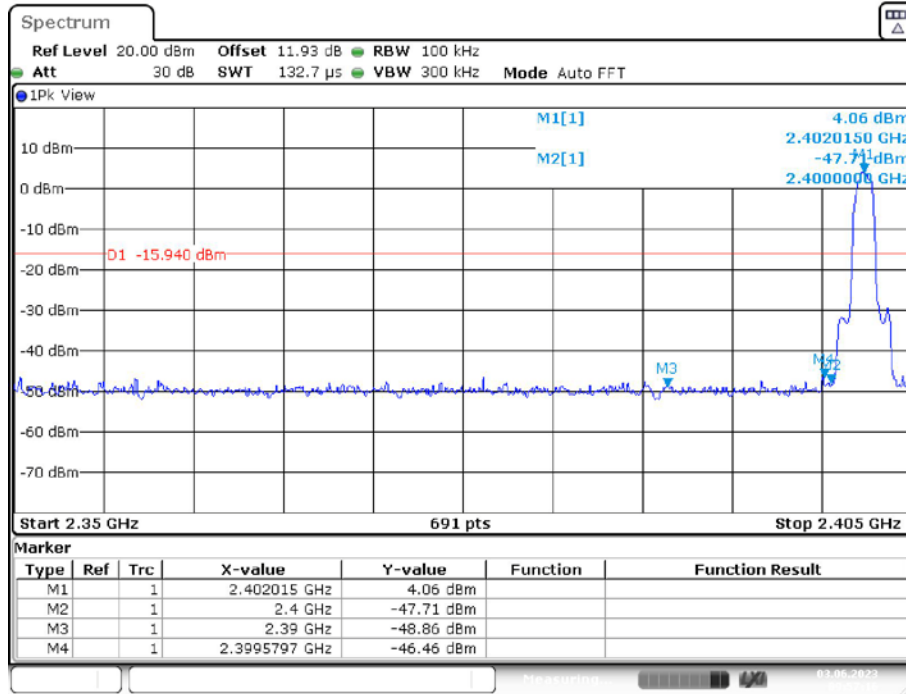


Single

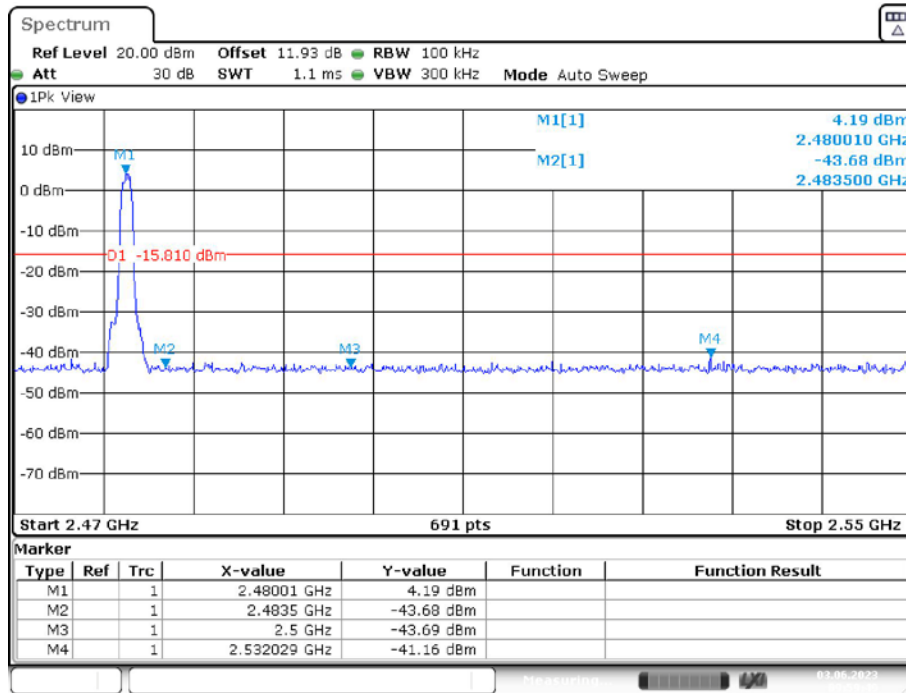


2DH5: Band Edge- Right Side Hopping

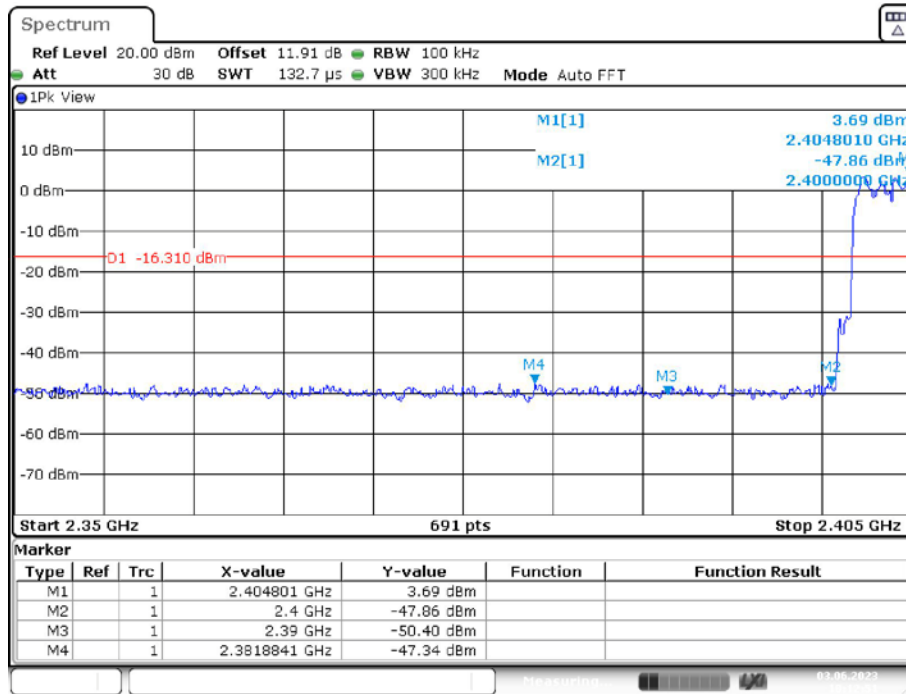


Single

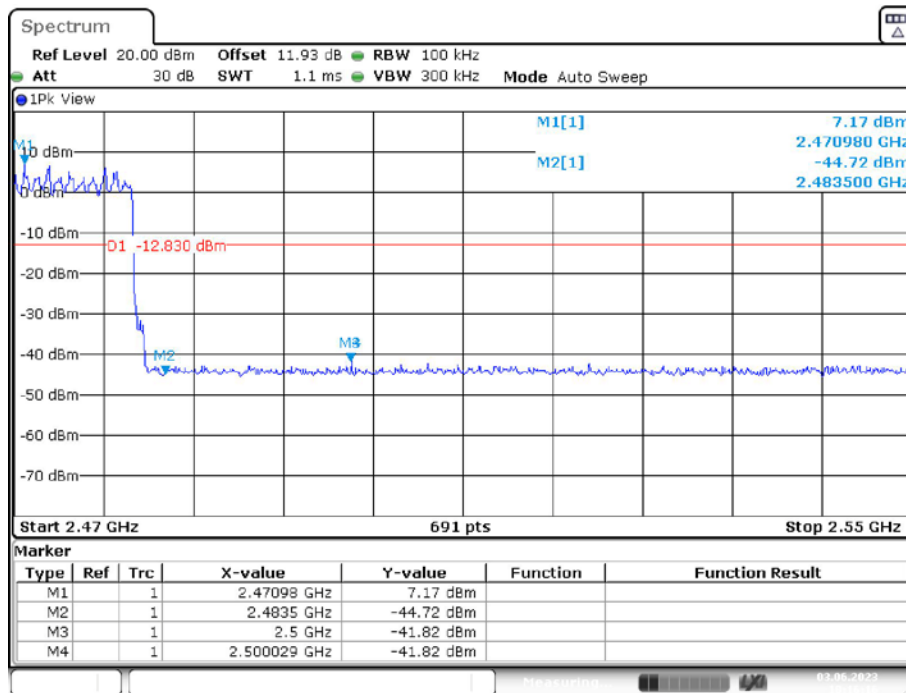


3DH5: Band Edge-Left Side Hopping

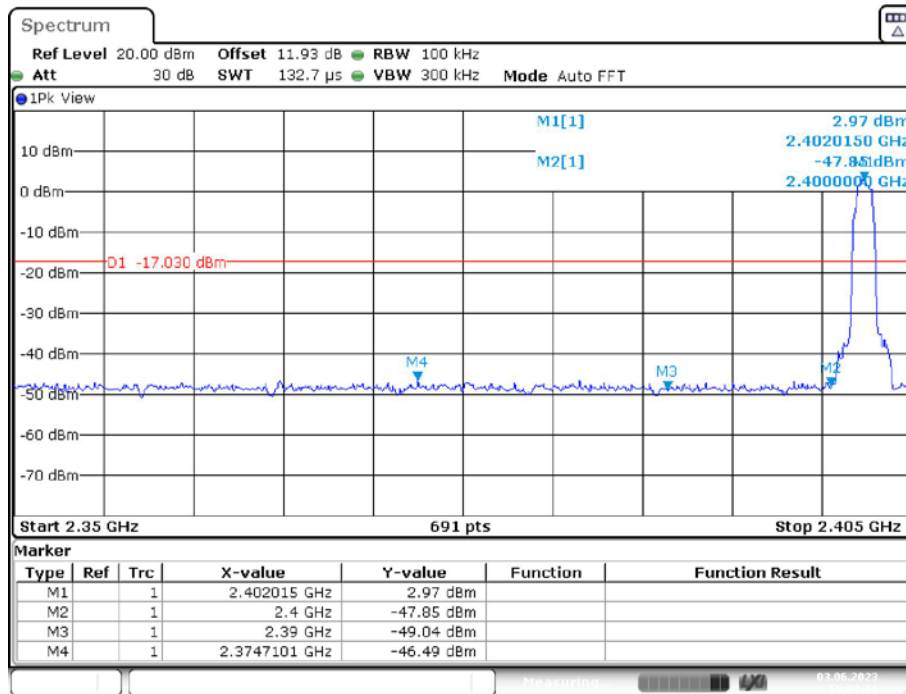

Single

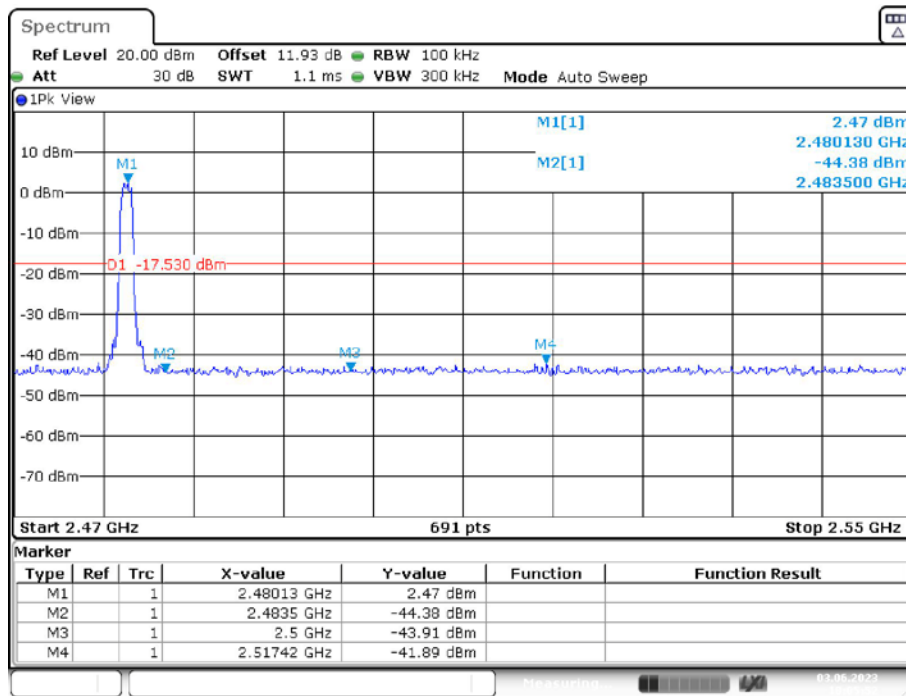


3DH5: Band Edge- Right Side Hopping

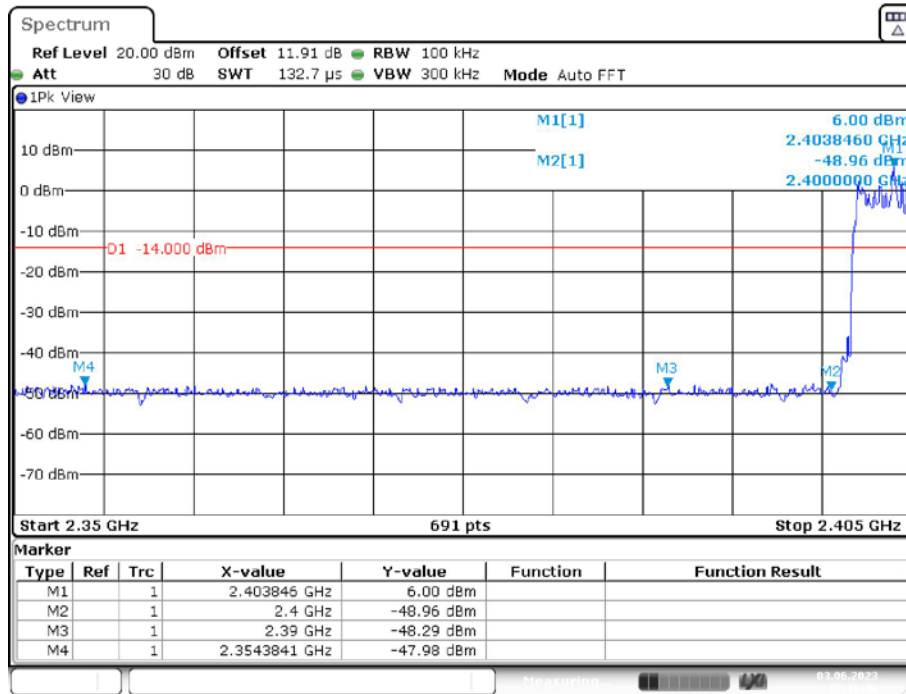

Date: 3.JUN.2023 10:16:46

Single

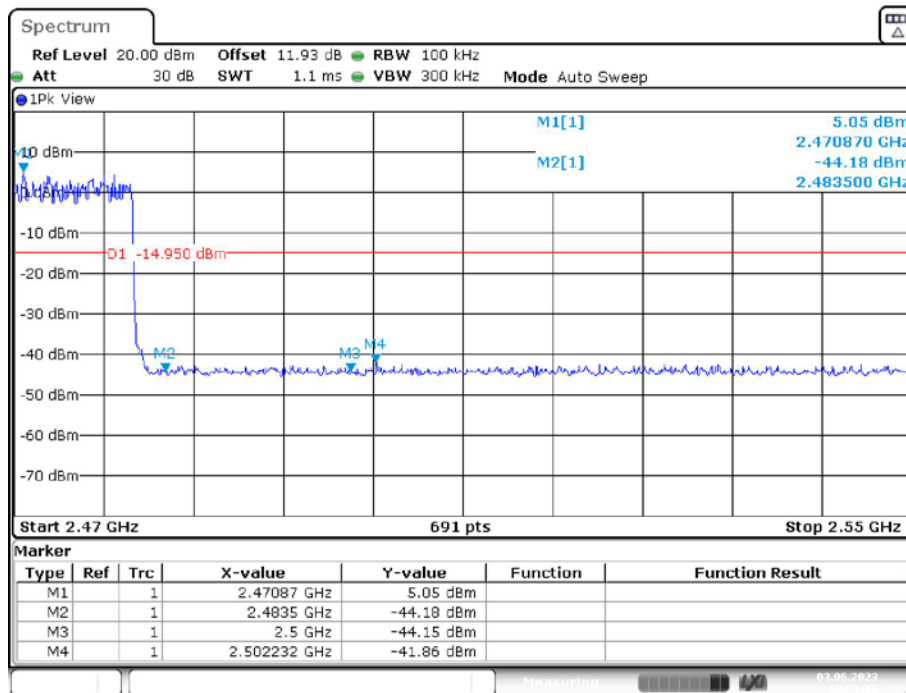

Date: 3.JUN.2023 10:21:15

***** END OF REPORT *****