

**Test Plot 1#:****DUT: A2211; Type: Smart watch; Serial: 26CG-1;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.3031

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.862$  S/m;  $\epsilon_r = 38.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2441 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Face up/Bluetooth BDR(GFSK) Mid/Area Scan (9x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00233 W/kg


**Face up/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.295 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.00480 W/kg

**SAR(1 g) = 0.00153 W/kg; SAR(10 g) = 0.00121 W/kg**

Maximum value of SAR (measured) = 0.00389 W/kg

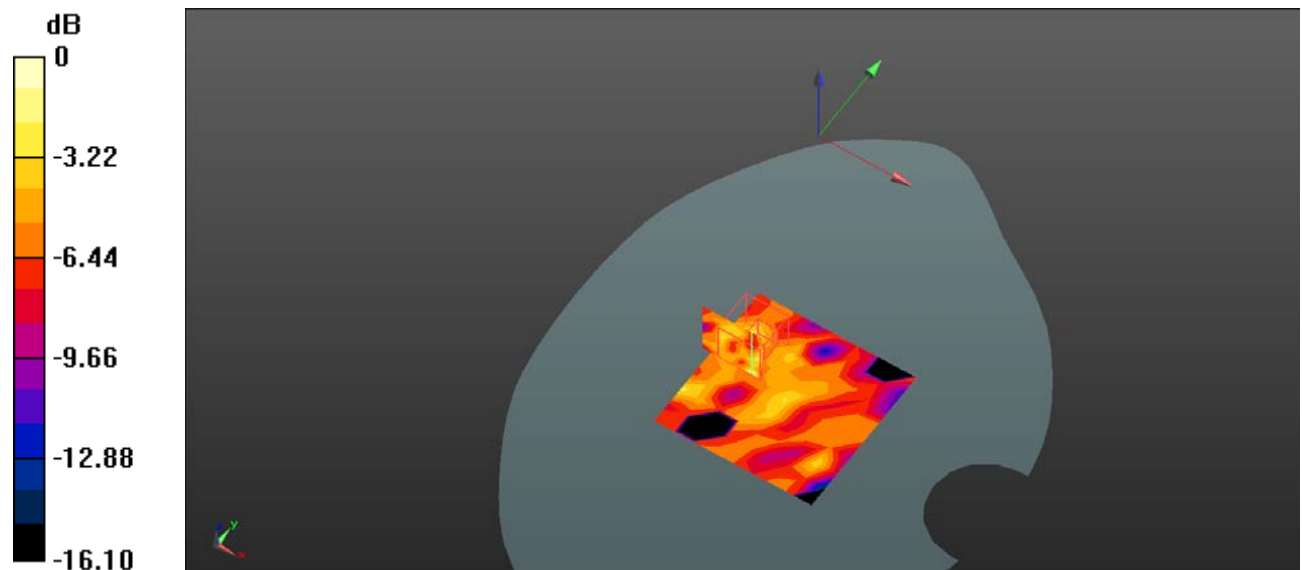

0 dB = 0.00389 W/kg = -24.10 dBW/kg

**Test Plot 2#:****DUT: A2211; Type: Smart watch; Serial: 26CG-1;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.3031

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.862$  S/m;  $\epsilon_r = 38.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2441 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limbs-Worn/Bluetooth BDR(GFSK) Mid/Area Scan (9x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00848 W/kg

**Limbs-Worn/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0670 W/kg

**SAR(1 g) = 0.00632 W/kg; SAR(10 g) = 0.00285 W/kg**

Maximum value of SAR (measured) = 0.0408 W/kg

