

# BT Test Report

**Application Purpose** : Original grant  
**Applicant Name:** : AMobile Intelligent Corp.  
**FCC ID** : 2ACC5-HM800  
**Equipment Type** : 8 Risc-based Panel PC  
**Model Name** : IOT-800  
**Report Number** : FCC16023446-2  
**Standard(S)** : FCC Part 15 Subpart C  
**Date Of Receipt** : February 01, 2016  
**Date Of Issue** : June 14, 2016

**Test By** : Fall Ma  
(Fall Ma)

**Reviewed By** : Robie Chen  
(Robie Chen)

**Authorized by** : Michal Ling  
(Michal Ling)

**Prepared by** :  
**Shenzhen WST Testing Technology Co., Ltd.**  
1F,No.9 Building,TGK Science & Technology ParkYangtian  
Rd., NO.72 Bao'an Dist.,GuangDong,China

**REPORT REVISE RECORD**

<b>Report Version</b>	<b>Revise Time</b>	<b>Issued Date</b>	<b>Valid Version</b>	<b>Notes</b>
V1.0		May 30, 2016	Valid	Original Report
V1.1	20160614	June 14, 2016	Valid	Revised Report
V1.2	20160624	June 24, 2016	Valid	Revised Report

<b>GENERAL DESCRIPTION OF EUT .....</b>	<b>5</b>
<b>2. TEST DESCRIPTION.....</b>	<b>7</b>
2.1 MEASUREMENT UNCERTAINTY .....	7
2.2 DESCRIPTION OF TEST MODES .....	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING.....	9
2.4 CONFIGURATION OF SYSTEM UNDER TEST .....	9
2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE) .....	10
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>4. MEASUREMENT INSTRUMENTS .....</b>	<b>12</b>
<b>§15.203 - ANTENNA REQUIREMENT.....</b>	<b>13</b>
STANDARD APPLICABLE .....	13
ANTENNA CONNECTOR CONSTRUCTION.....	13
<b>§15.207 - CONDUCTED EMISSIONS .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
TEST PROCEDURE.....	14
ENVIRONMENTAL CONDITIONS.....	14
PLOT(S) OF TEST DATA .....	14
<b>§15.209, §15.205, §15.247(D) - SPURIOUS EMISSIONS .....</b>	<b>17</b>
TEST EQUIPMENT .....	17
TEST PROCEDURE.....	17
ENVIRONMENTAL CONDITIONS.....	17
RADIATED TEST SETUP.....	18
RADIATED EMISSION LIMIT .....	20
<b>§15.247(A) (2) – 6DB BANDWIDTH TESTING .....</b>	<b>29</b>
TEST EQUIPMENT .....	29
TEST PROCEDURE.....	29
ENVIRONMENTAL CONDITIONS.....	29
APPLICABLE STANDARD .....	29
TEST RESULT: PASS.....	30
<b>§15.247(B) (3) - MAXIMUM PEAK OUTPUT POWER .....</b>	<b>32</b>
TEST EQUIPMENT .....	32
TEST PROCEDURE.....	32

ENVIRONMENTAL CONDITIONS.....	32
APPLICABLE STANDARD .....	32
TEST RESULT .....	33
<b>§15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>35</b>
TEST EQUIPMENT .....	35
TEST PROCEDURE.....	35
ENVIRONMENTAL CONDITIONS.....	35
APPLICABLE STANDARD .....	35
TEST RESULT .....	35
<b>§15.247(E) -MAXIMUM CONDUCTED POWER SPECTRAL DENSITY .....</b>	<b>38</b>
TEST EQUIPMENT .....	38
TEST PROCEDURE.....	38
ENVIRONMENTAL CONDITIONS.....	38
APPLICABLE STANDARD .....	38
TEST RESULT .....	39
<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>41</b>
<b>PHOTOGRAPHS OF EUT .....</b>	<b>43</b>

# 1. GENERAL INFORMATION

## GENERAL DESCRIPTION OF EUT

Test Model	IOT-800
Applicant	AMobile Intelligent Corp.
Address	8F-1., No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan.
Manufacturer	Shenzhen JOYHONG Technology Co., Ltd.
Address	Building A2, Zhengfeng Industrial Park, Fengtang Road, Fuyong, Baoan, Shenzhen ,China.
Equipment Type	8 Risc-based Panel PC
Brand Name	<b>AMobile</b>
Hardware version:	MB.HMI8_ REV 0.3
Software version:	1.0.0
Extreme Temp. Tolerance	-10°C to +50°C
Adapter Information:	DC power 12V 2A
Operating Frequency	2402-2480MHz
Channels	40
Channel Spacing	2MHz
Modulation Type	GFSK
Version	4.0
Antenna Type:	Detachable Antenna
Antenna gain:	2 dBi
Data of receipt	February 01, 2016
Date of test	February 05, 2016 to March 11, 2016
Deviation	None
Condition of Test Sample	Normal

*Note: WIFI & BT can not simultaneous work.*

**We hereby certify that:**

The above equipment was tested by Shenzhen WST Testing Technology Co., Ltd.

1F, No.9 Building, TGK Science & Technology Park Yangtian Rd., NO.72 Bao'an Dist., Guangdong, China

Registration Number: 939433

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2014. The sample tested as described in this report is in compliance with the FCC Rules Part 15 Subpart C.

The test results of this report relate only to the tested sample identified

## 2. TEST DESCRIPTION

### 2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2$ dB
2	RF power, conducted	$\pm 0.16$ dB
3	Spurious emissions, conducted	$\pm 0.21$ dB
4	All emissions, radiated(<1G)	$\pm 4.7$ dB
5	All emissions, radiated(>1G)	$\pm 4.7$ dB
6	Temperature	$\pm 0.5$ °C
7	Humidity	$\pm 2$ %

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH20
Mode 3	CH39
Mode 4	Normal Hopping

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH20
Mode 3	CH39

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.**
- (2) Record the worst case of each test item in this report.**
- (3) Record the worst case of each test item in this report, for the radiated emission test, the worst case is transmit antenna Perpendicular to the panel of EUT**




## 2.3 Table of Parameters of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	N/A		
-----------------------	-----	--	--

Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF

## 2.4 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: 8 Risc-based Panel PC)

## 2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapater	/	XY-Ap120200	/	/

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

### 3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.247) , Subpart C</b>			
<b>Standard Section</b>	<b>Test Item</b>	<b>Judgment</b>	<b>Remark</b>
15.203	Antenna Requirement	PASS	
15.207	Conducted Emission	PASS	
15.209, 15.205, 15.247(d)	Spurious Emission	PASS	
15.247(a) (2)	6dB Bandwidth Testing	PASS	
15.247(b) (3)	Maximum Peak Output Power	PASS	
15.247(d)	100 KHz Bandwidth of Frequency Band Edge	PASS	
15.247(e)	Maximum Conducted Power Spectral Density	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report.

#### 4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
EMI Test Receiver	R&S	ESCI	100005	08/19/2015	08/18/2016
LISN	AFJ	LS16	16010222119	08/19/2015	08/18/2016
LISN(EUT)	Mestec	AN3016	04/10040	08/19/2015	08/18/2016
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	08/19/2015	08/18/2016
Coaxial cable	Megalon	LMR400	N/A	08/12/2015	08/11/2016
GPIB cable	Megalon	GPIB	N/A	08/12/2015	08/11/2016
Spectrum Analyzer	R&S	FSU	100114	08/19/2015	08/18/2016
Pre Amplifier	H.P.	HP8447E	2945A02715	10/13/2015	10/12/2016
Pre-Amplifier	CDSI	PAP-1G18-38	--	10/13/2015	10/12/2016
Bi-log Antenna	SUNOL Sciences	JB3	A021907	09/13/2015	09/12/2016
9*6*6 Anechoic	--	--	--	08/21/2015	08/20/2016
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/13/2015	09/12/2016
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	08/23/2015	08/22/2016
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	04/25/2015	04/24/2016
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	08/21/2015	08/20/2016
Loop Antenna	EMCO	6502	00042960	08/22/2015	08/21/2016
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	08/19/2015	08/18/2016
Power meter	Anritsu	ML2487A	6K00003613	08/23/2015	08/22/2016
Power sensor	Anritsu	MX248XD	--	08/19/2015	08/18/2016

## **§15.203 - ANTENNA REQUIREMENT**

### **Standard Applicable**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT's antenna is Detachable Antenna but the type of connection is RP-SMA connector, The antenna's gain is 2 dBi and meets the requirement.

## §15.207 - CONDUCTED EMISSIONS

### Applicable Standard

The specification used was with the FCC Part 15.207 limits.

### Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Test Result

PASS


### Test Conditions

Temperature:	26 °C
Relative Humidity:	60%
ATM Pressure:	100.0kPa
Voltage	120V/60Hz

### Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Phase: Live

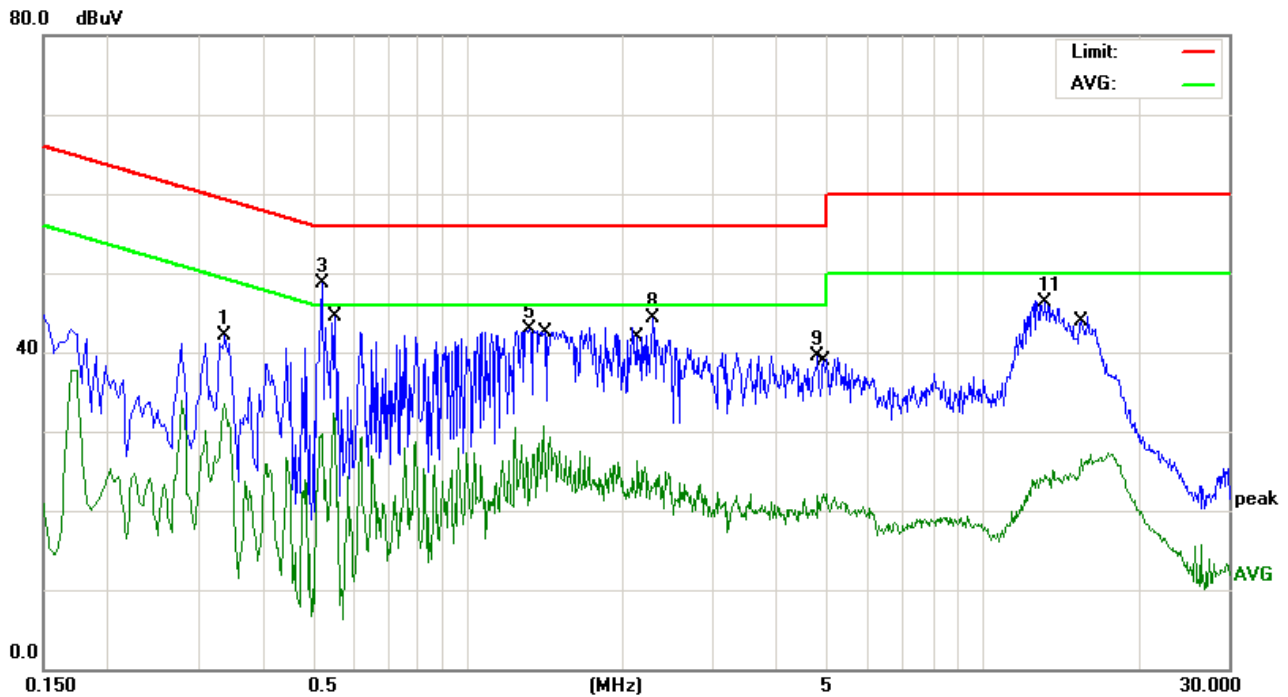

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.3379	31.66	10.42	42.08	59.25	-17.17	peak
2		0.3379	23.09	10.42	33.51	49.25	-15.74	AVG
3	*	0.5220	38.26	10.40	48.66	56.00	-7.34	peak
4		0.5500	21.90	10.39	32.29	46.00	-13.71	AVG
5		1.3220	32.67	10.32	42.99	56.00	-13.01	peak
6		1.4100	20.45	10.32	30.77	46.00	-15.23	AVG
7		2.1419	15.93	10.29	26.22	46.00	-19.78	AVG
8		2.2900	33.93	10.28	44.21	56.00	-11.79	peak
9		4.7899	29.20	10.23	39.43	56.00	-16.57	peak
10		4.9099	11.91	10.23	22.14	46.00	-23.86	AVG
11		13.2179	36.20	10.16	46.36	60.00	-13.64	peak
12		15.5339	16.33	10.15	26.48	50.00	-23.52	AVG

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.

Phase: Neutral

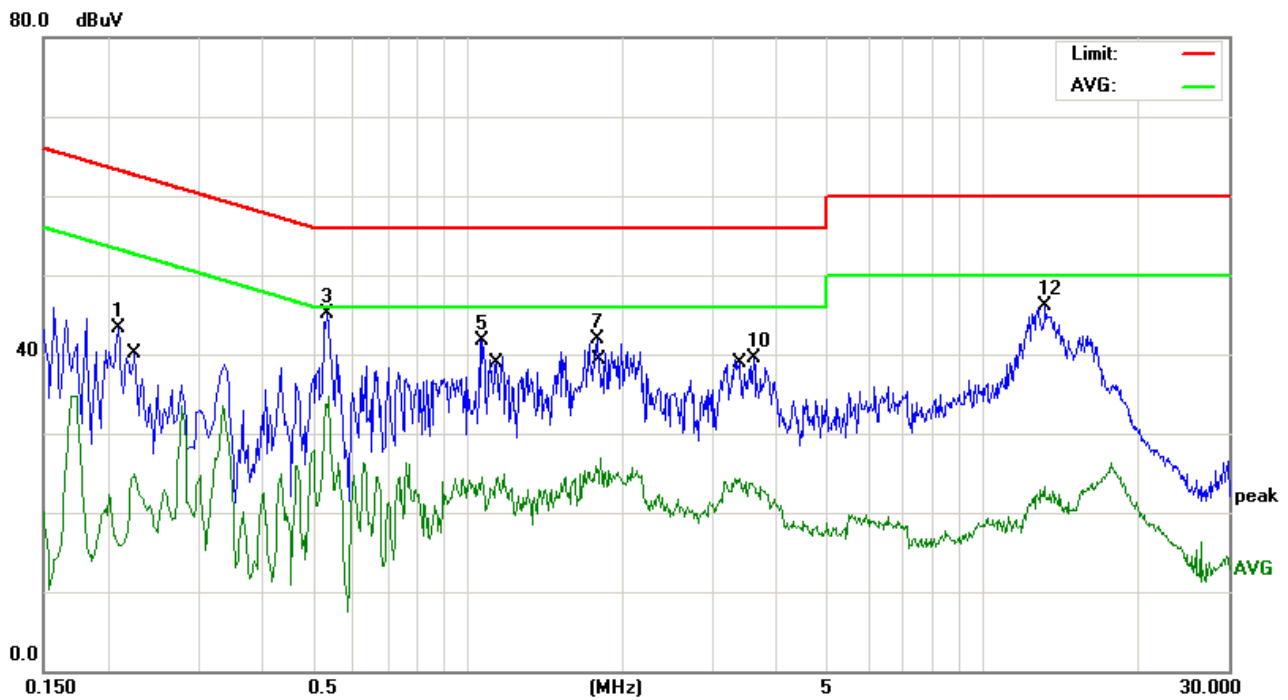

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	32.79	10.43	43.22	63.20	-19.98	peak
2		0.2260	14.38	10.43	24.81	52.59	-27.78	AVG
3	*	0.5340	34.72	10.40	45.12	56.00	-10.88	peak
4		0.5380	24.38	10.40	34.78	46.00	-11.22	AVG
5		1.0660	31.39	10.34	41.73	56.00	-14.27	peak
6		1.1460	14.14	10.33	24.47	46.00	-21.53	AVG
7		1.7860	31.51	10.30	41.81	56.00	-14.19	peak
8		1.8140	16.63	10.30	26.93	46.00	-19.07	AVG
9		3.3700	14.00	10.26	24.26	46.00	-21.74	AVG
10		3.5860	29.20	10.26	39.46	56.00	-16.54	peak
11		13.1739	13.10	10.16	23.26	50.00	-26.74	AVG
12		13.2619	35.93	10.16	46.09	60.00	-13.91	peak

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.



## §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS

### Test Equipment

Please refer to section 4 this report.

### Test Procedure

The out of band emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

***Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported***

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	100.0kPa


### Radiated Test Setup

The system was investigated from 9 KHz to 25 GHz.


During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9KHz-30MHz	9kHz	30 kHz	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave


(A) Radiated Emission Test-Up Frequency Below 30MHz

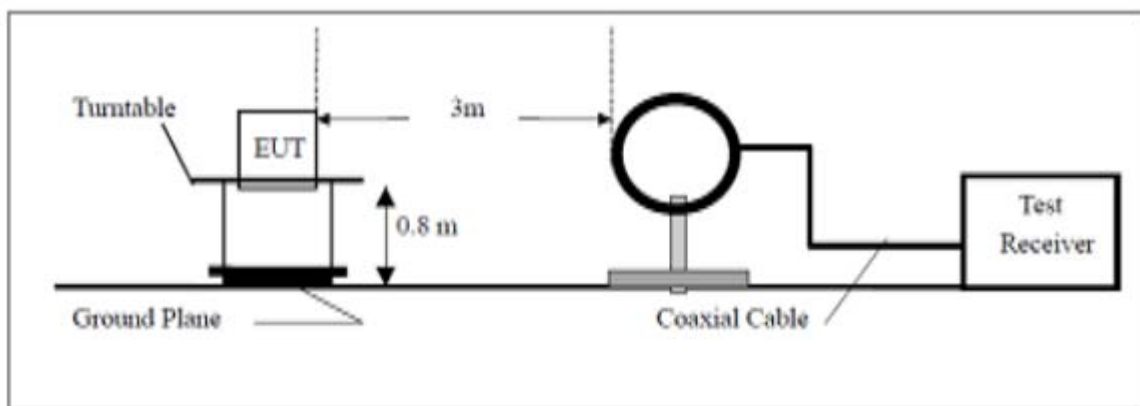

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

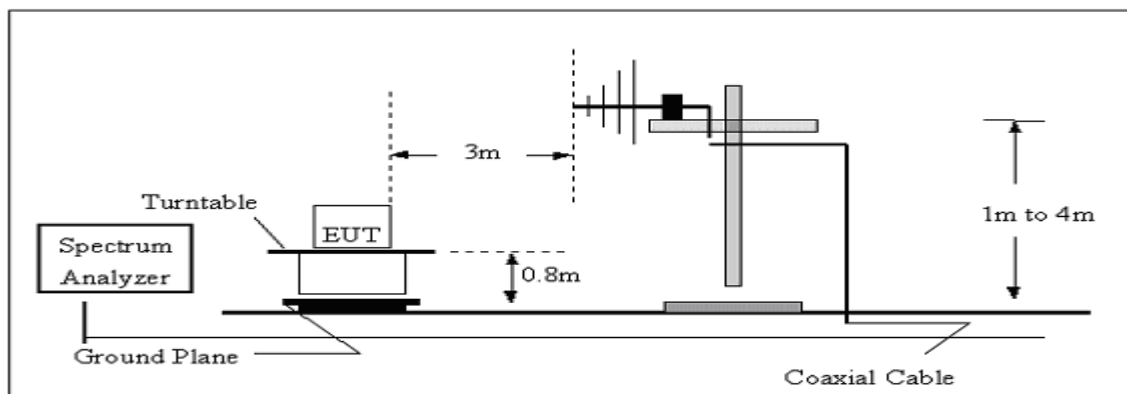

## (C) Radiated Emission Test-Up Frequency Above 1GHz

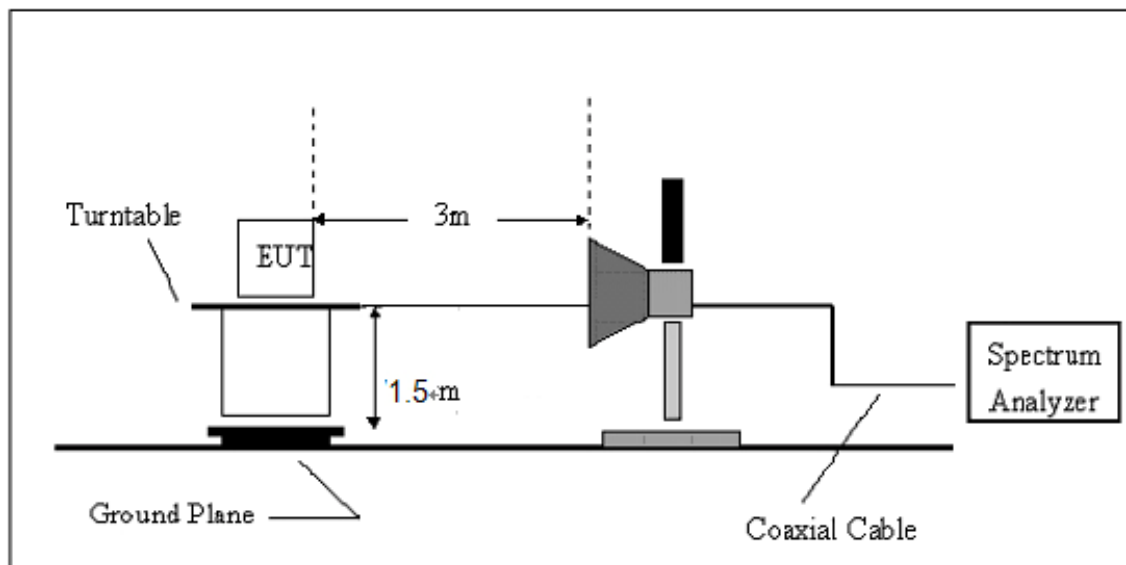

For the accrual test configuration, please refer to the related items-photos of Testing.

## Radiated Emission Limit

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Radiated Emission Test Result

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

*Test Mode: Transmitting*

Note:

***Both horizontal and vertical antenna polarities were tested***

***and performed pretest to three orthogonal axis. The worst case emissions were reported***


### Test result:

From 9KHz to 30MHz

NOTE: 9KHz-30MHz the measurements were greater than 20dB below the limit.


From 30MHz to 1GHz

**Horizontal:**

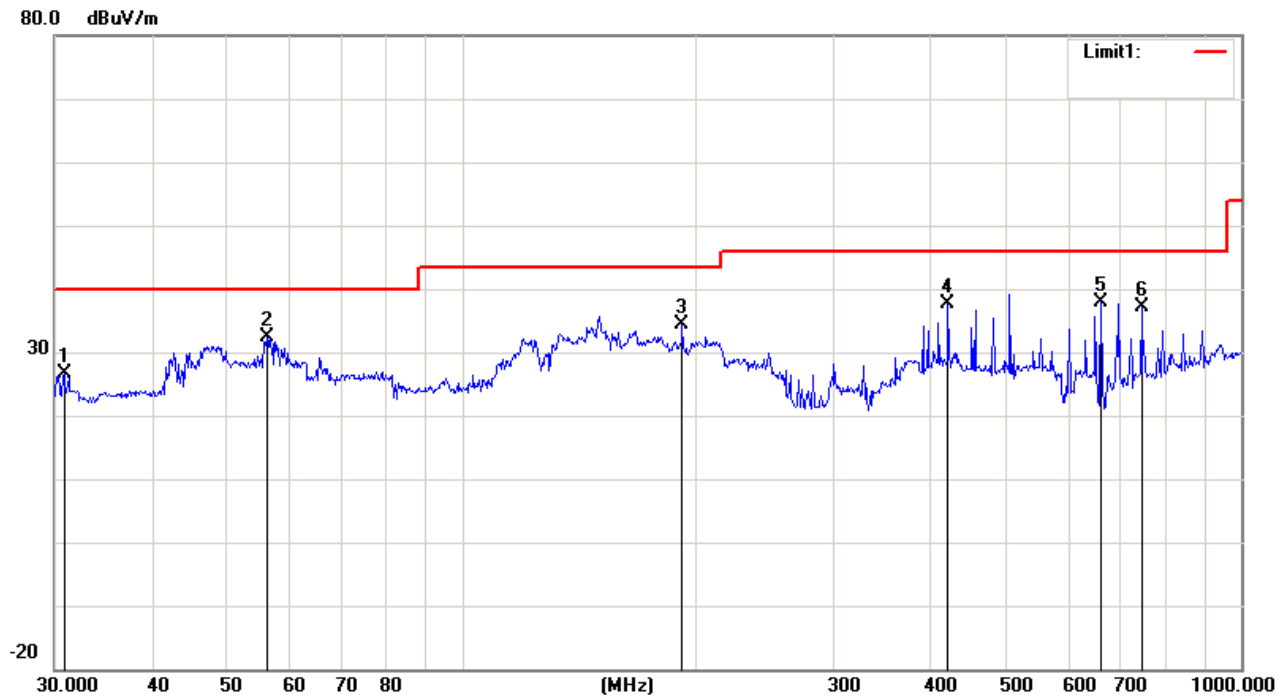

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		30.8535	23.82	2.92	26.74	40.00	-13.26	peak
2	*	56.1974	41.91	-9.48	32.43	40.00	-7.57	peak
3		191.7450	39.78	-5.29	34.49	43.50	-9.01	peak
4		420.5803	40.12	-2.40	37.72	46.00	-8.28	peak
5		661.1503	36.31	1.69	38.00	46.00	-8.00	peak
6		744.8659	33.43	3.58	37.01	46.00	-8.99	peak

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.

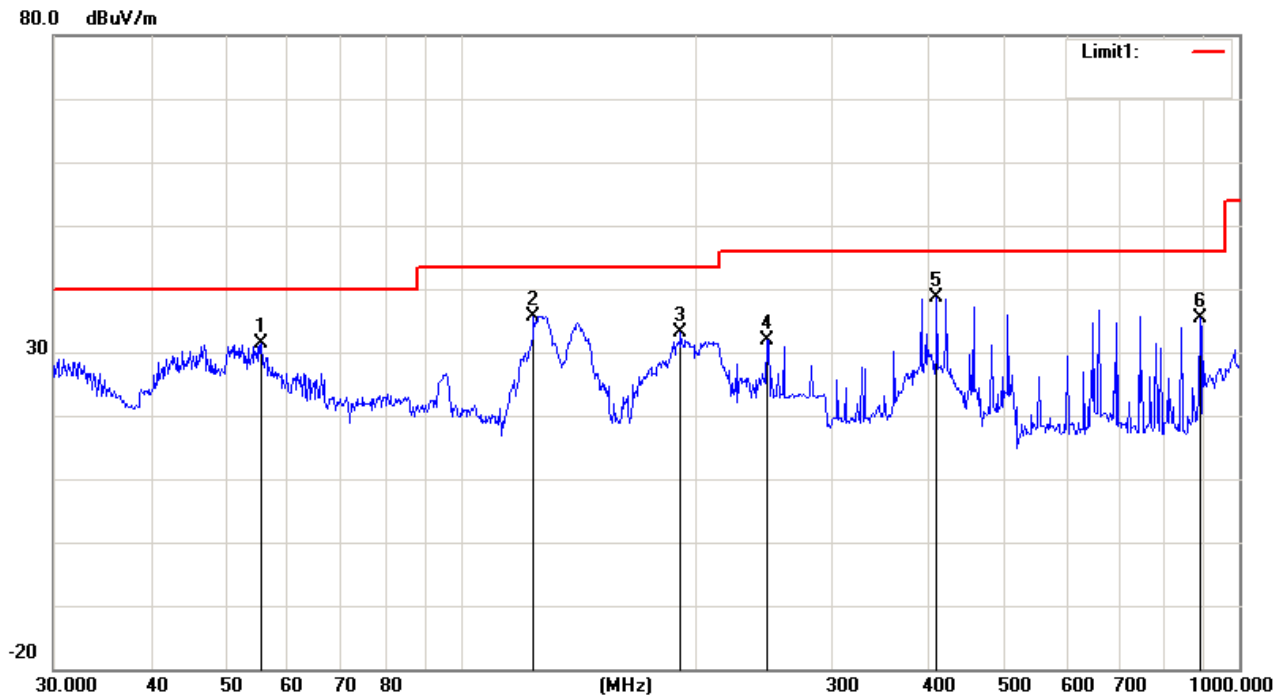**Vertical:**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		55.4147	40.75	-9.49	31.26	40.00	-8.74	peak
2		124.1329	37.90	-2.16	35.74	43.50	-7.76	peak
3		191.7450	38.50	-5.29	33.21	43.50	-10.29	peak
4		247.6819	38.47	-6.52	31.95	46.00	-14.05	peak
5	*	408.9460	40.58	-1.98	38.60	46.00	-7.40	peak
6		890.7278	30.04	5.33	35.37	46.00	-10.63	peak

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.

From 1GHz to 25GHz:

Operation Mode:	Channel 0	Test Date :	February,25, 2016
Frequency Range:	Above 1GHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Fall Ma

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4804.68	V	58.11	39.54	74	54	-15.89	-14.46
7206.91	V	58.69	39.78	74	54	-15.31	-14.22
9608.51	V	58.81	39.02	74	54	-15.19	-14.98
4804.68	H	58.69	39.69	74	54	-15.31	-14.31
7206.95	H	59.12	39.87	74	54	-14.88	-14.13

**All emissions not reported were more than 20dB below the specified limit or in the noise floor.**

- Note:** (1) All Readings are Peak Value and AV.  
 (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: Channel 20                      Test Date : February,25, 2016  
 Frequency Range: Above 1GHz                      Temperature : 28°C  
 Test Result: PASS                                      Humidity : 65 %  
 Measured Distance: 3m                              Test By: Fall Ma

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4884.61	V	59.65	39.36	74	54	-14.35	-14.64
7326.53	V	59.34	39.06	74	54	-14.66	-14.94
4884.87	H	59.07	39.22	74	54	-14.93	-14.78
7326.59	H	59.54	40.54	74	54	-14.46	-13.46
9768.27	H	60.97	40.97	74	54	-13.03	-13.03

**All emissions not reported were more than 20dB below the specified limit or in the noise floor.**

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: Channel 39                      Test Date : February,25, 2016  
 Frequency Range: Above 1GHz                      Temperature : 28°C  
 Test Result: PASS                                      Humidity : 65 %  
 Measured Distance: 3m                                      Test By: Fall Ma

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.74	V	60.46	39.29	74	54	-13.54	-14.71
7440.96	V	58.83	40.27	74	54	-15.17	-13.73
9920.67	V	59.30	39.26	74	54	-14.70	-14.74
4960.59	H	59.02	40.02	74	54	-14.98	-13.98
7440.63	H	59.49	40.05	74	54	-14.51	-13.95



**All emissions not reported were more than 20dB below the specified limit or in the noise floor.**

### **1.3.**



- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

### Antenna port conducted spurious emissions



#### Low channel

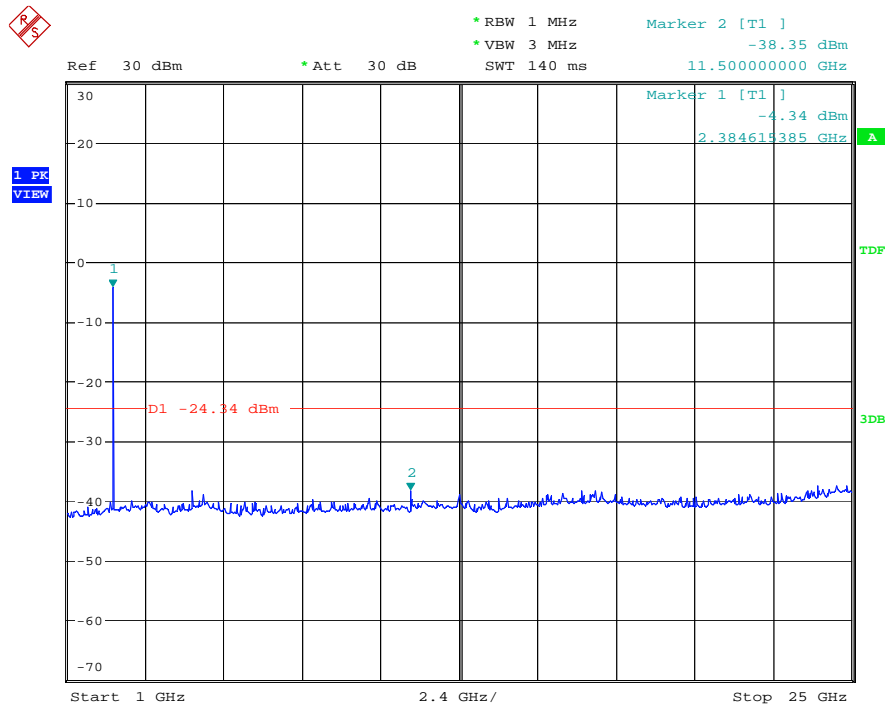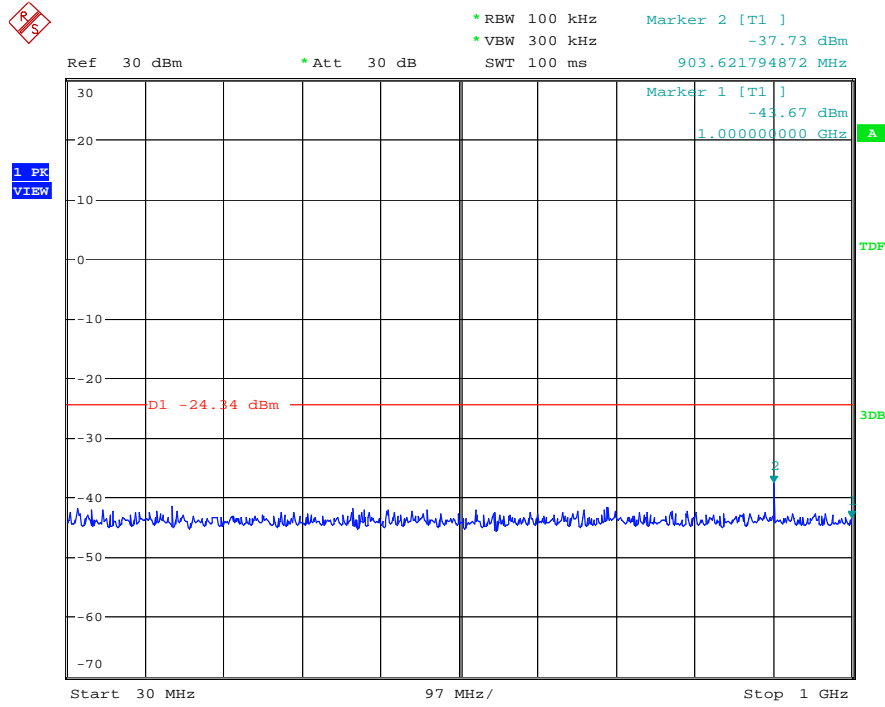

### Middle channel

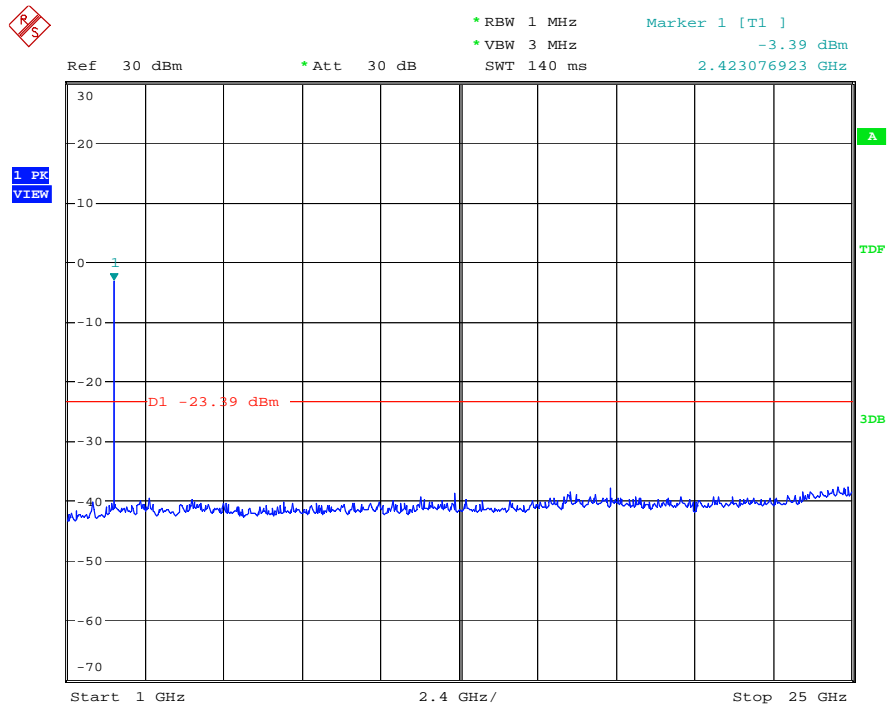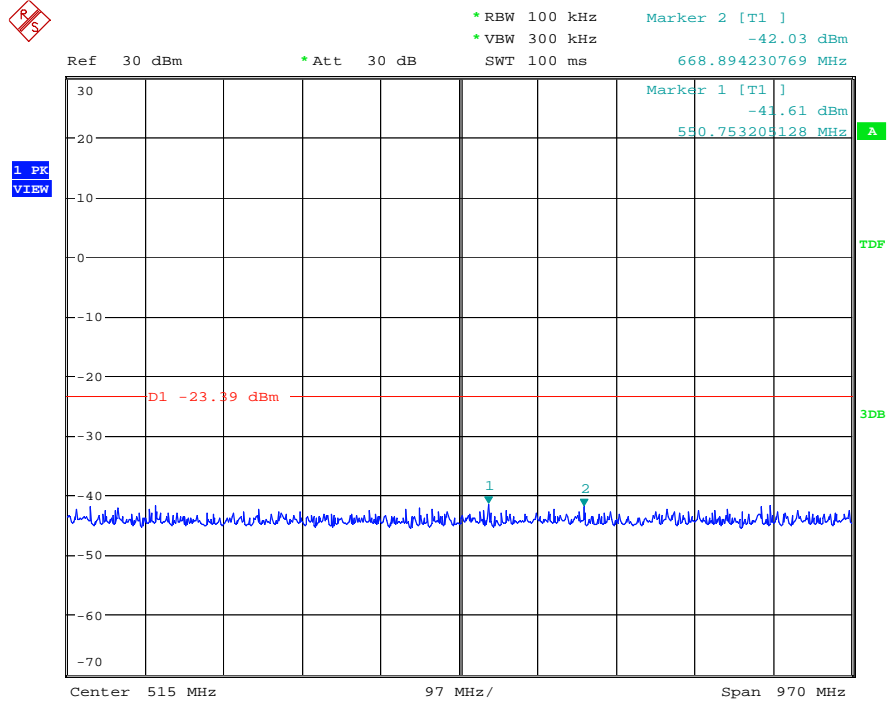

### High channel

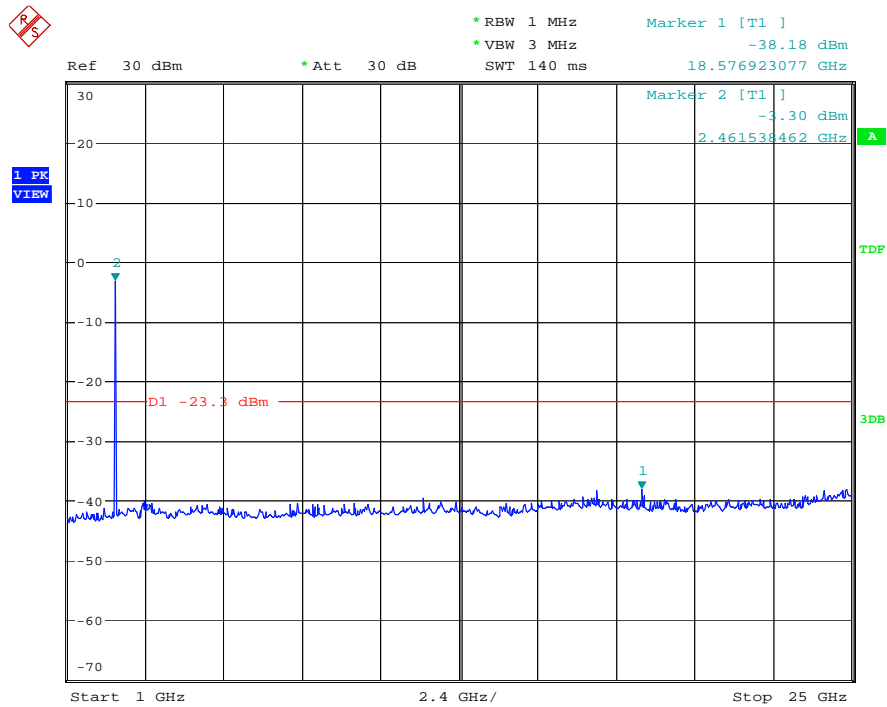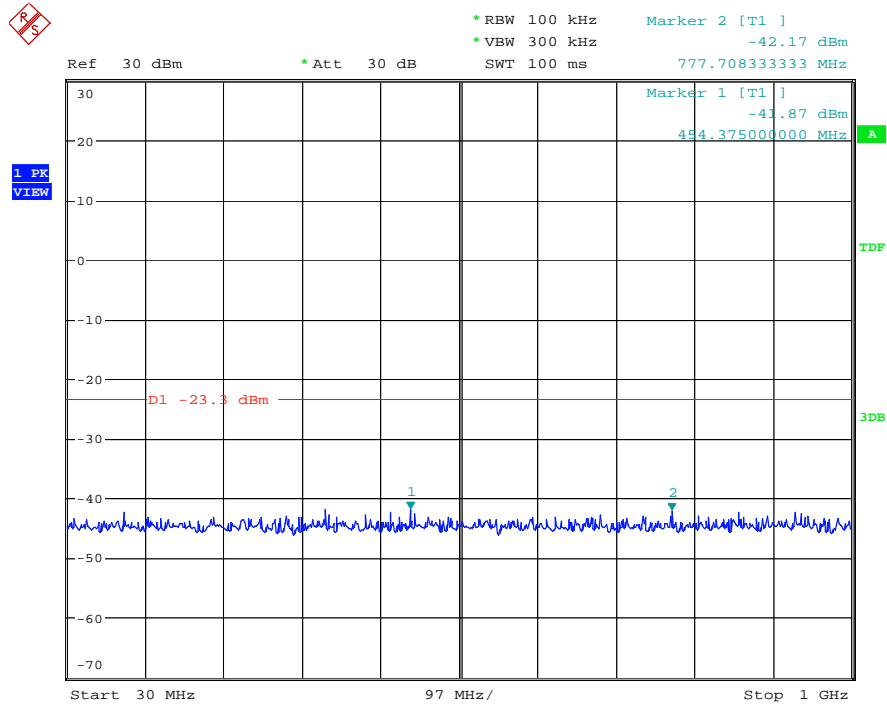

## §15.247(a) (2) – 6dB BANDWIDTH TESTING

### Test Equipment

Please refer to Section 4 this report.

### Test Procedure

1. Set EUT in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz, VBW $\geq$ RBW, Span=3MHz, Sweep=auto.
4. Mark the peak frequency and -6dB(upper and lower)frequency.
5. Repeat until all the rest channels are investigated.

**Note** : The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	100.0kPa

### Applicable Standard


Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Result: Pass.


Please refer to the following tables

Channel Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)	Limit (kHz)	Ref. Plot
2402	1	701.92	>500	PLOT 1
2440	1	692.30	>500	PLOT 2
2480	1	711.53	>500	PLOT 3


#### Low Channel

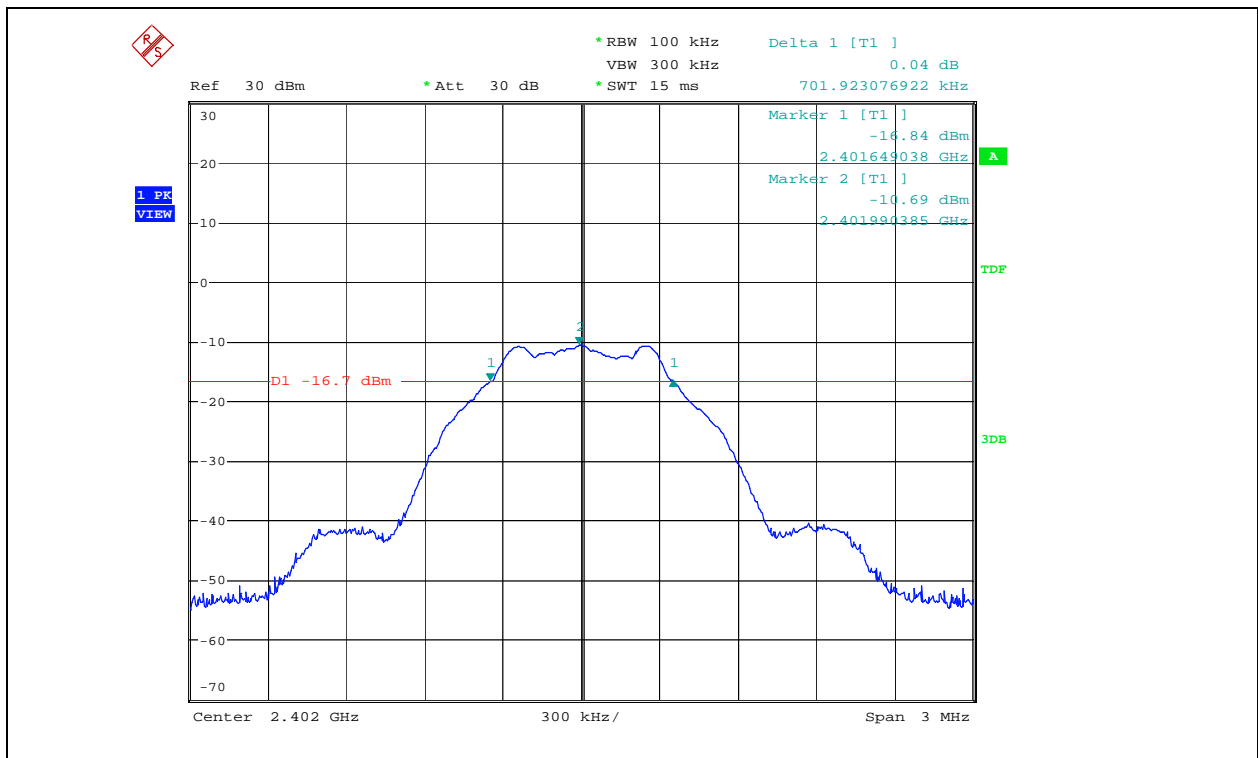

### Middle channel

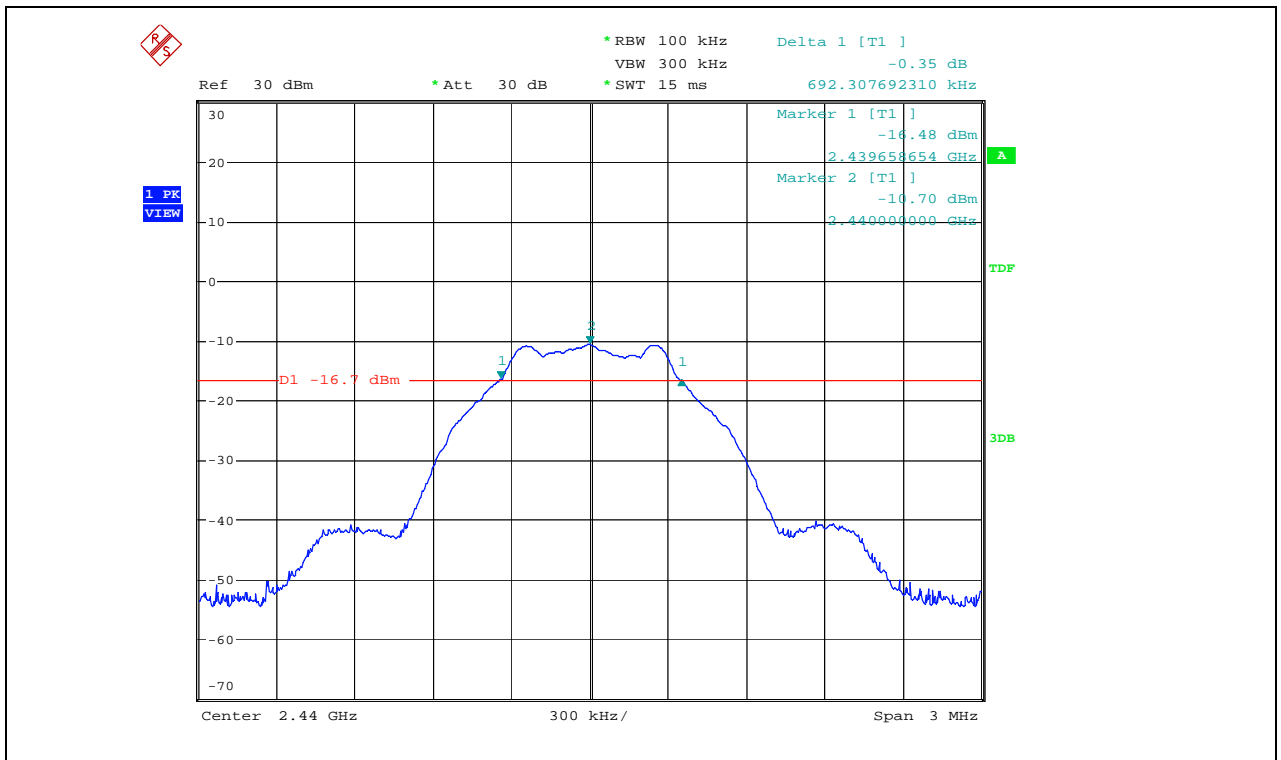

### High Channel

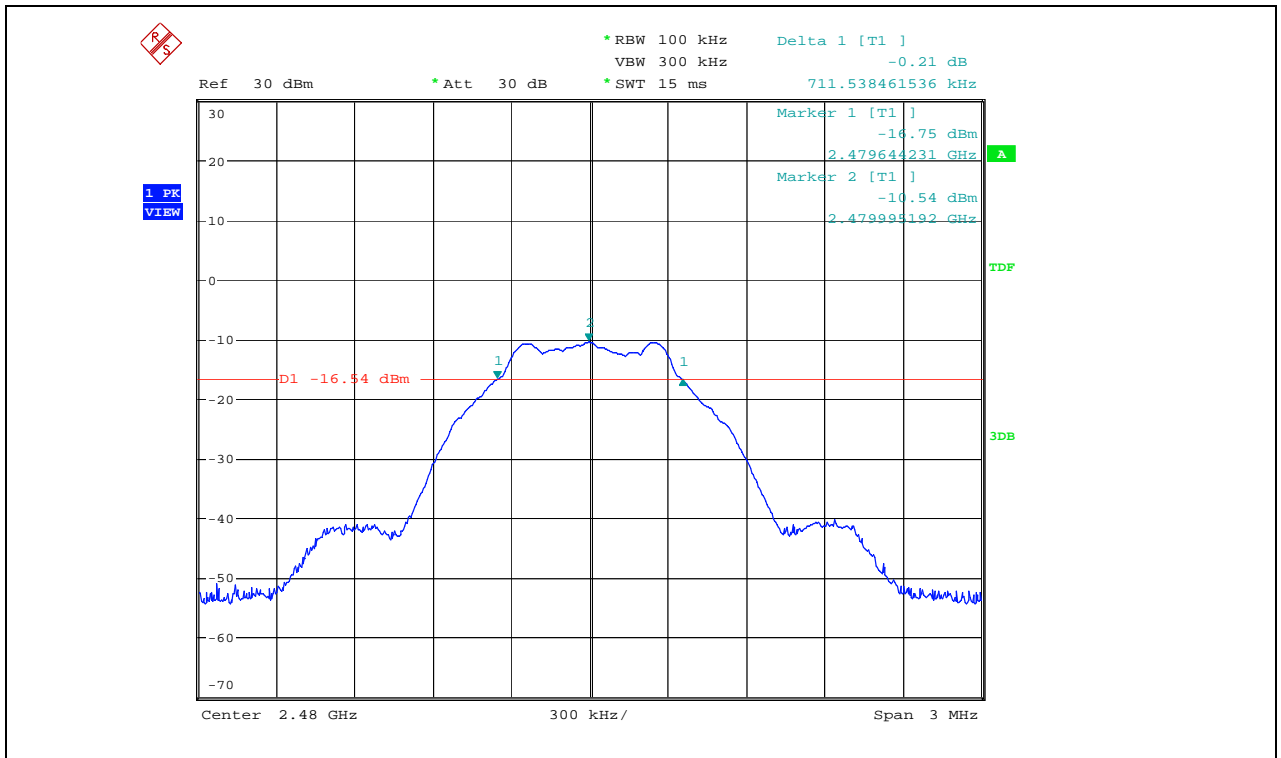

## §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

### Test Equipment

Please refer to Section 4 this report.

### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set the RBW =1MHz, VBW  $\cong$  3RBW, span  $\cong$  1.5\*6dbbandwith.  
Sweep time = auto couple, Detector = peak, Trace mode = max hold.
4. Record the maximum power from the spectrum analyzer.
5. The maximum peak power shall be less 1 Watt (30dBm).

**Note** : The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	100.0kPa

### Applicable Standard


According to §15.247(b) (3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.




### Test Result

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2402	1	-7.51	30
Middle	2440	1	-3.82	30
High	2480	1	-5.23	30


### Low channel

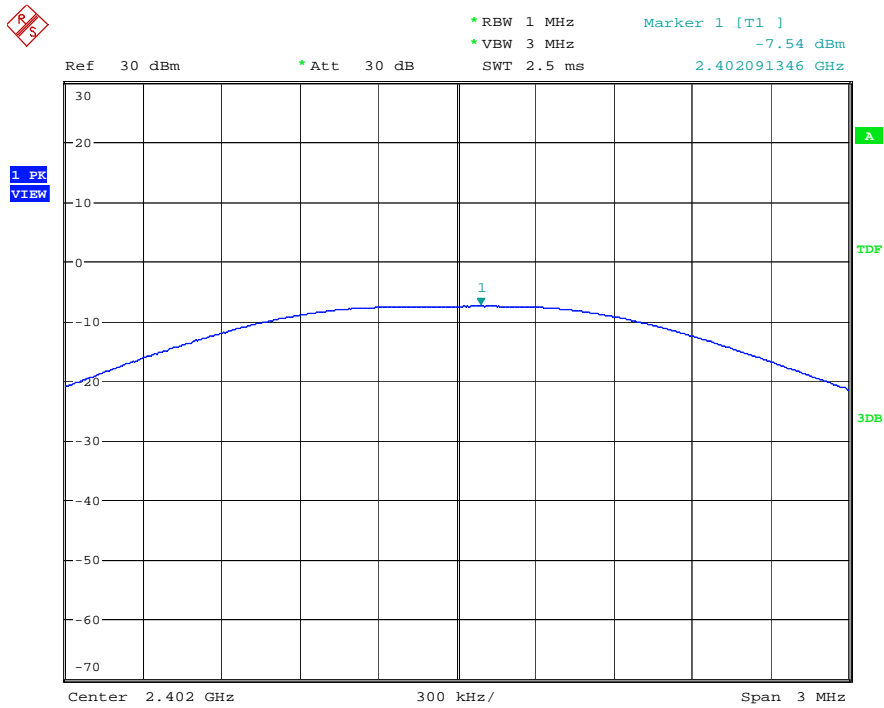

### Middle channel

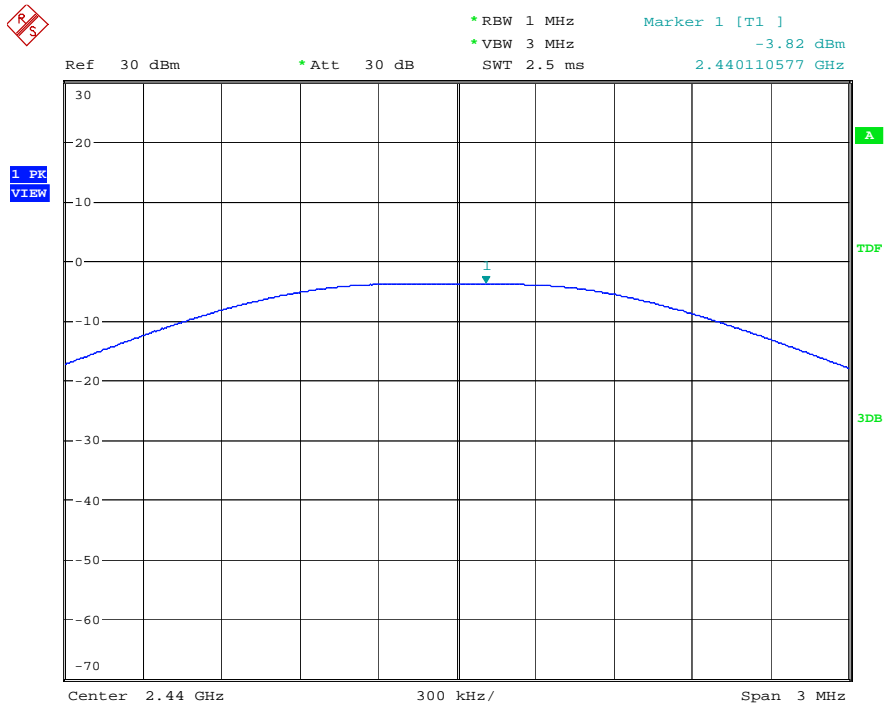

### High channel

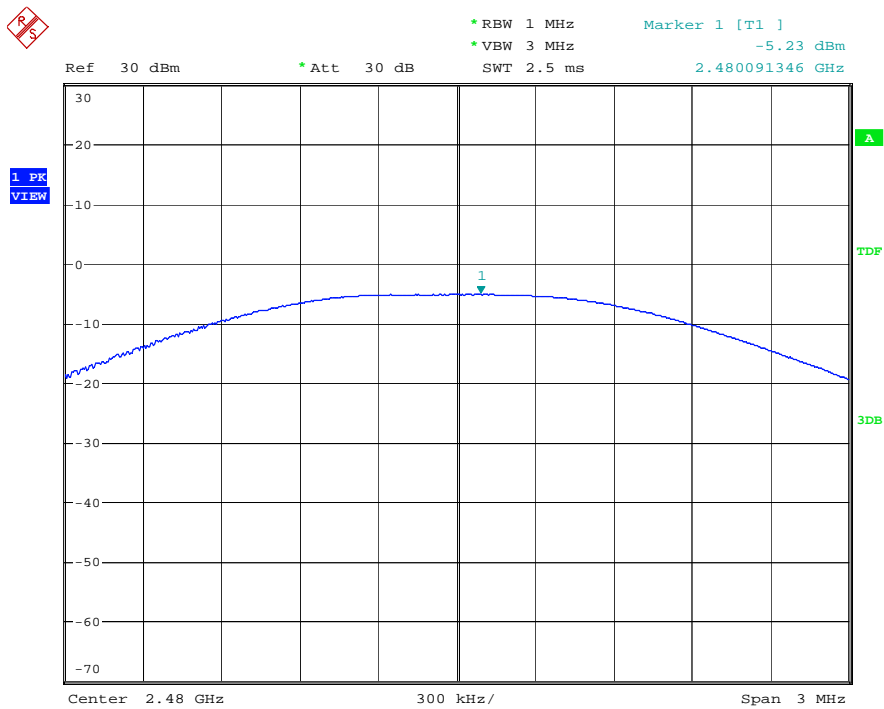

## §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Test Equipment

Please refer to Section 4 this report.

### Test Procedure

The out of band emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	100.0kPa

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### Test Result

PASS


**Radiated measurement:**

Indicated		result (PK/AV)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dB $\mu$ V/m)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel (2402MHz)											
2390	40.12	AV	225	1.5	V	30.3	4.1	33.1	41.42	54	12.58
2390	41.84	AV	90	2	H	30.3	4.1	33.1	40.54	54	10.86
2390	61.17	PK	180	1.5	V	30.3	4.1	33.1	41.42	74	11.53
2390	61.87	PK	270	2	H	30.3	4.1	33.1	63.17	74	10.83
2400	37.54	AV	225	1.5	V	30.5	4.2	33	39.24	54	14.76
2400	37.84	AV	90	2	H	30.5	4.2	33	39.54	54	14.46
2400	53.07	PK	180	1.5	V	30.5	4.2	33	54.77	74	19.23
2400	55.18	PK	270	2	H	30.5	4.2	33	56.88	74	17.12
High Channel (2480MHz)											
2480	37.46	AV	360	1	V	30.8	4.3	32.6	36.69	54	17.31
2480	36.93	AV	90	2	H	30.8	4.3	32.6	34.19	54	19.81
2480	52.65	PK	180	1	V	30.8	4.3	32.6	47.49	74	26.51
2480	53.08	PK	225	2	H	30.8	4.3	32.6	46.82	74	27.18
2483.5	41.03	AV	360	1	V	31	4.4	32.7	43.73	54	10.27
2483.5	41.23	AV	90	2	H	31	4.4	32.7	43.93	54	10.07
2483.5	60.47	PK	180	1	V	31	4.4	32.7	63.17	74	10.83
2483.5	60.73	PK	225	2	H	31	4.4	32.7	63.43	74	10.57

### Low channel

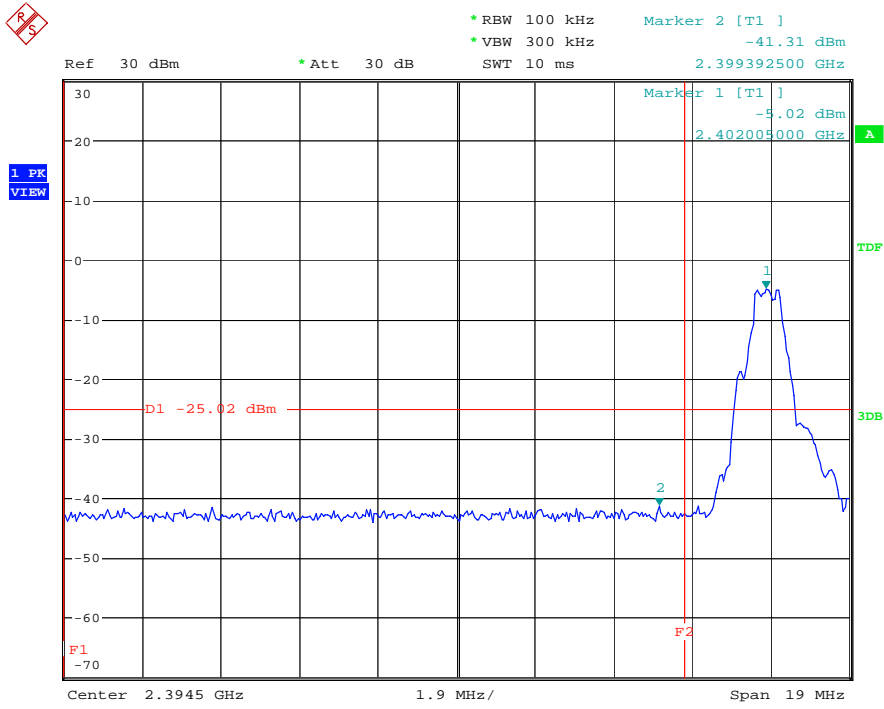

### High channel

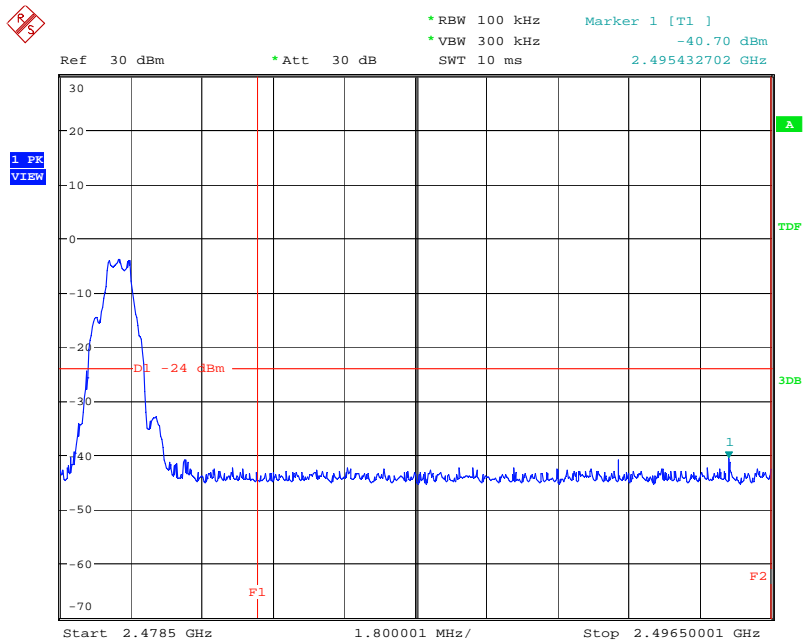

## §15.247(e) -MAXIMUM CONDUCTED POWER SPECTRAL DENSITY

### Test Equipment

Please refer to Section 4 this report.

### Test Procedure

- 1, This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.
- 2, Set analyzer center frequency to DTS channel center frequency.
- 3, Set the RBW to:3 kHz  $\leq$ RBW  $\leq$ 100 kHz, Set the VBW  $\geq$ 3 RBW, Detector = peak. Sweep time = auto couple
- 4, Trace mode = max hold, Allow trace to fully stabilize.

**Note** : The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55%
ATM Pressure:	100.0kPa

### Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Result


PASS

Channel Frequency (MHz)	Data Rate (Mbps)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	RESULT
2402	1	-25.19	8	Compliant
2440	1	-21.48	8	Compliant
2480	1	-20.31	8	Compliant


### Low Channel

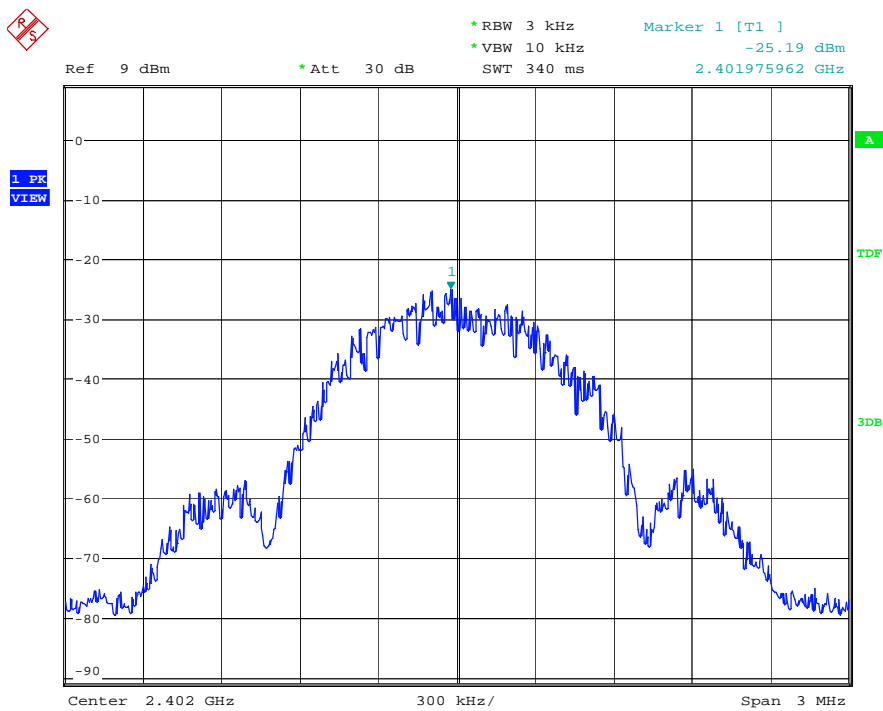

### Middle Channel

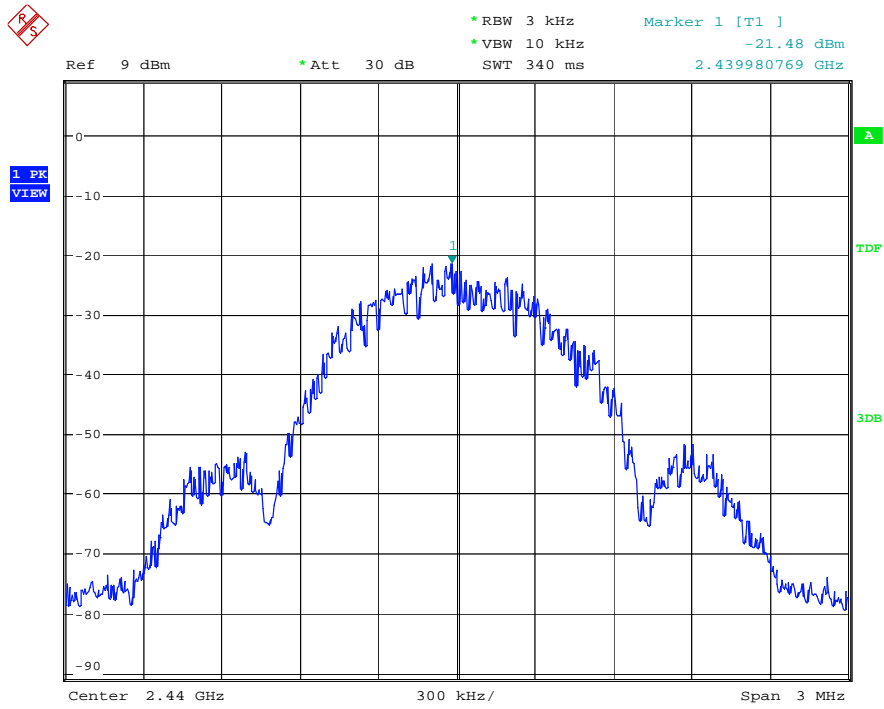

### High Channel

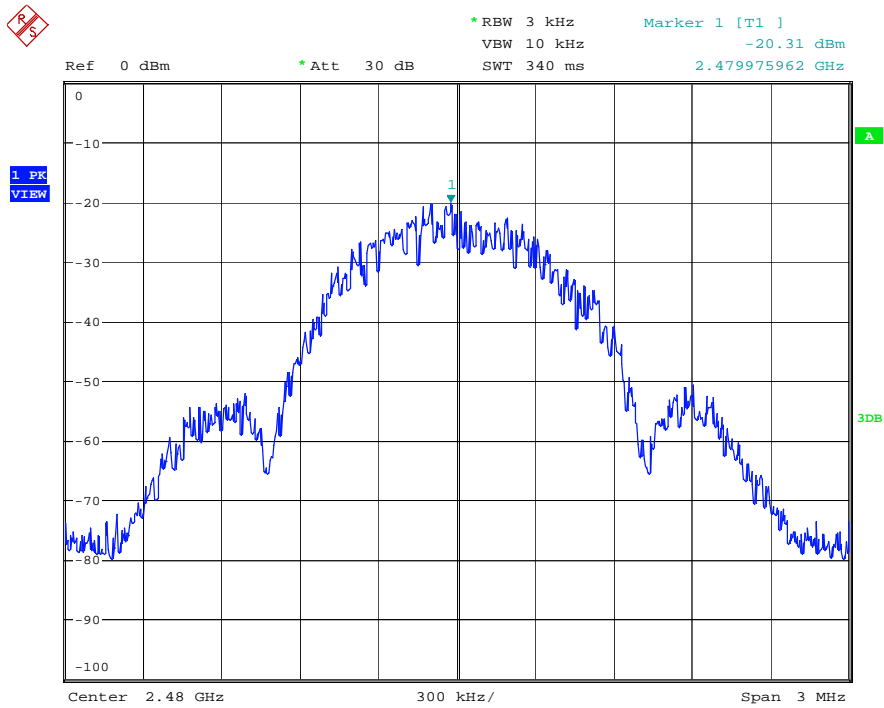




## PHOTOGRAPHS OF THE TEST CONFIGURATION


### CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST

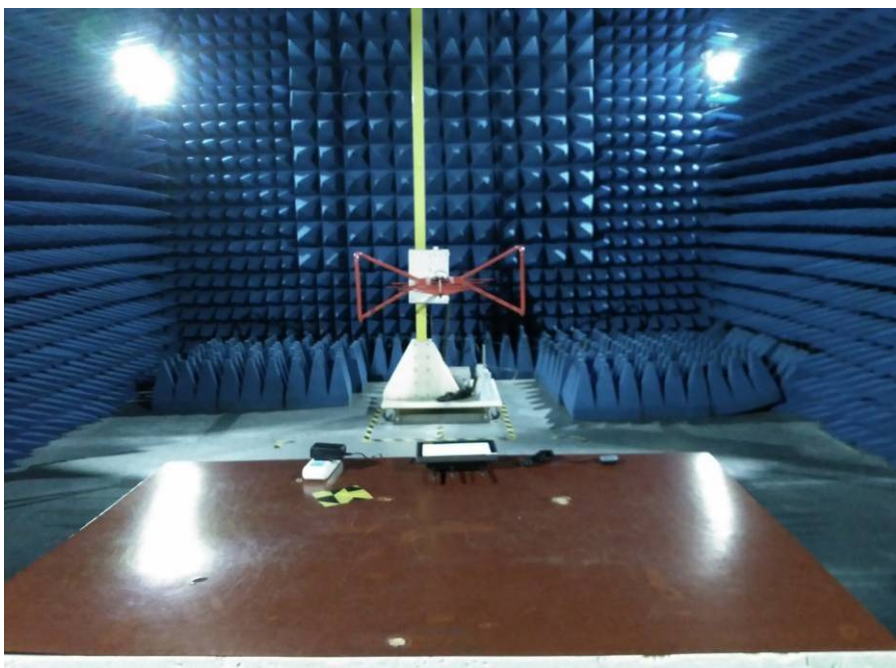

**RADIATED EMISSION TEST**

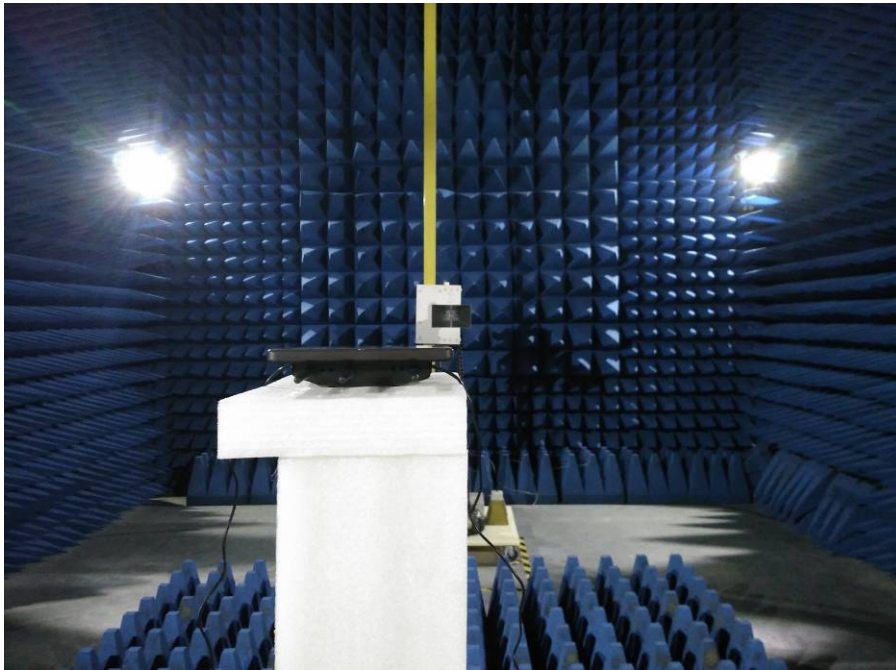


## PHOTOGRAPHS OF EUT

Appearance photograph of EUT



Appearance photograph of EUT

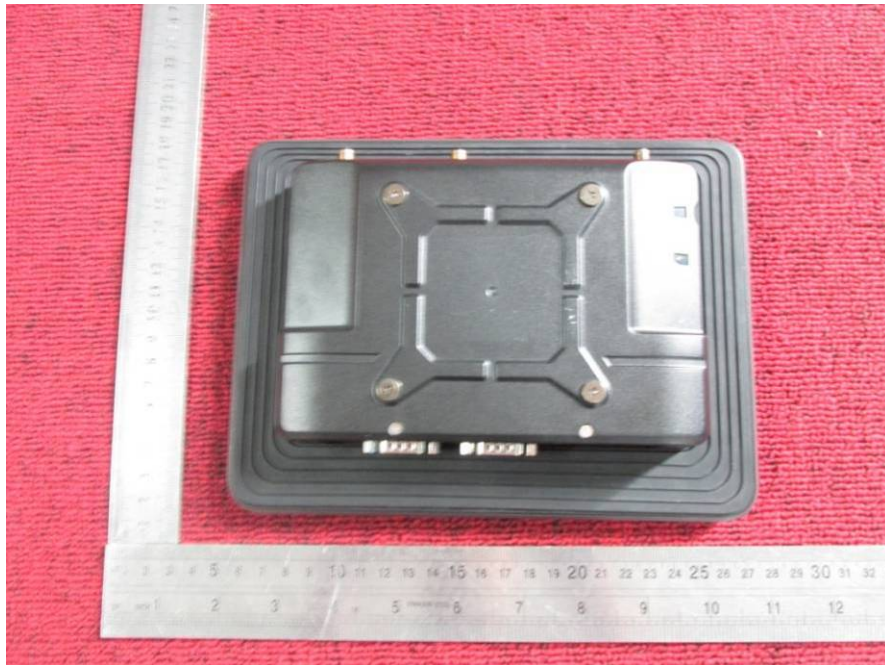

Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT




Appearance photograph of EUT




Internal photograph of EUT



Internal photograph of EUT

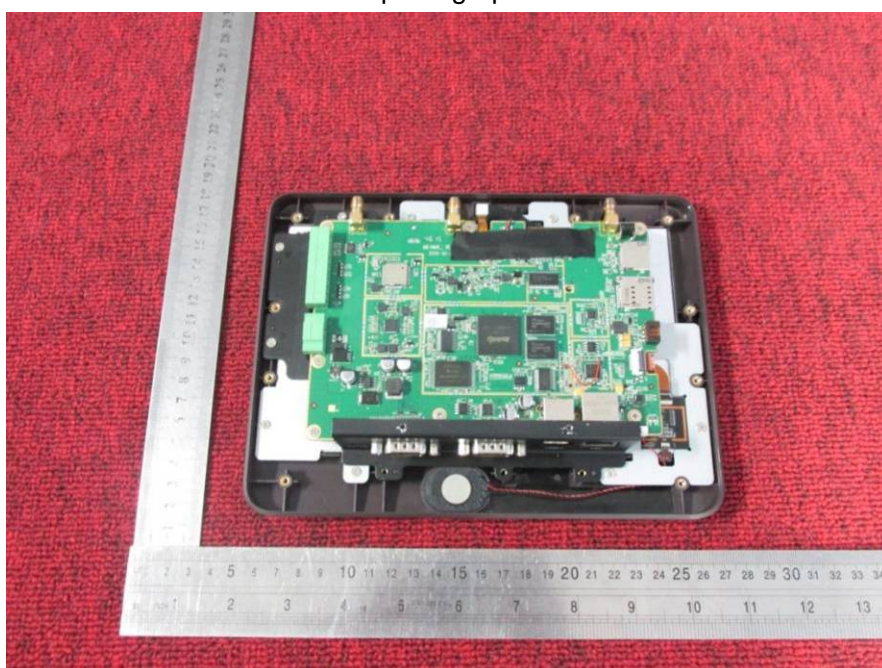

Internal photograph of EUT

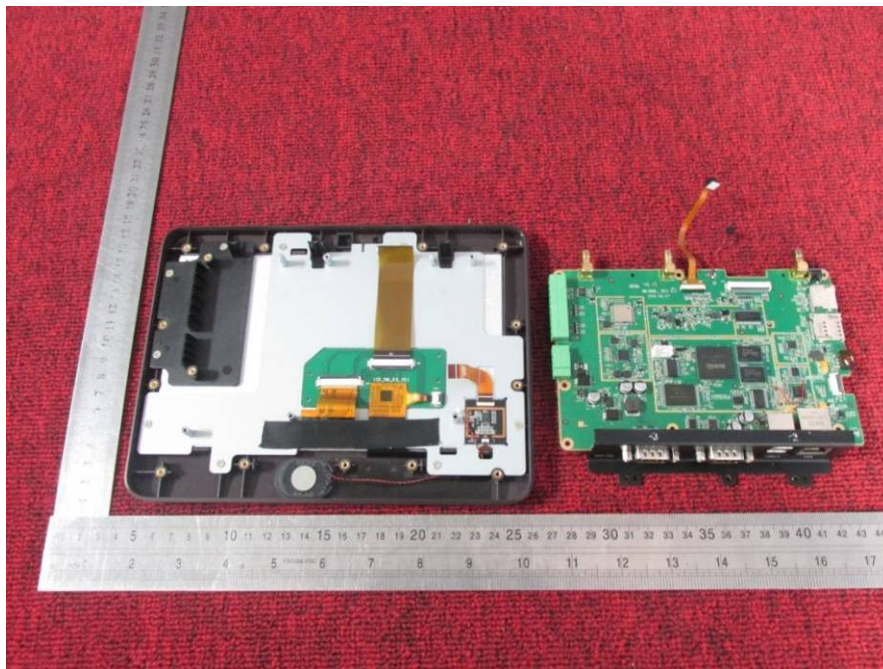


Internal photograph of EUT






Internal photograph of EUT

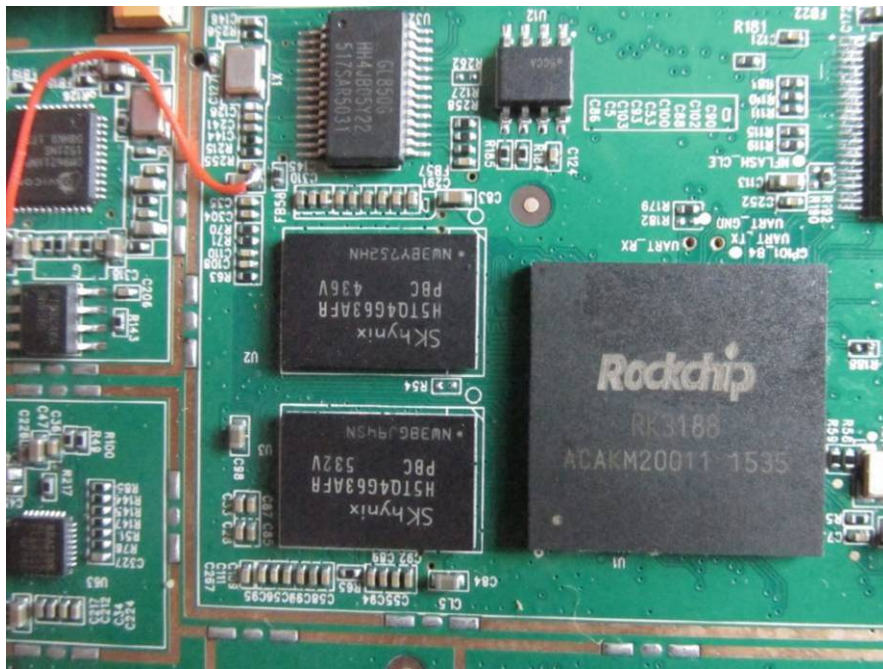


Internal photograph of EUT

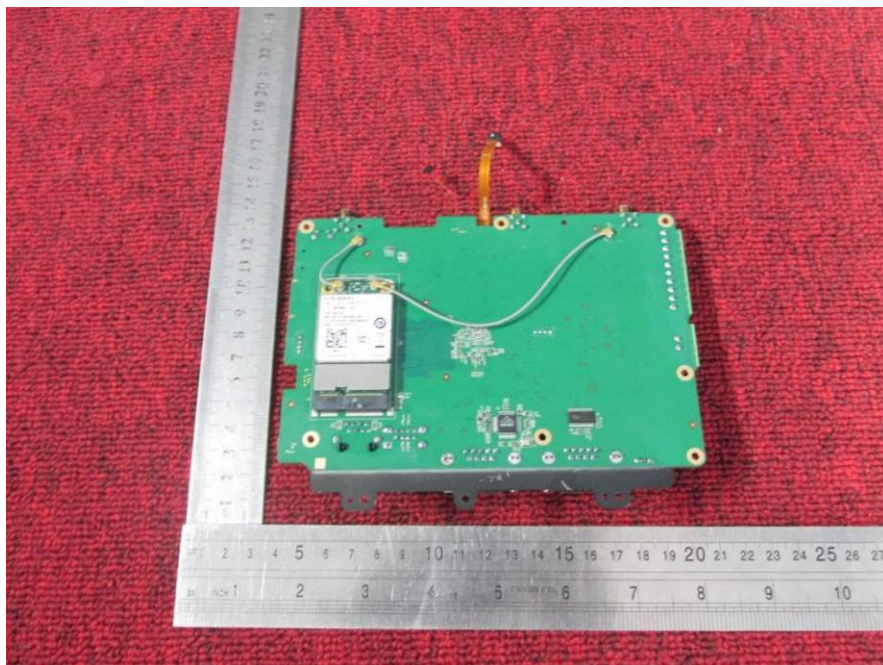


Internal photograph of EUT




Internal photograph of EUT

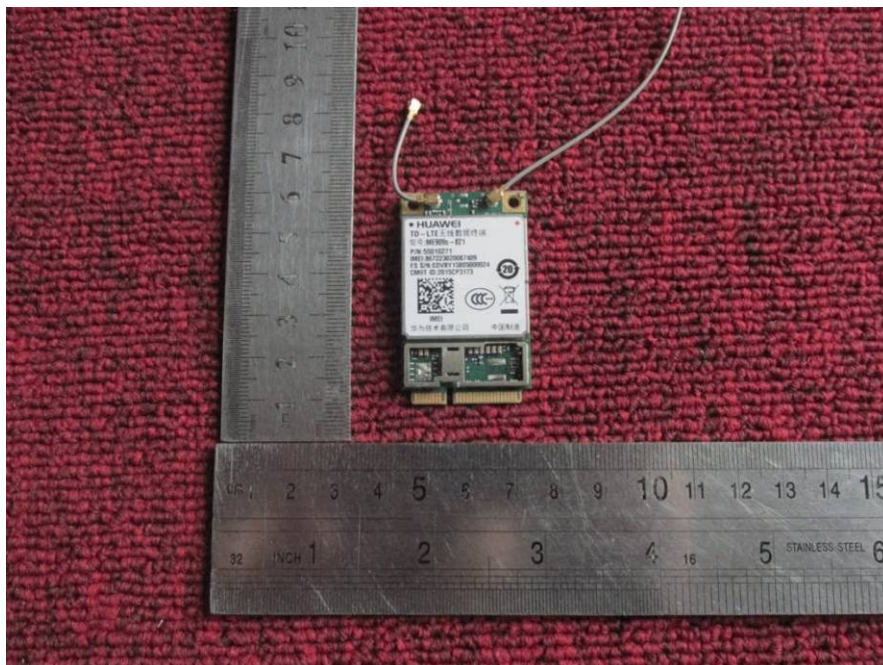


Internal photograph of EUT

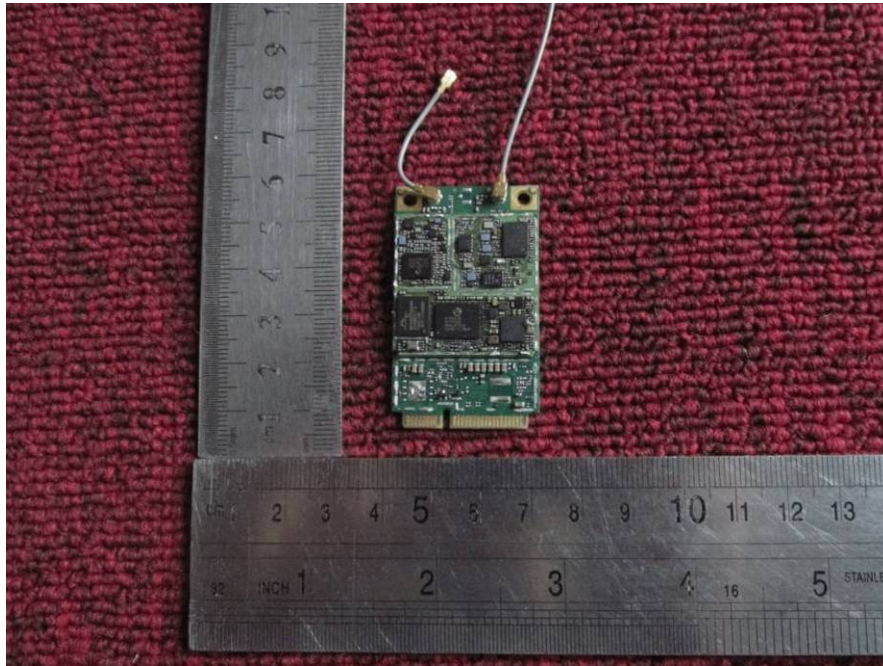


Internal photograph of EUT

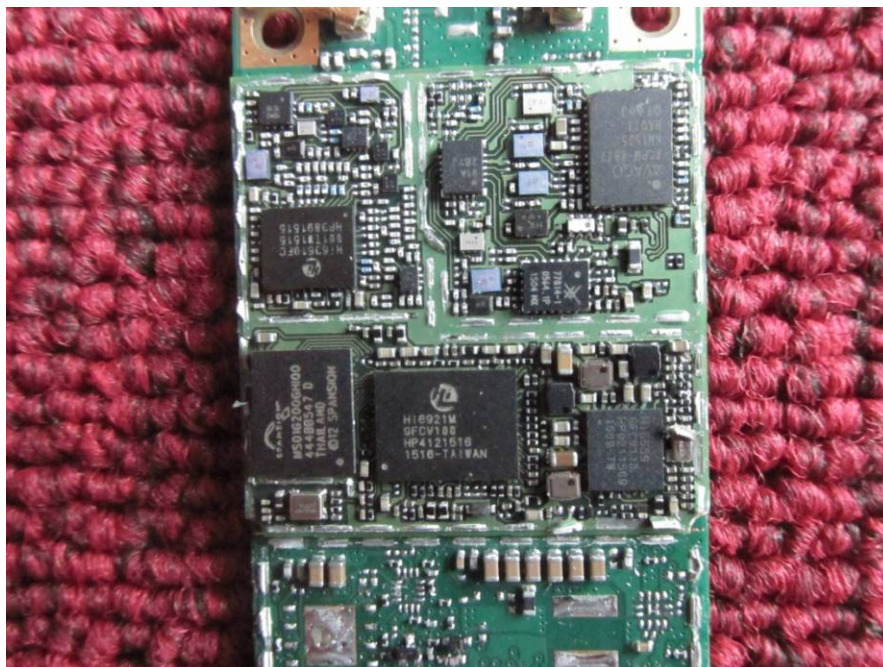


Internal photograph of EUT

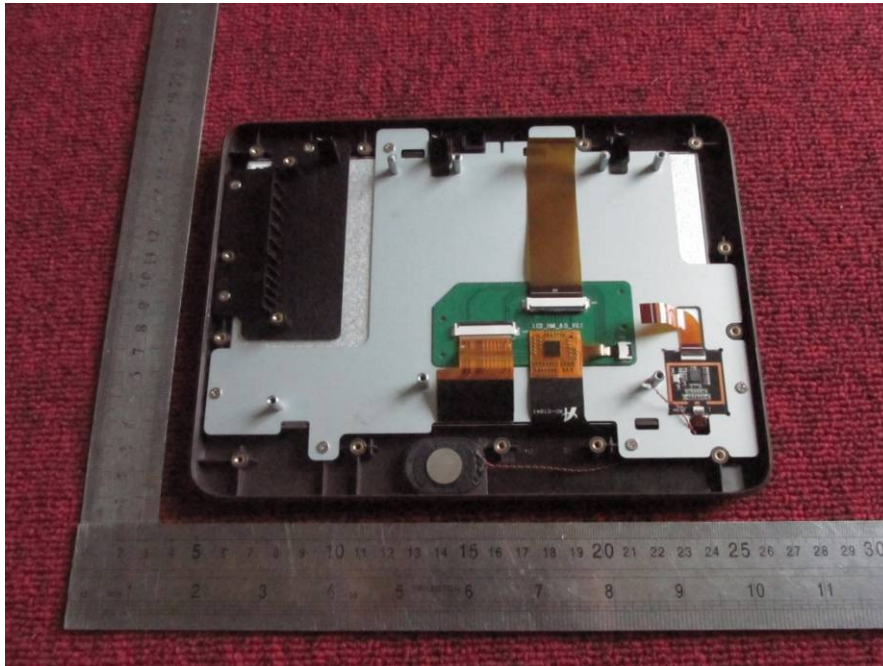


Internal photograph of EUT

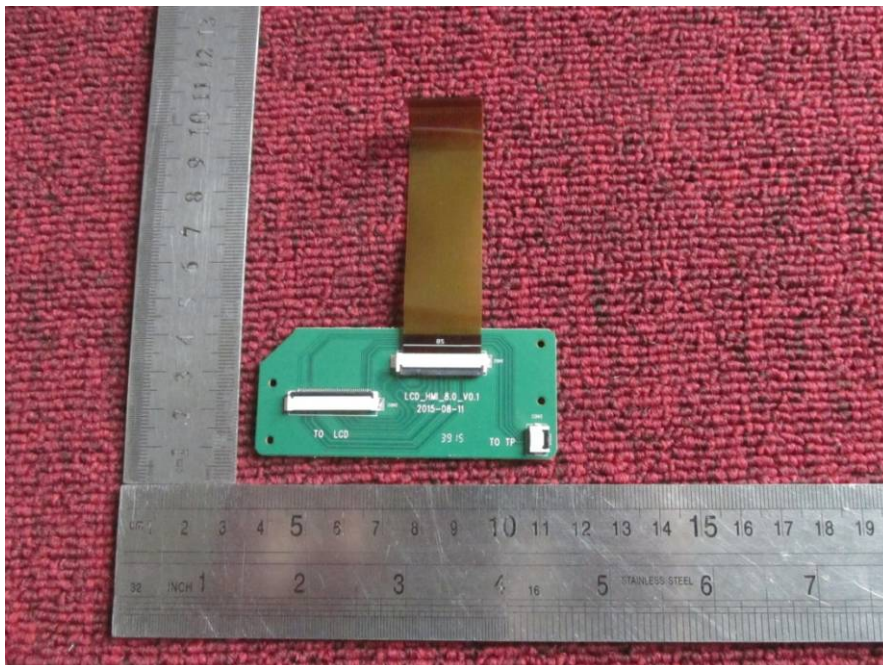


Internal photograph of EUT

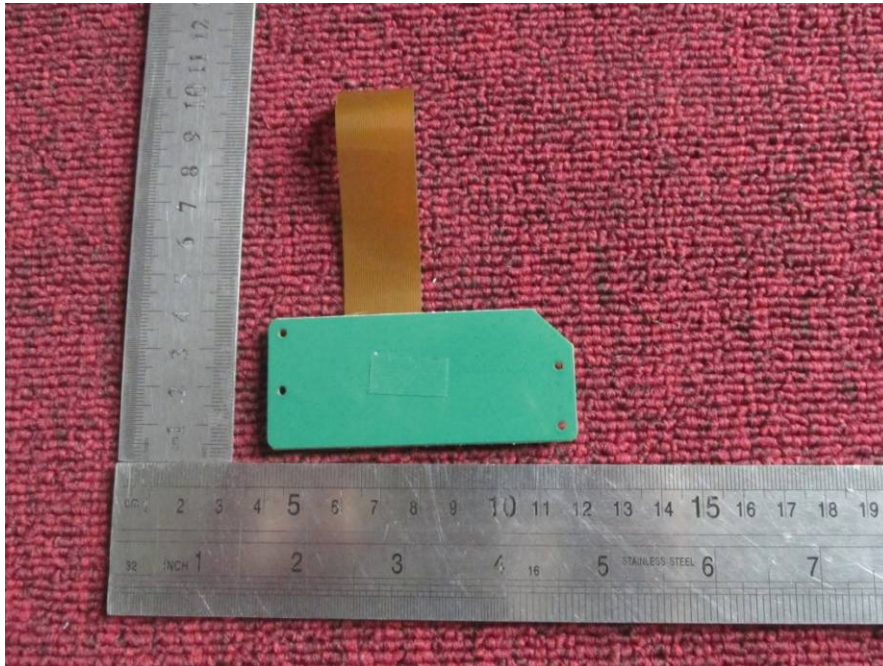

Internal photograph of EUT

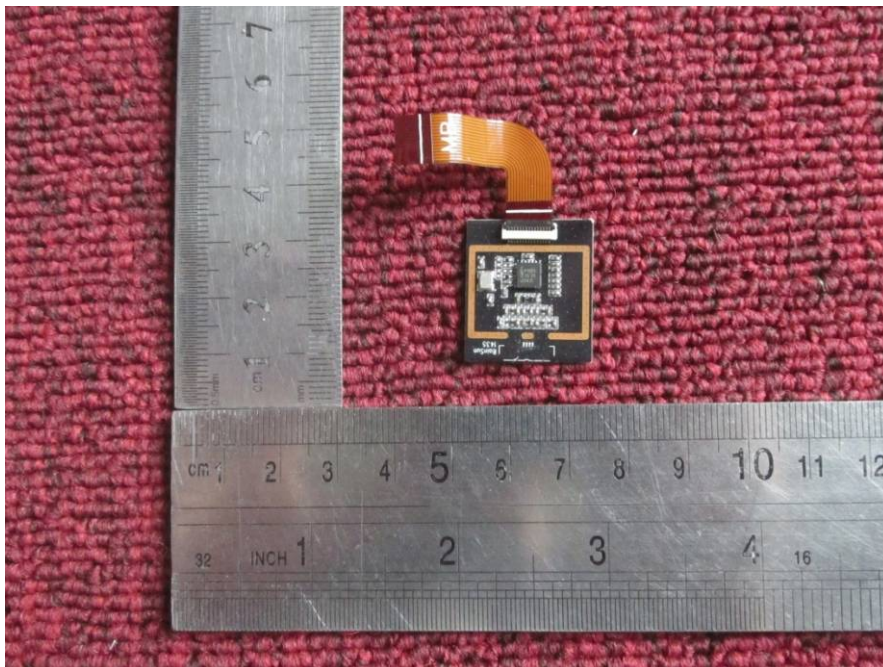

Internal photograph of EUT

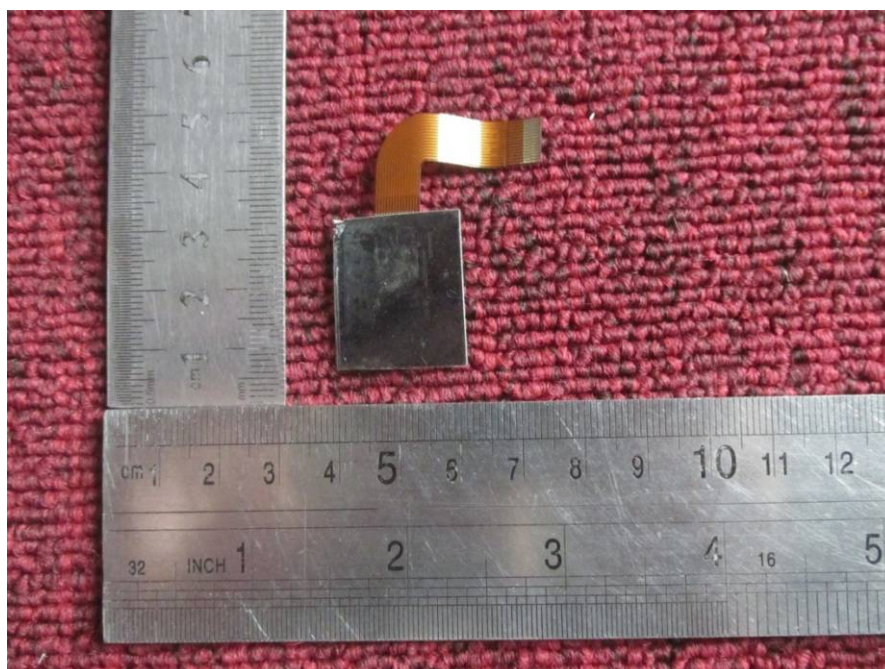

**---END OF REPORT---**