

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	TITAN 5		
Brand Name:	AMobile		
Marketing Name:	TITAN 5		
Model No.:	T551BA, T55XXXX (X=0~9, A~Z)		
Model Difference:	Please refer to page 7		
FCC ID:	2ACC5-T55		
Report No.:	EH/2014/10020		
Issue Date:	Jul. 09, 2014		
FCC Rule Part:	§15.225		
Prepared for:	AMobile Intelligent Corp 18F-1, No.150, Jian 1st Rd., Zhong He dist., New Taipei City, 235, Taiwan		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803		
Taff Testing Laboratory 0513	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

	AMobile Intelligent Corp			
Applicant:	18F-1, No.150, Jian 1st Rd., Zhong He dist., New Taipei City, 235,			
	Taiwan			
Product Name:	TITAN 5			
Brand Name:	AMobile			
Marketing Name:	TITAN 5			
Model No.:	T551BA, T55XXXX (X=0~9, A~Z)			
Model Difference:	Please refer to page 7			
FCC ID:	2ACC5-T55			
File Number:	EH/2014/10020			
Date of test:	Jan. 29, 2014 ~ May. 09, 2014			
Date of EUT Received:	Jan. 22, 2014			

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Tseng	Date:	Jul. 09, 2014	
Prepared By:	Marcus Tseng / Engineer Tiffany Kao	Date:	Jul. 09, 2014	
Approved By	Tiffany Kao / Clerk Tim Ch ang	Date:	Jul. 09, 2014	

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Version

Version No.	Date	Description
00	May. 21, 2014	Initial creation of document
01	Jul. 09, 2014	Modified USB Cable Model No., Supplier and EUT Photos



Table of Contents

1	G	SENERAL INFORMATION	6
	1.1	PRODUCT DESCRIPTION	6
	1.2	RELATED SUBMITTAL(S) / GRANT (S)	8
	1.3	TEST METHODOLOGY	8
	1.4	TEST FACILITY	8
	1.5	SPECIAL ACCESSORIES	8
	1.6	EQUIPMENT MODIFICATIONS	8
2	S	YSTEM TEST CONFIGURATION	9
	2.1	EUT CONFIGURATION	9
	2.2	EUT Exercise	9
	2.3	TEST PROCEDURE	9
	2.4	LIMITATION	10
	2.5	CONFIGURATION OF TESTED SYSTEM	
3	S	UMMARY OF TEST RESULTS	14
4	D	DESCRIPTION OF TEST MODES	14
5	Μ	IEASUREMENT UNCERTAINTY	
6	С	CONDUCTED EMISSIONS TEST	
	6.1	STANDARD APPLICABLE:	
	6.2	MEASUREMENT EQUIPMENT USED:	
	6.3	EUT SETUP:	16
	6.4	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
	6.5	MEASUREMENT PROCEDURE:	17
	6.6	MEASUREMENT RESULT:	17
7	R	ADIATED EMISSION TEST	20
	7.1	MEASUREMENT PROCEDURE	20
	7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
	7.3	MEASUREMENT EQUIPMENT USED:	21
	7.4	FIELD STRENGTH CALCULATION	21
	7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSION	
8	F	REQUENCY TOLERANCE	
	8.1	Measurement Procedure	
	8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.3	MEASUREMENT EQUIPMENT USED:	
	8.4	MEASUREMENT RESULTS	



9	20 DB OCCUPIED BANDWIDTH MEASUREMENT	
9.1	1 STANDARD APPLICABLE:	
9.2	2 Liмit:	
9.3	3 Test Set-up	
9.4	4 MEASUREMENT PROCEDURE	
9.5	5 MEASUREMENT EQUIPMENT USED:	
10	ANTENNA REQUIREMENT	
10.	1. STANDARD APPLICABLE:	
10.	2. ANTENNA CONNECTED CONSTRUCTION:	
РНО	DTOGRAPHS OF SET UP	
PHO	DTOGRAPHS OF EUT	40



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	TITAN 5			
Brand Name:	AMobile			
Marketing Name:	TITAN 5			
Model No.:	T551BA, T55	XXXX (X=0~9, A~Z)		
Model difference:	Please refer to	page 7		
Hardware Version:	V02			
Software Version:	AMobile_G0550_V08			
Data Cable (USB):	Model No.: YXT-64-MK5P-1M, Supplier: THIN STRIP OF SKY			
Simple Hands-Free:	Model No.: LTX-12654319-B003, Supplier: Sanmu			
	3.7Vdc Recha	argeable Li-ion Battery or 5Vdc from AC/DC Adapter		
Power Supply:	Battery: Model: G0550B01, Supplier: Japone			
Adapter: Model No.: BSYB050150U USB, Supplier: BSY				

NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 123dBuV/m at 3m.
Number of Channels:	1
Antenna Type:	Loop Antenna
Modulation Type:	ASK, BPSK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Model Difference:

T55XXXX	55	X	X	XX
Model	Panel Size	Barcode Type	Color	Location
Т	55: 5.5"	0:No Barcode Scanner 1:Honey 1D Scanner 3:Marson 1D Scanner	B:Black W:White	where X may be A-Z or blank for marketing purpose

This report complies with FCC regulatory radio rule with respect to RFID that operates on 13.56MHz.



1.2 **Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: 2ACC5-T55 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

1.3 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 **Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number are: 990257, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 455997.

Special Accessories 1.5

There is no special accessory used while test was conducted.

1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



System Test Configuration 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 & 6.2.2 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Limitation 2.4

(1) Conducted Emission

According to section 15.207(a) and Conducted Emission Limits is as following.

Frequency range		Limits IB (uV)			
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			
Note					
1. The lower limit shall apply at the transition frequencies					
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.					

(2) Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 Table 5 and Table 6 (Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength $\mu V/m$	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark: 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor = $40 \log$ (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205.
- 6. The general radiated emission limits in ξ 15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

(3) Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 **Configuration of Tested System**

Fig. 2-1 Radiated Emission




Fig. 2-2 Conducted (Antenna Port) Configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	N/A					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Fig. 2-3 AC Power Line Conducted Emission




Table 2-2 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	N/A					



Compliant

Compliant

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant

3 Summary of Test Results

4 Description of test modes

§2.1049

§15.215 (c)

§15.203

The EUT stay in continuous transmitting mode. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.

20 dB OCCUPIED

BANDWIDTH

Antenna Requirement

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case H position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and</u> conditions.htm and, for jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 123.36 Hz
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC=+/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty (Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty (Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Emissions Test 6

Standard Applicable: 6.1

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						
1. The lower limit shall apply at the transition frequencies						

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 **Measurement Equipment Used:**

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI7	100760	05/27/2013	05/26/2014		
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015		
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015		
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014		

EUT Setup: 6.3


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4 Test SET-UP (Block Diagram of Configuration)

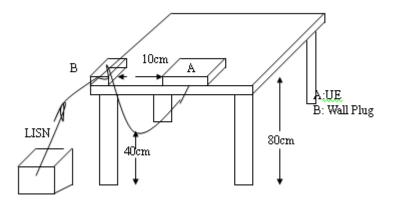

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.


6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

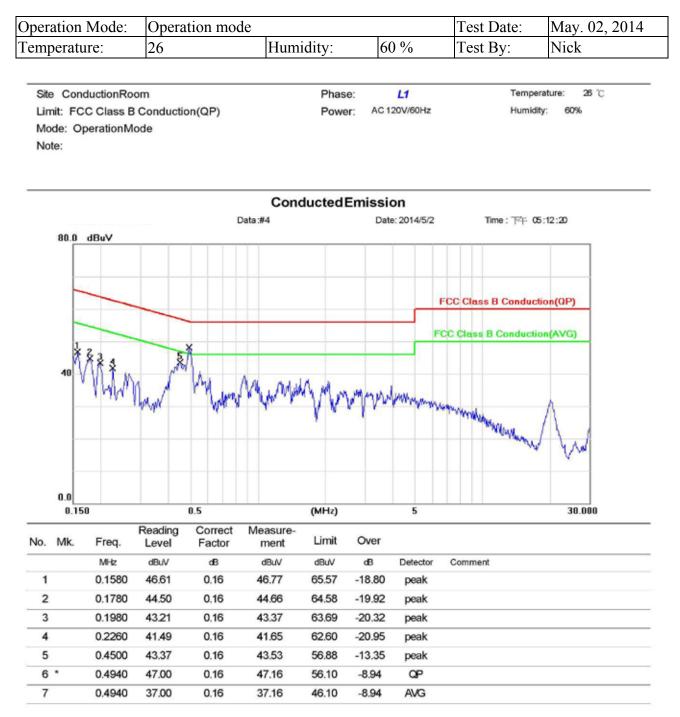

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



6

7

8

0.4940

1.5580

1.5580

33.00

41.30

29.50

0.19

0.23

0.23

33.19

41.53

29.73

46.10

56.00

46.00

-12.91

-14.47

-16.27


AVG

QP

AVG

FCC ID: 2ACC5-T55

Temperature: 26 °C Site ConductionRoom Phase: N Limit: FCC Class B Conduction(QP) AC 120V/60Hz Humidity: 60% Power: Mode: OperationMode Note:

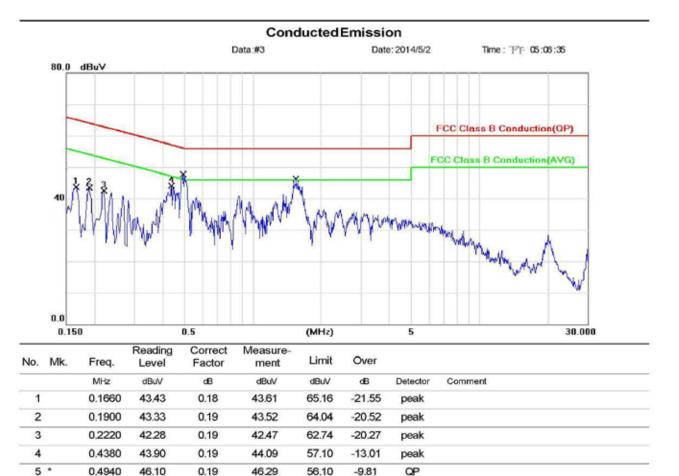

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Emission Test 7

7.1 **Measurement Procedure**


- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7.2 **Test SET-UP (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

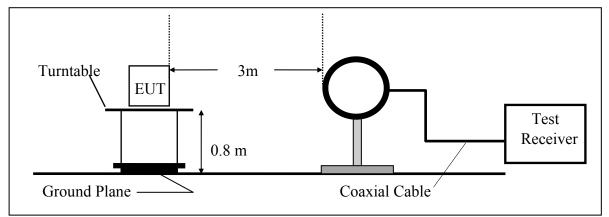

Radiated Emission Test Set-Up, Frequency Below 1000MHz **(B)**

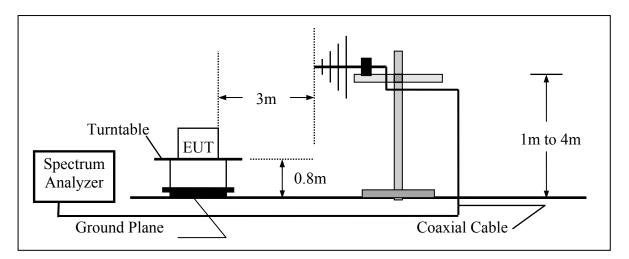

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

7.3 **Measurement Equipment Used:**

966 Chamber							
EQUIPMENT	MODEL SERIAL		LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI7	100760	05/27/2013	05/26/2014		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/30/2013	05/29/2014		
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015		
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/01/2015		
Loop Antenna	ETS.LINDGREN	6502	00148045	07/05/2013	07/04/2014		
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015		
Turn Table	HD	DT420	N/A	N.C.R	N.C.R		
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R		
Controller	HD	HD100	N/A	N.C.R	N.C.R		
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015		
3m Site NSA	SGS	966 chamber	N/A	07/15/2013	07/14/2014		

7.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 **Field Strength of Fundamental Emission**

7.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00 dBuV/m

Note:

Actual FS($dB\mu V/m$) = Spectrum. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.


The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 23 of 36


Operation Band Fundamental Frequency Operation Mode		:13.56 MHz		Test Date Temp./Humi. Engineer		:2014-05-03 :19.2 deg_C/58RH :Curry	
EUT Pol.		:H Plane		Measurement	Antenna Pol.	:VERTICA	L
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.56	F	Peak	47.98	11.72	59.70	123.90	-64.20

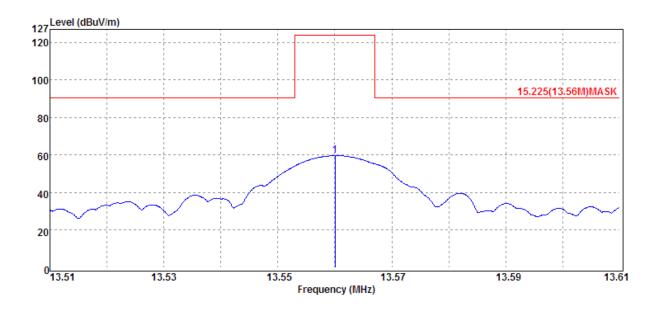



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 24 of 36

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :MAIN		Test Date Temp./Humi. Engineer		:2014-05-03 :19.2 deg_C/58RH :Curry	
		:H Plane		Measurement Antenna Pol.		:HORIZONTAL	
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.56	F	Peak	47.26	11.72	58.98	123.90	-64.92

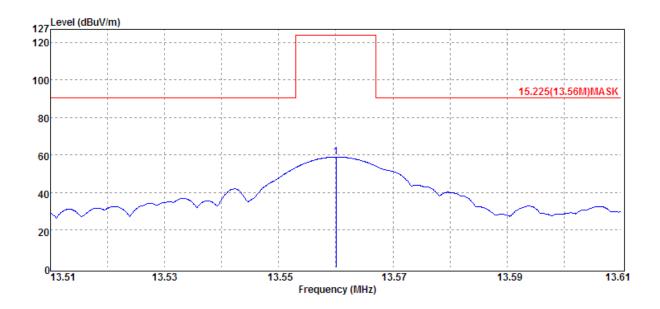



7.5.2 Radiated Mask

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation = $40 * \log (30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:


- a) $20 * \log (15848 \text{uV/m}) + 40 \text{dB} = 124.00 \text{dBuV/m}$
- b) $20 * \log(334 uV/m) + 40 dB = 90.47 dB uV/m$
- c) $20*\log(106uV/m) + 40dB = 80.50dBuV/m$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In subacture and offenders may be prosecuted to the fullest extent of the law.



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 26 of 36

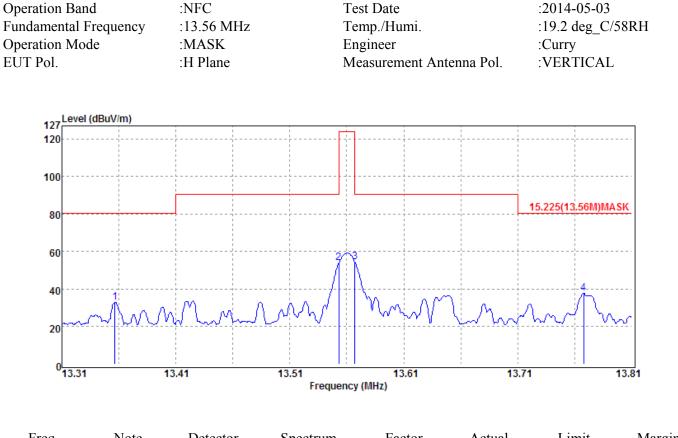


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
13.36	S	Peak	21.34	11.74	33.08	80.50	-47.42	
13.55	S	Peak	42.21	11.72	53.93	90.47	-36.54	
13.57	S	Peak	42.98	11.72	54.70	90.47	-35.77	
13.77	S	Peak	26.26	11.70	37.96	80.50	-42.54	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 27 of 36

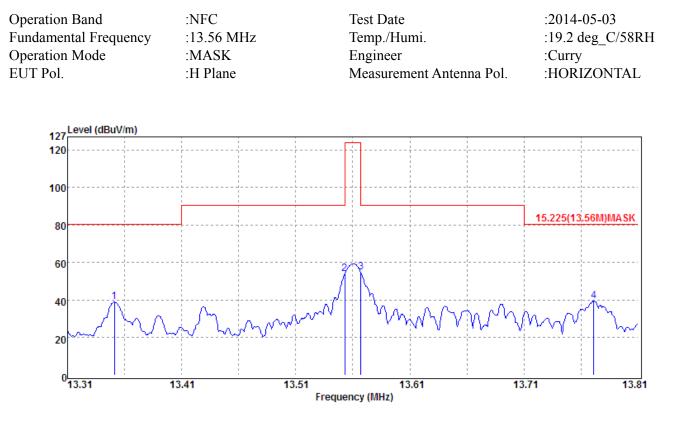

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
-	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	13.35	S	Peak	27.22	11.74	38.96	80.50	-41.54
	13.55	S	Peak	42.39	11.72	54.11	90.47	-36.36
	13.57	S	Peak	43.16	11.72	54.88	90.47	-35.59
	13.77	S	Peak	27.79	11.70	39.49	80.50	-41.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5.3 Radiated Emission –

Limit:

- § 15.225
 - (d) 30 microvolts/m (29.4 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.

Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :H Plane	1 I	Γest Date Γemp./Humi. Engineer Measurement An	tenna Pol.	:2014-05-03 :19.2 deg_C/5 :Curry :VERTICAL	58RH
Freq.	Note	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.72	S	Peak	11.79	11.95	23.74	69.54	-45.80
12.26	S	Peak	11.33	11.81	23.14	69.54	-46.40
15.68	S	Peak	11.31	11.57	22.88	69.54	-46.66
17.54	S	Peak	11.31	11.46	22.77	69.54	-46.77
20.64	S	Peak	11.87	11.15	23.02	69.54	-46.52
25.26	S	Peak	11.89	9.96	21.85	69.54	-47.69
27.12	Н	Peak	32.18	9.53	41.71	69.54	-27.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 29 of 36

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :H Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2014-05-03 :19.2 deg_C/58RH :Curry :HORIZONTAL		
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV∕m	dB
10.62	S	Peak	11.86	11.95	23.81	69.54	-45.73
12.10	S	Peak	10.57	11.83	22.40	69.54	-47.14
16.16	S	Peak	10.86	11.55	22.41	69.54	-47.13
17.98	S	Peak	10.13	11.44	21.57	69.54	-47.97
20.74	S	Peak	10.26	11.13	21.39	69.54	-48.15
24.12	S	Peak	11.39	10.23	21.62	69.54	-47.92
27.12	Н	Peak	9.41	9.53	18.94	69.54	-50.60



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 30 of 36

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :H Plane	Ten Eng	t Date np./Humi. gineer asurement Ar	ntenna Pol.	:2014-05-03 :19.2 deg_C/5 :Curry :VERTICAL	8RH
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.68	Н						
54.24	Н						
67.80	Н						
81.36	Н						
94.92	Н						
108.48	Н						
122.04	Н						
135.60	Н						
30.97	S	Peak	32.54	-14.03	18.51	40.00	-21.49
143.49	S	Peak	28.09	-13.02	15.07	43.50	-28.43
316.15	S	Peak	27.99	-10.99	17.00	46.00	-29.00
343.31	S	Peak	28.46	-10.43	18.03	46.00	-27.97
358.83	S	Peak	27.94	-10.04	17.90	46.00	-28.10
766.23	S	Peak	28.01	-2.79	25.22	46.00	-20.78



Report No: EH/2014/10020 Issue Date: Jul. 09, 2014 Page: 31 of 36

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :H Plane	Test Date:2014-05-03Temp./Humi.:19.2 deg_C/58IEngineer:CurryMeasurement Antenna Pol.:HORIZONTAL				
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.68	Н						
54.24	Н						
67.80	Н						
81.36	Н						
94.92	Н						
108.48	Н						
122.04	Н						
135.60	Н						
161.92	S	Peak	26.95	-12.69	14.26	43.50	-29.24
273.47	S	Peak	28.39	-11.81	16.58	46.00	-29.42
385.02	S	Peak	27.59	-9.47	18.12	46.00	-27.88
587.75	S	Peak	27.68	-5.13	22.55	46.00	-23.45
679.90	S	Peak	27.53	-3.67	23.86	46.00	-22.14
798.24	S	Peak	27.17	-2.33	24.84	46.00	-21.16





Frequency Tolerance 8

8.1 **Measurement Procedure**

- The EUT was placed on a turn table which is 0.8m above ground plane. 1
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.2 **Test SET-UP (Block Diagram of Configuration)**



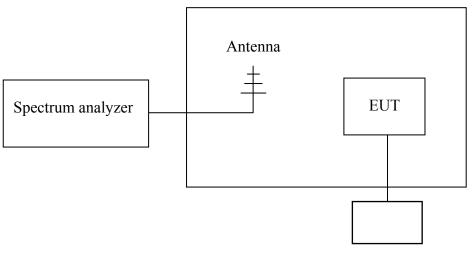

Variable AC Power Supply

Measurement Equipment Used: 8.3

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/30/2013	05/29/2014			
Temperature Chamber	TERCHY	MHG-120LF	911009	05/07/2014	05/06/2015			
AC Power Supply	APW-105N	887592	All Power	N/A	N/A			

8.4 **Measurement Results**

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



A. Temperature Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)
Vdc	Temperature ()	(MHz)	Dena (112)	Linin (KIIZ)
3.7	-20	13.560332	-158.00	+/- 1.356
3.7	-10	13.560427	-253.00	+/- 1.356
3.7	0	13.560299	-125.00	+/- 1.356
3.7	10	13.560246	-72.00	+/- 1.356
3.7	20	13.560174	0.00	+/- 1.356
3.7	30	13.560284	-110.00	+/- 1.356
3.7	40	13.560371	-197.00	+/- 1.356
3.7	50	13.560369	-195.00	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)
Vdc	Temperature ()	(MHz)	Dena (112)	Linin (KIIZ)
4.2	20	13.560177	7.00	+/- 1.356
3.7	20	13.560184	0.00	+/- 1.356
3.2	20	13.560168	16.00	+/- 1.356



9 20 dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 Standard Applicable: 82,1040 & \$15,215 (c)

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure

20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.


9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



-20dB Bandwidth

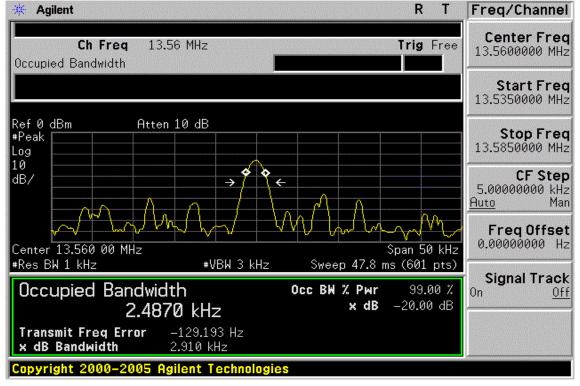

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



10 ANTENNA REQUIREMENT

10.1. Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

10.2. Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.