

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: HKES150400062601

Page: 1 of 50

FCC REPORT

Application No: HKES1504000626AV

Applicant: Pricer AB

Manufacturer: Orbit One, Elektronvägen 4 141 49 Huddinge Sweden

Product Name: The BLE TRX Stick is a Bluetooth Low Energy beacon for indoor

positioning services

Model No.(EUT): 25081

FCC ID: 2ACC825081

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-04-21

Date of Test: 2015-04-30 to 2015-05-14

Date of Issue: 2015-11-17

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: HKES150400062601

Page: 2 of 50

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2015-11-17		Original			

Authorized for issue by:		
	Eric Fu	2015-05-14
Tested By	(Eric Fu) /Project Engineer	Date
	Heely Wen.	2015-11-17
Prepared By	(Hedy Wen) /Clerk	Date
	Sen. Lu.	2015-11-17
Checked By	(Sen Lv) /Reviewer	Date



Report No.: HKES150400062601

Page: 3 of 50

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: HKES150400062601

Page: 4 of 50

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3		EST SUMMARY	
4		ONTENTS	
4			
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT.	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	20
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	Spurious RF Conducted Emissions	
	6.8	RADIATED SPURIOUS EMISSION	
		8.1 Spurious Emissions	
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	45-50



Report No.: HKES150400062601

Page: 5 of 50

5 General Information

5.1 Client Information

Applicant:	Pricer AB
Address of Applicant:	Pricer AB, Box 215, 101 24 Stockholm, Sweden
Manufacturer:	Orbit One, Elektronvägen 4 141 49 Huddinge Sweden

5.2 General Description of EUT

Product Name:	The BLE TRX Stick is a Bluetooth Low Energy beacon for indoor positioning services			
Model No.	25081			
Country of Origin:	Sweden			
Country of Destination:	Sweden			
Operation Frequency:	2402MHz~2480MHz			
Bluetooth Version:	BT4.0 single mode			
Modulation Type:	GFSK			
Number of Channel:	40			
Sample Type:	Portable production			
Test Power Grade:	Class II (manufacturer declare)			
Test Software of EUT:	ISTT4 (manufacturer declare)			
Antenna Type:	Integral			
Antenna Gain: 1.3dBi				
Battery:	N/A			
EUT Power Supply:	INPUT: Power supply by Ethernet port			



Report No.: HKES150400062601

Page: 6 of 50

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: HKES150400062601

Page: 7 of 50

5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	52 % RH			
Atmospheric Pressure:	1010 mbar			

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

			1
Description	Manufacturer	Model No.	Serial No.
Adapter(supplied by client)	CINCON ELECTRONICS CO.,LTD	TRG100A480	100480-063703
USB cable,160cm shielded	Supplied by client	N/A	N/A
Ethernet cable:,10m shielded	Supplied by client	N/A	N/A
Base Station	PRICER	ES	1443 0100
Software:ISTT4	PRICER	V4.0.5409.23600	N/A
Laptop	Lenovo	T430u	N/A
Router	NETGEAR	JNR3210	N/A
Mouse	Lenovo	M-U0025-O	N/A

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: HKES150400062601

Page: 8 of 50

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: HKES150400062601

Page: 9 of 50

5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	



Report No.: HKES150400062601

Page: 10 of 50

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13		
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	2016-09-16		
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-11-15	2017-11-15		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-17	2016-10-17		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-17	2016-10-17		
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13		
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13		
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13		
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13		
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13		
18	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13		



Report No.: HKES150400062601

Page: 11 of 50

	RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17		
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13		
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25		
8	POWER METER	R&S	NRVS	SEL0144	2015-10-09	2016-10-09		
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25		





Report No.: HKES150400062601

Page: 12 of 50

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

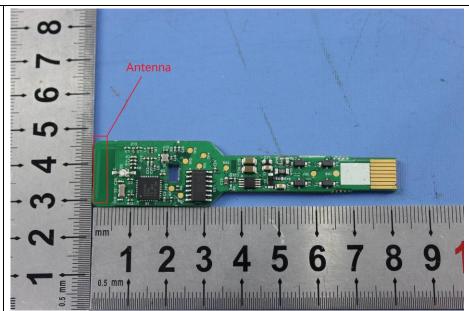

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.3dBi.



Report No.: HKES150400062601

Page: 13 of 50

6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	150kHz to 30MHz				
Limit:		BuV)			
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.			
Test Procedure:	 * Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment 				
Test Setup:	Shielding Room EUT AC Mains LISN1	AE LISN2 → AC Mai	Test Receiver		



Report No.: HKES150400062601

Page: 14 of 50

Test Mode:	Transmitting with GFSK modulation. Charge +Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



Report No.: HKES150400062601


Page: 15 of 50

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

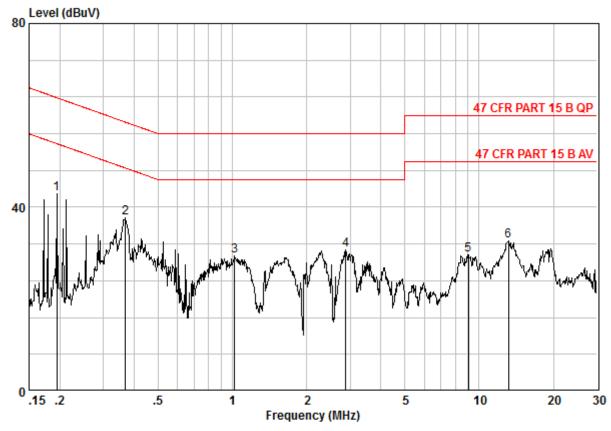

Site : Shielding Room

Condition : 47 CFR PART 15 B AV CE LINE

Job No. : 0626AV


	Freq		LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19447	0.02	9.60	33.25	42.87	53.84	-10.98	Peak
2	0.36920	0.01	9.59	28.18	37.78	48.52	-10.74	Peak
3	1.021	0.02	9.63	19.75	29.40	46.00	-16.60	Peak
4	2.884	0.02	9.62	21.06	30.70	46.00	-15.30	Peak
5	9.059	0.01	9.70	19.85	29.56	50.00	-20.44	Peak
6	13.127	0.01	9.74	22.97	32.73	50.00	-17.27	Peak



Report No.: HKES150400062601

Page: 16 of 50

Neutral line:

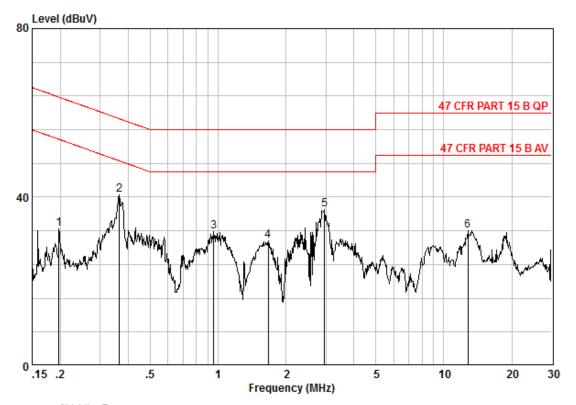

Site : Shielding Room

Condition : 47 CFR PART 15 B AV CE NEUTRAL

Job No. : 0626AV

			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
					-47077	-1777	-1D-77		
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.19758	0.02	9.62	22.81	32.45	53.71	-21.26	Peak
2	@	0.36531	0.01	9.62	30.83	40.46	48.61	-8.15	Peak
3		0.95819	0.02	9.64	22.11	31.78	46.00	-14.22	Peak
4		1.671	0.02	9.65	20.06	29.73	46.00	-16.27	Peak
5	@	2.962	0.02	9.67	27.38	37.07	46.00	-8.93	Peak
6		12.784	0.01	9.86	22.15	32.02	50.00	-17.98	Peak

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: HKES150400062601

Page: 17 of 50

6.3 Conducted Peak Output Power

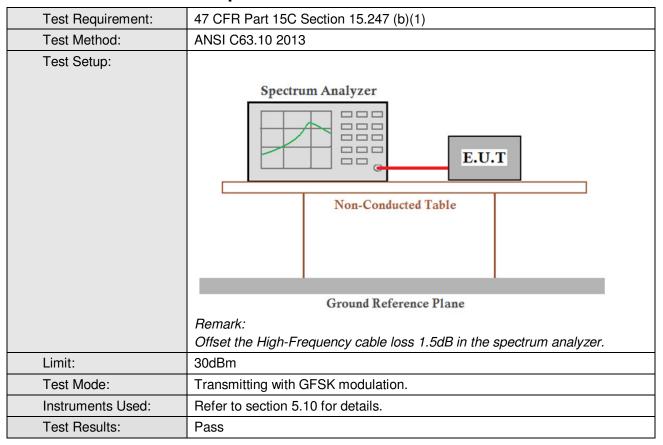

Measurement Data

GFSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	1.75	30.00	Pass				
Middle	-0.25	30.00	Pass				
Highest	-0.94	30.00	Pass				




Report No.: HKES150400062601


Page: 18 of 50

Test plot as follows:

Test mode: GFSK Test channel: Lowest

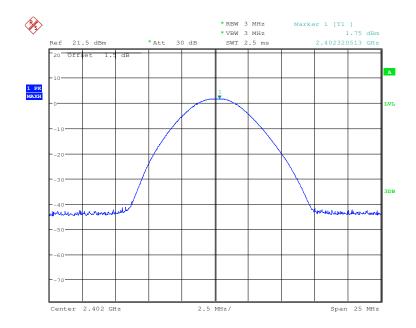



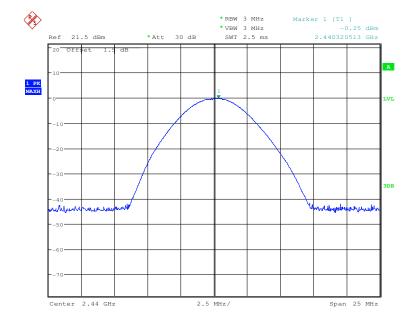




Report No.: HKES150400062601

Page: 19 of 50

Test mode: GFSK Test channel: Highest

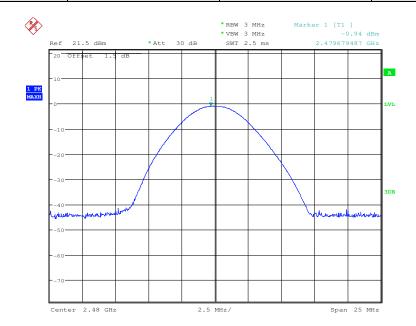




Report No.: HKES150400062601

Page: 20 of 50

6.4 6dB Occupy Bandwidth

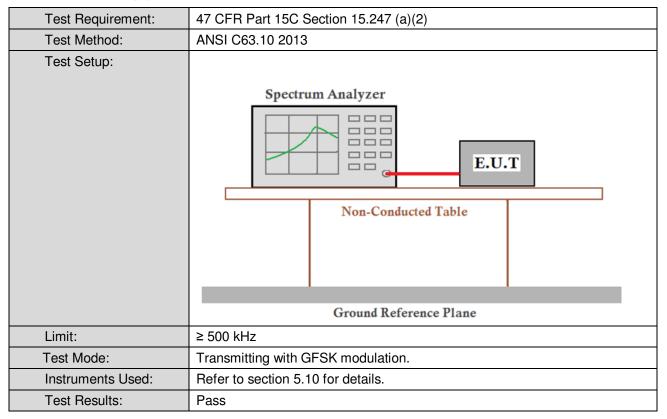

Measurement Data

GFSK mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result					
Lowest	0.697	≥500	Pass					
Middle	0.697	≥500	Pass					
Highest	0.697	≥500	Pass					




Report No.: HKES150400062601


Page: 21 of 50

Test plot as follows:

Test mode: GFSK Test channel: Lowest

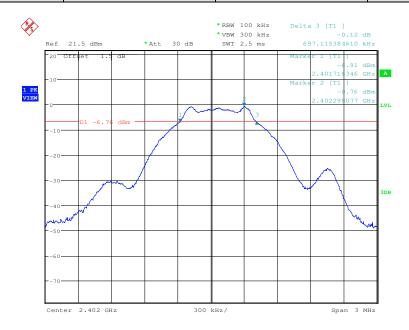

Test mode: GFSK Test channel: Middle

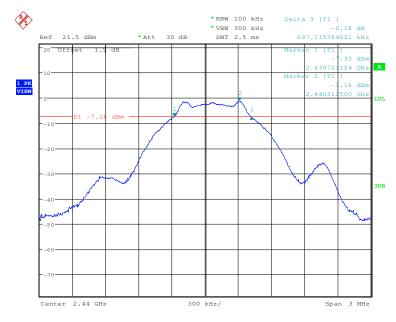






Report No.: HKES150400062601

Page: 22 of 50

Test mode: GFSK Test channel: Highest

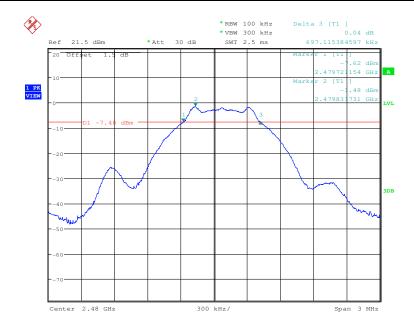




Report No.: HKES150400062601

Page: 23 of 50

6.5 Power Spectral Density

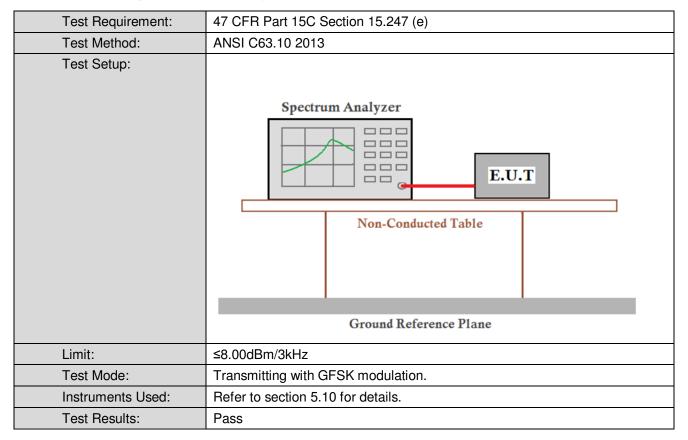

Measurement Data

GFSK mode								
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result					
Lowest	-12.47	≤8.00	Pass					
Middle	-13.09	≤8.00	Pass					
Highest	-14.17	≤8.00	Pass					




Report No.: HKES150400062601


Page: 24 of 50

Test plot as follows:

Test mode: GFSK Test channel: Lowest

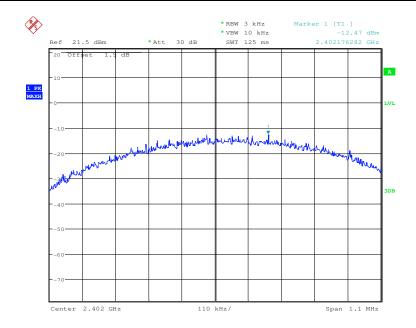

Test mode: GFSK Test channel: Middle

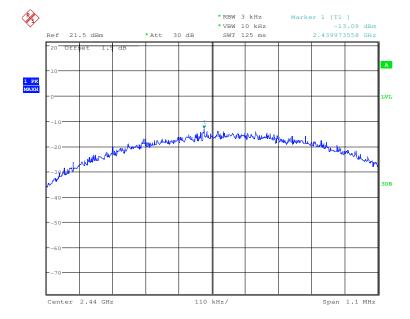




Report No.: HKES150400062601

Page: 25 of 50

Test mode: GFSK Test channel: Highest

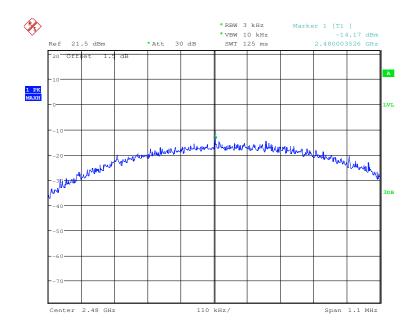




Report No.: HKES150400062601

Page: 26 of 50

6.6 Band-edge for RF Conducted Emissions

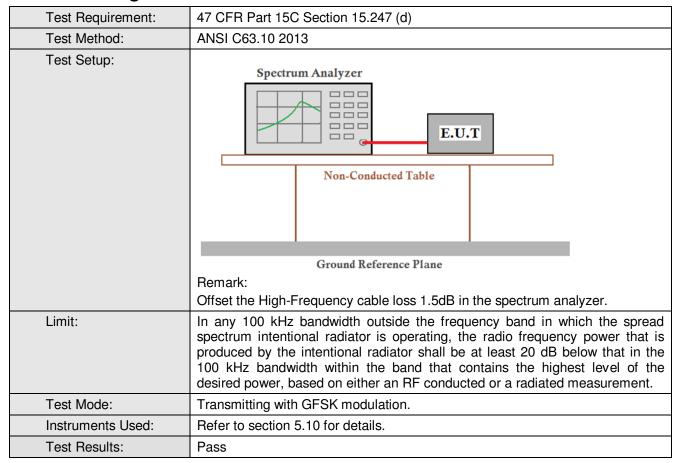




Report No.: HKES150400062601


Page: 27 of 50

Test plot as follows:

Test mode: GFSK Test channel: Lowest

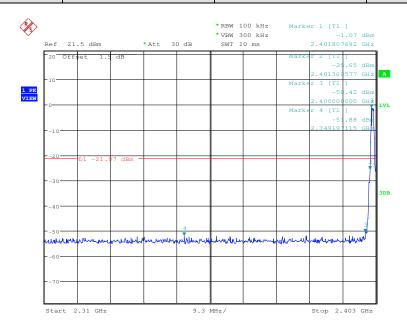



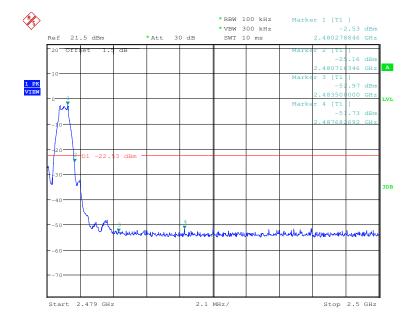



Report No.: HKES150400062601

Page: 28 of 50

6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10 2013				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Transmitting with GFSK modulation.				
Instruments Used:	Refer to section 5.10 for details.				
Test Results:	Pass				





Report No.: HKES150400062601

Page: 29 of 50

Test plot as follows:

Test mode: GFSK Test channel: Lowest

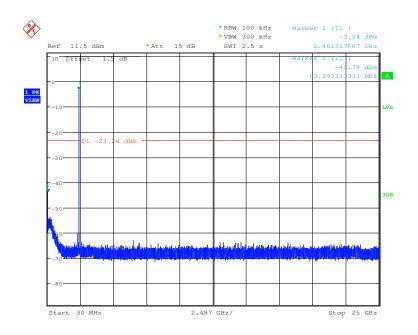


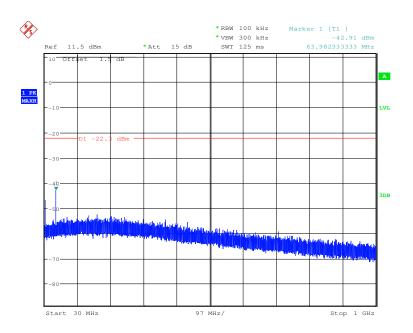




Report No.: HKES150400062601

Page: 30 of 50

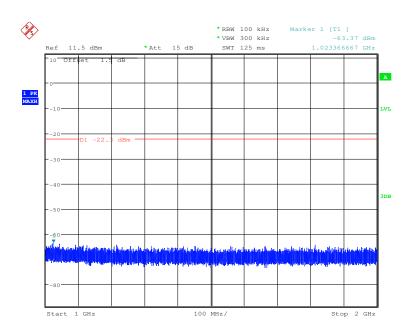


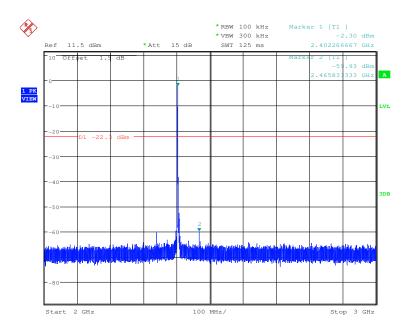




Report No.: HKES150400062601

Page: 31 of 50

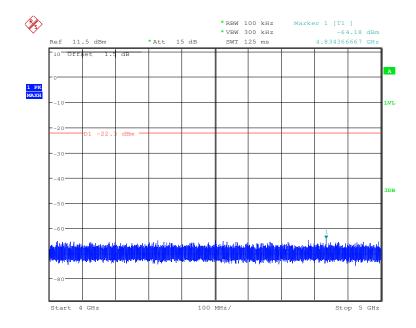

Test mode:	GFSK	Test channel:	Middle
i est illoue.	ai oit	i est charillet.	Mildule

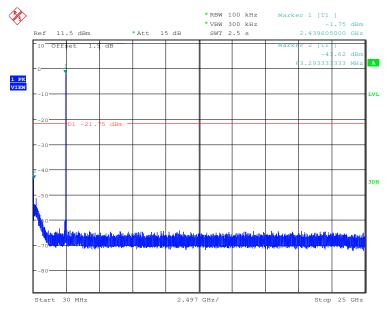







Report No.: HKES150400062601

Page: 32 of 50

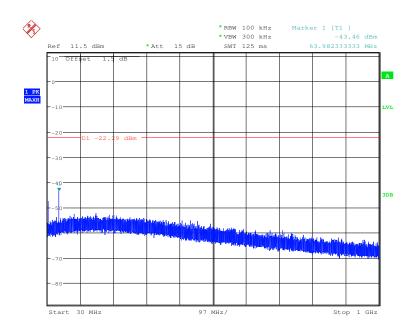


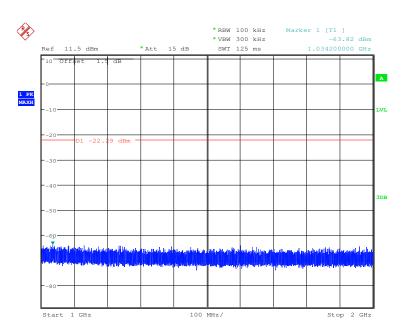




Report No.: HKES150400062601

Page: 33 of 50

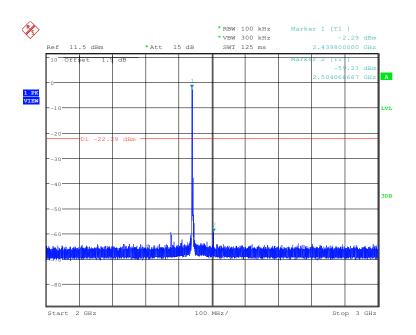

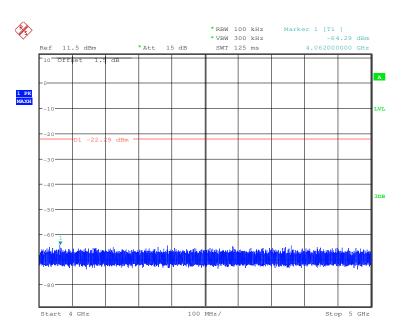





Report No.: HKES150400062601

Page: 34 of 50

Test mode: GFSK Test channel: Highest

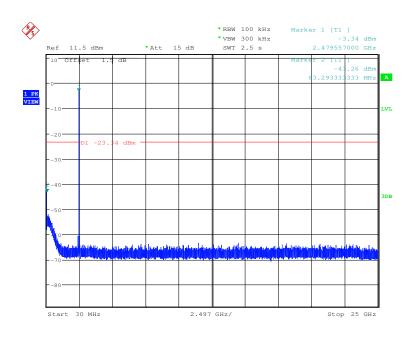


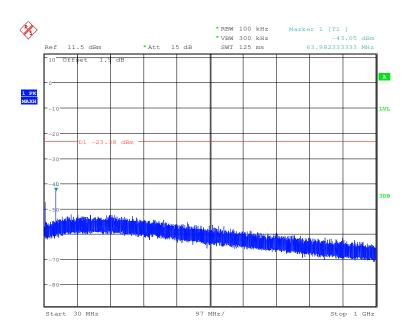




Report No.: HKES150400062601

Page: 35 of 50

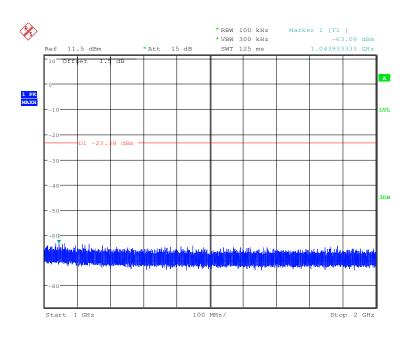


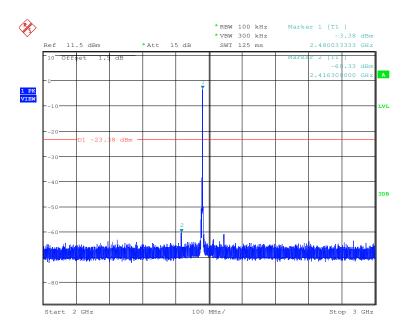



Report No.: HKES150400062601

Page: 36 of 50

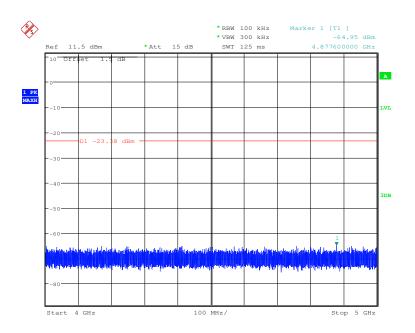

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: HKES150400062601

Page: 37 of 50

6.8 Radiated Spurious Emission


6.8.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Secti	on 1	5.209 and 15	.205				_
Test Method:	ANSI C63.10 2013							
Test Site:	Measurement Distance	: 3n	n (Semi-Anecl	noic Cham	be	r)		
Receiver Setup:	Frequency		Detector	RBW	1	VBW	Remark	Ī
	0.009MHz-0.090MH	z	Peak	10kHz	Z	30kHz	Peak	
	0.009MHz-0.090MH	z	Average	10kHz	Z	30kHz	Average	Ī
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	Z	30kHz	Quasi-peak	Ī
	0.110MHz-0.490MH	Z	Peak	10kHz	Z	30kHz	Peak	
	0.110MHz-0.490MH	z	Average	10kHz	Z	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	Z	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	Quasi-peak 100 kH		300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	<u> </u>	3MHz	Peak	
	Above IGHZ		Peak	1MHz	<u> </u>	10Hz	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	n) Remar		Measureme distance (n	
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-		-	30	
	1.705MHz-30MHz		30	-		-	30	
	30MHz-88MHz		100	40.0	Q	uasi-peak	3	
	88MHz-216MHz		150	43.5	Q	uasi-peak	3	
	216MHz-960MHz		200	46.0	Q	uasi-peak	3	
	960MHz-1GHz		500	54.0	Q	uasi-peak	3	
	Above 1GHz		500	54.0		Average	3	
	Note: 15.35(b), frequency emissions is limit applicable to the epeak emission level race	20c quip	dB above the oment under t	maximum est. This p	ре	rmitted ave	erage emissio	n



Report No.: HKES150400062601

Page: 38 of 50

Test Setup:

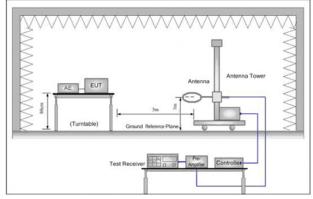

Antenna Tower

Antenna Tower

(Turntable)

Ground Reference Plane

Test Receiver

Ampaier

Controller

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

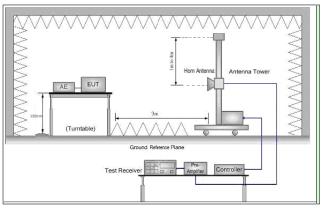


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz), the middle channel



Report No.: HKES150400062601

Page: 39 of 50


	(2440MHz),the Highest channel (2480MHz)								
	h. Repeat above procedures until all frequencies measured was complete.								
Exploratory Test Mode:	Transmitting with GFSK modulation. Transmitting mode.								
Final Test Mode:	For below 1GHz part, through pre-scan, the worst case is the lowest channel. Transmitting mode. Only the worst case is recorded in the report.								
Instruments Used:	Refer to section 5.10 for details.								
Test Results:	Pass								



Report No.: HKES150400062601

Page: 40 of 50

Radiated Emission below 1GHz							
30MHz~1GHz (QP)							
Test mode:	Transmitting	Vertical					

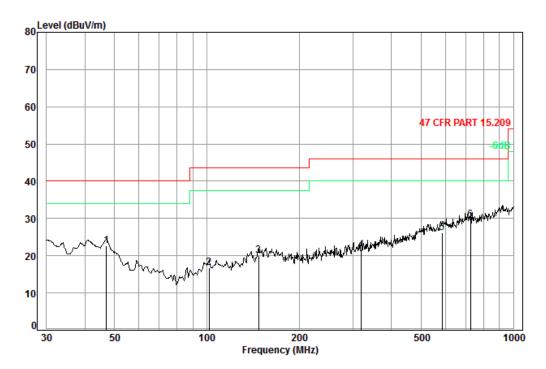

Condition: 47 CFR PART 15.209 3m Vertical

Job No. : 0626AV Test mode: TX mode


	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	46.99	17.46	10.02	27.30	22.45	22.63	40.00	-17.37
2	101.64	11.16	9.02	27.19	23.88	16.87	43.50	-26.63
3	147.40	14.54	8.77	26.92	23.61	20.00	43.50	-23.50
4	318.82	10.75	14.58	26.54	22.89	21.68	46.00	-24.32
5	584.79	11.35	19.37	27.57	23.05	26.20	46.00	-19.80
6	724.26	10.56	21.60	27.38	24.85	29.63	46.00	-16.37



Report No.: HKES150400062601

Page: 41 of 50

Test mode:	Transmitting	Horizontal
	3	

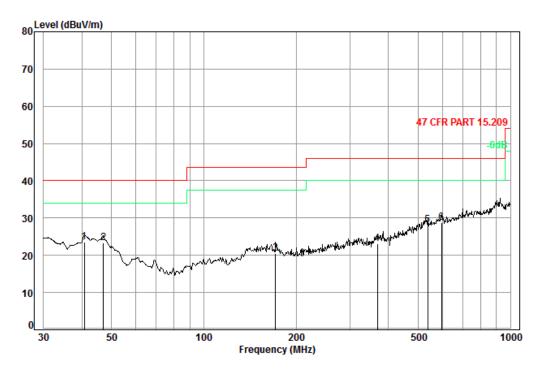

Condition: 47 CFR PART 15.209 3m Horizontal

Job No. : 0626AV Test mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	40.70	14.32	12.79	27.32	23.75	23.54	40.00	-16.46
2	46.99	17.46	10.02	27.30	23.11	23.29	40.00	-16.71
3	171.39	13.68	9.56	26.81	24.09	20.52	43.50	-22.98
4	368.11	11.23	15.42	26.93	23.47	23.19	46.00	-22.81
5	537.59	11.41	18.70	27.63	25.66	28.14	46.00	-17.86
6	597.22	11.21	19.72	27.55	25.49	28.87	46.00	-17.13





Report No.: HKES150400062601

Page: 42 of 50

Transmittin	g Emiss	ion above 1	GHz					
Test mode:		GFSK	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3585.221	6.90	32.40	35.40	42.30	46.20	74	-27.80	Vertical
4804.000	9.40	34.30	34.80	44.50	53.40	74	-20.60	Vertical
5745.233	11.80	34.20	35.00	48.20	59.20	74	-14.80	Vertical
7206.000	12.80	35.80	34.90	39.10	52.80	74	-21.20	Vertical
9608.000	14.90	37.20	35.10	38.70	55.70	74	-18.30	Vertical
11730.219	15.80	37.70	35.10	40.10	58.50	74	-15.50	Vertical
3795.217	7.40	33.10	35.30	42.30	47.50	74	-26.50	Horizontal
4804.000	9.40	34.30	34.80	42.00	50.90	74	-23.10	Horizontal
5835.241	12.10	34.40	35.00	43.60	55.10	74	-18.90	Horizontal
7206.000	12.80	35.80	34.90	38.50	52.20	74	-21.80	Horizontal
9608.000	14.90	37.20	35.10	38.60	55.60	74	-18.40	Horizontal
11235.234	15.20	37.50	34.80	39.90	57.80	74	-16.20	Horizontal

Test mode:		GFSK	Tes	st channel:	Lowest	Ren	nark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m	Over limit (dB)	Polarization
3585.221	6.90	32.40	35.40	28.30	32.20	54	-21.80	Vertical
4804.000	9.40	34.30	34.80	38.60	47.50	54	-6.50	Vertical
5745.233	11.80	34.20	35.00	29.50	40.50	54	-13.50	Vertical
7206.000	12.80	35.80	34.90	25.70	39.40	54	-14.60	Vertical
9608.000	14.90	37.20	35.10	25.50	42.50	54	-11.50	Vertical
11730.219	15.80	37.70	35.10	26.60	45.00	54	-9.00	Vertical
3795.217	7.40	33.10	35.30	28.60	33.80	54	-20.20	Horizontal
4804.000	9.40	34.30	34.80	34.90	43.80	54	-10.20	Horizontal
5835.241	12.10	34.40	35.00	29.70	41.20	54	-12.80	Horizontal
7206.000	12.80	35.80	34.90	25.60	39.30	54	-14.70	Horizontal
9608.000	14.90	37.20	35.10	25.50	42.50	54	-11.50	Horizontal
11235.234	15.20	37.50	34.80	26.60	44.50	54	-9.50	Horizontal



Report No.: HKES150400062601

Page: 43 of 50

Test mode:		GFSK	Test	channel:	Middle	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3735.223	7.30	32.80	35.30	43.50	48.30	74	-25.70	Vertical
4880.000	9.50	34.50	34.80	42.70	51.90	74	-22.10	Vertical
6135.243	12.70	35.00	35.00	42.60	55.30	74	-18.70	Vertical
7320.000	12.80	35.70	35.10	38.60	52.00	74	-22.00	Vertical
9760.000	14.80	37.30	34.50	38.90	56.50	74	-17.50	Vertical
12030.202	15.60	37.80	34.80	40.40	59.00	74	-15.00	Vertical
3750.240	7.30	32.90	35.30	42.60	47.50	74	-26.50	Horizontal
4880.000	9.50	34.50	34.80	41.60	50.80	74	-23.20	Horizontal
5910.239	12.40	34.60	35.10	43.70	55.60	74	-18.40	Horizontal
7320.000	12.80	35.70	35.10	38.90	52.30	74	-21.70	Horizontal
9760.000	14.80	37.30	34.50	38.30	55.90	74	-18.10	Horizontal
12075.239	15.70	37.80	34.80	39.00	57.70	74	-16.30	Horizontal

Test mode:		GFSK	Test	channel:	Middle	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3735.223	7.30	32.80	35.30	28.50	33.30	54	-20.70	Vertical
4880.000	9.50	34.50	34.80	38.60	47.80	54	-6.20	Vertical
6135.243	12.70	35.00	35.00	29.10	41.80	54	-12.20	Vertical
7320.000	12.80	35.70	35.10	25.50	38.90	54	-15.10	Vertical
9760.000	14.80	37.30	34.50	25.30	42.90	54	-11.10	Vertical
12030.202	15.60	37.80	34.80	26.10	44.70	54	-9.30	Vertical
3750.240	7.30	32.90	35.30	28.50	33.40	54	-20.60	Horizontal
4880.000	9.50	34.50	34.80	34.10	43.30	54	-10.70	Horizontal
5910.239	12.40	34.60	35.10	29.90	41.80	54	-12.20	Horizontal
7320.000	12.80	35.70	35.10	25.60	39.00	54	-15.00	Horizontal
9760.000	14.80	37.30	34.50	25.30	42.90	54	-11.10	Horizontal
12075.239	15.70	37.80	34.80	26.60	45.30	54	-8.70	Horizontal



Report No.: HKES150400062601

Page: 44 of 50

Test mode:		GFSK	Tes	t channel:	Highest		Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)		mit ιV/m)	Over limit (dB)	Polarization
3810.219	7.40	33.10	35.30	42.00	47.20	7	⁷ 4	-26.80	Vertical
4960.000	9.50	34.60	34.70	43.30	52.70	7	7 4	-21.30	Vertical
5895.246	12.40	34.60	35.00	42.90	54.90	7	7 4	-19.10	Vertical
7440.000	12.90	35.80	35.20	38.50	52.00	7	7 4	-22.00	Vertical
9920.000	14.70	37.30	34.50	38.90	56.40	7	7 4	-17.60	Vertical
11760.225	15.80	37.70	35.10	40.90	59.30	7	7 4	-14.70	Vertical
3800.698	7.40	33.10	35.30	42.50	47.70	7	7 4	-26.30	Horizontal
4960.000	9.50	34.60	34.70	42.30	51.70	7	7 4	-22.30	Horizontal
5850.236	12.20	34.40	35.00	43.50	55.10	7	7 4	-18.90	Horizontal
7440.000	12.90	35.80	35.20	39.50	53.00	7	⁷ 4	-21.00	Horizontal
9920.000	14.70	37.30	34.50	39.40	56.90	7	⁷ 4	-17.10	Horizontal
11790.221	15.80	37.70	35.10	40.20	58.60	7	⁷ 4	-15.40	Horizontal

Test mode:		GFSK	Test	channel:	Highest		Rema	rk:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)		mit ιV/m)	Over limit (dB)	Polarization
3810.219	7.40	33.10	35.30	28.80	34.00	į	54	-20.00	Vertical
4960.000	9.50	34.60	34.70	38.90	48.30	į	54	-5.70	Vertical
5895.246	12.40	34.60	35.00	29.60	41.60	į	54	-12.40	Vertical
7440.000	12.90	35.80	35.20	25.60	39.10	į	54	-14.90	Vertical
9920.000	14.70	37.30	34.50	25.80	43.30	į	54	-10.70	Vertical
11760.225	15.80	37.70	35.10	26.40	44.80	į	54	-9.20	Vertical
3800.698	7.40	33.10	35.30	28.60	33.80	į	54	-20.20	Horizontal
4960.000	9.50	34.60	34.70	35.40	44.80	į	54	-9.20	Horizontal
5850.236	12.20	34.40	35.00	29.80	41.40	į	54	-12.60	Horizontal
7440.000	12.90	35.80	35.20	25.60	39.10	į	54	-14.90	Horizontal
9920.000	14.70	37.30	34.50	25.80	43.30	į	54	-10.70	Horizontal
11790.221	15.80	37.70	35.10	26.20	44.60	į	54	-9.40	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: HKES150400062601

Page: 45 of 50

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205				
Test Method:	ANSI C63.10 2013					
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1CUz	54.0	Average Value			
	Above 1GHz	74.0	Peak Value			
			_			
Test Setup:						

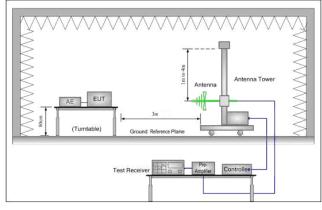

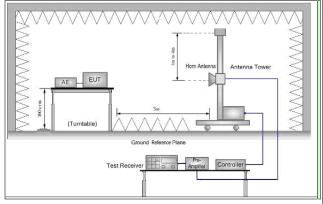


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.



Report No.: HKES150400062601

Page: 46 of 50


	g. Test the EUT in the lowest channel , the Highest channelh. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with GFSK modulation. Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



Report No.: HKES150400062601

Page: 47 of 50

Test plot as follows:

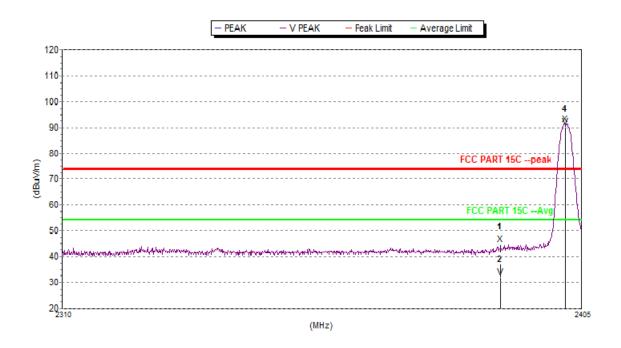


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	44.7	74.0	29.3	28.7	34.0	6.3	٧
3	2402	91.2	74.0	-17.2	28.8	34.0	6.3	٧
Avg								
2	2390	31.9	54.0	22.1	28.7	34.0	6.3	٧
4	2402	90.2	54.0	-36.2	28.8	34.0	6.3	٧



Report No.: HKES150400062601

Page: 48 of 50

Test mode: GFSK Test channel: Lowest Remark: Peak Horizontal

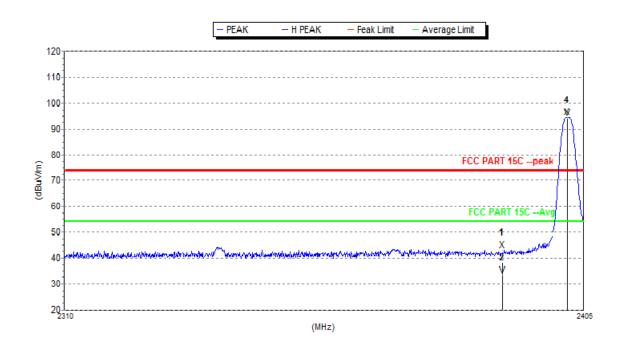


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	43.2	74.0	30.8	28.7	34.0	6.3	Н
3	2402	94.7	74.0	-20.7	28.8	34.0	6.3	Н
Avg								
2	2390	33.3	54.0	20.7	28.7	34.0	6.3	Н
4	2402	94.1	54.0	-40.1	28.8	34.0	6.3	Н



Report No.: HKES150400062601

Page: 49 of 50

	Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
--	------------	------	---------------	---------	---------	------	----------

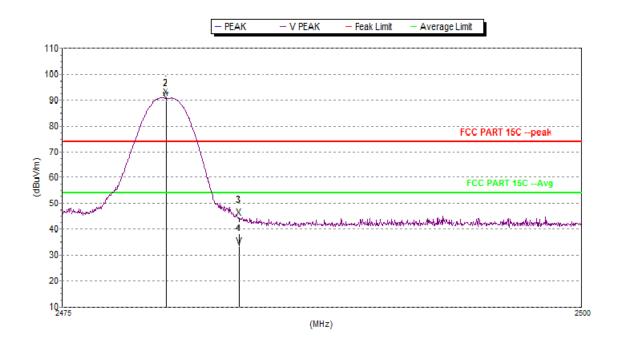


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2480	90.8	74.0	-16.8	29.3	34.0	6.3	V
3	2483.5	44.6	74.0	29.4	29.3	34.0	6.3	٧
Avg								
2	2480	89.6	54.0	-35.6	29.3	34.0	6.3	V
4	2483.5	33.5	54.0	20.5	29.3	34.0	6.3	٧



Report No.: HKES150400062601

Page: 50 of 50

Test mode: GFSK Test channel: Highest Remark: Peak Horizontal

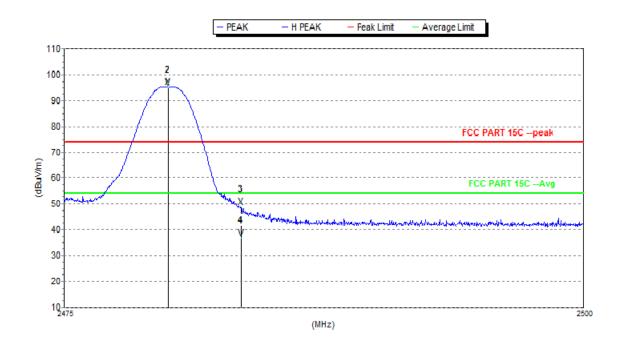

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2480	95.4	74.0	-21.4	29.3	34.0	6.3	Н
3	2483.5	48.7	74.0	25.3	29.3	34.0	6.3	Н
Avg								
2	2480	94.8	54.0	-40.8	29.3	34.0	6.3	Н
4	2483.5	36.6	54.0	17.4	29.3	34.0	6.3	Н

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor