

RF TEST REPORT



Report No.: 16070349-FCC-R

Supersede Report No.: N/A

Applicant	TOPSAIL (HK) LIMITED	
Product Name	Portable Bluetooth Speaker	
Model No.	TS-030B	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	March 31 to April 09, 2016	
Issue Date	April 26, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070349-FCC-R
Page	3 of 50

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 CHANNEL SEPARATION	9
6.3 20DB BANDWIDTH.....	12
6.4 PEAK OUTPUT POWER.....	15
6.5 NUMBER OF HOPPING CHANNEL.....	18
6.6 TIME OF OCCUPANCY (DWEEL TIME)	20
6.7 BAND EDGE.....	23
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	29
6.9 RADIATED SPURIOUS EMISSIONS.....	35
ANNEX A. TEST INSTRUMENT.....	40
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	41
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	45
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	49
ANNEX E. DECLARATION OF SIMILARITY.....	50

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070349-FCC-R	NONE	Original	April 11, 2016
16070349-FCC-R	V1	Change test setup photo	April 26, 2016

2. Customer information

Applicant Name	TOPSAIL (HK) LIMITED
Applicant Add	#2005, Building D, Transportation Bureau, BaoMin First rd., BaoAn, Shenzhen, P.R.China
Manufacturer	TOPSAIL (HK) LIMITED
Manufacturer Add	#2005, Building D, Transportation Bureau, BaoMin First rd., BaoAn, Shenzhen, P.R.China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Portable Bluetooth Speaker
Main Model:	TS-030B
Serial Model:	N/A
Date EUT received:	March 30, 2016
Test Date(s):	March 31 to April 09, 2016
Equipment Category :	DSS
Antenna Gain:	0dBi
Type of Modulation:	GFSK, π /4DQPSK
RF Operating Frequency (ies):	2402-2480 MHz
Max. Output Power:	-2.307dBm
Number of Channels:	79CH
Port:	USB Port, Power Port, AUX-IN
Input Power:	Battery: Spec: DC 3.7V 1200mAh
Trade Name :	N/A
FCC ID:	2ACCE-BT030

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	N/A
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PCB antenna for Bluetooth, the gain is 0dBi for Bluetooth

The antenna meets up with the ANTENNA REQUIREMENT.


Result: Compliance.

6.2 Channel Separation

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	April 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

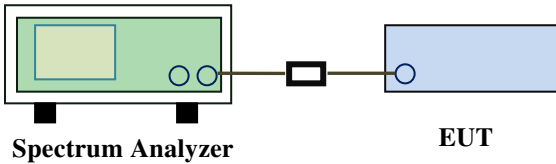Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.
----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.959	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.955	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.957	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.879	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.877	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.879	Pass
	Adjacency Channel	2479			
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

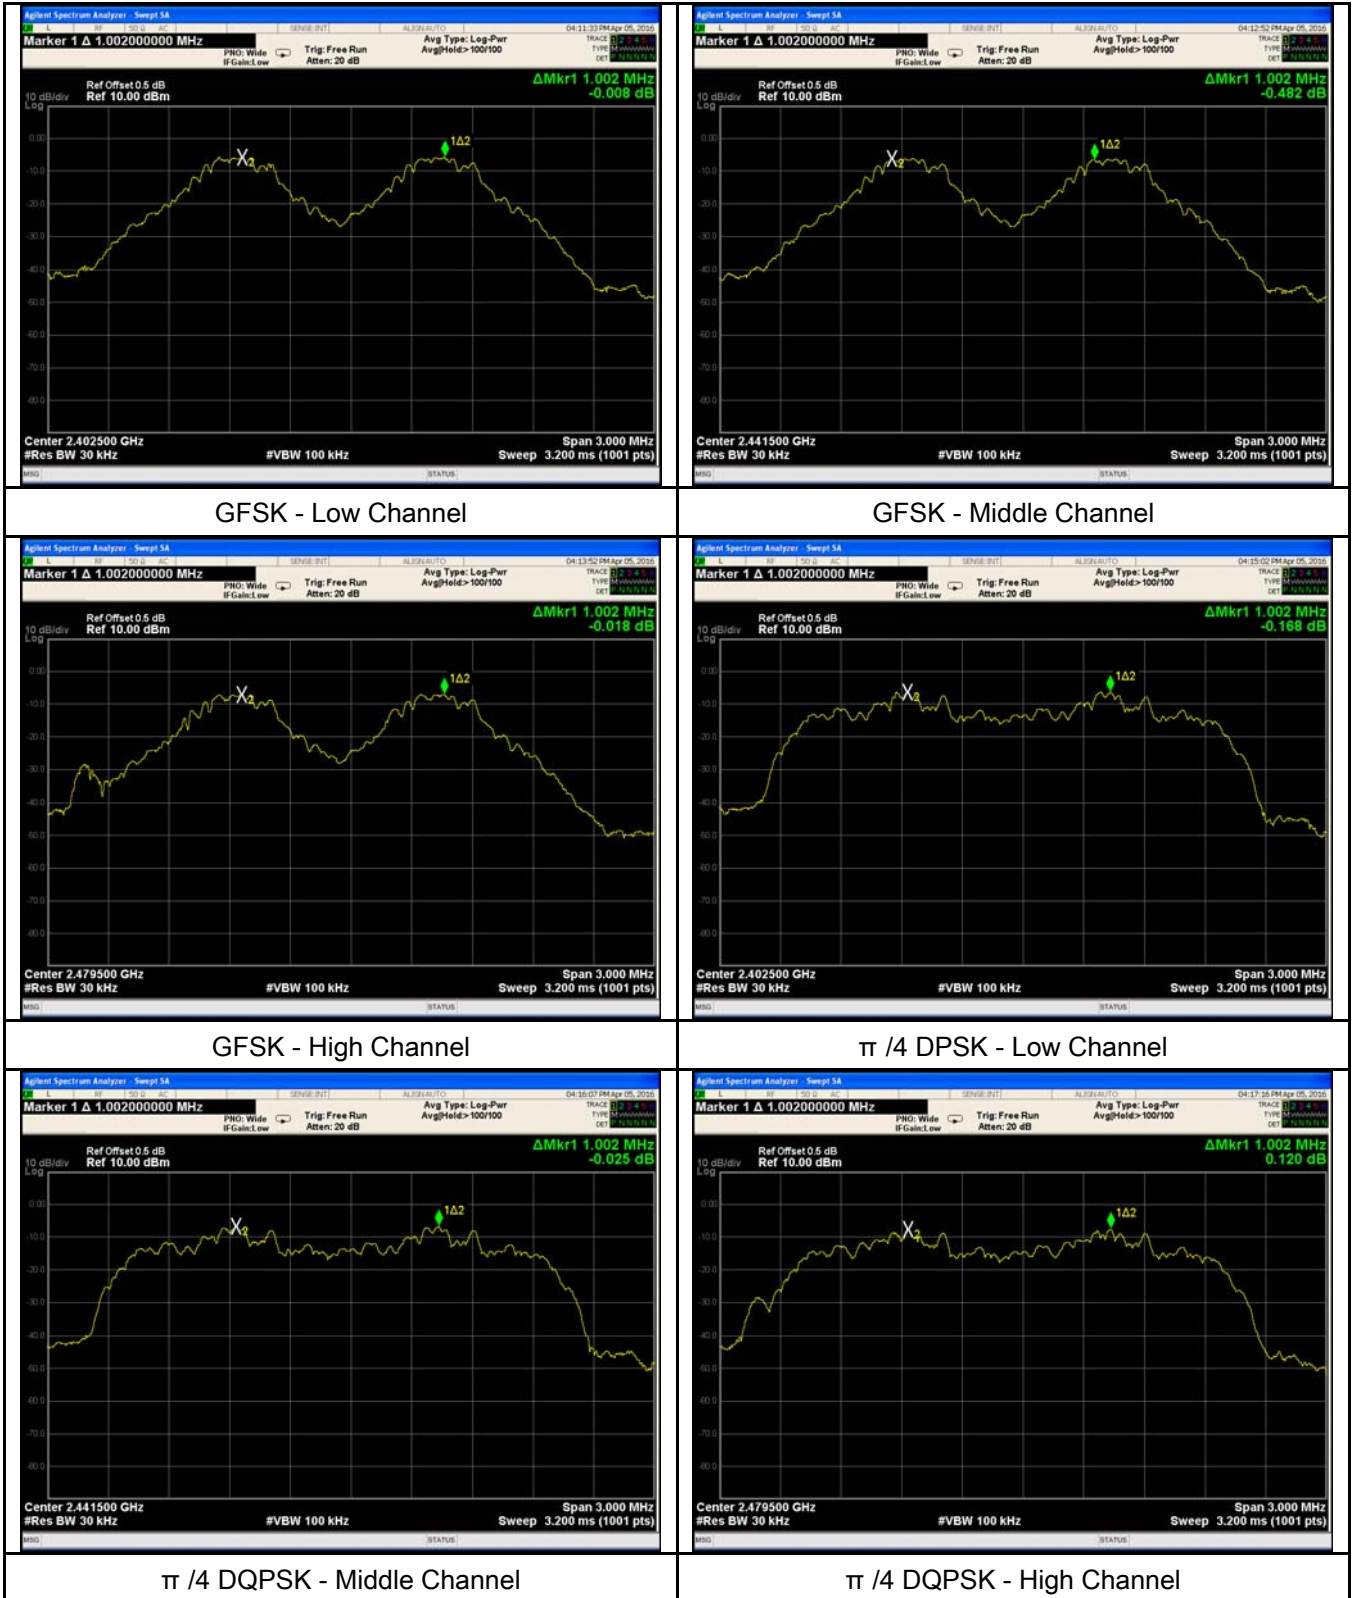


6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	April 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.959	0.8623
	Mid	2441	0.955	0.8568
	High	2480	0.957	0.8946
π /4 DQPSK	Low	2402	1.319	1.1687
	Mid	2441	1.315	1.1666
	High	2480	1.318	1.1824

Test Plots

20dB Bandwidth measurement result



GFSK - Low Channel




GFSK - Middle Channel



GFSK - High Channel



$\pi/4$ DPSK - Low Channel

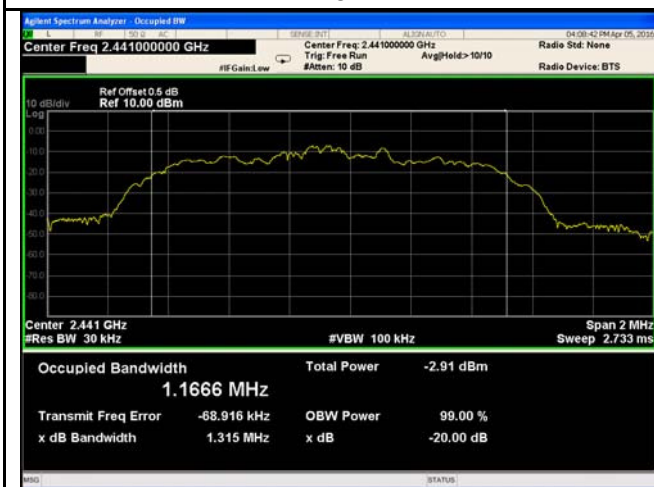

$\pi/4$ DQPSK - Middle Channel




$\pi/4$ DQPSK - High Channel

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	April 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
 Test Plot Yes (See below) N/A

Peak Output Power measurement result


Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-3.423	1000	Pass
		Mid	2441	-3.776	1000	Pass
		High	2480	-4.615	1000	Pass
	π / 4 DQPSK	Low	2402	-2.307	125	Pass
		Mid	2441	-2.680	125	Pass
		High	2480	-3.541	125	Pass

Test Plots

Output Power measurement result



GFSK Output power - Low CH 2402

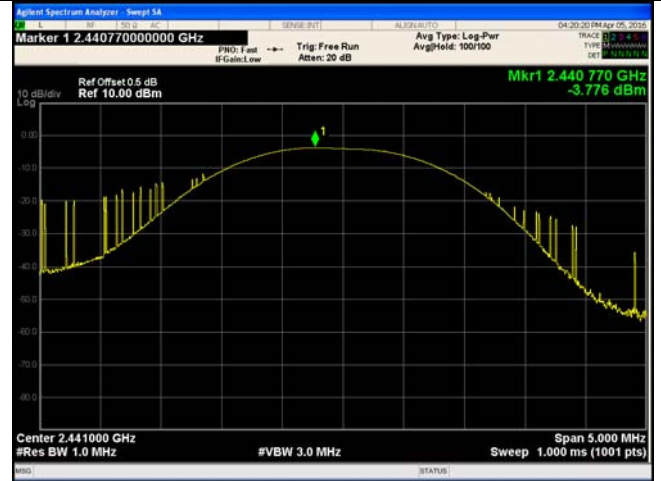

GFSK Output power - Mid CH 2441




GFSK Output power - High CH 2480



$\pi/4$ DQPSK Output power - Low CH 2402



$\pi/4$ DQPSK Output power - Mid CH 2441

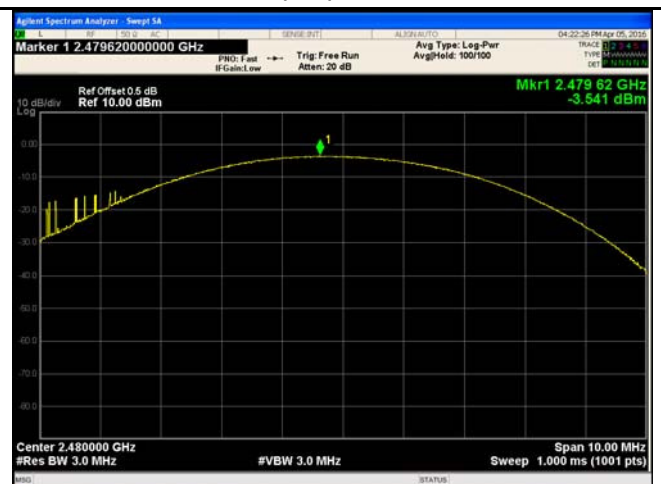


$\pi/4$ DQPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	April 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

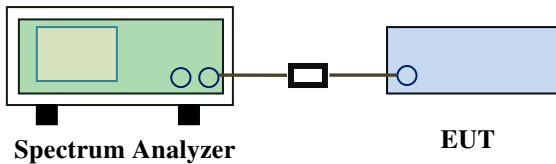Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

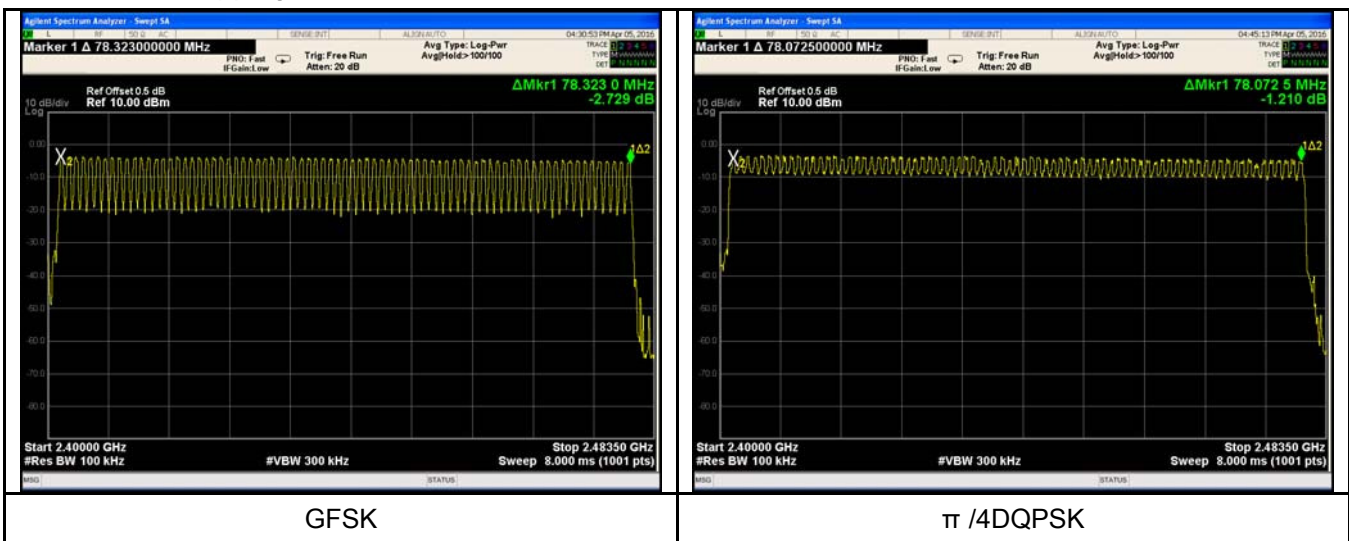

6.6 Time of Occupancy (Dwell Time)

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	April 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

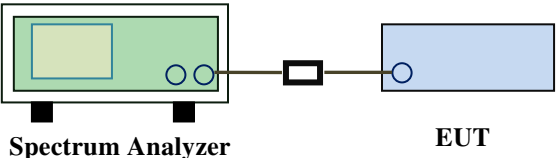Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A
 Test Plot Yes (See below) N/A


Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.850	304.000	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.865	305.600	400	Pass
	π /4 DQPSK	Low	2.865	305.600	400	Pass
		Mid	2.865	305.600	400	Pass
		High	2.865	305.600	400	Pass

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6

Test Plots

Dwell Time measurement result

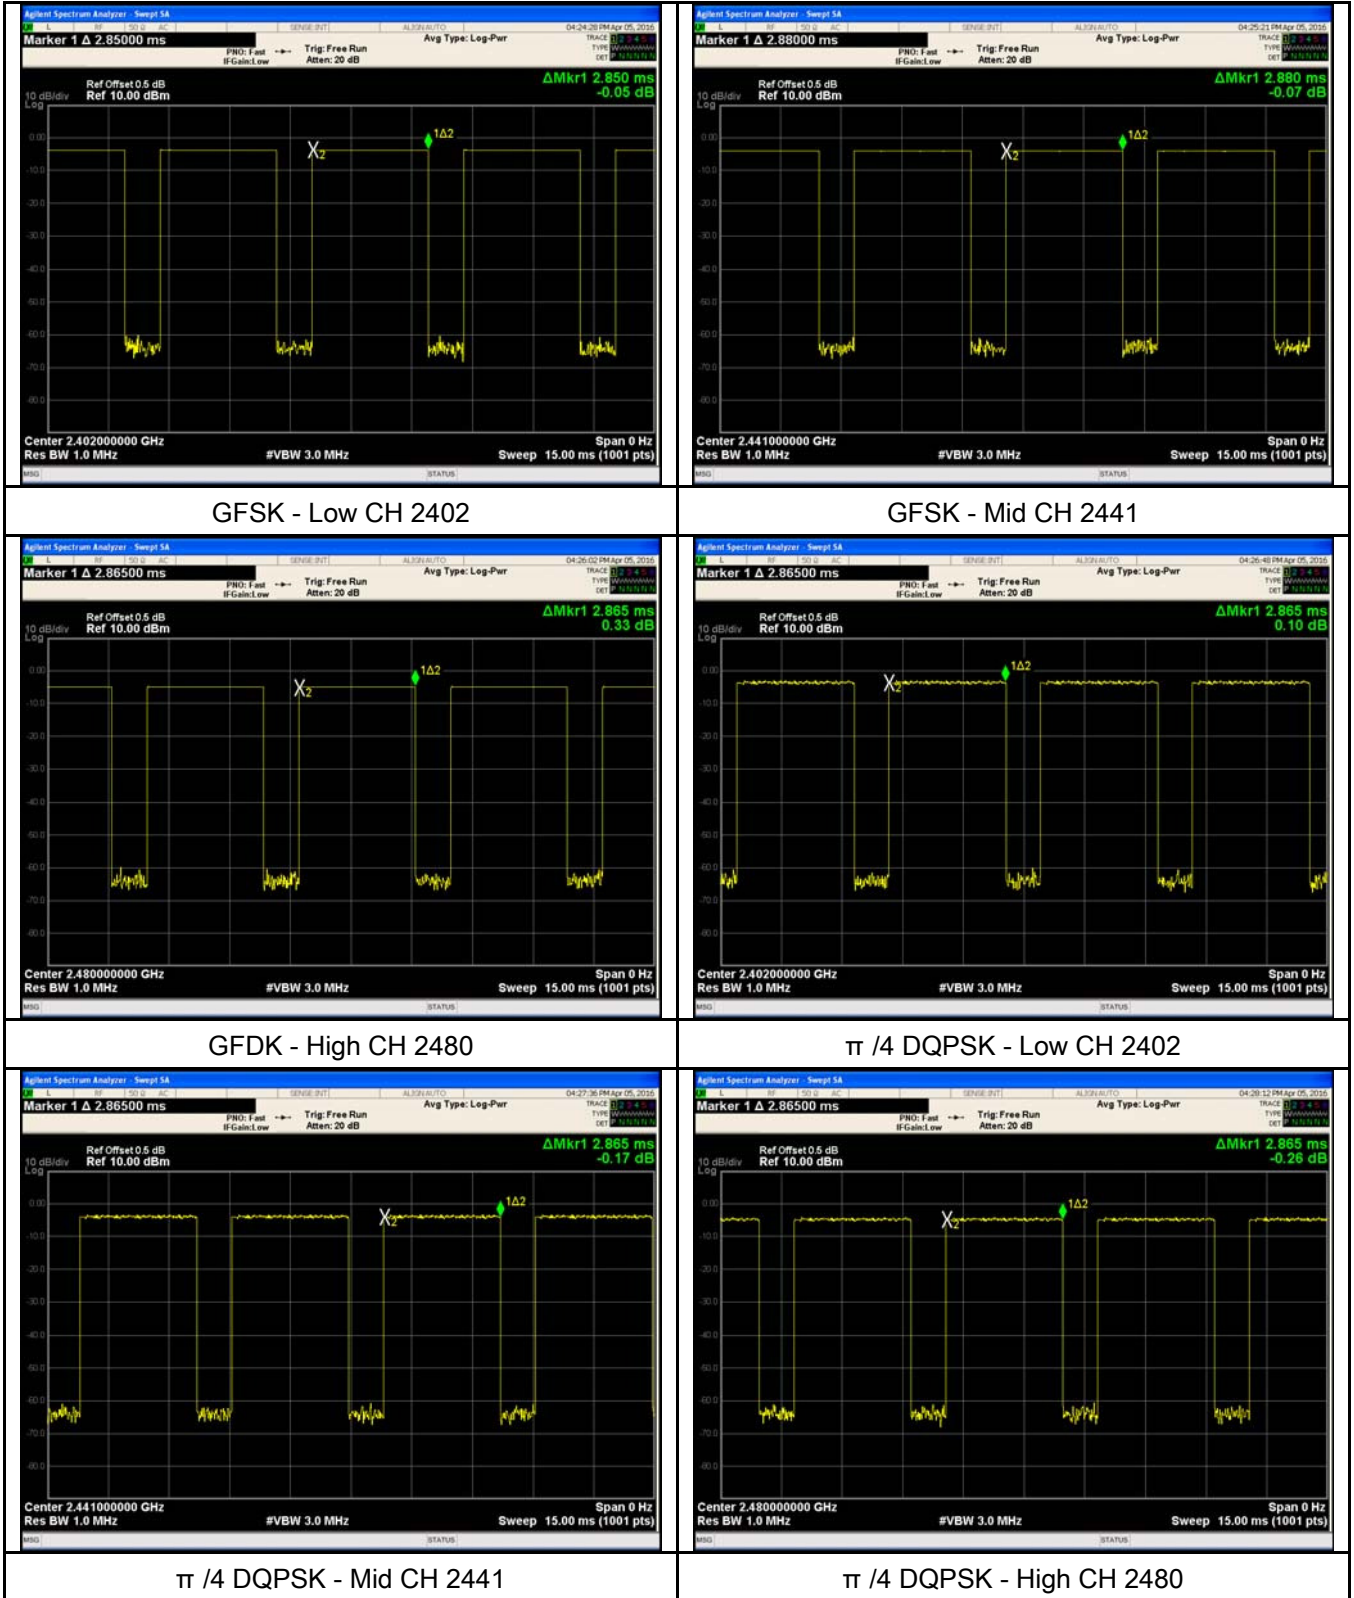

6.7 Band Edge

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	April 07, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	<p>The diagram illustrates the test setup for radiated emissions. A Turn Table is placed on a stand, with EUT & Support Units on top. The height from the Ground Plane to the EUT is 0.8/1.5m. An Ant. Tower is positioned 3m away from the Turn Table. The tower has a 1-4m Variable section. A Test Receiver is connected to the tower and is shown displaying a signal on its screen.</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


Test Report	16070349-FCC-R
Page	24 of 50

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots


GFSK Mode:

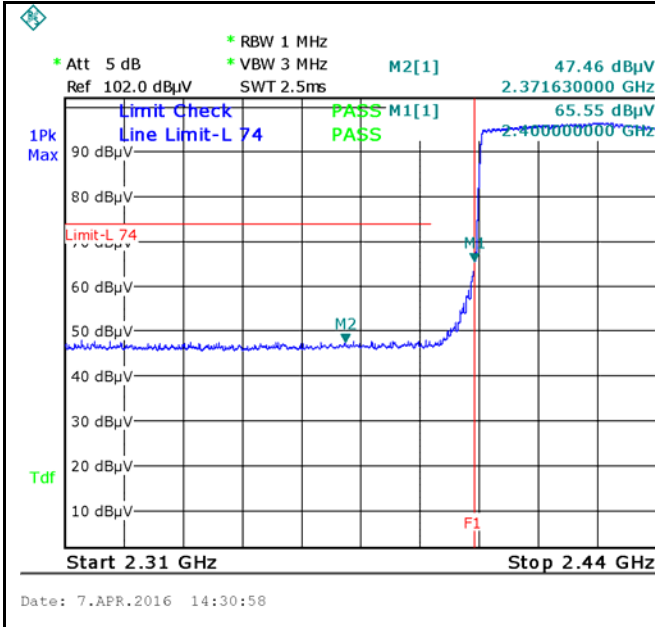


GFSK-Hopping Left Side-PK
 Note: F1 is frequency 2400MHz

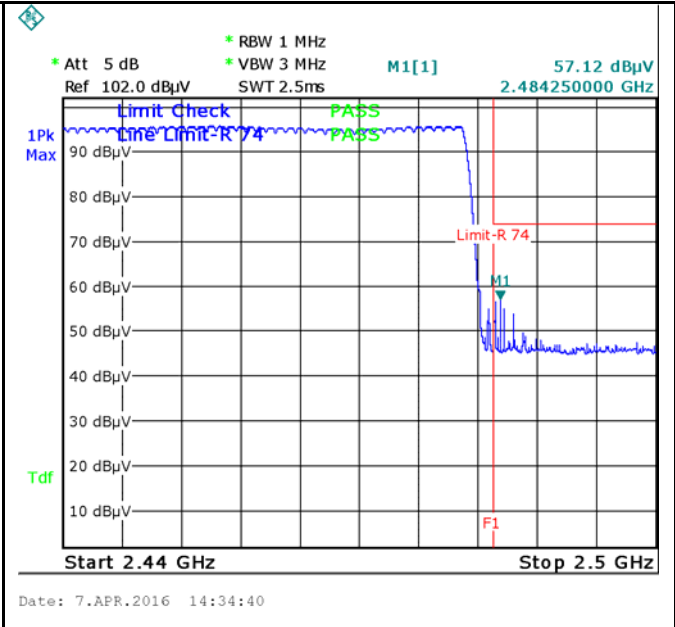


GFSK-Hopping Right Side-PK
 Note: F1 is frequency 2483.5MHz

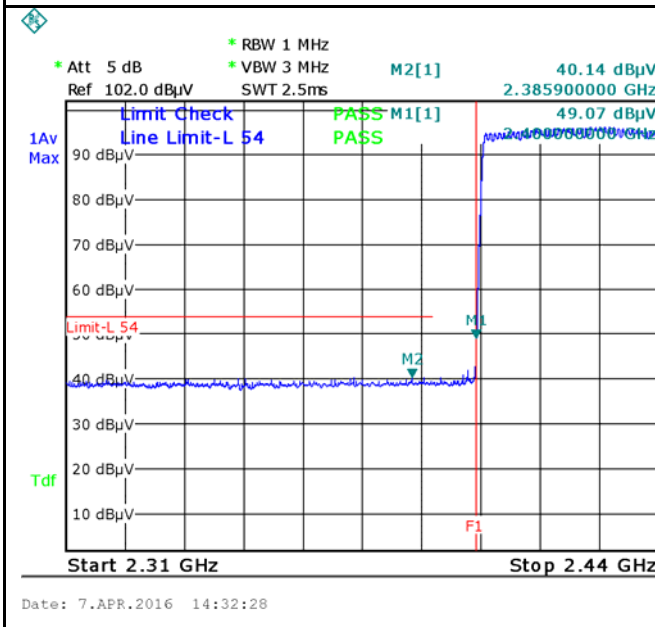


GFSK-Hopping Left Side-AV

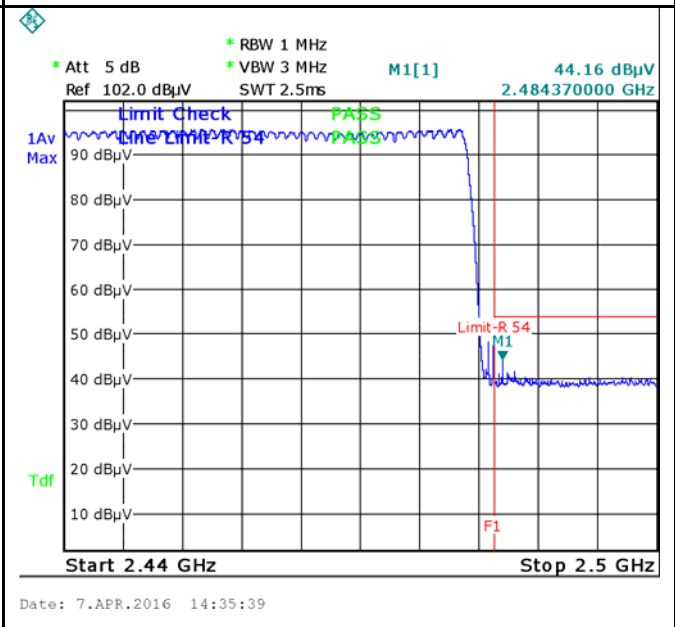

GFSK-Hopping Right Side-AV

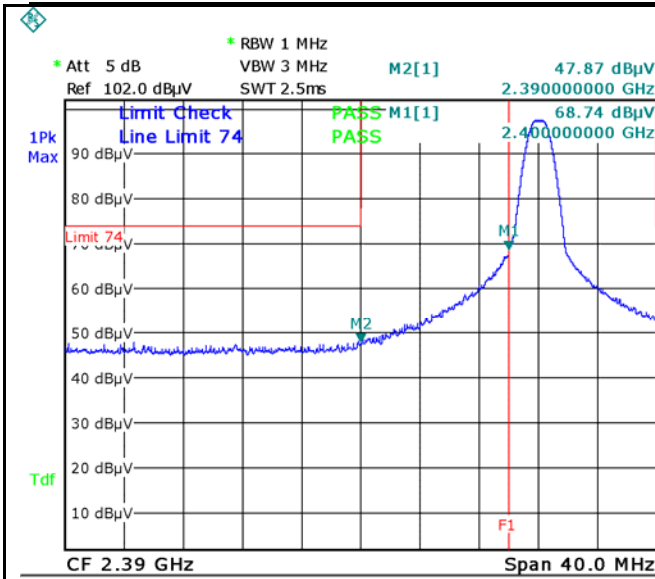


Date: 7.APR.2016 13:51:41

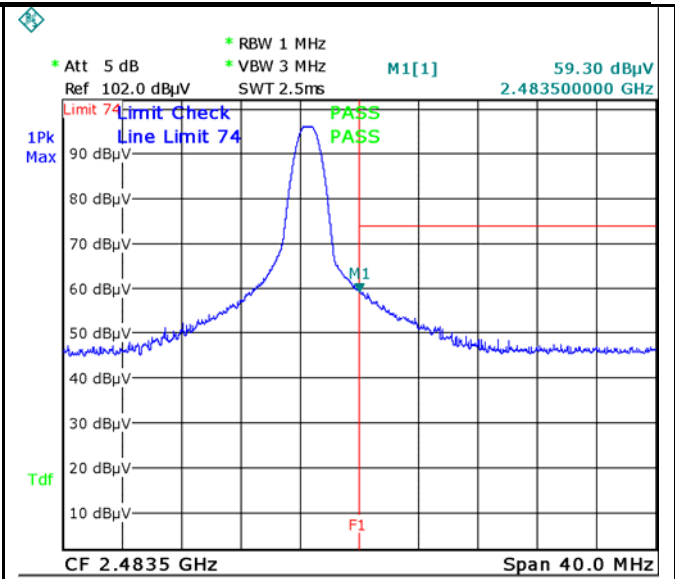


Date: 7.APR.2016 14:09:02

GFSK-Left Side-PK
 Note: F1 is frequency 2400MHz

GFSK-Right Side-PK
 Note: F1 is frequency 2483.5MHz

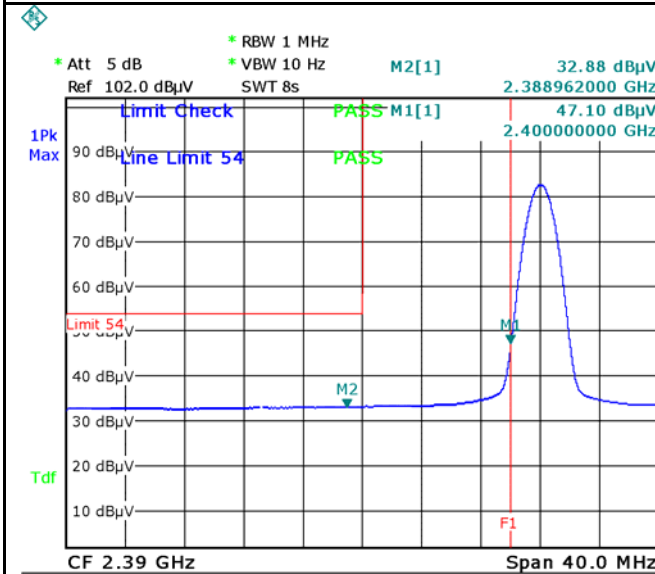

Date: 7.APR.2016 14:02:25

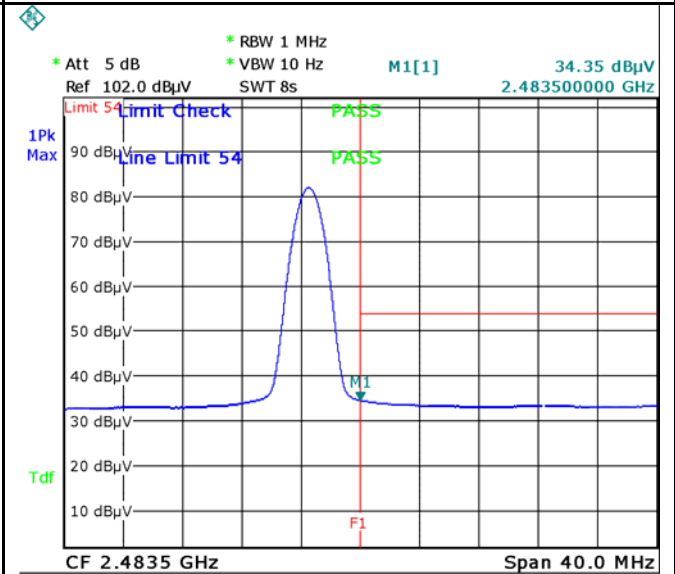


Date: 7.APR.2016 14:11:02


GFSK-Left Side-AV

GFSK-Right Side-AV


$\pi/4$ DQPSK Mode:

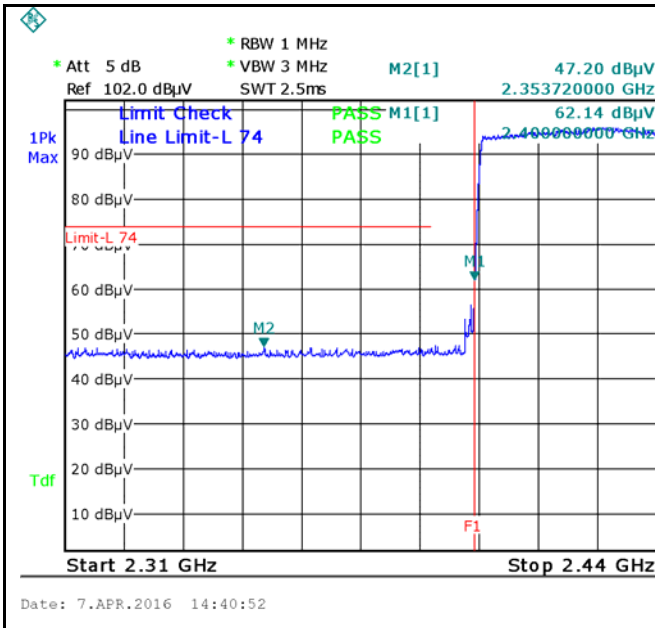


$\pi/4$ DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz

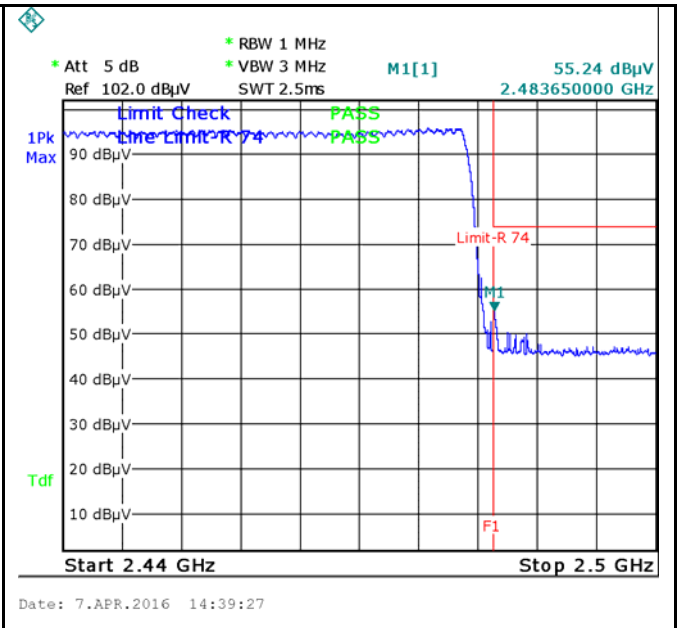


$\pi/4$ DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz

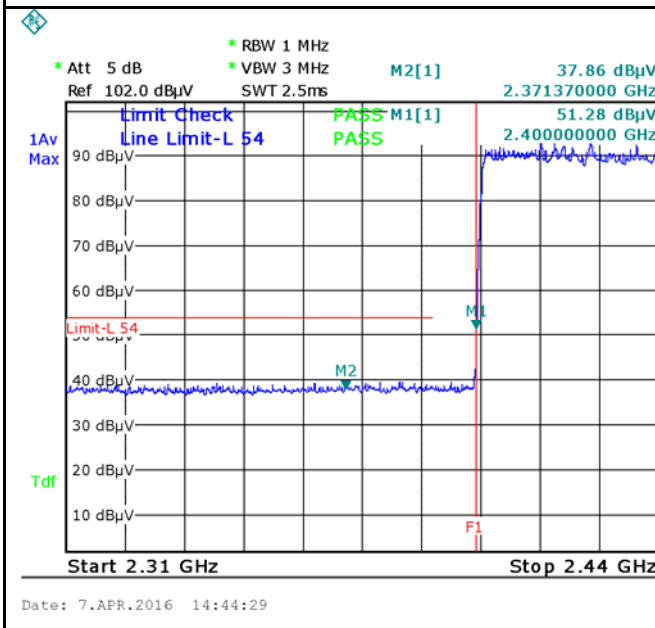


$\pi/4$ DQPSK-Hopping Left-AV

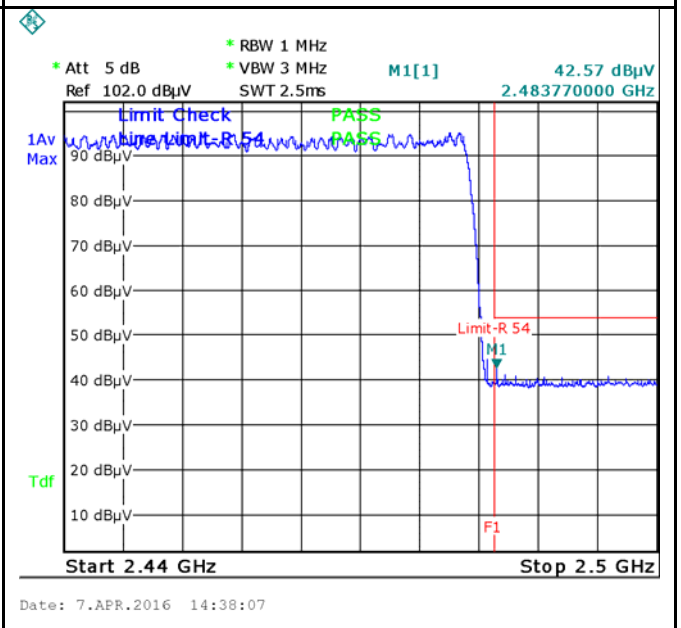

$\pi/4$ DQPSK-Hopping Right-AV

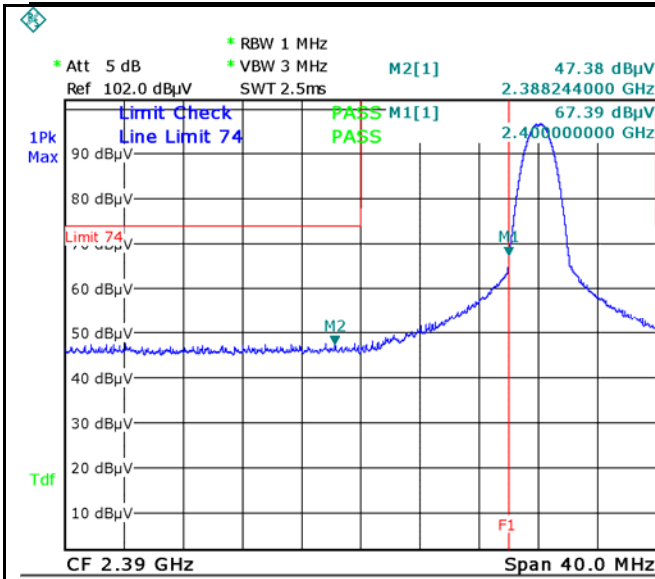


Date: 7.APR.2016 14:06:53

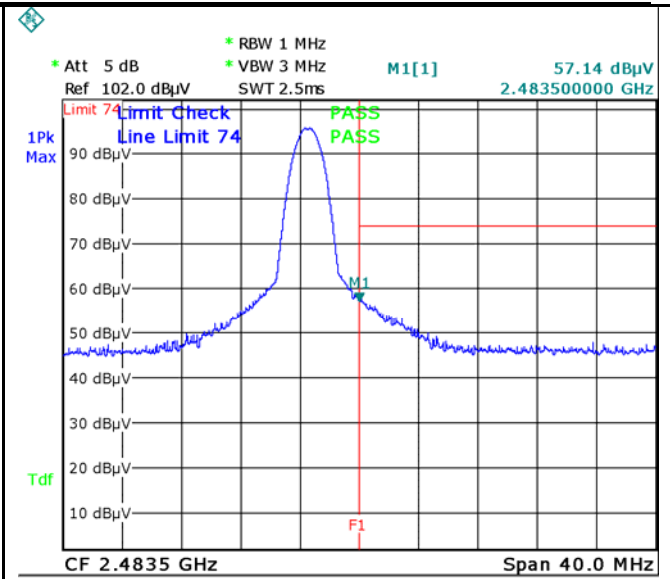


Date: 7.APR.2016 14:14:16

$\pi/4$ DQPSK-Left Side-PK
Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Right Side-PK
Note: F1 is frequency 2483.5MHz

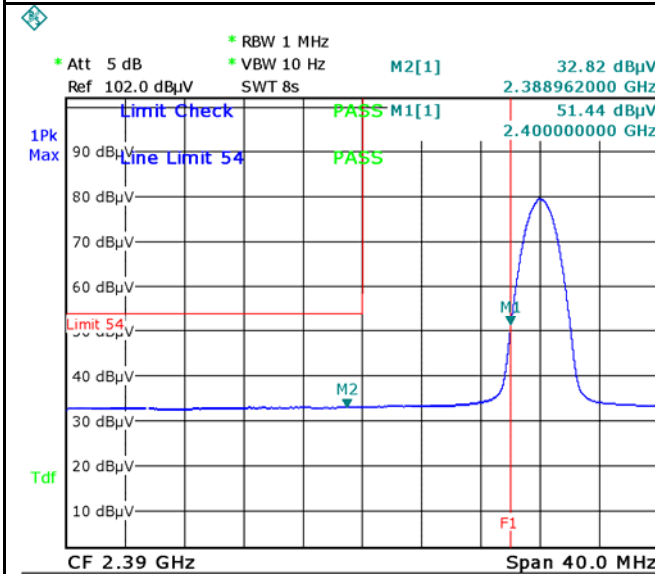

Date: 7.APR.2016 14:05:37

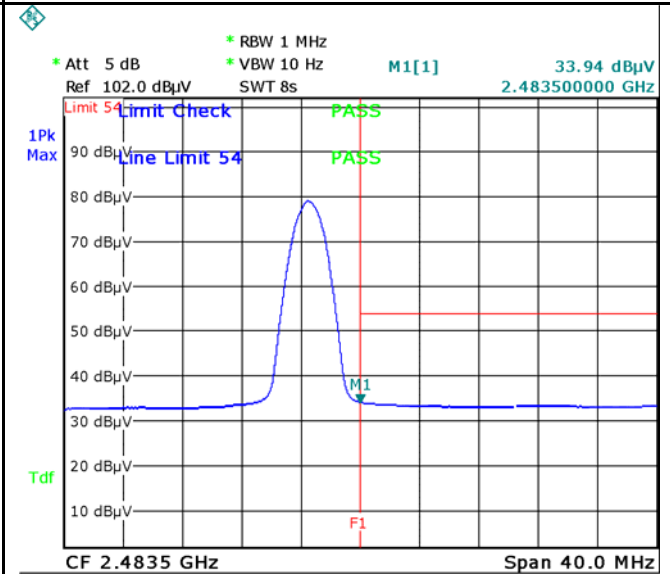

Date: 7.APR.2016 14:13:36

$\pi/4$ DQPSK-Left Side-AV


$\pi/4$ DQPSK-Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	April 07, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

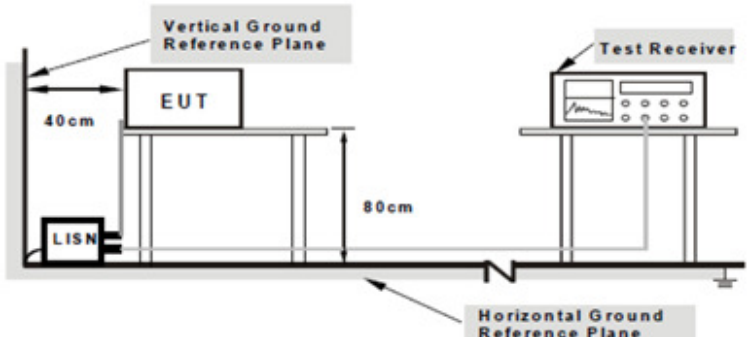Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


Test Report	16070349-FCC-R
Page	30 of 50

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail <input checked="" type="checkbox"/> N/A

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

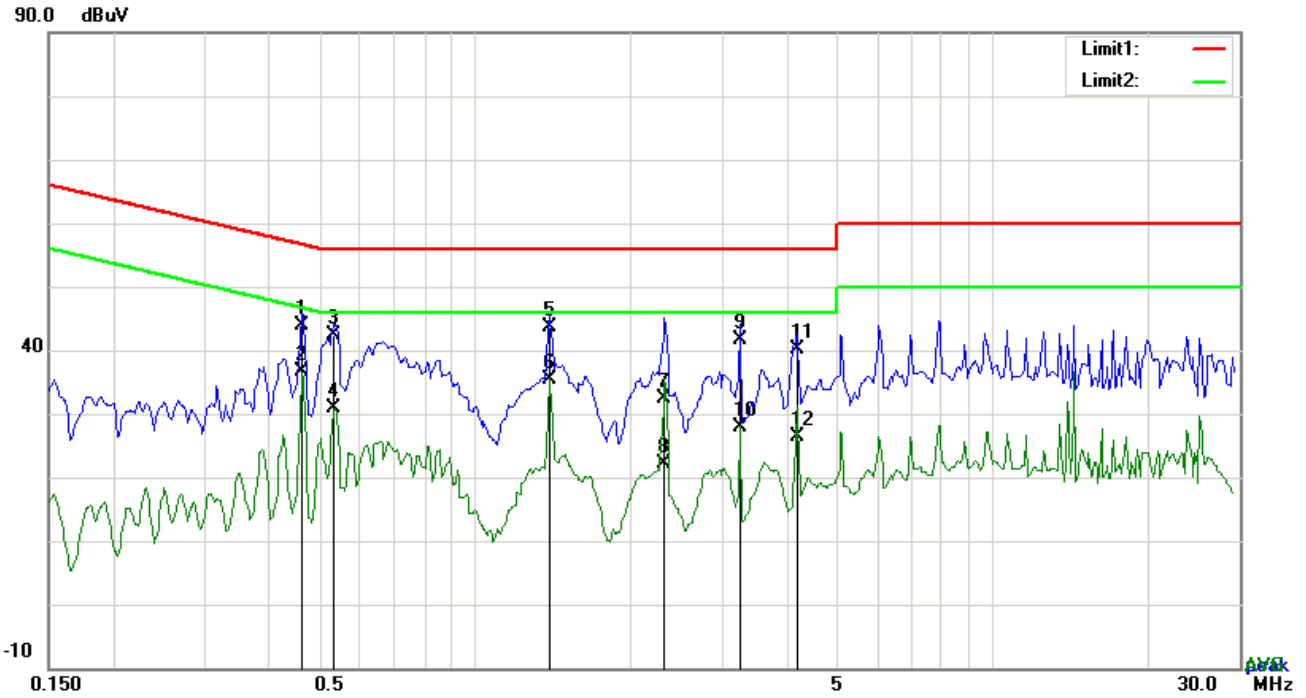


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.4659	33.87	QP	10.03	43.90	56.59	-12.69
2	L1	0.4659	26.69	AVG	10.03	36.72	46.59	-9.87
3	L1	0.5322	32.26	QP	10.03	42.29	56.00	-13.71
4	L1	0.5322	20.96	AVG	10.03	30.99	46.00	-15.01
5	L1	1.3941	33.62	QP	10.03	43.65	56.00	-12.35
6	L1	1.3941	25.42	AVG	10.03	35.45	46.00	-10.55
7	L1	2.3301	22.37	QP	10.05	32.42	56.00	-23.58
8	L1	2.3301	12.15	AVG	10.05	22.20	46.00	-23.80
9	L1	3.2535	31.57	QP	10.06	41.63	56.00	-14.37
10	L1	3.2535	17.90	AVG	10.06	27.96	46.00	-18.04
11	L1	4.1817	30.04	QP	10.07	40.11	56.00	-15.89
12	L1	4.1817	16.35	AVG	10.07	26.42	46.00	-19.58

Test Mode:	Bluetooth Mode
-------------------	-----------------------

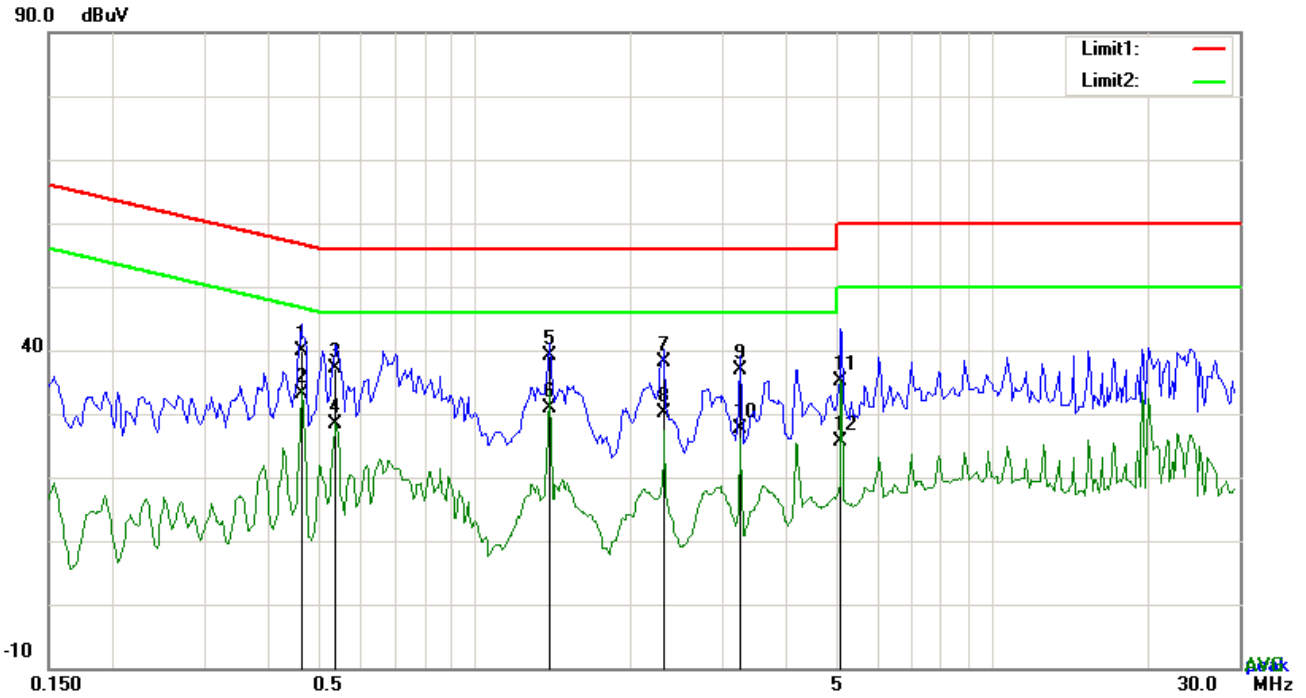


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.4620	29.98	QP	10.02	40.00	56.66	-16.66
2	N	0.4620	23.17	AVG	10.02	33.19	46.66	-13.47
3	N	0.5400	27.14	QP	10.02	37.16	56.00	-18.84
4	N	0.5400	18.34	AVG	10.02	28.36	46.00	-17.64
5	N	1.3941	29.17	QP	10.03	39.20	56.00	-16.80
6	N	1.3941	20.88	AVG	10.03	30.91	46.00	-15.09
7	N	2.3223	28.03	QP	10.04	38.07	56.00	-17.93
8	N	2.3223	20.10	AVG	10.04	30.14	46.00	-15.86
9	N	3.2496	26.71	QP	10.05	36.76	56.00	-19.24
10	N	3.2496	17.63	AVG	10.05	27.68	46.00	-18.32
11	N	5.1099	25.00	QP	10.07	35.07	60.00	-24.93
12	N	5.1099	15.56	AVG	10.07	25.63	50.00	-24.37

Test Mode:	Bluetooth Mode
-------------------	-----------------------

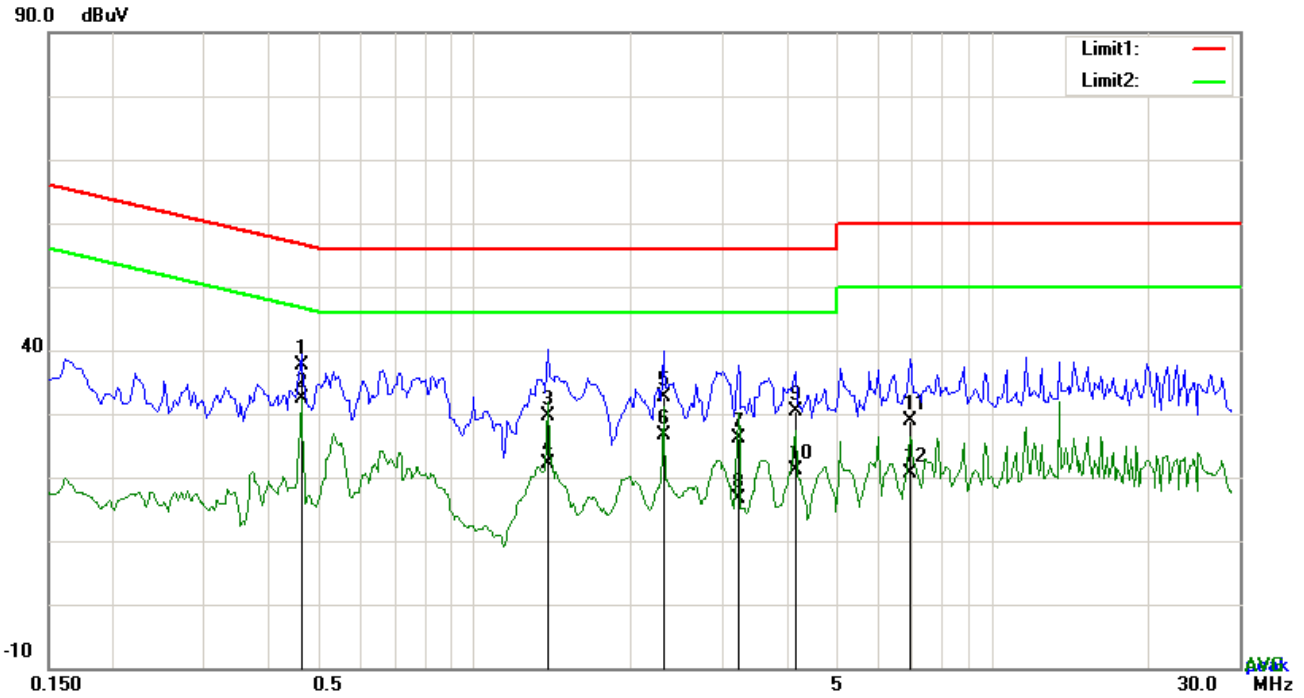


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.4620	27.48	QP	10.03	37.51	56.66	-19.15
2	L1	0.4620	22.40	AVG	10.03	32.43	46.66	-14.23
3	L1	1.3824	19.66	QP	10.03	29.69	56.00	-26.31
4	L1	1.3824	12.17	AVG	10.03	22.20	46.00	-23.80
5	L1	2.3106	22.54	QP	10.05	32.59	56.00	-23.41
6	L1	2.3106	16.59	AVG	10.05	26.64	46.00	-19.36
7	L1	3.2340	16.11	QP	10.06	26.17	56.00	-29.83
8	L1	3.2340	6.62	AVG	10.06	16.68	46.00	-29.32
9	L1	4.1622	20.24	QP	10.07	30.31	56.00	-25.69
10	L1	4.1622	11.06	AVG	10.07	21.13	46.00	-24.87
11	L1	6.9273	18.85	QP	10.11	28.96	60.00	-31.04
12	L1	6.9273	10.50	AVG	10.11	20.61	50.00	-29.39

Test Mode:	Bluetooth Mode
-------------------	-----------------------

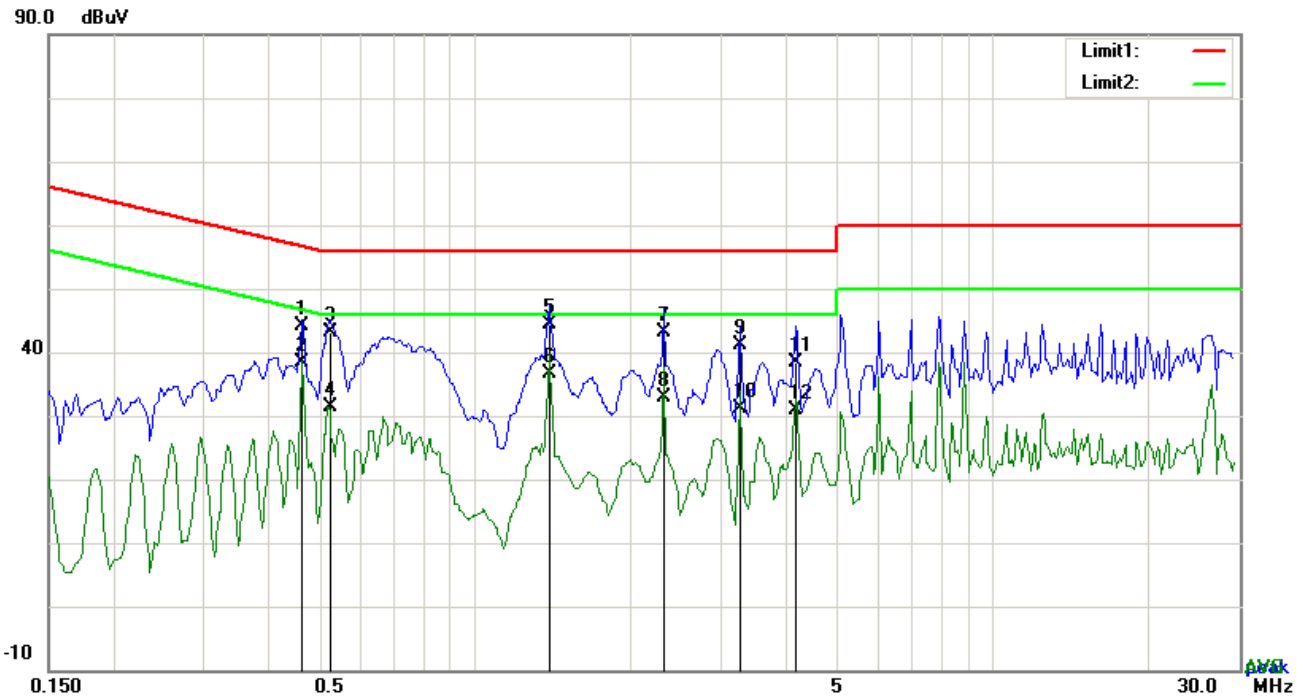

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.4659	34.14	QP	10.02	44.16	56.59	-12.43
2	N	0.4659	28.33	AVG	10.02	38.35	46.59	-8.24
3	N	0.5244	33.01	QP	10.02	43.03	56.00	-12.97
4	N	0.5244	21.37	AVG	10.02	31.39	46.00	-14.61
5	N	1.3902	34.42	QP	10.03	44.45	56.00	-11.55
6	N	1.3902	26.64	AVG	10.03	36.67	46.00	-9.33
7	N	2.3184	33.13	QP	10.04	43.17	56.00	-12.83
8	N	2.3184	22.77	AVG	10.04	32.81	46.00	-13.19
9	N	3.2457	31.08	QP	10.05	41.13	56.00	-14.87
10	N	3.2457	21.17	AVG	10.05	31.22	46.00	-14.78
11	N	4.1739	28.29	QP	10.06	38.35	56.00	-17.65
12	N	4.1739	20.78	AVG	10.06	30.84	46.00	-15.16

6.9 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	April 07, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (µV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

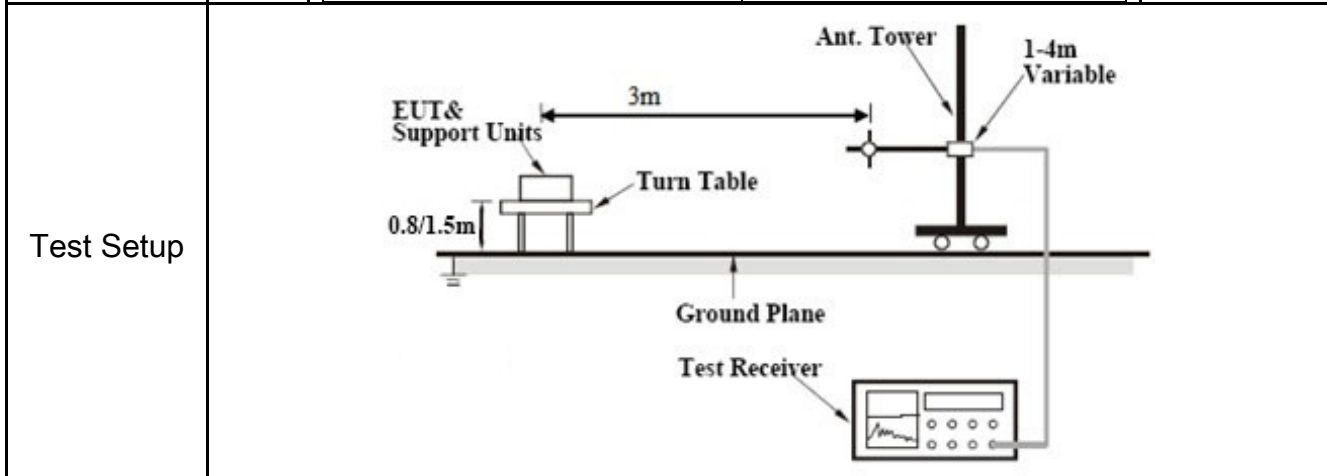


Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. <ol style="list-style-type: none"> 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
 Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

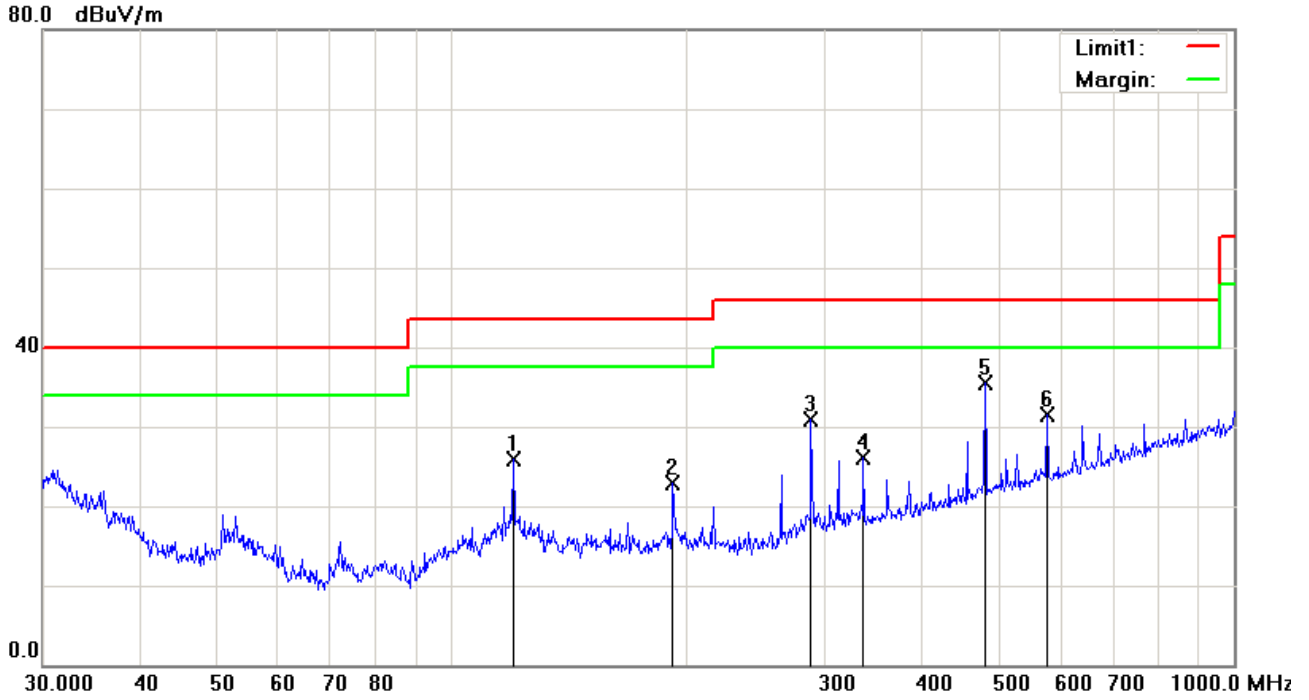


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	119.8556	33.29	peak	-7.33	25.96	43.50	-17.54	100	179
2	H	191.7450	32.05	peak	-9.14	22.91	43.50	-20.59	100	160
3	H	287.9904	38.27	peak	-7.45	30.82	46.00	-15.18	100	29
4	H	336.0352	31.99	peak	-5.86	26.13	46.00	-19.87	100	33
5	H	480.5276	37.65	peak	-2.23	35.42	46.00	-10.58	100	217
6	H	576.6443	31.95	peak	-0.37	31.58	46.00	-14.42	100	281

Below 1GHz

80.0 dBuV/m

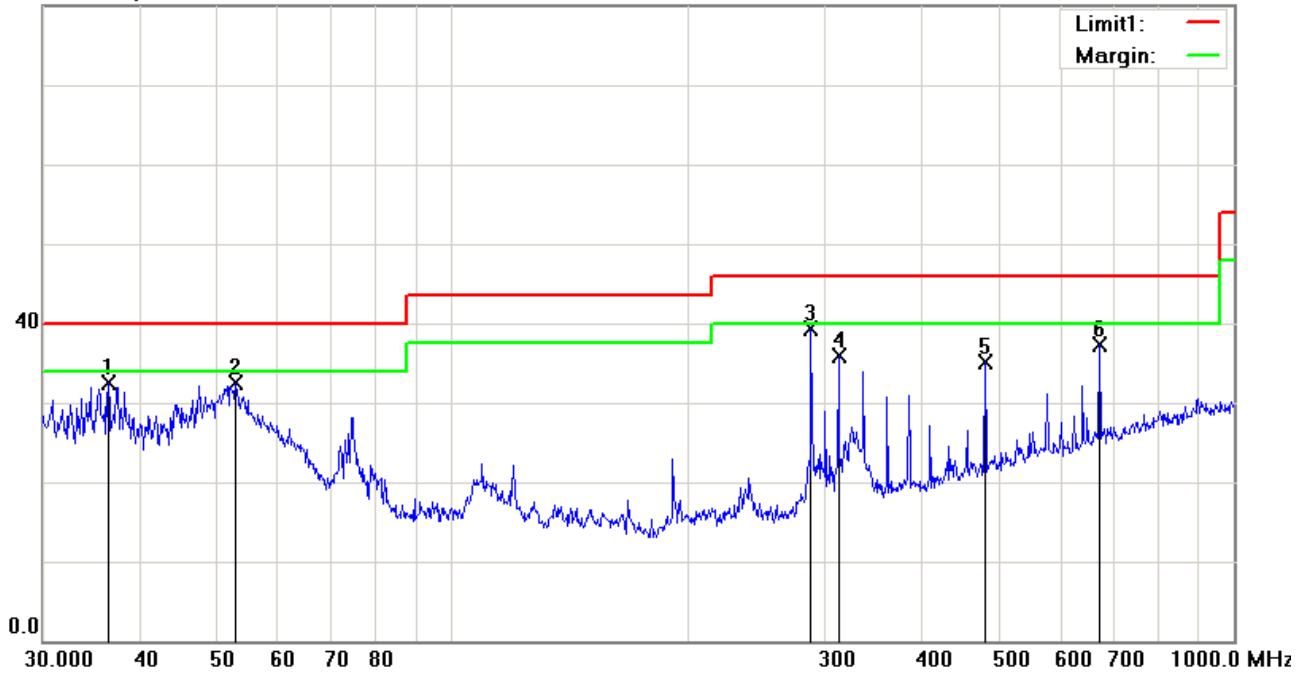

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	36.3814	37.36	peak	-4.95	32.41	40.00	-7.59	100	218
2	V	52.9453	46.01	peak	-13.52	32.49	40.00	-7.51	100	30
3	V	287.9904	46.67	peak	-7.45	39.22	46.00	-6.78	100	207
4	V	312.1794	42.36	peak	-6.55	35.81	46.00	-10.19	100	233
5	V	480.5276	37.32	peak	-2.23	35.09	46.00	-10.91	100	177
6	V	672.8445	36.31	peak	1.07	37.38	46.00	-8.62	100	358

Test Mode:	Transmitting Mode
-------------------	--------------------------

Mode: $\pi/4$ DQPSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	40.25	AV	V	33.83	6.86	31.72	49.22	54	-4.78
4804	39.72	AV	H	33.83	6.86	31.72	48.69	54	-5.31
4804	50.49	PK	V	33.83	6.86	31.72	59.46	74	-14.54
4804	49.63	PK	H	33.83	6.86	31.72	58.6	74	-15.40

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	40.18	AV	V	33.86	6.82	31.82	49.04	54	-4.96
4882	39.55	AV	H	33.86	6.82	31.82	48.41	54	-5.59
4882	50.37	PK	V	33.86	6.82	31.82	59.23	74	-14.77
4882	49.71	PK	H	33.86	6.82	31.82	58.57	74	-15.43

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	40.25	AV	V	33.9	6.76	31.92	48.99	54	-5.01
4960	39.61	AV	H	33.9	6.76	31.92	48.35	54	-5.65
4960	50.28	PK	V	33.9	6.76	31.92	59.02	74	-14.98
4960	49.86	PK	H	33.9	6.76	31.92	58.6	74	-15.40

Note:

- 1, The testing has been conformed to $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



EUT - Front View

EUT - Rear View


EUT - Top View

EUT - Bottom View


EUT - Left View

EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo

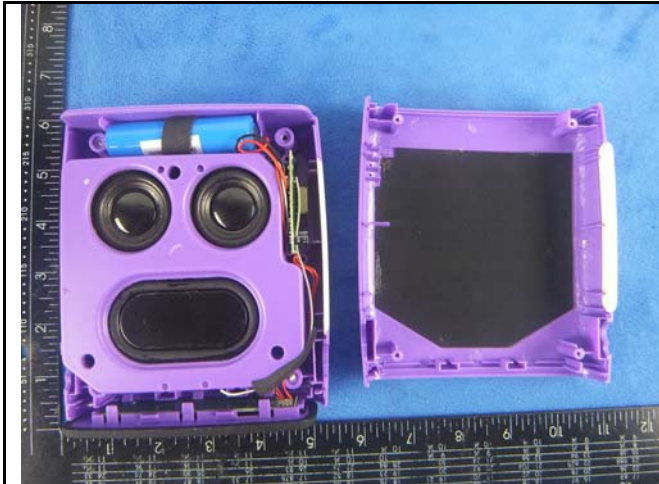

Cover Off - Top View

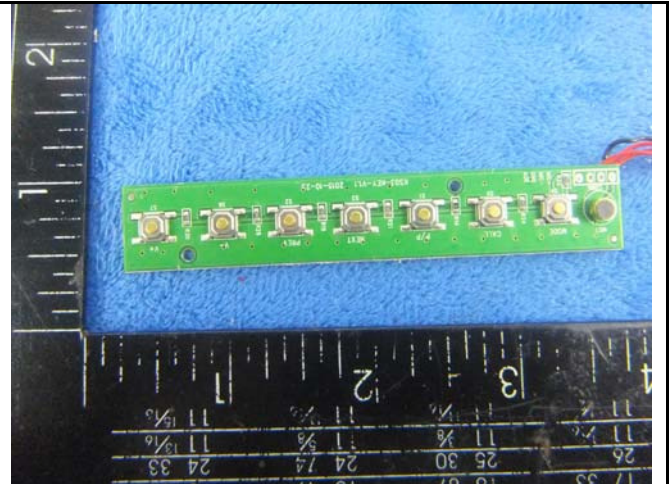


Small Mainboard - Front View

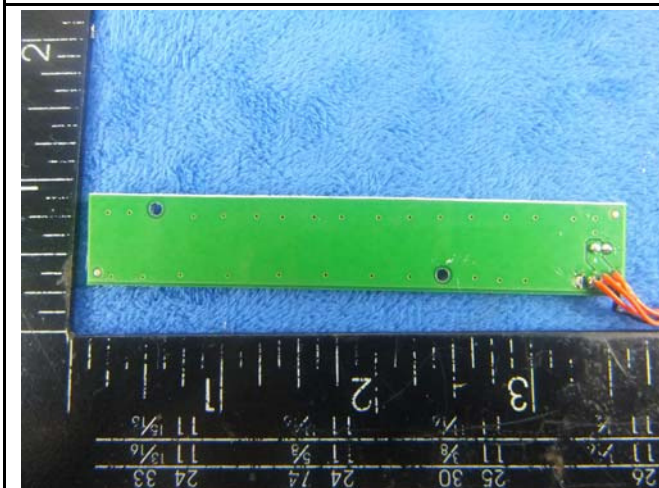

Small Mainboard - Rear View




Mainboard - Front View

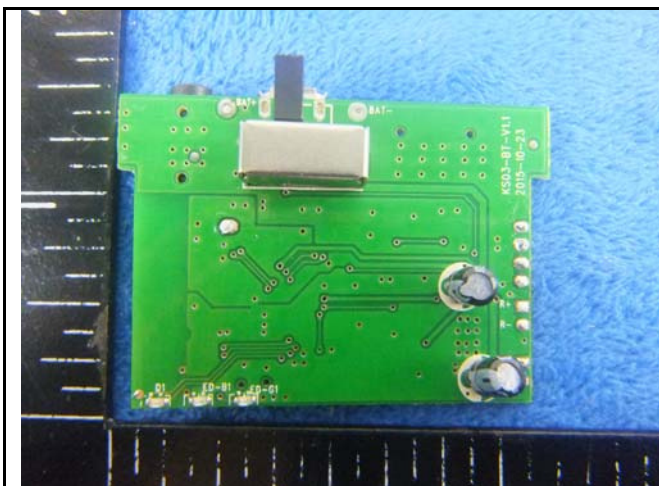


Mainboard - Rear View



Battery - Front View

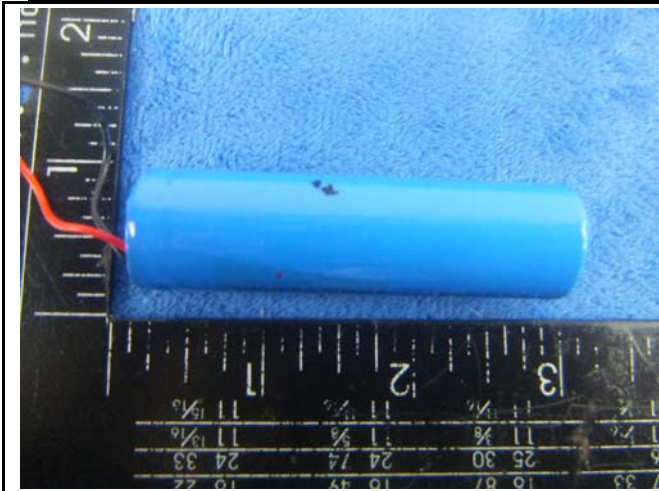

Battery - Rear View

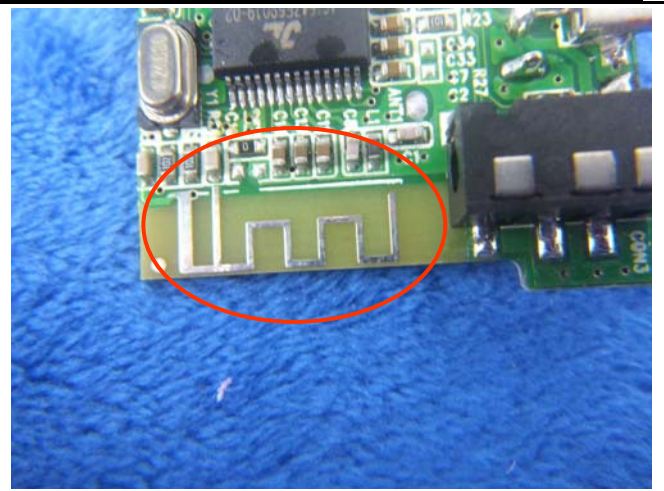

BT - Antenna View

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below
 1GHz

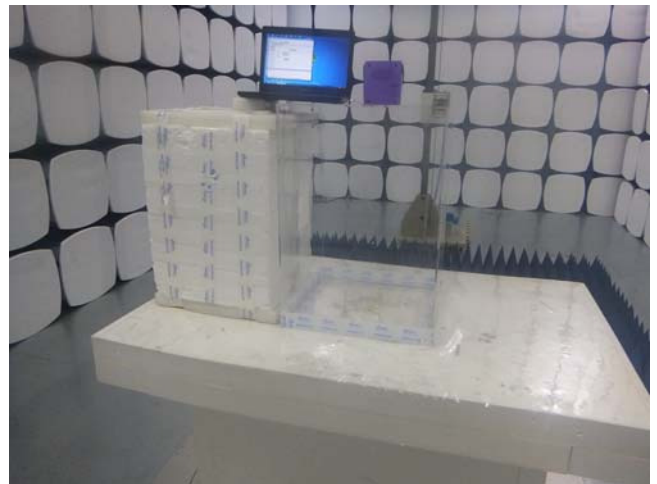


Radiated Spurious Emissions Test Setup Above
 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for Conducted Emissions

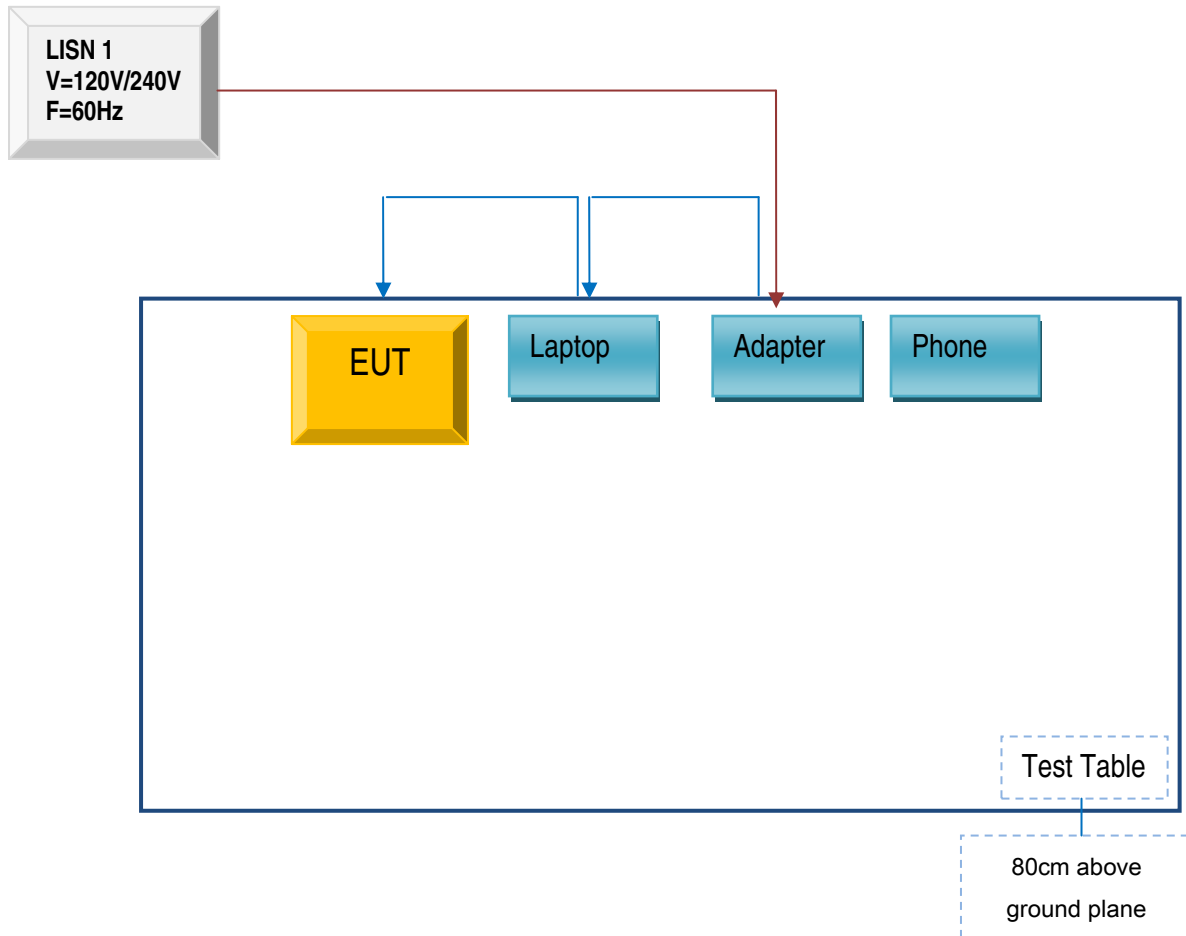

Block Configuration Diagram for Radiated Emission (Below 1GHz) .

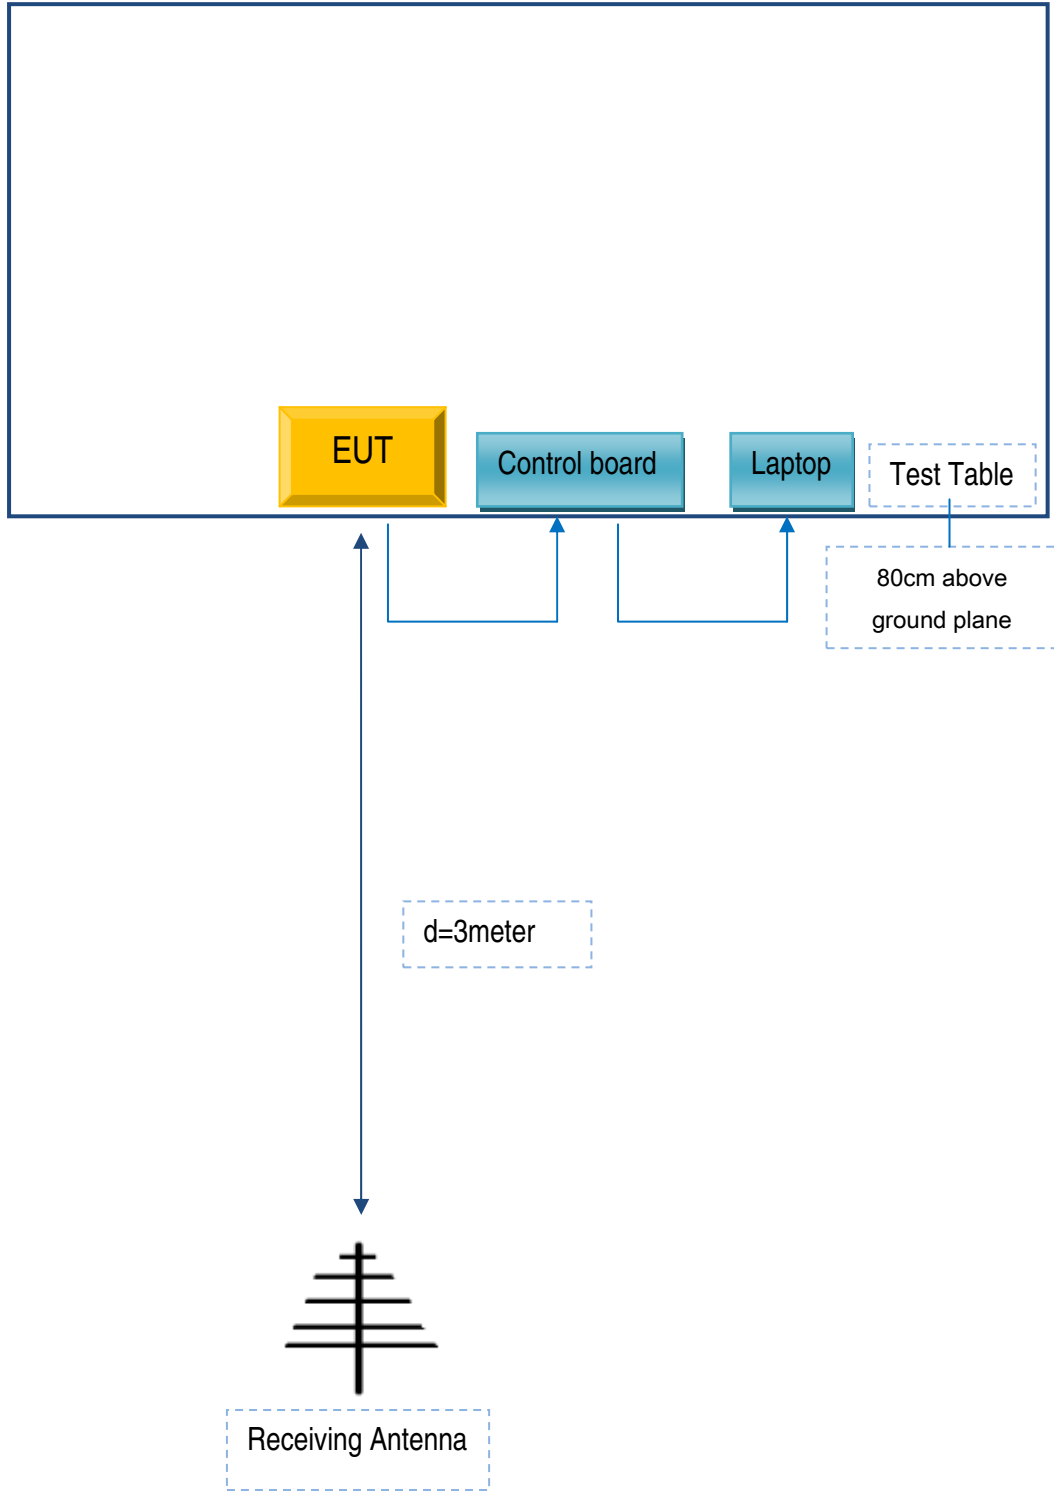

Block Configuration Diagram for Radiated Emission (Above 1GHz) .

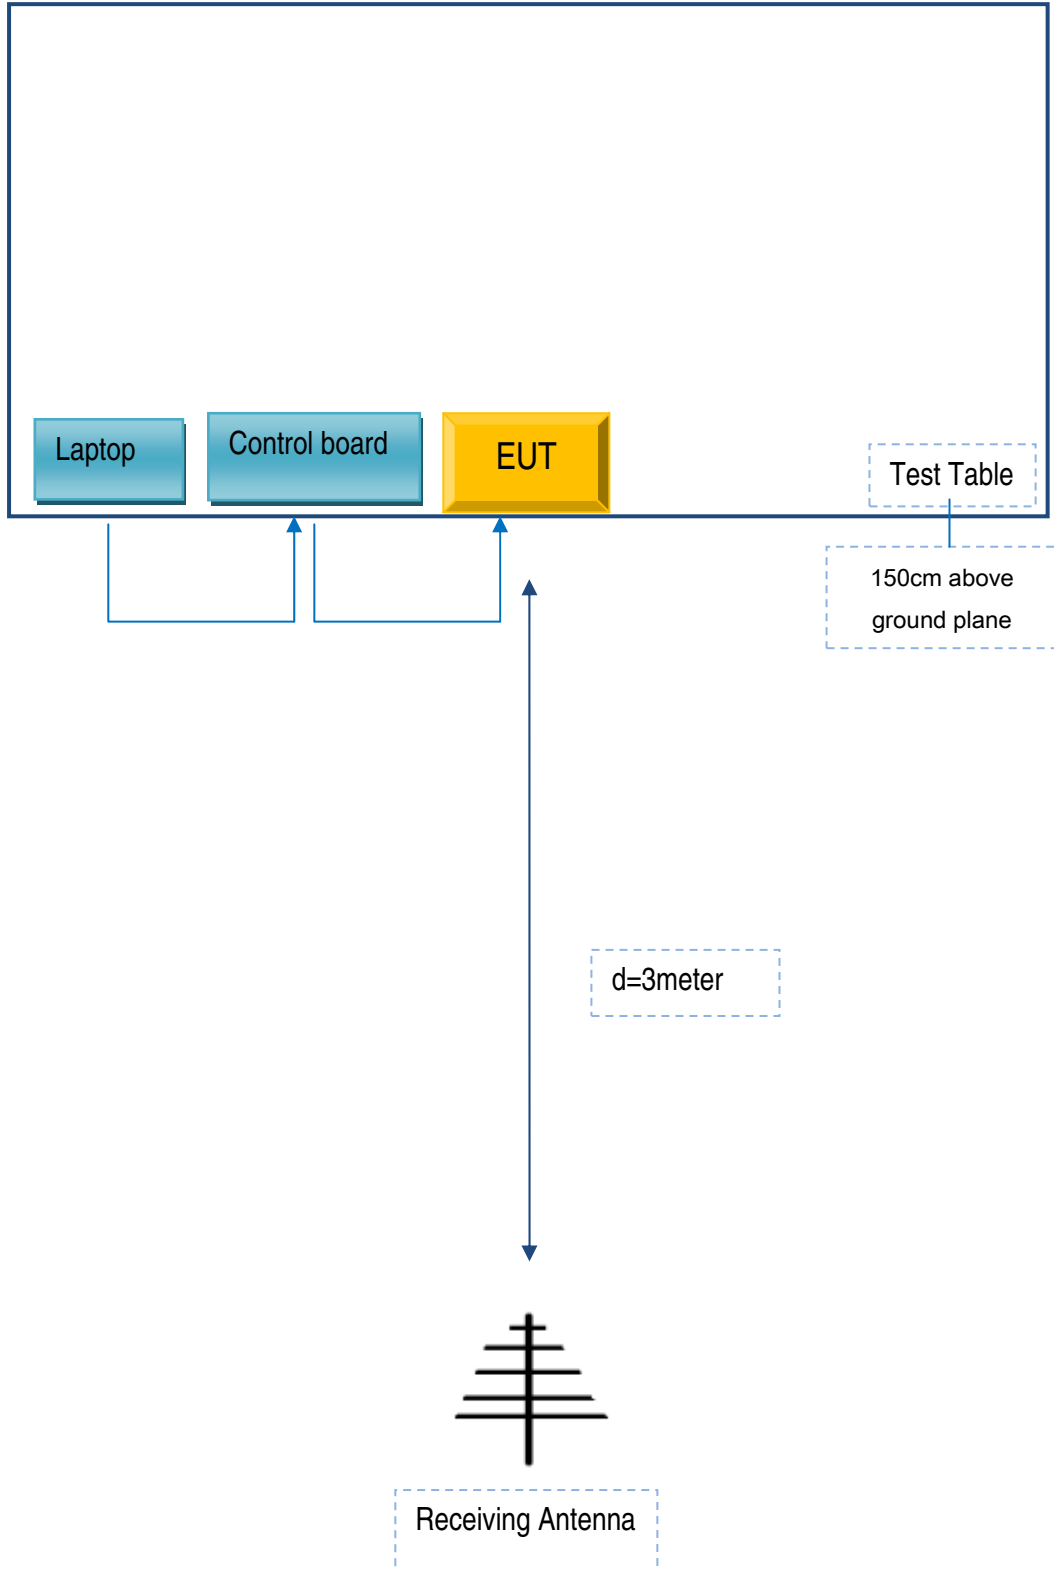

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Lenovo Laptop	E40	LR-1EHRX
Lenovo	Mobile phone	X1	XT2001

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	ST22100

Test Report	16070349-FCC-R
Page	49 of 50

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Test Report	16070349-FCC-R
Page	50 of 50

Annex E. DECLARATION OF SIMILARITY

N/A