

FCC SAR Test Report

APPLICANT : TCL Communication Ltd
EQUIPMENT : GSM Quad-band / UMTS Quad-band /
LTE hepta-band mobile phone
BRAND NAME : alcatel
MODEL NAME : 6055A
MARKETING NAME : IDOL 4
FCC ID : 2ACCJA018
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.
1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Standard 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 Accessories and Support Equipment 7
4.3 General LTE SAR Test and Reporting Considerations 8
5. RF Exposure Limits 10
5.1 Uncontrolled Environment 10
5.2 Controlled Environment 10
6. Specific Absorption Rate (SAR) 11
6.1 Introduction 11
6.2 SAR Definition 11
7. System Description and Setup 12
7.1 E-Field Probe 13
7.2 Data Acquisition Electronics (DAE) 13
7.3 Phantom 14
7.4 Device Holder 15
8. Measurement Procedures 16
8.1 Spatial Peak SAR Evaluation 16
8.2 Power Reference Measurement 17
8.3 Area Scan 17
8.4 Zoom Scan 18
8.5 Volume Scan Procedures 18
8.6 Power Drift Monitoring 18
9. Test Equipment List 19
10. System Verification 21
10.1 Tissue Verification 21
10.2 System Performance Check Results 23
11. RF Exposure Positions 25
11.1 Ear and handset reference point 25
11.2 Definition of the cheek position 26
11.3 Definition of the tilt position 27
11.4 Body Worn Accessory 28
11.5 Wireless Router 28
12. Conducted RF Output Power (Unit: dBm) 29
13. Bluetooth Exclusions Applied 64
14. Antenna Location 65
15. SAR Test Results 66
15.1 Head SAR 68
15.2 Hotspot SAR 73
15.3 Body Worn Accessory SAR 78
15.4 Repeated SAR Measurement 81
16. Spot Check SAR Test Results 82
16.1 Head SAR 82
16.2 Body-Worn SAR 82
17. Simultaneous Transmission Analysis 83
17.1 Head Exposure Conditions 84
17.2 Hotspot Exposure Conditions 86
17.3 Body-Worn Accessory Exposure Conditions 88
17.4 Spot Check Head Exposure Conditions 90
17.5 Spot Check Body-Worn Accessory Exposure Conditions 90
17.6 SPLSR Evaluation and Analysis 91
18. Uncertainty Assessment 92
19. References 95
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos
Appendix E. Product Equality Declaration

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **TCL Communication Ltd, GSM Quad-band / UMTS Quad-band / LTE hepta-band mobile phone, 6055A**, are as follows.

| Equipment Class | Frequency Band | | Highest 1g SAR Summary | | | Highest Simultaneous Transmission 1g SAR (W/kg) |
|------------------|----------------|-------------|------------------------|-----------------------------|---------------------------|---|
| | | | Head (Separation 0mm) | Body-worn (Separation 15mm) | Hotspot (Separation 10mm) | |
| | | | 1g SAR (W/kg) | | | |
| Licensed | GSM | GSM850 | 0.36 | 0.60 | 0.89 | 1.59 |
| | | GSM1900 | 0.26 | 0.63 | 1.07 | |
| | WCDMA | WCDMA V | 0.30 | 0.45 | 0.70 | |
| | | WCDMA IV | 0.41 | 0.66 | 1.11 | |
| | | WCDMA II | 0.40 | 0.78 | 0.65 | |
| | LTE | LTE Band 12 | 0.13 | 0.25 | 0.33 | |
| | | LTE Band 5 | 0.27 | 0.43 | 0.59 | |
| | | LTE Band 4 | 0.47 | 0.64 | 0.94 | |
| | | LTE Band 2 | 0.46 | 0.70 | 0.58 | |
| | | LTE Band 7 | 0.18 | 0.34 | 1.02 | |
| DTS | WLAN | 2.4GHz WLAN | 1.18 | 0.15 | 0.50 | 1.59 |
| NII | | 5GHz WLAN | 0.29 | 0.10 | 0.35 | 1.24 |
| DSS | 2.4GHz Band | Bluetooth | | | | 0.84 |
| Date of Testing: | | | 2016/04/26 ~ 2016/7/27 | | | |

Note:

1. The SAR value list above are all rounded to two decimal digits.
2. a. According to section 17.1, the maximum simultaneous SAR for WWAN+DTS is 1.65 W/kg
 b. Per KDB 447498 D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. For all configurations SPLSR is ≤ 0.04 and qualify for 1-g SAR test exclusion.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

| Testing Laboratory | |
|--------------------|---|
| Test Site | SPORTON INTERNATIONAL (SHENZHEN) INC. |
| Test Site Location | 1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 |

| Applicant | |
|--------------|--|
| Company Name | TCL Communication Ltd. |
| Address | 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203 |

| Manufacturer | |
|--------------|--|
| Company Name | TCL Communication Ltd. |
| Address | 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203 |

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

| Product Feature & Specification | |
|--|--|
| Equipment Name | GSM Quad-band / UMTS Quad-band / LTE hepta-band mobile phone |
| Brand Name | alcatel |
| Model Name | 6055A |
| Marketing Name | IDOL 4 |
| FCC ID | 2ACCJA018 |
| IMEI Code | 014658000003987 for 6055U 014727000002073 for 6055A |
| Wireless Technology and Frequency Range | GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz |
| Mode | <ul style="list-style-type: none"> · GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · HSPA+ (16QAM uplink is not supported) · LTE: QPSK, 16QAM · 802.11b/g/n HT20/HT40 · 802.11a/n HT20/HT40 · 802.11ac VHT20/VHT40/VHT80 · Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth 4.2 LE · NFC:ASK |
| HW Version | PIO |
| SW Version | 4D26 |
| GSM / (E)GPRS Transfer mode | Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network. |
| EUT Stage | Identical Prototype |
| Remark: <ol style="list-style-type: none"> 1. This device 2.4GHz WLAN /5.2GHz WLAN/5.8GHz WLAN support Hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 2. This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP). 3. This device does not support DTM operation. 4. This device supports GPRS/EGPRS mode up to multi-slot class 12. 5. The device has two receives function, the detail position please see the section 14, according to the EUT's character and software control, only top receiver can work. 6. When hotspot mode is enabled, power reduction will be activated and limited to GSM1900/WCDMA Band II/IV/LTE Band 2/4/7. | |

4.2 Accessories and Support Equipment

| Specification of Accessory for 6055U | | | |
|--------------------------------------|------------------|---|-------------------------|
| AC Adapter | Brand Name | alcatel | Model Name UC13US |
| | Power Rating | I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA | |
| | P/N | CBA0059AG8C1 | |
| Battery 1 | Brand Name | ALCATEL onetouch | Model Name TLp026EJ |
| | Power Rating | 3.85Vdc, 2610mAh | |
| Battery 2 | Brand Name | ALCATEL onetouch | Model Name TLp026E2 |
| | Power Rating | 3.84Vdc, 2610mAh | |
| USB Cable | Brand Name | N/A | Model Name CDA0000049C2 |
| | Signal Line Type | 1.0m shielded without core | |

| Specification of Accessory for 6055A | | | |
|--------------------------------------|------------------|---|----------------------------------|
| AC Adapter 1 | Brand Name | alcatel | Model Name UC13US |
| | Power Rating | I/P: 100-240Vac, 500mA, O/P: 5.0Vdc, 2A | |
| | Manufacturer | Aohai | P/N CBA0059AGAC4 |
| AC Adapter 2 | Brand Name | alcatel | Model Name UC13US |
| | Power Rating | I/P: 100-240Vac, 500mA, O/P: 5.0Vdc, 2A | |
| | Manufacturer | TENPAO | P/N CBA0059AGAC2 CBA0059AG4C2 |
| Battery | Brand Name | ALCATEL onetouch | Model Name TLp026E2 |
| | Power Rating | 3.84Vdc, 2610mAh | |
| | Manufacturer | SCUD | P/N CAC2610002C2 |
| USB Cable 1 | Brand Name | N/A | Model Name CDA0000043C8 |
| | Signal Line Type | 1.01m shielded without core | |
| | Manufacturer | PUAN | P/N N/A |
| USB Cable 2 | Brand Name | N/A | Model Name CDA0000043C2 |
| | Signal Line Type | 1.00m shielded without core | |
| | Manufacturer | Shenghua | P/N N/A |



4.3 General LTE SAR Test and Reporting Considerations

| Summarized necessary items addressed in KDB 941225 D05 v02r05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|------------|---|--------|--------|--------|----------|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|
| FCC ID | 2ACCJA018 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Equipment Name | GSM Quad-band / UMTS Quad-band / LTE hepta-band mobile phone | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Frequency Range of each LTE transmission band | LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel Bandwidth | LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| uplink modulations used | QPSK, and 16QAM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Voice / Data requirements | Voice and Data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE MPR permanently built-in by design | <p style="text-align: center;">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> | Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |
| Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE A-MPR | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spectrum plots for RB configuration | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power reduction applied to satisfy SAR compliance | Yes, when operating in hotspot mode that GSM1900, WCDMA Band IV/II, LTE Band 2/4/7 power reduction applied to satisfy SAR compliance. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Release Version | R9, Cat 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Transmission (H, M, L) channel numbers and frequencies in each LTE band | | | | | | | | | | | | | | |
|---|-------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|--|--|
| LTE Band 2 | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 18607 | 1850.7 | 18615 | 1851.5 | 18625 | 1852.5 | 18650 | 1855 | 18675 | 1857.5 | 18700 | 1860 | | |
| M | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | | |
| H | 19193 | 1909.3 | 19185 | 1908.5 | 19175 | 1907.5 | 19150 | 1905 | 19125 | 1902.5 | 19100 | 1900 | | |
| LTE Band 4 | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 19957 | 1710.7 | 19965 | 1711.5 | 19975 | 1712.5 | 20000 | 1715 | 20025 | 1717.5 | 20050 | 1720 | | |
| M | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | | |
| H | 20393 | 1754.3 | 20385 | 1753.5 | 20375 | 1752.5 | 20350 | 1750 | 20325 | 1747.5 | 20300 | 1745 | | |
| LTE Band 5 | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 20407 | 824.7 | 20415 | 825.5 | 20425 | 826.5 | 20450 | 829 | | | | | | |
| M | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | | |
| H | 20643 | 848.3 | 20635 | 847.5 | 20625 | 846.5 | 20600 | 844 | | | | | | |
| LTE Band 7 | | | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 20775 | 2502.5 | 20800 | 2505 | 20825 | 2507.5 | 20850 | 2510 | | | | | | |
| M | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | | |
| H | 21425 | 2567.5 | 21400 | 2565 | 21375 | 2562.5 | 21350 | 2560 | | | | | | |
| LTE Band 12 | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 23017 | 699.7 | 23025 | 700.5 | 23035 | 701.5 | 23060 | 704 | | | | | | |
| M | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | | |
| H | 23173 | 715.3 | 23165 | 714.5 | 23155 | 713.5 | 23130 | 711 | | | | | | |
| LTE Band 17 | | | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | | | Bandwidth 10 MHz | | | | | | | | | |
| | Channel # | | Freq.(MHz) | | Channel # | | Freq. (MHz) | | Channel # | | Freq. (MHz) | | | |
| L | 23755 | | 706.5 | | 23780 | | 709 | | | | | | | |
| M | 23790 | | 710 | | 23790 | | 710 | | | | | | | |
| H | 23825 | | 713.5 | | 23800 | | 711 | | | | | | | |



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

- 1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

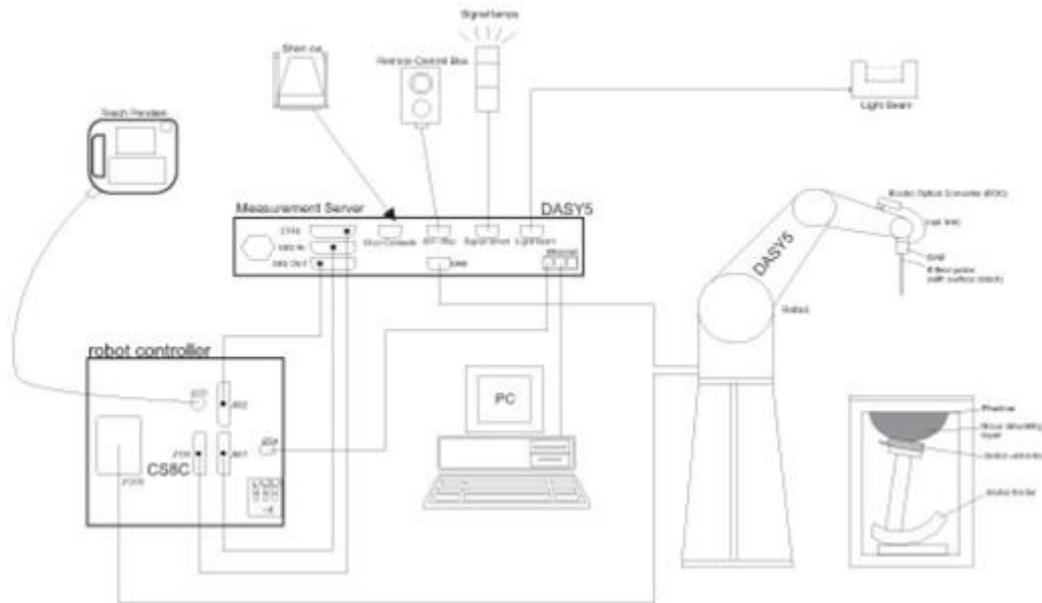

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

| | |
|----------------------|---|
| Construction | Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Frequency | 10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz) |
| Directivity | ±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis) |
| Dynamic Range | 10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g) |
| Dimensions | Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |



7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>


| | |
|--------------------------|---|
| Shell Thickness | 2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm |
| Filling Volume | Approx. 25 liters |
| Dimensions | Length: 1000 mm; Width: 500 mm; Height: adjustable feet |
| Measurement Areas | Left Hand, Right Hand, Flat Phantom |



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

| | |
|------------------------|--|
| Shell Thickness | 2 ± 0.2 mm (sagging: <1%) |
| Filling Volume | Approx. 30 liters |
| Dimensions | Major ellipse axis: 600 mm Minor axis: 400 mm |

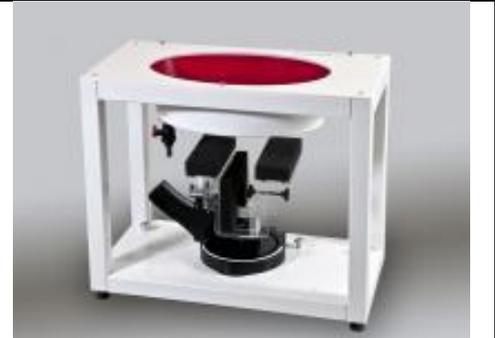

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

| | ≤ 3 GHz | > 3 GHz |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$ |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$ | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

| | | ≤ 3 GHz | > 3 GHz | |
|--|------------------------------------|--|---|--|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$ | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|--------------|---------------------------------|---------------|---------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | 750MHz System Validation Kit | D750V3 | 1099 | Nov. 24, 2015 | Nov. 23, 2016 |
| SPEAG | 835MHz System Validation Kit | D835V2 | 4d162 | Nov. 24, 2015 | Nov. 23, 2016 |
| SPEAG | 1750MHz System Validation Kit | D1750V2 | 1023 | Jun. 23, 2015 | Jun. 22, 2016 |
| SPEAG | 1900MHz System Validation Kit | D1900V2 | 5d182 | Nov. 23, 2015 | Nov. 22, 2016 |
| SPEAG | 2450MHz System Validation Kit | D2450V2 | 924 | Feb. 24, 2016 | Feb. 23, 2017 |
| SPEAG | 2600MHz System Validation Kit | D2600V2 | 1070 | Nov. 25, 2015 | Nov. 24, 2016 |
| SPEAG | 2600MHz System Validation Kit | D2600V2 | 1061 | Nov. 25, 2015 | Nov. 24, 2016 |
| SPEAG | 5000MHz System Validation Kit | D5GHzV2 | 1167 | Jul. 27, 2015 | Jul. 26, 2016 |
| SPEAG | Data Acquisition Electronics | DAE4 | 914 | Jan. 07, 2016 | Jan. 06, 2017 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1338 | Nov. 23, 2015 | Nov. 22, 2016 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1386 | Feb. 16, 2016 | Feb. 15, 2017 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1303 | Nov. 24, 2015 | Nov. 23, 2016 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1210 | May 18, 2016 | May 17, 2017 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1279 | Apr. 04, 2016 | Apr. 03, 2017 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3935 | Nov. 27, 2015 | Nov. 26, 2016 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3958 | Jul. 23, 2015 | Jul. 22, 2016 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3911 | Oct. 01, 2015 | Sep. 30, 2016 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3819 | Nov. 27, 2015 | Nov. 26, 2016 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3857 | May 25, 2016 | May 24, 2017 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3954 | Nov. 27, 2015 | Nov. 26, 2016 |
| SPEAG | SAM Twin Phantom | SAM V5.0 | 1795 | NCR | NCR |
| SPEAG | SAM Twin Phantom | QD 000 P40 CB | TP-1477 | NCR | NCR |
| SPEAG | SAM Twin Phantom | QD 000 P40 CB | TP-1542 | NCR | NCR |
| SPEAG | Phone Positioner | N/A | N/A | NCR | NCR |
| SPEAG | Phone Positioner | N/A | N/A | NCR | NCR |
| Anritsu | Radio communication analyzer | MT8820C | 6201300653 | Aug. 25, 2015 | Aug. 24, 2016 |
| Anritsu | Radio communication analyzer | MT8820C | 6201300654 | Aug. 10, 2015 | Aug. 09, 2016 |
| Agilent | Wireless Communication Test Set | E5515C | MY50267224 | Aug. 07, 2015 | Aug. 06, 2016 |
| Agilent | Wireless Communication Test Set | E5515C | MY52102706 | Apr. 22, 2016 | Apr. 21, 2017 |
| Agilent | Network Analyzer | E5071C | MY46523671 | Dec. 31, 2015 | Dec. 30, 2016 |
| Agilent | ENA Series Network Analyzer | E5071C | MY46111157 | Apr. 22, 2016 | Apr. 21, 2017 |
| SPEAG | Dielectric Assessment KIT | DAK-3.5 | 1071 | Nov. 24, 2015 | Nov. 23, 2016 |
| SPEAG | Dielectric Assessment KIT | DAK3.5 | 1144 | Nov. 24, 2015 | Nov. 23, 2016 |
| Agilent | Signal Generator | N5181A | MY50145381 | Jan. 12, 2016 | Jan. 11, 2017 |
| Anritsu | Power Sensor | MA2411B | 1306099 | Jan. 12, 2016 | Jan. 11, 2017 |
| Anritsu | Power Sensor | MA2411B | 0917070 | Jan. 20, 2016 | Jan. 19, 2017 |
| Anritsu | Power Meter | ML2495A | 1349001 | Jan. 12, 2016 | Jan. 11, 2017 |
| Anritsu | Power Meter | ML2495A | 1005002 | Jan. 20, 2016 | Jan. 19, 2017 |
| Anritsu | Power Sensor | MA2411B | 1207253 | Jan. 12, 2016 | Jan. 11, 2017 |



| | | | | | |
|---------------|--------------------------|------------|-----------|---------------|---------------|
| Anritsu | Power Sensor | MA2411B | 1339163 | Jan. 20, 2016 | Jan. 19, 2017 |
| Anritsu | Power Meter | ML2495A | 1218010 | Jan. 12, 2016 | Jan. 11, 2017 |
| Anritsu | Power Meter | ML2495A | 1435004 | Jan. 20, 2016 | Jan. 19, 2017 |
| R&S | CBT BLUETOOTH TESTER | CBT | 100963 | Jan. 12, 2016 | Jan. 11, 2017 |
| R&S | Spectrum Analyzer | FSP7 | 101634 | Aug. 07, 2015 | Aug. 06, 2016 |
| R&S | Signal Generator | SMBV100A | 258305 | Jan. 20, 2016 | Jan. 19, 2017 |
| R&S | CBT BLUETOOTH TESTER | CBT | 100783 | Aug. 10, 2015 | Aug. 09, 2016 |
| R&S | Spectrum Analyzer | FSV7 | 101631 | Aug. 10, 2015 | Aug. 09, 2016 |
| ARRA | Power Divider | A3200-2 | N/A | Note1 | |
| PASTERNAK | Dual Directional Coupler | PE2214-10 | N/A | Note1 | |
| Agilent | Dual Directional Coupler | 778D | 50422 | Note1 | |
| MCL | Attenuation1 | BW-S10W5 | N/A | Note1 | |
| Weinschel | Attenuation2 | 3M-20 | N/A | Note1 | |
| Zhongjilianhe | Attenuation3 | MVE2214-03 | N/A | Note1 | |
| MCL | Attenuation1 | BW-S10W5+ | N/A | Note1 | |
| MCL | Attenuation2 | BW-S10W5+ | N/A | Note1 | |
| MCL | Attenuation3 | BW-S10W5+ | N/A | Note1 | |
| AR | Amplifier | 5S1G4 | 333096 | Note1 | |
| mini-circuits | Amplifier | ZVE-3W-83+ | 162601250 | Note1 | |

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity (σ) | Permittivity (εr) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|------------------|-------------------|
| For Head | | | | | | | | |
| 750 | 41.1 | 57.0 | 0.2 | 1.4 | 0.2 | 0 | 0.89 | 41.9 |
| 835 | 40.3 | 57.9 | 0.2 | 1.4 | 0.2 | 0 | 0.90 | 41.5 |
| 1800, 1900, 2000 | 55.2 | 0 | 0 | 0.3 | 0 | 44.5 | 1.40 | 40.0 |
| 2450 | 55.0 | 0 | 0 | 0 | 0 | 45.0 | 1.80 | 39.2 |
| 2600 | 54.8 | 0 | 0 | 0.1 | 0 | 45.1 | 1.96 | 39.0 |
| For Body | | | | | | | | |
| 750 | 51.7 | 47.2 | 0 | 0.9 | 0.1 | 0 | 0.96 | 55.5 |
| 835 | 50.8 | 48.2 | 0 | 0.9 | 0.1 | 0 | 0.97 | 55.2 |
| 1800, 1900, 2000 | 70.2 | 0 | 0 | 0.4 | 0 | 29.4 | 1.52 | 53.3 |
| 2450 | 68.6 | 0 | 0 | 0 | 0 | 31.4 | 1.95 | 52.7 |
| 2600 | 68.1 | 0 | 0 | 0.1 | 0 | 31.8 | 2.16 | 52.5 |

Simulating Liquid for 5GHz, Manufactured by SPEAG

| Ingredients | (% by weight) |
|--------------------|---------------|
| Water | 64~78% |
| Mineral oil | 11~18% |
| Emulsifiers | 9~15% |
| Additives and Salt | 2~3% |



<Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (ε _r) | Conductivity Target (σ) | Permittivity Target (ε _r) | Delta (σ) (%) | Delta (ε _r) (%) | Limit (%) | Date |
|-----------------|-------------|-------------------|------------------|--------------------------------|-------------------------|---------------------------------------|---------------|-----------------------------|-----------|-----------|
| 750 | Head | 22.8 | 0.886 | 41.534 | 0.89 | 41.90 | -0.45 | -0.87 | ±5 | 2016/4/27 |
| 835 | Head | 22.7 | 0.915 | 41.529 | 0.90 | 41.50 | 1.67 | 0.07 | ±5 | 2016/4/27 |
| 1750 | Head | 22.5 | 1.382 | 39.895 | 1.37 | 40.10 | 0.88 | -0.51 | ±5 | 2016/4/26 |
| 1900 | Head | 22.6 | 1.417 | 40.994 | 1.40 | 40.00 | 1.21 | 2.49 | ±5 | 2016/4/27 |
| 1900 | Head | 22.7 | 1.422 | 40.315 | 1.40 | 40.00 | 1.57 | 0.79 | ±5 | 2016/5/28 |
| 2450 | Head | 22.6 | 1.825 | 39.664 | 1.80 | 39.20 | 1.39 | 1.18 | ±5 | 2016/5/10 |
| 2600 | Head | 22.8 | 2.054 | 38.328 | 1.96 | 39.00 | 4.80 | -1.72 | ±5 | 2016/4/28 |
| 5250 | Head | 22.6 | 4.626 | 37.038 | 4.71 | 35.95 | -1.78 | 3.03 | ±5 | 2016/5/13 |
| 5600 | Head | 22.5 | 5.034 | 36.508 | 5.07 | 35.50 | -0.71 | 2.84 | ±5 | 2016/5/13 |
| 5750 | Head | 22.6 | 5.203 | 36.253 | 5.22 | 35.35 | -0.33 | 2.55 | ±5 | 2016/5/13 |
| 750 | Body | 22.6 | 0.975 | 55.039 | 0.96 | 55.50 | 1.56 | -0.83 | ±5 | 2016/4/28 |
| 835 | Body | 22.7 | 0.977 | 54.442 | 0.97 | 55.20 | 0.72 | -1.37 | ±5 | 2016/4/28 |
| 1750 | Body | 22.5 | 1.510 | 55.728 | 1.49 | 53.40 | 1.34 | 4.36 | ±5 | 2016/4/26 |
| 1900 | Body | 22.9 | 1.548 | 54.595 | 1.52 | 53.30 | 1.84 | 2.43 | ±5 | 2016/4/29 |
| 2600 | Body | 22.6 | 2.165 | 53.823 | 2.16 | 52.50 | 0.23 | 2.52 | ±5 | 2016/4/29 |
| 750 | Body | 22.6 | 0.963 | 54.233 | 0.96 | 55.50 | 0.31 | -2.28 | ±5 | 2016/5/10 |
| 835 | Body | 22.8 | 0.970 | 54.379 | 0.97 | 55.20 | 0.00 | -1.49 | ±5 | 2016/5/10 |
| 1750 | Body | 22.8 | 1.526 | 52.010 | 1.49 | 53.40 | 2.42 | -2.60 | ±5 | 2016/5/11 |
| 1900 | Body | 22.6 | 1.576 | 54.215 | 1.52 | 53.30 | 3.68 | 1.72 | ±5 | 2016/5/11 |
| 1900 | Body | 22.6 | 1.576 | 54.212 | 1.52 | 53.30 | 3.68 | 1.71 | ±5 | 2016/5/28 |
| 2450 | Body | 22.7 | 1.992 | 52.319 | 1.95 | 52.70 | 2.15 | -0.72 | ±5 | 2016/5/11 |
| 2600 | Body | 22.5 | 2.201 | 52.823 | 2.16 | 52.50 | 1.90 | 0.62 | ±5 | 2016/5/12 |
| 5250 | Body | 22.8 | 5.290 | 50.923 | 5.36 | 48.95 | -1.31 | 4.03 | ±5 | 2016/5/13 |
| 5600 | Body | 22.7 | 5.884 | 50.283 | 5.77 | 48.50 | 1.98 | 3.68 | ±5 | 2016/5/13 |
| 5750 | Body | 22.9 | 6.113 | 49.934 | 5.94 | 48.28 | 2.91 | 3.43 | ±5 | 2016/5/13 |

<Spot Check Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (ε _r) | Conductivity Target (σ) | Permittivity Target (ε _r) | Delta (σ) (%) | Delta (ε _r) (%) | Limit (%) | Date |
|-----------------|-------------|-------------------|------------------|--------------------------------|-------------------------|---------------------------------------|---------------|-----------------------------|-----------|-----------|
| 2600 | Head | 22.7 | 2.016 | 37.767 | 1.96 | 39.00 | 2.86 | -3.16 | ±5 | 2016/7/25 |
| 2600 | Body | 22.8 | 2.165 | 53.823 | 2.16 | 52.50 | 0.23 | 2.52 | ±5 | 2016/7/27 |



10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<System Verification 1g SAR Results>

| Date | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|-------------|------------------|------------|-----------|---------|------------------------|------------------------|--------------------------|---------------|
| 2016/4/27 | 750 | Head | 250 | 1099 | 3935 | 1338 | 1.93 | 8.17 | 7.72 | -5.51 |
| 2016/4/27 | 835 | Head | 250 | 4d162 | 3935 | 1338 | 2.41 | 9.14 | 9.64 | 5.47 |
| 2016/4/26 | 1750 | Head | 250 | 1023 | 3935 | 1338 | 8.56 | 37.20 | 34.24 | -7.96 |
| 2016/4/27 | 1900 | Head | 250 | 5d182 | 3935 | 1338 | 9.63 | 39.60 | 38.52 | -2.73 |
| 2016/5/28 | 1900 | Head | 250 | 5d182 | 3911 | 914 | 10.50 | 39.60 | 42 | 6.06 |
| 2016/5/10 | 2450 | Head | 250 | 924 | 3958 | 1386 | 13.20 | 52.50 | 52.8 | 0.57 |
| 2016/4/28 | 2600 | Head | 250 | 1070 | 3935 | 1338 | 15.40 | 58.10 | 61.6 | 6.02 |
| 2016/5/13 | 5250 | Head | 100 | 1167 | 3935 | 1386 | 7.66 | 80.50 | 76.6 | -4.84 |
| 2016/5/13 | 5600 | Head | 100 | 1167 | 3935 | 1386 | 8.01 | 82.30 | 80.1 | -2.67 |
| 2016/5/13 | 5750 | Head | 100 | 1167 | 3935 | 1386 | 7.30 | 78.70 | 73 | -7.24 |
| 2016/4/28 | 750 | Body | 250 | 1099 | 3935 | 1338 | 2.10 | 8.82 | 8.4 | -4.76 |
| 2016/4/28 | 835 | Body | 250 | 4d162 | 3935 | 1338 | 2.42 | 9.51 | 9.68 | 1.79 |
| 2016/4/26 | 1750 | Body | 250 | 1023 | 3935 | 1338 | 8.73 | 37.60 | 34.92 | -7.13 |
| 2016/4/29 | 1900 | Body | 250 | 5d182 | 3935 | 1338 | 9.98 | 40.60 | 39.92 | -1.67 |
| 2016/4/29 | 2600 | Body | 250 | 1070 | 3935 | 1338 | 13.90 | 54.20 | 55.6 | 2.58 |
| 2016/5/10 | 750 | Body | 250 | 1099 | 3958 | 1386 | 2.28 | 8.82 | 9.12 | 3.40 |
| 2016/5/10 | 835 | Body | 250 | 4d162 | 3958 | 1386 | 2.50 | 9.51 | 10 | 5.15 |
| 2016/5/11 | 1750 | Body | 250 | 1023 | 3911 | 1386 | 9.16 | 37.60 | 36.64 | -2.55 |
| 2016/5/11 | 1900 | Body | 250 | 5d182 | 3911 | 1386 | 10.20 | 40.60 | 40.8 | 0.49 |
| 2016/5/28 | 1900 | Body | 250 | 5d182 | 3911 | 914 | 10.90 | 40.60 | 43.6 | 7.39 |
| 2016/5/11 | 2450 | Body | 250 | 924 | 3911 | 1386 | 12.70 | 51.40 | 50.8 | -1.17 |
| 2016/5/12 | 2600 | Body | 250 | 1070 | 3819 | 1303 | 14.20 | 54.20 | 56.8 | 4.80 |
| 2016/5/13 | 5250 | Body | 100 | 1167 | 3819 | 1303 | 7.80 | 76.00 | 78 | 2.63 |
| 2016/5/13 | 5600 | Body | 100 | 1167 | 3819 | 1303 | 7.92 | 80.60 | 79.2 | -1.74 |
| 2016/5/13 | 5750 | Body | 100 | 1167 | 3819 | 1303 | 7.27 | 75.60 | 72.7 | -3.84 |

<Spot Check System Verification 1g SAR Results>

| Date | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured SAR (W/kg) | Targeted SAR (W/kg) | Normalized SAR (W/kg) | Deviation (%) |
|-----------|-----------------|-------------|------------------|------------|-----------|---------|---------------------|---------------------|-----------------------|---------------|
| 2016/7/25 | 2600 | Head | 250 | 1061 | 3857 | 1210 | 14.50 | 58.1 | 58 | -0.17 |
| 2016/7/27 | 2600 | Body | 250 | 1061 | 3954 | 1279 | 12.60 | 54.6 | 50.4 | -7.69 |

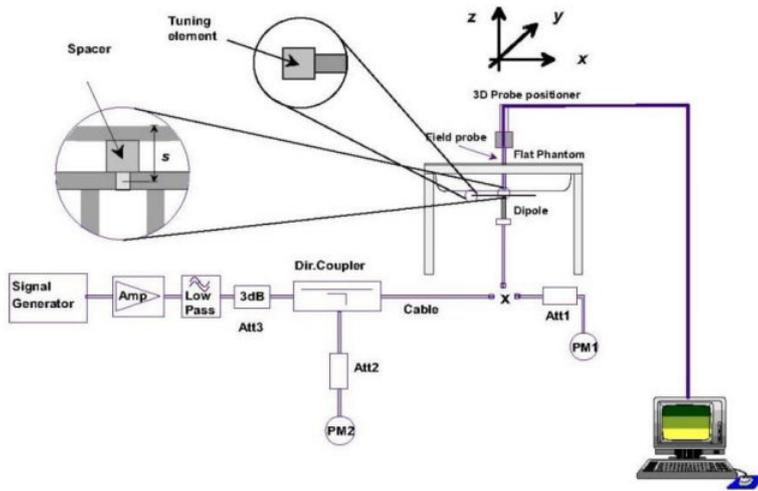


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

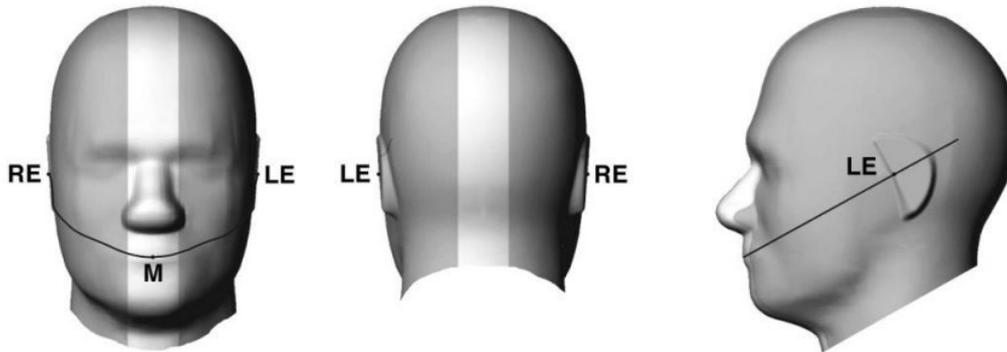


Fig 9.1.1 Front, back, and side views of SAM twin phantom

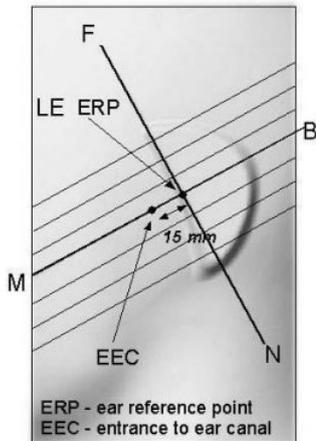


Fig 9.1.2 Close-up side view of phantom showing the ear region.

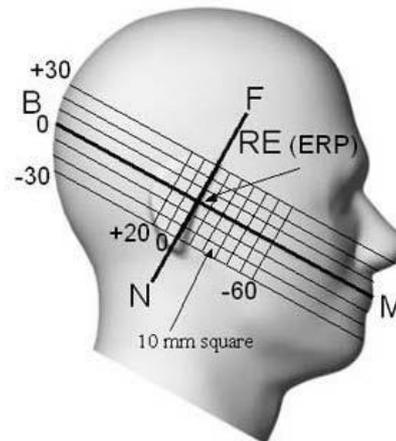


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

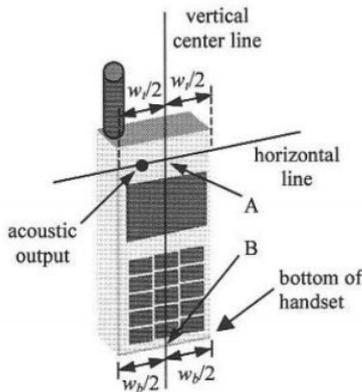


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

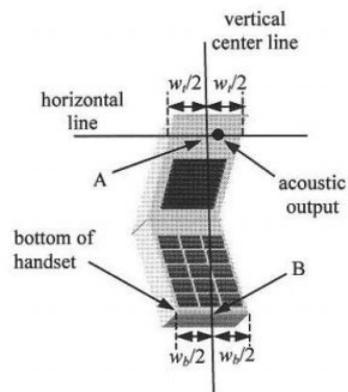


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

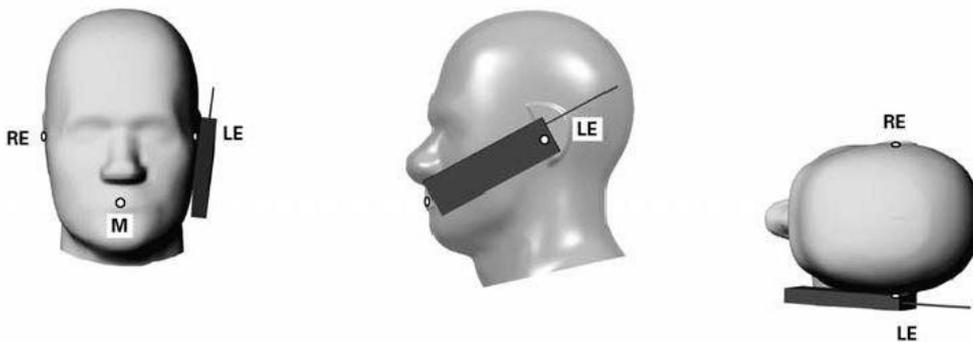


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

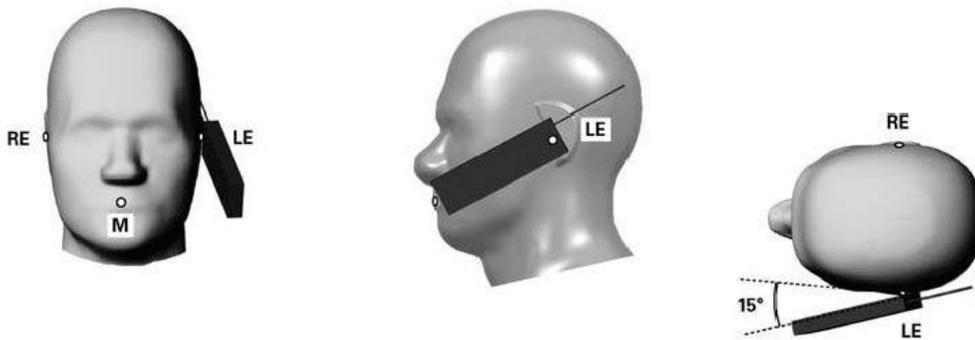


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

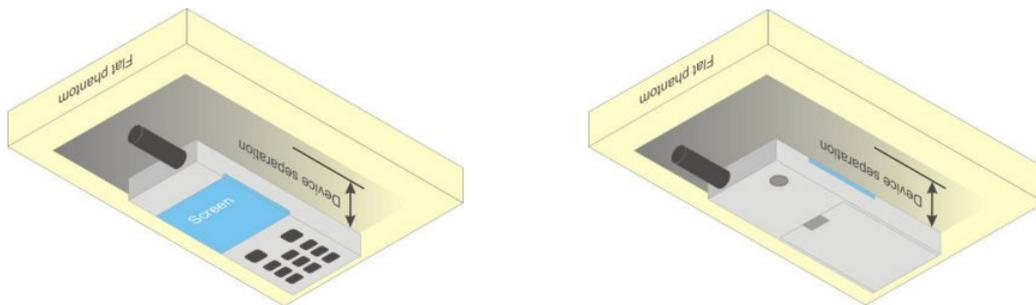


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850 and the GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 2 Tx slot for GSM1900 due to its highest frame-average power.

<Full Power Mode>:

| GSM850 TX Channel | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|----------------------|---------------------------|--------------|-------|---------------------------|---------------------------|--------------|-------|---------------------------|
| | 128 | 189 | 251 | | 128 | 189 | 251 | |
| Frequency (MHz) | 824.2 | 836.4 | 848.8 | | 824.2 | 836.4 | 848.8 | |
| GSM 1 Tx slot | 32.52 | 32.56 | 32.50 | 33.00 | 23.52 | 23.56 | 23.50 | 24.00 |
| GPRS 1 Tx slot | 32.51 | 32.54 | 32.49 | 33.00 | 23.51 | 23.54 | 23.49 | 24.00 |
| GPRS 2 Tx slots | 31.14 | 31.23 | 30.92 | 31.50 | 25.14 | 25.23 | 24.92 | 25.50 |
| GPRS 3 Tx slots | 29.36 | 29.50 | 29.24 | 30.00 | 25.10 | 25.24 | 24.98 | 25.74 |
| GPRS 4 Tx slots | 27.90 | 28.05 | 28.01 | 28.50 | 24.90 | 25.05 | 25.01 | 25.50 |
| EDGE 1 Tx slot | 26.63 | 26.61 | 26.69 | 27.50 | 17.63 | 17.61 | 17.69 | 18.50 |
| EDGE 2 Tx slots | 25.54 | 25.54 | 25.60 | 26.50 | 19.54 | 19.54 | 19.60 | 20.50 |
| EDGE 3 Tx slots | 23.72 | 23.73 | 23.84 | 24.50 | 19.46 | 19.47 | 19.58 | 20.24 |
| EDGE 4 Tx slots | 22.06 | 22.10 | 22.22 | 23.50 | 19.06 | 19.10 | 19.22 | 20.50 |

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

| GSM1900 TX Channel | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|-----------------------|---------------------------|-------|--------------|---------------------------|---------------------------|-------|--------------|---------------------------|
| | 512 | 661 | 810 | | 512 | 661 | 810 | |
| Frequency (MHz) | 1850.2 | 1880 | 1909.8 | | 1850.2 | 1880 | 1909.8 | |
| GSM 1 Tx slot | 30.12 | 30.17 | 30.18 | 30.50 | 21.12 | 21.17 | 21.18 | 21.50 |
| GPRS 1 Tx slot | 30.10 | 30.14 | 30.15 | 30.50 | 21.10 | 21.14 | 21.15 | 21.50 |
| GPRS 2 Tx slots | 28.42 | 28.46 | 28.52 | 29.00 | 22.42 | 22.46 | 22.52 | 23.00 |
| GPRS 3 Tx slots | 26.86 | 26.75 | 26.75 | 27.00 | 22.60 | 22.49 | 22.49 | 22.74 |
| GPRS 4 Tx slots | 25.55 | 25.70 | 25.71 | 26.00 | 22.55 | 22.70 | 22.71 | 23.00 |
| EDGE 1 Tx slot | 25.72 | 25.77 | 25.80 | 26.50 | 16.72 | 16.77 | 16.80 | 17.50 |
| EDGE 2 Tx slots | 24.64 | 24.69 | 24.72 | 25.50 | 18.64 | 18.69 | 18.72 | 19.50 |
| EDGE 3 Tx slots | 23.05 | 23.05 | 23.05 | 24.00 | 18.79 | 18.79 | 18.79 | 19.74 |
| EDGE 4 Tx slots | 21.41 | 21.43 | 21.45 | 23.00 | 18.41 | 18.43 | 18.45 | 20.00 |

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



<Hotspot reduced Power Mode>:

| GSM1900 TX Channel | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|-----------------------|---------------------------|-------|--------|---------------------------|---------------------------|-------|--------|---------------------------|
| | 512 | 661 | 810 | | 512 | 661 | 810 | |
| Frequency (MHz) | 1850.2 | 1880 | 1909.8 | | 1850.2 | 1880 | 1909.8 | |
| GSM 1 Tx slot | 27.08 | 27.05 | 27.09 | 28.00 | 18.08 | 18.05 | 18.09 | 19.00 |
| GPRS 1 Tx slot | 27.07 | 27.04 | 27.08 | 28.00 | 18.07 | 18.04 | 18.08 | 19.00 |
| GPRS 2 Tx slots | 24.92 | 24.91 | 24.93 | 25.50 | 18.92 | 18.91 | 18.93 | 19.50 |
| GPRS 3 Tx slots | 22.76 | 22.79 | 22.81 | 23.50 | 18.50 | 18.53 | 18.55 | 19.24 |
| GPRS 4 Tx slots | 20.55 | 20.66 | 20.68 | 22.00 | 17.55 | 17.66 | 17.68 | 19.00 |
| EDGE 1 Tx slot | 25.32 | 25.34 | 25.31 | 26.50 | 16.32 | 16.34 | 16.31 | 17.50 |
| EDGE 2 Tx slots | 23.20 | 23.22 | 23.21 | 24.00 | 17.20 | 17.22 | 17.21 | 18.00 |
| EDGE 3 Tx slots | 21.05 | 21.11 | 21.10 | 22.00 | 16.79 | 16.85 | 16.84 | 17.74 |
| EDGE 4 Tx slots | 18.94 | 19.00 | 18.99 | 20.00 | 15.94 | 16.00 | 15.99 | 17.00 |

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1, Note 2) | CM (dB) (Note 3) | MPR (dB) (Note 3) |
|----------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 (Note 4) | 15/15 (Note 4) | 64 | 12/15 (Note 4) | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1) | β_{ec} | β_{ed} (Note 5) (Note 6) | β_{ed} (SF) | β_{ed} (Codes) | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 6) | E-TFCl |
|----------|----------------|----------------|----------------|-------------------|-----------------------|--------------|--|-------------------|----------------------|------------------|-------------------|-------------------|--------|
| 1 | 11/15 (Note 3) | 15/15 (Note 3) | 64 | 11/15 (Note 3) | 22/15 | 209/25 | 1309/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$ | 4 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 (Note 4) | 15/15 (Note 4) | 64 | 15/15 (Note 4) | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

<Full Power Mode>:

| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|-----------------|----------|--------------|--------|---------------------|----------|--------|--------------|---------------------|---------|-------|--------------|---------------------|
| TX Channel | | 9262 | 9400 | 9538 | | 1312 | 1413 | 1513 | | 4132 | 4182 | 4233 | |
| Rx Channel | | 9662 | 9800 | 9938 | | 1537 | 1638 | 1738 | | 4357 | 4407 | 4458 | |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 | | 1712.4 | 1732.6 | 1752.6 | | 826.4 | 836.4 | 846.6 | |
| 3GPP Rel 99 | AMR 12.2Kbps | 23.20 | 23.23 | 23.20 | 24.00 | 23.44 | 23.45 | 23.51 | 24.00 | 23.40 | 23.44 | 23.45 | 24.00 |
| 3GPP Rel 99 | RMC 12.2Kbps | 23.22 | 23.25 | 23.23 | 24.00 | 23.45 | 23.46 | 23.53 | 24.00 | 23.42 | 23.47 | 23.48 | 24.00 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 21.20 | 21.38 | 21.28 | 22.00 | 21.39 | 21.38 | 21.47 | 22.00 | 21.38 | 21.36 | 21.40 | 22.00 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 21.31 | 21.43 | 21.29 | 22.00 | 21.40 | 21.43 | 21.58 | 22.00 | 21.40 | 21.45 | 21.42 | 22.00 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 21.35 | 21.34 | 21.30 | 22.00 | 21.40 | 21.39 | 21.53 | 22.00 | 21.38 | 21.43 | 21.39 | 22.00 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 21.35 | 21.34 | 21.37 | 22.00 | 21.39 | 21.39 | 21.53 | 22.00 | 21.38 | 21.43 | 21.39 | 22.00 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 22.02 | 22.04 | 22.10 | 22.50 | 21.97 | 22.24 | 22.32 | 23.00 | 22.39 | 22.45 | 22.38 | 23.00 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 20.07 | 20.15 | 20.08 | 20.50 | 20.13 | 20.19 | 20.25 | 21.00 | 20.38 | 20.43 | 20.47 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 21.11 | 21.15 | 20.12 | 21.50 | 21.17 | 21.28 | 21.33 | 22.00 | 21.41 | 21.47 | 21.38 | 22.00 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 20.06 | 21.15 | 20.11 | 21.50 | 20.23 | 20.28 | 20.35 | 21.00 | 20.39 | 20.44 | 20.47 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 22.00 | 22.10 | 22.00 | 22.50 | 22.10 | 22.20 | 22.30 | 23.00 | 22.30 | 22.40 | 22.30 | 23.00 |

<Hotspot reduced Power Mode>:

| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) |
|-----------------|-----------------|----------|--------------|--------|---------------------|----------|--------|--------------|---------------------|
| TX Channel | | 9262 | 9400 | 9538 | | 1312 | 1413 | 1513 | |
| Rx Channel | | 9662 | 9800 | 9938 | | 1537 | 1638 | 1738 | |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 | | 1712.4 | 1732.6 | 1752.6 | |
| 3GPP Rel 99 | AMR 12.2Kbps | 17.46 | 17.55 | 17.53 | 18.00 | 20.49 | 20.51 | 20.52 | 21.00 |
| 3GPP Rel 99 | RMC 12.2Kbps | 17.47 | 17.56 | 17.55 | 18.00 | 20.50 | 20.52 | 20.53 | 21.00 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 17.03 | 17.18 | 17.18 | 17.50 | 19.07 | 19.22 | 19.19 | 20.00 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 17.14 | 17.17 | 17.19 | 17.50 | 19.07 | 19.23 | 19.26 | 20.00 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 17.12 | 17.17 | 17.19 | 17.50 | 18.65 | 18.72 | 18.77 | 19.00 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 17.11 | 17.26 | 17.19 | 17.50 | 18.64 | 18.82 | 18.76 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 16.27 | 16.35 | 16.42 | 17.00 | 19.05 | 19.30 | 19.33 | 20.00 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 14.32 | 14.46 | 14.37 | 15.00 | 17.18 | 17.25 | 17.25 | 18.00 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 15.37 | 15.56 | 14.44 | 16.00 | 18.22 | 18.37 | 18.35 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 14.33 | 15.46 | 14.43 | 16.00 | 17.28 | 17.34 | 17.35 | 18.00 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 16.24 | 16.41 | 16.32 | 17.00 | 19.16 | 19.26 | 19.31 | 20.00 |

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Full Power Mode>

<LTE Band 2>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 18700 | 18900 | 19100 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1900 | | |
| 20 | QPSK | 1 | 0 | 22.17 | 22.26 | 22.27 | 23.50 | 0 |
| 20 | QPSK | 1 | 49 | 22.88 | 22.97 | 22.75 | | |
| 20 | QPSK | 1 | 99 | 22.26 | 22.58 | 22.69 | | |
| 20 | QPSK | 50 | 0 | 21.6 | 21.63 | 21.59 | 22.50 | 0-1 |
| 20 | QPSK | 50 | 24 | 21.52 | 21.58 | 21.54 | | |
| 20 | QPSK | 50 | 50 | 21.36 | 21.61 | 21.42 | | |
| 20 | QPSK | 100 | 0 | 21.42 | 21.69 | 21.64 | 22.50 | 0-1 |
| 20 | 16QAM | 1 | 0 | 21.07 | 21.1 | 21.14 | | |
| 20 | 16QAM | 1 | 49 | 21.2 | 21.16 | 21.18 | | |
| 20 | 16QAM | 1 | 99 | 21.03 | 21.06 | 21.43 | 21.50 | 0-2 |
| 20 | 16QAM | 50 | 0 | 20.58 | 20.67 | 20.63 | | |
| 20 | 16QAM | 50 | 24 | 20.68 | 20.73 | 20.58 | | |
| 20 | 16QAM | 50 | 50 | 20.44 | 20.71 | 20.71 | 21.50 | 0-2 |
| 20 | 16QAM | 100 | 0 | 20.39 | 20.6 | 20.66 | | |
| Channel | | | | 18675 | 18900 | 19125 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1902.5 | | |
| 15 | QPSK | 1 | 0 | 22.33 | 22.35 | 22.4 | 23.50 | 0 |
| 15 | QPSK | 1 | 37 | 22.82 | 22.85 | 22.67 | | |
| 15 | QPSK | 1 | 74 | 22.21 | 22.44 | 22.74 | | |
| 15 | QPSK | 36 | 0 | 21.58 | 21.67 | 21.55 | 22.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 21.5 | 21.53 | 21.62 | | |
| 15 | QPSK | 36 | 39 | 21.48 | 21.61 | 21.65 | | |
| 15 | QPSK | 75 | 0 | 21.56 | 21.61 | 21.52 | 22.50 | 0-1 |
| 15 | 16QAM | 1 | 0 | 21.06 | 21.03 | 21.21 | | |
| 15 | 16QAM | 1 | 37 | 21.53 | 21.51 | 21.95 | | |
| 15 | 16QAM | 1 | 74 | 21.3 | 21.22 | 21.59 | 21.50 | 0-2 |
| 15 | 16QAM | 36 | 0 | 20.52 | 20.64 | 20.57 | | |
| 15 | 16QAM | 36 | 20 | 20.45 | 20.63 | 20.63 | | |
| 15 | 16QAM | 36 | 39 | 20.54 | 20.59 | 20.41 | 21.50 | 0-2 |
| 15 | 16QAM | 75 | 0 | 20.56 | 20.69 | 20.55 | | |



| Channel | | | | 18650 | 18900 | 19150 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1905 | | |
| 10 | QPSK | 1 | 0 | 22.41 | 22.3 | 22.53 | 23.50 | 0 |
| 10 | QPSK | 1 | 25 | 22.75 | 22.65 | 22.94 | | |
| 10 | QPSK | 1 | 49 | 22.5 | 22.47 | 22.27 | | |
| 10 | QPSK | 25 | 0 | 21.75 | 21.6 | 21.7 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 21.65 | 21.75 | 21.68 | | |
| 10 | QPSK | 25 | 25 | 21.59 | 21.64 | 21.63 | | |
| 10 | QPSK | 50 | 0 | 21.54 | 21.71 | 21.65 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 21.78 | 21.18 | 21.64 | | |
| 10 | 16QAM | 1 | 25 | 21.58 | 21.79 | 22.16 | | |
| 10 | 16QAM | 1 | 49 | 21.09 | 21.67 | 21.34 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 20.91 | 20.78 | 20.78 | | |
| 10 | 16QAM | 25 | 12 | 20.61 | 20.8 | 20.74 | | |
| 10 | 16QAM | 25 | 25 | 20.72 | 20.81 | 20.69 | 21.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 20.56 | 20.77 | 20.75 | | |
| Channel | | | | 18625 | 18900 | 19175 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1907.5 | | |
| 5 | QPSK | 1 | 0 | 22.41 | 22.3 | 22.53 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 22.75 | 22.65 | 22.94 | | |
| 5 | QPSK | 1 | 24 | 22.5 | 22.47 | 22.27 | | |
| 5 | QPSK | 12 | 0 | 21.75 | 21.6 | 21.7 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 21.65 | 21.75 | 21.68 | | |
| 5 | QPSK | 12 | 13 | 21.59 | 21.64 | 21.63 | | |
| 5 | QPSK | 25 | 0 | 21.54 | 21.71 | 21.65 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 21.78 | 21.18 | 21.64 | | |
| 5 | 16QAM | 1 | 12 | 21.58 | 21.79 | 22.16 | | |
| 5 | 16QAM | 1 | 24 | 21.09 | 21.67 | 21.34 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 20.91 | 20.78 | 20.78 | | |
| 5 | 16QAM | 12 | 7 | 20.61 | 20.8 | 20.74 | | |
| 5 | 16QAM | 12 | 13 | 20.72 | 20.81 | 20.69 | 21.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 20.56 | 20.77 | 20.75 | | |



| Channel | | | | 18615 | 18900 | 19185 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1908.5 | | |
| 3 | QPSK | 1 | 0 | 22.64 | 22.38 | 22.31 | 23.50 | 0 |
| 3 | QPSK | 1 | 8 | 22.54 | 22.55 | 22.88 | | |
| 3 | QPSK | 1 | 14 | 22.79 | 22.46 | 22.74 | | |
| 3 | QPSK | 8 | 0 | 21.59 | 21.62 | 21.61 | 22.50 | 0-1 |
| 3 | QPSK | 8 | 4 | 21.72 | 21.71 | 21.61 | | |
| 3 | QPSK | 8 | 7 | 21.66 | 21.76 | 21.53 | | |
| 3 | QPSK | 15 | 0 | 21.71 | 21.73 | 21.58 | 22.50 | 0-1 |
| 3 | 16QAM | 1 | 0 | 21.71 | 21.72 | 21.64 | | |
| 3 | 16QAM | 1 | 8 | 21.47 | 21.6 | 21.59 | | |
| 3 | 16QAM | 1 | 14 | 21.6 | 21.48 | 21.5 | 21.50 | 0-2 |
| 3 | 16QAM | 8 | 0 | 20.4 | 20.5 | 20.7 | | |
| 3 | 16QAM | 8 | 4 | 20.49 | 20.5 | 20.8 | | |
| 3 | 16QAM | 8 | 7 | 20.51 | 20.54 | 20.71 | 21.50 | 0-2 |
| 3 | 16QAM | 15 | 0 | 20.7 | 20.58 | 20.57 | | |
| Channel | | | | 18607 | 18900 | 19193 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1909.3 | | |
| 1.4 | QPSK | 1 | 0 | 22.38 | 22.6 | 22.38 | 23.50 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.62 | 22.69 | 22.42 | | |
| 1.4 | QPSK | 1 | 5 | 22.5 | 22.61 | 22.55 | | |
| 1.4 | QPSK | 3 | 0 | 22.48 | 22.59 | 22.35 | | |
| 1.4 | QPSK | 3 | 1 | 22.54 | 22.76 | 22.75 | | |
| 1.4 | QPSK | 3 | 3 | 22.9 | 22.6 | 22.66 | 22.50 | 0-1 |
| 1.4 | QPSK | 6 | 0 | 21.75 | 21.65 | 21.52 | | |
| 1.4 | 16QAM | 1 | 0 | 21.71 | 21.47 | 21.78 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 21.91 | 21.47 | 21.93 | | |
| 1.4 | 16QAM | 1 | 5 | 21.7 | 21.85 | 21.82 | | |
| 1.4 | 16QAM | 3 | 0 | 21.52 | 21.7 | 21.53 | | |
| 1.4 | 16QAM | 3 | 1 | 22.04 | 21.65 | 21.56 | | |
| 1.4 | 16QAM | 3 | 3 | 21.53 | 21.59 | 21.45 | 21.50 | 0-2 |
| 1.4 | 16QAM | 6 | 0 | 20.95 | 20.54 | 20.73 | | |



<LTE Band 4>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20050 | 20175 | 20300 | | |
| Frequency (MHz) | | | | 1720 | 1732.5 | 1745 | | |
| 20 | QPSK | 1 | 0 | 22.95 | 22.96 | 22.94 | | |
| 20 | QPSK | 1 | 49 | 23.14 | 23.15 | 23.05 | 23.50 | 0 |
| 20 | QPSK | 1 | 99 | 22.92 | 22.93 | 22.83 | | |
| 20 | QPSK | 50 | 0 | 22.16 | 22.14 | 22.29 | | |
| 20 | QPSK | 50 | 24 | 22.09 | 22.08 | 22.26 | 22.50 | 0-1 |
| 20 | QPSK | 50 | 50 | 22.08 | 22.01 | 22.15 | | |
| 20 | QPSK | 100 | 0 | 22.04 | 22.17 | 22.25 | | |
| 20 | 16QAM | 1 | 0 | 21.91 | 21.93 | 21.71 | 22.50 | 0-1 |
| 20 | 16QAM | 1 | 49 | 21.84 | 21.91 | 22 | | |
| 20 | 16QAM | 1 | 99 | 21.68 | 21.85 | 21.47 | | |
| 20 | 16QAM | 50 | 0 | 21.14 | 21.16 | 21.22 | 21.50 | 0-2 |
| 20 | 16QAM | 50 | 24 | 21.18 | 21.21 | 21.23 | | |
| 20 | 16QAM | 50 | 50 | 21.02 | 20.96 | 21.21 | | |
| 20 | 16QAM | 100 | 0 | 21.04 | 21.07 | 21.31 | | |
| Channel | | | | 20025 | 20175 | 20325 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1717.5 | 1732.5 | 1747.5 | | |
| 15 | QPSK | 1 | 0 | 22.68 | 22.81 | 22.8 | 23.50 | 0 |
| 15 | QPSK | 1 | 37 | 22.99 | 23.09 | 23.12 | | |
| 15 | QPSK | 1 | 74 | 22.79 | 22.84 | 22.78 | | |
| 15 | QPSK | 36 | 0 | 22.02 | 22.1 | 22.23 | 22.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 22 | 22.1 | 22.16 | | |
| 15 | QPSK | 36 | 39 | 21.97 | 22.02 | 22.13 | | |
| 15 | QPSK | 75 | 0 | 22.02 | 22.08 | 22.18 | | |
| 15 | 16QAM | 1 | 0 | 21.92 | 21.84 | 21.65 | 22.50 | 0-1 |
| 15 | 16QAM | 1 | 37 | 22.12 | 22.09 | 22.29 | | |
| 15 | 16QAM | 1 | 74 | 22.15 | 22.11 | 21.99 | | |
| 15 | 16QAM | 36 | 0 | 21.11 | 21.13 | 21.18 | 21.50 | 0-2 |
| 15 | 16QAM | 36 | 20 | 21.1 | 21.12 | 21.21 | | |
| 15 | 16QAM | 36 | 39 | 21.08 | 20.95 | 21.3 | | |
| 15 | 16QAM | 75 | 0 | 21.02 | 21.08 | 21.21 | | |



| Channel | | | | 20000 | 20175 | 20350 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1732.5 | 1750 | | |
| 10 | QPSK | 1 | 0 | 22.84 | 22.93 | 22.95 | 23.50 | 0 |
| 10 | QPSK | 1 | 25 | 23.06 | 23.08 | 23.15 | | |
| 10 | QPSK | 1 | 49 | 22.97 | 22.89 | 22.82 | | |
| 10 | QPSK | 25 | 0 | 22.08 | 22.13 | 22.29 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 22.04 | 22.16 | 22.23 | | |
| 10 | QPSK | 25 | 25 | 22.15 | 22.08 | 22.24 | | |
| 10 | QPSK | 50 | 0 | 22.09 | 22.21 | 22.29 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 21.53 | 21.83 | 21.52 | | |
| 10 | 16QAM | 1 | 25 | 21.53 | 21.95 | 21.82 | | |
| 10 | 16QAM | 1 | 49 | 21.88 | 21.73 | 21.76 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 21.04 | 21.15 | 21.26 | | |
| 10 | 16QAM | 25 | 12 | 21.11 | 21.17 | 21.29 | | |
| 10 | 16QAM | 25 | 25 | 21 | 21.3 | 21.22 | 21.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 21.06 | 21.23 | 21.19 | | |
| Channel | | | | 19975 | 20175 | 20375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1712.5 | 1732.5 | 1752.5 | | |
| 5 | QPSK | 1 | 0 | 22.57 | 22.78 | 22.69 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 23.04 | 23.13 | 23.07 | | |
| 5 | QPSK | 1 | 24 | 22.64 | 22.76 | 22.99 | | |
| 5 | QPSK | 12 | 0 | 22.05 | 22.09 | 22.23 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 22.09 | 22.13 | 22.29 | | |
| 5 | QPSK | 12 | 13 | 22.02 | 22.03 | 22.18 | | |
| 5 | QPSK | 25 | 0 | 22.01 | 22.12 | 22.2 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 21.96 | 22.2 | 21.7 | | |
| 5 | 16QAM | 1 | 12 | 22.29 | 21.96 | 22.49 | | |
| 5 | 16QAM | 1 | 24 | 22.05 | 22.08 | 22.33 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 21.18 | 21.16 | 21.31 | | |
| 5 | 16QAM | 12 | 7 | 21.07 | 21.22 | 21.3 | | |
| 5 | 16QAM | 12 | 13 | 21.11 | 21.22 | 21.12 | 21.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 21.11 | 21.18 | 21.26 | | |



| Channel | | | | 19965 | 20175 | 20385 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1732.5 | 1753.5 | | |
| 3 | QPSK | 1 | 0 | 22.83 | 22.57 | 22.63 | 23.50 | 0 |
| 3 | QPSK | 1 | 8 | 23.14 | 23.11 | 23.07 | | |
| 3 | QPSK | 1 | 14 | 22.74 | 22.66 | 22.86 | | |
| 3 | QPSK | 8 | 0 | 22.04 | 22.12 | 22.13 | 22.50 | 0-1 |
| 3 | QPSK | 8 | 4 | 22.19 | 22.25 | 22.08 | | |
| 3 | QPSK | 8 | 7 | 22.08 | 22.12 | 22.14 | | |
| 3 | QPSK | 15 | 0 | 22.06 | 22.08 | 22.04 | 22.50 | 0-1 |
| 3 | 16QAM | 1 | 0 | 21.67 | 21.79 | 21.76 | | |
| 3 | 16QAM | 1 | 8 | 21.82 | 21.93 | 22.02 | | |
| 3 | 16QAM | 1 | 14 | 21.69 | 21.87 | 22.08 | 21.50 | 0-2 |
| 3 | 16QAM | 8 | 0 | 21.09 | 21.1 | 21 | | |
| 3 | 16QAM | 8 | 4 | 21.18 | 21.23 | 21.09 | | |
| 3 | 16QAM | 8 | 7 | 20.9 | 21.18 | 21.04 | 21.50 | 0-2 |
| 3 | 16QAM | 15 | 0 | 21.09 | 21.27 | 21.09 | | |
| Channel | | | | 19957 | 20175 | 20393 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1732.5 | 1754.3 | | |
| 1.4 | QPSK | 1 | 0 | 22.85 | 22.83 | 22.87 | 23.50 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.75 | 22.97 | 22.8 | | |
| 1.4 | QPSK | 1 | 5 | 22.47 | 23.03 | 22.97 | | |
| 1.4 | QPSK | 3 | 0 | 22.25 | 22.15 | 22.29 | | |
| 1.4 | QPSK | 3 | 1 | 22.07 | 22.08 | 22.16 | | |
| 1.4 | QPSK | 3 | 3 | 22.03 | 22.17 | 22.23 | | |
| 1.4 | QPSK | 6 | 0 | 22.08 | 22.18 | 22.08 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 0 | 21.93 | 21.77 | 21.9 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 22.01 | 21.9 | 21.97 | | |
| 1.4 | 16QAM | 1 | 5 | 22.02 | 21.96 | 22.06 | | |
| 1.4 | 16QAM | 3 | 0 | 20.9 | 21.08 | 21.23 | | |
| 1.4 | 16QAM | 3 | 1 | 21 | 21.05 | 21.14 | | |
| 1.4 | 16QAM | 3 | 3 | 20.96 | 21.17 | 21.05 | | |
| 1.4 | 16QAM | 6 | 0 | 20.92 | 21.16 | 21.05 | 21.50 | 0-2 |



<LTE Band 5>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20450 | 20525 | 20600 | | |
| Frequency (MHz) | | | | 829 | 836.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 22.49 | 22.52 | 22.58 | 23.50 | 0 |
| 10 | QPSK | 1 | 25 | 22.88 | 23 | 22.84 | | |
| 10 | QPSK | 1 | 49 | 22.53 | 22.51 | 22.35 | | |
| 10 | QPSK | 25 | 0 | 21.82 | 21.89 | 21.85 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 21.77 | 21.85 | 21.84 | | |
| 10 | QPSK | 25 | 25 | 21.76 | 21.79 | 21.77 | | |
| 10 | QPSK | 50 | 0 | 21.86 | 21.75 | 21.82 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 21.28 | 21.62 | 21.72 | | |
| 10 | 16QAM | 1 | 25 | 21.54 | 22.04 | 21.71 | | |
| 10 | 16QAM | 1 | 49 | 21.73 | 21.58 | 21.66 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 20.88 | 20.74 | 20.72 | | |
| 10 | 16QAM | 25 | 12 | 20.66 | 20.77 | 20.84 | | |
| 10 | 16QAM | 25 | 25 | 20.78 | 20.87 | 20.85 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 25 | 20.78 | 20.87 | 20.85 | | |
| 10 | 16QAM | 50 | 0 | 20.85 | 20.66 | 20.83 | | |
| Channel | | | | 20425 | 20525 | 20625 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 826.5 | 836.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 22.56 | 22.48 | 22.4 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 22.92 | 22.98 | 22.98 | | |
| 5 | QPSK | 1 | 24 | 22.38 | 22.41 | 22.27 | | |
| 5 | QPSK | 12 | 0 | 21.7 | 21.7 | 21.78 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 21.88 | 21.82 | 21.79 | | |
| 5 | QPSK | 12 | 13 | 21.65 | 21.68 | 21.74 | | |
| 5 | QPSK | 25 | 0 | 21.73 | 21.79 | 21.78 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 21.28 | 21.18 | 21.3 | | |
| 5 | 16QAM | 1 | 12 | 21.67 | 21.33 | 21.27 | | |
| 5 | 16QAM | 1 | 24 | 21.27 | 21.28 | 21.15 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 20.88 | 20.68 | 20.65 | | |
| 5 | 16QAM | 12 | 7 | 20.84 | 20.79 | 20.87 | | |
| 5 | 16QAM | 12 | 13 | 20.66 | 20.76 | 20.83 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 13 | 20.66 | 20.76 | 20.83 | | |
| 5 | 16QAM | 25 | 0 | 20.74 | 20.65 | 20.96 | | |



| Channel | | | | 20415 | 20525 | 20635 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 825.5 | 836.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 22.39 | 22.49 | 22.73 | 23.50 | 0 |
| 3 | QPSK | 1 | 8 | 22.6 | 22.52 | 22.2 | | |
| 3 | QPSK | 1 | 14 | 22.18 | 22.47 | 22.22 | | |
| 3 | QPSK | 8 | 0 | 21.71 | 21.63 | 21.69 | 22.50 | 0-1 |
| 3 | QPSK | 8 | 4 | 21.77 | 21.71 | 21.78 | | |
| 3 | QPSK | 8 | 7 | 21.69 | 21.74 | 21.6 | | |
| 3 | QPSK | 15 | 0 | 21.76 | 21.73 | 21.7 | 22.50 | 0-1 |
| 3 | 16QAM | 1 | 0 | 21.44 | 21.3 | 20.93 | | |
| 3 | 16QAM | 1 | 8 | 21.15 | 21.13 | 21.02 | | |
| 3 | 16QAM | 1 | 14 | 21.15 | 21.2 | 21.23 | 21.50 | 0-2 |
| 3 | 16QAM | 8 | 0 | 20.85 | 20.87 | 20.53 | | |
| 3 | 16QAM | 8 | 4 | 20.81 | 20.95 | 20.8 | | |
| 3 | 16QAM | 8 | 7 | 20.82 | 20.86 | 20.73 | 21.50 | 0-2 |
| 3 | 16QAM | 15 | 0 | 20.53 | 20.7 | 20.58 | | |
| Channel | | | | 20407 | 20525 | 20643 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 824.7 | 836.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 22.67 | 22.56 | 22.52 | 23.50 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.57 | 22.6 | 22.62 | | |
| 1.4 | QPSK | 1 | 5 | 22.27 | 22.52 | 22.5 | | |
| 1.4 | QPSK | 3 | 0 | 22.73 | 22.61 | 22.58 | | |
| 1.4 | QPSK | 3 | 1 | 22.79 | 22.77 | 22.72 | | |
| 1.4 | QPSK | 3 | 3 | 22.55 | 22.76 | 22.7 | 22.50 | 0-1 |
| 1.4 | QPSK | 6 | 0 | 21.62 | 21.69 | 21.65 | | |
| 1.4 | 16QAM | 1 | 0 | 21.68 | 21.77 | 21.75 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 21.52 | 21.88 | 21.85 | | |
| 1.4 | 16QAM | 1 | 5 | 21.37 | 21.31 | 21.25 | | |
| 1.4 | 16QAM | 3 | 0 | 21.78 | 21.68 | 21.65 | | |
| 1.4 | 16QAM | 3 | 1 | 21.62 | 21.85 | 21.83 | | |
| 1.4 | 16QAM | 3 | 3 | 22.03 | 22.03 | 22.01 | 21.50 | 0-2 |
| 1.4 | 16QAM | 6 | 0 | 20.62 | 20.61 | 20.58 | | |



<LTE Band 7>

| BW [MHz] | Modulation | RB Size | RB Offset | Measured Power | | | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|----------------|-------|--------|---------------------|----------|
| | | | | Channel | 20850 | 21100 | | |
| Frequency (MHz) | | | | 2510 | 2535 | 2560 | | |
| 20 | QPSK | 1 | 0 | 22.72 | 22.69 | 23.16 | 23.50 | 0 |
| 20 | QPSK | 1 | 49 | 23.3 | 23.15 | 23.17 | | |
| 20 | QPSK | 1 | 99 | 22.65 | 22.6 | 22.24 | | |
| 20 | QPSK | 50 | 0 | 22.07 | 22.03 | 22.05 | 22.50 | 0-1 |
| 20 | QPSK | 50 | 24 | 22.14 | 22.03 | 22.11 | | |
| 20 | QPSK | 50 | 50 | 22.17 | 22.12 | 22.15 | | |
| 20 | QPSK | 100 | 0 | 22.14 | 22.06 | 21.66 | 22.50 | 0-1 |
| 20 | 16QAM | 1 | 0 | 22.04 | 21.65 | 21.63 | | |
| 20 | 16QAM | 1 | 49 | 21.88 | 21.61 | 21.7 | | |
| 20 | 16QAM | 1 | 99 | 21.88 | 21.7 | 21.17 | 21.50 | 0-2 |
| 20 | 16QAM | 50 | 0 | 21.09 | 21.13 | 21 | | |
| 20 | 16QAM | 50 | 24 | 21.03 | 21.01 | 21.28 | | |
| 20 | 16QAM | 50 | 50 | 21.2 | 21.13 | 21.16 | 21.50 | 0-2 |
| 20 | 16QAM | 100 | 0 | 21.1 | 21.1 | 21.08 | | |
| Channel | | | | 20825 | 21100 | 21375 | | |
| Frequency (MHz) | | | | 2507.5 | 2535 | 2562.5 | Tune-up limit (dBm) | MPR (dB) |
| 15 | QPSK | 1 | 0 | 22.97 | 22.94 | 23.02 | 23.50 | 0 |
| 15 | QPSK | 1 | 37 | 23.2 | 23.2 | 23.21 | | |
| 15 | QPSK | 1 | 74 | 22.97 | 22.92 | 23.03 | | |
| 15 | QPSK | 36 | 0 | 22.17 | 22.05 | 22.16 | 22.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 22.16 | 22.05 | 22.12 | | |
| 15 | QPSK | 36 | 39 | 22.08 | 22.08 | 22.15 | | |
| 15 | QPSK | 75 | 0 | 22.11 | 22.09 | 22.13 | 22.50 | 0-1 |
| 15 | 16QAM | 1 | 0 | 22.1 | 21.66 | 21.68 | | |
| 15 | 16QAM | 1 | 37 | 21.93 | 21.87 | 21.83 | | |
| 15 | 16QAM | 1 | 74 | 21.86 | 21.68 | 21.86 | 21.50 | 0-2 |
| 15 | 16QAM | 36 | 0 | 21.15 | 21.02 | 21.22 | | |
| 15 | 16QAM | 36 | 20 | 21.13 | 21.1 | 21.19 | | |
| 15 | 16QAM | 36 | 39 | 21.16 | 21.24 | 21.23 | 21.50 | 0-2 |
| 15 | 16QAM | 75 | 0 | 21.17 | 21.05 | 21.21 | | |



| Channel | | | | 20800 | 21100 | 21400 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2505 | 2535 | 2565 | | |
| 10 | QPSK | 1 | 0 | 22.76 | 22.62 | 22.74 | 23.50 | 0 |
| 10 | QPSK | 1 | 25 | 23.29 | 22.91 | 23.09 | | |
| 10 | QPSK | 1 | 49 | 22.54 | 22.61 | 22.73 | | |
| 10 | QPSK | 25 | 0 | 22.11 | 22.05 | 22.09 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 22.06 | 22.08 | 22.09 | | |
| 10 | QPSK | 25 | 25 | 21.99 | 22.01 | 22.12 | | |
| 10 | QPSK | 50 | 0 | 22.05 | 22.01 | 22.1 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 21.92 | 21.37 | 21.51 | | |
| 10 | 16QAM | 1 | 25 | 22.06 | 21.83 | 21.85 | | |
| 10 | 16QAM | 1 | 49 | 21.44 | 21.33 | 21.68 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 21.1 | 21 | 21.06 | | |
| 10 | 16QAM | 25 | 12 | 21.1 | 21.21 | 21.35 | | |
| 10 | 16QAM | 25 | 25 | 21.05 | 21.19 | 21.25 | 21.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 21.01 | 21.16 | 21.18 | | |
| Channel | | | | 20775 | 21100 | 21425 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2502.5 | 2535 | 2567.5 | | |
| 5 | QPSK | 1 | 0 | 22.79 | 22.48 | 22.91 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 22.91 | 23.19 | 23.26 | | |
| 5 | QPSK | 1 | 24 | 22.67 | 22.46 | 22.77 | | |
| 5 | QPSK | 12 | 0 | 22.21 | 22.02 | 22.2 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 22.24 | 22.11 | 22.25 | | |
| 5 | QPSK | 12 | 13 | 22.04 | 21.97 | 22.05 | | |
| 5 | QPSK | 25 | 0 | 22.17 | 21.95 | 22.11 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 22.27 | 21.37 | 22.22 | | |
| 5 | 16QAM | 1 | 12 | 22.24 | 21.72 | 22.24 | | |
| 5 | 16QAM | 1 | 24 | 21.71 | 21.37 | 21.86 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 20.96 | 21.18 | 21.14 | | |
| 5 | 16QAM | 12 | 7 | 21.21 | 21.25 | 21.26 | | |
| 5 | 16QAM | 12 | 13 | 20.93 | 21.22 | 21.07 | 21.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 21.14 | 21.01 | 21.12 | | |



<LTE Band 12>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23060 | 23095 | 23130 | 23.50 | 0 |
| Frequency (MHz) | | | | 704 | 707.5 | 711 | | |
| 10 | QPSK | 1 | 0 | 22.49 | 22.74 | 22.75 | | |
| 10 | QPSK | 1 | 25 | 23.05 | 22.91 | 23.08 | 22.50 | 0-1 |
| 10 | QPSK | 1 | 49 | 22.7 | 22.65 | 22.93 | | |
| 10 | QPSK | 25 | 0 | 21.84 | 21.97 | 21.94 | | |
| 10 | QPSK | 25 | 12 | 22.02 | 21.98 | 21.98 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 25 | 21.84 | 21.92 | 21.93 | | |
| 10 | QPSK | 50 | 0 | 21.93 | 21.87 | 22 | | |
| 10 | 16QAM | 1 | 0 | 21.59 | 21.69 | 21.61 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 25 | 21.91 | 21.94 | 21.86 | | |
| 10 | 16QAM | 1 | 49 | 21.66 | 21.41 | 21.59 | | |
| 10 | 16QAM | 25 | 0 | 20.91 | 20.94 | 21.13 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 12 | 20.99 | 20.9 | 20.96 | | |
| 10 | 16QAM | 25 | 25 | 20.96 | 20.92 | 20.92 | | |
| 10 | 16QAM | 50 | 0 | 21 | 20.81 | 20.83 | 23.50 | 0 |
| Channel | | | | 23035 | 23095 | 23155 | | |
| Frequency (MHz) | | | | 701.5 | 707.5 | 713.5 | | |
| 5 | QPSK | 1 | 0 | 22.53 | 22.5 | 22.65 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 22.86 | 23.07 | 22.93 | | |
| 5 | QPSK | 1 | 24 | 22.78 | 22.71 | 22.68 | | |
| 5 | QPSK | 12 | 0 | 21.77 | 21.94 | 21.93 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 21.93 | 21.97 | 22.03 | | |
| 5 | QPSK | 12 | 13 | 22.02 | 21.82 | 21.93 | | |
| 5 | QPSK | 25 | 0 | 21.84 | 21.84 | 21.94 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 21.52 | 21.62 | 21.44 | | |
| 5 | 16QAM | 1 | 12 | 22.04 | 21.73 | 21.51 | | |
| 5 | 16QAM | 1 | 24 | 21.47 | 21.78 | 21.56 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 21.07 | 20.82 | 20.81 | | |
| 5 | 16QAM | 12 | 7 | 20.8 | 20.77 | 21.04 | | |
| 5 | 16QAM | 12 | 13 | 21.1 | 20.9 | 20.88 | 21.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 20.93 | 20.92 | 20.97 | | |



| Channel | | | | 23025 | 23095 | 23165 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 700.5 | 707.5 | 714.5 | | |
| 3 | QPSK | 1 | 0 | 22.74 | 22.86 | 22.92 | 23.50 | 0 |
| 3 | QPSK | 1 | 8 | 22.88 | 23.01 | 22.97 | | |
| 3 | QPSK | 1 | 14 | 22.87 | 22.74 | 22.61 | | |
| 3 | QPSK | 8 | 0 | 21.71 | 22.08 | 21.88 | 22.50 | 0-1 |
| 3 | QPSK | 8 | 4 | 21.84 | 22 | 21.95 | | |
| 3 | QPSK | 8 | 7 | 21.84 | 21.89 | 21.89 | | |
| 3 | QPSK | 15 | 0 | 21.81 | 21.88 | 21.89 | 22.50 | 0-1 |
| 3 | 16QAM | 1 | 0 | 21.9 | 21.84 | 22.03 | | |
| 3 | 16QAM | 1 | 8 | 22.09 | 21.73 | 21.92 | | |
| 3 | 16QAM | 1 | 14 | 21.91 | 21.4 | 21.94 | 21.50 | 0-2 |
| 3 | 16QAM | 8 | 0 | 20.98 | 21.02 | 20.97 | | |
| 3 | 16QAM | 8 | 4 | 20.83 | 20.93 | 20.97 | | |
| 3 | 16QAM | 8 | 7 | 20.93 | 20.92 | 20.76 | 21.50 | 0-2 |
| 3 | 16QAM | 15 | 0 | 20.86 | 20.88 | 20.96 | | |
| Channel | | | | 23017 | 23095 | 23173 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 699.7 | 707.5 | 715.3 | | |
| 1.4 | QPSK | 1 | 0 | 22.76 | 22.94 | 22.92 | 23.50 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.91 | 22.86 | 22.91 | | |
| 1.4 | QPSK | 1 | 5 | 22.87 | 22.85 | 22.82 | | |
| 1.4 | QPSK | 3 | 0 | 22.97 | 23.07 | 22.93 | | |
| 1.4 | QPSK | 3 | 1 | 23.01 | 23.03 | 22.91 | | |
| 1.4 | QPSK | 3 | 3 | 23.05 | 23.07 | 23 | | |
| 1.4 | QPSK | 6 | 0 | 21.95 | 21.91 | 21.88 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 0 | 21.9 | 21.86 | 21.49 | 22.50 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 22.09 | 21.84 | 21.61 | | |
| 1.4 | 16QAM | 1 | 5 | 22.09 | 21.65 | 21.68 | | |
| 1.4 | 16QAM | 3 | 0 | 21.74 | 21.95 | 21.84 | | |
| 1.4 | 16QAM | 3 | 1 | 21.83 | 21.95 | 22.06 | | |
| 1.4 | 16QAM | 3 | 3 | 21.92 | 21.88 | 21.98 | | |
| 1.4 | 16QAM | 6 | 0 | 20.79 | 20.79 | 20.93 | 21.50 | 0-2 |



<Hotspot reduced Power Mode>

<LTE Band 2>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 18700 | 18900 | 19100 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1900 | | |
| 20 | QPSK | 1 | 0 | 16.13 | 16.11 | 16.16 | 17.00 | 0 |
| 20 | QPSK | 1 | 49 | 16.77 | 16.86 | 16.87 | | |
| 20 | QPSK | 1 | 99 | 16.09 | 16.44 | 16.57 | | |
| 20 | QPSK | 50 | 0 | 16.55 | 16.62 | 16.63 | 17.00 | 0-1 |
| 20 | QPSK | 50 | 24 | 16.51 | 16.61 | 16.47 | | |
| 20 | QPSK | 50 | 50 | 16.35 | 16.57 | 16.47 | | |
| 20 | QPSK | 100 | 0 | 16.45 | 16.56 | 16.49 | 17.00 | 0-1 |
| 20 | 16QAM | 1 | 0 | 16.03 | 16.2 | 16.09 | | |
| 20 | 16QAM | 1 | 49 | 16.39 | 16.57 | 16.4 | | |
| 20 | 16QAM | 1 | 99 | 16.19 | 16.31 | 16.37 | 17.00 | 0-2 |
| 20 | 16QAM | 50 | 0 | 16.59 | 16.43 | 16.53 | | |
| 20 | 16QAM | 50 | 24 | 16.55 | 16.53 | 16.54 | | |
| 20 | 16QAM | 50 | 50 | 16.58 | 16.61 | 16.55 | 17.00 | 0-2 |
| 20 | 16QAM | 100 | 0 | 16.47 | 16.58 | 16.51 | | |
| Channel | | | | 18675 | 18900 | 19125 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1902.5 | | |
| 15 | QPSK | 1 | 0 | 16.25 | 16.27 | 16.36 | 17.00 | 0 |
| 15 | QPSK | 1 | 37 | 16.63 | 16.71 | 16.71 | | |
| 15 | QPSK | 1 | 74 | 16.17 | 16.48 | 16.59 | | |
| 15 | QPSK | 36 | 0 | 16.55 | 16.64 | 16.47 | 17.00 | 0-1 |
| 15 | QPSK | 36 | 20 | 16.56 | 16.62 | 16.58 | | |
| 15 | QPSK | 36 | 39 | 16.52 | 16.62 | 16.54 | | |
| 15 | QPSK | 75 | 0 | 16.55 | 16.59 | 16.48 | 17.00 | 0-1 |
| 15 | 16QAM | 1 | 0 | 16.18 | 16.21 | 16.06 | | |
| 15 | 16QAM | 1 | 37 | 16.33 | 16.67 | 16.48 | | |
| 15 | 16QAM | 1 | 74 | 16.04 | 16.36 | 16.29 | 17.00 | 0-2 |
| 15 | 16QAM | 36 | 0 | 16.59 | 16.56 | 16.51 | | |
| 15 | 16QAM | 36 | 20 | 16.59 | 16.75 | 16.54 | | |
| 15 | 16QAM | 36 | 39 | 16.56 | 16.65 | 16.49 | 17.00 | 0-2 |
| 15 | 16QAM | 75 | 0 | 16.59 | 16.72 | 16.56 | | |



| Channel | | | | 18650 | 18900 | 19150 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1905 | | |
| 10 | QPSK | 1 | 0 | 16.15 | 16.16 | 16.19 | 17.00 | 0 |
| 10 | QPSK | 1 | 25 | 16.62 | 16.74 | 16.55 | | |
| 10 | QPSK | 1 | 49 | 16.3 | 16.32 | 16.64 | | |
| 10 | QPSK | 25 | 0 | 16.44 | 16.6 | 16.52 | 17.00 | 0-1 |
| 10 | QPSK | 25 | 12 | 16.61 | 16.68 | 16.68 | | |
| 10 | QPSK | 25 | 25 | 16.41 | 16.62 | 16.61 | | |
| 10 | QPSK | 50 | 0 | 16.56 | 16.66 | 16.66 | 17.00 | 0-1 |
| 10 | 16QAM | 1 | 0 | 16.29 | 16.22 | 16.31 | | |
| 10 | 16QAM | 1 | 25 | 16.5 | 16.69 | 16.47 | | |
| 10 | 16QAM | 1 | 49 | 16.18 | 16.4 | 16.49 | 17.00 | 0-2 |
| 10 | 16QAM | 25 | 0 | 16.46 | 16.65 | 16.52 | | |
| 10 | 16QAM | 25 | 12 | 16.64 | 16.81 | 16.61 | | |
| 10 | 16QAM | 25 | 25 | 16.46 | 16.74 | 16.64 | 17.00 | 0-2 |
| 10 | 16QAM | 50 | 0 | 16.49 | 16.41 | 16.57 | | |
| Channel | | | | 18625 | 18900 | 19175 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1907.5 | | |
| 5 | QPSK | 1 | 0 | 16.2 | 16.29 | 16.09 | 17.00 | 0 |
| 5 | QPSK | 1 | 12 | 16.74 | 16.79 | 16.71 | | |
| 5 | QPSK | 1 | 24 | 16.24 | 16.27 | 16.42 | | |
| 5 | QPSK | 12 | 0 | 16.48 | 16.6 | 16.6 | 17.00 | 0-1 |
| 5 | QPSK | 12 | 7 | 16.5 | 16.55 | 16.66 | | |
| 5 | QPSK | 12 | 13 | 16.47 | 16.55 | 16.64 | | |
| 5 | QPSK | 25 | 0 | 16.44 | 16.49 | 16.6 | 17.00 | 0-1 |
| 5 | 16QAM | 1 | 0 | 16.21 | 16.21 | 16.25 | | |
| 5 | 16QAM | 1 | 12 | 16.33 | 16.67 | 16.64 | | |
| 5 | 16QAM | 1 | 24 | 16.27 | 16.37 | 16.23 | 17.00 | 0-2 |
| 5 | 16QAM | 12 | 0 | 16.35 | 16.47 | 16.44 | | |
| 5 | 16QAM | 12 | 7 | 16.46 | 16.57 | 16.62 | | |
| 5 | 16QAM | 12 | 13 | 16.52 | 16.48 | 16.49 | 17.00 | 0-2 |
| 5 | 16QAM | 25 | 0 | 16.49 | 16.64 | 16.67 | | |



| Channel | | | | 18615 | 18900 | 19185 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1908.5 | | |
| 3 | QPSK | 1 | 0 | 16.56 | 16.3 | 16.27 | 17.00 | 0 |
| 3 | QPSK | 1 | 8 | 16.35 | 16.41 | 16.72 | | |
| 3 | QPSK | 1 | 14 | 16.75 | 16.5 | 16.59 | | |
| 3 | QPSK | 8 | 0 | 16.56 | 16.59 | 16.53 | 17.00 | 0-1 |
| 3 | QPSK | 8 | 4 | 16.68 | 16.6 | 16.57 | | |
| 3 | QPSK | 8 | 7 | 16.6 | 16.67 | 16.42 | | |
| 3 | QPSK | 15 | 0 | 16.7 | 16.71 | 16.54 | | |
| 3 | 16QAM | 1 | 0 | 16.63 | 16.7 | 16.49 | 17.00 | 0-1 |
| 3 | 16QAM | 1 | 8 | 16.27 | 16.76 | 16.12 | | |
| 3 | 16QAM | 1 | 14 | 16.34 | 16.62 | 16.2 | | |
| 3 | 16QAM | 8 | 0 | 16.47 | 16.42 | 16.64 | 17.00 | 0-2 |
| 3 | 16QAM | 8 | 4 | 16.63 | 16.62 | 16.71 | | |
| 3 | 16QAM | 8 | 7 | 16.53 | 16.6 | 16.69 | | |
| 3 | 16QAM | 15 | 0 | 16.73 | 16.61 | 16.58 | | |
| Channel | | | | 18607 | 18900 | 19193 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1909.3 | | |
| 1.4 | QPSK | 1 | 0 | 16.3 | 16.52 | 16.34 | 17.00 | 0 |
| 1.4 | QPSK | 1 | 3 | 16.43 | 16.55 | 16.46 | | |
| 1.4 | QPSK | 1 | 5 | 16.46 | 16.65 | 16.4 | | |
| 1.4 | QPSK | 3 | 0 | 16.45 | 16.56 | 16.27 | | |
| 1.4 | QPSK | 3 | 1 | 16.6 | 16.65 | 16.51 | | |
| 1.4 | QPSK | 3 | 3 | 16.44 | 16.61 | 16.55 | | |
| 1.4 | QPSK | 6 | 0 | 16.74 | 16.63 | 16.48 | 17.00 | 0-1 |
| 1.4 | 16QAM | 1 | 0 | 16.73 | 16.65 | 16.63 | 17.00 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 16.71 | 16.63 | 16.46 | | |
| 1.4 | 16QAM | 1 | 5 | 16.44 | 16.69 | 16.52 | | |
| 1.4 | 16QAM | 3 | 0 | 16.59 | 16.62 | 16.47 | | |
| 1.4 | 16QAM | 3 | 1 | 16.18 | 16.77 | 16.47 | | |
| 1.4 | 16QAM | 3 | 3 | 16.55 | 16.65 | 16.53 | | |
| 1.4 | 16QAM | 6 | 0 | 16.58 | 16.57 | 16.54 | 17.00 | 0-2 |



<LTE Band 4>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20050 | 20175 | 20300 | | |
| Frequency (MHz) | | | | 1720 | 1732.5 | 1745 | | |
| 20 | QPSK | 1 | 0 | 19.61 | 19.75 | 19.71 | 20.50 | 0 |
| 20 | QPSK | 1 | 49 | 19.92 | 20.32 | 19.79 | | |
| 20 | QPSK | 1 | 99 | 19.78 | 19.76 | 19.59 | | |
| 20 | QPSK | 50 | 0 | 19.88 | 20.03 | 20 | 20.50 | 0-1 |
| 20 | QPSK | 50 | 24 | 19.79 | 19.98 | 19.82 | | |
| 20 | QPSK | 50 | 50 | 19.87 | 19.92 | 19.79 | | |
| 20 | QPSK | 100 | 0 | 19.93 | 19.93 | 19.95 | 20.50 | 0-1 |
| 20 | 16QAM | 1 | 0 | 19.54 | 19.89 | 19.6 | | |
| 20 | 16QAM | 1 | 49 | 19.65 | 19.86 | 19.51 | | |
| 20 | 16QAM | 1 | 99 | 19.53 | 19.58 | 19.43 | 20.50 | 0-2 |
| 20 | 16QAM | 50 | 0 | 19.81 | 19.95 | 19.97 | | |
| 20 | 16QAM | 50 | 24 | 19.88 | 19.97 | 19.91 | | |
| 20 | 16QAM | 50 | 50 | 19.88 | 19.8 | 19.96 | 20.50 | 0-2 |
| 20 | 16QAM | 100 | 0 | 19.94 | 20 | 20 | | |
| Channel | | | | 20025 | 20175 | 20325 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1717.5 | 1732.5 | 1747.5 | | |
| 15 | QPSK | 1 | 0 | 19.43 | 19.8 | 19.58 | 20.50 | 0 |
| 15 | QPSK | 1 | 37 | 20.1 | 20.23 | 19.75 | | |
| 15 | QPSK | 1 | 74 | 19.77 | 19.74 | 19.56 | | |
| 15 | QPSK | 36 | 0 | 19.86 | 20.02 | 20.01 | 20.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 19.78 | 20 | 19.74 | | |
| 15 | QPSK | 36 | 39 | 19.78 | 19.94 | 19.84 | | |
| 15 | QPSK | 75 | 0 | 19.83 | 20.03 | 19.86 | 20.50 | 0-1 |
| 15 | 16QAM | 1 | 0 | 19.69 | 19.82 | 19.62 | | |
| 15 | 16QAM | 1 | 37 | 19.35 | 19.82 | 19.74 | | |
| 15 | 16QAM | 1 | 74 | 19.69 | 19.47 | 19.8 | 20.50 | 0-2 |
| 15 | 16QAM | 36 | 0 | 19.86 | 20 | 19.97 | | |
| 15 | 16QAM | 36 | 20 | 19.8 | 19.99 | 19.82 | | |
| 15 | 16QAM | 36 | 39 | 19.69 | 19.92 | 19.87 | 20.50 | 0-2 |
| 15 | 16QAM | 75 | 0 | 19.84 | 20.05 | 19.82 | | |



| Channel | | | | 20000 | 20175 | 20350 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1732.5 | 1750 | | |
| 10 | QPSK | 1 | 0 | 19.6 | 19.72 | 19.51 | 20.50 | 0 |
| 10 | QPSK | 1 | 25 | 19.75 | 19.7 | 19.85 | | |
| 10 | QPSK | 1 | 49 | 19.49 | 19.53 | 19.73 | | |
| 10 | QPSK | 25 | 0 | 19.79 | 20.03 | 19.78 | 20.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 19.82 | 20 | 19.83 | | |
| 10 | QPSK | 25 | 25 | 19.76 | 19.84 | 19.88 | | |
| 10 | QPSK | 50 | 0 | 19.86 | 19.96 | 19.78 | 20.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 19.81 | 19.65 | 19.38 | | |
| 10 | 16QAM | 1 | 25 | 19.61 | 19.81 | 19.86 | | |
| 10 | 16QAM | 1 | 49 | 19.43 | 19.5 | 19.81 | 20.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 19.99 | 20.04 | 19.76 | | |
| 10 | 16QAM | 25 | 12 | 20.02 | 19.9 | 19.84 | | |
| 10 | 16QAM | 25 | 25 | 19.95 | 20.01 | 19.9 | 20.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 19.85 | 20.02 | 19.87 | | |
| Channel | | | | 19975 | 20175 | 20375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1712.5 | 1732.5 | 1752.5 | | |
| 5 | QPSK | 1 | 0 | 19.56 | 19.59 | 19.43 | 20.50 | 0 |
| 5 | QPSK | 1 | 12 | 19.74 | 20.02 | 19.98 | | |
| 5 | QPSK | 1 | 24 | 19.45 | 19.42 | 19.49 | | |
| 5 | QPSK | 12 | 0 | 19.78 | 19.97 | 19.9 | 20.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 19.87 | 20.07 | 19.85 | | |
| 5 | QPSK | 12 | 13 | 19.69 | 19.82 | 19.8 | | |
| 5 | QPSK | 25 | 0 | 19.8 | 19.89 | 19.87 | 20.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 19.62 | 19.71 | 19.69 | | |
| 5 | 16QAM | 1 | 12 | 19.52 | 19.59 | 19.82 | | |
| 5 | 16QAM | 1 | 24 | 19.51 | 19.66 | 19.71 | 20.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 19.77 | 19.87 | 19.77 | | |
| 5 | 16QAM | 12 | 7 | 19.77 | 19.87 | 19.98 | | |
| 5 | 16QAM | 12 | 13 | 19.69 | 19.7 | 19.72 | 20.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 19.69 | 19.83 | 19.69 | | |



| Channel | | | | 19965 | 20175 | 20385 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1732.5 | 1753.5 | | |
| 3 | QPSK | 1 | 0 | 19.59 | 19.36 | 19.19 | 20.50 | 0 |
| 3 | QPSK | 1 | 8 | 19.83 | 19.73 | 19.77 | | |
| 3 | QPSK | 1 | 14 | 19.26 | 19.3 | 19.77 | | |
| 3 | QPSK | 8 | 0 | 19.75 | 20.02 | 19.62 | 20.50 | 0-1 |
| 3 | QPSK | 8 | 4 | 19.97 | 20.09 | 19.68 | | |
| 3 | QPSK | 8 | 7 | 19.69 | 19.88 | 19.78 | | |
| 3 | QPSK | 15 | 0 | 19.83 | 19.83 | 19.53 | 20.50 | 0-1 |
| 3 | 16QAM | 1 | 0 | 19.95 | 19.61 | 19.62 | | |
| 3 | 16QAM | 1 | 8 | 19.9 | 19.79 | 20.06 | | |
| 3 | 16QAM | 1 | 14 | 19.24 | 19.64 | 20.13 | 20.50 | 0-2 |
| 3 | 16QAM | 8 | 0 | 20.04 | 19.99 | 19.5 | | |
| 3 | 16QAM | 8 | 4 | 20.09 | 19.96 | 19.64 | | |
| 3 | 16QAM | 8 | 7 | 19.85 | 19.89 | 19.72 | 20.50 | 0-2 |
| 3 | 16QAM | 15 | 0 | 19.88 | 20.06 | 19.77 | | |
| Channel | | | | 19957 | 20175 | 20393 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1732.5 | 1754.3 | | |
| 1.4 | QPSK | 1 | 0 | 19.78 | 19.77 | 19.78 | 20.50 | 0 |
| 1.4 | QPSK | 1 | 3 | 19.68 | 20.2 | 19.47 | | |
| 1.4 | QPSK | 1 | 5 | 19.46 | 19.95 | 19.78 | | |
| 1.4 | QPSK | 3 | 0 | 20.11 | 20.08 | 20.06 | | |
| 1.4 | QPSK | 3 | 1 | 19.86 | 19.96 | 19.82 | | |
| 1.4 | QPSK | 3 | 3 | 19.93 | 20.07 | 19.89 | 20.50 | 0-1 |
| 1.4 | QPSK | 6 | 0 | 19.99 | 20.03 | 19.85 | | |
| 1.4 | 16QAM | 1 | 0 | 19.55 | 19.82 | 19.85 | 20.50 | 0-1 |
| 1.4 | 16QAM | 1 | 3 | 19.54 | 19.67 | 19.19 | | |
| 1.4 | 16QAM | 1 | 5 | 19.4 | 19.43 | 19.5 | | |
| 1.4 | 16QAM | 3 | 0 | 19.6 | 19.9 | 20.02 | | |
| 1.4 | 16QAM | 3 | 1 | 19.78 | 19.9 | 19.84 | | |
| 1.4 | 16QAM | 3 | 3 | 19.76 | 20.02 | 19.71 | | |
| 1.4 | 16QAM | 6 | 0 | 19.84 | 20.08 | 19.84 | 20.50 | 0-2 |



<LTE Band 7>

| BW [MHz] | Modulation | RB Size | RB Offset | Measured Power | | | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|----------------|-------|--------|---------------------|----------|
| | | | | Channel | 20850 | 21100 | | |
| Frequency (MHz) | | | | 2510 | 2535 | 2560 | | |
| 20 | QPSK | 1 | 0 | 18.66 | 18.72 | 18.49 | 19.50 | 0 |
| 20 | QPSK | 1 | 49 | 18.91 | 19.32 | 19.3 | | |
| 20 | QPSK | 1 | 99 | 18.63 | 18.99 | 18.83 | | |
| 20 | QPSK | 50 | 0 | 19.08 | 19.21 | 19.12 | 19.50 | 0-1 |
| 20 | QPSK | 50 | 24 | 19.07 | 19.2 | 19.06 | | |
| 20 | QPSK | 50 | 50 | 19 | 19.07 | 19.11 | | |
| 20 | QPSK | 100 | 0 | 18.99 | 19.18 | 19.04 | | |
| 20 | 16QAM | 1 | 0 | 18.73 | 18.57 | 18.51 | 19.50 | 0-1 |
| 20 | 16QAM | 1 | 49 | 18.68 | 18.69 | 19.16 | | |
| 20 | 16QAM | 1 | 99 | 18.67 | 18.55 | 18.69 | | |
| 20 | 16QAM | 50 | 0 | 19.04 | 19.15 | 19.16 | 19.50 | 0-2 |
| 20 | 16QAM | 50 | 24 | 18.94 | 19.18 | 19.13 | | |
| 20 | 16QAM | 50 | 50 | 19.06 | 19.14 | 19.1 | | |
| 20 | 16QAM | 100 | 0 | 19.05 | 19.14 | 19.01 | | |
| Channel | | | | 20825 | 21100 | 21375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2507.5 | 2535 | 2562.5 | | |
| 15 | QPSK | 1 | 0 | 18.74 | 18.98 | 18.82 | 19.50 | 0 |
| 15 | QPSK | 1 | 37 | 19.12 | 19.28 | 19.31 | | |
| 15 | QPSK | 1 | 74 | 18.81 | 18.9 | 18.93 | | |
| 15 | QPSK | 36 | 0 | 18.99 | 19.12 | 19.13 | 19.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 19.03 | 19.12 | 19.03 | | |
| 15 | QPSK | 36 | 39 | 18.99 | 19.05 | 19.12 | | |
| 15 | QPSK | 75 | 0 | 19.1 | 19.09 | 18.99 | | |
| 15 | 16QAM | 1 | 0 | 18.85 | 18.88 | 18.69 | 19.50 | 0-1 |
| 15 | 16QAM | 1 | 37 | 18.84 | 19.22 | 18.93 | | |
| 15 | 16QAM | 1 | 74 | 18.7 | 18.52 | 18.95 | | |
| 15 | 16QAM | 36 | 0 | 19.03 | 19.18 | 19.1 | 19.50 | 0-2 |
| 15 | 16QAM | 36 | 20 | 19.1 | 19.2 | 19.03 | | |
| 15 | 16QAM | 36 | 39 | 19.05 | 19.01 | 19.1 | | |
| 15 | 16QAM | 75 | 0 | 19.16 | 19.07 | 19.06 | | |



| Channel | | | | 20800 | 21100 | 21400 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2505 | 2535 | 2565 | | |
| 10 | QPSK | 1 | 0 | 18.81 | 18.75 | 18.83 | 19.50 | 0 |
| 10 | QPSK | 1 | 25 | 19.04 | 19.25 | 18.99 | | |
| 10 | QPSK | 1 | 49 | 18.8 | 18.63 | 18.69 | | |
| 10 | QPSK | 25 | 0 | 18.94 | 19.18 | 19.03 | 19.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 19.08 | 19.18 | 19.13 | | |
| 10 | QPSK | 25 | 25 | 19.01 | 19.16 | 19.05 | | |
| 10 | QPSK | 50 | 0 | 19.02 | 19.14 | 19.04 | 19.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 18.56 | 18.49 | 18.66 | | |
| 10 | 16QAM | 1 | 25 | 18.89 | 18.95 | 18.99 | | |
| 10 | 16QAM | 1 | 49 | 18.65 | 18.47 | 18.74 | 19.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 19.2 | 19.06 | 19 | | |
| 10 | 16QAM | 25 | 12 | 19.16 | 19.16 | 19.12 | | |
| 10 | 16QAM | 25 | 25 | 19.07 | 19.29 | 19.13 | 19.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 19.08 | 19.21 | 19.13 | | |
| Channel | | | | 20775 | 21100 | 21425 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2502.5 | 2535 | 2567.5 | | |
| 5 | QPSK | 1 | 0 | 18.55 | 18.78 | 18.87 | 19.50 | 0 |
| 5 | QPSK | 1 | 12 | 19.16 | 19.3 | 19.16 | | |
| 5 | QPSK | 1 | 24 | 18.51 | 18.85 | 18.61 | | |
| 5 | QPSK | 12 | 0 | 19.01 | 19.15 | 19.07 | 19.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 18.99 | 19.08 | 19.06 | | |
| 5 | QPSK | 12 | 13 | 18.94 | 19.12 | 18.96 | | |
| 5 | QPSK | 25 | 0 | 18.97 | 19.1 | 19.07 | 19.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 18.6 | 18.51 | 18.73 | | |
| 5 | 16QAM | 1 | 12 | 19.3 | 19.01 | 18.81 | | |
| 5 | 16QAM | 1 | 24 | 18.87 | 18.37 | 18.55 | 19.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 19.17 | 19.26 | 19.06 | | |
| 5 | 16QAM | 12 | 7 | 19.17 | 19.03 | 19.07 | | |
| 5 | 16QAM | 12 | 13 | 18.79 | 18.87 | 18.95 | 19.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 19.14 | 19.08 | 19.06 | | |



< Spot Check Full Power Mode >

<LTE Band 7>

| BW [MHz] | Modulation | RB Size | RB Offset | Measured Power | | | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|----------------|-------|--------|---------------------|----------|
| | | | | Channel | 20850 | 21100 | | |
| Frequency (MHz) | | | | 2510 | 2535 | 2560 | | |
| 20 | QPSK | 1 | 0 | 20.60 | 20.95 | 20.77 | 21.50 | 0 |
| 20 | QPSK | 1 | 49 | 20.85 | 21.18 | 20.88 | | |
| 20 | QPSK | 1 | 99 | 20.79 | 21.04 | 20.64 | | |
| 20 | QPSK | 50 | 0 | 20.07 | 20.12 | 20.08 | 20.50 | 0-1 |
| 20 | QPSK | 50 | 24 | 20.04 | 20.06 | 20.03 | | |
| 20 | QPSK | 50 | 50 | 19.94 | 20.07 | 20.03 | | |
| 20 | QPSK | 100 | 0 | 20.06 | 20.07 | 20.06 | 20.50 | 0-1 |
| 20 | 16QAM | 1 | 0 | 19.03 | 19.67 | 19.60 | | |
| 20 | 16QAM | 1 | 49 | 19.65 | 19.81 | 19.66 | | |
| 20 | 16QAM | 1 | 99 | 19.64 | 19.57 | 19.57 | 19.50 | 0-2 |
| 20 | 16QAM | 50 | 0 | 19.13 | 19.10 | 19.17 | | |
| 20 | 16QAM | 50 | 24 | 19.07 | 19.18 | 19.21 | | |
| 20 | 16QAM | 50 | 50 | 19.08 | 19.23 | 19.19 | 19.50 | 0-2 |
| 20 | 16QAM | 100 | 0 | 19.06 | 19.06 | 19.02 | | |
| Channel | | | | 20825 | 21100 | 21375 | | |
| Frequency (MHz) | | | | 2507.5 | 2535 | 2562.5 | | |
| 15 | QPSK | 1 | 0 | 20.95 | 21.16 | 20.67 | 21.50 | 0 |
| 15 | QPSK | 1 | 37 | 21.14 | 21.26 | 21.39 | | |
| 15 | QPSK | 1 | 74 | 20.97 | 21.06 | 21.00 | | |
| 15 | QPSK | 36 | 0 | 20.10 | 20.08 | 20.08 | 20.50 | 0-1 |
| 15 | QPSK | 36 | 20 | 20.19 | 20.11 | 20.19 | | |
| 15 | QPSK | 36 | 39 | 20.07 | 20.13 | 20.04 | | |
| 15 | QPSK | 75 | 0 | 20.13 | 20.11 | 20.08 | 20.50 | 0-1 |
| 15 | 16QAM | 1 | 0 | 19.74 | 19.75 | 19.64 | | |
| 15 | 16QAM | 1 | 37 | 20.17 | 19.91 | 19.70 | | |
| 15 | 16QAM | 1 | 74 | 19.82 | 19.40 | 19.60 | 19.50 | 0-2 |
| 15 | 16QAM | 36 | 0 | 19.11 | 19.09 | 19.09 | | |
| 15 | 16QAM | 36 | 20 | 19.13 | 19.24 | 19.25 | | |
| 15 | 16QAM | 36 | 39 | 19.11 | 19.10 | 19.02 | 19.50 | 0-2 |
| 15 | 16QAM | 75 | 0 | 19.16 | 19.24 | 19.25 | | |



| Channel | | | | 20800 | 21100 | 21400 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2505 | 2535 | 2565 | | |
| 10 | QPSK | 1 | 0 | 20.90 | 20.77 | 20.86 | 21.50 | 0 |
| 10 | QPSK | 1 | 25 | 21.29 | 21.32 | 21.05 | | |
| 10 | QPSK | 1 | 49 | 20.77 | 20.88 | 20.73 | | |
| 10 | QPSK | 25 | 0 | 20.07 | 20.09 | 20.15 | 20.50 | 0-1 |
| 10 | QPSK | 25 | 12 | 20.14 | 20.17 | 20.07 | | |
| 10 | QPSK | 25 | 25 | 20.12 | 20.18 | 20.09 | | |
| 10 | QPSK | 50 | 0 | 20.15 | 20.13 | 20.10 | 20.50 | 0-1 |
| 10 | 16QAM | 1 | 0 | 20.07 | 19.41 | 19.58 | | |
| 10 | 16QAM | 1 | 25 | 20.33 | 20.13 | 20.08 | | |
| 10 | 16QAM | 1 | 49 | 19.53 | 19.40 | 19.51 | 19.50 | 0-2 |
| 10 | 16QAM | 25 | 0 | 18.98 | 19.14 | 19.42 | | |
| 10 | 16QAM | 25 | 12 | 19.27 | 19.12 | 19.12 | | |
| 10 | 16QAM | 25 | 25 | 19.27 | 19.11 | 19.06 | 19.50 | 0-2 |
| 10 | 16QAM | 50 | 0 | 19.00 | 19.18 | 19.11 | | |
| Channel | | | | 20775 | 21100 | 21425 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2502.5 | 2535 | 2567.5 | | |
| 5 | QPSK | 1 | 0 | 20.51 | 20.62 | 20.73 | 21.50 | 0 |
| 5 | QPSK | 1 | 12 | 21.19 | 21.06 | 21.26 | | |
| 5 | QPSK | 1 | 24 | 20.61 | 20.90 | 20.71 | | |
| 5 | QPSK | 12 | 0 | 20.11 | 20.08 | 19.99 | 20.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 20.15 | 20.17 | 20.08 | | |
| 5 | QPSK | 12 | 13 | 20.03 | 20.11 | 20.01 | | |
| 5 | QPSK | 25 | 0 | 20.01 | 20.05 | 19.94 | 20.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 19.71 | 19.47 | 19.67 | | |
| 5 | 16QAM | 1 | 12 | 20.21 | 20.2 | 19.84 | | |
| 5 | 16QAM | 1 | 24 | 19.72 | 19.43 | 19.67 | 19.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 19.05 | 18.93 | 18.87 | | |
| 5 | 16QAM | 12 | 7 | 19.08 | 19.11 | 19.16 | | |
| 5 | 16QAM | 12 | 13 | 19.16 | 19.3 | 19.01 | 19.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 19.18 | 19.31 | 19.02 | | |



<LTE Band 17>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23780 | 23790 | 23800 | 23.50 | 0 |
| Frequency (MHz) | | | | 709 | 710 | 711 | | |
| 10 | QPSK | 1 | 0 | 22.86 | 22.75 | 22.8 | | |
| 10 | QPSK | 1 | 25 | 23.22 | 22.98 | 23.21 | 22.50 | 0-1 |
| 10 | QPSK | 1 | 49 | 23.01 | 22.96 | 23.00 | | |
| 10 | QPSK | 25 | 0 | 22.21 | 22.16 | 22.19 | | |
| 10 | QPSK | 25 | 12 | 22.19 | 22.12 | 22.18 | 22.50 | 0-1 |
| 10 | QPSK | 25 | 25 | 22.16 | 22.15 | 22.12 | | |
| 10 | QPSK | 50 | 0 | 22.22 | 22.13 | 22.2 | | |
| 10 | 16QAM | 1 | 0 | 21.56 | 21.67 | 21.73 | 22.50 | 0-1 |
| 10 | 16QAM | 1 | 25 | 22.02 | 21.68 | 22.24 | | |
| 10 | 16QAM | 1 | 49 | 21.76 | 21.65 | 21.78 | | |
| 10 | 16QAM | 25 | 0 | 21.12 | 21.03 | 21.07 | 21.50 | 0-2 |
| 10 | 16QAM | 25 | 12 | 21.29 | 21.26 | 21.15 | | |
| 10 | 16QAM | 25 | 25 | 21.13 | 21.03 | 21.18 | | |
| 10 | 16QAM | 50 | 0 | 21.08 | 21.08 | 21.15 | 21.50 | 0-2 |
| Channel | | | | 23755 | 23790 | 23825 | | |
| Frequency (MHz) | | | | 706.5 | 710 | 713.5 | | |
| 5 | QPSK | 1 | 0 | 22.92 | 22.93 | 22.72 | 23.50 | 0 |
| 5 | QPSK | 1 | 12 | 23.21 | 23.2 | 23.12 | | |
| 5 | QPSK | 1 | 24 | 22.80 | 23.33 | 23.15 | | |
| 5 | QPSK | 12 | 0 | 22.15 | 22.15 | 22.19 | 22.50 | 0-1 |
| 5 | QPSK | 12 | 7 | 22.18 | 22.16 | 22.21 | | |
| 5 | QPSK | 12 | 13 | 22.12 | 22.15 | 22.19 | | |
| 5 | QPSK | 25 | 0 | 22.06 | 22.05 | 22.05 | 22.50 | 0-1 |
| 5 | 16QAM | 1 | 0 | 21.83 | 21.59 | 21.70 | | |
| 5 | 16QAM | 1 | 12 | 21.86 | 21.72 | 22.31 | | |
| 5 | 16QAM | 1 | 24 | 21.39 | 21.79 | 21.71 | 21.50 | 0-2 |
| 5 | 16QAM | 12 | 0 | 21.05 | 20.94 | 20.96 | | |
| 5 | 16QAM | 12 | 7 | 21.07 | 21.19 | 21.09 | | |
| 5 | 16QAM | 12 | 13 | 21.10 | 21.35 | 21.26 | 21.50 | 0-2 |
| 5 | 16QAM | 25 | 0 | 21.13 | 21.14 | 21.13 | | |

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN>

| | Mode | Channel | Frequency (MHz) | Data Rate | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|--------------|---------|-----------------|-----------|---------------------|---------------|--------------|
| 2.4GHz WLAN | 802.11b | CH 1 | 2412 | 1Mbps | 17.37 | 17.5 | 97.94 |
| | | CH 6 | 2437 | | 16.53 | 17.5 | |
| | | CH 11 | 2462 | | 17.88 | 18 | |
| | 802.11g | CH 1 | 2412 | 6Mbps | 12.68 | 13.5 | 87.04 |
| | | CH 6 | 2437 | | 12.02 | 13.5 | |
| | | CH 11 | 2462 | | 13.25 | 13.5 | |
| | 802.11n-HT20 | CH 1 | 2412 | MCS0 | 12.74 | 13.5 | 87 |
| | | CH 6 | 2437 | | 12.07 | 13.5 | |
| | | CH 11 | 2462 | | 13.28 | 13.5 | |
| | 802.11n-HT40 | CH 3 | 2422 | MCS0 | 12.53 | 13.5 | 76.22 |
| | | CH 6 | 2437 | | 12.46 | 13.5 | |
| | | CH 9 | 2452 | | 13.11 | 13.5 | |



<5GHz WLAN >

| | Mode | Channel | Frequency (MHz) | Data Rate | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|----------------|----------------|---------|-----------------|-----------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11a | CH 36 | 5180 | 6Mbps | 12.14 | 13.5 | 87.5 |
| | | CH 40 | 5200 | | 12.30 | 13.5 | |
| | | CH 44 | 5220 | | 12.21 | 13.5 | |
| | | CH 48 | 5240 | | 12.45 | 13.5 | |
| | 802.11n-HT20 | CH 36 | 5180 | MCS0 | 12.41 | 13 | 86.52 |
| | | CH 40 | 5200 | | 12.38 | 13 | |
| | | CH 44 | 5220 | | 12.42 | 13 | |
| | | CH 48 | 5240 | | 11.96 | 13 | |
| | 802.11n-HT40 | CH 38 | 5190 | MCS0 | 12.44 | 13 | 75.95 |
| | | CH 46 | 5230 | | 11.88 | 13 | |
| | 802.11ac-VHT20 | CH 36 | 5180 | MCS0 | 12.39 | 13 | 83.56 |
| | | CH 40 | 5200 | | 12.25 | 13 | |
| | | CH 44 | 5220 | | 12.34 | 13 | |
| | | CH 48 | 5240 | | 11.83 | 13 | |
| | 802.11ac-VHT40 | CH 38 | 5190 | MCS0 | 12.42 | 13 | 71.22 |
| | | CH 46 | 5230 | | 12.05 | 13 | |
| 802.11ac-VHT80 | CH 42 | 5210 | MCS0 | 12.41 | 13 | 55.16 | |



| | Mode | Channel | Frequency (MHz) | Data Rate | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|----------------|----------------|---------|-----------------|-----------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11a | CH 52 | 5260 | 6Mbps | 12.43 | 13.5 | 87.5 |
| | | CH 56 | 5280 | | 12.02 | 13.5 | |
| | | CH 60 | 5300 | | 12.04 | 13.5 | |
| | | CH 64 | 5320 | | 11.53 | 13.5 | |
| | 802.11n-HT20 | CH 52 | 5260 | MCS0 | 12.30 | 13 | 86.52 |
| | | CH 56 | 5280 | | 11.86 | 13 | |
| | | CH 60 | 5300 | | 11.91 | 13 | |
| | | CH 64 | 5320 | | 11.43 | 13 | |
| | 802.11n-HT40 | CH 54 | 5270 | MCS0 | 12.41 | 13 | 75.95 |
| | | CH 62 | 5310 | | 11.85 | 13 | |
| | 802.11ac-VHT20 | CH 52 | 5260 | MCS0 | 12.40 | 13 | 83.56 |
| | | CH 56 | 5280 | | 12.06 | 13 | |
| | | CH 60 | 5300 | | 12.10 | 13 | |
| | | CH 64 | 5320 | | 11.59 | 13 | |
| | 802.11ac-VHT40 | CH 54 | 5270 | MCS0 | 12.27 | 13 | 71.22 |
| | | CH 62 | 5310 | | 11.97 | 13 | |
| 802.11ac-VHT80 | CH 58 | 5290 | MCS0 | 12.42 | 13 | 55.16 | |

| | Mode | Channel | Frequency (MHz) | Data Rate | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|----------------|----------------|---------|-----------------|-----------|---------------------|---------------|--------------|
| 5.5GHz WLAN | 802.11a | CH 100 | 5500 | 6Mbps | 11.33 | 12 | 87.5 |
| | | CH 120 | 5600 | | 10.59 | 12 | |
| | | CH 124 | 5620 | | 10.66 | 12 | |
| | | CH 144 | 5720 | | 11.28 | 12 | |
| | 802.11n-HT20 | CH 100 | 5500 | MCS0 | 11.00 | 11.5 | 86.52 |
| | | CH 120 | 5600 | | 10.50 | 11.5 | |
| | | CH 124 | 5620 | | 10.57 | 11.5 | |
| | | CH 144 | 5720 | | 11.27 | 11.5 | |
| | 802.11n-HT40 | CH 102 | 5510 | MCS0 | 11.11 | 11.5 | 75.95 |
| | | CH 118 | 5590 | | 11.04 | 11.5 | |
| | | CH 126 | 5630 | | 11.00 | 11.5 | |
| | | CH 142 | 5710 | | 9.98 | 11.5 | |
| | 802.11ac-VHT20 | CH 100 | 5500 | MCS0 | 11.12 | 11.5 | 83.56 |
| | | CH 120 | 5600 | | 10.63 | 11.5 | |
| | | CH 124 | 5620 | | 10.74 | 11.5 | |
| | | CH 144 | 5720 | | 11.05 | 11.5 | |
| | 802.11ac-VHT40 | CH 102 | 5510 | MCS0 | 11.12 | 11.5 | 71.22 |
| | | CH 118 | 5590 | | 11.07 | 11.5 | |
| | | CH 126 | 5630 | | 11.02 | 11.5 | |
| | | CH 142 | 5710 | | 9.96 | 11.5 | |
| 802.11ac-VHT80 | CH 106 | 5530 | MCS0 | 11.07 | 11.5 | 55.16 | |
| | CH 122 | 5610 | | 10.71 | 11.5 | | |
| | CH 138 | 5690 | | 8.47 | 10.0 | | |

| | Mode | Channel | Frequency (MHz) | Data Rate | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|----------------|----------------|---------|-----------------|-----------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11a | CH 149 | 5745 | 6Mbps | 12.15 | 13 | 87.5 |
| | | CH 153 | 5765 | | 10.93 | 12.5 | |
| | | CH 157 | 5785 | | 11.44 | 13 | |
| | | CH 161 | 5805 | | 11.60 | 13 | |
| | 802.11n-HT20 | CH 149 | 5745 | MCS0 | 11.51 | 12.5 | 86.52 |
| | | CH 153 | 5765 | | 10.86 | 12.5 | |
| | | CH 157 | 5785 | | 11.44 | 12.5 | |
| | | CH 161 | 5805 | | 12.05 | 12.5 | |
| | 802.11n-HT40 | CH 151 | 5755 | MCS0 | 11.42 | 12.5 | 75.95 |
| | | CH 159 | 5795 | | 11.91 | 12.5 | |
| | 802.11ac-VHT20 | CH 149 | 5745 | MCS0 | 11.73 | 12.5 | 83.56 |
| | | CH 153 | 5765 | | 11.10 | 12.5 | |
| | | CH 157 | 5785 | | 11.56 | 12.5 | |
| | | CH 161 | 5805 | | 12.14 | 12.5 | |
| | 802.11ac-VHT40 | CH 151 | 5755 | MCS0 | 11.50 | 12.5 | 71.22 |
| | | CH 159 | 5795 | | 12.14 | 12.5 | |
| 802.11ac-VHT80 | CH 155 | 5775 | MCS0 | 12.07 | 12.5 | 55.16 | |

13. Bluetooth Exclusions Applied

| Mode Band | Average power(dBm) | | |
|------------------|--------------------|-------------------|-------------------|
| | Bluetooth v3.0+EDR | Bluetooth v4.0 LE | Bluetooth v4.2 LE |
| 2.4GHz Bluetooth | 6.0 | 1.0 | 1.0 |

Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

| Bluetooth Max Power (dBm) | Separation Distance (mm) | Frequency (GHz) | exclusion thresholds |
|---------------------------|--------------------------|-----------------|----------------------|
| 6.0 | 5 | 2.48 | 1.3 |

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.3 which is ≤ 3, SAR testing is not required.

14. Antenna Location

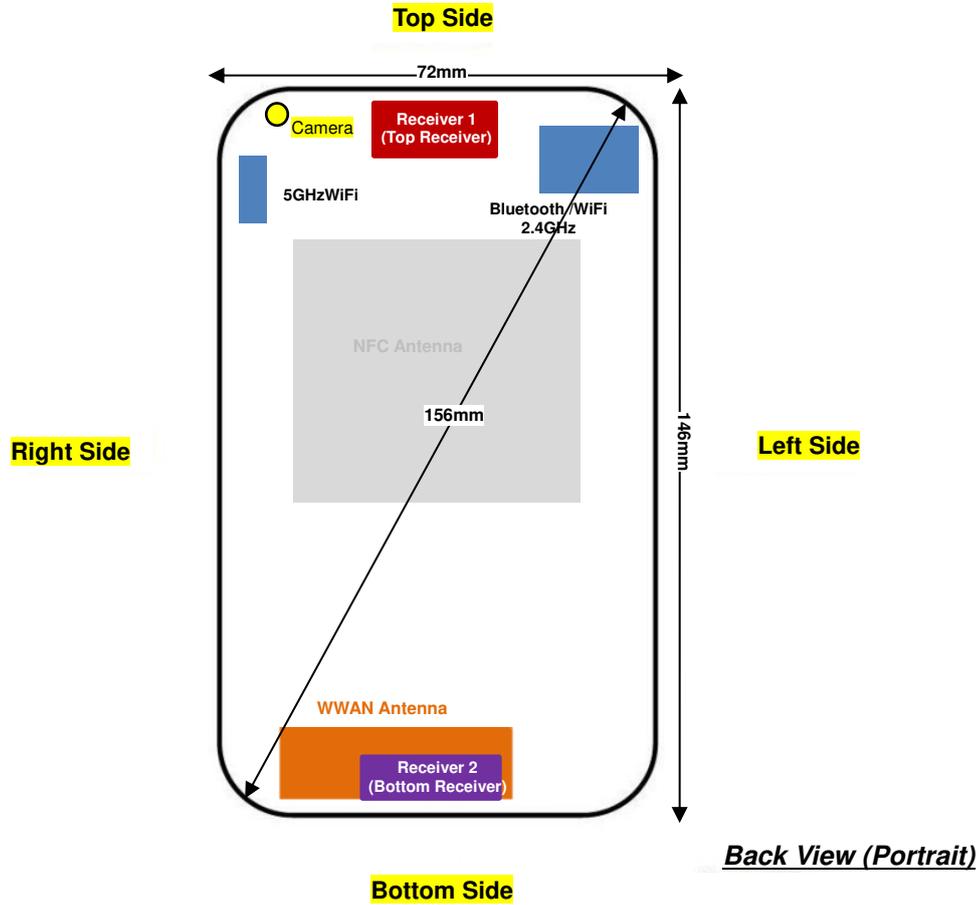

| Distance of the Antenna to the EUT surface/edge | | | | | | |
|---|--------|--------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| WWAN | ≤ 25mm | ≤ 25mm | 127mm | ≤ 25mm | ≤ 25mm | ≤ 25mm |
| Bluetooth & 2.4GHz WLAN | ≤ 25mm | ≤ 25mm | ≤ 25mm | 126mm | 52mm | ≤ 25mm |
| 5GHz WLAN | ≤ 25mm | ≤ 25mm | ≤ 25mm | 124mm | ≤ 25mm | 64mm |

| Positions for SAR tests; Hotspot mode | | | | | | |
|---------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| WWAN | Yes | Yes | No | Yes | Yes | Yes |
| Bluetooth & 2.4GHz WLAN | Yes | Yes | Yes | No | No | Yes |
| 5GHz WLAN | Yes | Yes | Yes | No | Yes | No |

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. The device has two receives function, the detail position please see the section 14, according to the EUT's character and software control, only top receiver can work. So for head SAR test, the receiver 1 is selected.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850 and the GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 2 Tx slot due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 Head and Body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

| Plot No. | Band | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------|------------------|---------------|------------------|-----|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | GSM850 | GPRS(3 Tx slots) | Right Cheek | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.04 | #1 | - | 0.245 | 0.275 |
| | GSM850 | GPRS(3 Tx slots) | Right Tilted | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.1 | #1 | - | 0.150 | 0.168 |
| #01 | GSM850 | GPRS(3 Tx slots) | Left Cheek | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.02 | #1 | - | 0.316 | 0.355 |
| | GSM850 | GPRS(3 Tx slots) | Left Tilted | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.01 | #1 | - | 0.147 | 0.165 |
| | GSM850 | GPRS(3 Tx slots) | Left Cheek | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | -0.05 | #2 | - | 0.305 | 0.342 |
| | GSM850 | GPRS(3 Tx slots) | Left Cheek | Receiver 1 | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.02 | #1 | With | 0.227 | 0.255 |
| #02 | GSM1900 | GPRS(4 Tx slots) | Right Cheek | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.09 | #1 | - | 0.242 | 0.259 |
| | GSM1900 | GPRS(4 Tx slots) | Right Tilted | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.09 | #1 | - | 0.045 | 0.048 |
| | GSM1900 | GPRS(4 Tx slots) | Left Cheek | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.09 | #1 | - | 0.126 | 0.135 |
| | GSM1900 | GPRS(4 Tx slots) | Left Tilted | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.09 | #1 | - | 0.079 | 0.084 |
| | GSM1900 | GPRS(4 Tx slots) | Right Cheek | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.05 | #2 | - | 0.241 | 0.258 |
| | GSM1900 | GPRS(4 Tx slots) | Right Cheek | Receiver 1 | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.08 | #1 | With | 0.193 | 0.206 |



<WCDMA SAR>

| Plot No. | Band | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------------|--------------|---------------|------------------|---------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | WCDMA Band V | RMC 12.2Kbps | Right Cheek | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.07 | #1 | - | 0.207 | 0.233 |
| | WCDMA Band V | RMC 12.2Kbps | Right Tilted | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.03 | #1 | - | 0.117 | 0.132 |
| #03 | WCDMA Band V | RMC 12.2Kbps | Left Cheek | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.06 | #1 | - | 0.268 | 0.302 |
| | WCDMA Band V | RMC 12.2Kbps | Left Tilted | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.04 | #1 | - | 0.112 | 0.126 |
| | WCDMA Band V | RMC 12.2Kbps | Left Cheek | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.07 | #2 | - | 0.261 | 0.294 |
| | WCDMA Band V | RMC 12.2Kbps | Left Cheek | Receiver 1 | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.09 | #1 | With | 0.225 | 0.254 |
| #04 | WCDMA Band IV | RMC 12.2Kbps | Right Cheek | Receiver 1 | 1513 | 1752.6 | 23.53 | 24 | 1.114 | -0.13 | #1 | - | 0.371 | 0.413 |
| | WCDMA Band IV | RMC 12.2Kbps | Right Tilted | Receiver 1 | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.01 | #1 | - | 0.052 | 0.058 |
| | WCDMA Band IV | RMC 12.2Kbps | Left Cheek | Receiver 1 | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.06 | #1 | - | 0.155 | 0.173 |
| | WCDMA Band IV | RMC 12.2Kbps | Left Tilted | Receiver 1 | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.05 | #1 | - | 0.155 | 0.173 |
| | WCDMA Band IV | RMC 12.2Kbps | Right Cheek | Receiver 1 | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.05 | #2 | - | 0.328 | 0.365 |
| | WCDMA Band IV | RMC 12.2Kbps | Right Cheek | Receiver 1 | 1513 -1 | 1752.6 | 23.53 | 24 | 1.114 | -0.16 | #1 | With | 0.220 | 0.245 |
| #05 | WCDMA Band II | RMC 12.2Kbps | Right Cheek | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.1 | #1 | - | 0.337 | 0.401 |
| | WCDMA Band II | RMC 12.2Kbps | Right Tilted | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.04 | #1 | - | 0.052 | 0.062 |
| | WCDMA Band II | RMC 12.2Kbps | Left Cheek | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.04 | #1 | - | 0.147 | 0.175 |
| | WCDMA Band II | RMC 12.2Kbps | Left Tilted | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.02 | #1 | - | 0.095 | 0.113 |
| | WCDMA Band II | RMC 12.2Kbps | Right Cheek | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | -0.08 | #2 | - | 0.298 | 0.354 |
| | WCDMA Band II | RMC 12.2Kbps | Right Cheek | Receiver 1 | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.07 | #1 | With | 0.214 | 0.254 |



<LTE SAR>

| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|---------|-----------|------|---------------|------------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Right Cheek | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.01 | #1 | - | 0.091 | 0.104 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Right Tilted | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.01 | #1 | - | 0.047 | 0.054 |
| #06 | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.05 | #1 | - | 0.113 | 0.129 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Left Tilted | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.03 | #1 | - | 0.064 | 0.073 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Right Cheek | Receiver 1 | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.01 | #1 | - | 0.088 | 0.099 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Right Tilted | Receiver 1 | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.07 | #1 | - | 0.034 | 0.038 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Left Cheek | Receiver 1 | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.02 | #1 | - | 0.091 | 0.103 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Left Tilted | Receiver 1 | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.03 | #1 | - | 0.047 | 0.053 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.02 | #2 | - | 0.106 | 0.121 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.08 | #1 | With | 0.111 | 0.127 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Right Cheek | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | -0.05 | #1 | - | 0.152 | 0.171 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Right Tilted | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.06 | #1 | - | 0.081 | 0.091 |
| #07 | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.09 | #1 | - | 0.236 | 0.265 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Left Tilted | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.05 | #1 | - | 0.119 | 0.134 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Right Cheek | Receiver 1 | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.01 | #1 | - | 0.167 | 0.192 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Right Tilted | Receiver 1 | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.15 | #1 | - | 0.101 | 0.116 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Left Cheek | Receiver 1 | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.02 | #1 | - | 0.203 | 0.234 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Left Tilted | Receiver 1 | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.04 | #1 | - | 0.098 | 0.113 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.05 | #2 | - | 0.218 | 0.245 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Left Cheek | Receiver 1 | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.11 | #1 | With | 0.175 | 0.196 |
| #08 | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.19 | #1 | - | 0.433 | 0.469 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Right Tilted | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.03 | #1 | - | 0.054 | 0.059 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.01 | #1 | - | 0.151 | 0.164 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Left Tilted | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | -0.03 | #1 | - | 0.108 | 0.117 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Right Cheek | Receiver 1 | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.18 | #1 | - | 0.181 | 0.197 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Right Tilted | Receiver 1 | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.04 | #1 | - | 0.045 | 0.049 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Left Cheek | Receiver 1 | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.09 | #1 | - | 0.124 | 0.135 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Left Tilted | Receiver 1 | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.01 | #1 | - | 0.076 | 0.083 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | -0.13 | #2 | - | 0.365 | 0.396 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.09 | #1 | With | 0.219 | 0.237 |



| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|----------|---------|-----------|------|---------------|------------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| #09 | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.04 | #1 | - | 0.411 | 0.464 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Right Tilted | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.02 | #1 | - | 0.071 | 0.080 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.01 | #1 | - | 0.139 | 0.157 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Left Tilted | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.01 | #1 | - | 0.106 | 0.120 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Right Cheek | Receiver 1 | 18900 | 1880 | 21.63 | 22.5 | 1.222 | 0.04 | #1 | - | 0.186 | 0.227 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Right Tilted | Receiver 1 | 18900 | 1880 | 21.63 | 22.5 | 1.222 | 0.02 | #1 | - | 0.057 | 0.069 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Left Cheek | Receiver 1 | 18900 | 1880 | 21.63 | 22.5 | 1.222 | 0.03 | #1 | - | 0.113 | 0.138 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Left Tilted | Receiver 1 | 18900 | 1880 | 21.63 | 22.5 | 1.222 | -0.02 | #1 | - | 0.080 | 0.097 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | -0.04 | #2 | - | 0.370 | 0.418 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.01 | #1 | With | 0.220 | 0.249 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.05 | #1 | - | 0.068 | 0.071 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Right Tilted | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.03 | #1 | - | 0.044 | 0.046 |
| #10 | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.05 | #1 | - | 0.165 | 0.173 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Tilted | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.08 | #1 | - | 0.034 | 0.036 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Right Cheek | Receiver 1 | 20850 | 2510 | 22.17 | 22.5 | 1.079 | -0.08 | #1 | - | 0.059 | 0.064 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Right Tilted | Receiver 1 | 20850 | 2510 | 22.17 | 22.5 | 1.079 | -0.08 | #1 | - | 0.034 | 0.037 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Left Cheek | Receiver 1 | 20850 | 2510 | 22.17 | 22.5 | 1.079 | 0.15 | #1 | - | 0.135 | 0.146 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Left Tilted | Receiver 1 | 20850 | 2510 | 22.17 | 22.5 | 1.079 | 0.03 | #1 | - | 0.028 | 0.030 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | -0.1 | #2 | - | 0.163 | 0.171 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.03 | #1 | With | 0.148 | 0.155 |

<WLAN SAR>

| Plot No. | Band | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Peak SAR | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|---------------|---------------|------------------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|----------|------------------|---------|---------|------------------------|------------------------|
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Cheek | Receiver 1 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 1.570 | 0.05 | #1 | - | 1.110 | 1.165 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Tilted | Receiver 1 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.968 | 0.16 | #1 | - | 0.787 | 0.826 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Left Cheek | Receiver 1 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.757 | | #1 | - | | |
| | WLAN 2.4GHz | 802.11b 1Mbps | Left Tilted | Receiver 1 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.797 | -0.04 | #1 | - | 0.559 | 0.587 |
| #11 | WLAN 2.4GHz | 802.11b 1Mbps | Right Cheek | Receiver 1 | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | | 0.01 | #1 | - | 1.120 | 1.178 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Tilted | Receiver 1 | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | | 0.01 | #1 | - | 0.877 | 0.923 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Cheek | Receiver 1 | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | | 0.01 | #2 | - | 1.100 | 1.157 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Cheek | Receiver 1 | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | | 0.03 | #1 | With | 0.730 | 0.768 |



| Plot No. | Band | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Peak SAR | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|---------------|---------------|------------------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|----------|------------------|---------|---------|------------------------|------------------------|
| | WLAN 5.3GHz | 802.11a 6Mbps | Right Cheek | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.267 | | #1 | - | | |
| | WLAN 5.3GHz | 802.11a 6Mbps | Right Tilted | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.222 | | #1 | - | | |
| #12 | WLAN 5.3GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.609 | -0.01 | #1 | - | 0.198 | 0.290 |
| | WLAN 5.3GHz | 802.11a 6Mbps | Left Tilted | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.270 | | #1 | - | | |
| | WLAN 5.3GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.388 | 0.08 | #2 | - | 0.067 | 0.098 |
| | WLAN 5.3GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.259 | -0.05 | #1 | With | 0.041 | 0.060 |
| | WLAN 5.5GHz | 802.11a 6Mbps | Right Cheek | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.194 | | #1 | - | | |
| | WLAN 5.5GHz | 802.11a 6Mbps | Right Tilted | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.127 | | #1 | - | | |
| #13 | WLAN 5.5GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.485 | -0.05 | #1 | - | 0.083 | 0.111 |
| | WLAN 5.5GHz | 802.11a 6Mbps | Left Tilted | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.261 | | #1 | - | | |
| | WLAN 5.5GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.431 | 0.02 | #2 | - | 0.050 | 0.067 |
| | WLAN 5.5GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.174 | -0.08 | #1 | With | 0.040 | 0.053 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Right Cheek | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.181 | | #1 | - | | |
| | WLAN 5.8GHz | 802.11a 6Mbps | Right Tilted | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.126 | | #1 | - | | |
| #14 | WLAN 5.8GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.444 | -0.06 | #1 | - | 0.092 | 0.128 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Left Tilted | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.416 | | #1 | - | | |
| | WLAN 5.8GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.316 | -0.03 | #2 | - | 0.067 | 0.093 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Left Cheek | Receiver 1 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.197 | -0.09 | #1 | With | 0.059 | 0.082 |



15.2 Hotspot SAR

<GSM SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------|------------------|---------------|----------|-----------------|-----|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | GSM850 | GPRS(3 Tx slots) | Front | 10 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.08 | #1 | - | 0.461 | 0.517 |
| | GSM850 | GPRS(3 Tx slots) | Back | 10 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.07 | #1 | - | 0.731 | 0.820 |
| | GSM850 | GPRS(3 Tx slots) | Left Side | 10 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.07 | #1 | - | 0.492 | 0.552 |
| | GSM850 | GPRS(3 Tx slots) | Right Side | 10 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.1 | #1 | - | 0.262 | 0.294 |
| | GSM850 | GPRS(3 Tx slots) | Bottom Side | 10 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.05 | #1 | - | 0.246 | 0.276 |
| | GSM850 | GPRS(3 Tx slots) | Back | 10 | OFF | 128 | 824.2 | 29.36 | 30 | 1.159 | 0.03 | #1 | - | 0.758 | 0.878 |
| #15 | GSM850 | GPRS(3 Tx slots) | Back | 10 | OFF | 251 | 848.8 | 29.24 | 30 | 1.191 | 0.01 | #1 | - | 0.746 | 0.889 |
| | GSM850 | GPRS(3 Tx slots) | Back | 10 | OFF | 251 | 848.8 | 29.24 | 30 | 1.191 | 0.04 | #2 | - | 0.724 | 0.862 |
| | GSM850 | GPRS(3 Tx slots) | Back | 10 | OFF | 251 | 848.8 | 29.24 | 30 | 1.191 | 0.08 | #1 | With | 0.438 | 0.522 |
| | GSM1900 | GPRS(2 Tx slots) | Front | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | -0.02 | #1 | - | 0.542 | 0.618 |
| | GSM1900 | GPRS(2 Tx slots) | Back | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | -0.06 | #1 | - | 0.574 | 0.655 |
| | GSM1900 | GPRS(2 Tx slots) | Left Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | 0.01 | #1 | - | 0.065 | 0.074 |
| | GSM1900 | GPRS(2 Tx slots) | Right Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | -0.03 | #1 | - | 0.102 | 0.116 |
| #16 | GSM1900 | GPRS(2 Tx slots) | Bottom Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | -0.04 | #1 | - | 0.940 | 1.072 |
| | GSM1900 | GPRS(2 Tx slots) | Bottom Side | 10 | On | 512 | 1850.2 | 24.92 | 25.5 | 1.143 | 0.07 | #1 | - | 0.711 | 0.813 |
| | GSM1900 | GPRS(2 Tx slots) | Bottom Side | 10 | On | 661 | 1880 | 24.91 | 25.5 | 1.146 | -0.08 | #1 | - | 0.798 | 0.914 |
| | GSM1900 | GPRS(2 Tx slots) | Bottom Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | 0.03 | #2 | - | 0.785 | 0.895 |
| | GSM1900 | GPRS(2 Tx slots) | Bottom Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | 0.08 | #1 | With | 0.690 | 0.787 |



<WCDMA SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------------|--------------|---------------|----------|-----------------|------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| #17 | WCDMA Band V | RMC 12.2Kbps | Front | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.02 | #1 | - | 0.394 | 0.444 |
| | WCDMA Band V | RMC 12.2Kbps | Back | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.05 | #1 | - | 0.624 | 0.703 |
| | WCDMA Band V | RMC 12.2Kbps | Left Side | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.04 | #1 | - | 0.363 | 0.409 |
| | WCDMA Band V | RMC 12.2Kbps | Right Side | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.04 | #1 | - | 0.172 | 0.194 |
| | WCDMA Band V | RMC 12.2Kbps | Bottom Side | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.13 | #1 | - | 0.208 | 0.234 |
| | WCDMA Band V | RMC 12.2Kbps | Back | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.08 | #2 | - | 0.612 | 0.690 |
| | WCDMA Band V | RMC 12.2Kbps | Back | 10 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.09 | #1 | With | 0.469 | 0.529 |
| | WCDMA Band IV | RMC 12.2Kbps | Front | 10 | On | 1513 | 1752.6 | 20.53 | 21 | 1.114 | -0.08 | #1 | - | 0.566 | 0.631 |
| | WCDMA Band IV | RMC 12.2Kbps | Back | 10 | On | 1513 | 1752.6 | 20.53 | 21 | 1.114 | 0.05 | #1 | - | 0.638 | 0.711 |
| | WCDMA Band IV | RMC 12.2Kbps | Left Side | 10 | On | 1513 | 1752.6 | 20.53 | 21 | 1.114 | -0.08 | #1 | - | 0.068 | 0.076 |
| | WCDMA Band IV | RMC 12.2Kbps | Right Side | 10 | On | 1513 | 1752.6 | 20.53 | 21 | 1.114 | -0.17 | #1 | - | 0.150 | 0.167 |
| | WCDMA Band IV | RMC 12.2Kbps | Bottom Side | 10 | On | 1513 | 1752.6 | 20.53 | 21 | 1.114 | -0.06 | #1 | - | 0.851 | 0.948 |
| | WCDMA Band IV | RMC 12.2Kbps | Bottom Side | 10 | On | 1312 | 1712.4 | 20.5 | 21 | 1.122 | 0.04 | #1 | - | 0.900 | 1.010 |
| #18 | WCDMA Band IV | RMC 12.2Kbps | Bottom Side | 10 | On | 1413 | 1732.6 | 20.52 | 21 | 1.117 | -0.04 | #1 | - | 0.989 | 1.105 |
| | WCDMA Band IV | RMC 12.2Kbps | Bottom Side | 10 | On | 1413 | 1732.6 | 20.52 | 21 | 1.117 | 0.06 | #2 | - | 0.957 | 1.069 |
| | WCDMA Band IV | RMC 12.2Kbps | Bottom Side | 10 | On | 1413 | 1732.6 | 20.52 | 21 | 1.117 | 0.06 | #1 | With | 0.916 | 1.023 |
| | WCDMA Band II | RMC 12.2Kbps | Front | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | 0.03 | #1 | - | 0.381 | 0.422 |
| | WCDMA Band II | RMC 12.2Kbps | Back | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | 0.07 | #1 | - | 0.384 | 0.425 |
| | WCDMA Band II | RMC 12.2Kbps | Left Side | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | -0.04 | #1 | - | 0.050 | 0.055 |
| | WCDMA Band II | RMC 12.2Kbps | Right Side | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | -0.06 | #1 | - | 0.074 | 0.082 |
| #19 | WCDMA Band II | RMC 12.2Kbps | Bottom Side | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | -0.06 | #1 | - | 0.586 | 0.648 |
| | WCDMA Band II | RMC 12.2Kbps | Bottom Side | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | 0.01 | #2 | - | 0.566 | 0.626 |
| | WCDMA Band II | RMC 12.2Kbps | Bottom Side | 10 | On | 9400 | 1880 | 17.56 | 18 | 1.107 | 0.07 | #1 | With | 0.495 | 0.548 |



<LTE SAR>

| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|---------|-----------|------|---------------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Front | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.08 | #1 | - | 0.165 | 0.189 |
| #20 | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.09 | #1 | - | 0.292 | 0.334 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Left Side | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.11 | #1 | - | 0.110 | 0.126 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Right Side | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.05 | #1 | - | 0.116 | 0.133 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Bottom Side | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | -0.18 | #1 | - | 0.052 | 0.060 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Front | 10 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.09 | #1 | - | 0.126 | 0.142 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Back | 10 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.06 | #1 | - | 0.232 | 0.262 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Left Side | 10 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | -0.02 | #1 | - | 0.089 | 0.100 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Right Side | 10 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.03 | #1 | - | 0.094 | 0.106 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Bottom Side | 10 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | -0.04 | #1 | - | 0.037 | 0.042 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.02 | #2 | - | 0.286 | 0.328 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.01 | #1 | With | 0.262 | 0.300 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Front | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.02 | #1 | - | 0.343 | 0.385 |
| #21 | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.03 | #1 | - | 0.525 | 0.589 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Left Side | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.05 | #1 | - | 0.368 | 0.413 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Right Side | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.1 | #1 | - | 0.177 | 0.199 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Bottom Side | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | -0.02 | #1 | - | 0.157 | 0.176 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Front | 10 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.08 | #1 | - | 0.281 | 0.323 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Back | 10 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.09 | #1 | - | 0.435 | 0.501 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Left Side | 10 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.04 | #1 | - | 0.297 | 0.342 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Right Side | 10 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.05 | #1 | - | 0.145 | 0.167 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Bottom Side | 10 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | -0.01 | #1 | - | 0.128 | 0.147 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.01 | #2 | - | 0.522 | 0.586 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 10 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.07 | #1 | With | 0.363 | 0.407 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Front | 10 | On | 20175 | 1732.5 | 20.32 | 20.5 | 1.042 | 0.02 | #1 | - | 0.580 | 0.605 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Back | 10 | On | 20175 | 1732.5 | 20.32 | 20.5 | 1.042 | -0.04 | #1 | - | 0.645 | 0.672 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Left Side | 10 | On | 20175 | 1732.5 | 20.32 | 20.5 | 1.042 | 0.08 | #1 | - | 0.070 | 0.073 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Right Side | 10 | On | 20175 | 1732.5 | 20.32 | 20.5 | 1.042 | -0.12 | #1 | - | 0.146 | 0.152 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Bottom Side | 10 | On | 20175 | 1732.5 | 20.32 | 20.5 | 1.042 | -0.03 | #1 | - | 0.847 | 0.883 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Front | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | 0.02 | #1 | - | 0.595 | 0.663 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Back | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | -0.1 | #1 | - | 0.653 | 0.728 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Left Side | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | -0.03 | #1 | - | 0.068 | 0.076 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Right Side | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | 0.12 | #1 | - | 0.144 | 0.160 |
| #22 | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | 0.06 | #1 | - | 0.843 | 0.939 |
| | LTE Band 4 | 20M | 100RB | 0Offset | QPSK | Bottom Side | 10 | On | 20175 | 1732.5 | 19.93 | 20.5 | 1.140 | 0.11 | #1 | - | 0.815 | 0.929 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | 0.01 | #2 | - | 0.831 | 0.926 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 20175 | 1732.5 | 20.03 | 20.5 | 1.114 | 0.04 | #1 | With | 0.827 | 0.922 |



| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|----------|---------|-----------|------|---------------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Front | 10 | On | 19100 | 1900 | 16.87 | 17 | 1.030 | -0.05 | #1 | - | 0.328 | 0.338 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Back | 10 | On | 19100 | 1900 | 16.87 | 17 | 1.030 | 0.06 | #1 | - | 0.321 | 0.331 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Left Side | 10 | On | 19100 | 1900 | 16.87 | 17 | 1.030 | -0.08 | #1 | - | 0.038 | 0.039 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Right Side | 10 | On | 19100 | 1900 | 16.87 | 17 | 1.030 | -0.06 | #1 | - | 0.062 | 0.064 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Bottom Side | 10 | On | 19100 | 1900 | 16.87 | 17 | 1.030 | -0.05 | #1 | - | 0.536 | 0.552 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Front | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | -0.07 | #1 | - | 0.322 | 0.351 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Back | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | 0.01 | #1 | - | 0.315 | 0.343 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Left Side | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | 0.09 | #1 | - | 0.040 | 0.044 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Right Side | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | 0.01 | #1 | - | 0.060 | 0.065 |
| #23 | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | -0.05 | #1 | - | 0.529 | 0.576 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | 0.03 | #2 | - | 0.514 | 0.560 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 19100 | 1900 | 16.63 | 17 | 1.089 | 0.07 | #1 | With | 0.357 | 0.389 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 10 | Hotspot On | 21100 | 2535 | 19.32 | 19.5 | 1.042 | -0.03 | #1 | - | 0.392 | 0.409 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Back | 10 | Hotspot On | 21100 | 2535 | 19.32 | 19.5 | 1.042 | -0.01 | #1 | - | 0.350 | 0.365 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Side | 10 | Hotspot On | 21100 | 2535 | 19.32 | 19.5 | 1.042 | -0.04 | #1 | - | 0.037 | 0.039 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Right Side | 10 | Hotspot On | 21100 | 2535 | 19.32 | 19.5 | 1.042 | -0.05 | #1 | - | 0.062 | 0.065 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Bottom Side | 10 | Hotspot On | 21100 | 2535 | 19.32 | 19.5 | 1.042 | 0.05 | #1 | - | 0.798 | 0.832 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Bottom Side | 10 | Hotspot On | 20850 | 2510 | 18.91 | 19.5 | 1.146 | 0.07 | #1 | - | 0.849 | 0.973 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Bottom Side | 10 | Hotspot On | 21350 | 2560 | 19.3 | 19.5 | 1.047 | -0.07 | #1 | - | 0.729 | 0.763 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Front | 10 | Hotspot On | 21100 | 2535 | 19.21 | 19.5 | 1.069 | -0.09 | #1 | - | 0.408 | 0.436 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Back | 10 | Hotspot On | 21100 | 2535 | 19.21 | 19.5 | 1.069 | -0.09 | #1 | - | 0.354 | 0.378 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Left Side | 10 | Hotspot On | 21100 | 2535 | 19.21 | 19.5 | 1.069 | -0.08 | #1 | - | 0.037 | 0.040 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Right Side | 10 | Hotspot On | 21100 | 2535 | 19.21 | 19.5 | 1.069 | -0.01 | #1 | - | 0.063 | 0.067 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 21100 | 2535 | 19.21 | 19.5 | 1.069 | -0.01 | #1 | - | 0.812 | 0.868 |
| #24 | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 20850 | 2510 | 19.08 | 19.5 | 1.102 | -0.03 | #1 | - | 0.929 | 1.023 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 21350 | 2560 | 19.12 | 19.5 | 1.091 | -0.01 | #1 | - | 0.726 | 0.792 |
| | LTE Band 7 | 20M | 100RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 21100 | 2535 | 19.18 | 19.5 | 1.076 | 0.08 | #1 | - | 0.872 | 0.939 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 20850 | 2510 | 19.08 | 19.5 | 1.102 | 0.09 | #2 | - | 0.918 | 1.011 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | Hotspot On | 20850 | 2510 | 19.08 | 19.5 | 1.102 | 0.1 | #1 | With | 0.612 | 0.674 |



<WLAN SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Peak SAR | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|---------------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|----------|------------------|---------|---------|------------------------|------------------------|
| | WLAN2.4GHz | 802.11b 1Mbps | Front | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.273 | | #1 | - | | |
| #25 | WLAN2.4GHz | 802.11b 1Mbps | Back | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.764 | 0.04 | #1 | - | 0.479 | 0.503 |
| | WLAN2.4GHz | 802.11b 1Mbps | Left Side | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.285 | | #1 | - | | |
| | WLAN2.4GHz | 802.11b 1Mbps | Top Side | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.344 | 0.01 | #1 | - | 0.229 | 0.240 |
| | WLAN2.4GHz | 802.11b 1Mbps | Back | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | | -0.01 | #2 | - | 0.475 | 0.499 |
| | WLAN2.4GHz | 802.11b 1Mbps | Back | 10 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | | 0.02 | #1 | With | 0.109 | 0.114 |
| | WLAN 5.2GHz | 802.11a 6Mbps | Front | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.063 | | #1 | - | | |
| #26 | WLAN 5.2GHz | Band1 802.11a 6Mbps | Back | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.507 | 0.01 | #1 | - | 0.243 | 0.354 |
| | WLAN 5.2GHz | 802.11a 6Mbps | Right Side | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.020 | | #1 | - | | |
| | WLAN 5.2GHz | Band1 802.11a 6Mbps | Top Side | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.110 | | #1 | - | | |
| | WLAN 5.2GHz | Band1 802.11a 6Mbps | Back | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.331 | -0.02 | #2 | - | 0.155 | 0.226 |
| | WLAN 5.2GHz | 802.11a 6Mbps | Back | 10 | 48 | 5240 | 12.45 | 13.5 | 1.274 | 87.50 | 1.143 | 0.312 | 0.01 | #1 | With | 0.151 | 0.220 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Front | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.037 | | #1 | - | | |
| #27 | WLAN 5.8GHz | 802.11a 6Mbps | Back | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.288 | 0.07 | #1 | - | 0.104 | 0.145 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Right Side | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.022 | | #1 | - | | |
| | WLAN 5.8GHz | 802.11a 6Mbps | Top Side | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.099 | | #1 | - | | |
| | WLAN 5.8GHz | 802.11a 6Mbps | Back | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.149 | -0.06 | #2 | - | 0.076 | 0.106 |
| | WLAN 5.8GHz | 802.11a 6Mbps | Back | 10 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.252 | 0.06 | #1 | With | 0.085 | 0.118 |



15.3 Body Worn Accessory SAR

<GSM SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------|------------------|---------------|----------|-----------------|-----|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | GSM850 | GPRS(3 Tx slots) | Front | 15 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.05 | #1 | - | 0.378 | 0.424 |
| #28 | GSM850 | GPRS(3 Tx slots) | Back | 15 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.05 | #1 | - | 0.530 | 0.595 |
| | GSM850 | GPRS(3 Tx slots) | Back | 15 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.01 | #2 | - | 0.490 | 0.550 |
| | GSM850 | GPRS(3 Tx slots) | Back | 15 | OFF | 189 | 836.4 | 29.5 | 30 | 1.122 | 0.06 | #1 | With | 0.340 | 0.381 |
| | GSM1900 | GPRS(4 Tx slots) | Front | 15 | OFF | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.06 | #1 | - | 0.521 | 0.557 |
| #29 | GSM1900 | GPRS(4 Tx slots) | Back | 15 | OFF | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.02 | #1 | - | 0.587 | 0.628 |
| | GSM1900 | GPRS(4 Tx slots) | Back | 15 | OFF | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.06 | #2 | - | 0.574 | 0.614 |
| | GSM1900 | GPRS(4 Tx slots) | Back | 15 | OFF | 810 | 1909.8 | 25.71 | 26 | 1.069 | 0.02 | #1 | With | 0.451 | 0.482 |

<WCDMA SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------------|--------------|---------------|----------|-----------------|------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | WCDMA Band V | RMC 12.2Kbps | Front | 15 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.09 | #1 | - | 0.272 | 0.307 |
| #30 | WCDMA Band V | RMC 12.2Kbps | Back | 15 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.13 | #1 | - | 0.399 | 0.450 |
| | WCDMA Band V | RMC 12.2Kbps | Back | 15 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.01 | #2 | - | 0.389 | 0.438 |
| | WCDMA Band V | RMC 12.2Kbps | Back | 15 | OFF | 4233 | 846.6 | 23.48 | 24 | 1.127 | 0.03 | #1 | With | 0.328 | 0.370 |
| | WCDMA Band IV | RMC 12.2Kbps | Front | 15 | OFF | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.03 | #1 | - | 0.527 | 0.587 |
| #31 | WCDMA Band IV | RMC 12.2Kbps | Back | 15 | OFF | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.02 | #1 | - | 0.595 | 0.663 |
| | WCDMA Band IV | RMC 12.2Kbps | Back | 15 | OFF | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.06 | #2 | - | 0.586 | 0.653 |
| | WCDMA Band IV | RMC 12.2Kbps | Back | 15 | OFF | 1513 | 1752.6 | 23.53 | 24 | 1.114 | 0.04 | #1 | With | 0.405 | 0.451 |
| | WCDMA Band II | RMC 12.2Kbps | Front | 15 | OFF | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.08 | #1 | - | 0.583 | 0.693 |
| #32 | WCDMA Band II | RMC 12.2Kbps | Back | 15 | OFF | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.14 | #1 | - | 0.659 | 0.783 |
| | WCDMA Band II | RMC 12.2Kbps | Back | 15 | OFF | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.08 | #2 | - | 0.643 | 0.764 |
| | WCDMA Band II | RMC 12.2Kbps | Back | 15 | OFF | 9400 | 1880 | 23.25 | 24 | 1.189 | 0.03 | #1 | With | 0.541 | 0.643 |



<LTE SAR>

| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|---------|-----------|------|---------------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| #33 | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Front | 15 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.03 | #1 | - | 0.144 | 0.165 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.16 | #1 | - | 0.218 | 0.250 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Front | 15 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.07 | #1 | - | 0.113 | 0.127 |
| | LTE Band 12 | 10M | 25RB | 12Offset | QPSK | Back | 15 | OFF | 23095 | 707.5 | 21.98 | 22.5 | 1.127 | 0.05 | #1 | - | 0.178 | 0.201 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.05 | #2 | - | 0.196 | 0.225 |
| | LTE Band 12 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 23095 | 707.5 | 22.91 | 23.5 | 1.146 | 0.02 | #1 | With | 0.202 | 0.231 |
| #34 | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Front | 15 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.18 | #1 | - | 0.271 | 0.304 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.08 | #1 | - | 0.383 | 0.430 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Front | 15 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.04 | #1 | - | 0.225 | 0.259 |
| | LTE Band 5 | 10M | 25RB | 0Offset | QPSK | Back | 15 | OFF | 20525 | 836.5 | 21.89 | 22.5 | 1.151 | 0.08 | #1 | - | 0.316 | 0.364 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.03 | #2 | - | 0.337 | 0.378 |
| | LTE Band 5 | 10M | 1RB | 25Offset | QPSK | Back | 15 | OFF | 20525 | 836.5 | 23 | 23.5 | 1.122 | 0.05 | #1 | With | 0.276 | 0.310 |
| #35 | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.1 | #1 | - | 0.566 | 0.614 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.09 | #1 | - | 0.587 | 0.636 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Front | 15 | OFF | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.02 | #1 | - | 0.447 | 0.486 |
| | LTE Band 4 | 20M | 50RB | 0Offset | QPSK | Back | 15 | OFF | 20175 | 1732.5 | 22.14 | 22.5 | 1.086 | 0.18 | #1 | - | 0.490 | 0.532 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.1 | #2 | - | 0.565 | 0.612 |
| | LTE Band 4 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 20175 | 1732.5 | 23.15 | 23.5 | 1.084 | 0.02 | #1 | With | 0.482 | 0.522 |
| #36 | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.02 | #1 | - | 0.550 | 0.621 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.05 | #1 | - | 0.621 | 0.702 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Front | 15 | OFF | 18900 | 1880 | 21.63 | 22.5 | 1.222 | 0.03 | #1 | - | 0.429 | 0.524 |
| | LTE Band 2 | 20M | 50RB | 0Offset | QPSK | Back | 15 | OFF | 18900 | 1880 | 21.63 | 22.5 | 1.222 | 0.02 | #1 | - | 0.470 | 0.574 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 18900 | 1880 | 22.97 | 23.5 | 1.130 | -0.04 | #2 | - | 0.595 | 0.672 |
| | LTE Band 2 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 18900 | 1880 | 22.97 | 23.5 | 1.130 | 0.08 | #1 | With | 0.583 | 0.659 |
| #37 | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.01 | #1 | - | 0.487 | 0.510 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 20850 | 2510 | 23.3 | 23.5 | 1.047 | -0.07 | #1 | - | 0.474 | 0.496 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Front | 15 | OFF | 20850 | 2510 | 22.17 | 22.5 | 1.079 | 0.09 | #1 | - | 0.398 | 0.429 |
| | LTE Band 7 | 20M | 50RB | 50Offset | QPSK | Back | 15 | OFF | 20850 | 2510 | 22.17 | 22.5 | 1.079 | -0.05 | #1 | - | 0.390 | 0.421 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.09 | #2 | - | 0.468 | 0.490 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 20850 | 2510 | 23.3 | 23.5 | 1.047 | 0.03 | #1 | With | 0.433 | 0.453 |



<WLAN SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Peak SAR | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|----------|------------------|---------|---------|------------------------|------------------------|
| | WLAN2.4GHz | 802.11b 1Mbps | Front | 15 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.142 | | #1 | - | | |
| #38 | WLAN2.4GHz | 802.11b 1Mbps | Back | 15 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | 0.208 | 0.01 | #1 | - | 0.143 | 0.150 |
| | WLAN2.4GHz | 802.11b 1Mbps | Back | 15 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | | -0.09 | #2 | - | 0.129 | 0.135 |
| | WLAN2.4GHz | 802.11b 1Mbps | Back | 15 | 11 | 2462 | 17.88 | 18 | 1.028 | 97.94 | 1.021 | | -0.05 | #1 | With | 0.036 | 0.038 |
| | WLAN5.3GHz | 802.11a 6Mbps | Front | 15 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.035 | | #1 | - | | |
| #39 | WLAN5.3GHz | 802.11a 6Mbps | Back | 15 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.172 | -0.05 | #1 | - | 0.055 | 0.080 |
| | WLAN5.3GHz | 802.11a 6Mbps | Back | 15 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.191 | -0.08 | #2 | - | 0.050 | 0.073 |
| | WLAN5.3GHz | 802.11a 6Mbps | Back | 15 | 52 | 5260 | 12.43 | 13.5 | 1.279 | 87.50 | 1.143 | 0.122 | 0.06 | #1 | With | 0.052 | 0.076 |
| | WLAN5.5GHz | 802.11a 6Mbps | Front | 15 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.052 | | #1 | - | | |
| #40 | WLAN5.5GHz | 802.11a 6Mbps | Back | 15 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.205 | 0.07 | #1 | - | 0.077 | 0.103 |
| | WLAN5.5GHz | 802.11a 6Mbps | Back | 15 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.085 | -0.04 | #2 | - | 0.067 | 0.089 |
| | WLAN5.5GHz | 802.11a 6Mbps | Back | 15 | 100 | 5500 | 11.33 | 12 | 1.167 | 87.50 | 1.143 | 0.085 | 0.06 | #1 | With | 0.065 | 0.087 |
| | WLAN5.8GHz | 802.11a 6Mbps | Front | 15 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.039 | | #1 | - | | |
| #41 | WLAN5.8GHz | 802.11a 6Mbps | Back | 15 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.119 | 0.09 | #1 | - | 0.058 | 0.081 |
| | WLAN5.8GHz | 802.11a 6Mbps | Back | 15 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.068 | 0.09 | #2 | - | 0.048 | 0.067 |
| | WLAN5.8GHz | 802.11a 6Mbps | Back | 15 | 149 | 5745 | 12.15 | 13 | 1.216 | 87.50 | 1.143 | 0.104 | -0.05 | #1 | With | 0.054 | 0.075 |



15.4 Repeated SAR Measurement

| No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Battery | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|-----|---------------|----------|---------|-----------|------------------|---------------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|---------|------------------------|-------|------------------------|
| 1st | WLAN 2.4GHz | - | - | - | 802.11b 1Mbps | Right Cheek | - | - | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | 0.01 | #1 | 1.120 | 1 | 1.178 |
| 2nd | WLAN 2.4GHz | - | - | - | 802.11b 1Mbps | Right Cheek | - | - | 1 | 2412 | 17.37 | 17.5 | 1.030 | 97.94 | 1.021 | 0.15 | #1 | 1.050 | 1.063 | 1.105 |
| 1st | GSM1900 | - | - | - | GPRS(2 Tx slots) | Bottom Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | - | - | -0.04 | #1 | 0.940 | 1 | 1.072 |
| 2nd | GSM1900 | - | - | - | GPRS(2 Tx slots) | Bottom Side | 10 | On | 810 | 1909.8 | 24.93 | 25.5 | 1.140 | - | - | -0.04 | #1 | 0.918 | 1.023 | 1.047 |
| 1st | WCDMA Band IV | - | - | - | RMC 12.2Kbps | Bottom Side | 10 | On | 1413 | 1732.6 | 20.52 | 21 | 1.117 | - | - | -0.04 | #1 | 0.989 | 1 | 1.105 |
| 2nd | WCDMA Band IV | - | - | - | RMC 12.2Kbps | Bottom Side | 10 | On | 1413 | 1732.6 | 20.52 | 21 | 1.117 | - | - | -0.13 | #1 | 0.970 | 1.019 | 1.083 |
| 1st | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 20850 | 2510 | 19.08 | 19.5 | 1.102 | - | - | -0.03 | #1 | 0.929 | 1 | 1.023 |
| 2nd | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Bottom Side | 10 | On | 21350 | 2560 | 19.08 | 19.5 | 1.102 | - | - | -0.02 | #1 | 0.895 | 1.037 | 0.986 |

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



16. Spot Check SAR Test Results

16.1 Head SAR

<LTE SAR>

| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Receiver Enabled | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|----------|---------|-----------|------|---------------|------------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Right Cheek | Receiver 1 | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.12 | #2 | - | 0.075 | 0.081 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Right Tilted | Receiver 1 | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.02 | #2 | - | 0.039 | 0.042 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.04 | #2 | - | 0.164 | 0.177 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Tilted | Receiver 1 | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.08 | #2 | - | 0.038 | 0.041 |
| #01-1 | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Right Cheek | Receiver 1 | 21100 | 2535 | 20.12 | 20.5 | 1.091 | 0.01 | #2 | - | 0.061 | 0.067 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Right Tilted | Receiver 1 | 21100 | 2535 | 20.12 | 20.5 | 1.091 | 0.01 | #2 | - | 0.030 | 0.033 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Left Cheek | Receiver 1 | 21100 | 2535 | 20.12 | 20.5 | 1.091 | -0.06 | #2 | - | 0.132 | 0.144 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Left Tilted | Receiver 1 | 21100 | 2535 | 20.12 | 20.5 | 1.091 | 0.07 | #2 | - | 0.029 | 0.032 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Left Cheek | Receiver 1 | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.01 | #2 | With | 0.160 | 0.172 |

16.2 Body-Worn SAR

| Plot No. | Band | BW (MHz) | RB Size | RB offset | Mode | Test Position | Gap (mm) | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Battery | Holster | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|----------|---------|-----------|------|---------------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|---------|---------|------------------------|------------------------|
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.01 | #2 | - | 0.317 | 0.341 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Front | 15 | OFF | 21100 | 2535 | 20.12 | 20.5 | 1.091 | 0.02 | #2 | - | 0.258 | 0.282 |
| #02-1 | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Back | 15 | OFF | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.15 | #2 | - | 0.289 | 0.311 |
| | LTE Band 7 | 20M | 50RB | 0Offset | QPSK | Back | 15 | OFF | 21100 | 2535 | 20.12 | 20.5 | 1.091 | 0.11 | #2 | - | 0.235 | 0.256 |
| | LTE Band 7 | 20M | 1RB | 49Offset | QPSK | Front | 15 | OFF | 21100 | 2535 | 21.18 | 21.5 | 1.076 | 0.02 | #2 | With | 0.232 | 0.250 |

17. Simultaneous Transmission Analysis

| NO. | Simultaneous Transmission Configurations | Portable Handset | | | Note |
|-----|--|------------------|-----------|---------|----------------------|
| | | Head | Body-worn | Hotspot | |
| 1. | GSM Voice + WLAN2.4GHz | Yes | Yes | | |
| 2. | GPRS/EDGE + WLAN2.4GHz | Yes | Yes | Yes | Hotspot |
| 3. | WCDMA + WLAN2.4GHz | Yes | Yes | Yes | Hotspot |
| 4. | LTE + WLAN2.4GHz | Yes | Yes | Yes | Hotspot |
| 5. | GSM Voice + Bluetooth | Yes | Yes | | |
| 6. | GPRS/EDGE + Bluetooth | Yes | Yes | | WWAN VoIP |
| 7. | WCDMA+ Bluetooth | Yes | Yes | | WWAN VoIP |
| 8. | LTE + Bluetooth | Yes | Yes | | WWAN VoIP |
| 9. | GSM Voice + WLAN5.3/5.5GHz | Yes | Yes | | |
| 10. | GPRS/EDGE + WLAN5.3/5.5GHz | Yes | Yes | | WiFi Direct(GC only) |
| 11. | WCDMA + WLAN5.3/5.5GHz | Yes | Yes | | WiFi Direct(GC only) |
| 12. | LTE + WLAN5.3/5.5GHz | Yes | Yes | | WiFi Direct(GC only) |
| 13. | GSM Voice + WLAN5.2/5.8GHz | Yes | Yes | | |
| 14. | GPRS/EDGE + WLAN5.2/5.8GHz | Yes | Yes | Yes | WiFi Direct(GC/GO) |
| 15. | WCDMA + WLAN5.2/5.8GHz | Yes | Yes | Yes | WiFi Direct(GC/GO) |
| 16. | LTE + WLAN5.2/5.8GHz | Yes | Yes | Yes | WiFi Direct(GC/GO) |

General Note:

- This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP) and LTE Supports VoLTE operation.
- This device 2.4GHz WLAN /5.2GHz WLAN/5.8GHz WLAN support Hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- According to EUT character ,WLAN 5GHz can not transmit simultaneously with Bluetooth.
- Chose the worse zoom scan SAR of WLAN2.4GHz and WLAN 5GHz SAR for co-located with WWAN analysis.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

| Bluetooth Max Power | Exposure Position | Head | Body worn |
|---------------------|----------------------|------------|------------|
| | Test separation | 0 mm | 15 mm |
| 6.0 dBm | Estimated SAR (W/kg) | 0.168 W/kg | 0.056 W/kg |



17.1 Head Exposure Conditions

<WWAN + WLAN>

| WWAN Band | Exposure Position | 1 | 2 | 3 | 1+2 Summed 1g SAR (W/kg) | 1+3 Summed 1g SAR (W/kg) | SPLSR | Case No | |
|-----------|-------------------|---------------|---------------|---------------|--------------------------|--------------------------|-------|---------|-----|
| | | WWAN | 2.4GHz WLAN | 5GHz WLAN | | | | | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | | |
| GSM | GSM850 | Right Cheek | 0.275 | 1.178 | 0.290 | 1.45 | 0.57 | | |
| | | Right Tilted | 0.168 | 1.178 | 0.290 | 1.35 | 0.46 | | |
| | | Left Cheek | 0.355 | 1.178 | 0.290 | 1.53 | 0.65 | | |
| | | Left Tilted | 0.165 | 1.178 | 0.290 | 1.34 | 0.46 | | |
| | GSM1900 | Right Cheek | 0.259 | 1.178 | 0.290 | 1.44 | 0.55 | | |
| | | Right Tilted | 0.048 | 1.178 | 0.290 | 1.23 | 0.34 | | |
| | | Left Cheek | 0.135 | 1.178 | 0.290 | 1.31 | 0.43 | | |
| | | Left Tilted | 0.084 | 1.178 | 0.290 | 1.26 | 0.37 | | |
| WCDMA | Band II | Right Cheek | 0.401 | 1.178 | 0.290 | 1.58 | 0.69 | | |
| | | Right Tilted | 0.062 | 1.178 | 0.290 | 1.24 | 0.35 | | |
| | | Left Cheek | 0.175 | 1.178 | 0.290 | 1.35 | 0.47 | | |
| | | Left Tilted | 0.113 | 1.178 | 0.290 | 1.29 | 0.40 | | |
| | Band IV | Right Cheek | 0.413 | 1.178 | 0.290 | 1.59 | 0.70 | | |
| | | Right Tilted | 0.058 | 1.178 | 0.290 | 1.24 | 0.35 | | |
| | | Left Cheek | 0.173 | 1.178 | 0.290 | 1.35 | 0.46 | | |
| | | Left Tilted | 0.173 | 1.178 | 0.290 | 1.35 | 0.46 | | |
| | Band V | Right Cheek | 0.233 | 1.178 | 0.290 | 1.41 | 0.52 | | |
| | | Right Tilted | 0.132 | 1.178 | 0.290 | 1.31 | 0.42 | | |
| | | Left Cheek | 0.302 | 1.178 | 0.290 | 1.48 | 0.59 | | |
| | | Left Tilted | 0.126 | 1.178 | 0.290 | 1.30 | 0.42 | | |
| LTE | Band 2 | Right Cheek | 0.464 | 1.178 | 0.290 | 1.64 | 0.75 | 0.03 | #01 |
| | | Right Tilted | 0.080 | 1.178 | 0.290 | 1.26 | 0.37 | | |
| | | Left Cheek | 0.157 | 1.178 | 0.290 | 1.34 | 0.45 | | |
| | | Left Tilted | 0.120 | 1.178 | 0.290 | 1.30 | 0.41 | | |
| | Band 4 | Right Cheek | 0.469 | 1.178 | 0.290 | 1.65 | 0.76 | 0.03 | #02 |
| | | Right Tilted | 0.059 | 1.178 | 0.290 | 1.24 | 0.35 | | |
| | | Left Cheek | 0.164 | 1.178 | 0.290 | 1.34 | 0.45 | | |
| | | Left Tilted | 0.117 | 1.178 | 0.290 | 1.30 | 0.41 | | |
| | Band 5 | Right Cheek | 0.192 | 1.178 | 0.290 | 1.37 | 0.48 | | |
| | | Right Tilted | 0.116 | 1.178 | 0.290 | 1.29 | 0.41 | | |
| | | Left Cheek | 0.265 | 1.178 | 0.290 | 1.44 | 0.56 | | |
| | | Left Tilted | 0.134 | 1.178 | 0.290 | 1.31 | 0.42 | | |
| | Band 7 | Right Cheek | 0.071 | 1.178 | 0.290 | 1.25 | 0.36 | | |
| | | Right Tilted | 0.046 | 1.178 | 0.290 | 1.22 | 0.34 | | |
| | | Left Cheek | 0.173 | 1.178 | 0.290 | 1.35 | 0.46 | | |
| | | Left Tilted | 0.036 | 1.178 | 0.290 | 1.21 | 0.33 | | |
| | Band 12 | Right Cheek | 0.104 | 1.178 | 0.290 | 1.28 | 0.39 | | |
| | | Right Tilted | 0.054 | 1.178 | 0.290 | 1.23 | 0.34 | | |
| | | Left Cheek | 0.129 | 1.178 | 0.290 | 1.31 | 0.42 | | |
| | | Left Tilted | 0.073 | 1.178 | 0.290 | 1.25 | 0.36 | | |



<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | 1 | 2 | 1+2 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|---------|-------------------|---------------|-------------------------|--------------------------|-------|---------|
| | | | WWAN | Bluetooth | | | |
| | | | 1g SAR (W/kg) | Estimated 1g SAR (W/kg) | | | |
| GSM | GSM850 | Right Cheek | 0.275 | 0.168 | 0.44 | | |
| | | Right Tilted | 0.168 | 0.168 | 0.34 | | |
| | | Left Cheek | 0.355 | 0.168 | 0.52 | | |
| | | Left Tilted | 0.165 | 0.168 | 0.33 | | |
| | GSM1900 | Right Cheek | 0.259 | 0.168 | 0.43 | | |
| | | Right Tilted | 0.048 | 0.168 | 0.22 | | |
| | | Left Cheek | 0.135 | 0.168 | 0.30 | | |
| | | Left Tilted | 0.084 | 0.168 | 0.25 | | |
| WCDMA | Band II | Right Cheek | 0.401 | 0.168 | 0.57 | | |
| | | Right Tilted | 0.062 | 0.168 | 0.23 | | |
| | | Left Cheek | 0.175 | 0.168 | 0.34 | | |
| | | Left Tilted | 0.113 | 0.168 | 0.28 | | |
| | Band IV | Right Cheek | 0.413 | 0.168 | 0.58 | | |
| | | Right Tilted | 0.058 | 0.168 | 0.23 | | |
| | | Left Cheek | 0.173 | 0.168 | 0.34 | | |
| | | Left Tilted | 0.173 | 0.168 | 0.34 | | |
| | Band V | Right Cheek | 0.233 | 0.168 | 0.40 | | |
| | | Right Tilted | 0.132 | 0.168 | 0.30 | | |
| | | Left Cheek | 0.302 | 0.168 | 0.47 | | |
| | | Left Tilted | 0.126 | 0.168 | 0.29 | | |
| LTE | Band 2 | Right Cheek | 0.464 | 0.168 | 0.63 | | |
| | | Right Tilted | 0.080 | 0.168 | 0.25 | | |
| | | Left Cheek | 0.157 | 0.168 | 0.33 | | |
| | | Left Tilted | 0.120 | 0.168 | 0.29 | | |
| | Band 4 | Right Cheek | 0.469 | 0.168 | 0.64 | | |
| | | Right Tilted | 0.059 | 0.168 | 0.23 | | |
| | | Left Cheek | 0.164 | 0.168 | 0.33 | | |
| | | Left Tilted | 0.117 | 0.168 | 0.29 | | |
| | Band 5 | Right Cheek | 0.192 | 0.168 | 0.36 | | |
| | | Right Tilted | 0.116 | 0.168 | 0.28 | | |
| | | Left Cheek | 0.265 | 0.168 | 0.43 | | |
| | | Left Tilted | 0.134 | 0.168 | 0.30 | | |
| | Band 7 | Right Cheek | 0.071 | 0.168 | 0.24 | | |
| | | Right Tilted | 0.046 | 0.168 | 0.21 | | |
| | | Left Cheek | 0.173 | 0.168 | 0.34 | | |
| | | Left Tilted | 0.036 | 0.168 | 0.20 | | |
| | Band 12 | Right Cheek | 0.104 | 0.168 | 0.27 | | |
| | | Right Tilted | 0.054 | 0.168 | 0.22 | | |
| | | Left Cheek | 0.129 | 0.168 | 0.30 | | |
| | | Left Tilted | 0.073 | 0.168 | 0.24 | | |



17.2 Hotspot Exposure Conditions

| WWAN Band | Exposure Position | 1 | 2 | 3 | 1+2 Summed 1g SAR (W/kg) | 1+3 Summed 1g SAR (W/kg) | SPLSR | Case No | |
|-----------|-------------------|---------------|---------------|---------------|--------------------------|--------------------------|-------|---------|--|
| | | WWAN | 2.4GHz WLAN | 5GHz WLAN | | | | | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | | |
| GSM | GSM850 | Front | 0.517 | 0.503 | 0.354 | 1.02 | 0.87 | | |
| | | Back | 0.889 | 0.503 | 0.354 | 1.39 | 1.24 | | |
| | | Left side | 0.552 | 0.503 | | 1.06 | 0.55 | | |
| | | Right side | 0.294 | | 0.354 | 0.29 | 0.65 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.276 | | | 0.28 | 0.28 | | |
| | GSM1900 | Front | 0.618 | 0.503 | 0.354 | 1.12 | 0.97 | | |
| | | Back | 0.655 | 0.503 | 0.354 | 1.16 | 1.01 | | |
| | | Left side | 0.074 | 0.503 | | 0.58 | 0.07 | | |
| | | Right side | 0.116 | | 0.354 | 0.12 | 0.47 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 1.072 | | | 1.07 | 1.07 | | |
| WCDMA | Band II | Front | 0.422 | 0.503 | 0.354 | 0.93 | 0.78 | | |
| | | Back | 0.425 | 0.503 | 0.354 | 0.93 | 0.78 | | |
| | | Left side | 0.055 | 0.503 | | 0.56 | 0.06 | | |
| | | Right side | 0.082 | | 0.354 | 0.08 | 0.44 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.648 | | | 0.65 | 0.65 | | |
| | Band IV | Front | 0.631 | 0.503 | 0.354 | 1.13 | 0.99 | | |
| | | Back | 0.711 | 0.503 | 0.354 | 1.21 | 1.07 | | |
| | | Left side | 0.076 | 0.503 | | 0.58 | 0.08 | | |
| | | Right side | 0.167 | | 0.354 | 0.17 | 0.52 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 1.105 | | | 1.11 | 1.11 | | |
| | Band V | Front | 0.444 | 0.503 | 0.354 | 0.95 | 0.80 | | |
| | | Back | 0.703 | 0.503 | 0.354 | 1.21 | 1.06 | | |
| | | Left side | 0.409 | 0.503 | | 0.91 | 0.41 | | |
| | | Right side | 0.194 | | 0.354 | 0.19 | 0.55 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.234 | | | 0.23 | 0.23 | | |
| LTE | Band 2 | Front | 0.351 | 0.503 | 0.354 | 0.85 | 0.71 | | |
| | | Back | 0.343 | 0.503 | 0.354 | 0.85 | 0.70 | | |
| | | Left side | 0.044 | 0.503 | | 0.55 | 0.04 | | |
| | | Right side | 0.065 | | 0.354 | 0.07 | 0.42 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.576 | | | 0.58 | 0.58 | | |



| | | | | | | | | | |
|--|---------|-------------|-------|-------|-------|------|------|--|--|
| | Band 4 | Front | 0.663 | 0.503 | 0.354 | 1.17 | 1.02 | | |
| | | Back | 0.728 | 0.503 | 0.354 | 1.23 | 1.08 | | |
| | | Left side | 0.076 | 0.503 | | 0.58 | 0.08 | | |
| | | Right side | 0.160 | | 0.354 | 0.16 | 0.51 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.939 | | | 0.94 | 0.94 | | |
| | Band 5 | Front | 0.385 | 0.503 | 0.354 | 0.89 | 0.74 | | |
| | | Back | 0.589 | 0.503 | 0.354 | 1.09 | 0.94 | | |
| | | Left side | 0.413 | 0.503 | | 0.92 | 0.41 | | |
| | | Right side | 0.199 | | 0.354 | 0.20 | 0.55 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.176 | | | 0.18 | 0.18 | | |
| | Band 7 | Front | 0.436 | 0.503 | 0.354 | 0.94 | 0.79 | | |
| | | Back | 0.378 | 0.503 | 0.354 | 0.88 | 0.73 | | |
| | | Left side | 0.040 | 0.503 | | 0.54 | 0.04 | | |
| | | Right side | 0.067 | | 0.354 | 0.07 | 0.42 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 1.023 | | | 1.02 | 1.02 | | |
| | Band 12 | Front | 0.189 | 0.503 | 0.354 | 0.69 | 0.54 | | |
| | | Back | 0.334 | 0.503 | 0.354 | 0.84 | 0.69 | | |
| | | Left side | 0.126 | 0.503 | | 0.63 | 0.13 | | |
| | | Right side | 0.133 | | 0.354 | 0.13 | 0.49 | | |
| | | Top side | | 0.503 | 0.354 | 0.50 | 0.35 | | |
| | | Bottom side | 0.060 | | | 0.06 | 0.06 | | |



17.3 Body-Worn Accessory Exposure Conditions

<WWAN + WLAN>

| WWAN Band | | Exposure Position | 1 | 2 | 3 | 1+2 Summed 1g SAR (W/kg) | 1+3 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|---------|-------------------|--------------------|---------------------------|-------------------------|--------------------------|--------------------------|-------|---------|
| | | | WWAN 1g SAR (W/kg) | 2.4GHz WLAN 1g SAR (W/kg) | 5GHz WLAN 1g SAR (W/kg) | | | | |
| GSM | GSM850 | Front | 0.424 | 0.150 | 0.103 | 0.57 | 0.53 | | |
| | | Back | 0.595 | 0.150 | 0.103 | 0.75 | 0.70 | | |
| | GSM1900 | Front | 0.557 | 0.150 | 0.103 | 0.71 | 0.66 | | |
| | | Back | 0.628 | 0.150 | 0.103 | 0.78 | 0.73 | | |
| WCDMA | Band II | Front | 0.693 | 0.150 | 0.103 | 0.84 | 0.80 | | |
| | | Back | 0.783 | 0.150 | 0.103 | 0.93 | 0.89 | | |
| | Band IV | Front | 0.587 | 0.150 | 0.103 | 0.74 | 0.69 | | |
| | | Back | 0.663 | 0.150 | 0.103 | 0.81 | 0.77 | | |
| | Band V | Front | 0.307 | 0.150 | 0.103 | 0.46 | 0.41 | | |
| | | Back | 0.450 | 0.150 | 0.103 | 0.60 | 0.55 | | |
| LTE | Band 2 | Front | 0.621 | 0.150 | 0.103 | 0.77 | 0.72 | | |
| | | Back | 0.702 | 0.150 | 0.103 | 0.85 | 0.81 | | |
| | Band 4 | Front | 0.614 | 0.150 | 0.103 | 0.76 | 0.72 | | |
| | | Back | 0.636 | 0.150 | 0.103 | 0.79 | 0.74 | | |
| | Band 5 | Front | 0.304 | 0.150 | 0.103 | 0.45 | 0.41 | | |
| | | Back | 0.430 | 0.150 | 0.103 | 0.58 | 0.53 | | |
| | Band 7 | Front | 0.510 | 0.150 | 0.103 | 0.66 | 0.61 | | |
| | | Back | 0.496 | 0.150 | 0.103 | 0.65 | 0.60 | | |
| | Band 12 | Front | 0.165 | 0.150 | 0.103 | 0.32 | 0.27 | | |
| | | Back | 0.250 | 0.150 | 0.103 | 0.40 | 0.35 | | |



<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | 1 | 2 | 1+2 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|---------|-------------------|---------------|-------------------------|--------------------------|-------|---------|
| | | | WWAN | Bluetooth | | | |
| | | | 1g SAR (W/kg) | Estimated 1g SAR (W/kg) | | | |
| GSM | GSM850 | Front | 0.424 | 0.056 | 0.48 | | |
| | | Back | 0.595 | 0.056 | 0.65 | | |
| | GSM1900 | Front | 0.557 | 0.056 | 0.61 | | |
| | | Back | 0.628 | 0.056 | 0.68 | | |
| WCDMA | Band II | Front | 0.693 | 0.056 | 0.75 | | |
| | | Back | 0.783 | 0.056 | 0.84 | | |
| | Band IV | Front | 0.587 | 0.056 | 0.64 | | |
| | | Back | 0.663 | 0.056 | 0.72 | | |
| | Band V | Front | 0.307 | 0.056 | 0.36 | | |
| | | Back | 0.450 | 0.056 | 0.51 | | |
| LTE | Band 2 | Front | 0.621 | 0.056 | 0.68 | | |
| | | Back | 0.702 | 0.056 | 0.76 | | |
| | Band 4 | Front | 0.614 | 0.056 | 0.67 | | |
| | | Back | 0.636 | 0.056 | 0.69 | | |
| | Band 5 | Front | 0.304 | 0.056 | 0.36 | | |
| | | Back | 0.430 | 0.056 | 0.49 | | |
| | Band 7 | Front | 0.510 | 0.056 | 0.57 | | |
| | | Back | 0.496 | 0.056 | 0.55 | | |
| Band 12 | Front | 0.165 | 0.056 | 0.22 | | | |
| | Back | 0.250 | 0.056 | 0.31 | | | |

17.4 Spot Check Head Exposure Conditions

General Note:

For head and body-worn SAR test, based on battery 2 for LTE Band 7, So chose battery 2 WLAN SAR to do co-located with WWAN analysis .

<WWAN + WLAN>

| WWAN Band | | Exposure Position | 1 | 2 | 3 | 1+2 Summed 1g SAR (W/kg) | 1+3 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|--------|-------------------|---------------|---------------|---------------|--------------------------|--------------------------|-------|---------|
| | | | WWAN | 2.4GHz WLAN | 5GHz WLAN | | | | |
| | | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | |
| LTE | Band 7 | Right Cheek | 0.081 | 1.157 | 0.098 | 1.24 | 0.18 | | |
| | | Right Tilted | 0.042 | 1.157 | 0.098 | 1.20 | 0.14 | | |
| | | Left Cheek | 0.177 | 1.157 | 0.098 | 1.33 | 0.28 | | |
| | | Left Tilted | 0.041 | 1.157 | 0.098 | 1.20 | 0.14 | | |

<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | 1 | 2 | 1+2 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|--------|-------------------|---------------|-------------------------|--------------------------|-------|---------|
| | | | WWAN | Bluetooth | | | |
| | | | 1g SAR (W/kg) | Estimated 1g SAR (W/kg) | | | |
| LTE | Band 7 | Right Cheek | 0.081 | 0.168 | 0.25 | | |
| | | Right Tilted | 0.042 | 0.168 | 0.21 | | |
| | | Left Cheek | 0.177 | 0.168 | 0.35 | | |
| | | Left Tilted | 0.041 | 0.168 | 0.21 | | |

17.5 Spot Check Body-Worn Accessory Exposure Conditions

<WWAN + WLAN>

| WWAN Band | | Exposure Position | 1 | 2 | 3 | 1+2 Summed 1g SAR (W/kg) | 1+3 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|--------|-------------------|---------------|---------------|---------------|--------------------------|--------------------------|-------|---------|
| | | | WWAN | 2.4GHz WLAN | 5GHz WLAN | | | | |
| | | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | |
| LTE | Band 7 | Front | 0.341 | 0.135 | 0.089 | 0.48 | 0.43 | | |
| | | Back | 0.311 | 0.135 | 0.089 | 0.45 | 0.40 | | |

<WWAN + Bluetooth>


| WWAN Band | | Exposure Position | 1 | 2 | 1+2 Summed 1g SAR (W/kg) | SPLSR | Case No |
|-----------|--------|-------------------|---------------|-------------------------|--------------------------|-------|---------|
| | | | WWAN | Bluetooth | | | |
| | | | 1g SAR (W/kg) | Estimated 1g SAR (W/kg) | | | |
| LTE | Band 7 | Front | 0.341 | 0.056 | 0.40 | | |
| | | Back | 0.311 | 0.056 | 0.37 | | |

17.6 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

| Case | Band | Position | SAR (W/kg) | Gap (cm) | SAR peak location (m) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|-------------|-------------|------------|----------|-----------------------|--------|--------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 1 | 2.4GHz WLAN | Right Cheek | 1.178 | 0 | 0.0303 | -0.324 | -0.173 | 82.4 | 1.64 | 0.03 | Not required |
| | LTE Band 2 | | 0.464 | 0 | 0.0645 | -0.249 | -0.172 | | | | |

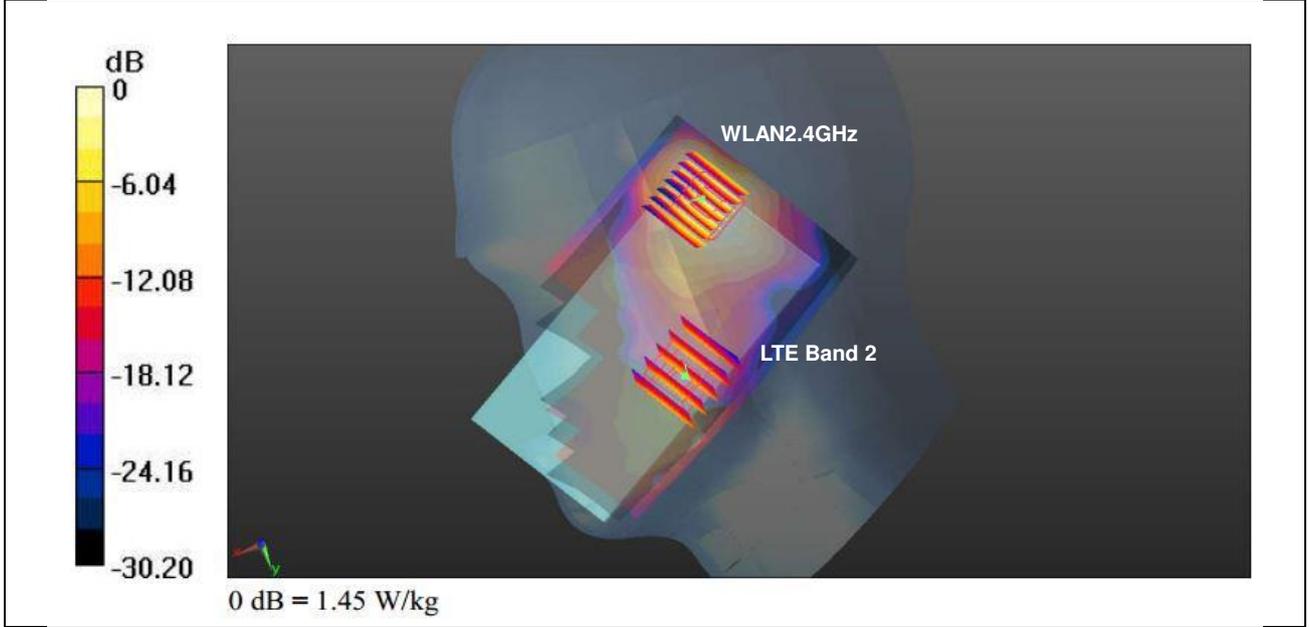

| Case | Band | Position | SAR (W/kg) | Gap (cm) | SAR peak location (m) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|-------------|-------------|------------|----------|-----------------------|--------|--------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 2 | 2.4GHz WLAN | Right Cheek | 1.178 | 0 | 0.0303 | -0.324 | -0.173 | 83.1 | 1.65 | 0.03 | Not required |
| | LTE Band 4 | | 0.469 | 0 | 0.0638 | -0.248 | -0.172 | | | | |

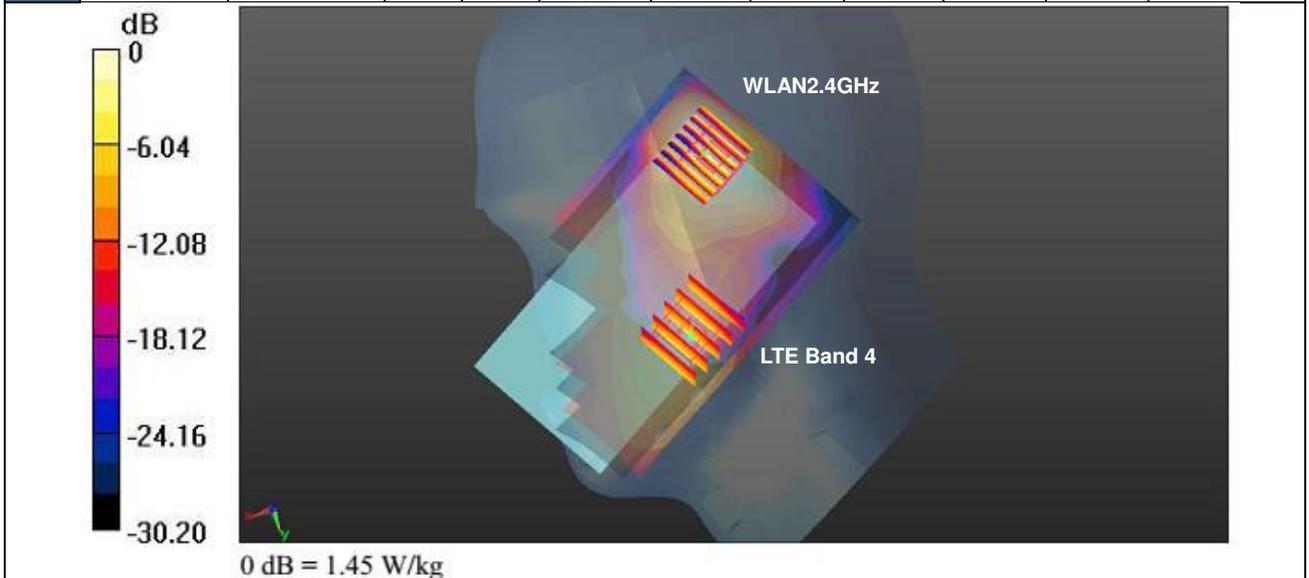

Test Engineer : Luke Lu

18. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

| Uncertainty Distributions | Normal | Rectangular | Triangular | U-Shape |
|------------------------------------|--------------------|--------------------|-------------------|----------------|
| Multi-plying Factor ^(a) | 1/k ^(b) | 1/√3 | 1/√6 | 1/√2 |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 18.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASy uncertainty Budget is shown in the following tables.

| Error Description | Uncertainty Value (±%) | Probability | Divisor | (Ci) 1g | (Ci) 10g | Standard Uncertainty (1g) (±%) | Standard Uncertainty (10g) (±%) |
|-----------------------------------|------------------------|-------------|---------|---------|----------|--------------------------------|---------------------------------|
| Measurement System | | | | | | | |
| Probe Calibration | 6.0 | N | 1 | 1 | 1 | 6.0 | 6.0 |
| Axial Isotropy | 4.7 | R | 1.732 | 0.7 | 0.7 | 1.9 | 1.9 |
| Hemispherical Isotropy | 9.6 | R | 1.732 | 0.7 | 0.7 | 3.9 | 3.9 |
| Boundary Effects | 1.0 | R | 1.732 | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | R | 1.732 | 1 | 1 | 2.7 | 2.7 |
| System Detection Limits | 1.0 | R | 1.732 | 1 | 1 | 0.6 | 0.6 |
| Modulation Response | 3.2 | R | 1.732 | 1 | 1 | 1.8 | 1.8 |
| Readout Electronics | 0.3 | N | 1 | 1 | 1 | 0.3 | 0.3 |
| Response Time | 0.0 | R | 1.732 | 1 | 1 | 0.0 | 0.0 |
| Integration Time | 2.6 | R | 1.732 | 1 | 1 | 1.5 | 1.5 |
| RF Ambient Noise | 3.0 | R | 1.732 | 1 | 1 | 1.7 | 1.7 |
| RF Ambient Reflections | 3.0 | R | 1.732 | 1 | 1 | 1.7 | 1.7 |
| Probe Positioner | 0.4 | R | 1.732 | 1 | 1 | 0.2 | 0.2 |
| Probe Positioning | 2.9 | R | 1.732 | 1 | 1 | 1.7 | 1.7 |
| Max. SAR Eval. | 2.0 | R | 1.732 | 1 | 1 | 1.2 | 1.2 |
| Test Sample Related | | | | | | | |
| Device Positioning | 3.0 | N | 1 | 1 | 1 | 3.0 | 3.0 |
| Device Holder | 3.6 | N | 1 | 1 | 1 | 3.6 | 3.6 |
| Power Drift | 5.0 | R | 1.732 | 1 | 1 | 2.9 | 2.9 |
| Power Scaling | 0.0 | R | 1.732 | 1 | 1 | 0.0 | 0.0 |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty | 6.1 | R | 1.732 | 1 | 1 | 3.5 | 3.5 |
| SAR correction | 0.0 | R | 1.732 | 1 | 0.84 | 0.0 | 0.0 |
| Liquid Conductivity Repeatability | 0.2 | N | 1 | 0.78 | 0.71 | 0.1 | 0.1 |
| Liquid Conductivity (target) | 5.0 | R | 1.732 | 0.78 | 0.71 | 2.3 | 2.0 |
| Liquid Conductivity (mea.) | 2.5 | R | 1.732 | 0.78 | 0.71 | 1.1 | 1.0 |
| Temp. unc. - Conductivity | 3.4 | R | 1.732 | 0.78 | 0.71 | 1.5 | 1.4 |
| Liquid Permittivity Repeatability | 0.15 | N | 1 | 0.23 | 0.26 | 0.0 | 0.0 |
| Liquid Permittivity (target) | 5.0 | R | 1.732 | 0.23 | 0.26 | 0.7 | 0.8 |
| Liquid Permittivity (mea.) | 2.5 | R | 1.732 | 0.23 | 0.26 | 0.3 | 0.4 |
| Temp. unc. - Permittivity | 0.83 | R | 1.732 | 0.23 | 0.26 | 0.1 | 0.1 |
| Combined Std. Uncertainty | | | | | | 11.4% | 11.4% |
| Coverage Factor for 95 % | | | | | | K=2 | K=2 |
| Expanded STD Uncertainty | | | | | | 22.9% | 22.7% |

Table 18.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



| Error Description | Uncertainty Value (±%) | Probability | Divisor | (Ci) 1g | (Ci) 10g | Standard Uncertainty (1g) (±%) | Standard Uncertainty (10g) (±%) |
|-----------------------------------|------------------------|-------------|---------|---------|----------|--------------------------------|---------------------------------|
| Measurement System | | | | | | | |
| Probe Calibration | 7.0 | N | 1 | 1 | 1 | 7.0 | 7.0 |
| Axial Isotropy | 4.7 | R | 1.732 | 0.7 | 0.7 | 1.9 | 1.9 |
| Hemispherical Isotropy | 9.6 | R | 1.732 | 0.7 | 0.7 | 3.9 | 3.9 |
| Boundary Effects | 2.0 | R | 1.732 | 1 | 1 | 1.2 | 1.2 |
| Linearity | 4.7 | R | 1.732 | 1 | 1 | 2.7 | 2.7 |
| System Detection Limits | 1.0 | R | 1.732 | 1 | 1 | 0.6 | 0.6 |
| Modulation Response | 3.2 | R | 1.732 | 1 | 1 | 1.8 | 1.8 |
| Readout Electronics | 0.3 | N | 1 | 1 | 1 | 0.3 | 0.3 |
| Response Time | 0.0 | R | 1.732 | 1 | 1 | 0.0 | 0.0 |
| Integration Time | 2.6 | R | 1.732 | 1 | 1 | 1.5 | 1.5 |
| RF Ambient Noise | 3.0 | R | 1.732 | 1 | 1 | 1.7 | 1.7 |
| RF Ambient Reflections | 3.0 | R | 1.732 | 1 | 1 | 1.7 | 1.7 |
| Probe Positioner | 0.4 | R | 1.732 | 1 | 1 | 0.2 | 0.2 |
| Probe Positioning | 6.7 | R | 1.732 | 1 | 1 | 3.9 | 3.9 |
| Max. SAR Eval. | 4.0 | R | 1.732 | 1 | 1 | 2.3 | 2.3 |
| Test Sample Related | | | | | | | |
| Device Positioning | 3.0 | N | 1 | 1 | 1 | 3.0 | 3.0 |
| Device Holder | 3.6 | N | 1 | 1 | 1 | 3.6 | 3.6 |
| Power Drift | 5.0 | R | 1.732 | 1 | 1 | 2.9 | 2.9 |
| Power Scaling | 0.0 | R | 1.732 | 1 | 1 | 0.0 | 0.0 |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty | 6.6 | R | 1.732 | 1 | 1 | 3.8 | 3.8 |
| SAR correction | 0.0 | R | 1.732 | 1 | 0.84 | 0.0 | 0.0 |
| Liquid Conductivity Repeatability | 0.2 | N | 1 | 0.78 | 0.71 | 0.1 | 0.1 |
| Liquid Conductivity (target) | 5.0 | R | 1.732 | 0.78 | 0.71 | 2.3 | 2.0 |
| Liquid Conductivity (mea.) | 2.5 | R | 1.732 | 0.78 | 0.71 | 1.1 | 1.0 |
| Temp. unc. - Conductivity | 3.4 | R | 1.732 | 0.78 | 0.71 | 1.5 | 1.4 |
| Liquid Permittivity Repeatability | 0.15 | N | 1 | 0.23 | 0.26 | 0.0 | 0.0 |
| Liquid Permittivity (target) | 5.0 | R | 1.732 | 0.23 | 0.26 | 0.7 | 0.8 |
| Liquid Permittivity (mea.) | 2.5 | R | 1.732 | 0.23 | 0.26 | 0.3 | 0.4 |
| Temp. unc. - Permittivity | 0.83 | R | 1.732 | 0.23 | 0.26 | 0.1 | 0.1 |
| Combined Std. Uncertainty | | | | | | 12.8% | 12.7% |
| Coverage Factor for 95 % | | | | | | K=2 | K=2 |
| Expanded STD Uncertainty | | | | | | 25.5% | 25.4% |

Table 18.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



19. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [9] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

#System Check_Head_750MHz_160427

DUT: D750V3 - SN:1099

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1
Medium: HSL_750_160427 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 41.534$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3 °C ; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.72, 10.72, 10.72); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.38 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.48 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.73 W/kg
SAR(1 g) = 1.93 W/kg; SAR(10 g) = 1.3 W/kg
Maximum value of SAR (measured) = 2.39 W/kg

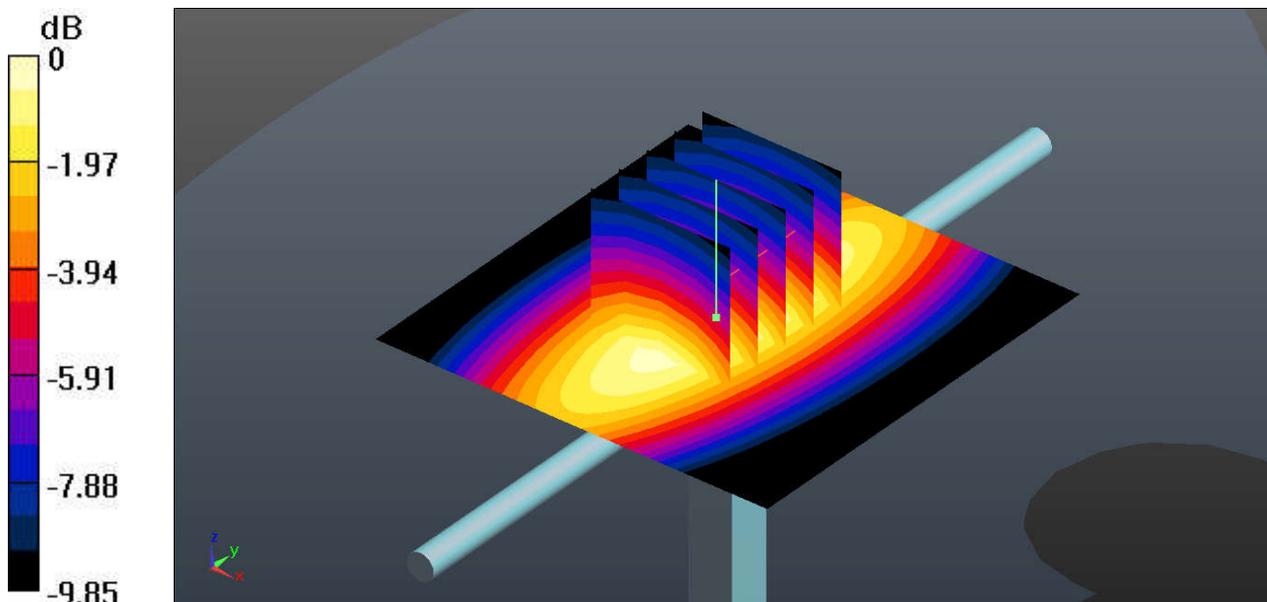

0 dB = 2.38 W/kg

#System Check_Head_835MHz_160427

DUT: D835V2 - SN:4d162

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_160427 Medium parameters used: $f = 835$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.529$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C ; Liquid Temperature: 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.15 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 60.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.03 W/kg

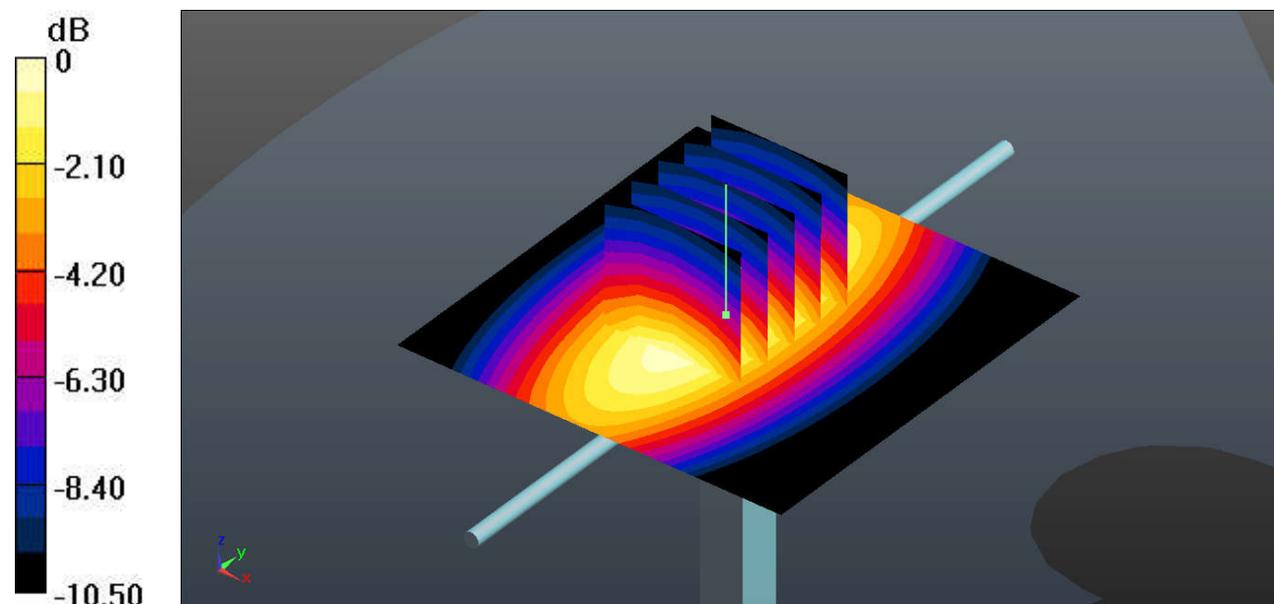

0 dB = 3.15 W/kg

#System Check_Head_1750MHz_160426

DUT: D1750V2 - SN:1023

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
 Medium: HSL_1800_160426 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.895$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C ; Liquid Temperature: 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 93.82 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 14.9 W/kg

SAR(1 g) = 8.56 W/kg; SAR(10 g) = 4.67 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

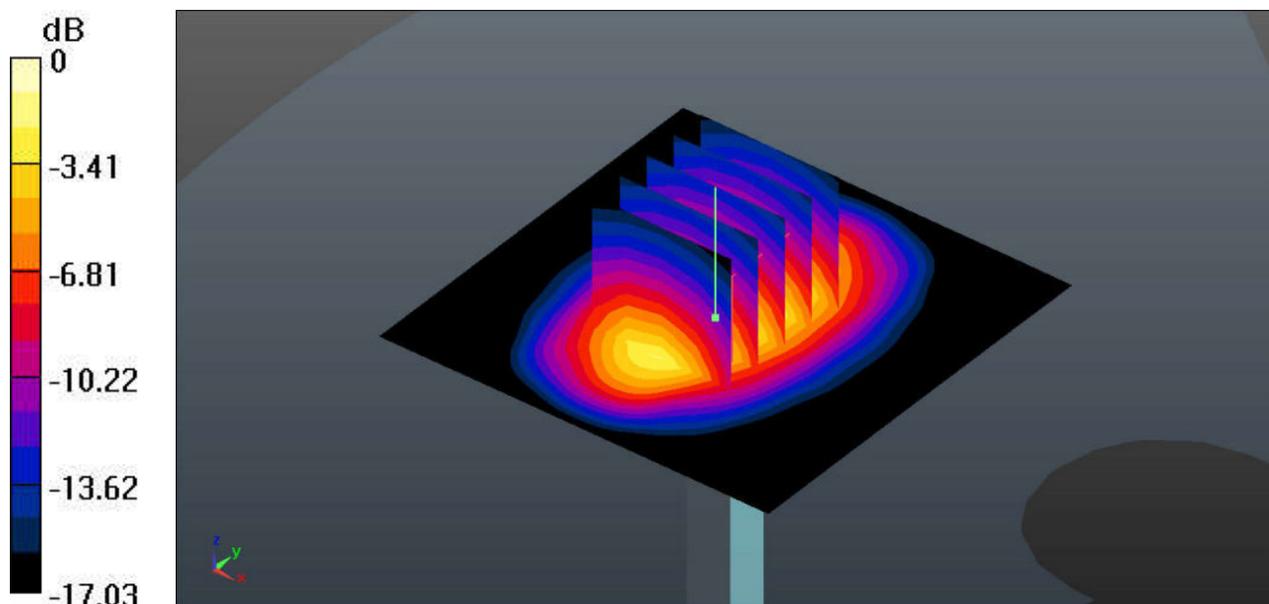

0 dB = 11.9 W/kg

#System Check_Head_1900MHz_160427

DUT: D1900V2 - SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: HSL_1900_160427 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.994$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 99.99 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.63 W/kg; SAR(10 g) = 5 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

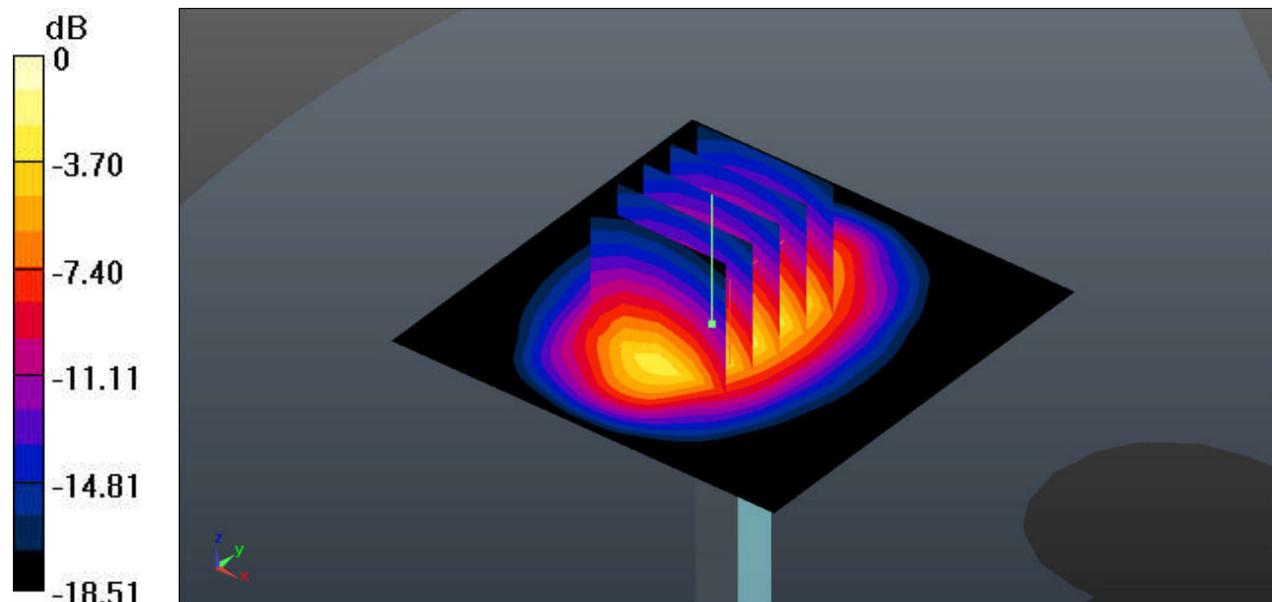

0 dB = 14.0 W/kg

#System Check_Head_1900MHz_160528

DUT: D1900V2

Communication System: UID 0, CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: HSL_1900_160528 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 40.315$;
 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C ; **Liquid Temperature:** 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.1.7
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 17.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 112.8 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.48 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

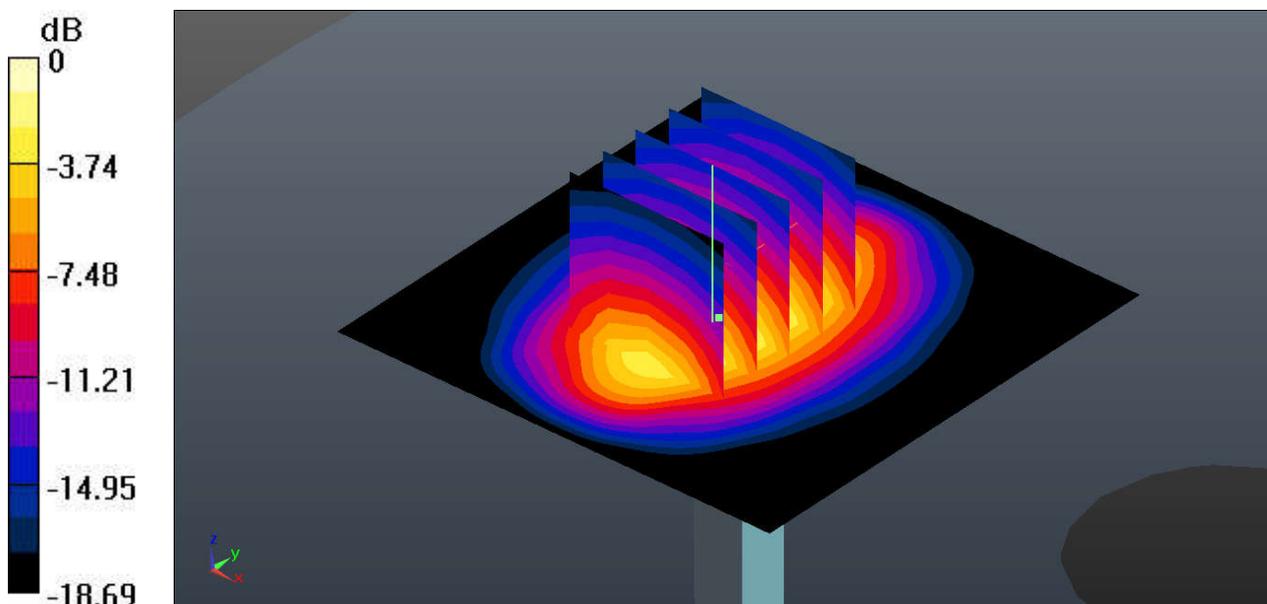

0 dB = 17.8 W/kg

#System Check_Head_2450MHz_160510

DUT: D2450V2 - SN:924

Communication System: UID 0, CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: HSL_2450_160510 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 39.664$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.6 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(7.58, 7.58, 7.58); Calibrated: 2015.07.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.1 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.50 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.21 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

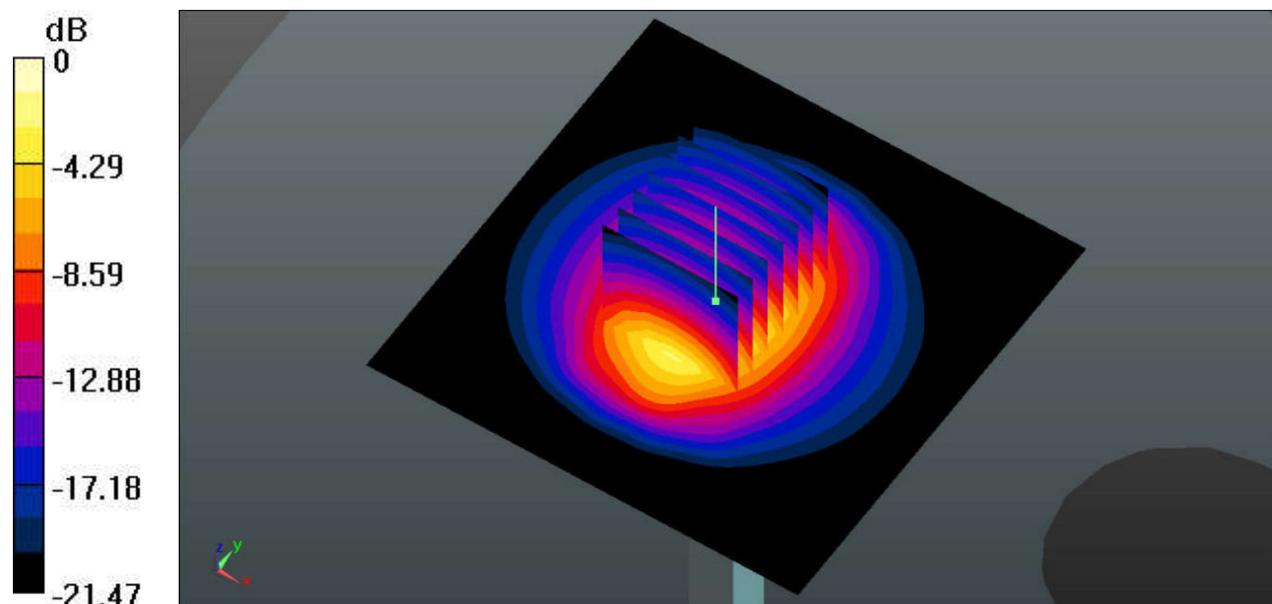

0 dB = 20.1 W/kg

#System Check_Head_2600MHz_160428

DUT: D2600V2 - SN:1070

Communication System: UID 0, CW; Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: HSL_2600_160428 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.054$ S/m; $\epsilon_r = 38.328$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.5 °C ; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.26, 7.26, 7.26); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 24.2 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 15.4 W/kg; SAR(10 g) = 6.92 W/kg

Maximum value of SAR (measured) = 24.0 W/kg

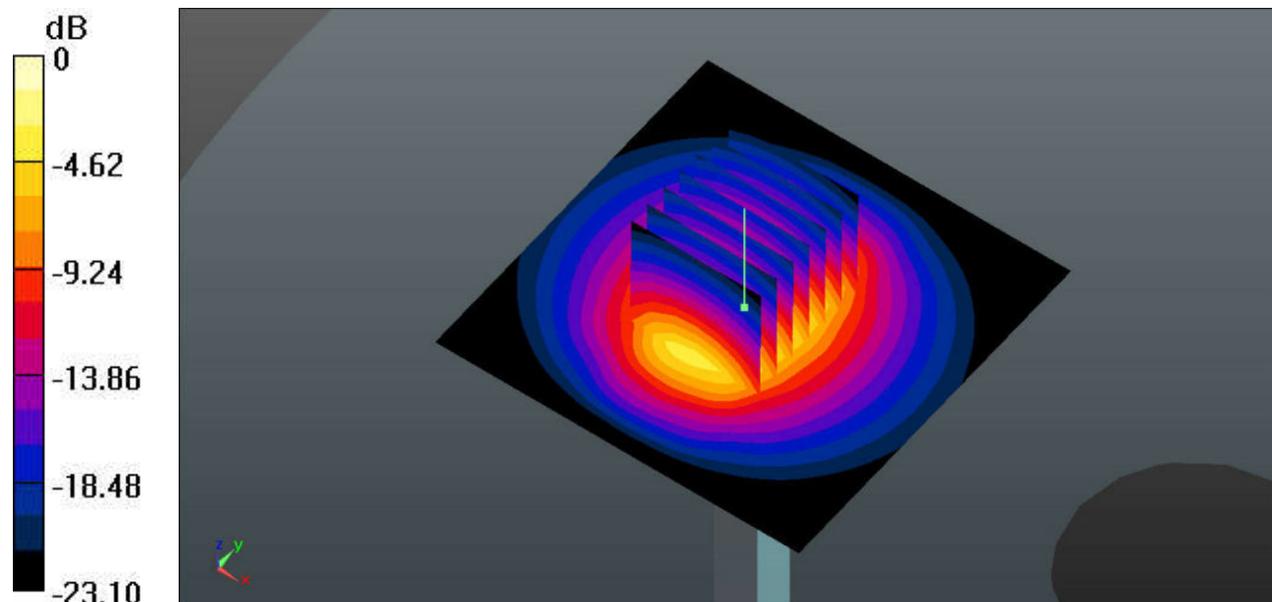

0 dB = 24.2 W/kg

System Check_Head_5250MHz_160513

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: HSL_5250_160513 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.626$ S/m; $\epsilon_r = 37.038$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.7 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(5.77, 5.77, 5.77); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.9 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.64 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

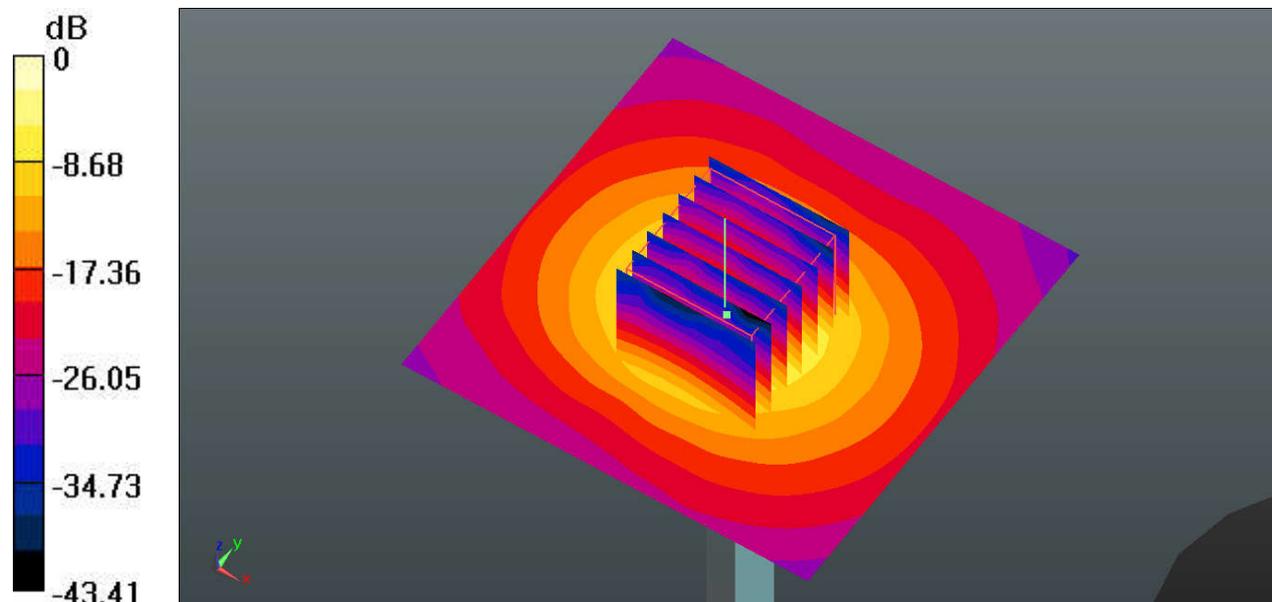

0 dB = 14.9 W/kg

#System Check_Head_5600MHz_160513

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: HSL_5600_160513 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.034$ S/m; $\epsilon_r = 36.508$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.8 °C ; Liquid Temperature: 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(4.95, 4.95, 4.95); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 16.0 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.96 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

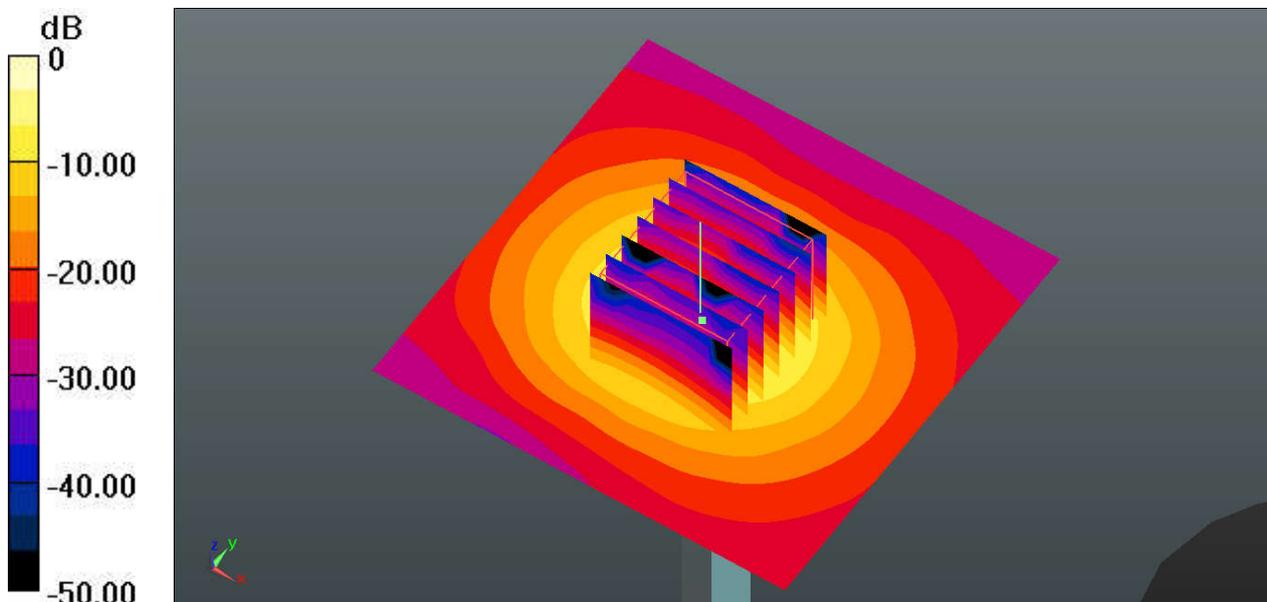

0 dB = 16.0 W/kg

System Check_Head_5750MHz_160513

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1
Medium: HSL_5750_160513 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.203$ S/m; $\epsilon_r = 36.253$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.8 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(5.15, 5.15, 5.15); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.4 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 51.66 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.3 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

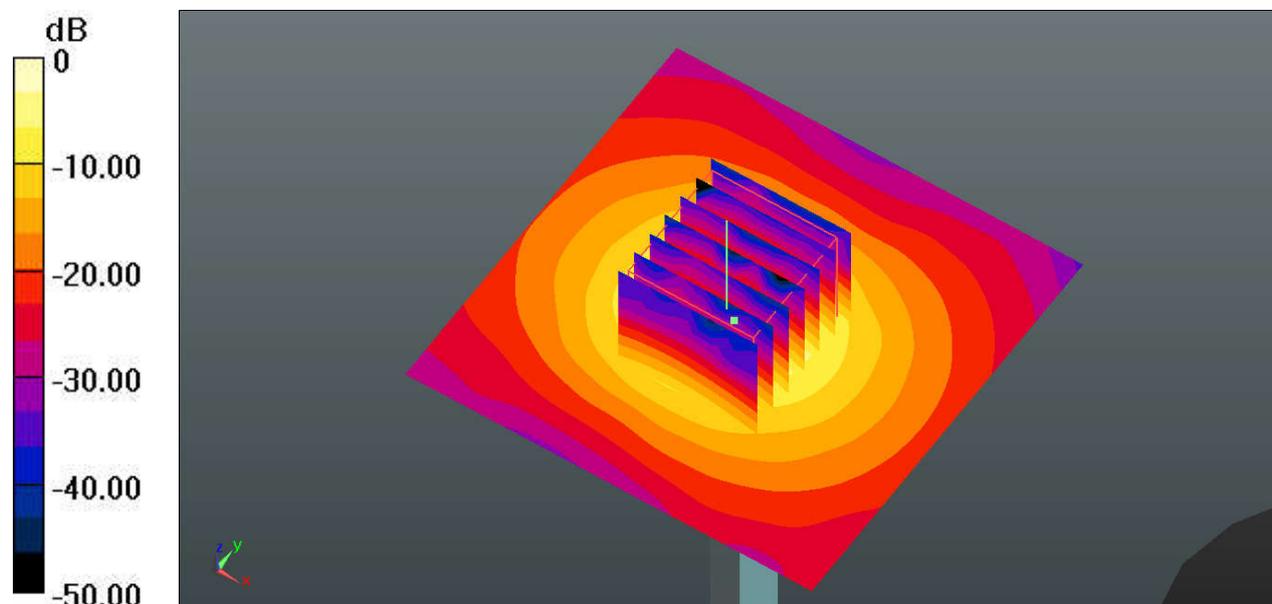

0 dB = 14.4 W/kg

#System Check_Body_750MHz_160428

DUT: D750V3 - SN:1099

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL_750_160428 Medium parameters used: $f = 750$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 55.039$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.4 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.59, 10.59, 10.59); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.61 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 52.89 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.01 W/kg
SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.42 W/kg
Maximum value of SAR (measured) = 2.61 W/kg

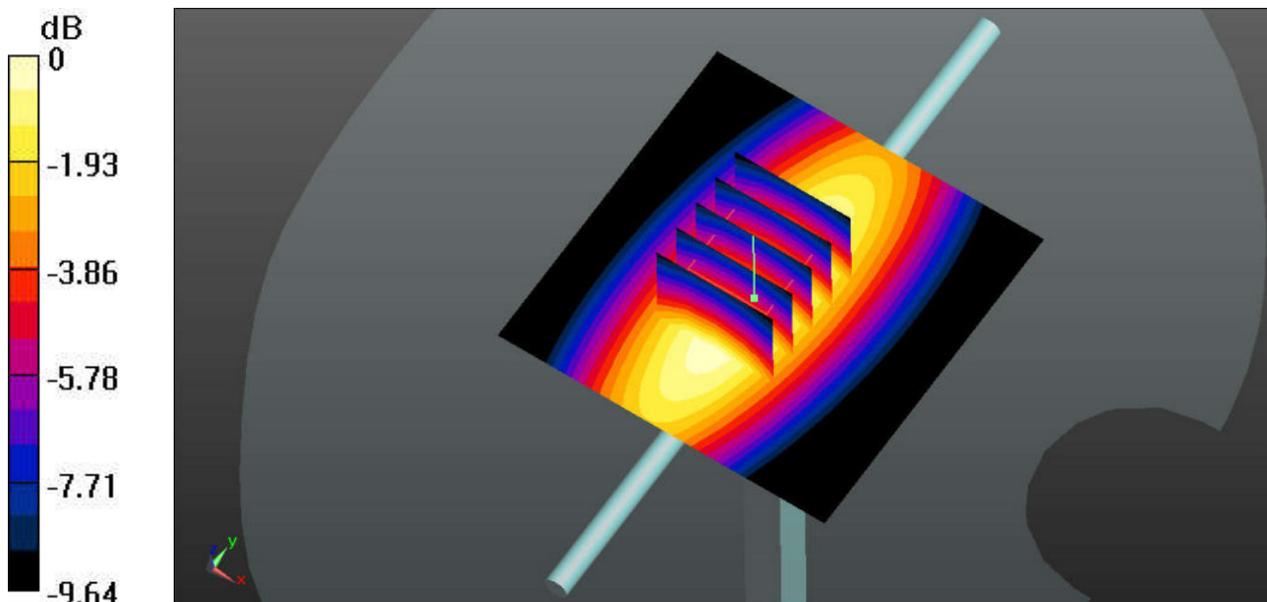

0 dB = 2.61 W/kg

#System Check_Body_835MHz_160428

DUT: D835V2 - SN:4d162

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL_835_160428 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.977 \text{ S/m}$; $\epsilon_r = 54.442$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.4 °C ; Liquid Temperature: 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 3.11 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 58.31 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 3.56 W/kg
SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.59 W/kg
Maximum value of SAR (measured) = 3.06 W/kg

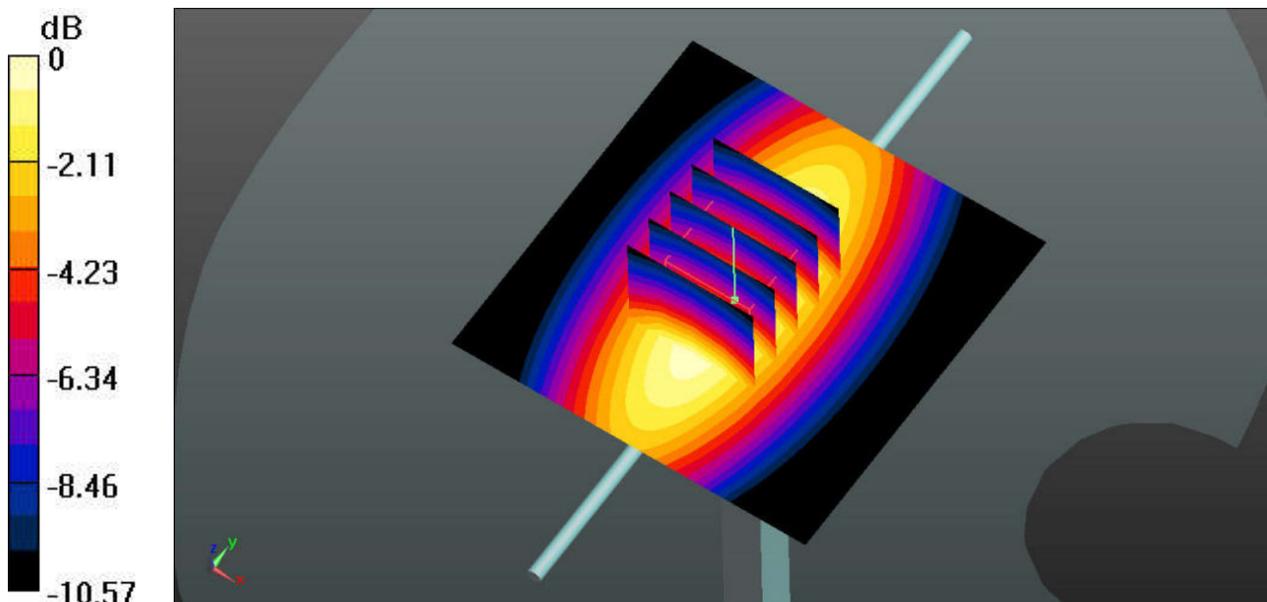

0 dB = 3.11 W/kg

#System Check_Body_1750MHz_160426

DUT: D1750V2 - SN:1023

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1800_160426 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 55.728$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.4 °C ; Liquid Temperature: 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.35 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 8.73 W/kg; SAR(10 g) = 4.68 W/kg

Maximum value of SAR (measured) = 12.3 W/kg

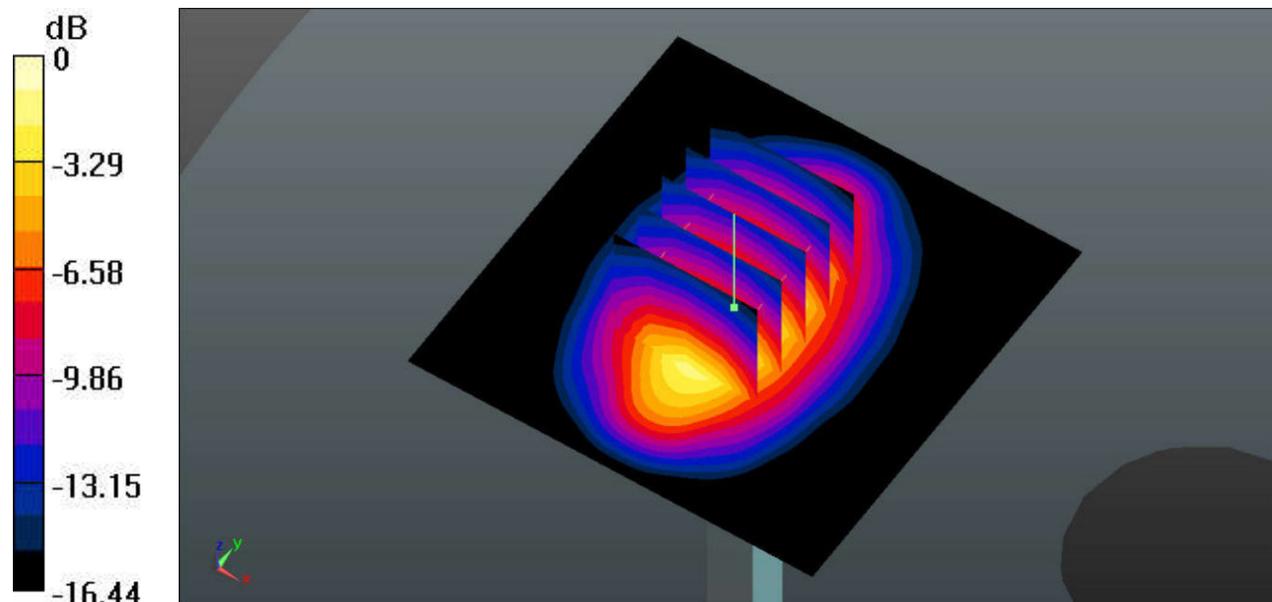

0 dB = 12.2 W/kg

#System Check_Body_1900MHz_160429

DUT: D1900V2 - SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: MSL_1900_160429 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 54.595$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.4 °C ; Liquid Temperature: 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.32 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

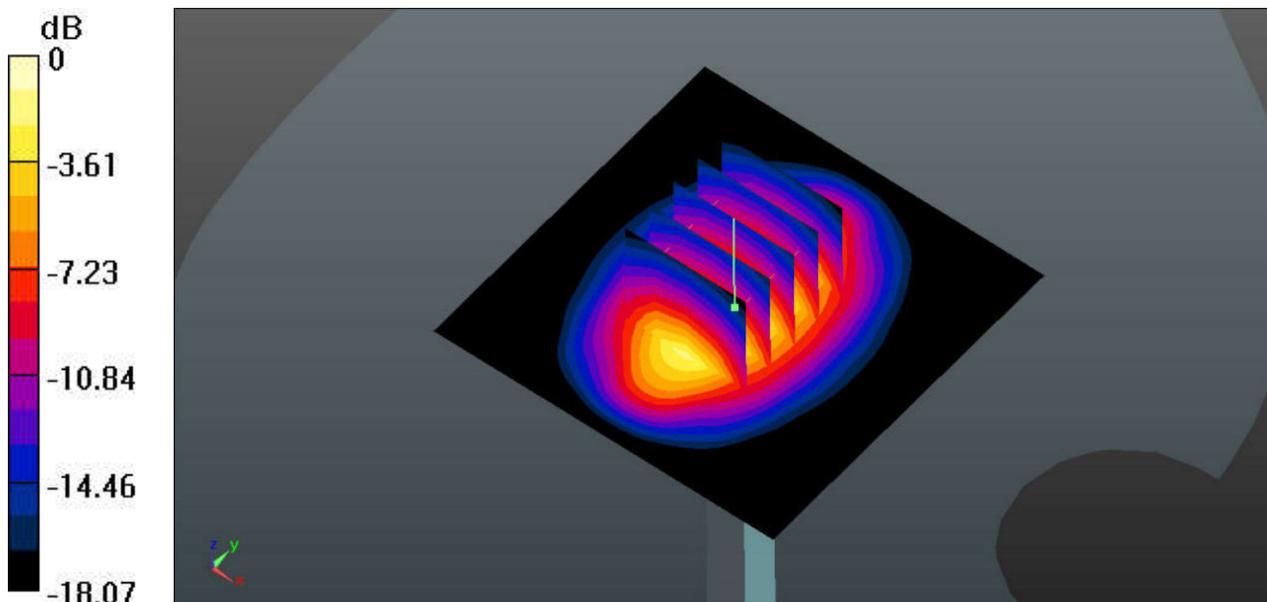

0 dB = 14.6 W/kg

#System Check_Body_2600MHz_160429

DUT: D2600V2 - SN:1070

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: MSL_2600_160429 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.165$ S/m; $\epsilon_r = 53.823$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.37, 7.37, 7.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 22.0 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.4 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 21.3 W/kg

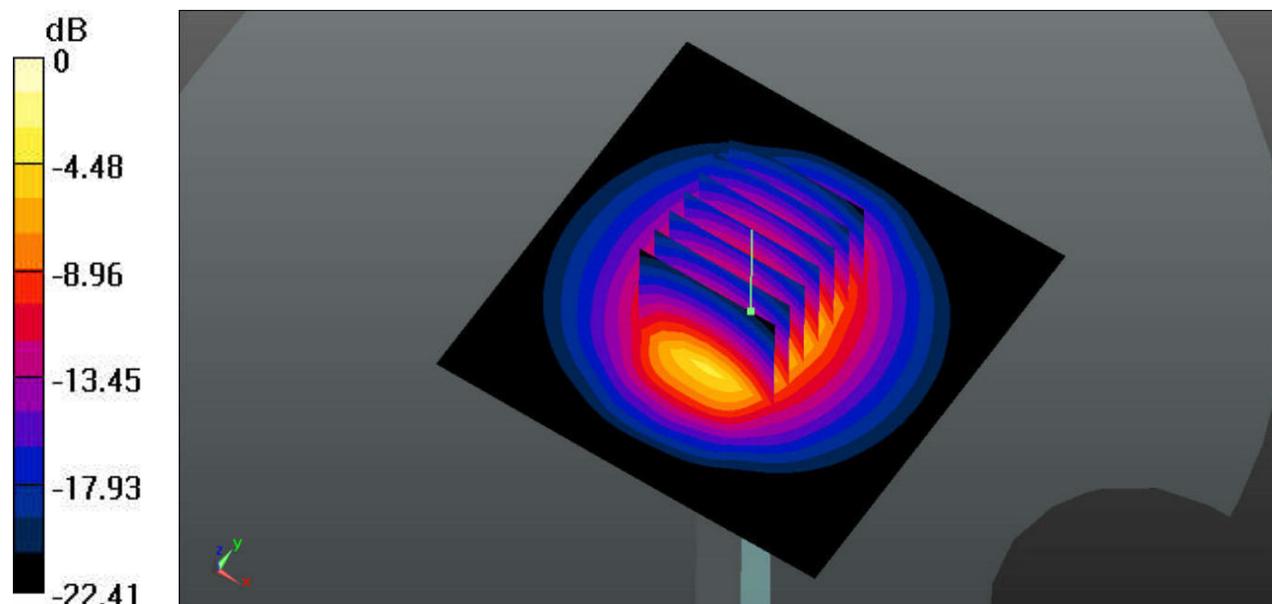

0 dB = 22.0 W/kg

#System Check_Body_750MHz_160510

DUT: D750V3 - SN:1099

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1
Medium: MSL_750_160510 Medium parameters used: $f = 750$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.5 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.05, 10.05, 10.05); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.83 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 55.25 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.29 W/kg
SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.54 W/kg
Maximum value of SAR (measured) = 2.84 W/kg

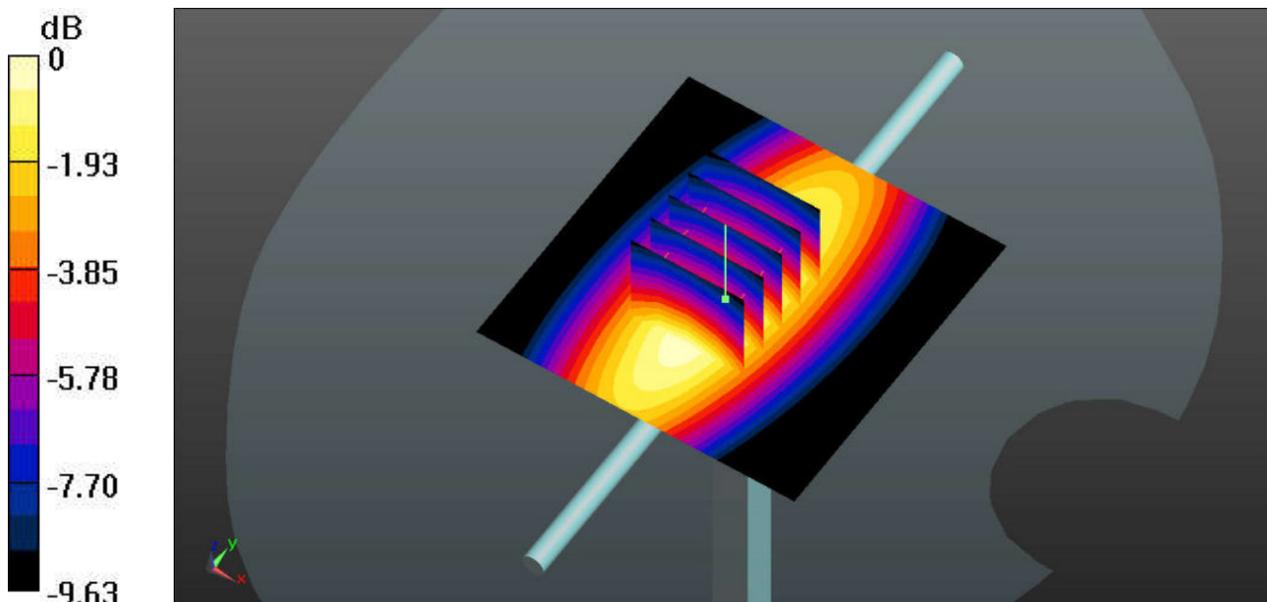

0 dB = 2.83 W/kg

#System Check_Body_835MHz_160510

DUT: D835V2 - SN:4d162

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL_835_160510 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.97 \text{ S/m}$; $\epsilon_r = 54.379$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(9.99, 9.99, 9.99); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 3.21 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 59.29 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 3.69 W/kg
SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.65 W/kg
Maximum value of SAR (measured) = 3.17 W/kg

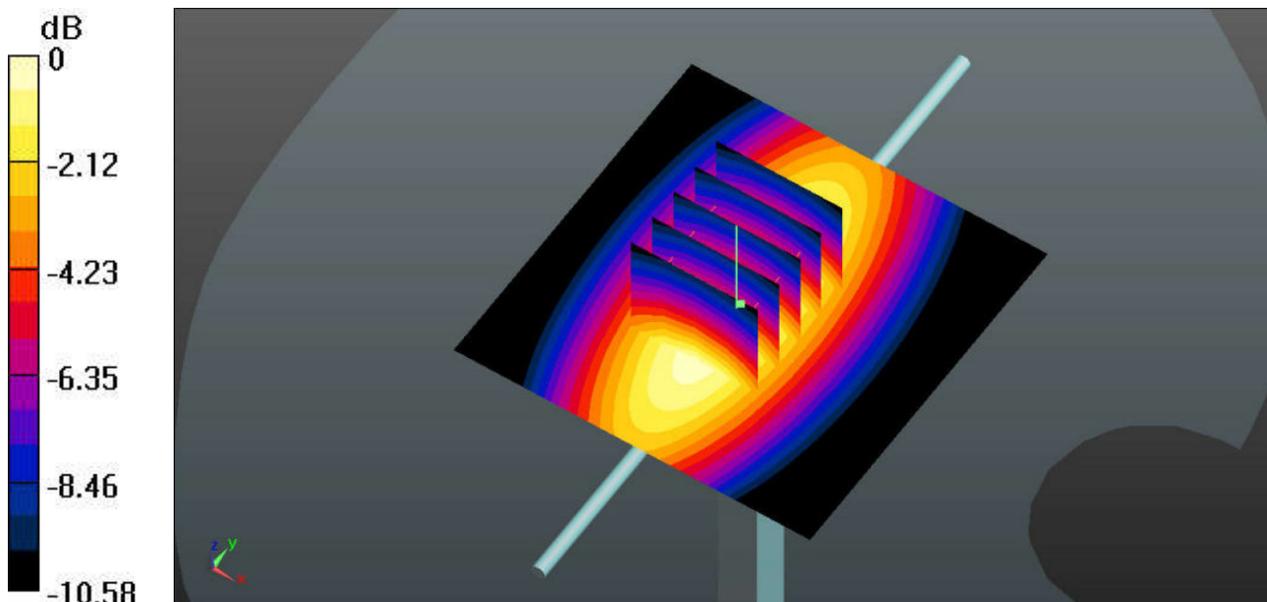

0 dB = 3.21 W/kg

#System Check_Body_1750MHz_160511

DUT: D1750V2 - SN:1023

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1800_160511 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.5 °C ; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.01, 8.01, 8.01); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.1 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.04 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.16 W/kg; SAR(10 g) = 4.9 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

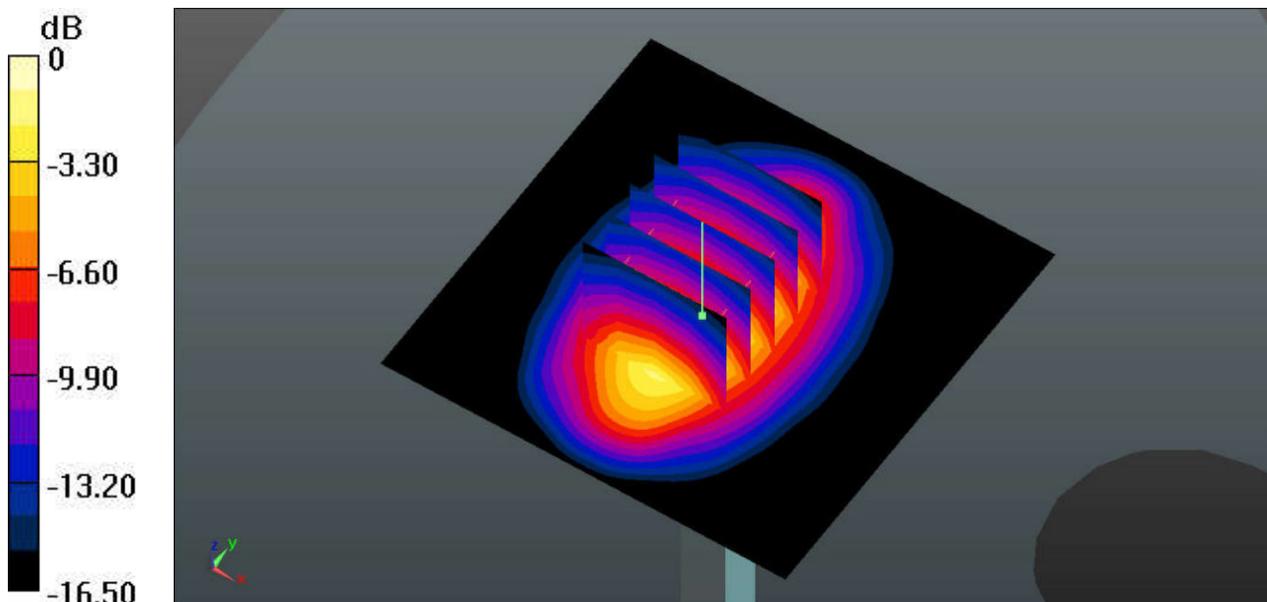

0 dB = 13.1 W/kg

#System Check_Body_1900MHz_160511

DUT: D1900V2 - SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL_1900_160511 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.576$ S/m; $\epsilon_r = 54.215$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.5 °C ; Liquid Temperature: 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.33 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.25 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

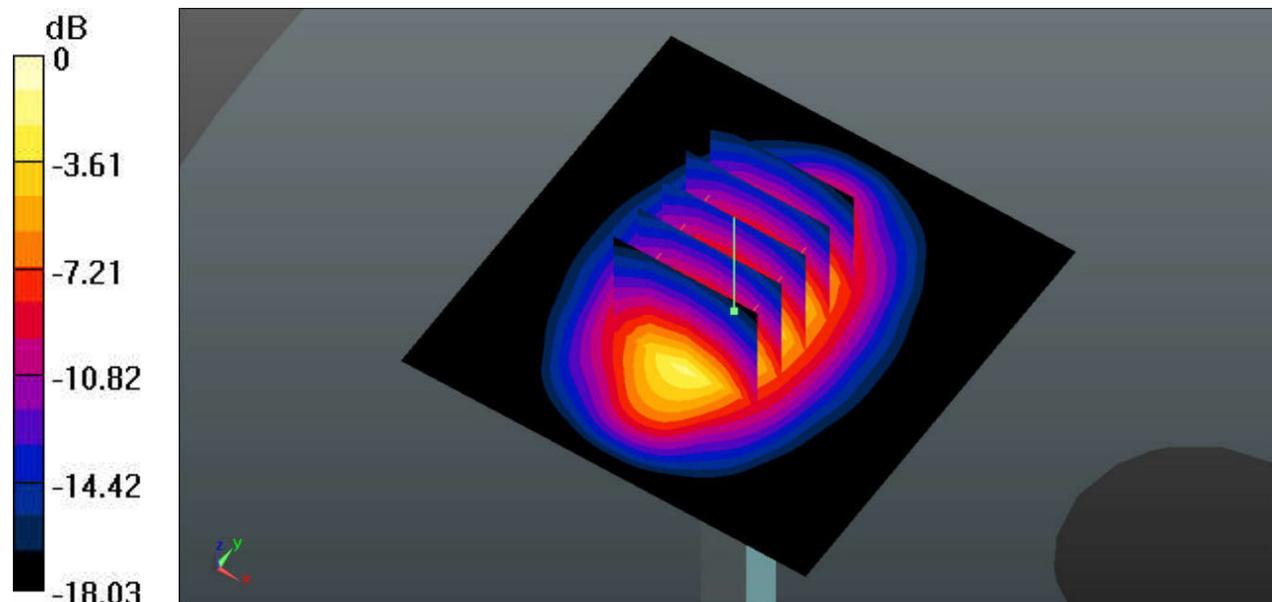

0 dB = 14.8 W/kg

#System Check_Body_1900MHz_160528

DUT: D1900V2

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL_1900_160528 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.576$ S/m; $\epsilon_r = 54.212$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.5 °C ; **Liquid Temperature:** 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.1.7
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 18.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 97.33 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 10.9 W/kg; SAR(10 g) = 5.75 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

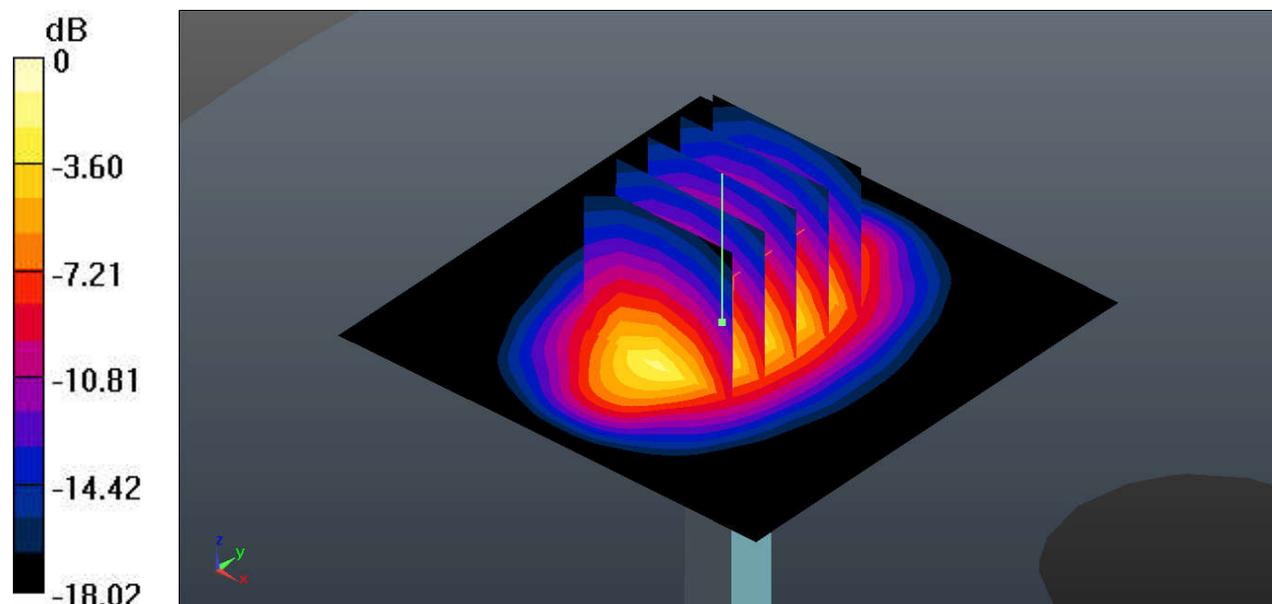

0 dB = 18.9 W/kg

#System Check_Body_2450MHz_160511

DUT: D2450V2 - SN:924

Communication System: UID 0, CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_160511 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 52.319$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.5 °C ; **Liquid Temperature:** 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.34, 7.34, 7.34); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 19.5 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.53 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 26.1 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.83 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

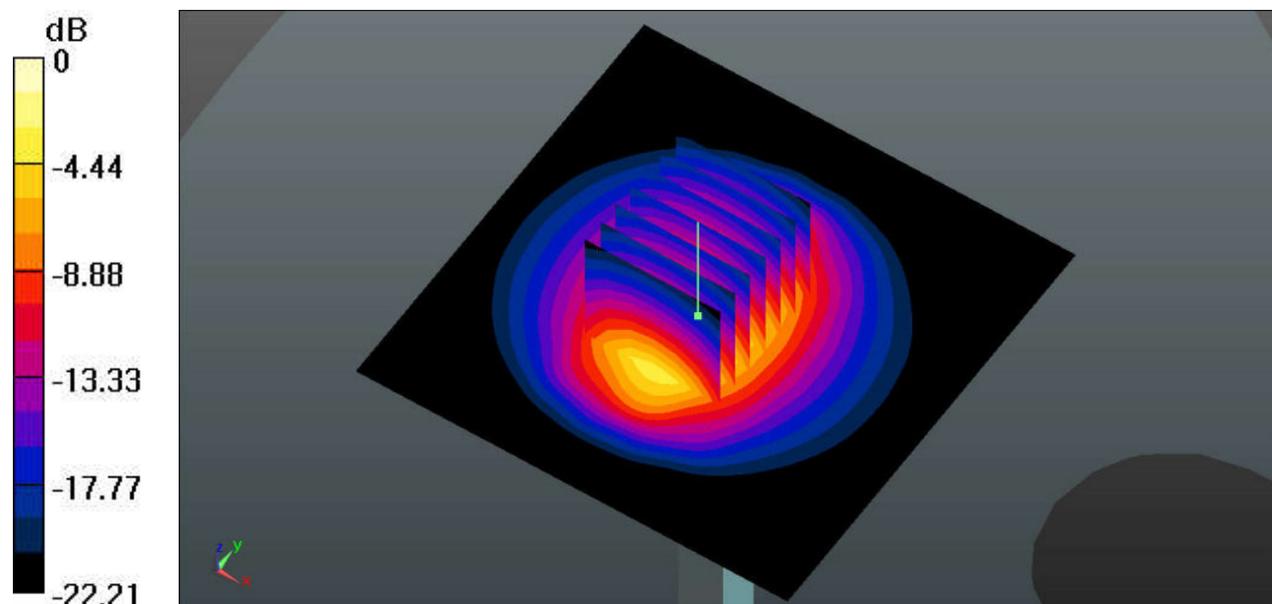

0 dB = 19.5 W/kg

#System Check_Body_2600MHz_160512

DUT: D2600V2 - SN:1070

Communication System: UID 0, CW; Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: MSL_2600_160512 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.201$ S/m; $\epsilon_r = 52.823$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.7 °C ; Liquid Temperature: 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.14, 7.14, 7.14); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 22.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.91 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.27 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

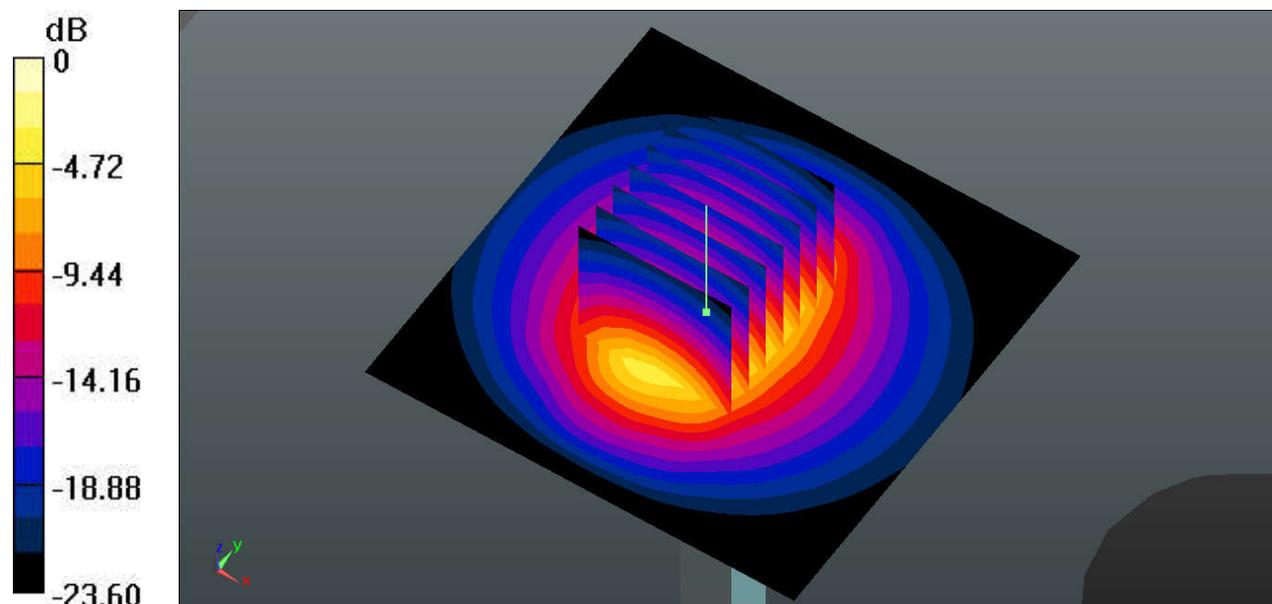

0 dB = 22.6 W/kg

#System Check_Body_5250MHz_160118

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: MSL_5250_160513 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 50.923$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.2, 4.2, 4.2); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 22.0 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.65 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 37.0 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 22.8 W/kg

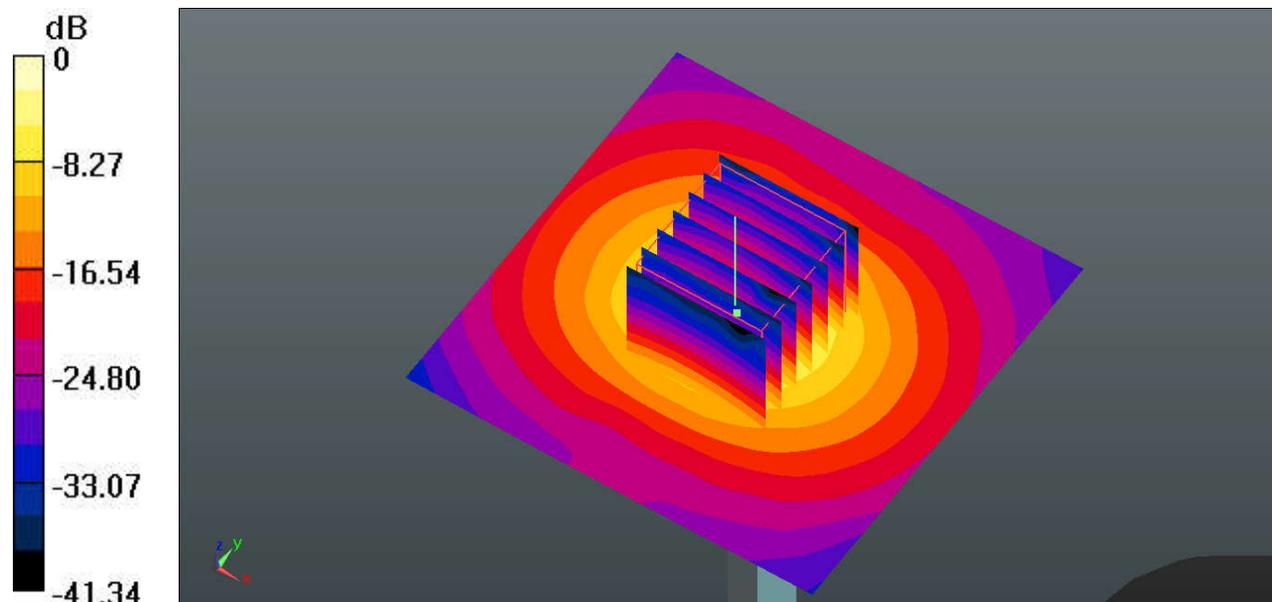

0 dB = 22.0 W/kg

#System Check_Body_5600MHz_160513

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium: MSL_5600_160513 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.884$ S/m; $\epsilon_r = 50.283$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.67, 3.67, 3.67); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 21.8 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.03 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 36.0 W/kg

SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 22.8 W/kg

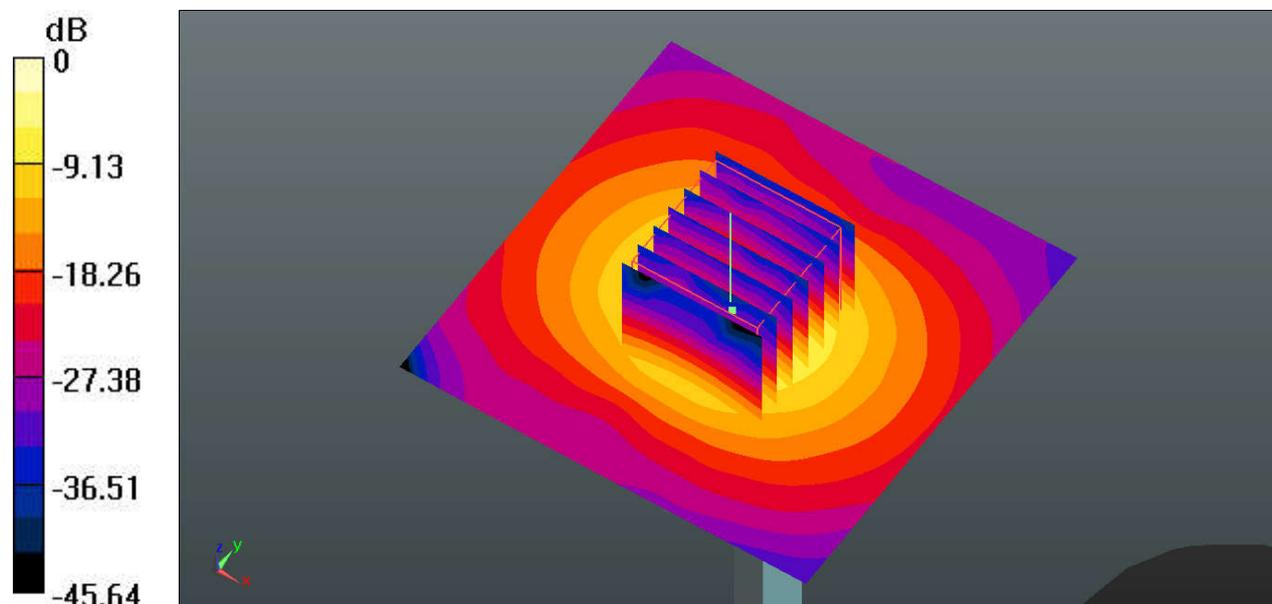

0 dB = 21.8 W/kg

#System Check_Body_5750MHz_160513

DUT: D5GHzV2 - SN:1167

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: MSL_5750_160513 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.113$ S/m; $\epsilon_r = 49.934$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.73, 3.73, 3.73); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 18.1 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.14 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 7.27 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

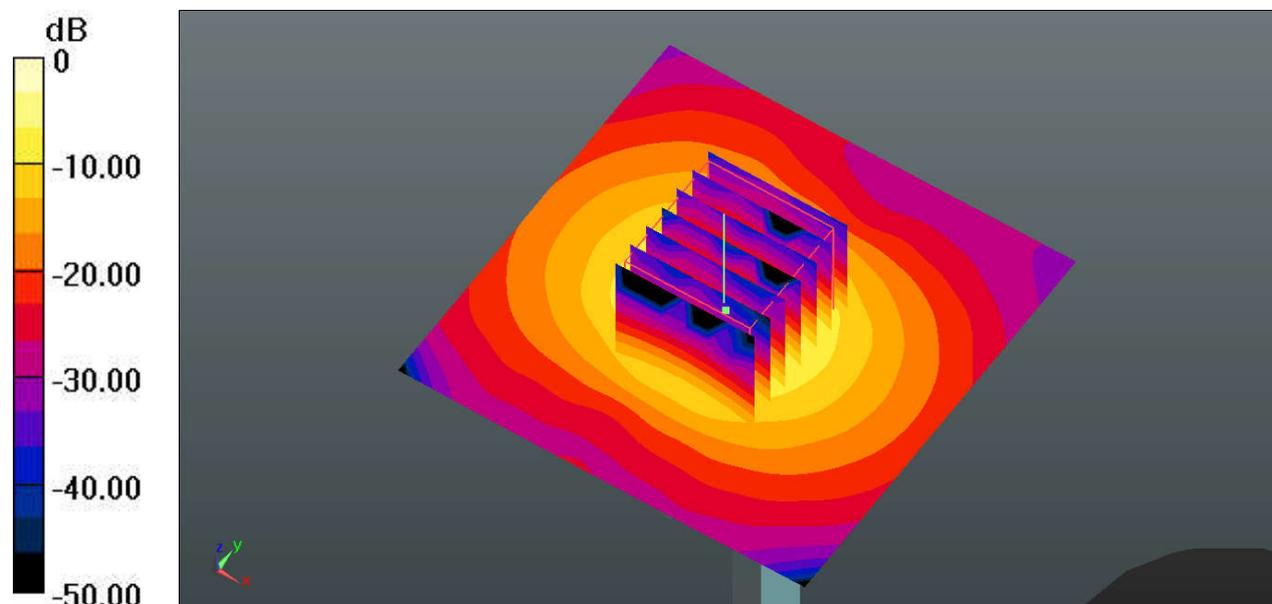

0 dB = 18.1 W/kg

System Check_Head_2600MHz_160725

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600_160725 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 37.767$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 7.08, 7.08); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 24.5 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.2 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.72 W/kg

Maximum value of SAR (measured) = 23.9 W/kg

