



TEST REPORT

No. I17Z60265-EMC01

for

TCL Communication Ltd.

SIMBA6 CRICKET

Model Name: 6060C

FCC ID: 2ACCJA021

with

Hardware Version: 10

Software Version: 2A5TUCT0

Issued Date: 2017-04-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z60265-EMC01	Rev.0	1 st edition	2017-04-20

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

Location YZ: CTTL(kangding Road)

Address: No. A18, Kangding Road, Yizhuang, Beijing,
P. R. China 100176

1.2. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-04-06

Testing End Date: 2017-04-10


1.4. Signature



Wang Junqing
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-51798260
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-51798260
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	SIMBA6 CRICKET
Model Name	6060C
FCC ID	2ACCJA021
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014889000003517	10	2A5TUCT0

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE3	Charger	/	/
AE11	USB Cable	/	/
AE12	USB Cable	/	/

AE1

Model	TLp027B1
SN	CAC2780001C1
Manufacturer	BYD
Capacitance	2780 mAh
Nominal voltage	/

AE3

Model	QC12US
SN	CBA0063AGPC1
Manufacturer	BYD
Length of cable	/

AE11

Model	CDA0000104CF
Manufacturer	/
Length of cable	98cm

AE12

Model	CDA0000078CF
Manufacturer	/
Length of cable	98cm

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.17	EUT1+ AE1+ AE3+ AE11/AE12	Charger
Set.18	EUT1+ AE1+ AE11/AE12	USB

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2015 Edition
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	YZ	The test is performed in test location YZ which is described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	YZ
2	Conducted Emission	15.107(a)	B.2	P	YZ

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATI ON INTERVAL
1	Test Receiver	ESU26	100376	R&S	2017-11-30	1 year
2	Test Receiver	ESCI 7	100948	R&S	2017-07-05	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2018-02-19	1 year
4	Universal Radio Communication Tester	CMW500	155415	R&S	2018-02-15	1 year
5	LISN	ESH2-Z5	829991/012	R&S	2017-04-11	1 year
6	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2017-11-24	3 years
7	EMI Antenna	3117	00139065	ETS-Lindgren	2017-09-21	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
10	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (charging mode of MS) at distances of 3 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 4.86dB, 1GHz-18GHz: 5.26dB, $k=2$.

Measurement results for Set.17:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17808.750	41.6	-23.0	41.0	23.622	V
17804.250	41.6	-23.1	41.0	23.676	H
17796.000	41.5	-23.2	41.0	23.715	V
17802.750	41.4	-23.1	41.0	23.540	H
17803.500	41.4	-23.1	41.0	23.517	V
17809.500	41.4	-23.0	41.0	23.419	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17883.750	53.2	-24.0	40.9	36.293	H
17811.000	53.1	-23.0	41.0	35.143	H
17813.250	52.6	-23.0	40.9	34.748	V
17790.750	52.6	-23.3	41.0	34.972	V
17667.000	52.6	-25.3	41.1	36.835	V
17852.250	52.5	-23.6	40.9	35.168	H

Sample calculation: Peak detector, 17852.250MHz

$$\text{Result} = P_{\text{Mea}} (35.168\text{dB}\mu\text{V}) + G_A (40.9\text{dB/m}) + G_{\text{PL}}(-23.6 \text{ dB}) = 52.5\text{dB}\mu\text{V/m}$$

Measurement results for Set.18:
USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17808.750	41.5	-23.0	41.0	23.553	V
17802.000	41.3	-23.1	41.0	23.432	H
17798.250	41.2	-23.2	41.0	23.421	V
17793.750	41.2	-23.2	41.0	23.483	V
17801.250	41.2	-23.1	41.0	23.360	H
17797.500	41.2	-23.2	41.0	23.410	H

USB Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17816.250	54.0	-23.1	40.9	36.147	H
17794.500	53.1	-23.2	41.0	35.389	V
17801.250	52.7	-23.1	41.0	34.900	V
17790.750	52.5	-23.3	41.0	34.874	H
17814.750	52.4	-23.1	40.9	34.557	V
17810.250	52.4	-23.0	41.0	34.485	H

Sample calculation: Peak detector, 17810.250MHz

Result =P_{Mea} (34.485dB μ V)+ G_A (41.0dB/m)+ G_{PL}(-23.0 dB) =52.4dB μ V/m

Charging Mode, Set.17

15B RE 30MHz-1GHz

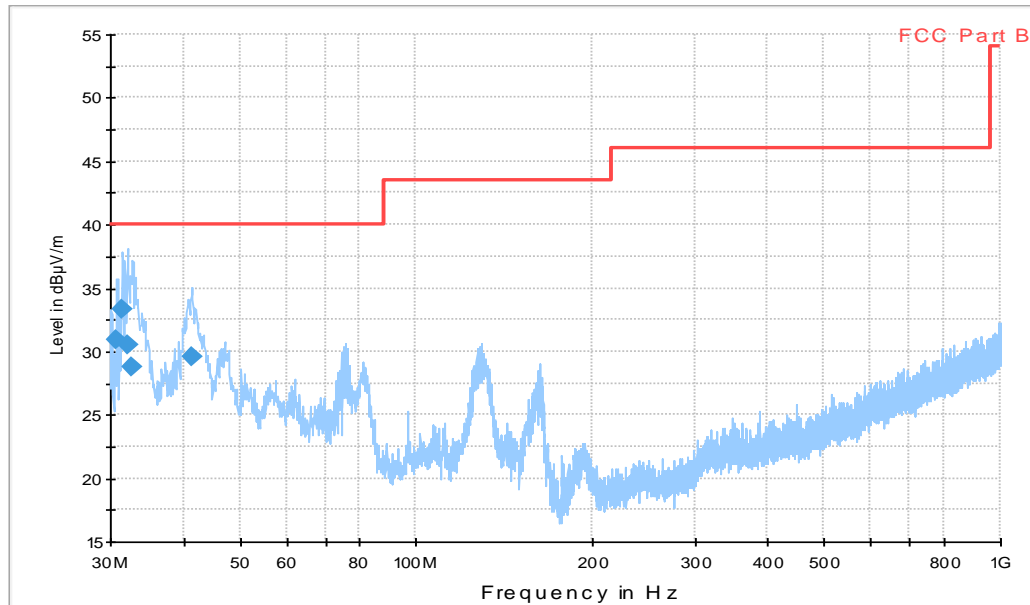


Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency	QuasiPeak	Height	Polarization	Azimuth	Corr.	Margin	Limit
30.776000	31.0	114.0	V	135.0	-22.1	9.0	40.0
31.455000	33.3	125.0	V	225.0	-21.6	6.7	40.0
32.037000	30.5	100.0	V	90.0	-21.2	9.5	40.0
32.716000	28.8	100.0	V	52.0	-21.0	11.2	40.0
41.349000	29.6	125.0	V	76.0	-18.7	10.4	40.0

15B RE - 1GHz-3GHz

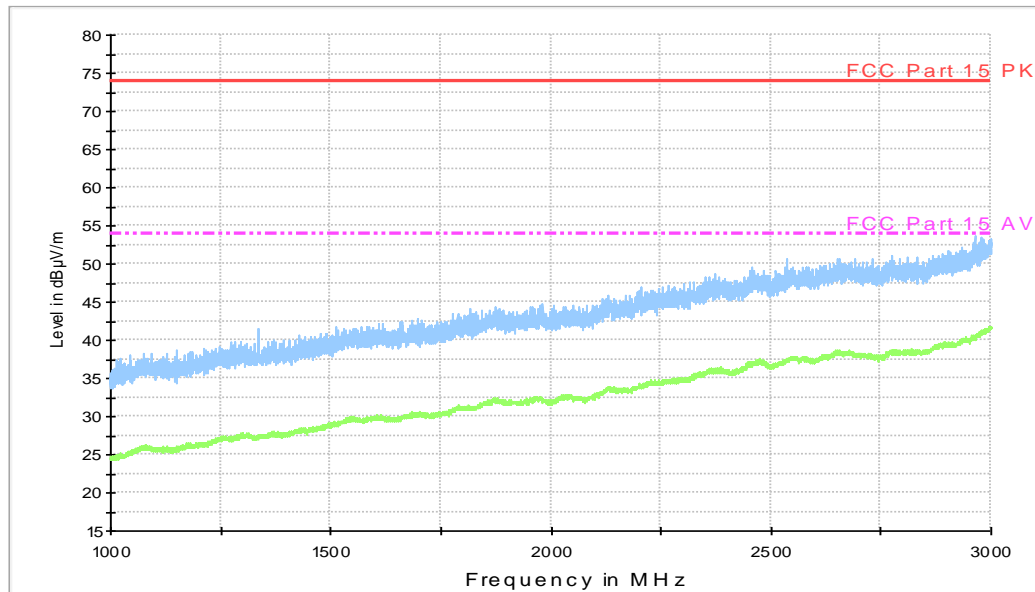


Figure A.2 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

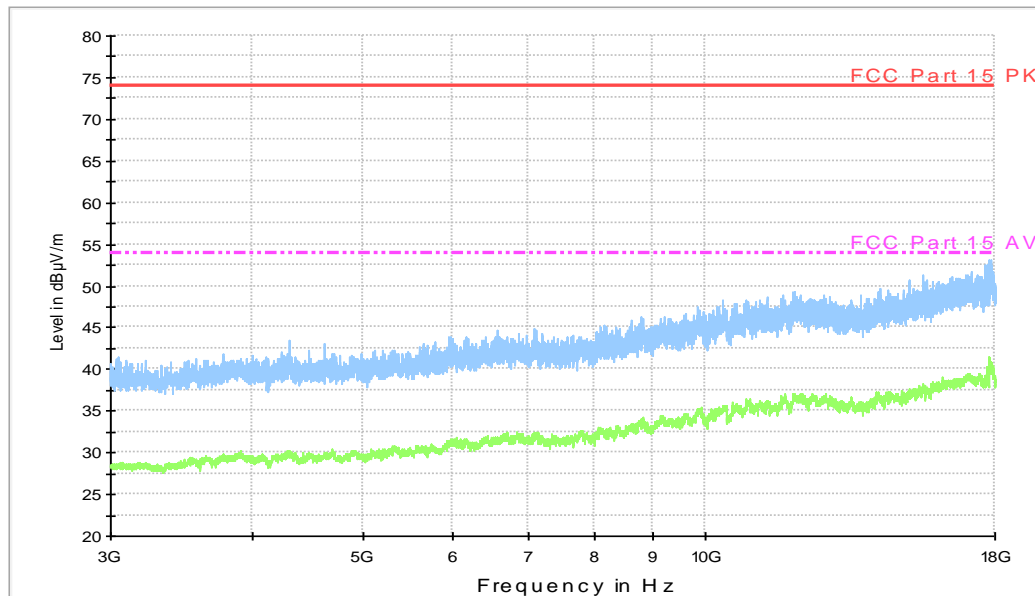


Figure A.3 Radiated Emission from 3GHz to 18GHz

USB Mode, Set.18

15B RE 30MHz-1GHz

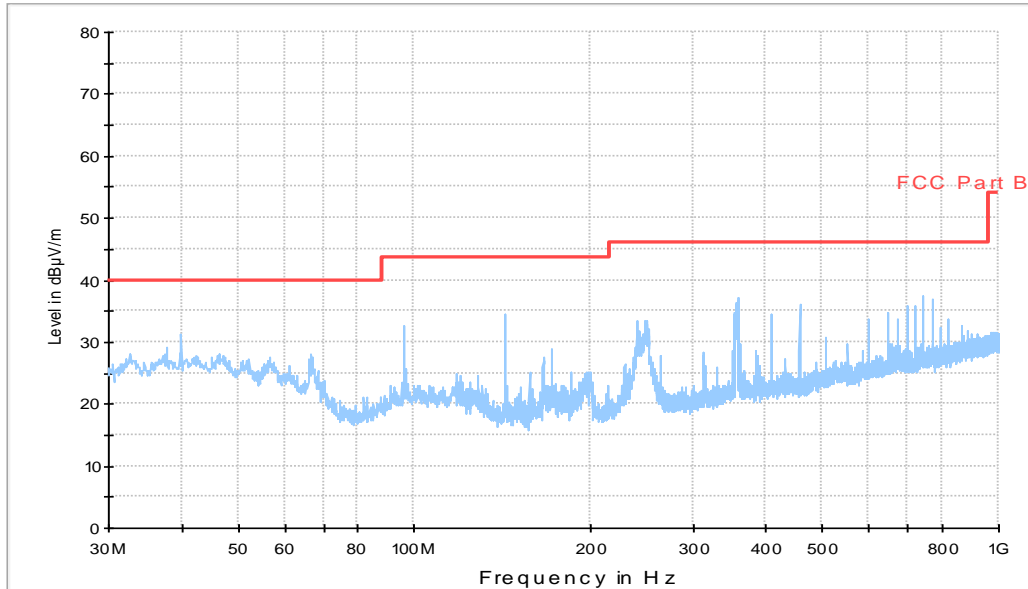


Figure A.4 Radiated Emission from 30MHz to 1GHz

15B RE - 1GHz-3GHz

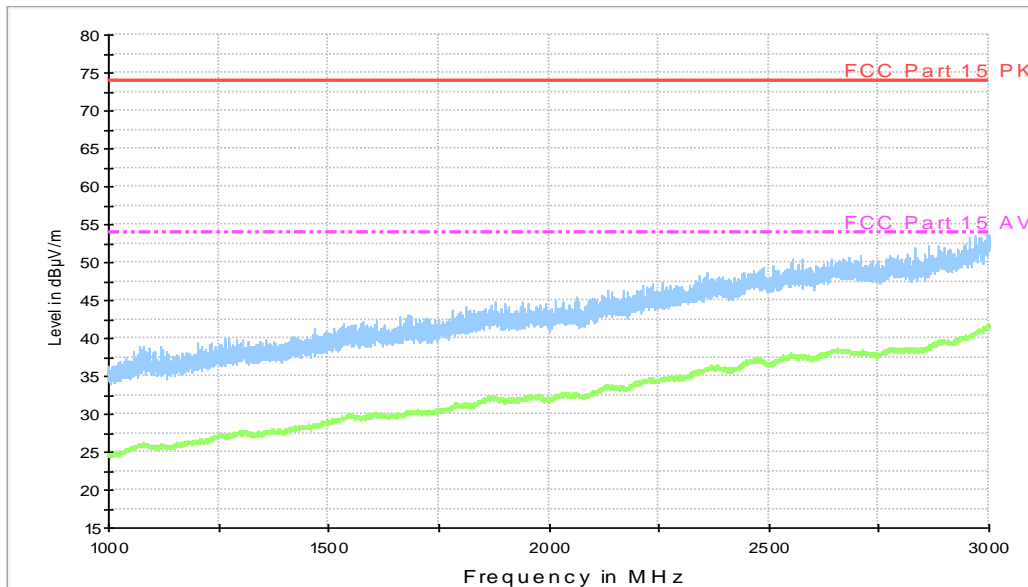


Figure A.5 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

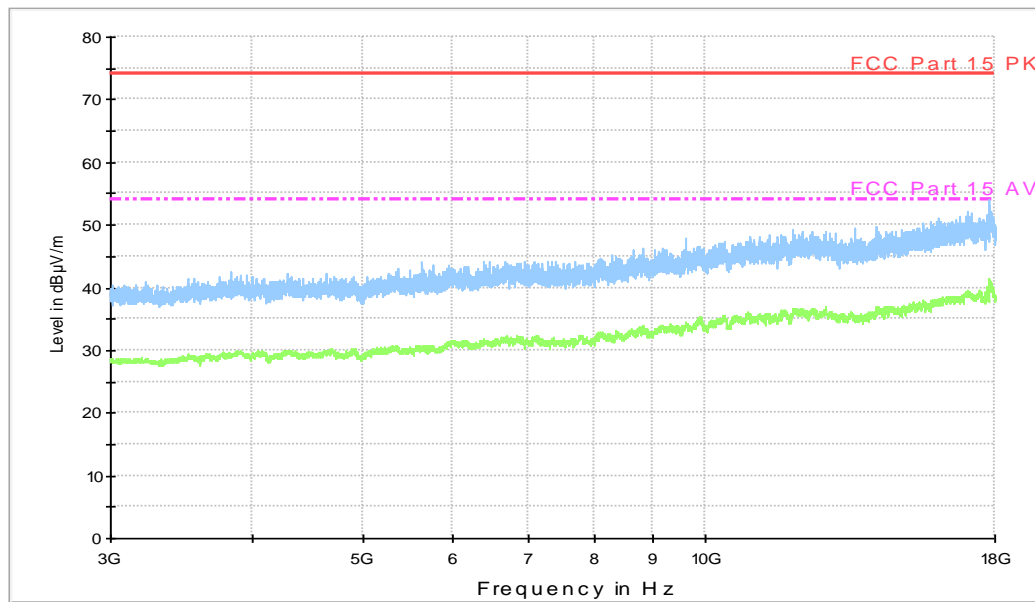


Figure A.6 Radiated Emission from 3GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.38\text{dB}$, $k=2$.

Charging Mode, Set.17

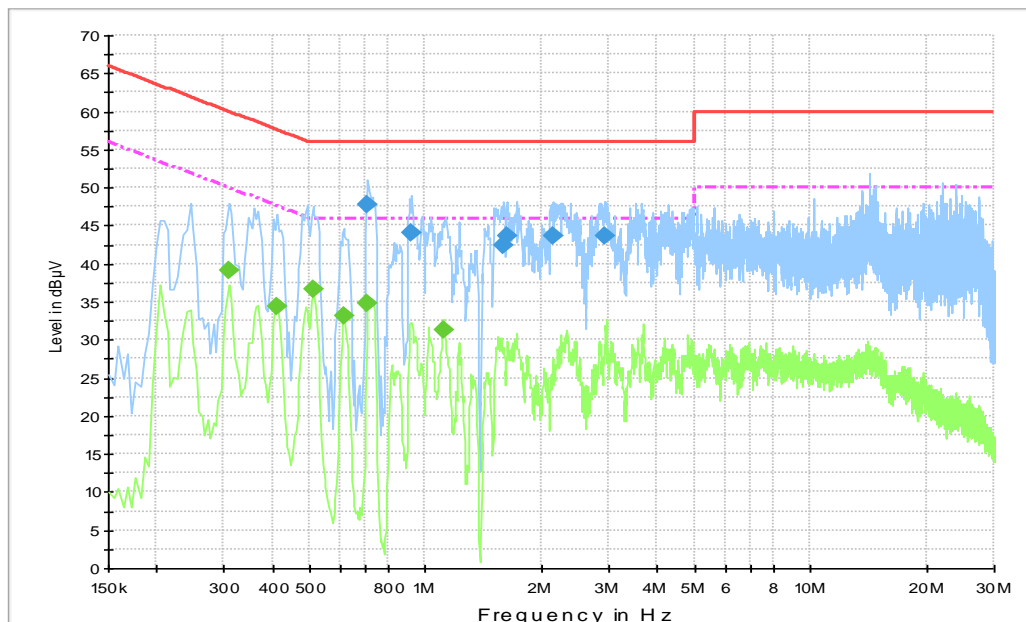


Figure A.7 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.708000	47.8	2000.0	9.000	On	N	10.3	8.2	56.0
0.919500	44.0	2000.0	9.000	On	N	10.3	12.0	56.0
1.599000	42.5	2000.0	9.000	On	N	10.3	13.5	56.0
1.621500	43.6	2000.0	9.000	On	N	10.3	12.4	56.0
2.134500	43.6	2000.0	9.000	On	N	10.4	12.4	56.0
2.913000	43.6	2000.0	9.000	On	N	10.4	12.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.307500	39.2	2000.0	9.000	On	N	10.3	10.9	50.0
0.411000	34.3	2000.0	9.000	On	N	10.3	13.3	47.6
0.510000	36.7	2000.0	9.000	On	N	10.3	9.3	46.0
0.613500	33.2	2000.0	9.000	On	N	10.3	12.8	46.0
0.708000	34.8	2000.0	9.000	On	N	10.3	11.2	46.0
1.113000	31.2	2000.0	9.000	On	N	10.3	14.8	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.18

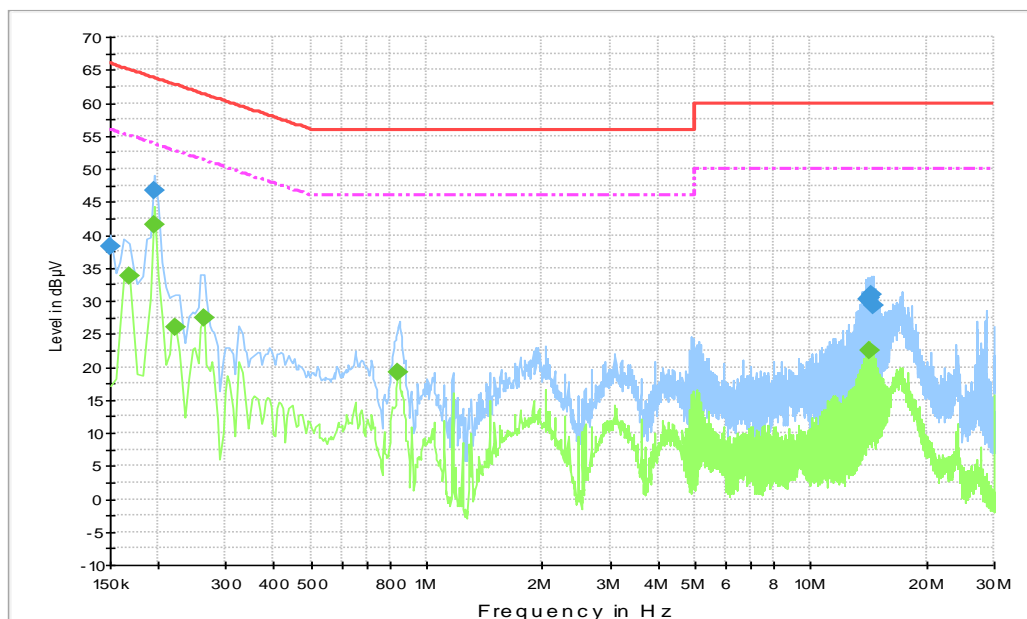


Figure A.7 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.3	2000.0	9.000	On	N	10.3	27.7	66.0
0.195000	46.6	2000.0	9.000	On	N	10.3	17.2	63.8
14.086500	30.2	2000.0	9.000	On	N	10.8	29.8	60.0
14.217000	30.4	2000.0	9.000	On	N	10.8	29.6	60.0
14.410500	30.9	2000.0	9.000	On	N	10.8	29.1	60.0
14.478000	29.2	2000.0	9.000	On	N	10.8	30.8	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	33.8	2000.0	9.000	On	N	10.3	21.3	55.1
0.195000	41.6	2000.0	9.000	On	N	10.3	12.2	53.8
0.222000	25.9	2000.0	9.000	On	N	10.3	26.8	52.7
0.262500	27.4	2000.0	9.000	On	N	10.3	23.9	51.4
0.843000	19.3	2000.0	9.000	On	N	10.3	26.7	46.0
14.217000	22.4	2000.0	9.000	On	N	10.8	27.6	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

END OF REPORT