

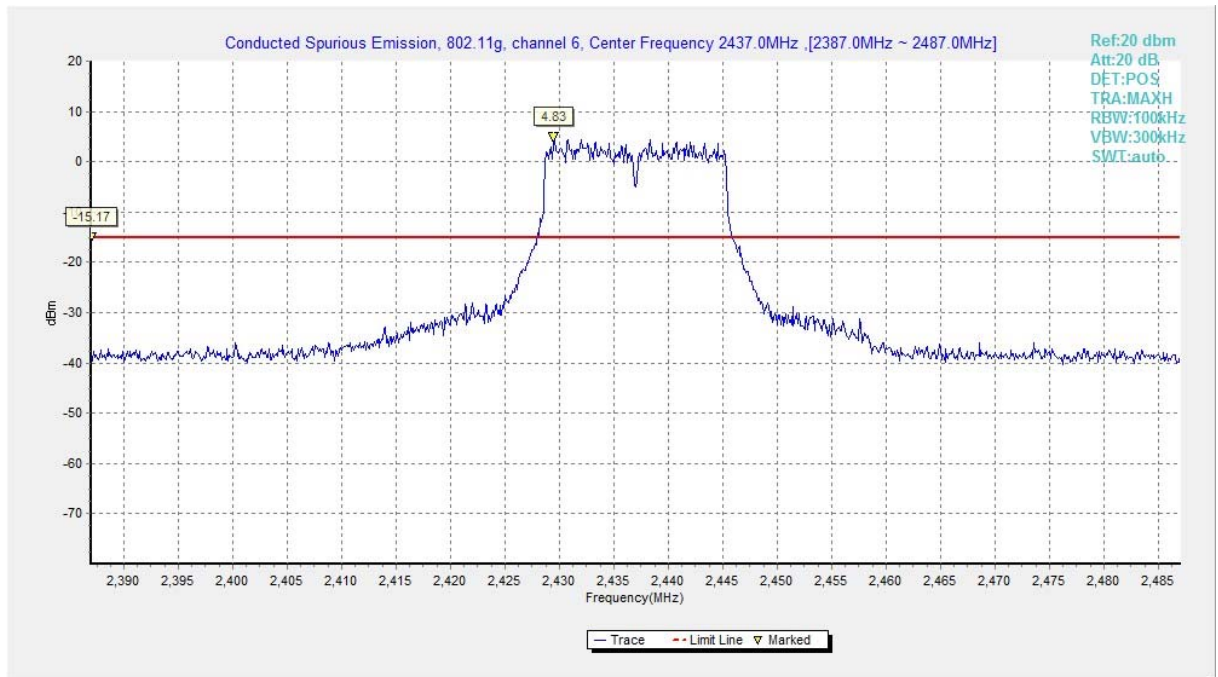


Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)

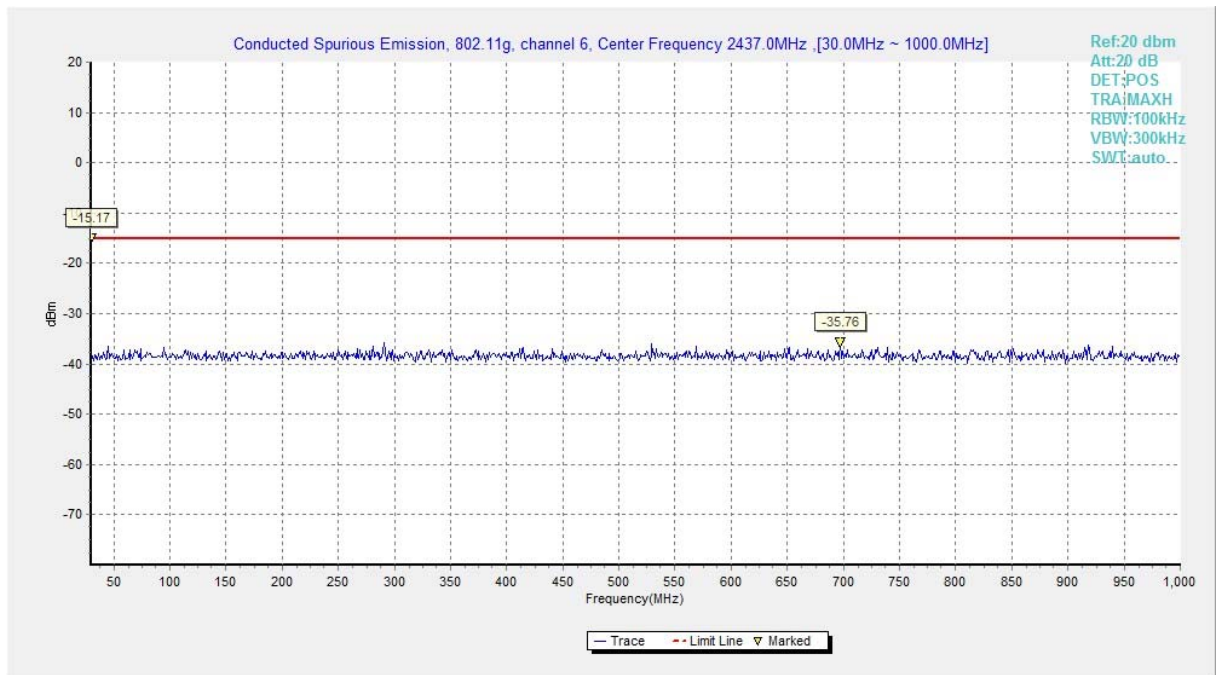


Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)

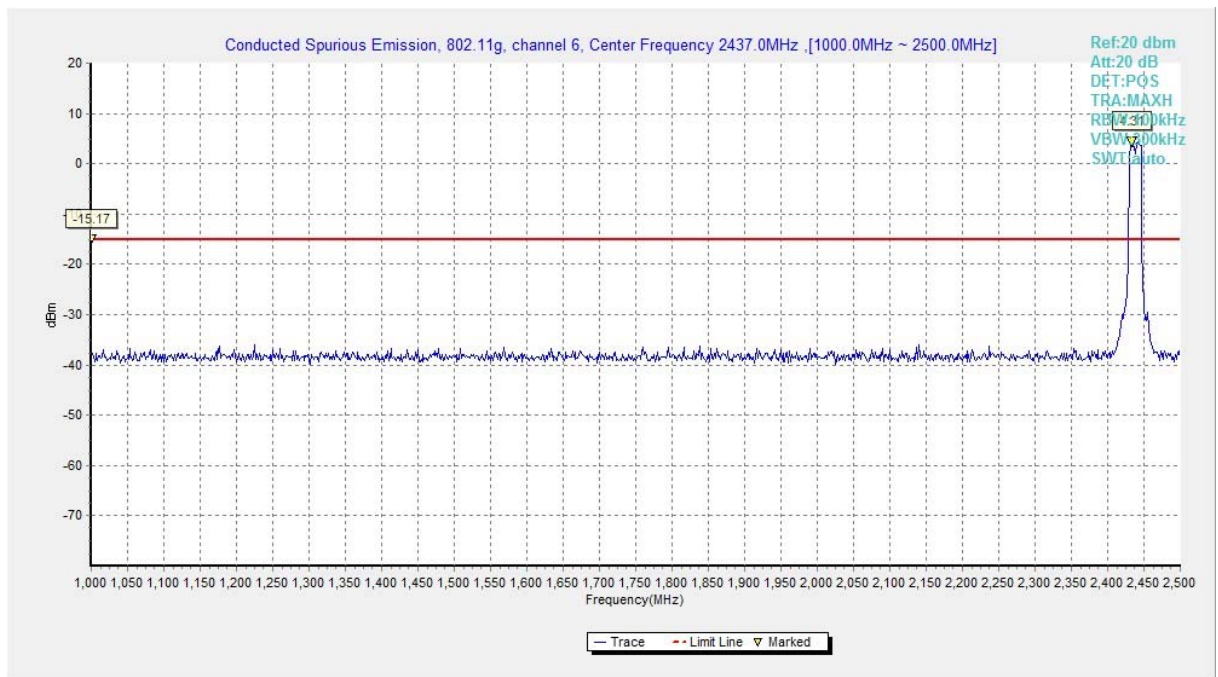


Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-2.5 GHz)

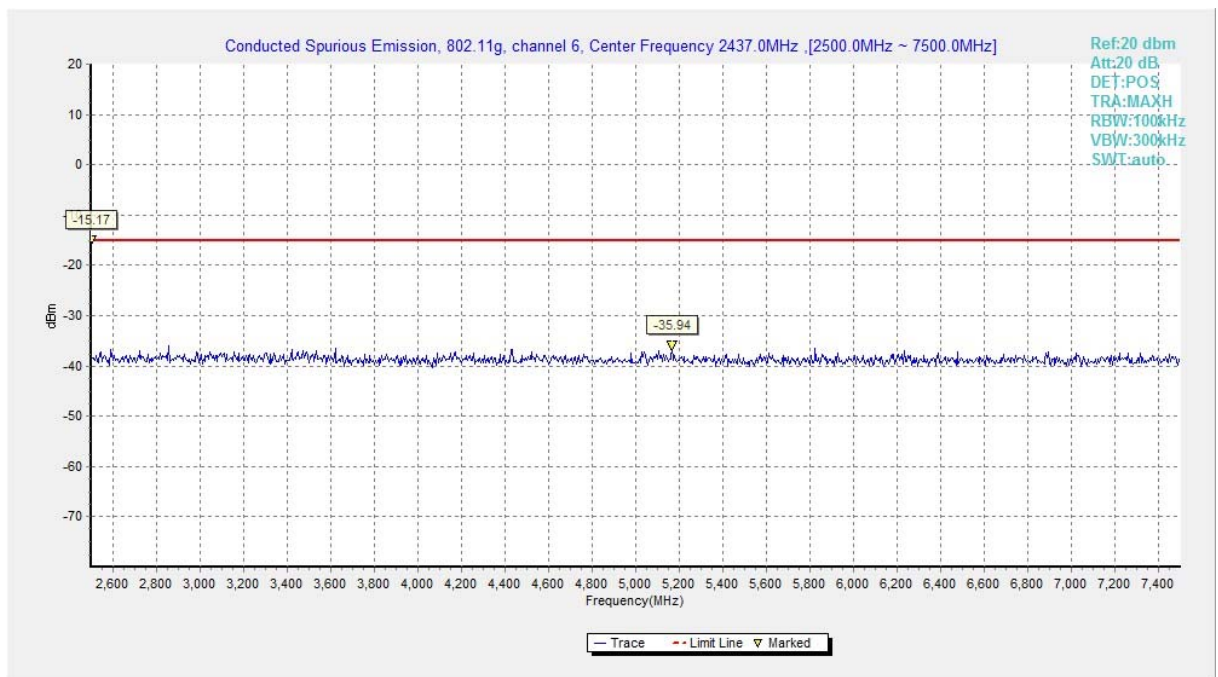


Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 2.5 GHz-7.5 GHz)

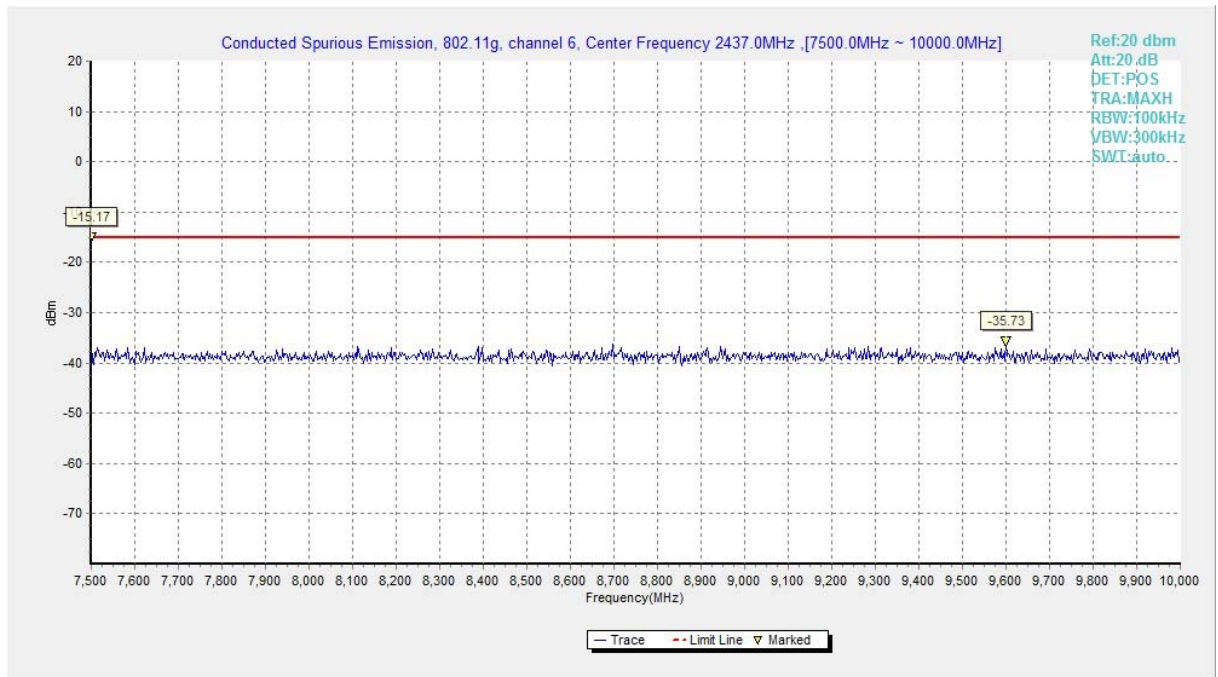


Fig.A.6.1.37 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 7.5 GHz-10 GHz)

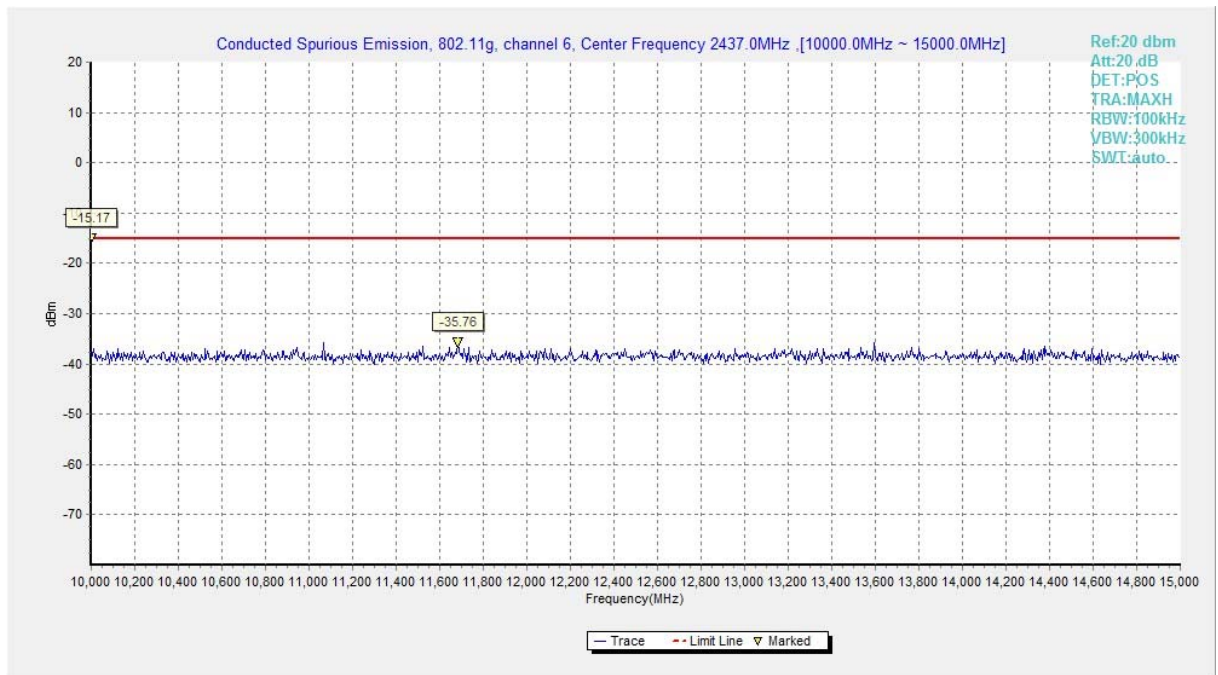


Fig.A.6.1.38 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 10 GHz-15 GHz)

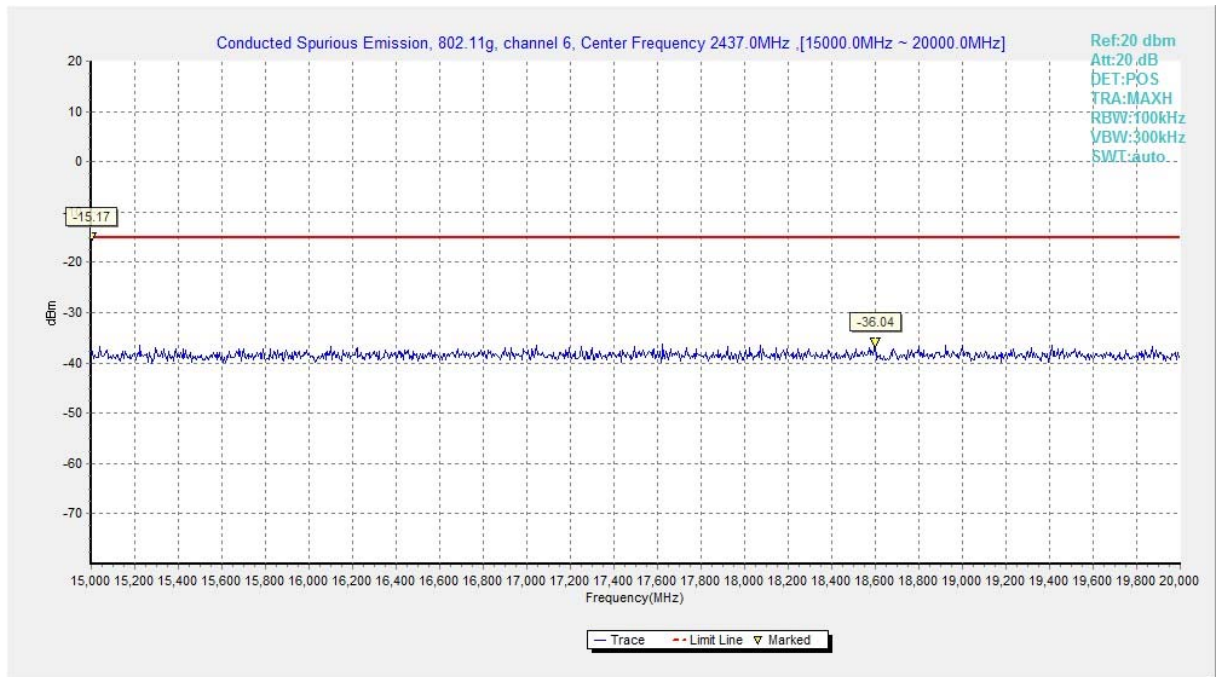


Fig.A.6.1.39 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 15 GHz-20 GHz)

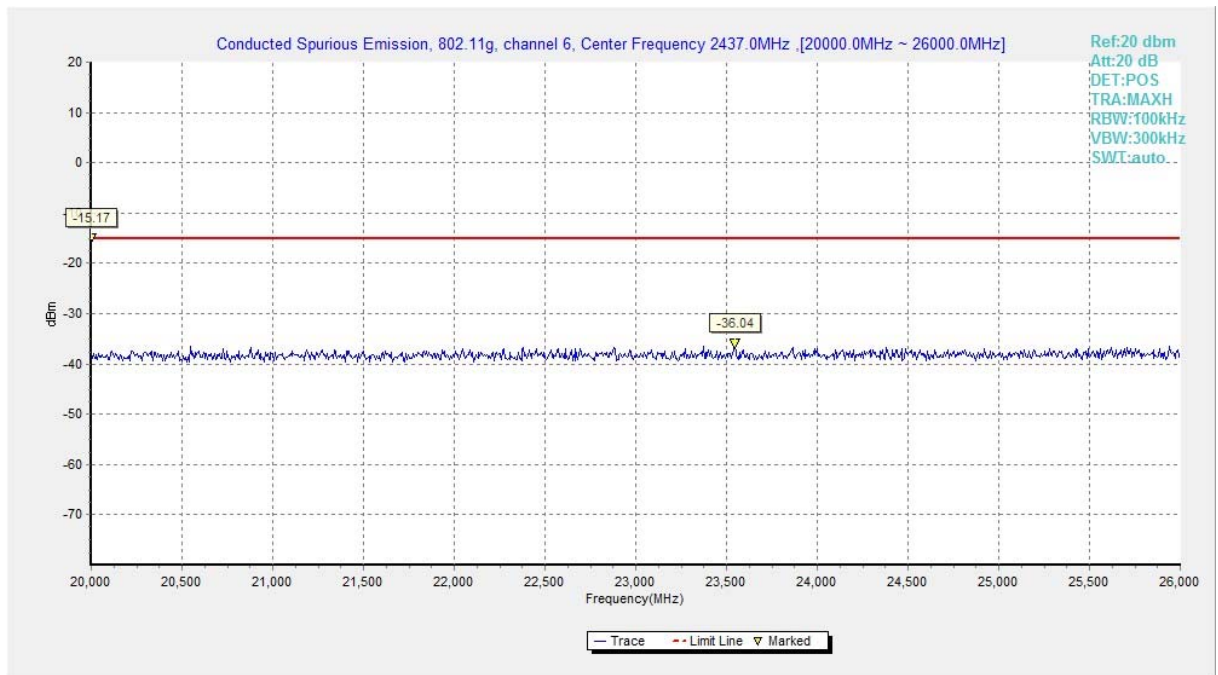


Fig.A.6.1.40 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 20 GHz-26 GHz)

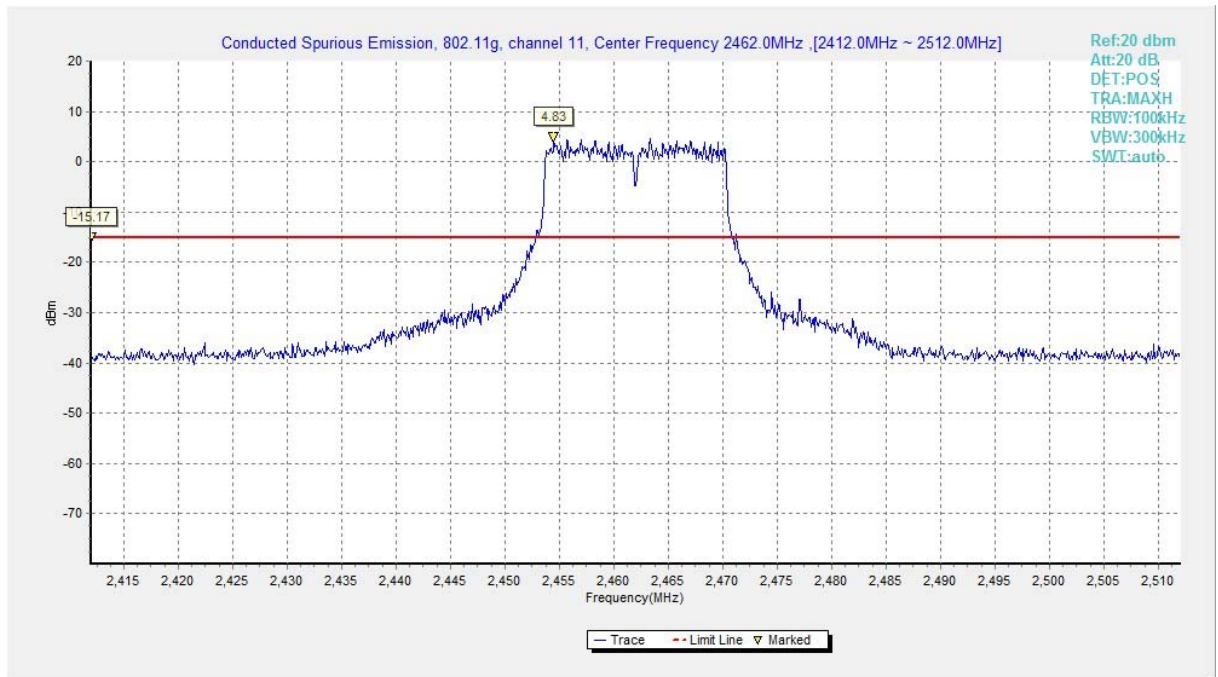


Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

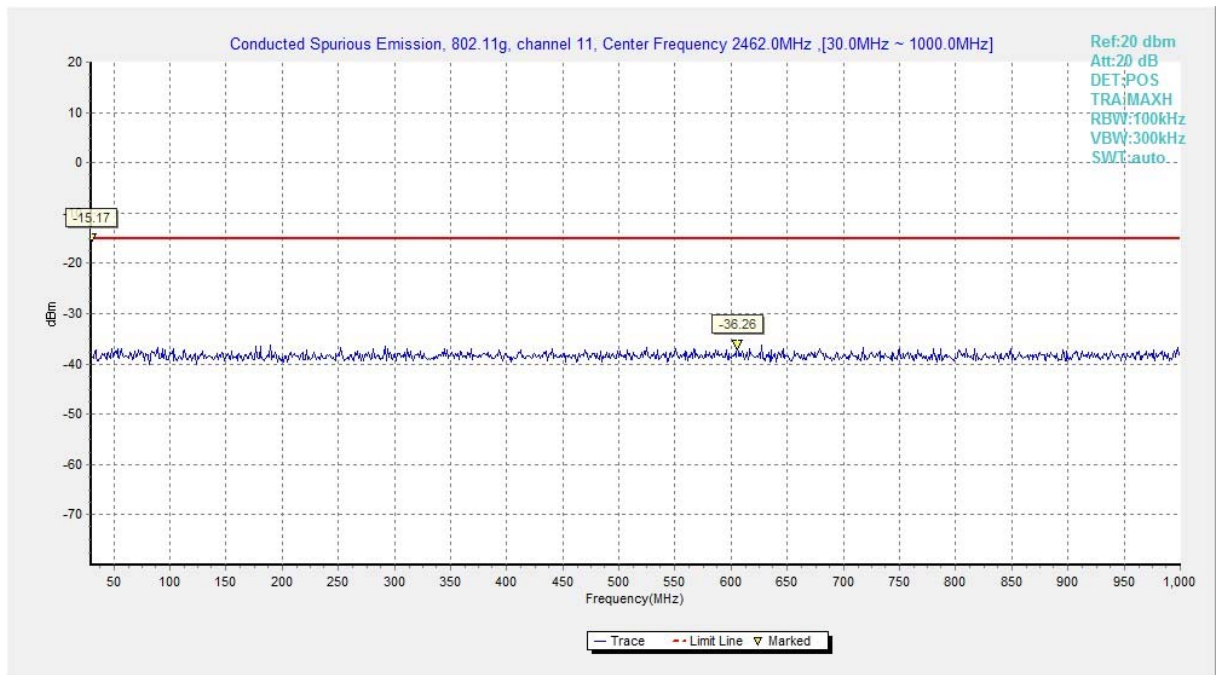


Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)

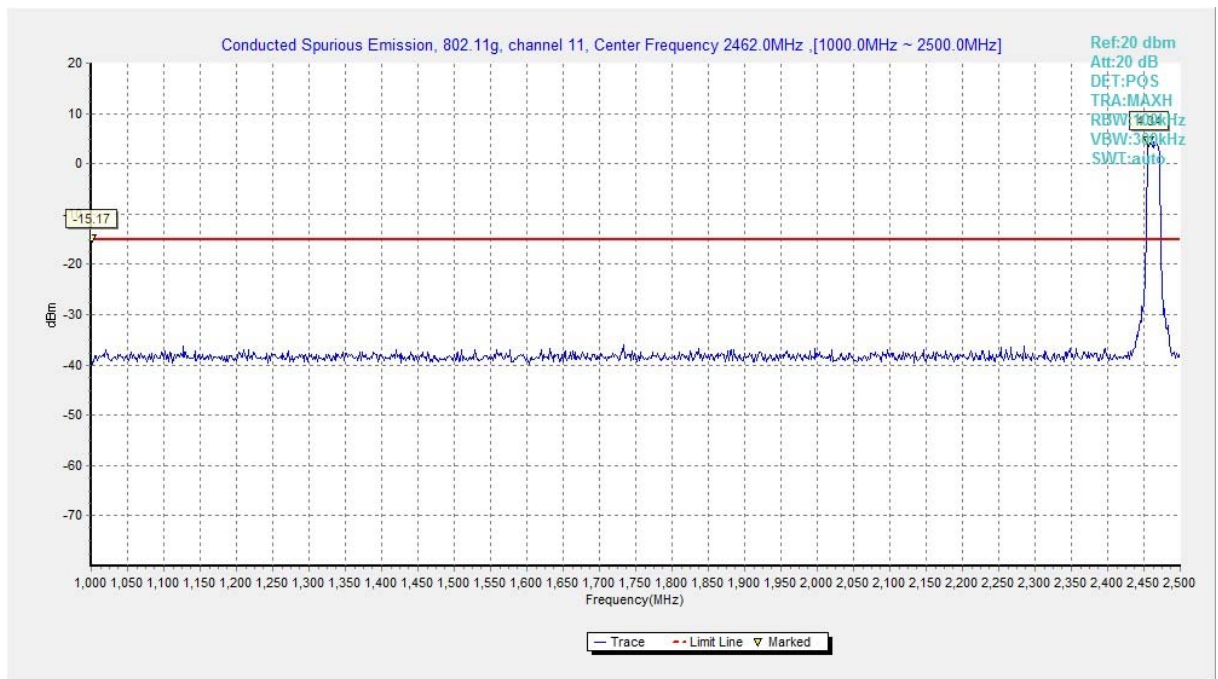


Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)

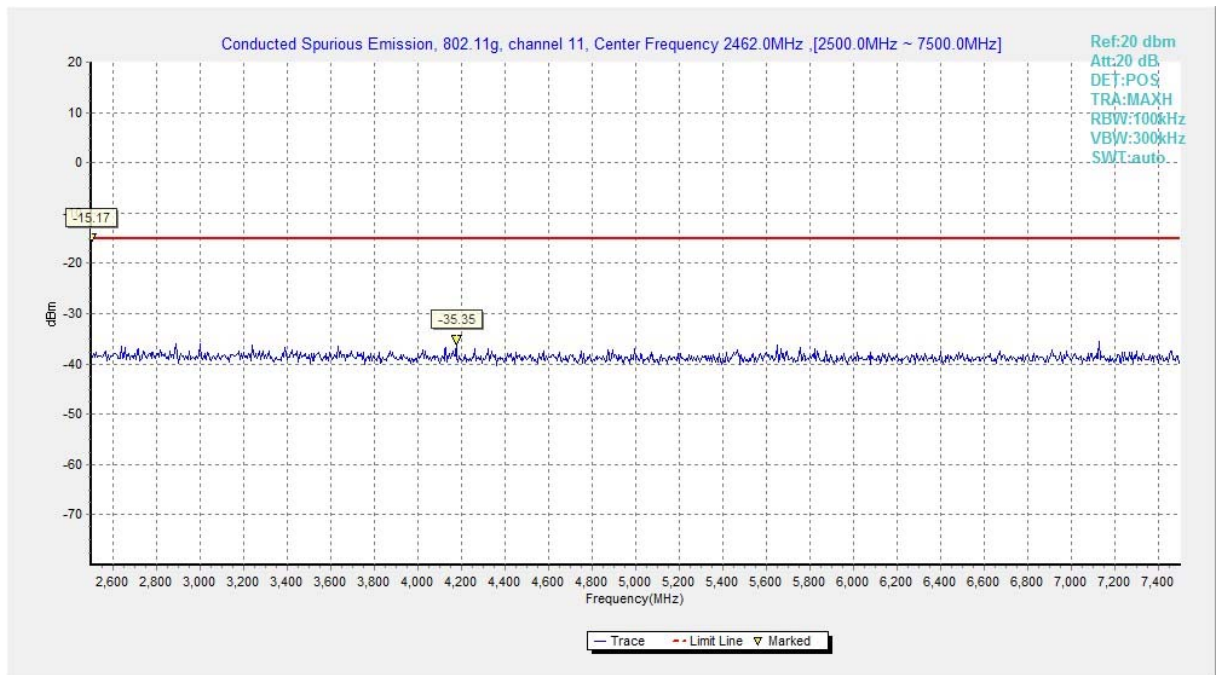


Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)

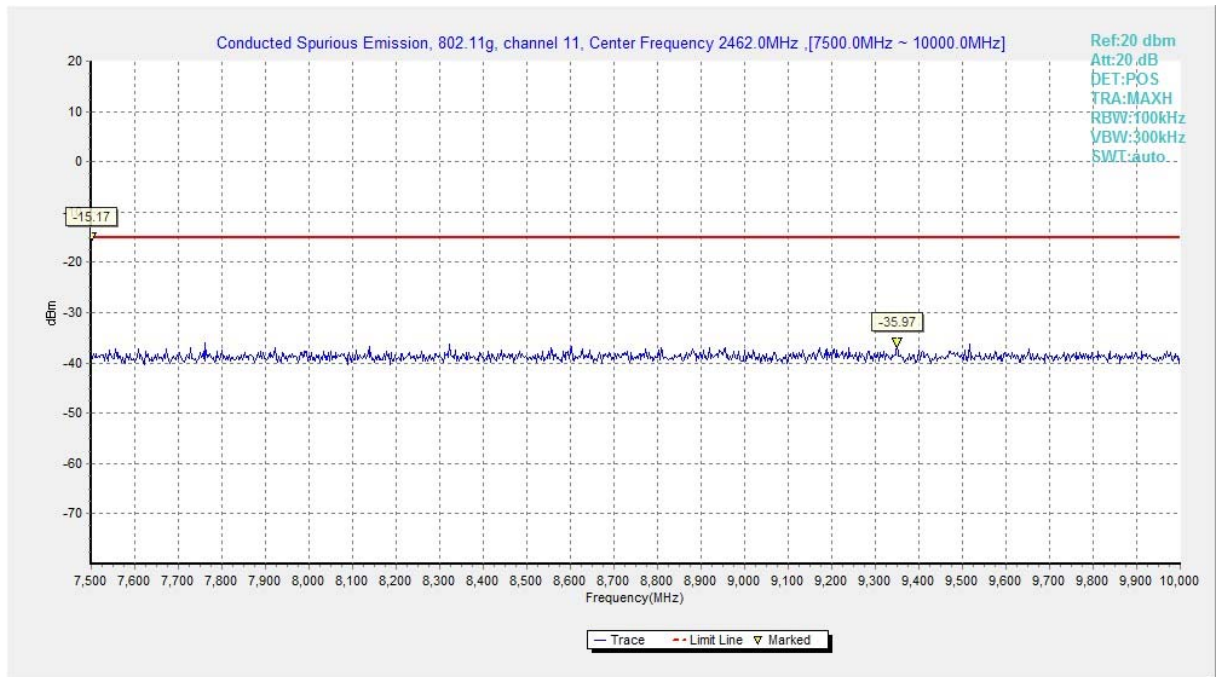


Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)

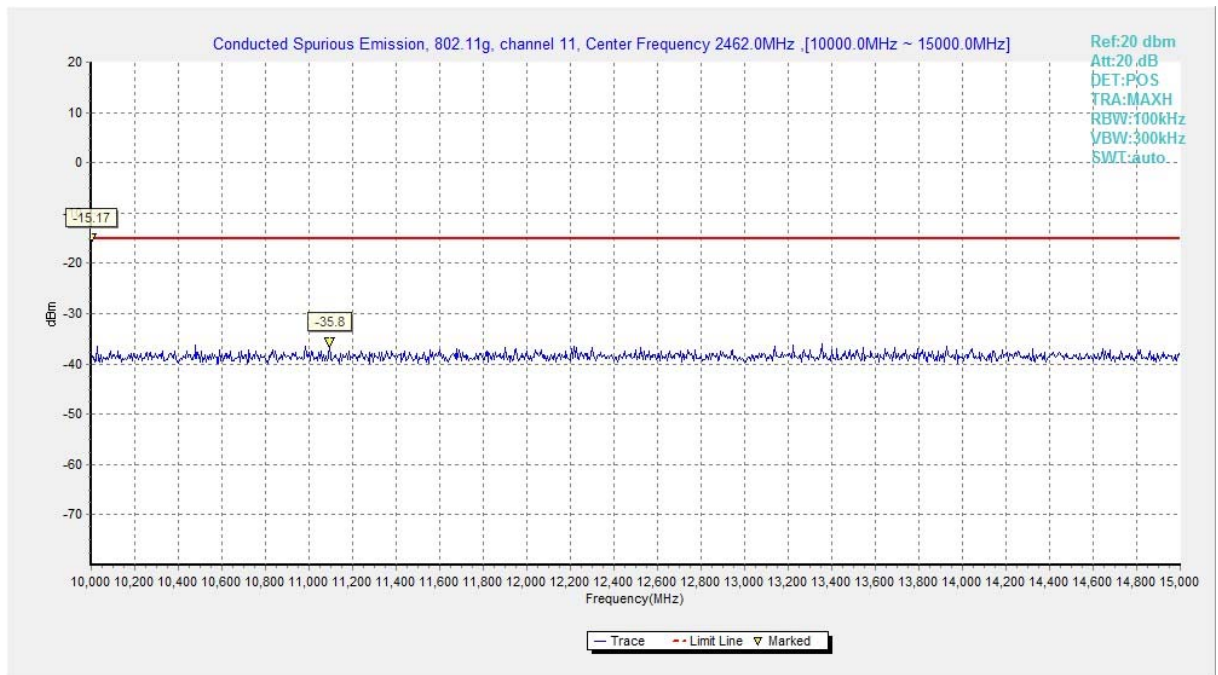


Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)

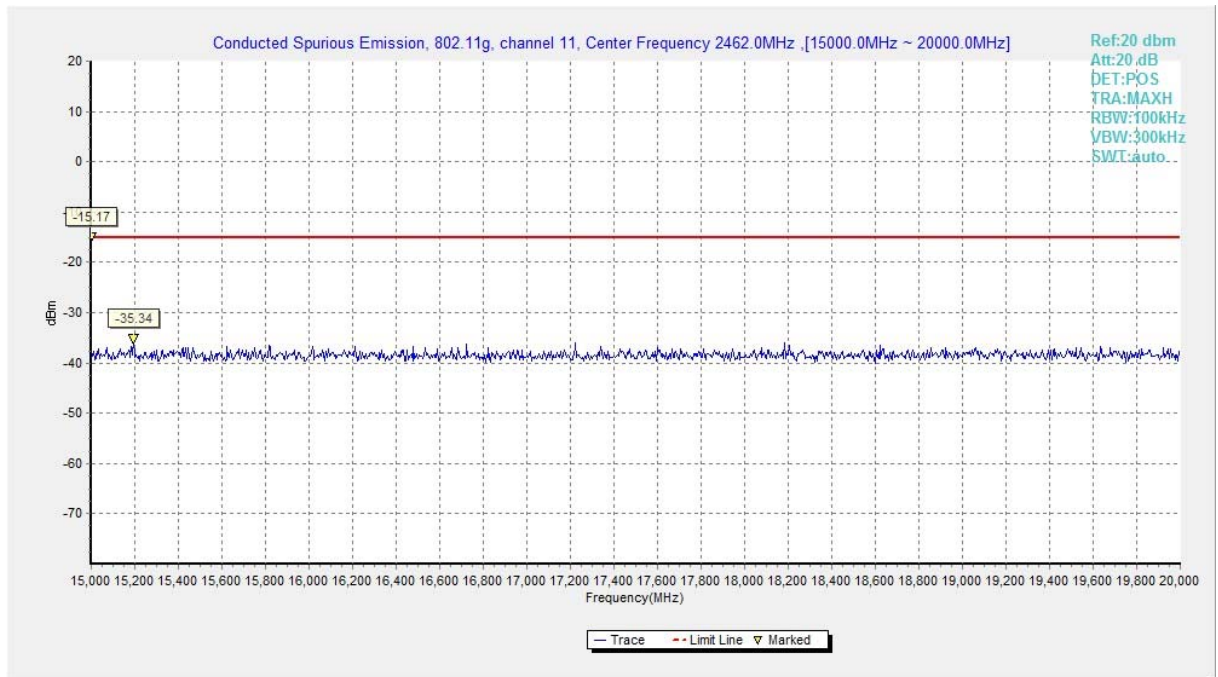


Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)

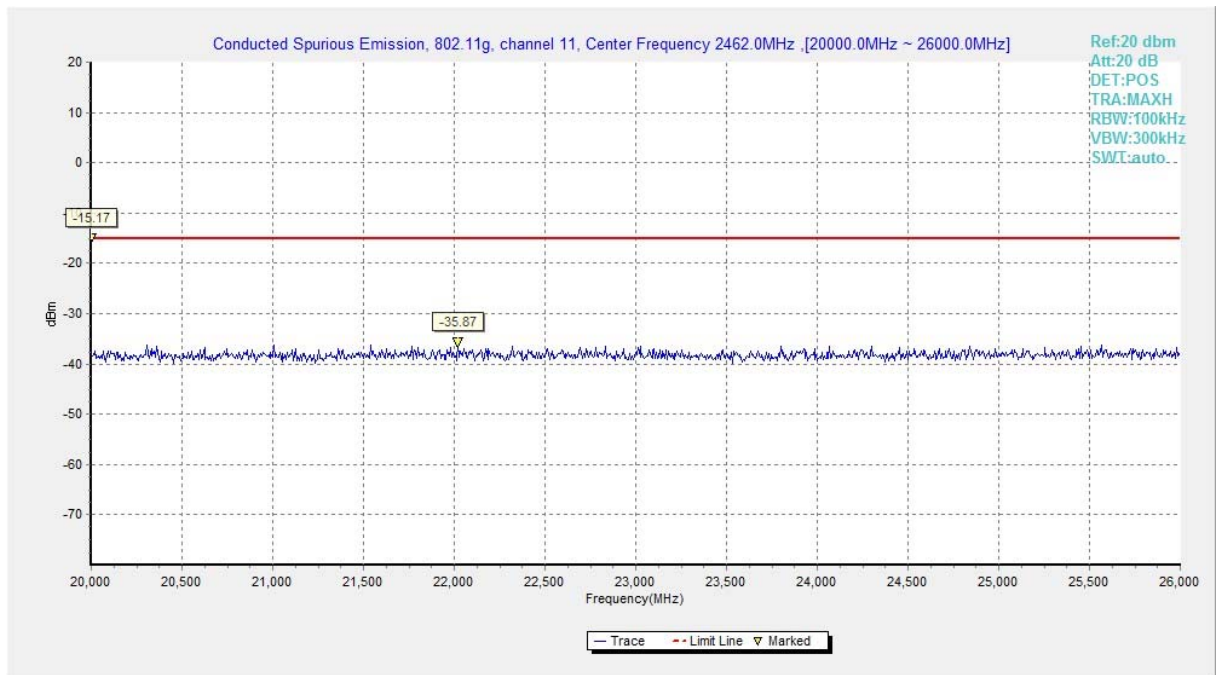


Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)

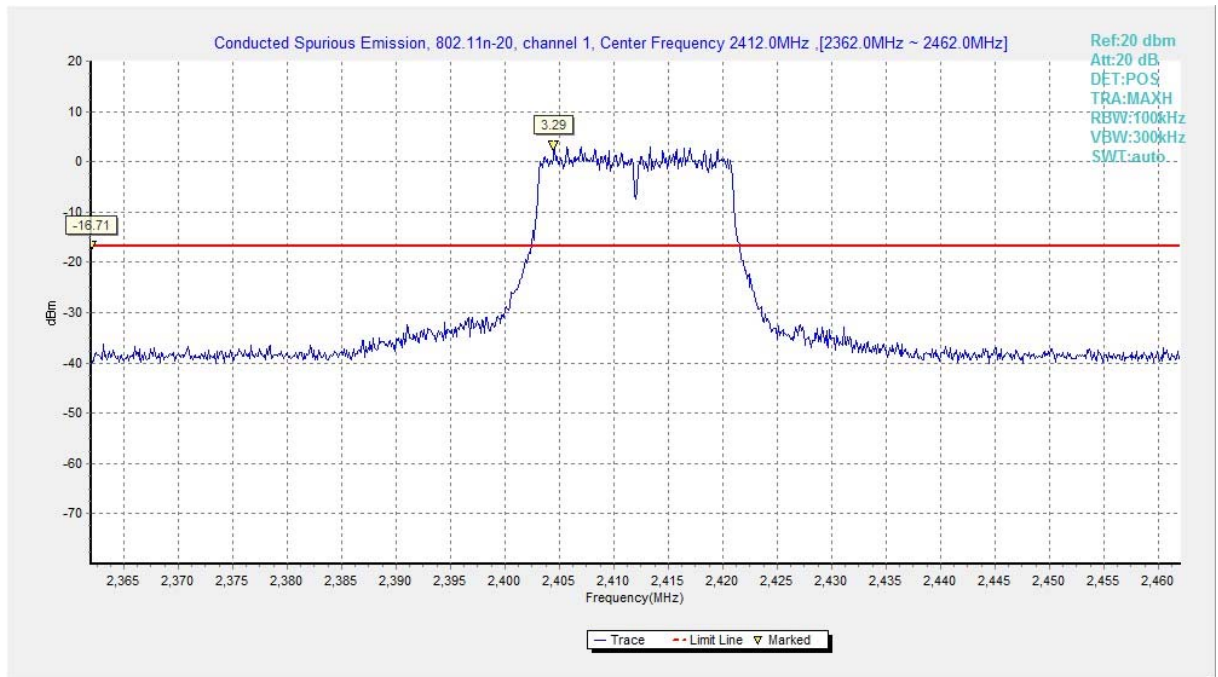


Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

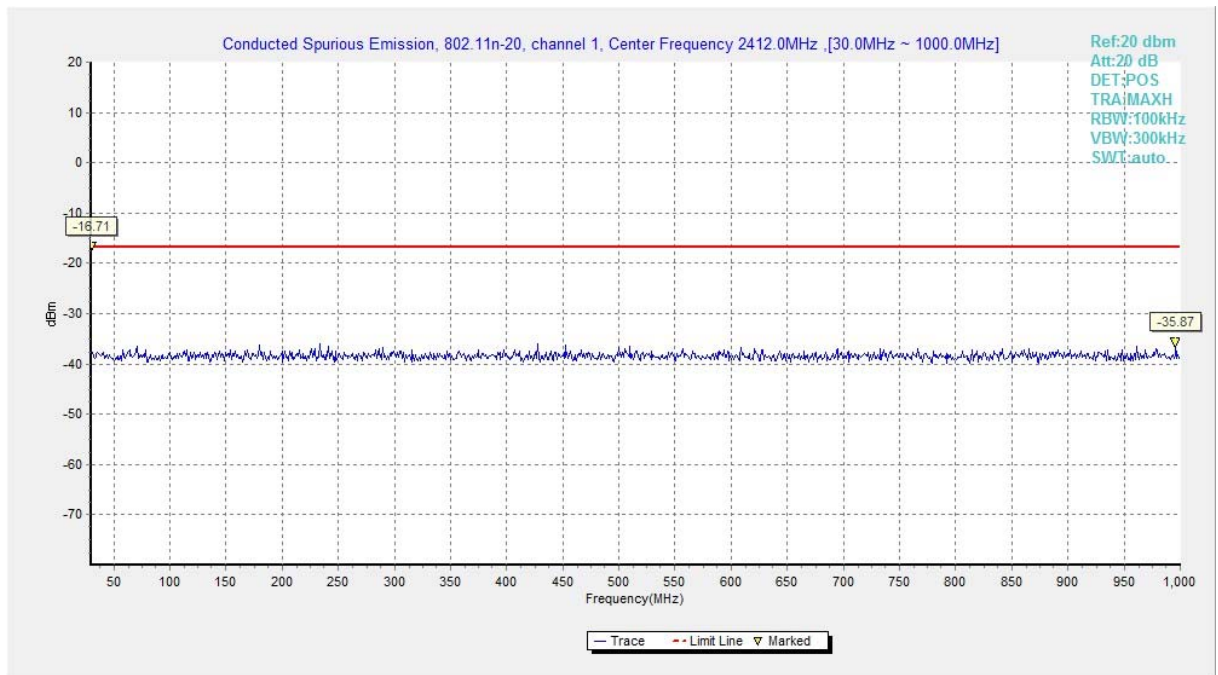


Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)

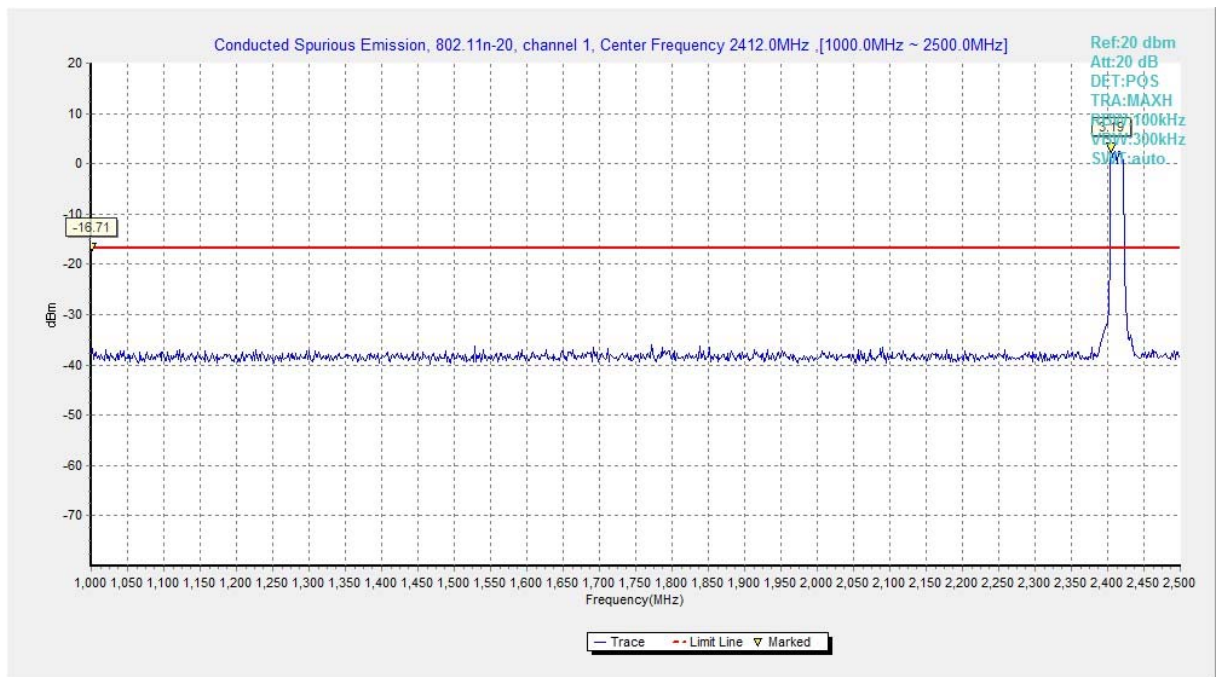


Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)

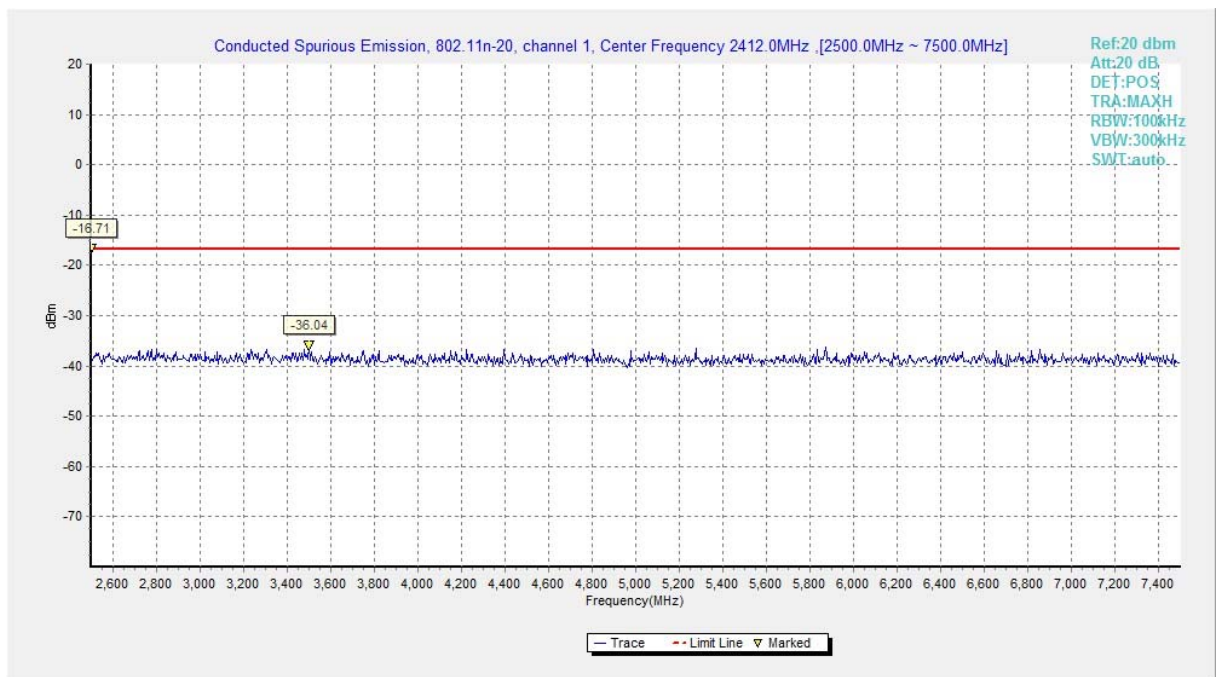


Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)

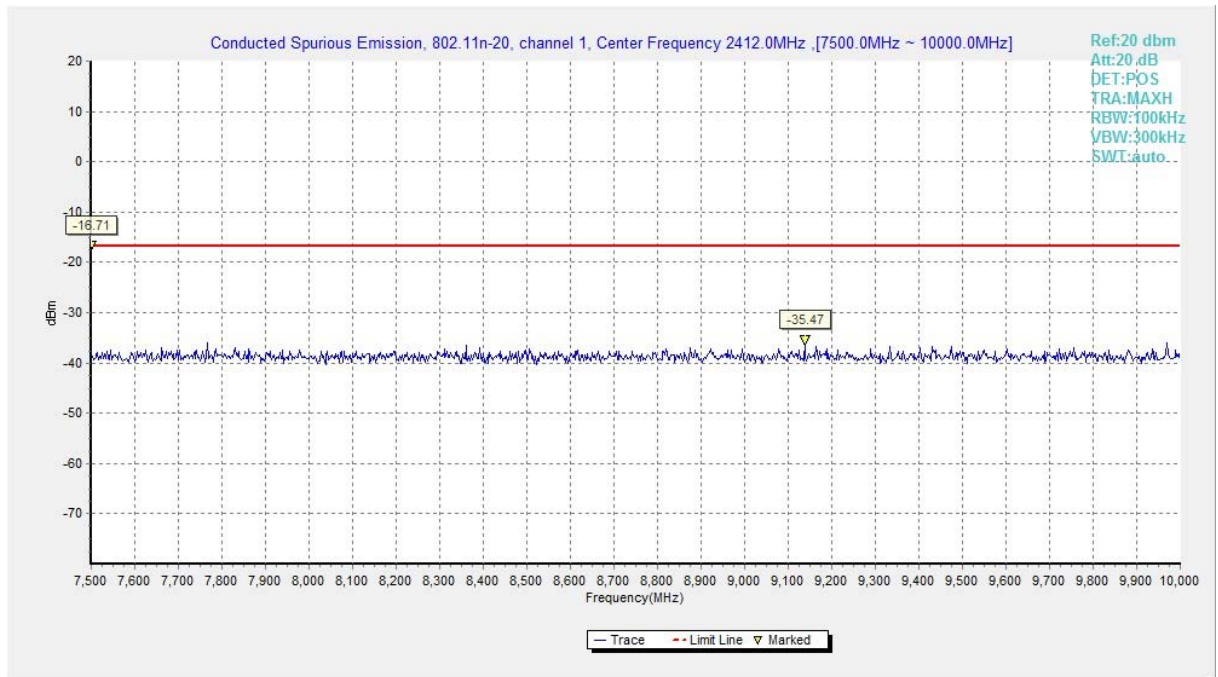


Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)

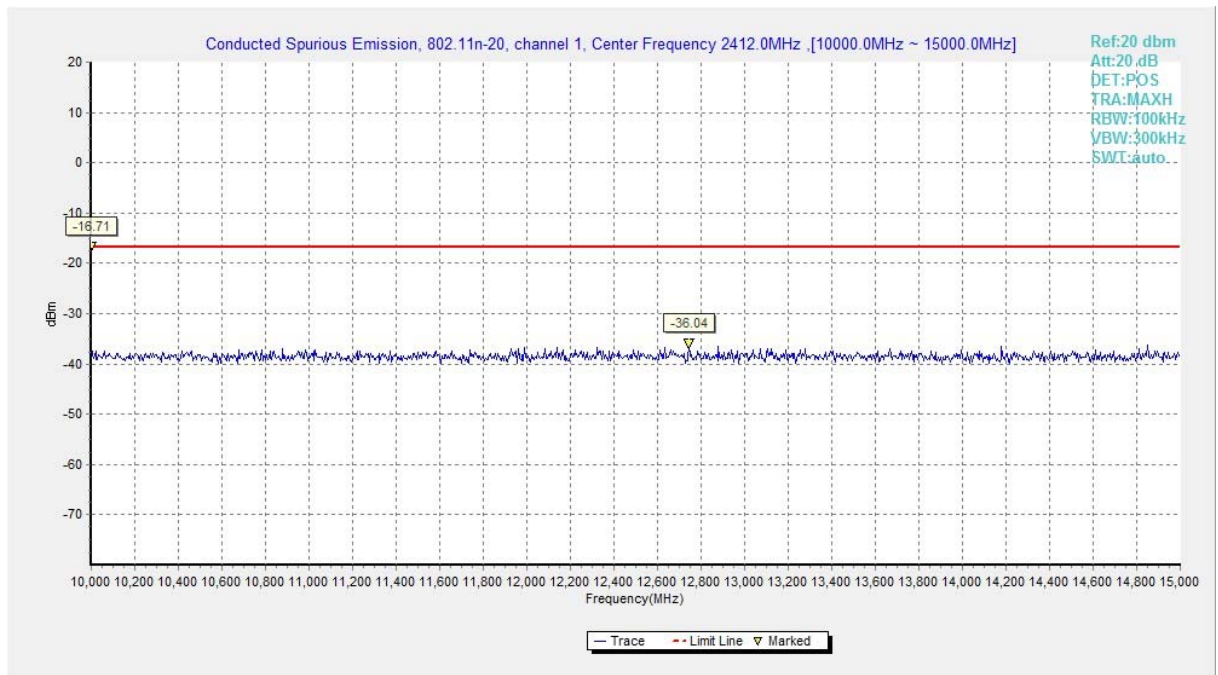


Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)

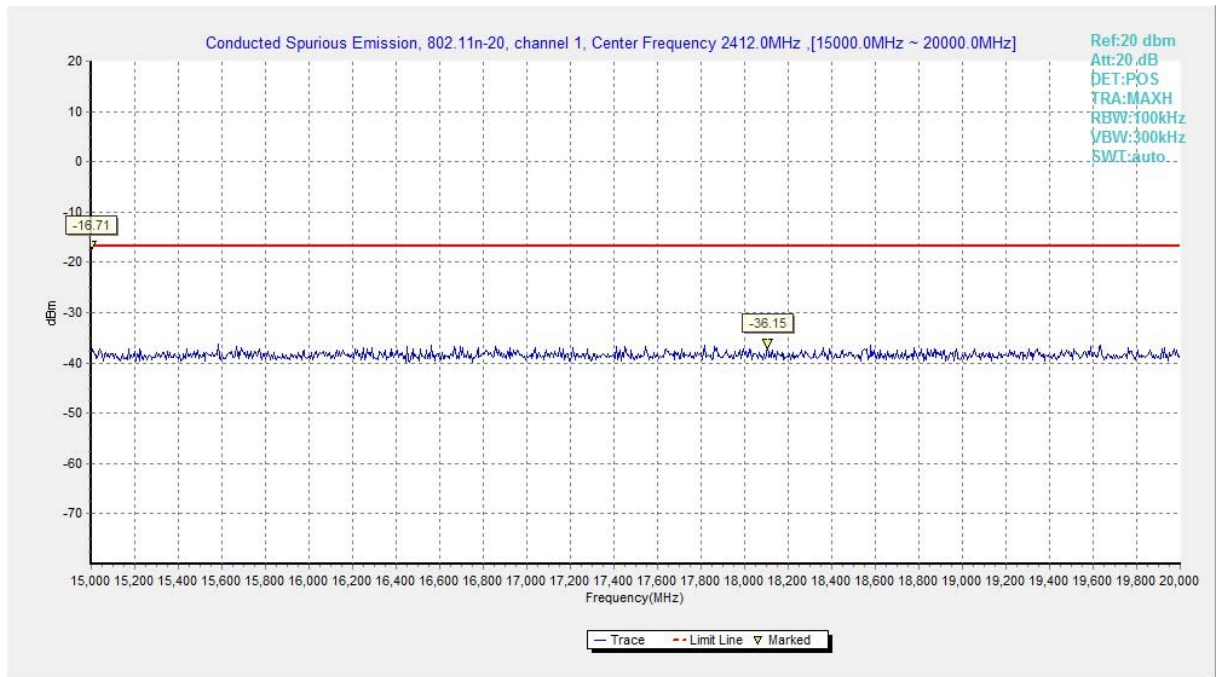


Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)

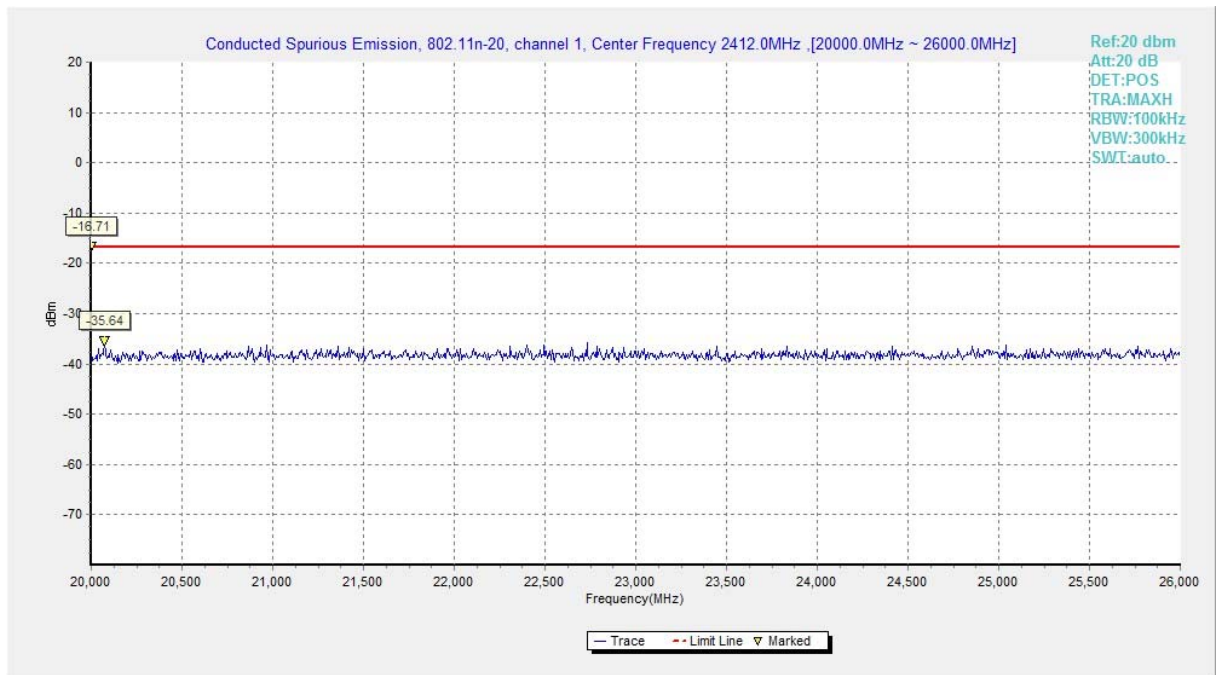


Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)

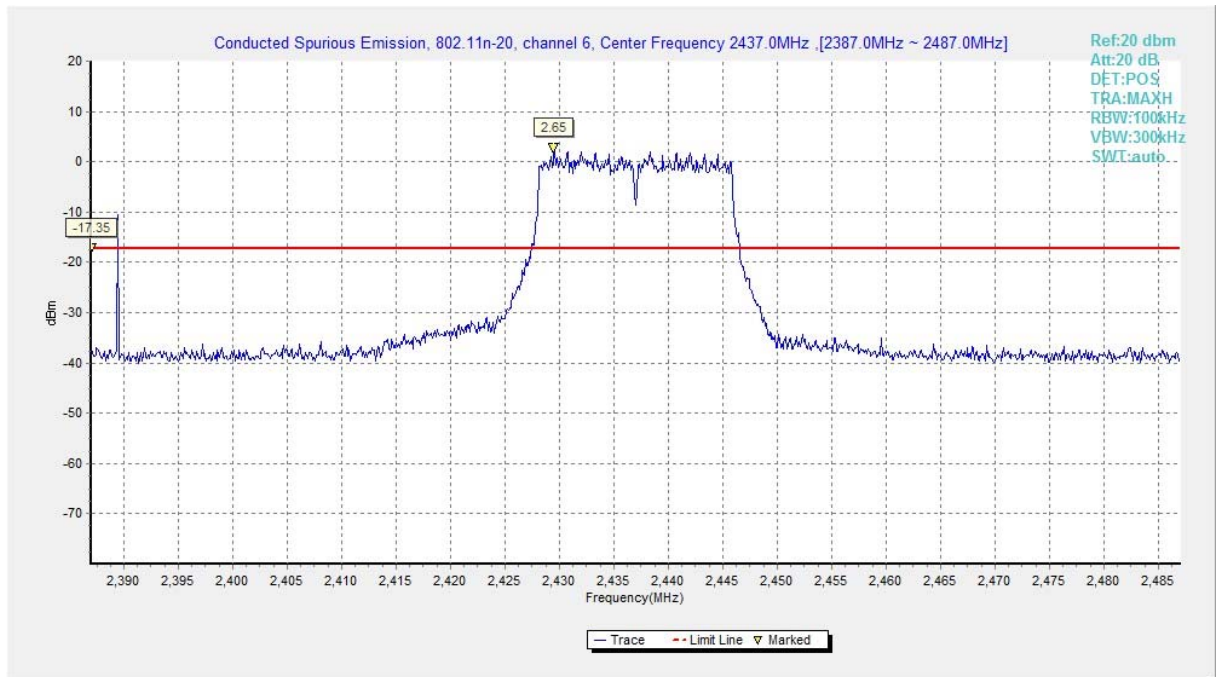


Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)

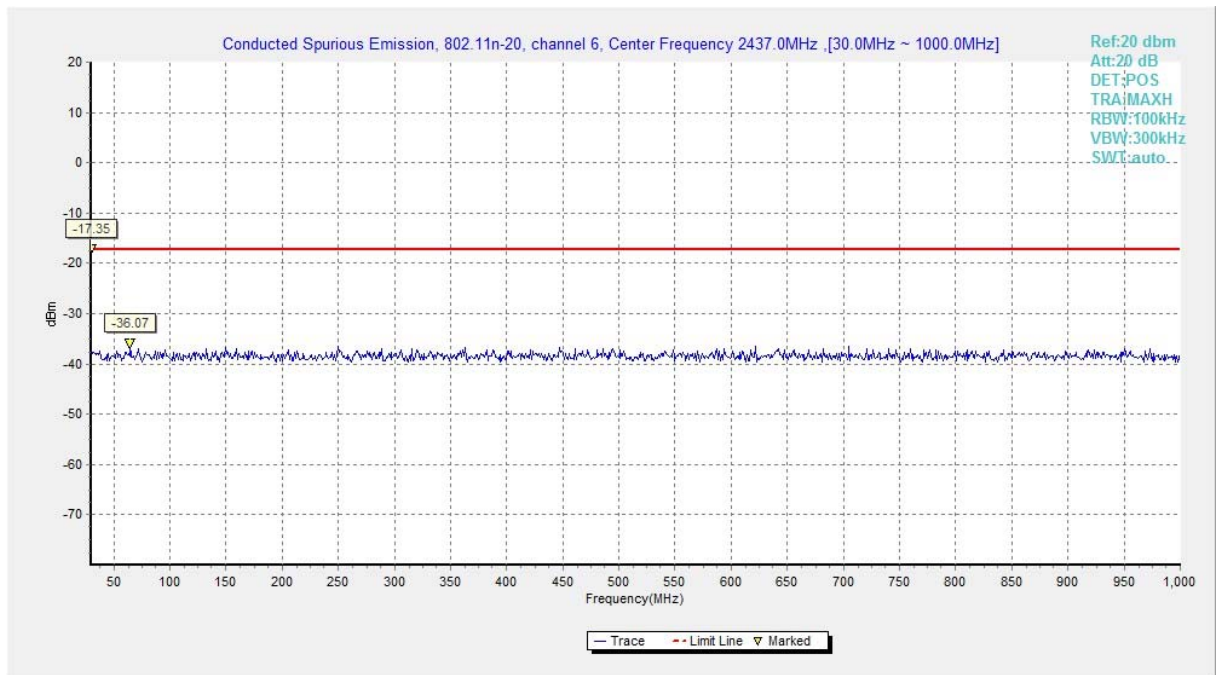


Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)

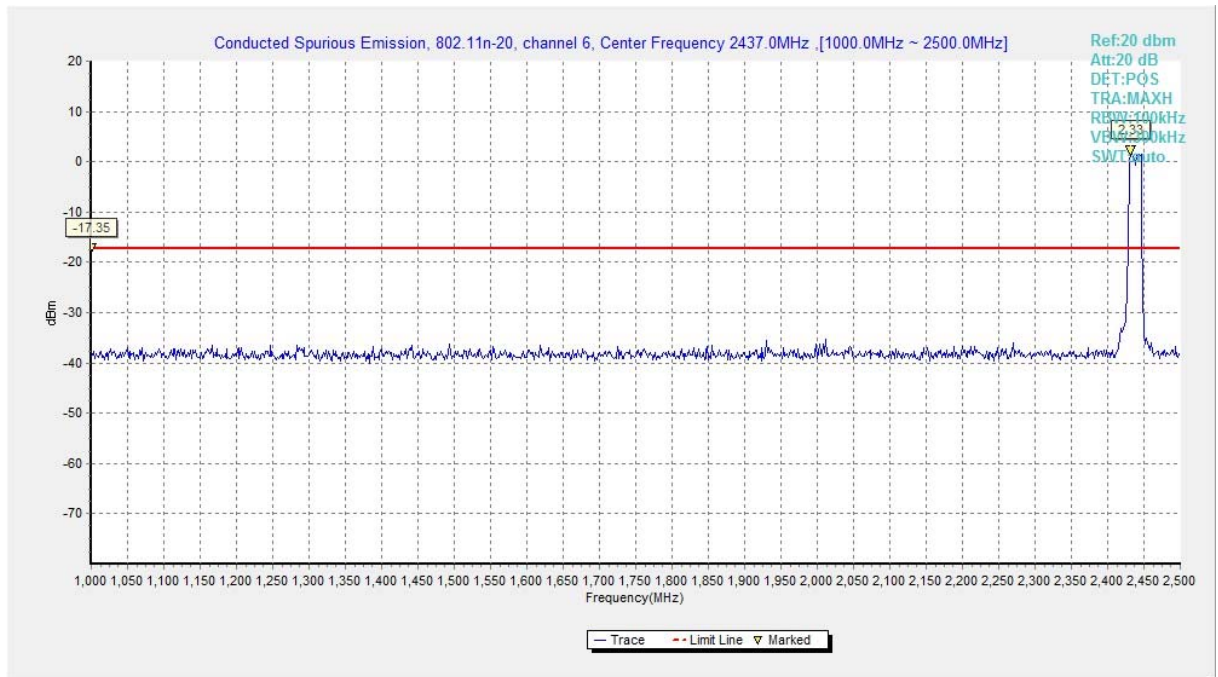


Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)

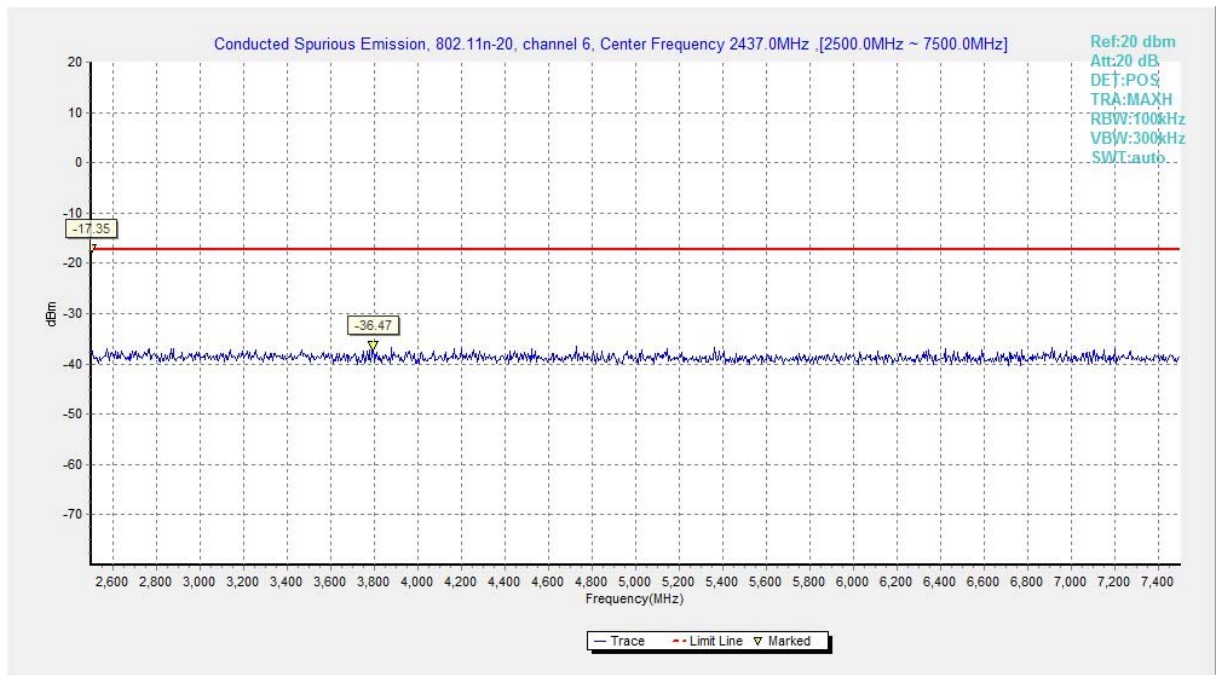


Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)

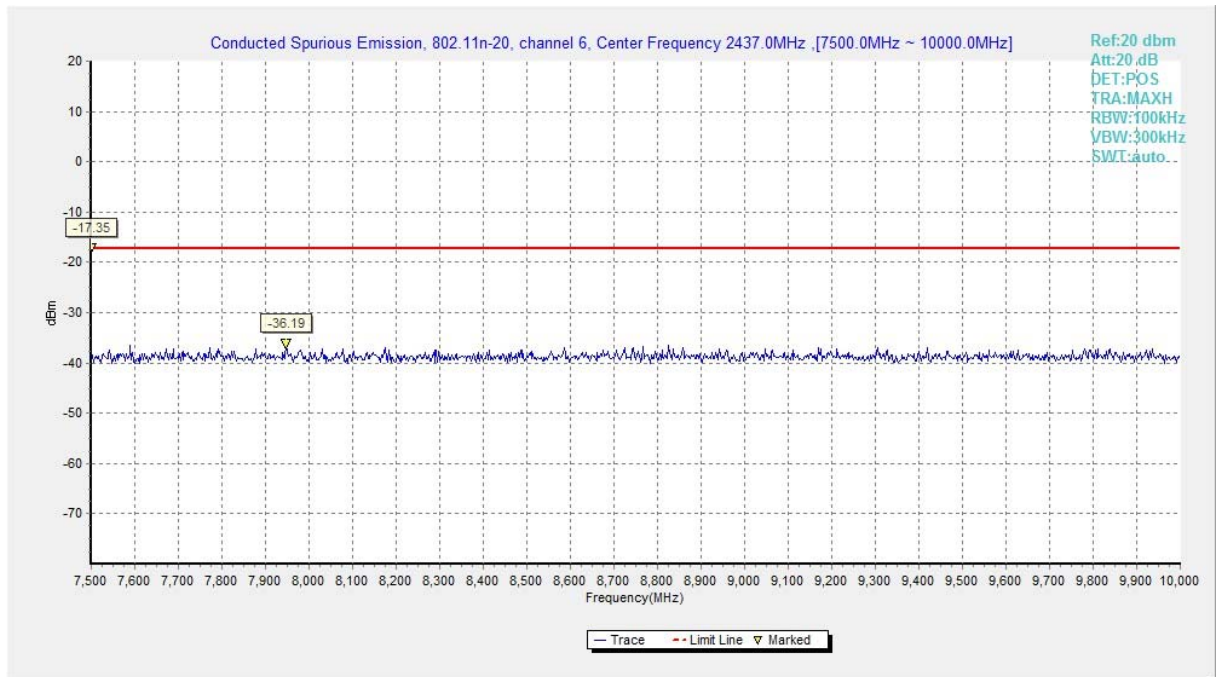


Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)

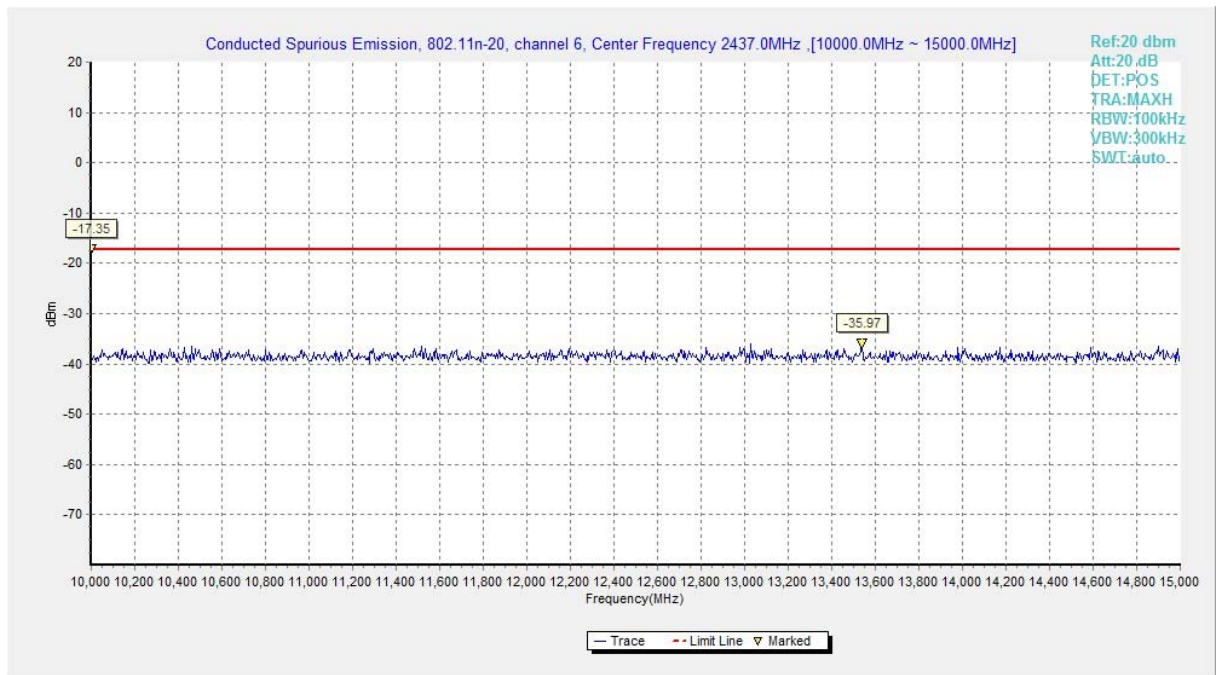


Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)

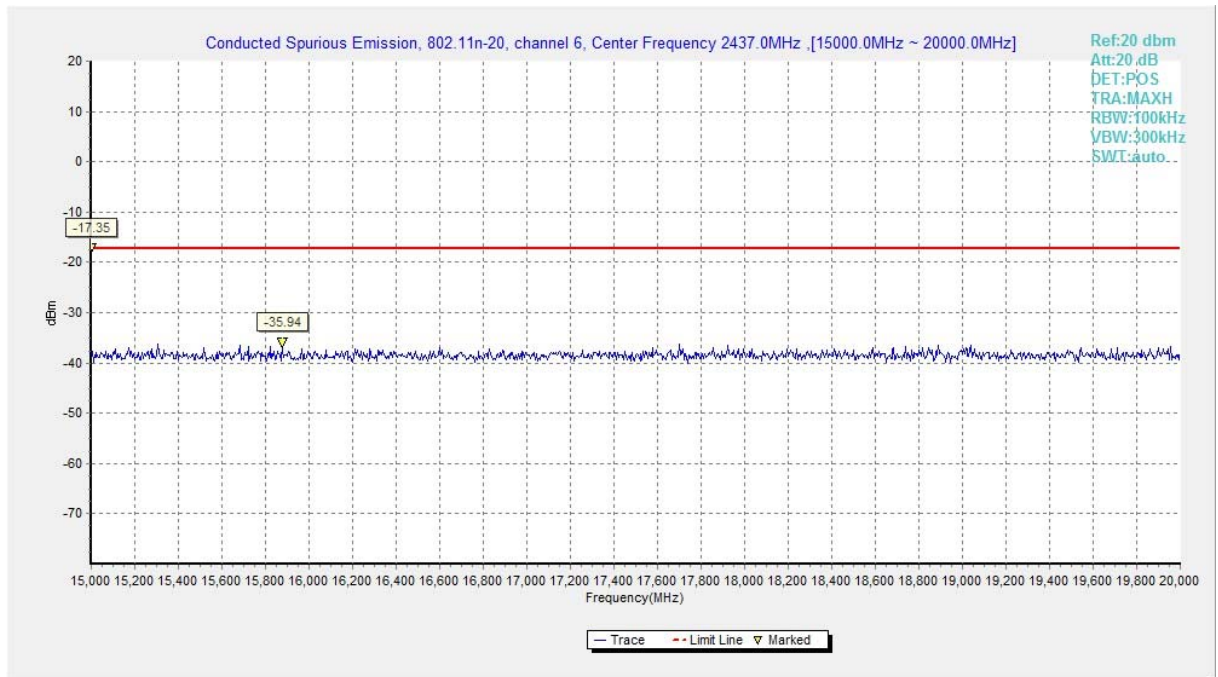


Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)

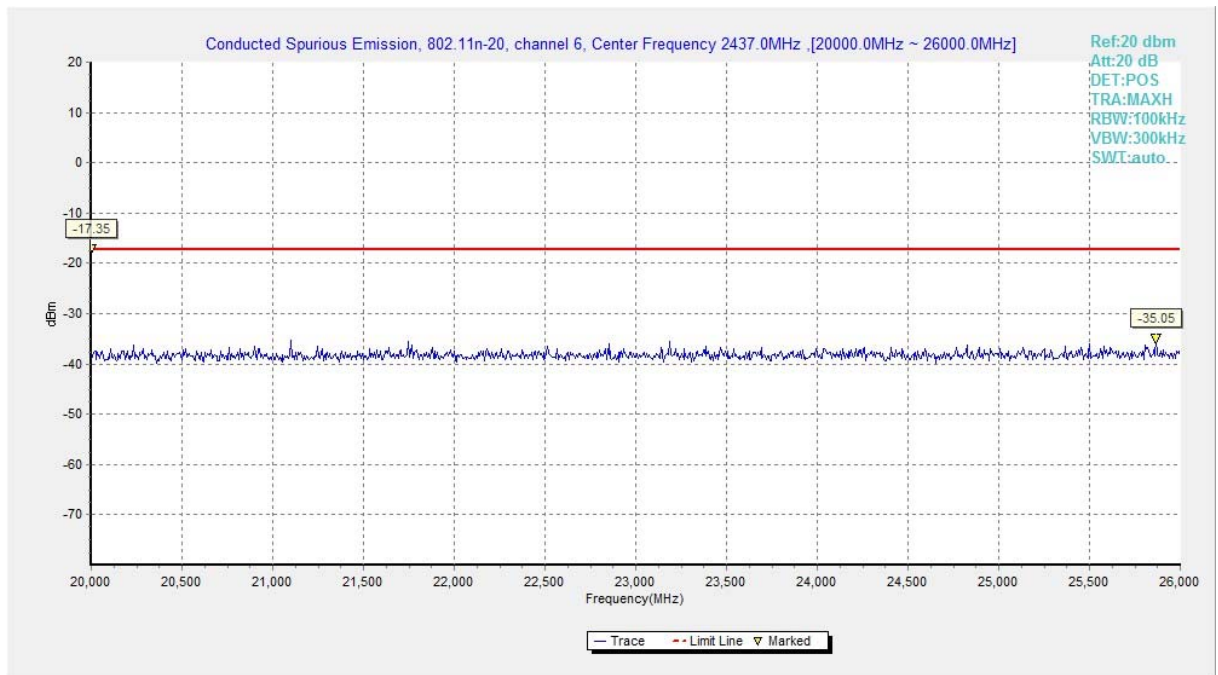


Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)

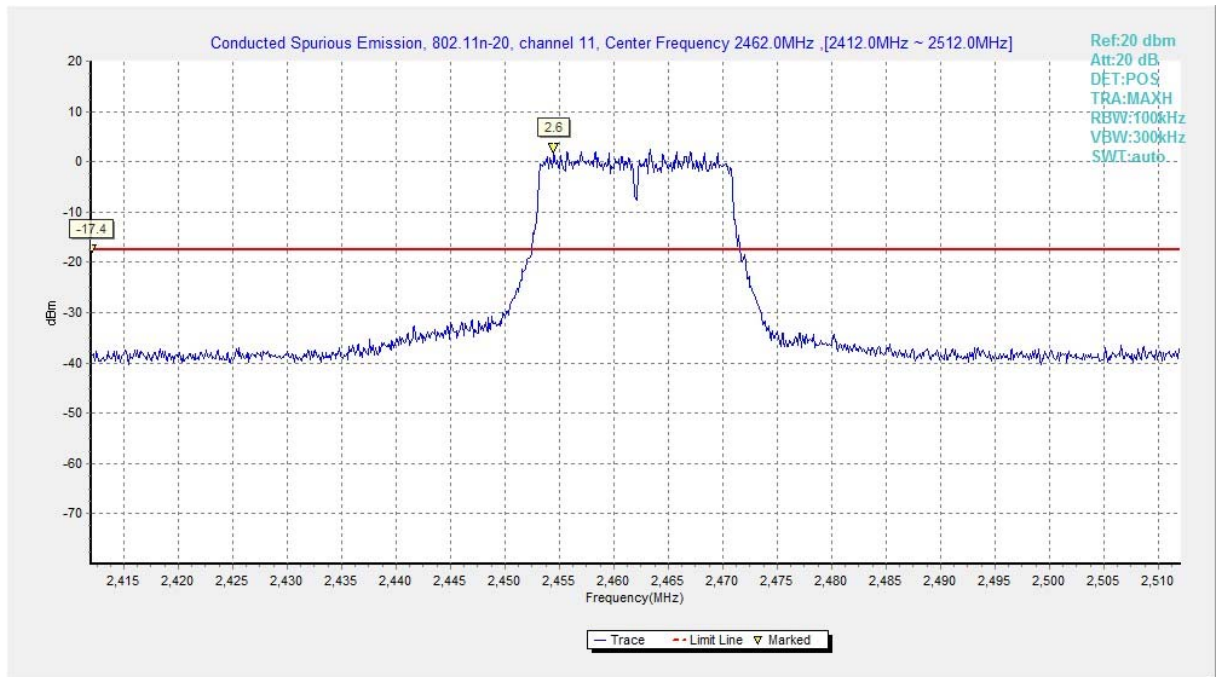


Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

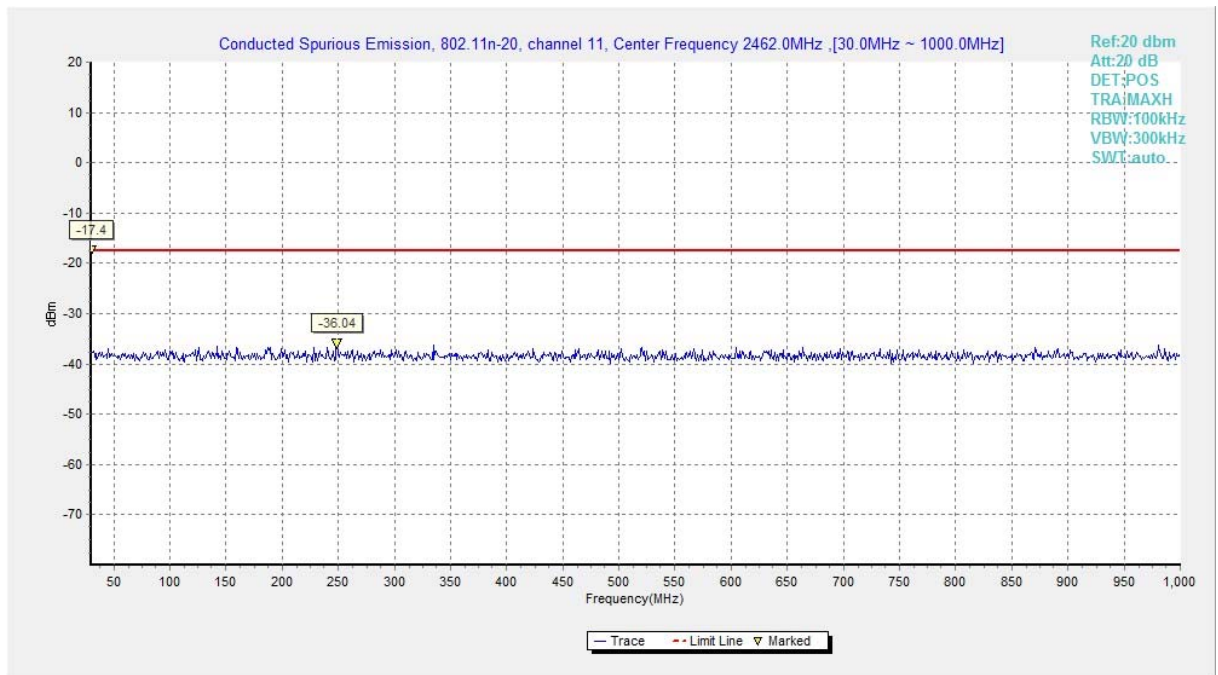


Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)

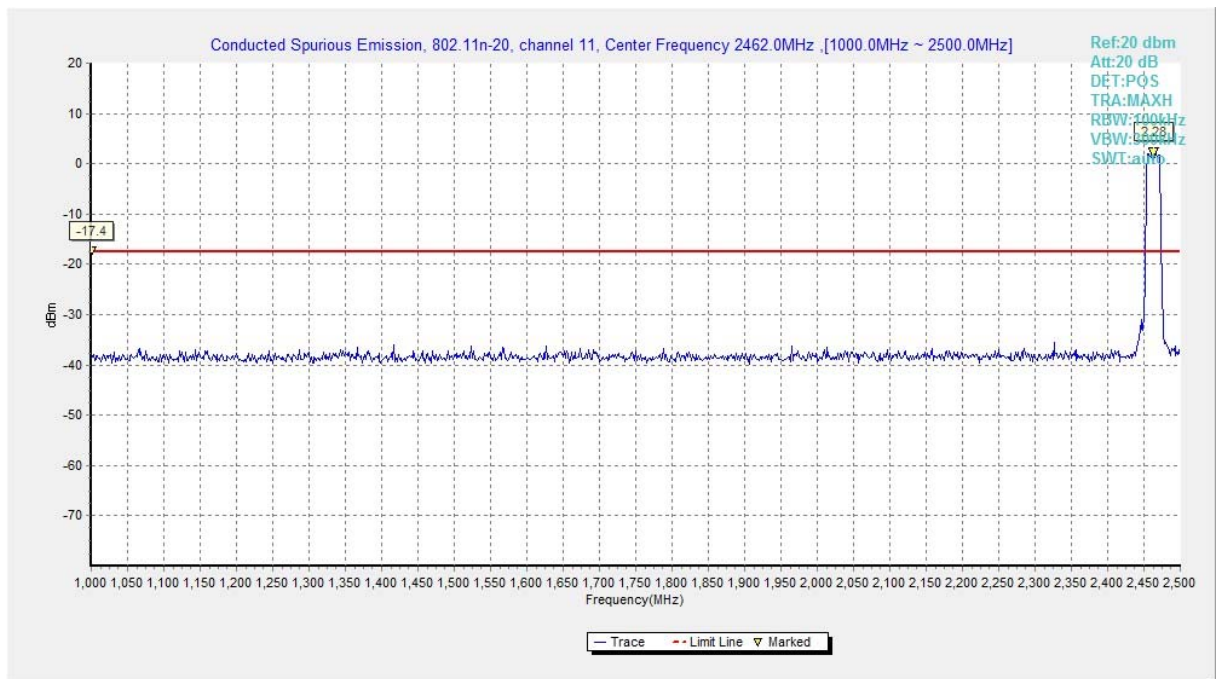


Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

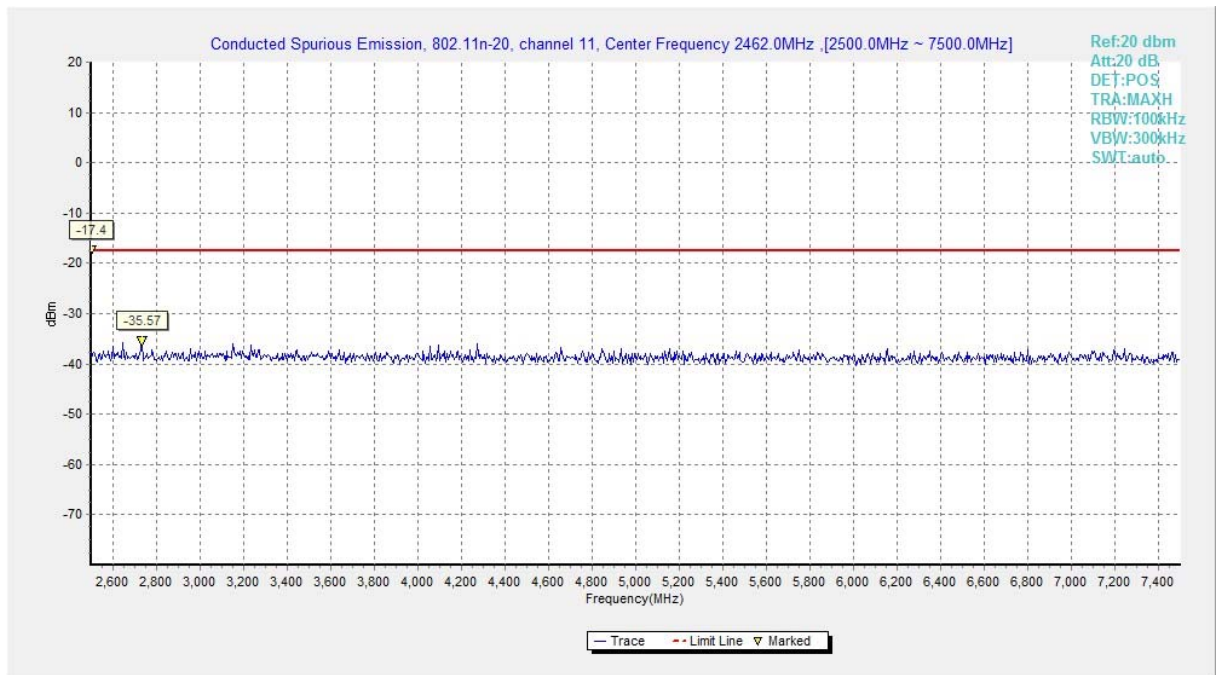


Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)

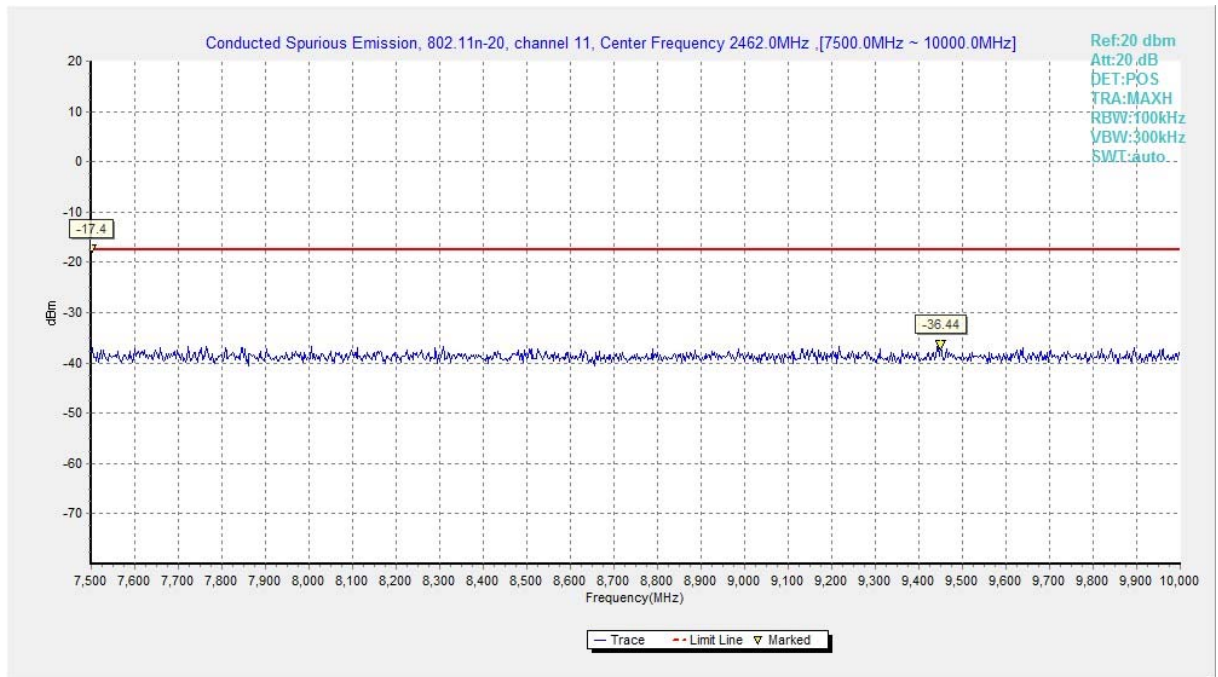


Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

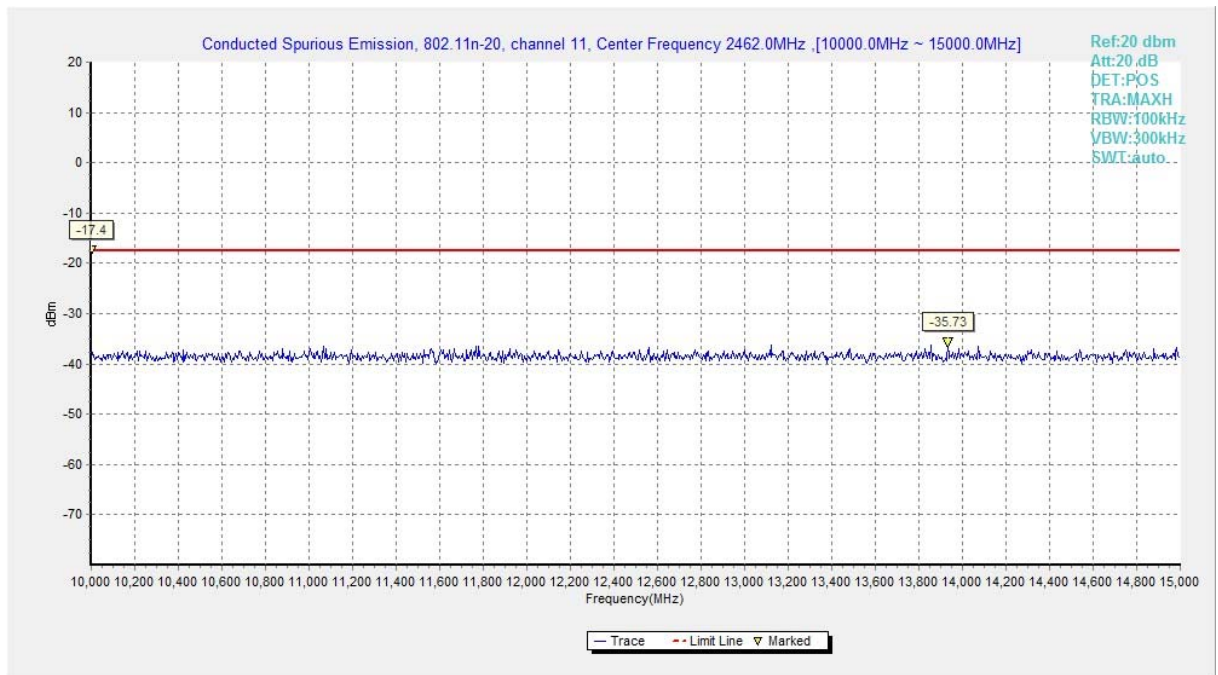


Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)

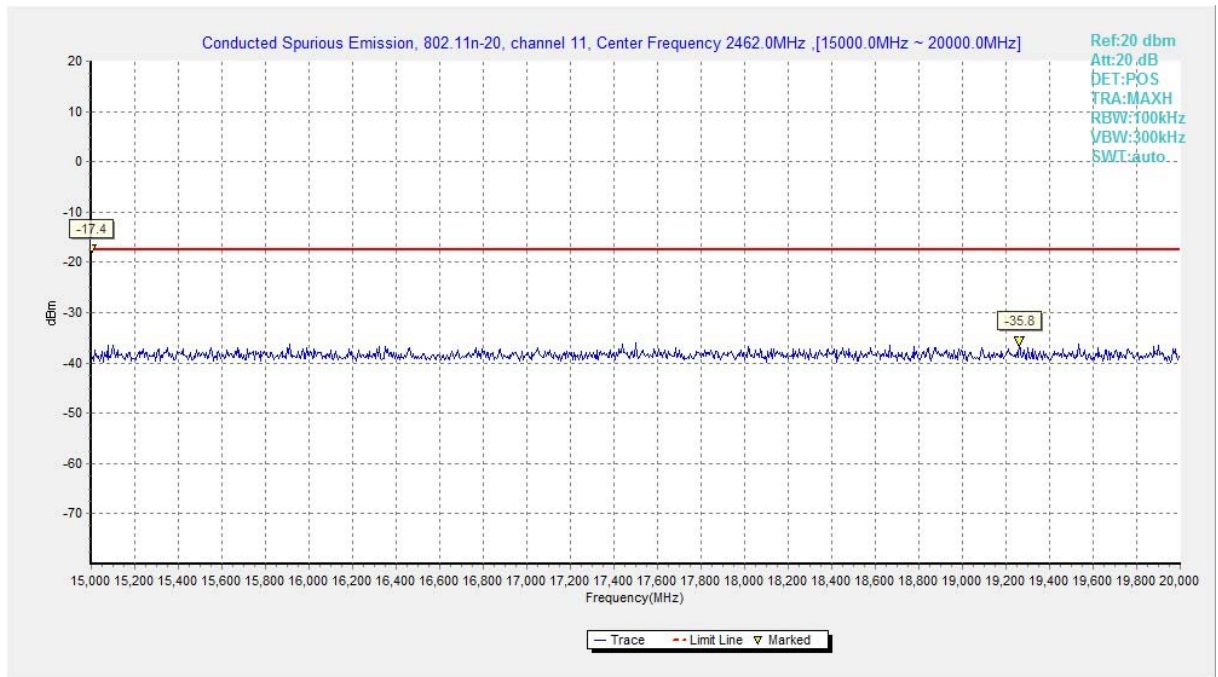


Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

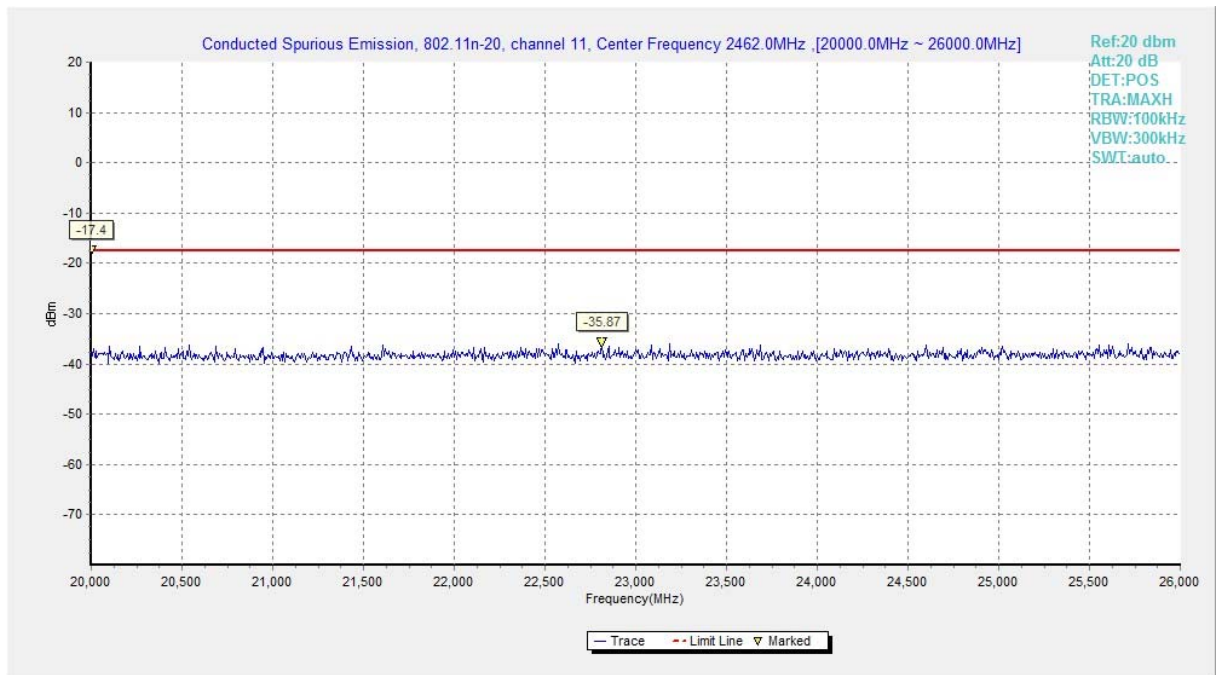


Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: EUT1

Measurement Results:
802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	P
		3 GHz ~ 18 GHz	Fig.A.6.2.3	P
	6	9 kHz ~30 MHz	Fig.A.6.2.4	P
		30 MHz ~1 GHz	Fig.A.6.2.5	P
		1 GHz ~ 3 GHz	Fig.A.6.2.6	P
		3 GHz ~ 18 GHz	Fig.A.6.2.7	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.8	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.9	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.10	P
		3 GHz ~ 18 GHz	Fig.A.6.2.11	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.12	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.13	P
		3 GHz ~ 18 GHz	Fig.A.6.2.14	P
	6	30 MHz ~1 GHz	Fig.A.6.2.15	P
		1 GHz ~ 3 GHz	Fig.A.6.2.16	P
		3 GHz ~ 18 GHz	Fig.A.6.2.17	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.18	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.19	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.20	P
		3 GHz ~ 18 GHz	Fig.A.6.2.21	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.22	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.23	P
		3 GHz ~ 18 GHz	Fig.A.6.2.24	P
	6	30 MHz ~1 GHz	Fig.A.6.2.25	P
		1 GHz ~ 3 GHz	Fig.A.6.2.26	P
		3 GHz ~ 18 GHz	Fig.A.6.2.27	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.28	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.29	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.30	P
		3 GHz ~ 18 GHz	Fig.A.6.2.31	P

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2389.320	60.3	-38.8	27.7	71.400	H
17945.500	63.0	-17.7	45.6	35.100	V
17824.000	62.7	-18.5	45.6	35.600	V
17989.000	62.6	-17.7	45.6	34.700	H
17989.500	62.6	-17.7	45.6	34.700	H
17954.500	62.5	-17.7	45.6	34.600	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17879.500	63.0	-18.5	45.6	35.900	H
17932.500	62.9	-17.7	45.6	35.000	V
17902.000	62.8	-18.5	45.6	35.700	V
17768.500	62.6	-18.5	45.6	35.500	H
17903.500	62.5	-18.5	45.6	35.400	H
17988.500	62.3	-17.7	45.6	34.400	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2486.855	59.4	-38.9	27.7	70.600	V
17851.000	62.9	-18.5	45.6	35.800	H
17989.500	62.9	-17.7	45.6	35.000	V
17995.000	62.7	-17.7	45.6	34.800	H
17765.000	62.7	-18.5	45.6	35.600	H
17969.000	62.5	-17.7	45.6	34.600	H

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2389.540	57.2	-38.8	27.7	68.300	H
17872.500	63.3	-18.5	45.6	36.200	H
17949.000	63.2	-17.7	45.6	35.300	V
17979.500	63.1	-17.7	45.6	35.200	H
17806.000	62.8	-18.5	45.6	35.700	V
17986.000	62.7	-17.7	45.6	34.800	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17915.5	62.2	-17.7	45.6	34.3	H
17981	62.2	-17.7	45.6	34.3	H
17827	62.2	-18.5	45.6	35.1	H
17969	62	-17.7	45.6	34.1	H
17802	62	-18.5	45.6	34.9	V
17924	61.9	-17.7	45.6	34	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.770	53.8	-38.9	27.7	65.000	V
17947.000	63.0	-17.7	45.6	35.100	V
17835.000	62.8	-18.5	45.6	35.700	H
17925.000	62.3	-17.7	45.6	34.400	H
17963.500	62.3	-17.7	45.6	34.400	H
17991.000	62.3	-17.7	45.6	34.400	H

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2388.825	55.9	-38.8	27.7	67.000	H
17748.000	62.7	-18.5	45.6	35.600	V
17968.500	62.6	-17.7	45.6	34.700	H
17974.500	62.6	-17.7	45.6	34.700	H
17743.500	62.4	-18.5	45.6	35.300	V
17796.000	62.3	-18.5	45.6	35.200	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17929.500	63.1	-17.7	45.6	35.200	H
17664.500	62.7	-18.9	45.6	36.000	V
17918.000	62.5	-17.7	45.6	34.600	V
17832.000	62.4	-18.5	45.6	35.300	H
17995.000	62.2	-17.7	45.6	34.300	V
17982.500	62.2	-17.7	45.6	34.300	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2484.185	52.4	-38.9	27.7	63.600	H
17830.500	62.8	-18.5	45.6	35.700	V
17828.500	62.7	-18.5	45.6	35.600	V
17944.000	62.5	-17.7	45.6	34.600	H
17898.500	62.4	-18.5	45.6	35.300	H
17357.000	62.4	-19.5	41.5	40.400	H

Test graphs as below:

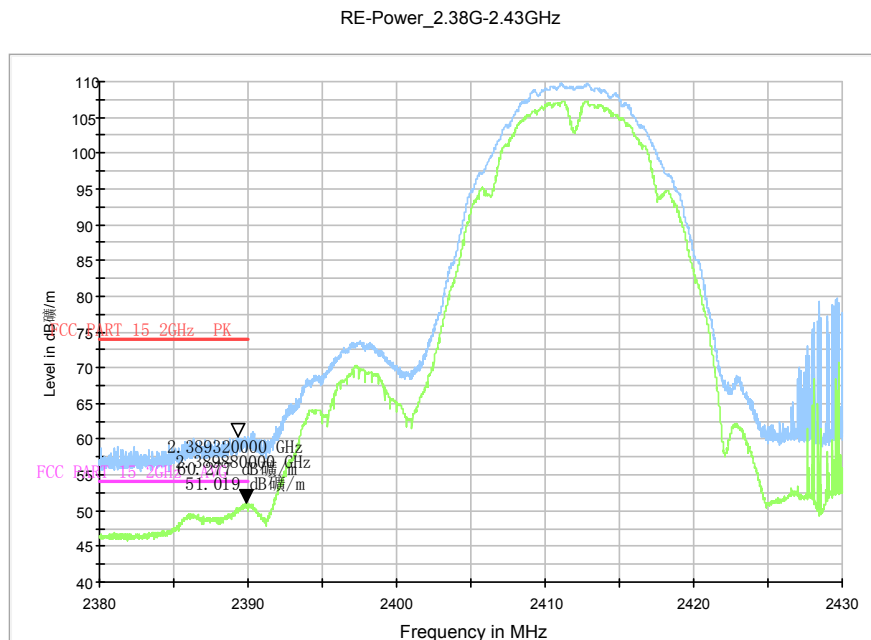


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz – 2.45GHz

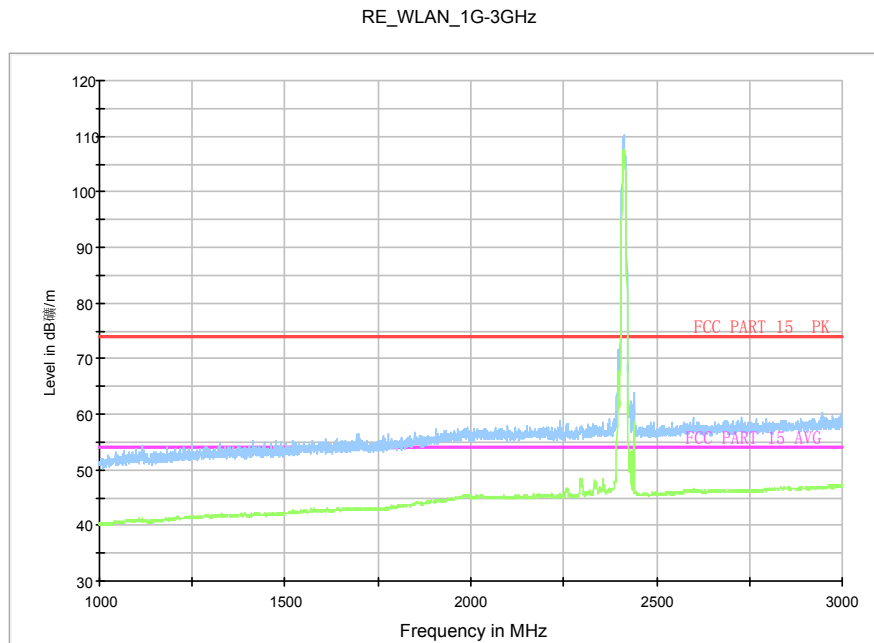


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 1 GHz-3 GHz)

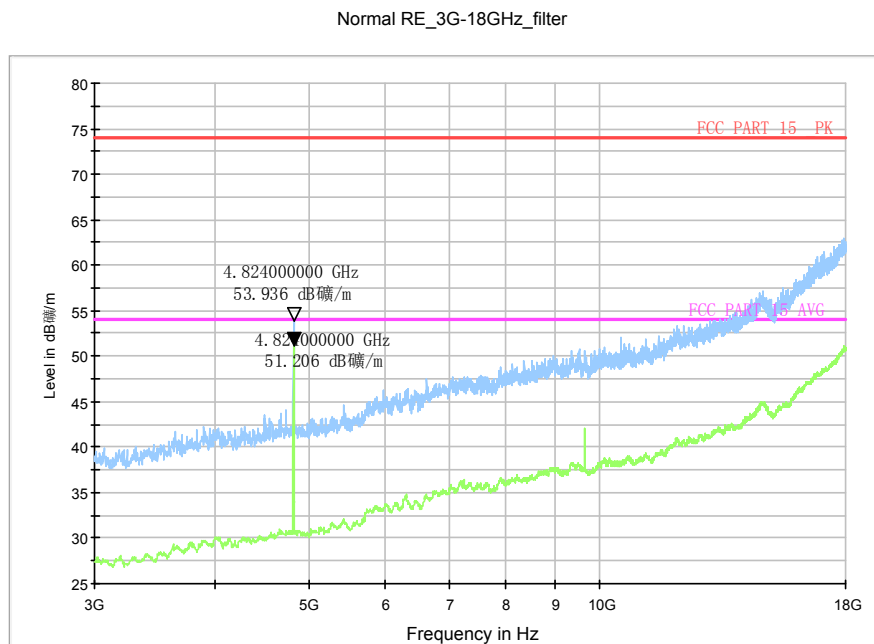


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 3 GHz-18 GHz)

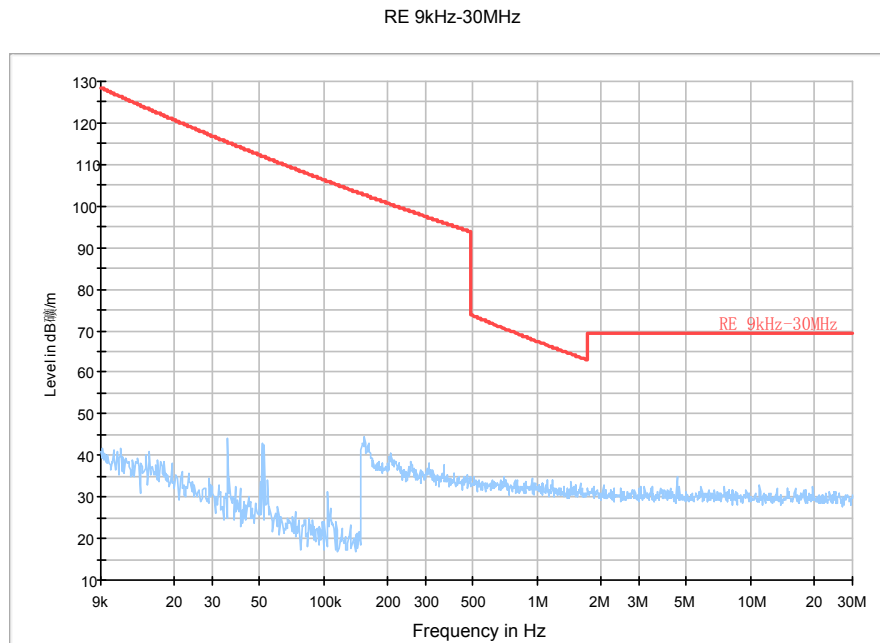


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 9kHz-30 MHz)

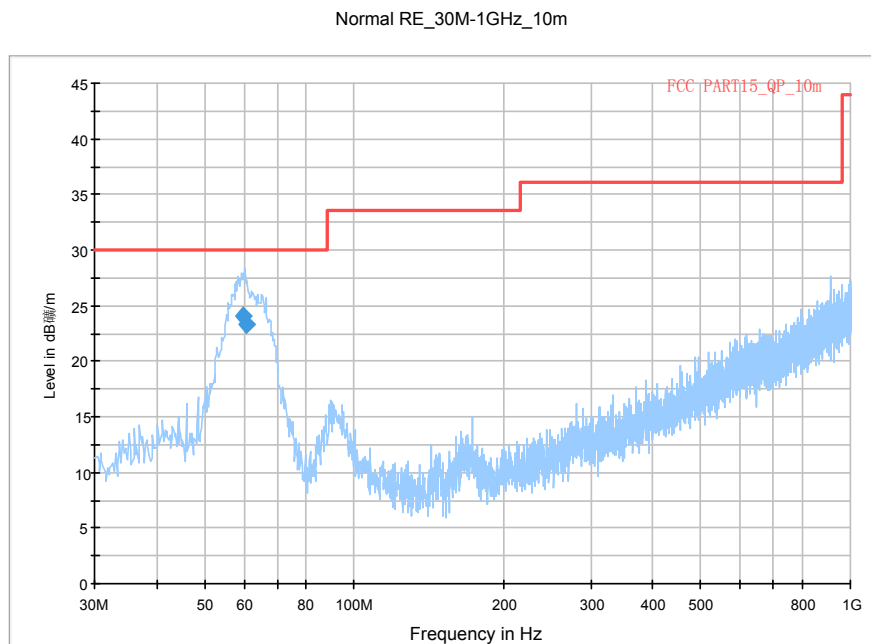


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 30 MHz-1 GHz)

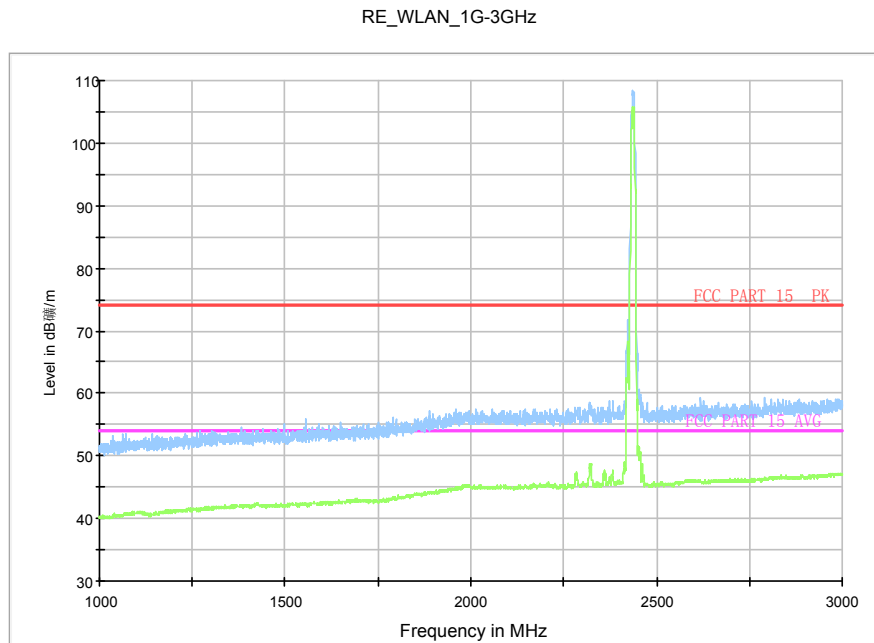


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 1 GHz-3 GHz)

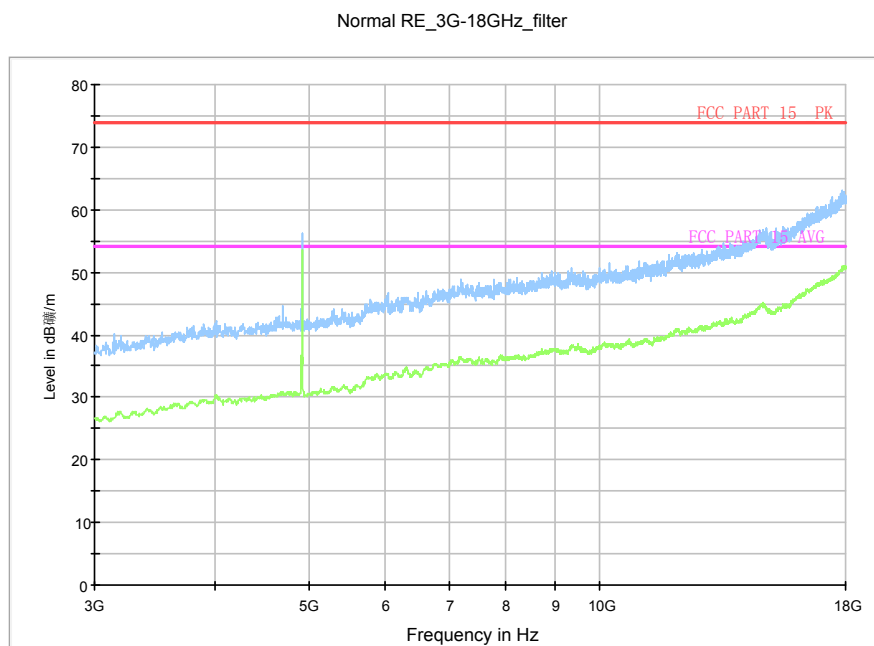


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 3 GHz-18 GHz)

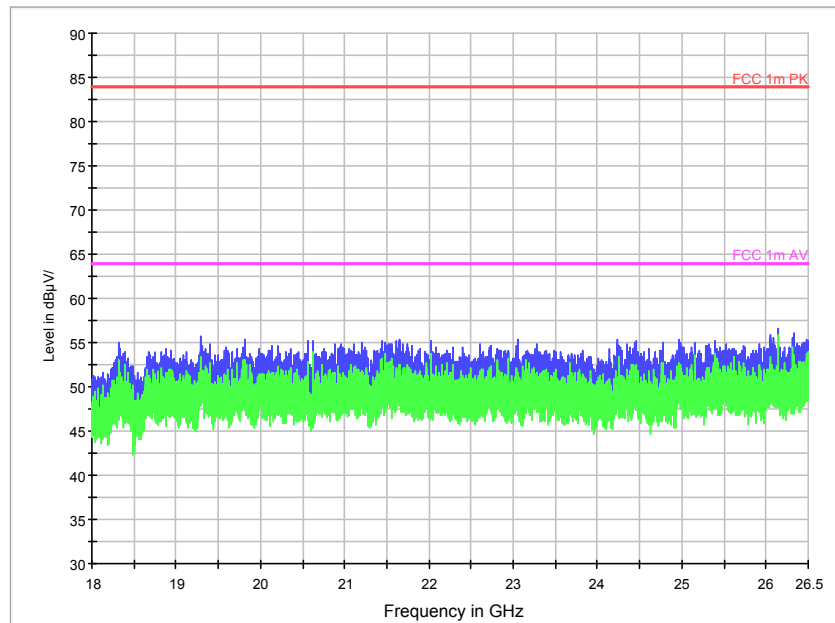


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 18GHz – 26.5GHz)

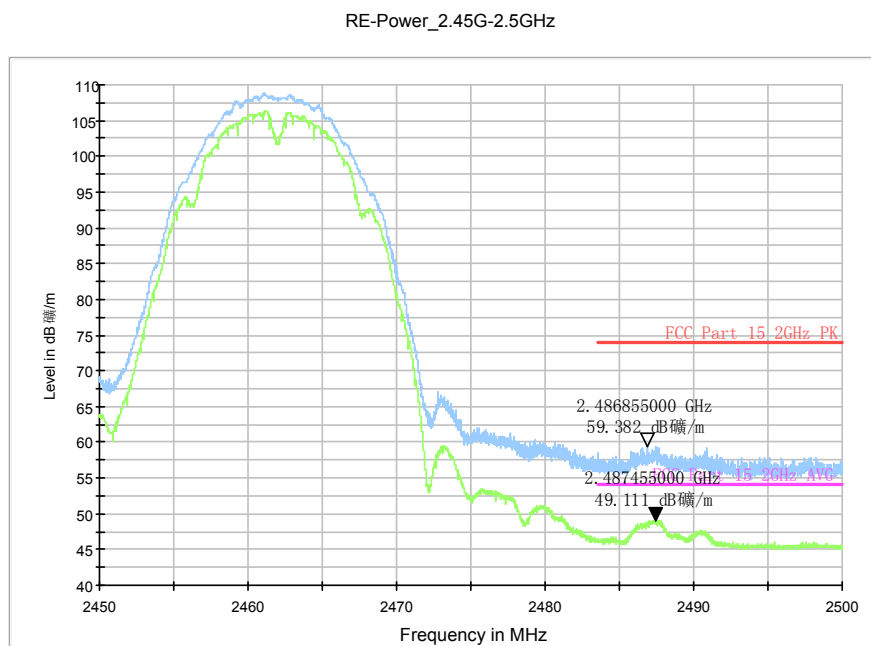


Fig.A.6.2.9 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

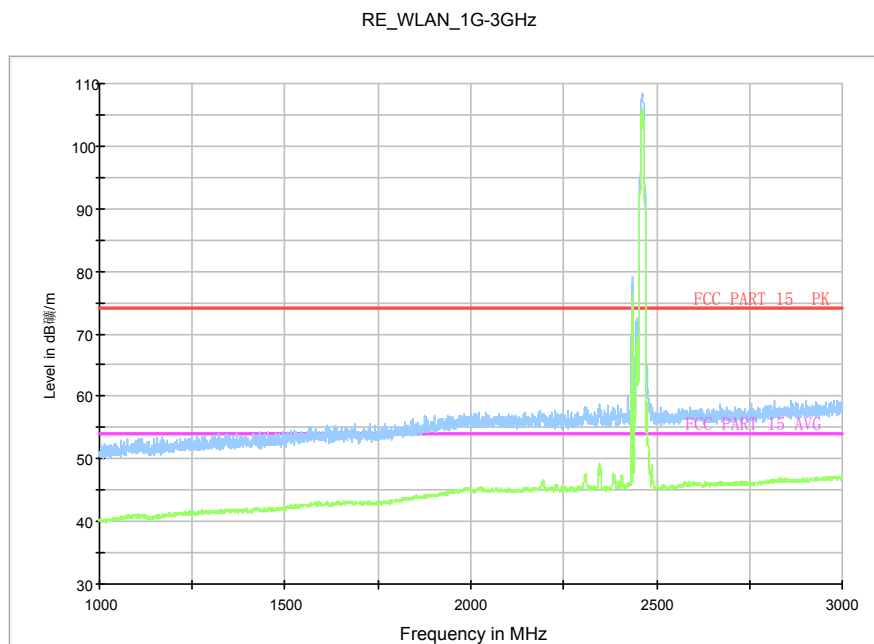


Fig.A.6.2.10 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 1 GHz-3 GHz)

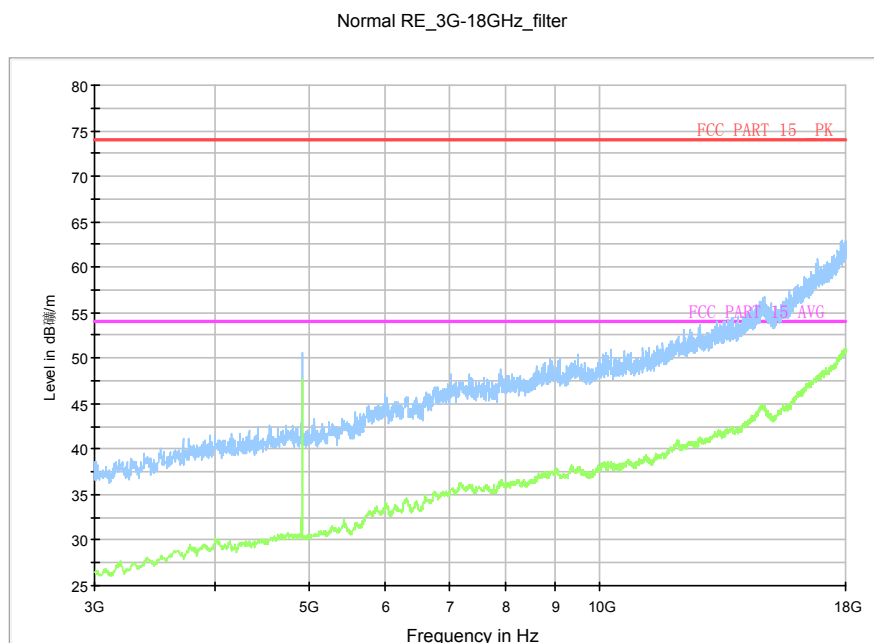


Fig.A.6.2.11 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 3 GHz-18 GHz)

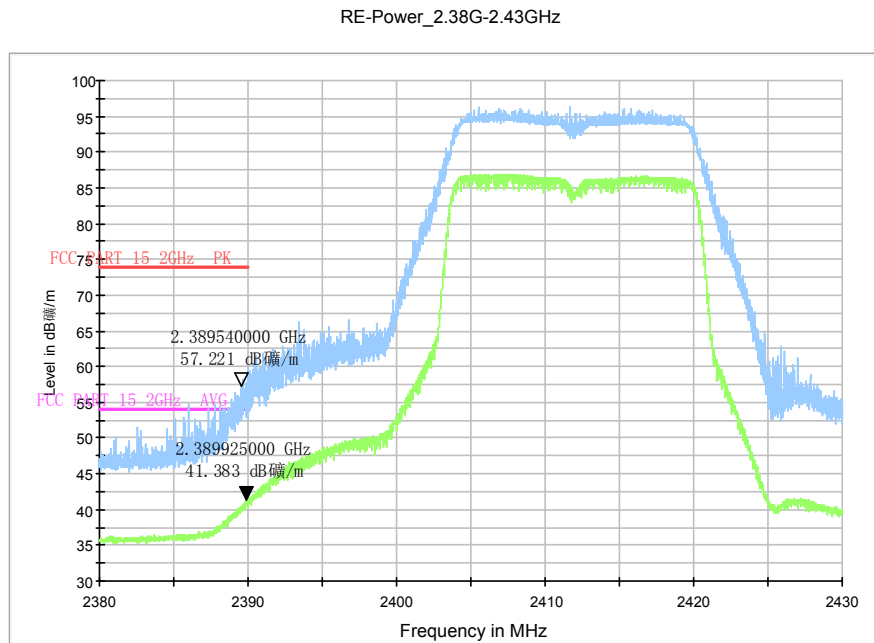


Fig.A.6.2.12 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

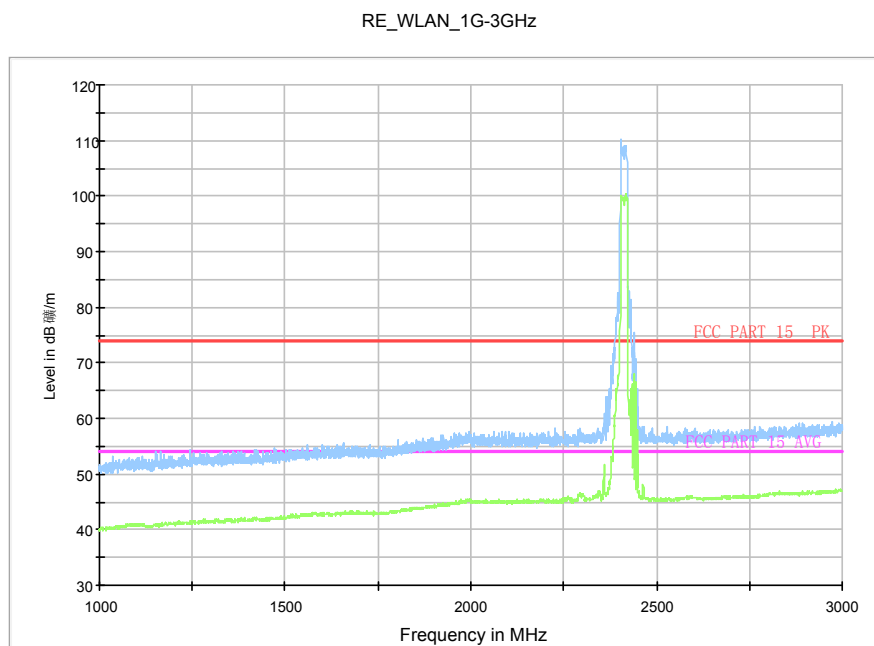


Fig.A.6.2.13 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 1 GHz-3 GHz)

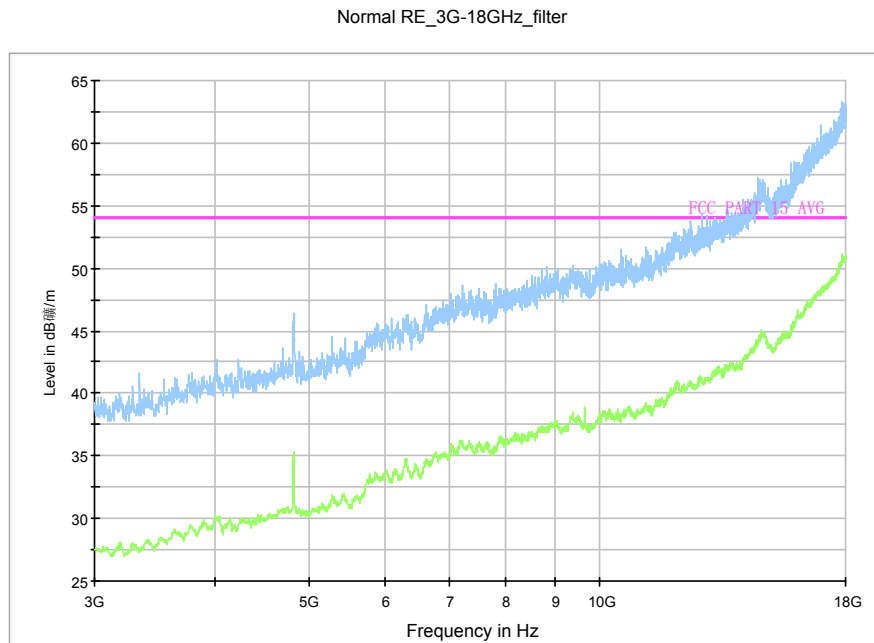


Fig.A.6.2.14 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 3 GHz-18 GHz)

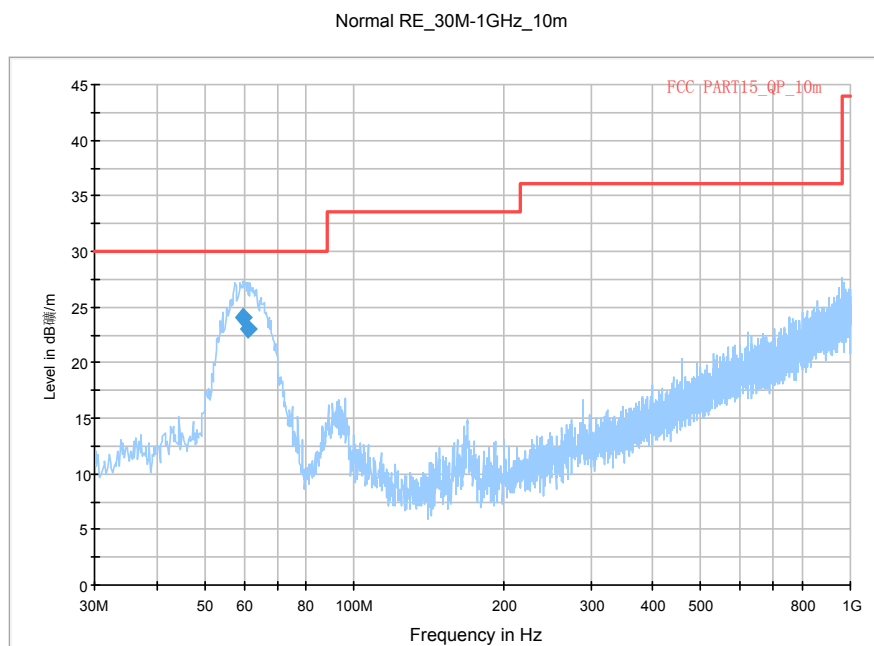


Fig.A.6.2.15 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 30 MHz-1 GHz)

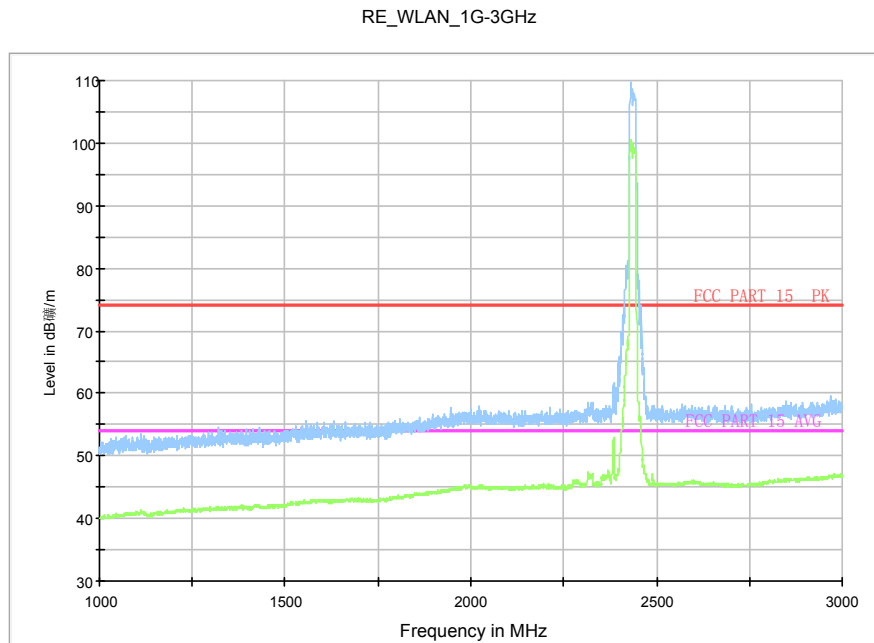


Fig.A.6.2.16 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 1 GHz-3 GHz)

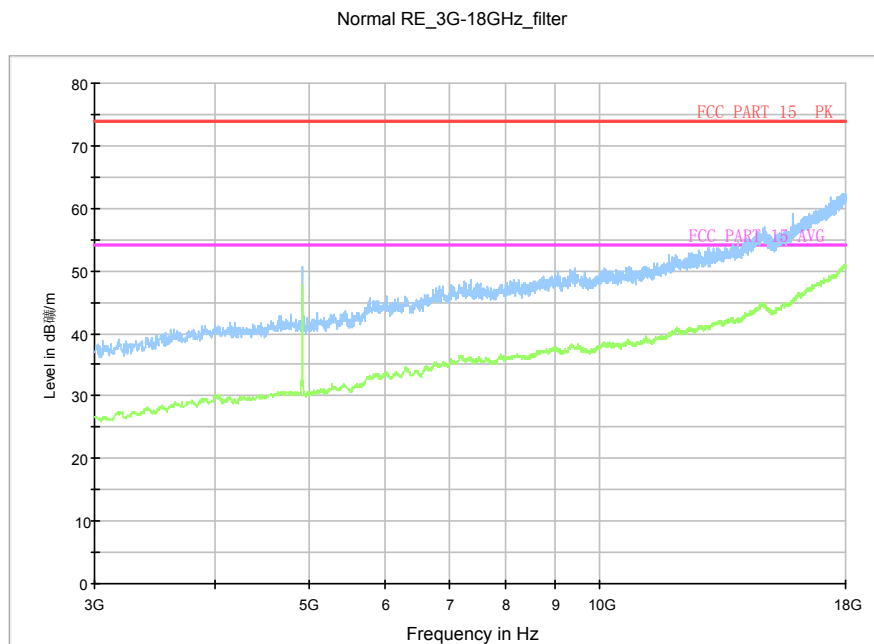


Fig.A.6.2.17 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 3 GHz-18 GHz)

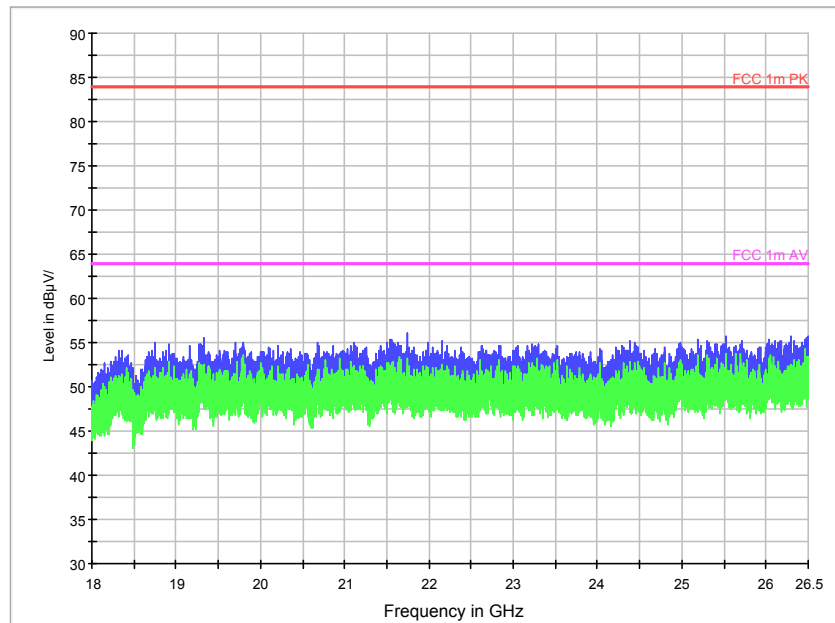


Fig.A.6.2.18 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 18GHz – 26.5GHz)

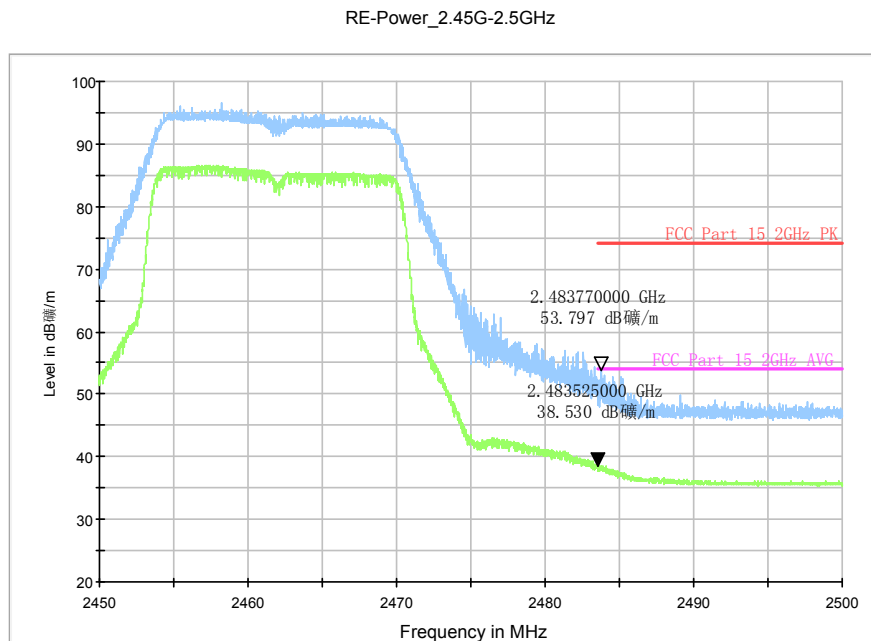


Fig.A.6.2.19 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

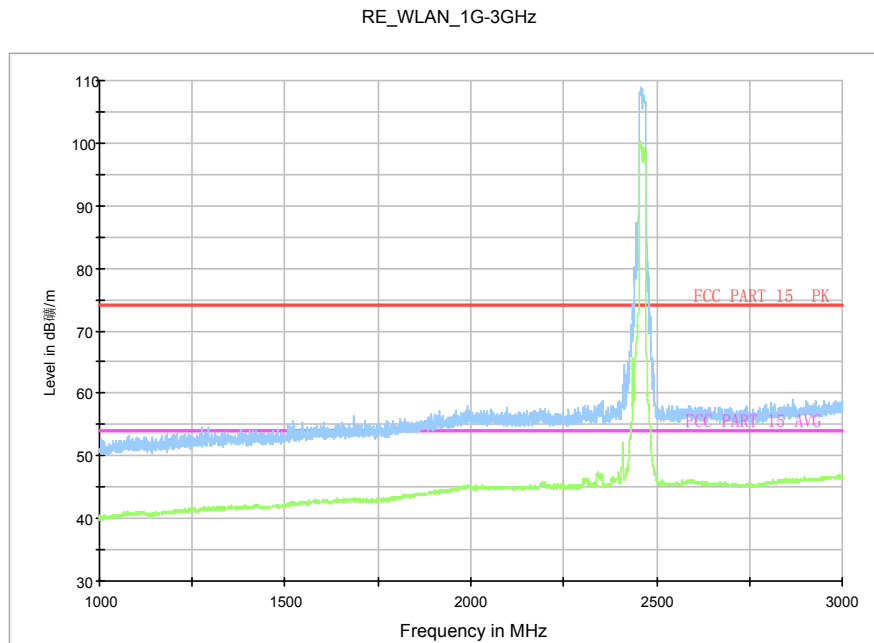


Fig.A.6.2.20 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 1 GHz-3 GHz)

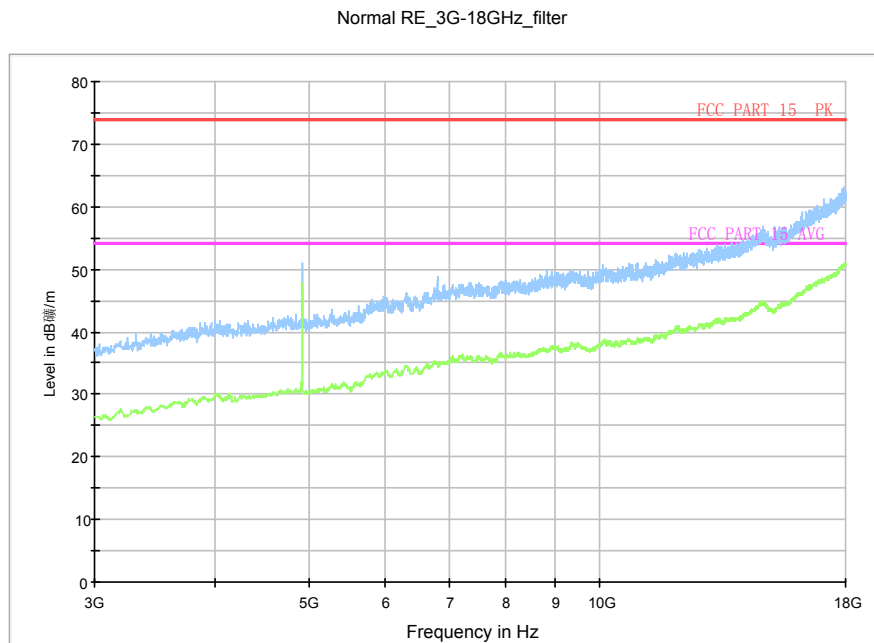


Fig.A.6.2.21 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 3 GHz-18 GHz)

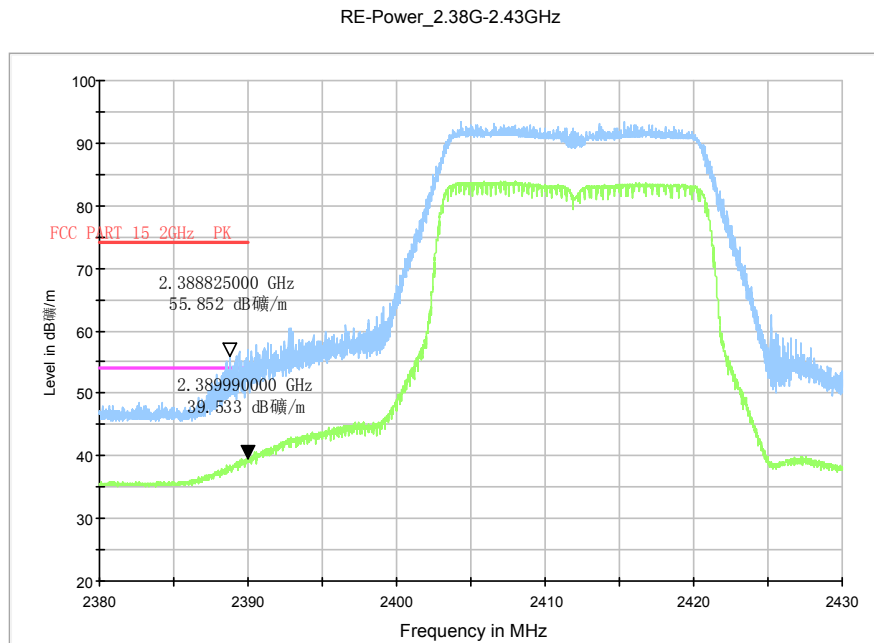


Fig.A.6.2.22 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

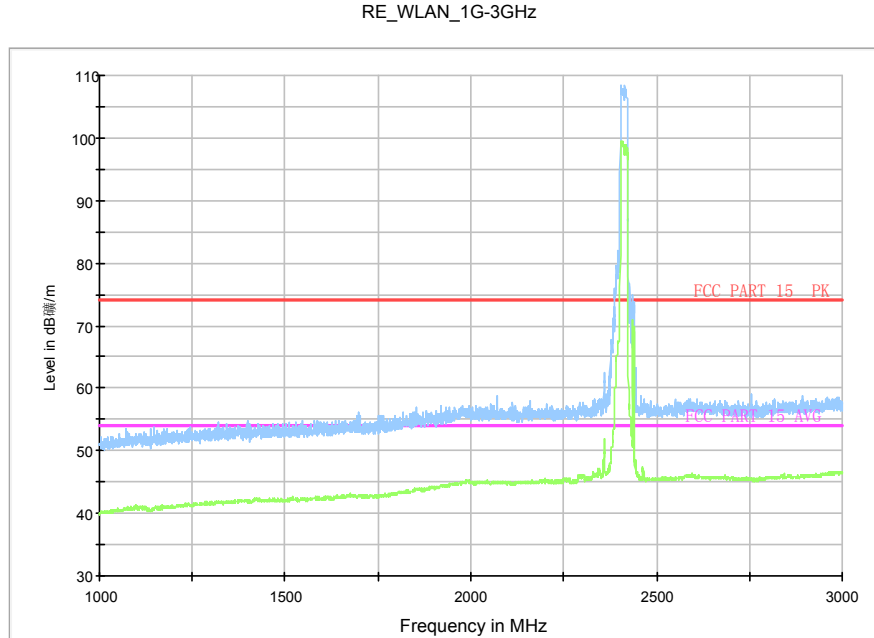


Fig.A.6.2.23 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 1 GHz-3 GHz)

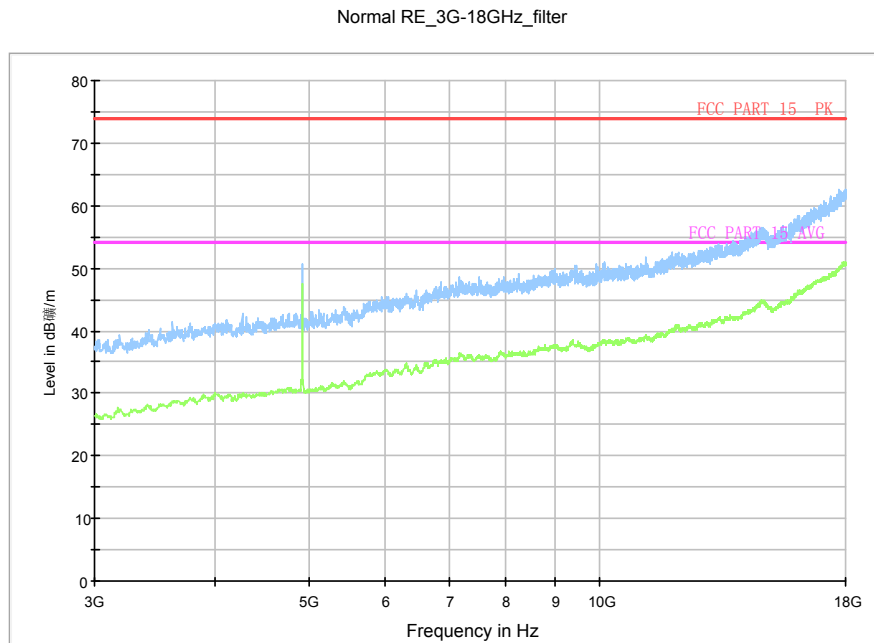


Fig.A.6.2.24 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 3 GHz-18 GHz)

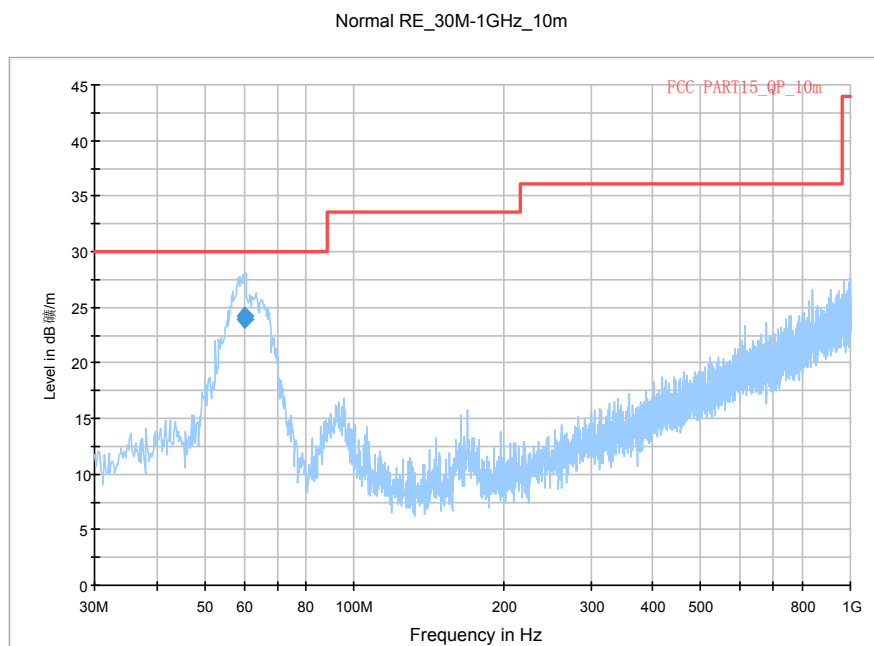


Fig.A.6.2.25 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 30 MHz-1 GHz)

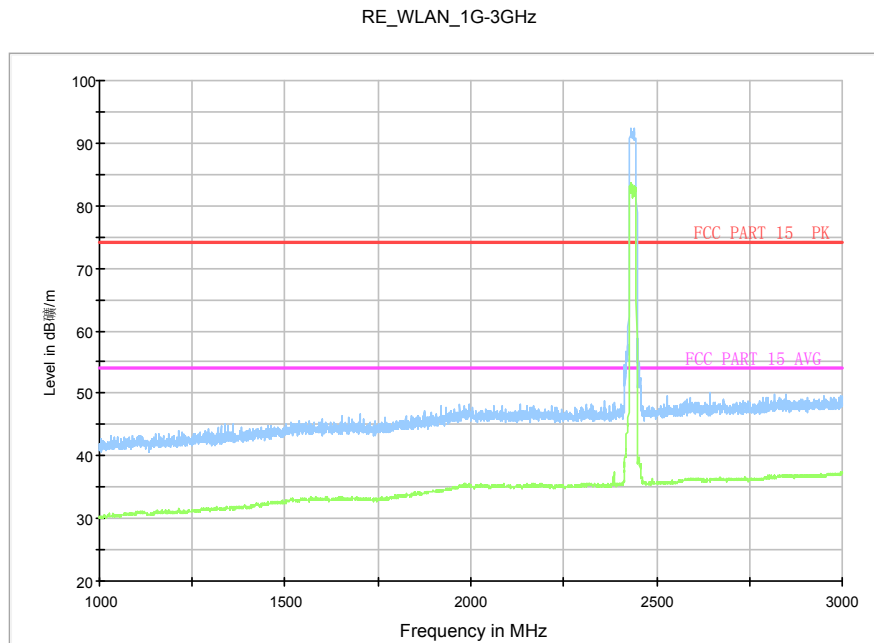


Fig.A.6.2.26 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 1 GHz-3 GHz)

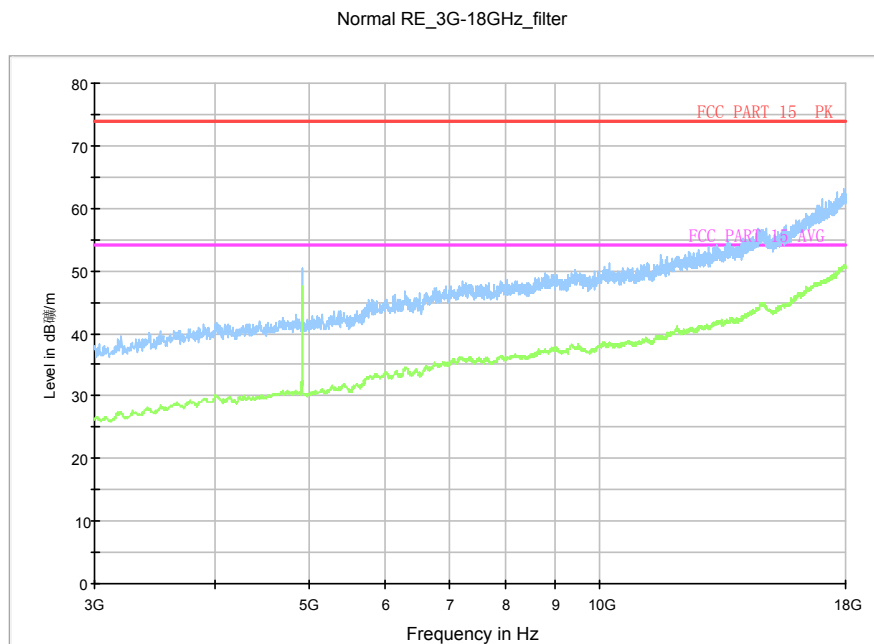


Fig.A.6.2.27 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 3 GHz-18 GHz)

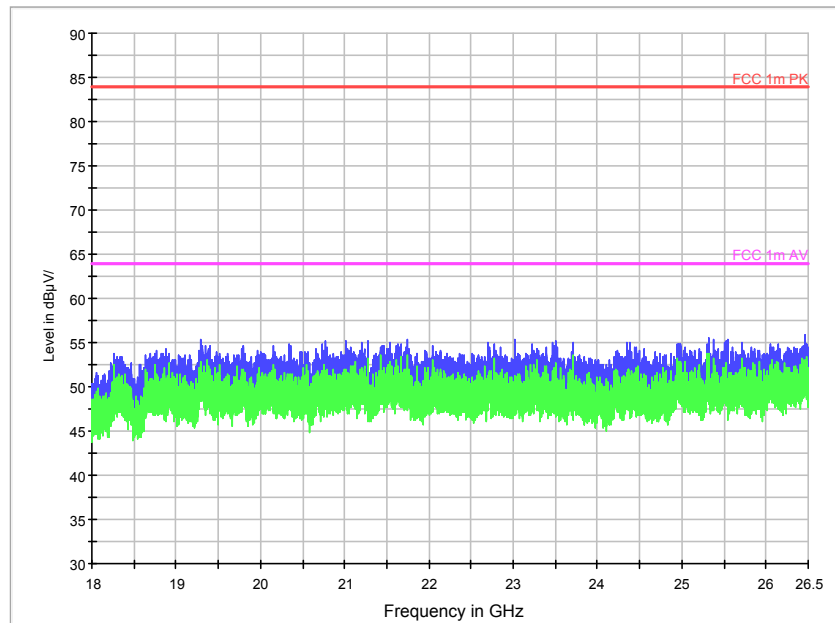


Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz – 26.5GHz)

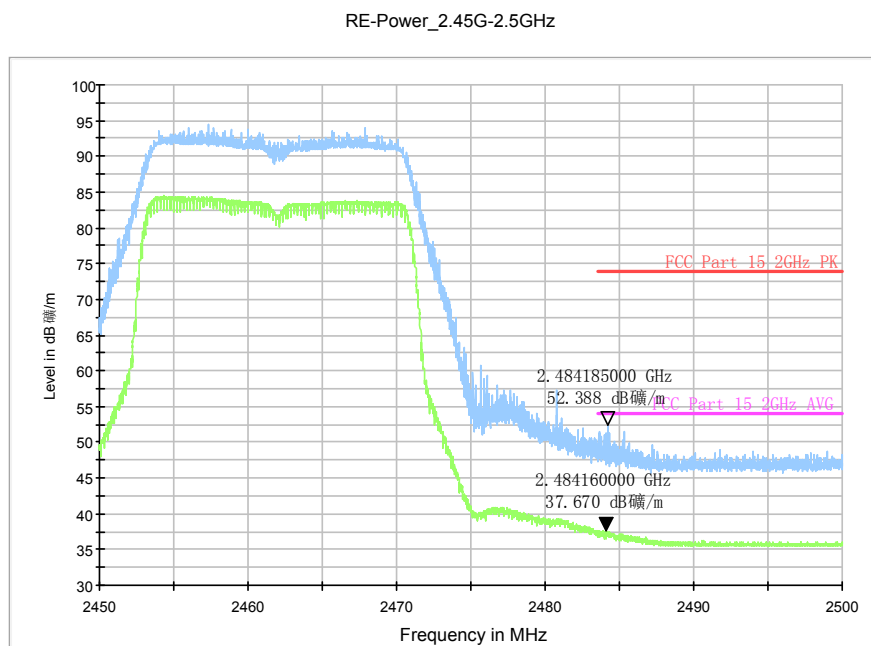


Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

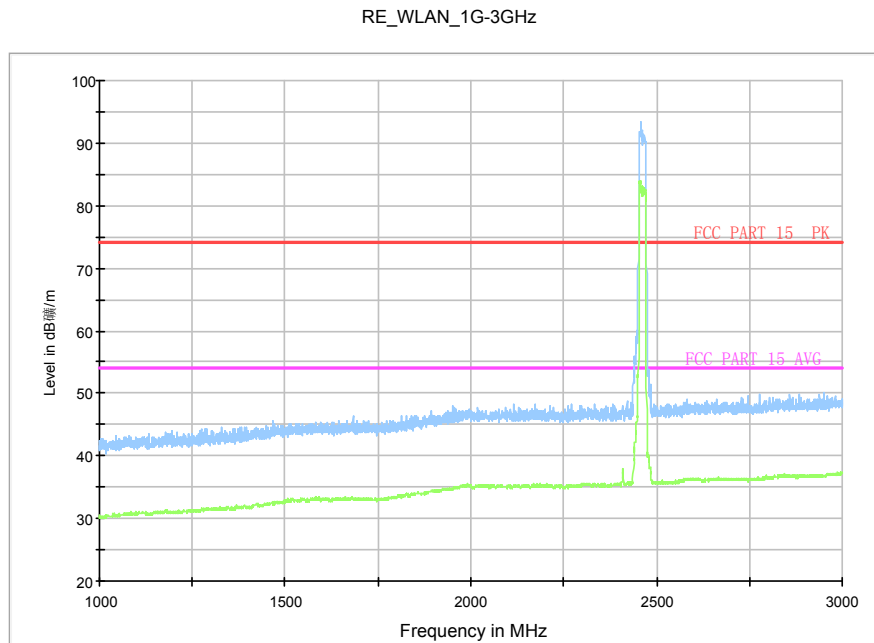


Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3 GHz)

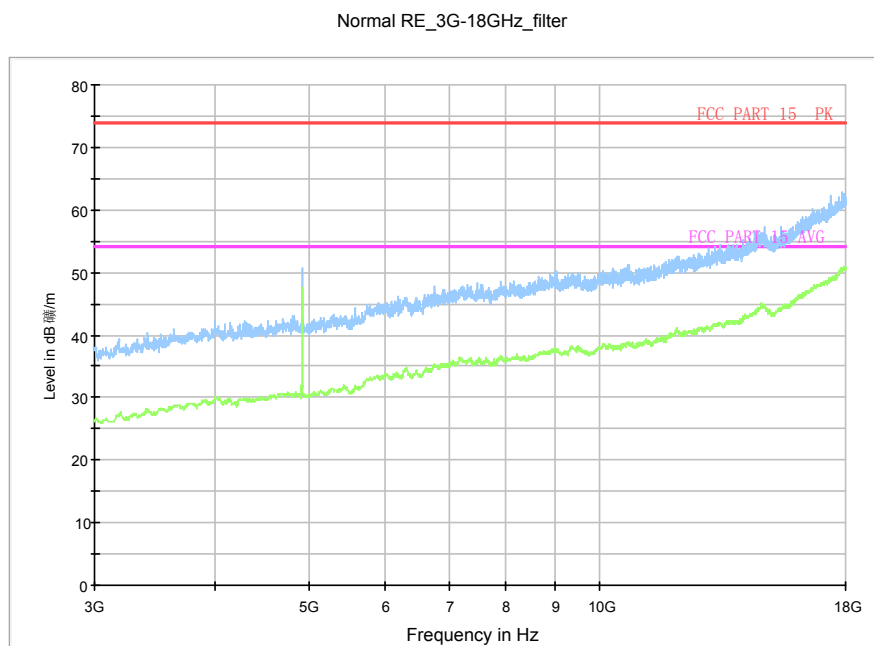


Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

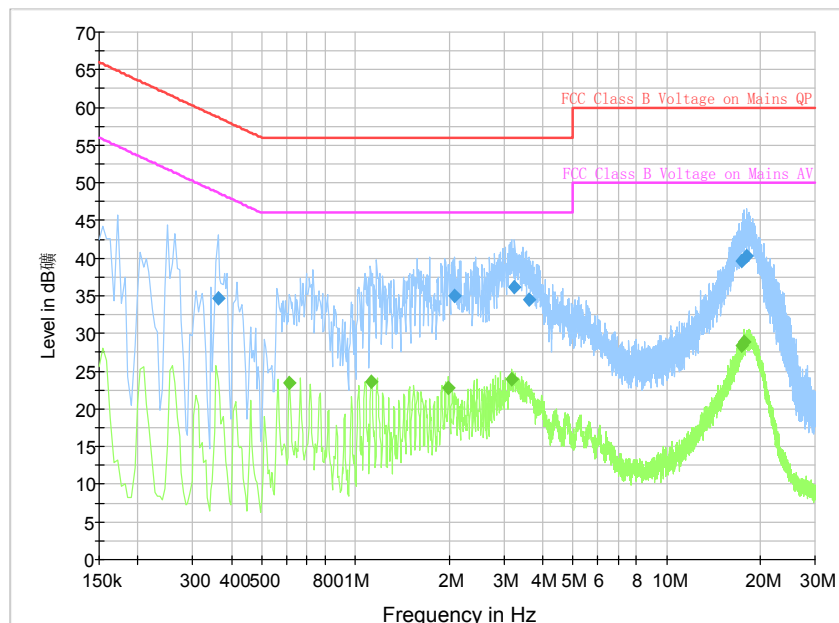


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and

neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.361500	34.7	2000.0	9.000	On	L1	19.8	24.0	58.7
2.080500	35.0	2000.0	9.000	On	L1	19.7	21.0	56.0
3.250500	36.2	2000.0	9.000	On	N	19.3	19.8	56.0
3.628500	34.6	2000.0	9.000	On	N	19.5	21.4	56.0
17.470500	39.6	2000.0	9.000	On	L1	20.0	20.4	60.0
18.132000	40.3	2000.0	9.000	On	L1	19.9	19.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.613500	23.5	2000.0	9.000	On	L1	19.8	22.5	46.0
1.122000	23.6	2000.0	9.000	On	L1	19.7	22.4	46.0
1.990500	22.8	2000.0	9.000	On	L1	19.7	23.2	46.0
3.174000	23.9	2000.0	9.000	On	L1	19.3	22.1	46.0
17.479500	28.3	2000.0	9.000	On	L1	20.0	21.7	50.0
17.758500	28.8	2000.0	9.000	On	L1	20.0	21.2	50.0

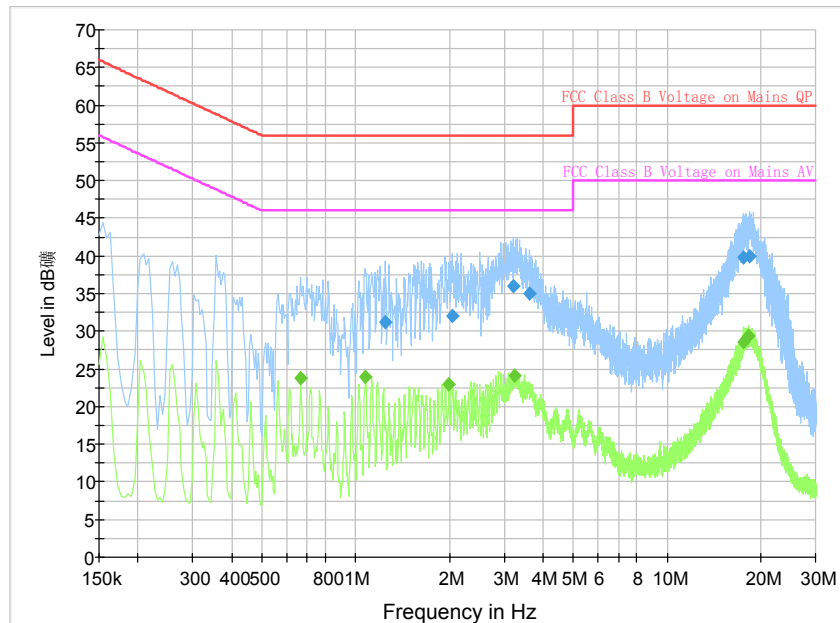


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.243500	31.2	2000.	9.000	On	N	19.7	24.8	56.0
2.049000	32.0	2000.	9.000	On	N	19.7	24.0	56.0
3.219000	36.0	2000.	9.000	On	L1	19.3	20.0	56.0
3.610500	35.0	2000.	9.000	On	L1	19.5	21.0	56.0
17.542500	39.8	2000.	9.000	On	L1	20.0	20.2	60.0
18.433500	39.9	2000.	9.000	On	L1	19.9	20.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.667500	23.8	2000.0	9.000	On	L1	19.8	22.2	46.0
1.077000	23.9	2000.0	9.000	On	L1	19.7	22.1	46.0
1.995000	22.9	2000.0	9.000	On	L1	19.7	23.1	46.0
3.246000	24.2	2000.0	9.000	On	L1	19.3	21.8	46.0
17.650500	28.6	2000.0	9.000	On	L1	20.0	21.4	50.0
18.280500	29.4	2000.0	9.000	On	L1	19.9	20.6	50.0

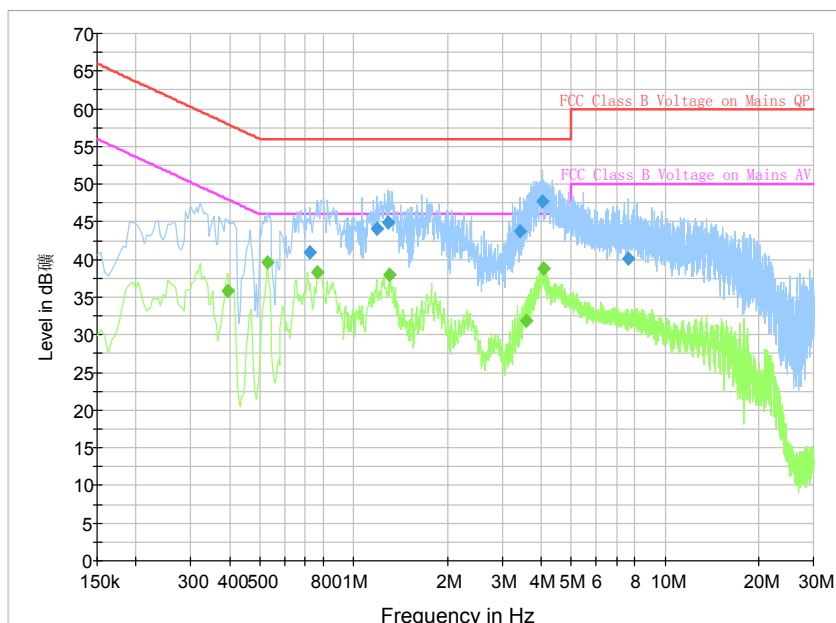


Fig.A.7.1 AC Powerline Conducted Emission-802.11b with CBA0058AG1C2

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.726000	41.0	2000.0	9.000	On	N	19.8	15.0	56.0
1.185000	44.0	2000.0	9.000	On	N	19.7	12.0	56.0
1.288500	44.8	2000.0	9.000	On	N	19.7	11.2	56.0
3.426000	43.8	2000.0	9.000	On	L1	19.4	12.2	56.0
4.033500	47.7	2000.0	9.000	On	L1	19.5	8.3	56.0
7.597500	40.1	2000.0	9.000	On	L1	19.6	19.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	35.8	2000.0	9.000	On	N	19.9	12.2	48.0
0.528000	39.6	2000.0	9.000	On	N	19.9	6.4	46.0
0.762000	38.3	2000.0	9.000	On	N	19.8	7.8	46.0
1.306500	38.0	2000.0	9.000	On	N	19.7	8.0	46.0
3.583500	31.9	2000.0	9.000	On	L1	19.5	14.1	46.0
4.078500	38.7	2000.0	9.000	On	L1	19.6	7.3	46.0

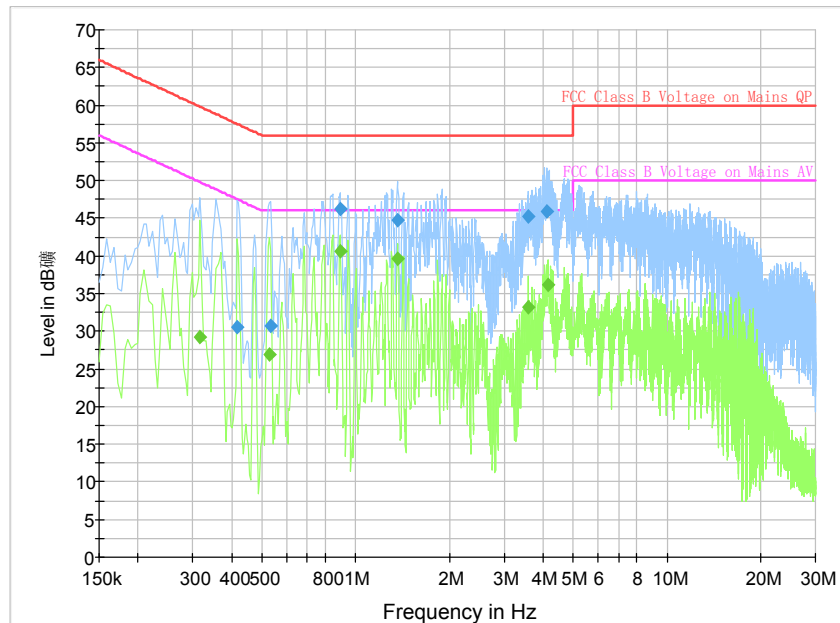


Fig.A.7.2 AC Powerline Conducted Emission-Idle with CBA0058AG1C2

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.415500	30.5	2000.	9.000	On	N	19.9	27.0	57.5
0.532500	30.7	2000.	9.000	On	N	19.9	25.3	56.0
0.892500	46.3	2000.	9.000	On	N	19.8	9.7	56.0
1.360500	44.8	2000.	9.000	On	N	19.7	11.2	56.0
3.583500	45.3	2000.	9.000	On	L1	19.5	10.7	56.0
4.096500	45.9	2000.	9.000	On	L1	19.6	10.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.316500	29.2	2000.0	9.000	On	N	19.8	20.6	49.8
0.528000	26.9	2000.0	9.000	On	N	19.9	19.1	46.0
0.892500	40.7	2000.0	9.000	On	N	19.8	5.3	46.0
1.365000	39.6	2000.0	9.000	On	N	19.7	6.4	46.0
3.583500	33.2	2000.0	9.000	On	L1	19.5	12.8	46.0
4.164000	36.1	2000.0	9.000	On	L1	19.6	9.9	46.0

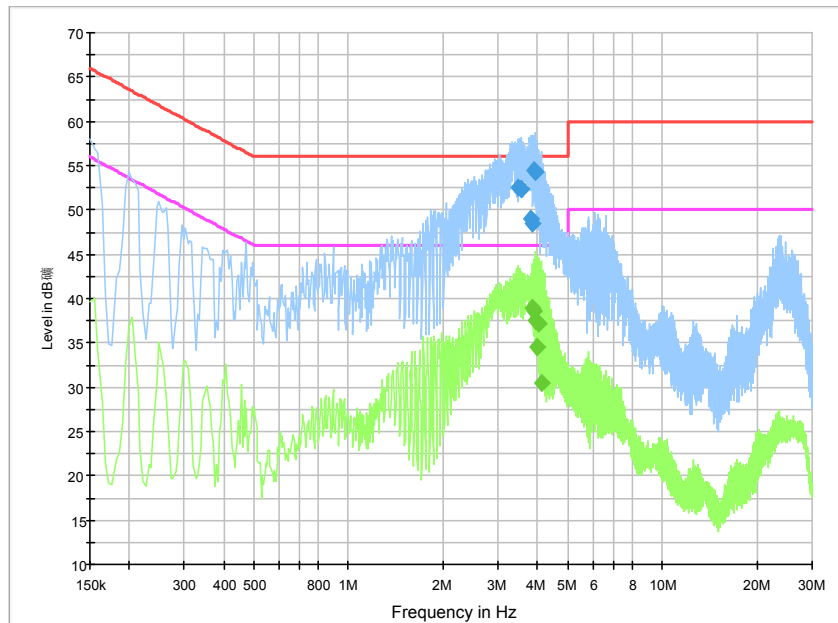


Fig.A.7.1 AC Powerline Conducted Emission-802.11b with CBA0066AG0C1

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.457501	52.6	GND	L1	10.3	3.4	56.0
3.556501	52.3	GND	L1	10.3	3.7	56.0
3.799501	49.0	GND	L1	10.3	7.0	56.0
3.849001	48.5	GND	L1	10.3	7.5	56.0
3.880501	54.5	GND	L1	10.3	1.5	56.0
3.939001	54.3	GND	L1	10.3	1.7	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.849001	38.9	GND	L1	10.3	7.1	46.0
3.898501	38.5	GND	L1	10.3	7.5	46.0
3.948001	37.5	GND	L1	10.3	8.5	46.0
4.002001	34.6	GND	L1	10.3	11.4	46.0
4.047001	37.2	GND	L1	10.3	8.8	46.0
4.105501	30.4	GND	L1	10.3	15.6	46.0

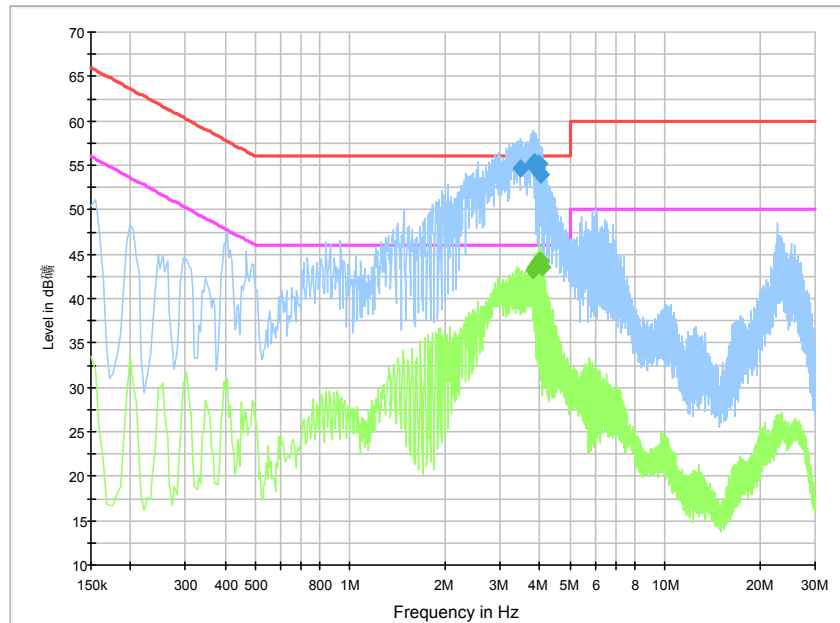


Fig.A.7.2 AC Powerline Conducted Emission-Idle with CBA0066AG0C1

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.480001	54.7	GND	L1	10.3	1.3	56.0
3.804001	55.2	GND	L1	10.3	0.8	56.0
3.871501	55.4	GND	L1	10.3	0.6	56.0
3.912001	54.6	GND	L1	10.3	1.4	56.0
3.970501	55.1	GND	L1	10.3	0.9	56.0
4.020001	53.9	GND	L1	10.3	2.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.822001	43.2	GND	L1	10.3	2.8	46.0
3.871501	43.6	GND	L1	10.3	2.4	46.0
3.921001	44.0	GND	L1	10.3	2.0	46.0
3.970501	44.3	GND	L1	10.3	1.7	46.0
4.020001	44.2	GND	L1	10.3	1.8	46.0
4.069501	43.6	GND	L1	10.3	2.4	46.0

ANNEX B: Accreditation Certificate

 China National Accreditation Service for Conformity Assessment LABORATORY ACCREDITATION CERTIFICATE (No. CNAS L0570) Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT <u>No.52, Huayuan North Road, Haidian District, Beijing, China</u> <u>No.51, Xueyuan Road, Haidian District, Beijing, China</u> <i>to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.</i> <i>The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.</i> Date of Issue: 2014-10-29 Date of Expiry: 2017-06-19 Date of Initial Accreditation: 1998-07-03  Signed on behalf of China National Accreditation Service for Conformity Assessment China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA). No.CNAS AL 2 0011149
--

END OF REPORT