

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

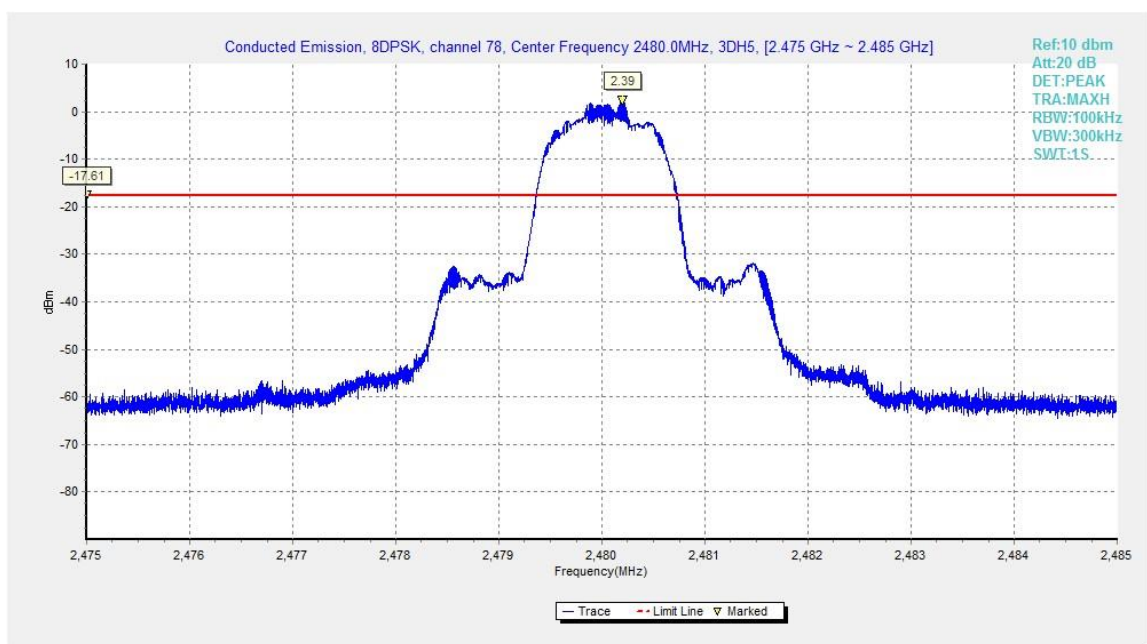


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

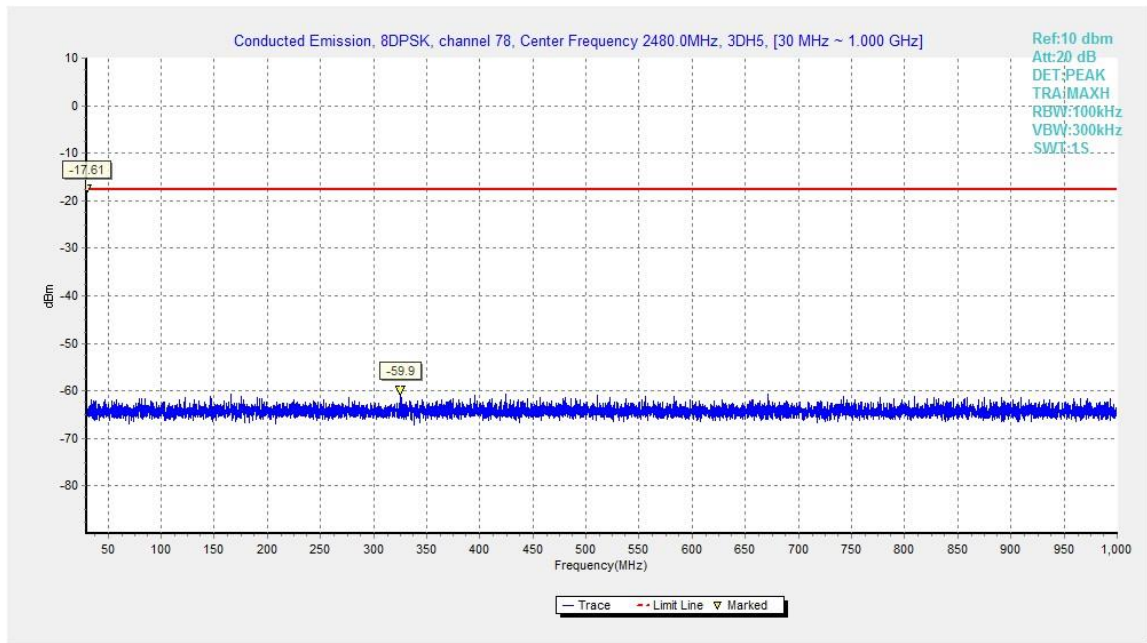


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

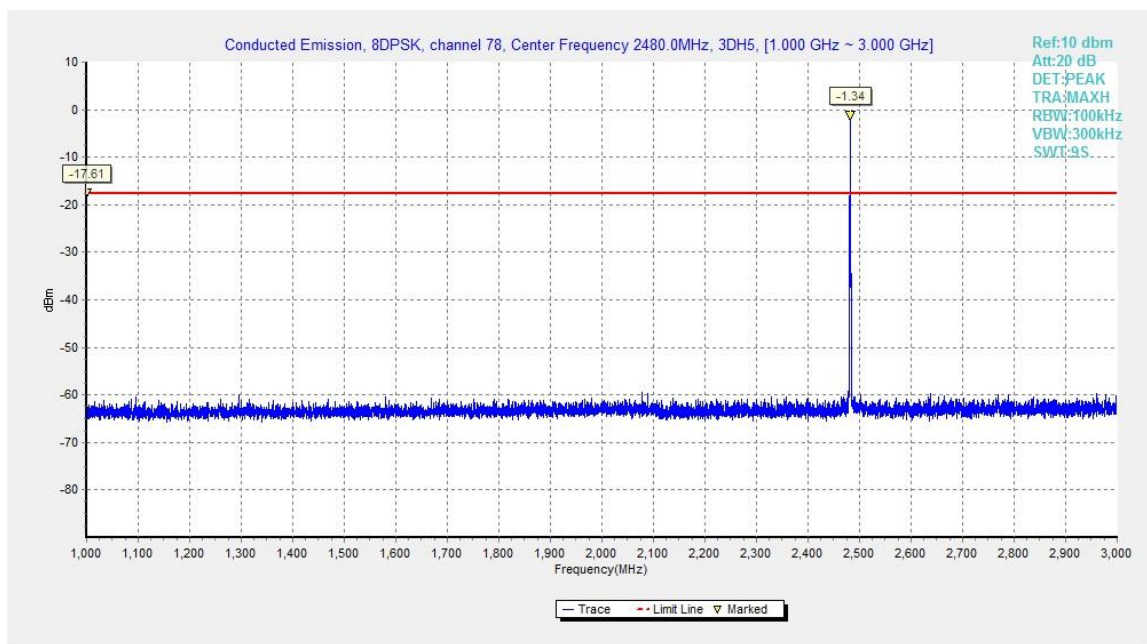


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

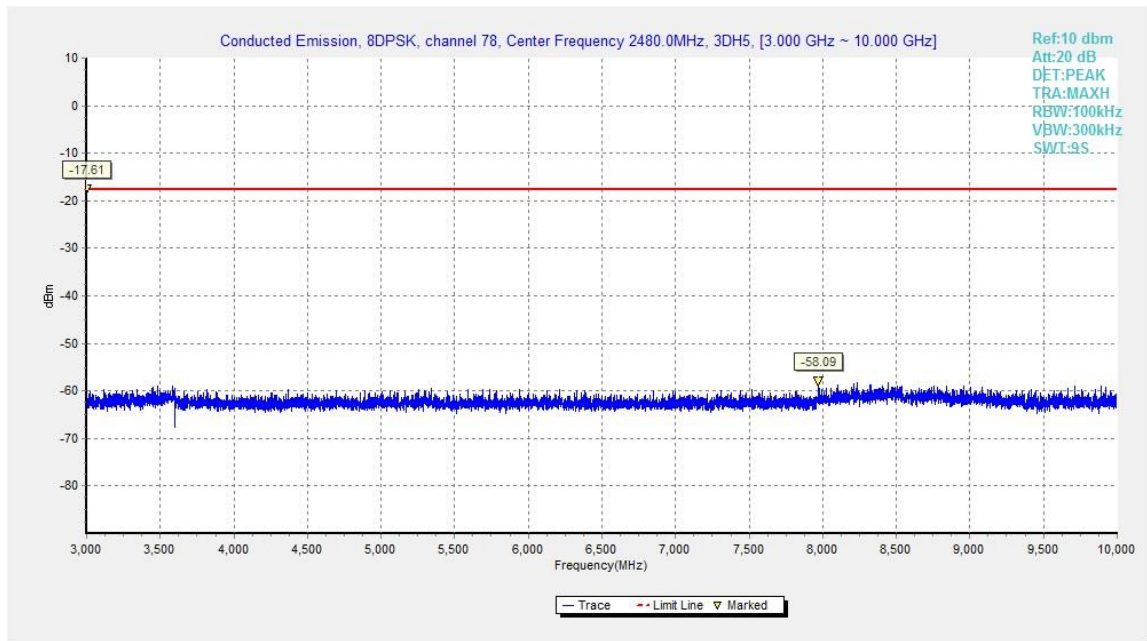


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

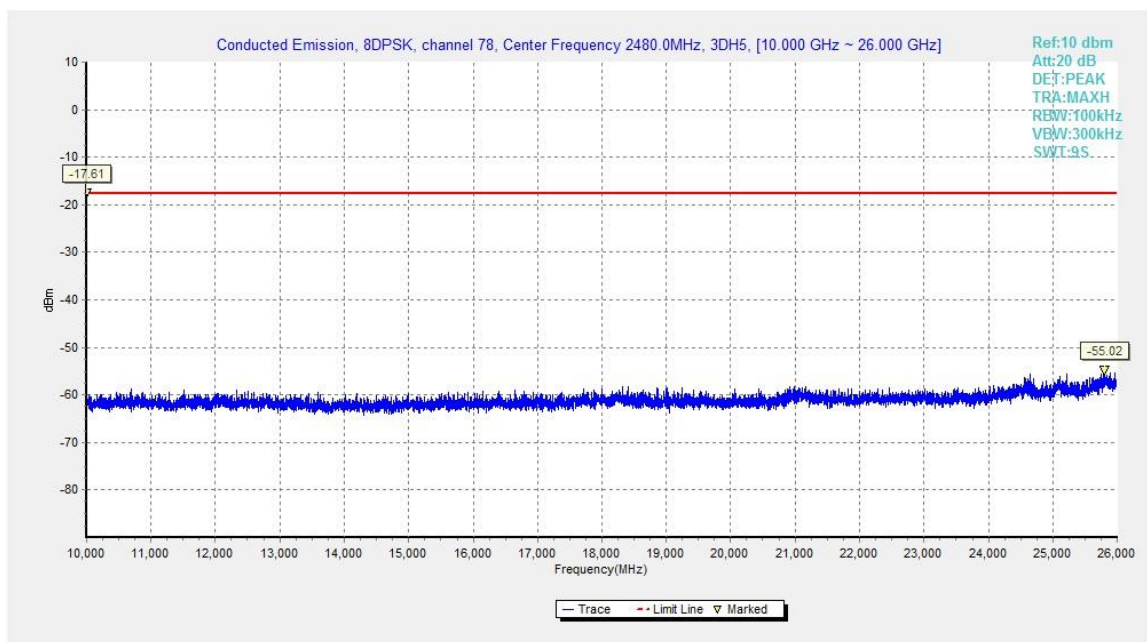


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result= $P_{Mea} + ARPL$

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	9 kHz ~ 30 MHz	--	P
	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
Ch 78 2480 MHz	3 GHz ~ 18 GHz	--	P
	1 GHz ~ 3 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.58	P
Power	2.45GHz~2.5GHz---H	Fig.59	P
For all channels	18 GHz ~ 26 GHz	--	P

Forπ/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.60	P
Power	2.45GHz~2.5GHz---H	Fig.61	P
For all channels	18 GHz ~ 26 GHz	--	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.62	P
Power	2.45GHz~2.5GHz---H	Fig.63	P
For all channels	18 GHz ~ 26 GHz	--	P

GFSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2386.400	47.14	2.9	32.0	12.26	54.0	6.9	H	155	18
2390.000	47.14	2.9	32.0	12.29	54.0	6.9	H	155	56
4804.000	35.86	-32.9	34.5	34.22	54.0	18.1	H	155	139
7206.000	38.64	-31.6	36.1	34.17	54.0	15.4	H	155	108
9608.000	38.02	-30.0	37.0	31.06	54.0	16.0	H	155	78
12010.000	43.29	-29.8	39.3	33.82	54.0	10.7	H	155	36

GFSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2435.600	47.54	2.9	32.0	12.67	54.0	6.5	H	155	268
2447.400	47.60	2.9	32.3	12.41	54.0	6.4	H	155	138
4882.000	35.69	-32.7	34.5	33.90	54.0	18.3	H	155	104
7323.000	38.19	-31.9	36.1	34.03	54.0	15.8	H	155	40
9764.000	38.63	-30.6	37.2	32.00	54.0	15.4	H	155	28
12205.000	44.00	-29.4	39.2	34.21	54.0	10.0	H	155	8

GFSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.86	2.9	32.8	12.17	54.0	6.1	H	155	16
2485.500	47.71	2.9	32.7	12.07	54.0	6.3	H	155	48
4960.000	35.80	-33.4	34.5	34.67	54.0	18.2	H	155	80
7440.000	38.13	-31.8	36.0	33.87	54.0	15.9	H	155	8
9920.000	40.76	-29.9	37.4	33.29	54.0	13.2	H	155	102
12400.000	44.24	-29.5	39.1	34.61	54.0	9.8	H	155	118

GFSK Ch 0 – Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2381.582	60.23	2.9	32.0	25.32	74.0	13.8	H	155	22
2387.364	60.08	2.9	32.0	25.22	74.0	13.9	H	155	44
4803.750	39.92	-32.9	34.5	38.27	74.0	34.1	H	155	132
7206.000	41.93	-31.6	36.1	37.46	74.0	32.1	V	155	110
9608.250	41.56	-30.0	37.0	34.60	74.0	32.4	H	155	88
12009.750	45.58	-29.8	39.3	36.11	74.0	28.4	H	155	44

GFSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2375.240	49.03	-26.6	32.1	43.56	74.0	25.0	H	155	264
2518.630	49.83	-26.7	32.6	43.92	74.0	24.2	H	155	132
4881.750	38.15	-32.7	34.5	36.37	74.0	35.8	H	155	110
7323.000	41.00	-31.9	36.1	36.85	74.0	33.0	H	155	44
9764.250	41.68	-30.6	37.2	35.05	74.0	32.3	H	155	22
12204.750	45.69	-29.4	39.2	35.90	74.0	28.3	V	155	0

GFSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2492.810	61.01	2.9	32.5	25.57	74.0	13.0	H	155	22
2499.160	61.42	2.9	32.3	26.15	74.0	12.6	H	155	44
4959.750	38.34	-33.4	34.5	37.21	74.0	35.7	V	155	88
7440.000	42.07	-31.8	36.0	37.81	74.0	31.9	V	155	0
9920.250	43.96	-29.9	37.4	36.49	74.0	30.0	H	155	110
12399.750	46.01	-29.5	39.1	36.38	74.0	28.0	H	155	132

$\pi/4$ DQPSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2387.400	47.14	2.9	32.0	12.27	54.0	6.9	H	155	28
2388.700	47.14	2.9	32.0	12.28	54.0	6.9	H	155	46
4804.000	35.87	-32.9	34.5	34.22	54.0	18.1	H	155	8
7206.000	38.47	-31.6	36.1	34.00	54.0	15.5	H	155	6
9608.000	38.03	-30.0	37.0	31.08	54.0	16.0	H	155	24
12010.000	43.37	-29.8	39.3	33.90	54.0	10.6	H	155	185

$\pi/4$ DQPSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.500	47.59	2.9	32.0	12.69	54.0	6.4	H	155	28
2446.300	47.61	2.9	32.3	12.45	54.0	6.4	H	155	248
4882.000	35.66	-32.7	34.5	33.88	54.0	18.3	H	155	38
7323.000	38.18	-31.9	36.1	34.02	54.0	15.8	H	155	98
9764.000	38.60	-30.6	37.2	31.97	54.0	15.4	H	155	183
12205.000	44.01	-29.4	39.2	34.22	54.0	10.0	H	155	356

$\pi/4$ DQPSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.88	2.9	32.8	12.19	54.0	6.1	H	155	20
2484.100	47.68	2.9	32.7	12.00	54.0	6.3	H	155	18
4960.000	35.68	-33.4	34.5	34.55	54.0	18.3	H	155	90
7440.000	38.15	-31.8	36.0	33.89	54.0	15.9	H	155	114
9920.000	40.75	-29.9	37.4	33.28	54.0	13.3	H	155	36
12400.000	44.23	-29.5	39.1	34.61	54.0	9.8	H	155	2

$\pi/4$ DQPSK Ch 0 – Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2383.150	60.47	2.9	32.0	25.58	74.0	13.5	H	155	22
2386.300	60.17	2.9	32.0	25.30	74.0	13.8	H	155	44
4804.500	38.83	-32.8	34.5	37.18	74.0	35.2	V	155	0
7206.000	42.79	-31.6	36.1	38.32	74.0	31.2	H	155	0
9608.250	41.04	-30.0	37.0	34.08	74.0	33.0	V	155	22
12009.750	46.76	-29.8	39.3	37.28	74.0	27.2	H	155	176

$\pi/4$ DQPSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2376.450	48.34	-26.6	32.1	42.80	74.0	25.7	H	155	22
2518.860	49.13	-26.7	32.6	43.21	74.0	24.9	H	155	242
4881.750	40.00	-32.7	34.5	38.22	74.0	34.0	V	155	44
7323.000	40.58	-31.9	36.1	36.42	74.0	33.4	H	155	88
9764.250	42.89	-30.6	37.2	36.26	74.0	31.1	V	155	176
12204.750	48.00	-29.4	39.2	38.21	74.0	26.0	H	155	0

$\pi/4$ DQPSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2487.960	61.28	2.9	32.6	25.71	74.0	12.7	H	155	22
2492.550	61.10	2.9	32.5	25.66	74.0	12.9	H	155	22
4959.750	39.72	-33.4	34.5	38.59	74.0	34.3	H	155	88
7440.000	41.20	-31.8	36.0	36.94	74.0	32.8	V	155	110
9920.250	43.25	-29.9	37.4	35.78	74.0	30.8	V	155	44
12400.500	45.37	-29.5	39.1	35.74	74.0	28.6	H	155	0

8DPSK Ch 0 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2385.700	47.14	2.9	32.0	12.26	54.0	6.9	H	155	8
2388.700	47.18	2.9	32.0	12.33	54.0	6.8	H	155	52
4804.000	35.84	-32.9	34.5	34.19	54.0	18.2	H	155	18
7206.000	38.68	-31.6	36.1	34.21	54.0	15.3	H	155	6
9608.000	38.11	-30.0	37.0	31.16	54.0	15.9	H	155	48
12010.000	43.38	-29.8	39.3	33.91	54.0	10.6	H	155	128

8DPSK Ch 39 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2435.600	47.53	2.9	32.0	12.66	54.0	6.5	H	155	20
2449.600	47.63	2.9	32.3	12.38	54.0	6.4	H	155	248
4882.000	35.75	-32.7	34.5	33.96	54.0	18.3	H	155	49
7323.000	38.17	-31.9	36.1	34.01	54.0	15.8	H	155	82
9764.000	38.58	-30.6	37.2	31.95	54.0	15.4	H	155	168
12205.000	43.97	-29.4	39.2	34.18	54.0	10.0	H	155	8

8DPSK Ch 78 - Average

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.88	2.9	32.8	12.18	54.0	6.1	H	155	4
2485.400	47.67	2.9	32.7	12.03	54.0	6.3	H	155	26
4960.000	35.80	-33.4	34.5	34.68	54.0	18.2	H	155	356
7440.000	38.16	-31.8	36.0	33.90	54.0	15.8	H	155	348
9920.000	40.83	-29.9	37.4	33.36	54.0	13.2	H	155	174
12400.000	44.32	-29.5	39.1	34.69	54.0	9.7	H	155	112

8DPSK Ch 0 – Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2386.902	60.91	2.9	32.0	26.04	74.0	13.1	V	155	0
2389.198	60.46	2.9	32.0	25.61	74.0	13.5	H	155	44
4803.750	39.41	-32.9	34.5	37.77	74.0	34.6	V	155	22
7206.000	41.13	-31.6	36.1	36.66	74.0	32.9	H	155	0
9608.250	41.23	-30.0	37.0	34.28	74.0	32.8	H	155	44
12009.750	46.51	-29.8	39.3	37.04	74.0	27.5	V	155	132

8DPSK Ch 39 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2356.640	48.68	-27.7	31.8	44.60	74.0	25.3	H	155	22
2516.670	49.85	-26.6	32.6	43.93	74.0	24.2	V	155	242
4881.750	38.77	-32.7	34.5	36.98	74.0	35.2	H	155	44
7323.000	40.18	-31.9	36.1	36.02	74.0	33.8	V	155	88
9764.250	41.89	-30.6	37.2	35.26	74.0	32.1	V	155	176
12204.750	45.91	-29.4	39.2	36.12	74.0	28.1	V	155	0

8DPSK Ch 78 - Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2491.580	60.99	2.9	32.5	25.52	74.0	13.0	H	155	0
2498.930	61.47	2.9	32.3	26.20	74.0	12.5	V	155	22
4959.750	40.34	-33.4	34.5	39.21	74.0	33.7	V	155	352
7440.000	40.67	-31.8	36.0	36.41	74.0	33.3	V	155	352
9920.250	43.09	-29.9	37.4	35.62	74.0	30.9	V	155	176
12399.750	45.98	-29.5	39.1	36.36	74.0	28.0	V	155	110

Conclusion: PASS

Test graphs as below for Set.10:

RE - Power-2.38GHz-2.45GHz

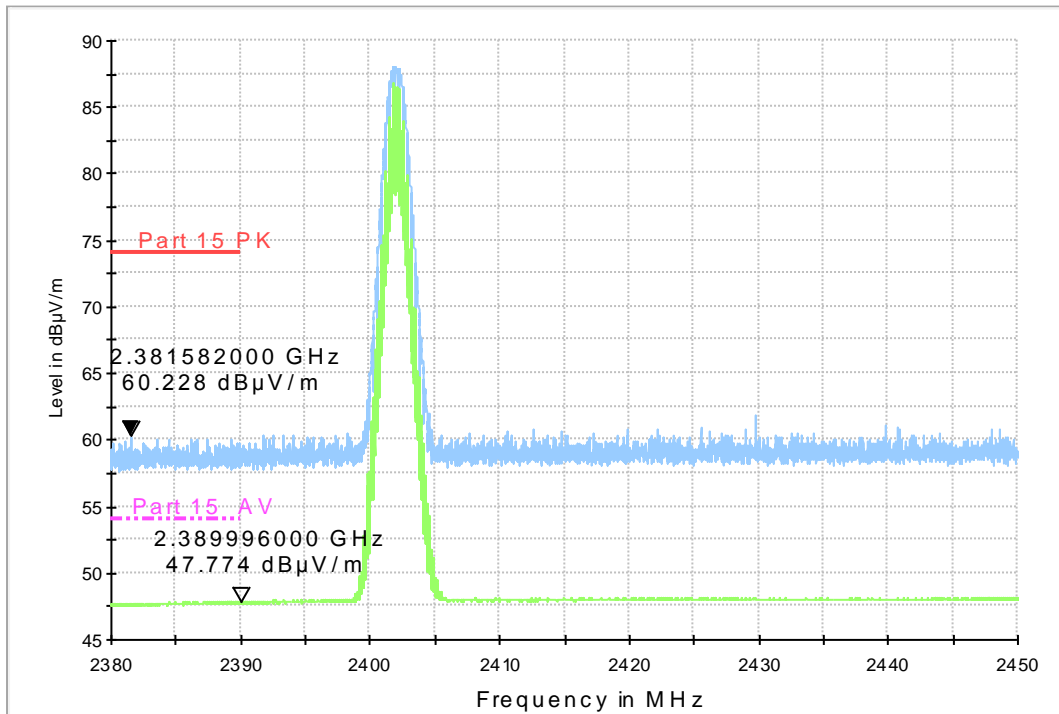


Fig.58. Radiated emission (Power): GFSK, low channel

RE - Power-2.45GHz-2.5GHz

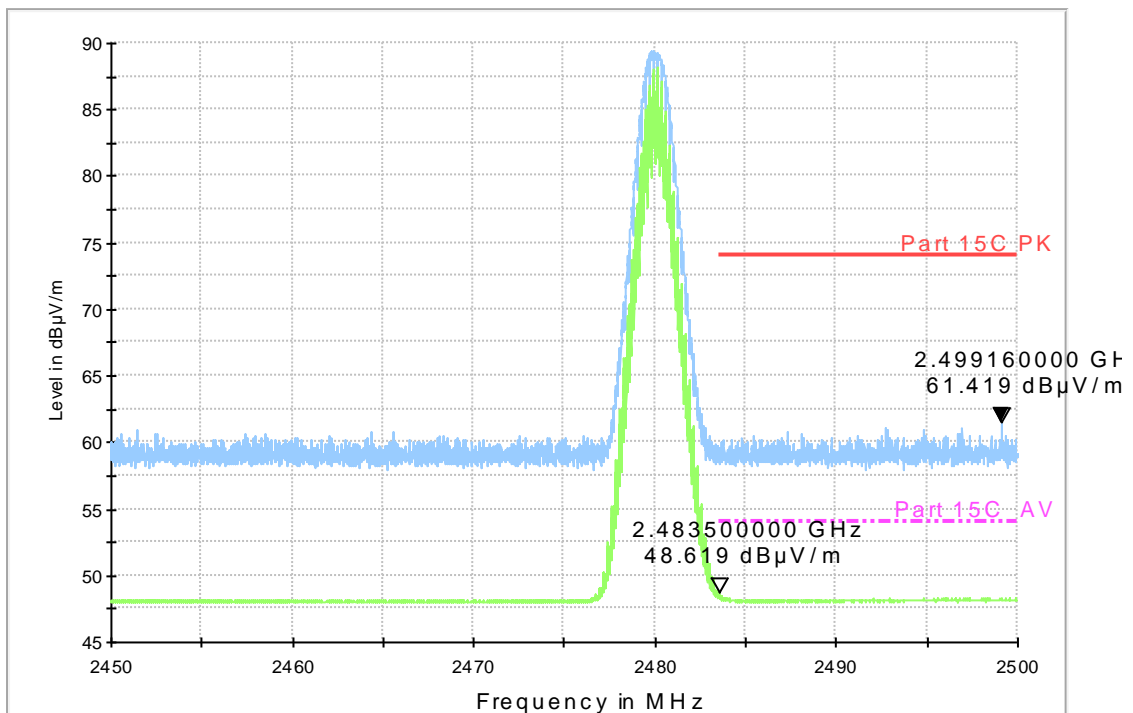


Fig.59. Radiated emission (Power) GFSK, high channel

RE - Power-2.38GHz-2.45GHz

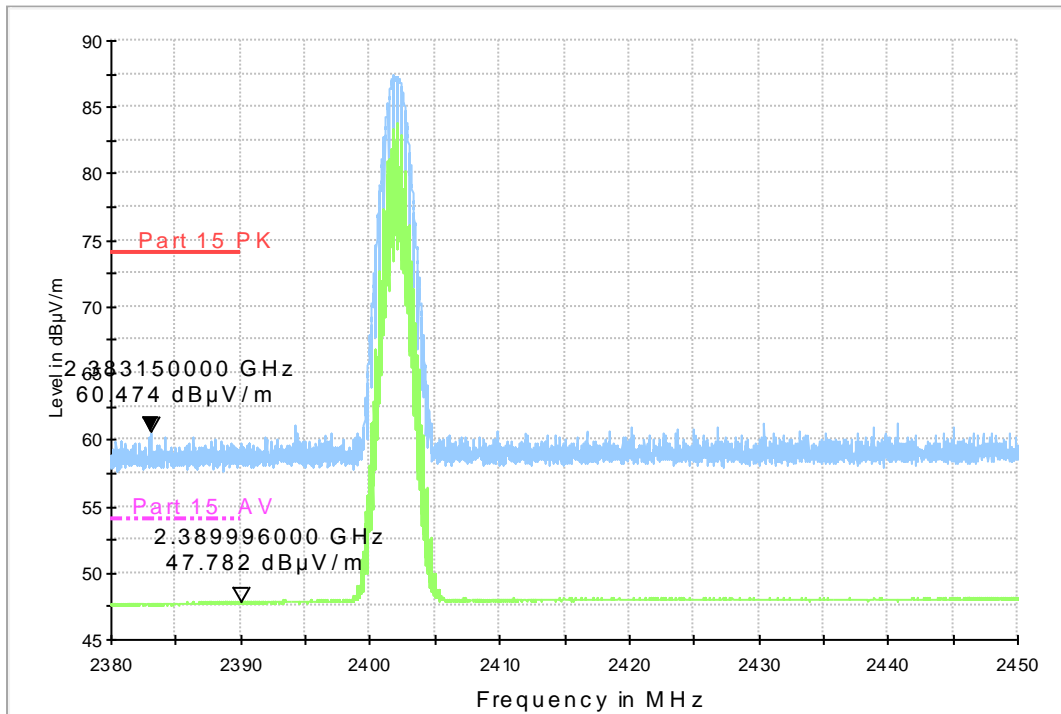


Fig.60. Radiated emission (Power): $\pi/4$ DQPSK, low channel

RE - Power-2.45GHz-2.5GHz

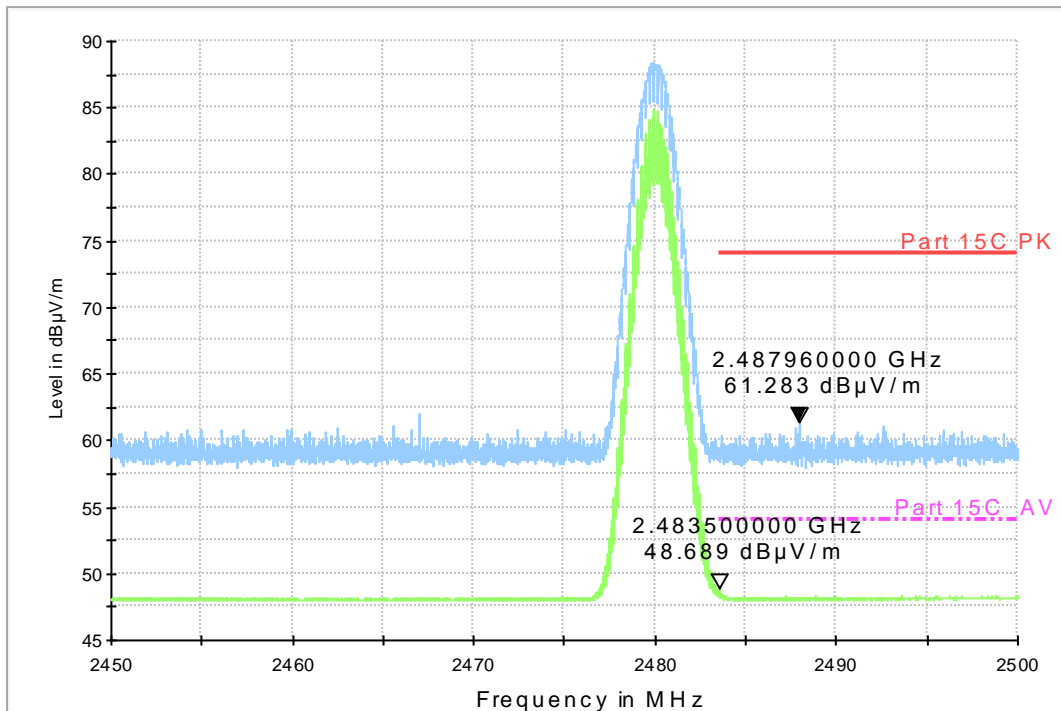


Fig.61. Radiated emission (Power): $\pi/4$ DQPSK, high channel

RE - Power-2.38GHz-2.45GHz

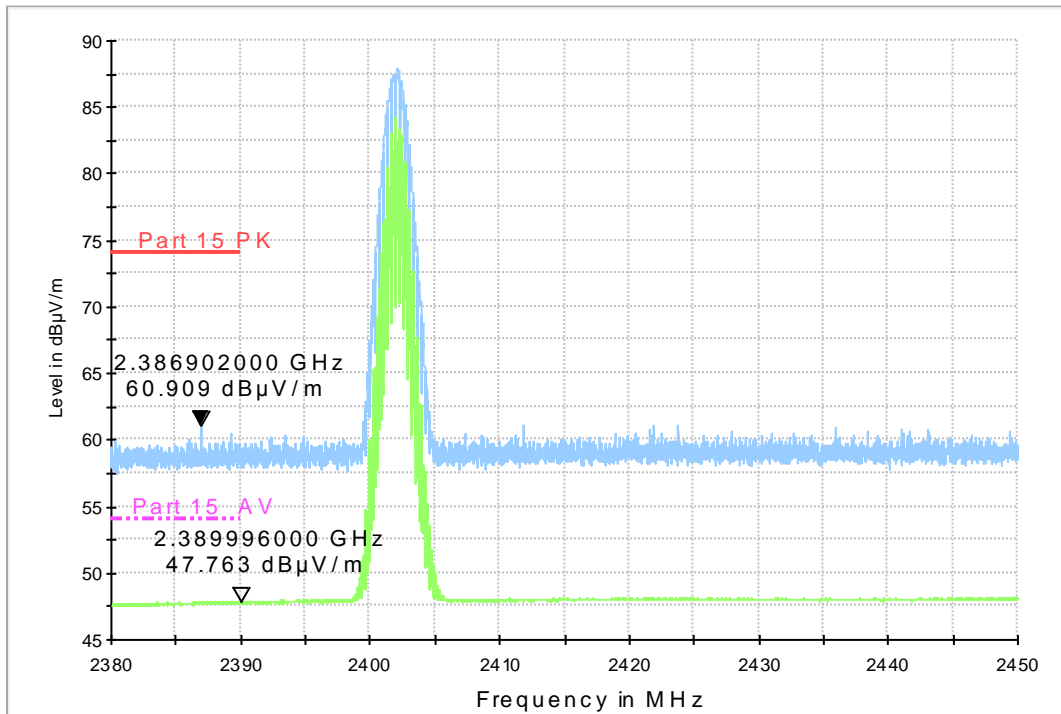


Fig.62. Radiated emission (Power): 8DPSK, low channel

RE - Power-2.45GHz-2.5GHz

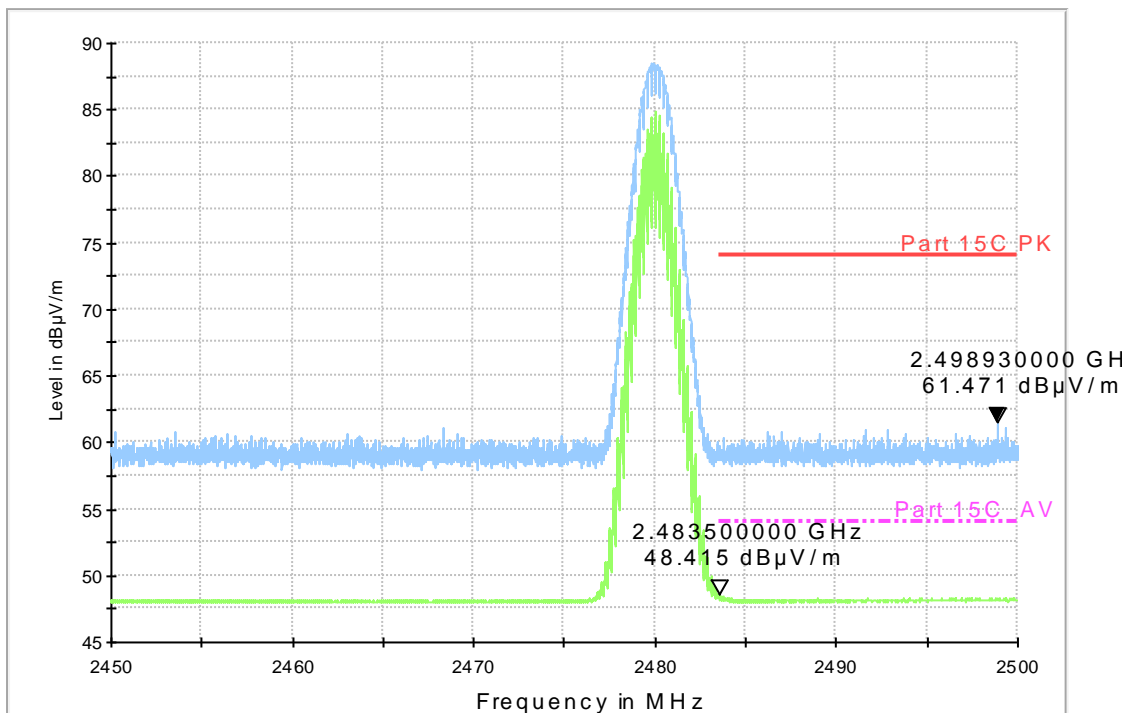


Fig.63. Radiated emission (Power): 8DPSK, high channel

A.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.64	118.01	P
		Fig.65		
	DH3	Fig.66	162.61	P
		Fig.67		
	DH5	Fig.68	169.57	P
		Fig.69		

For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.70	120.70	P
		Fig.71		
	DH3	Fig.72	184.10	P
		Fig.73		
	DH5	Fig.74	184.13	P
		Fig.75		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.76	120.37	P
		Fig.77		
	DH3	Fig.78	166.11	P

		Fig.79		
	DH5	Fig.80	175.65	P
		Fig.81		

Conclusion: PASS

Test graphs as below:

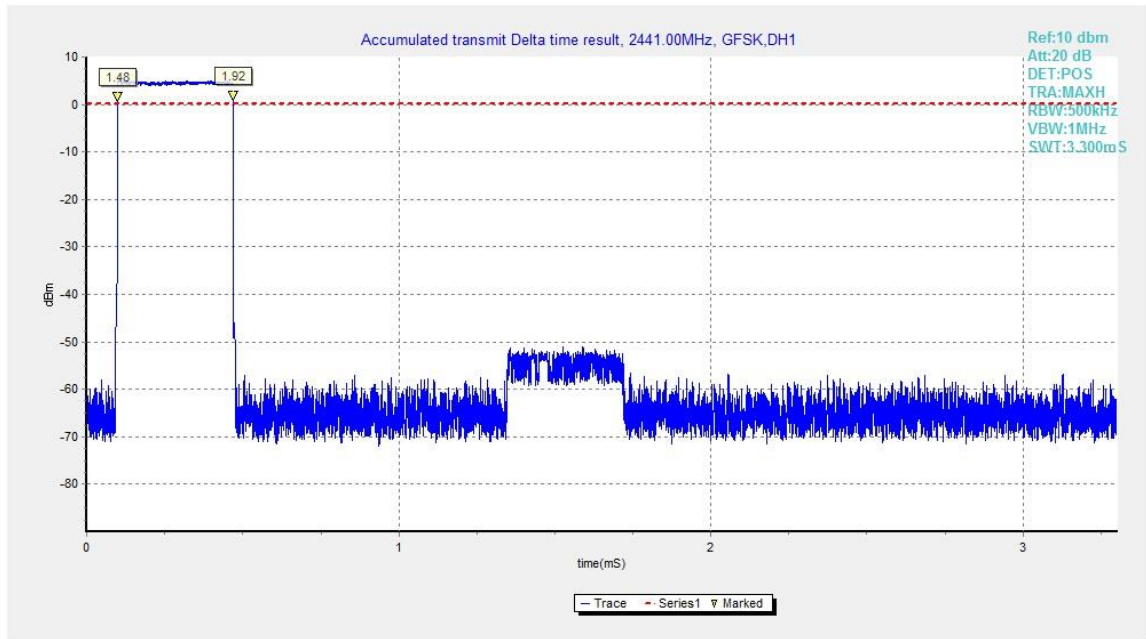


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

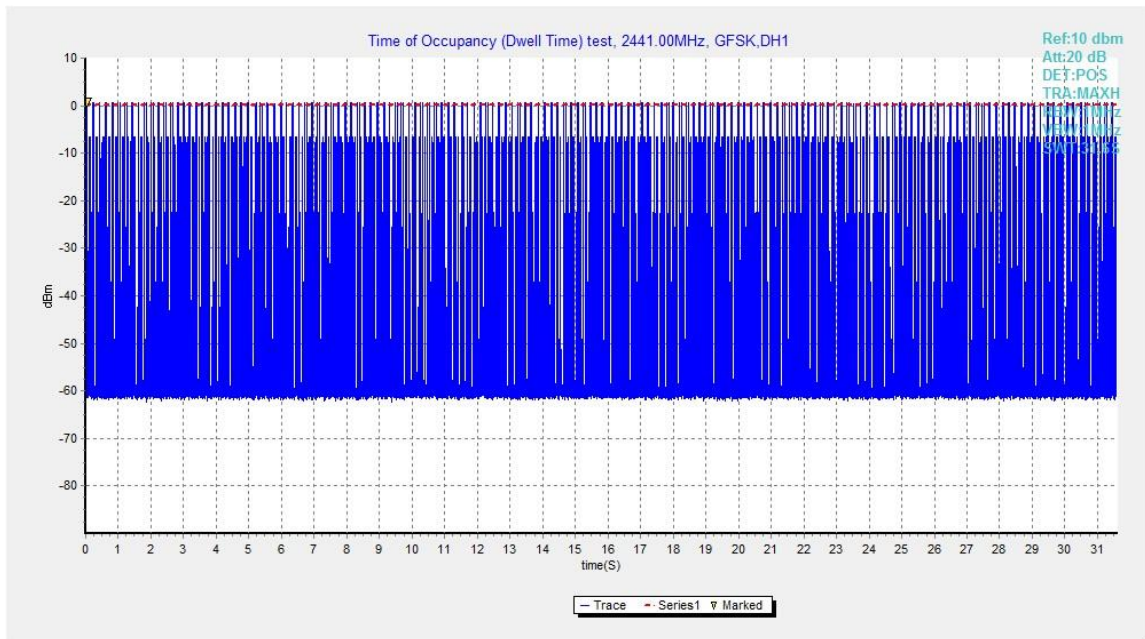


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

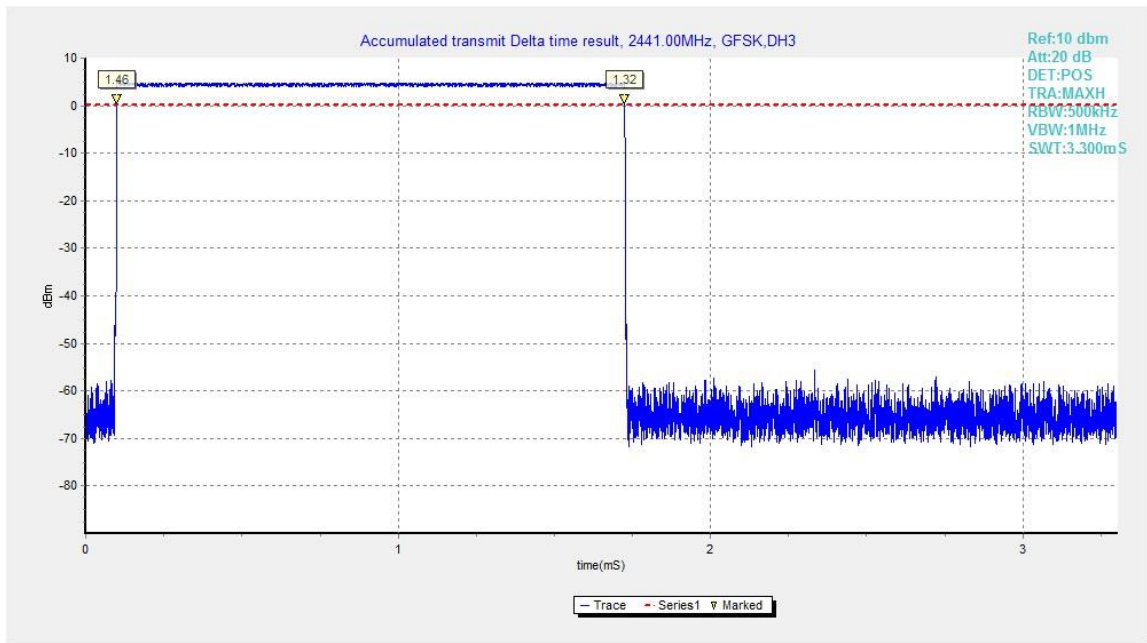


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

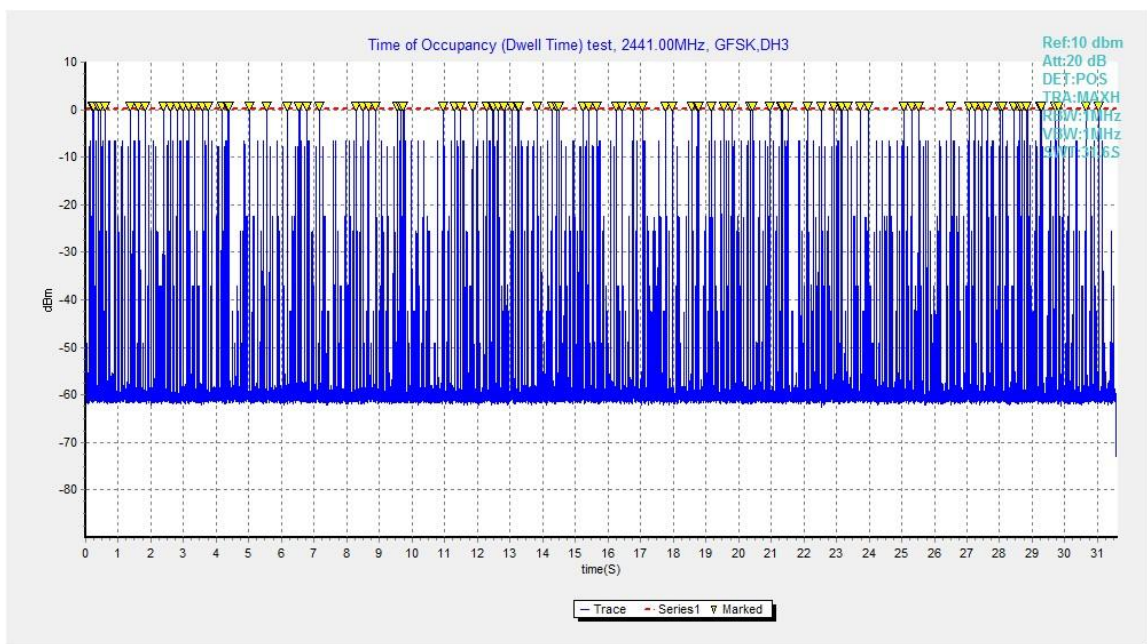


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3



Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

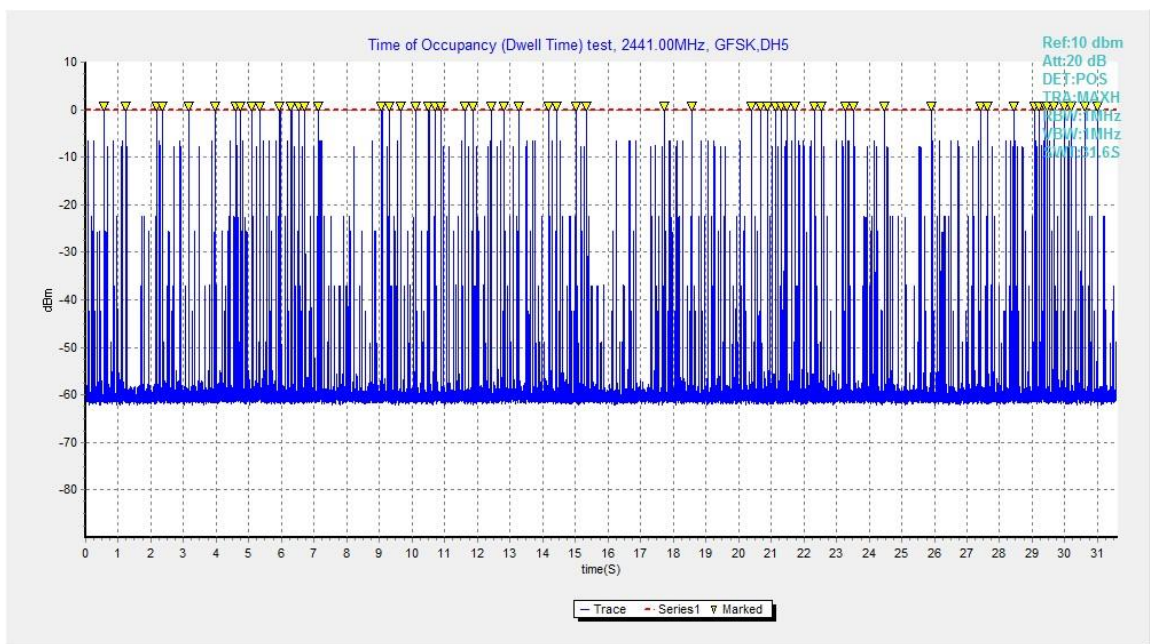


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

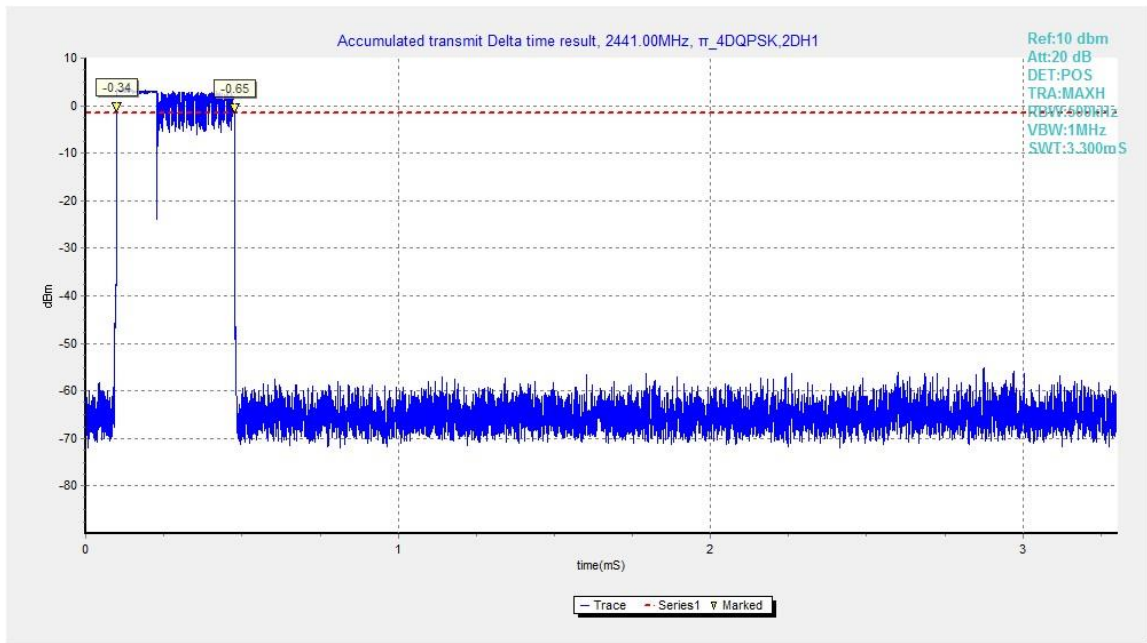


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

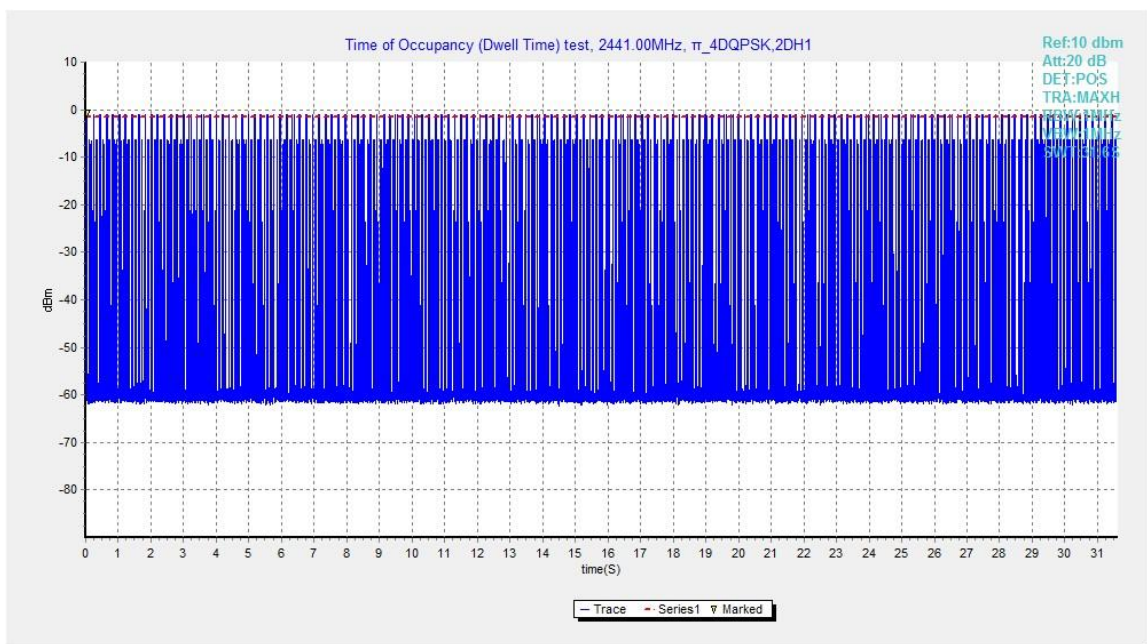


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

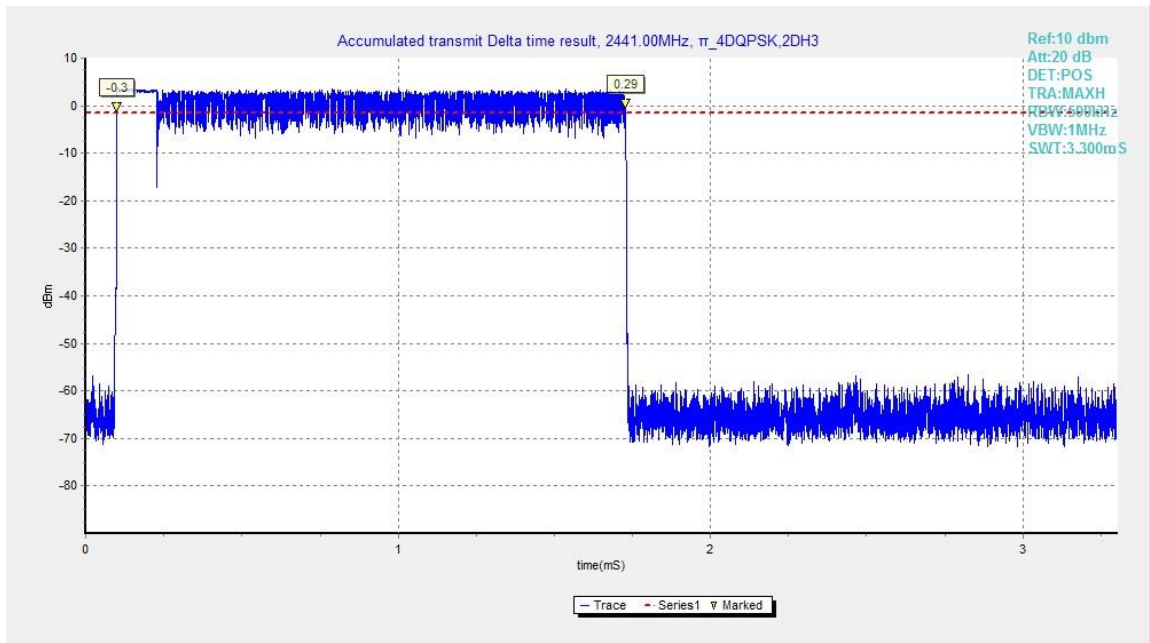


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

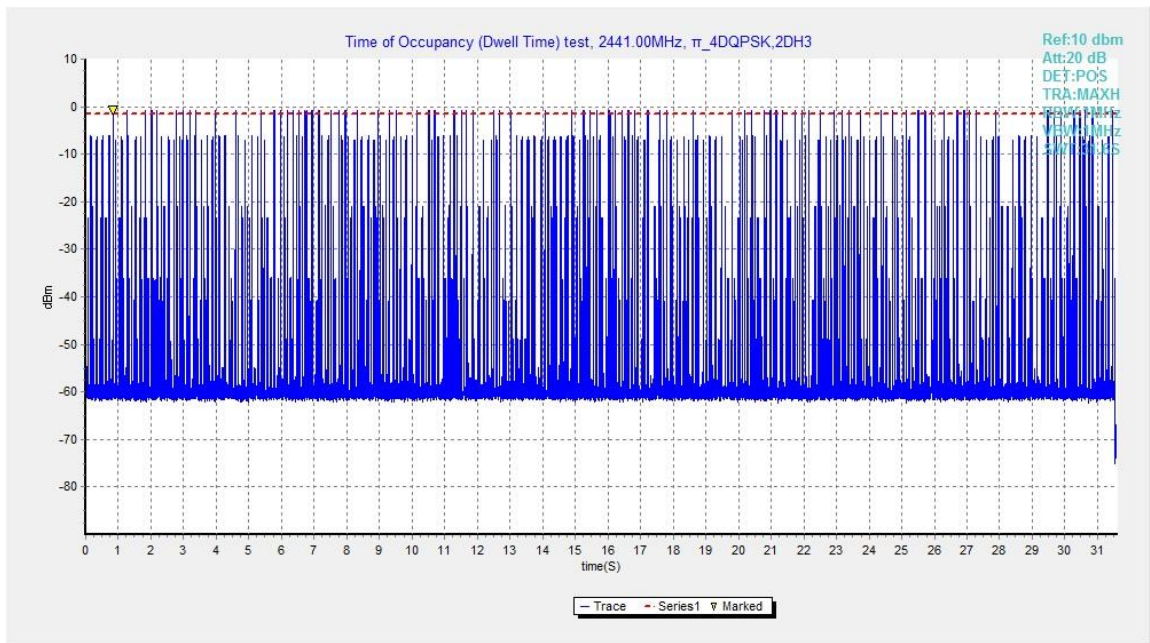


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

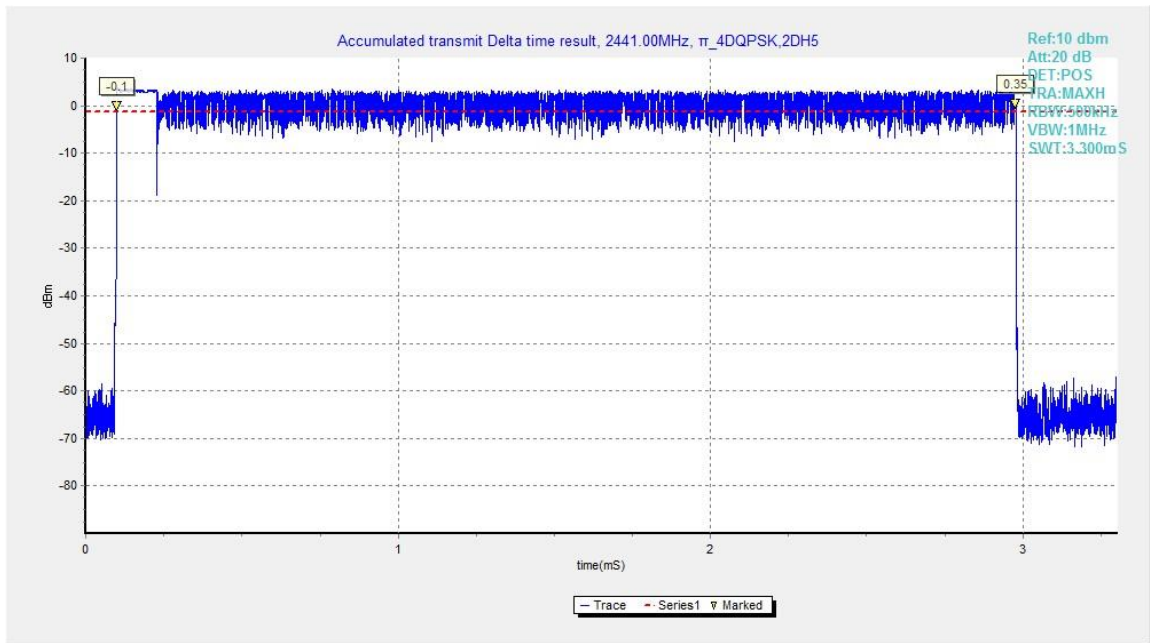


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

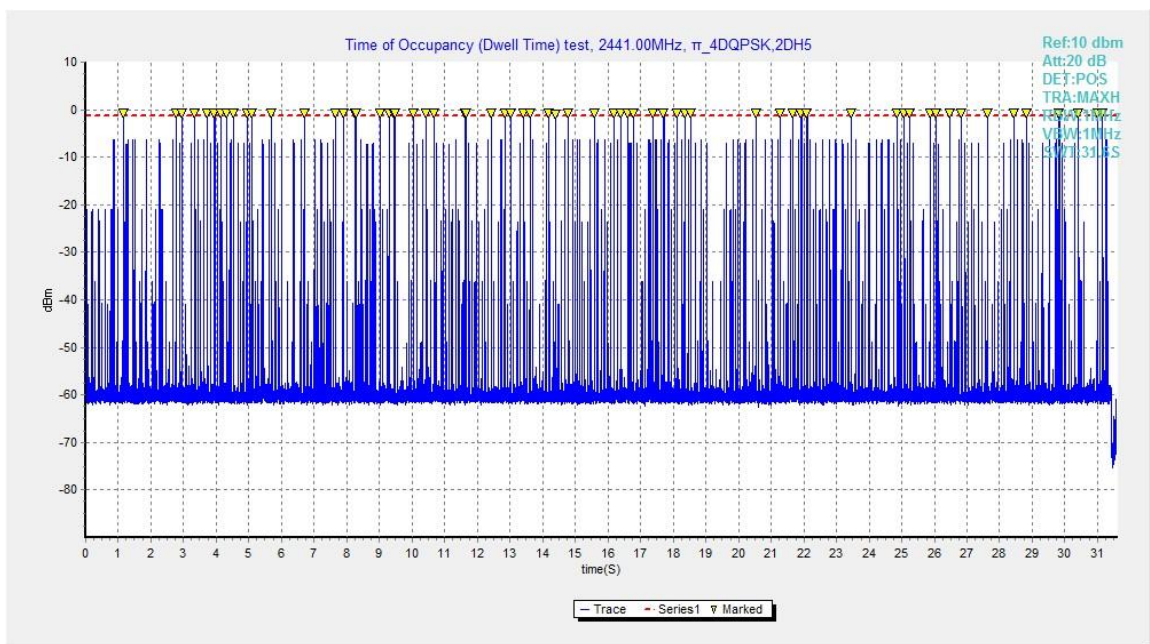


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

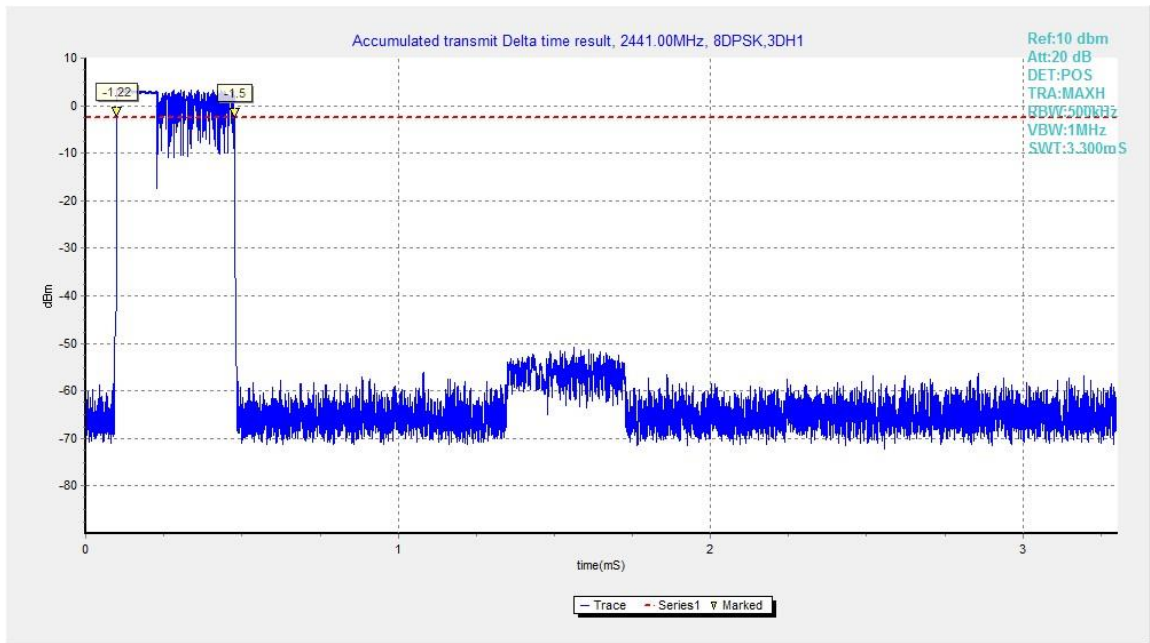


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

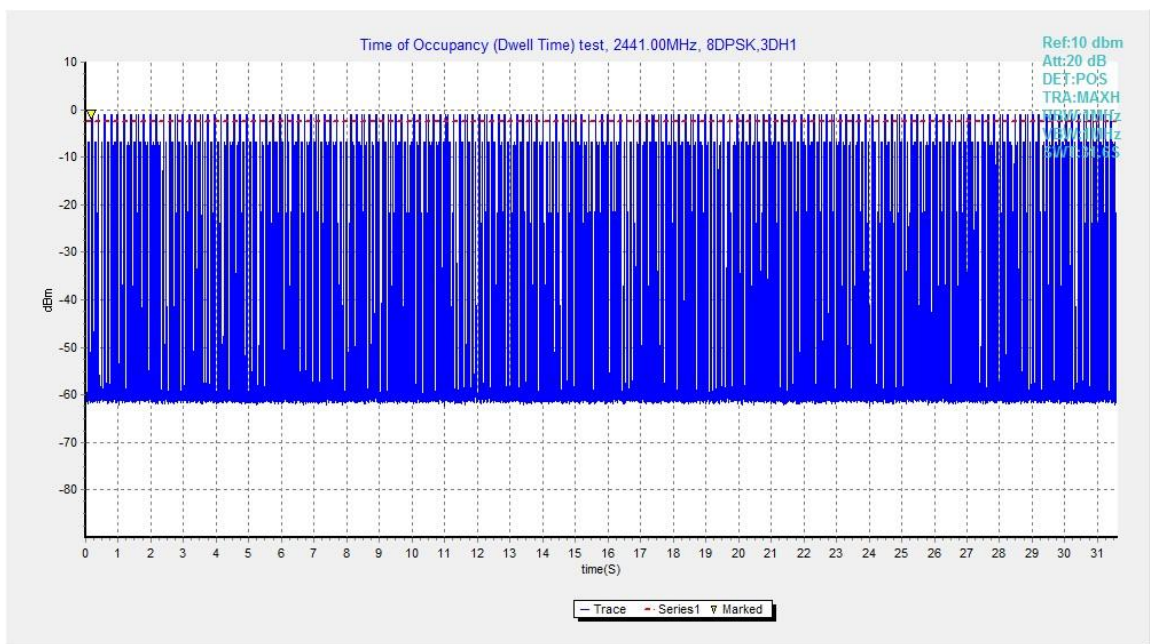


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

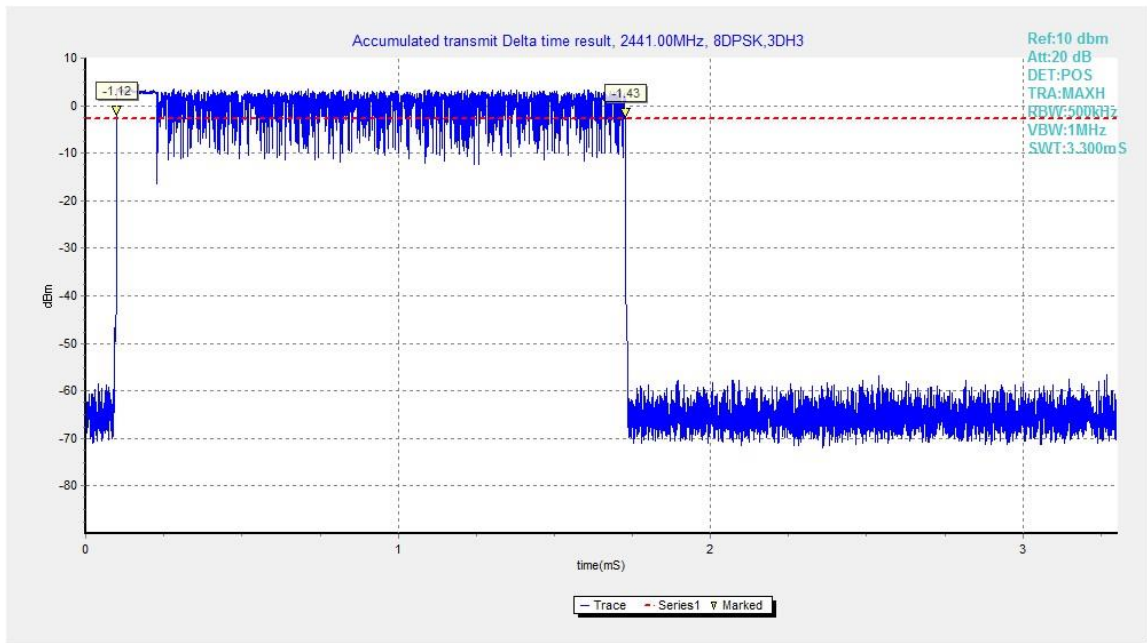


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

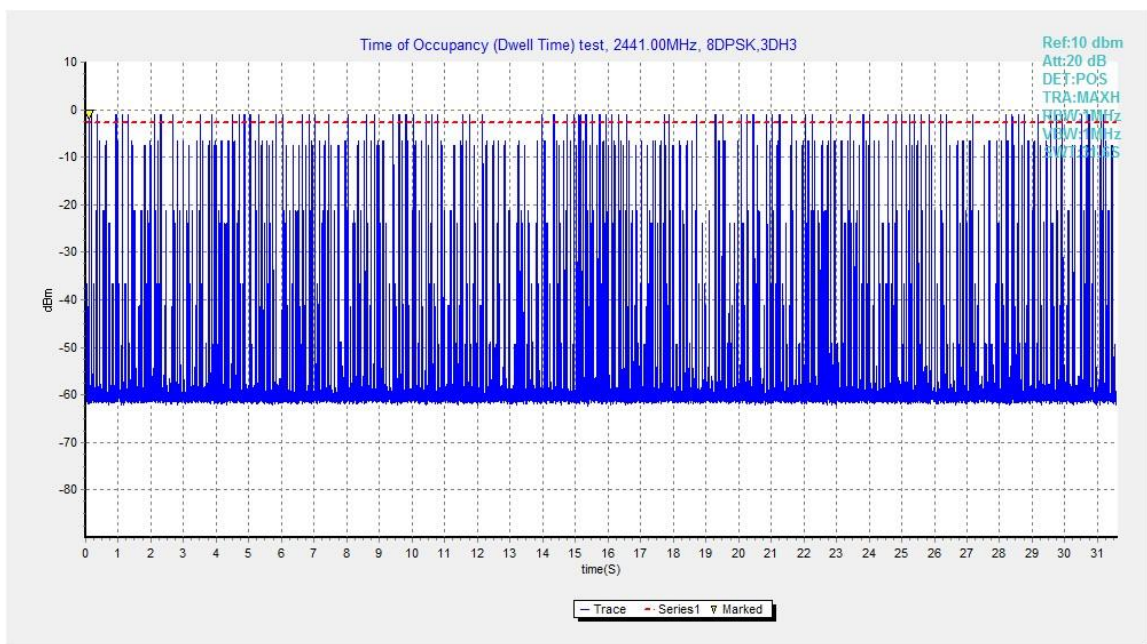


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

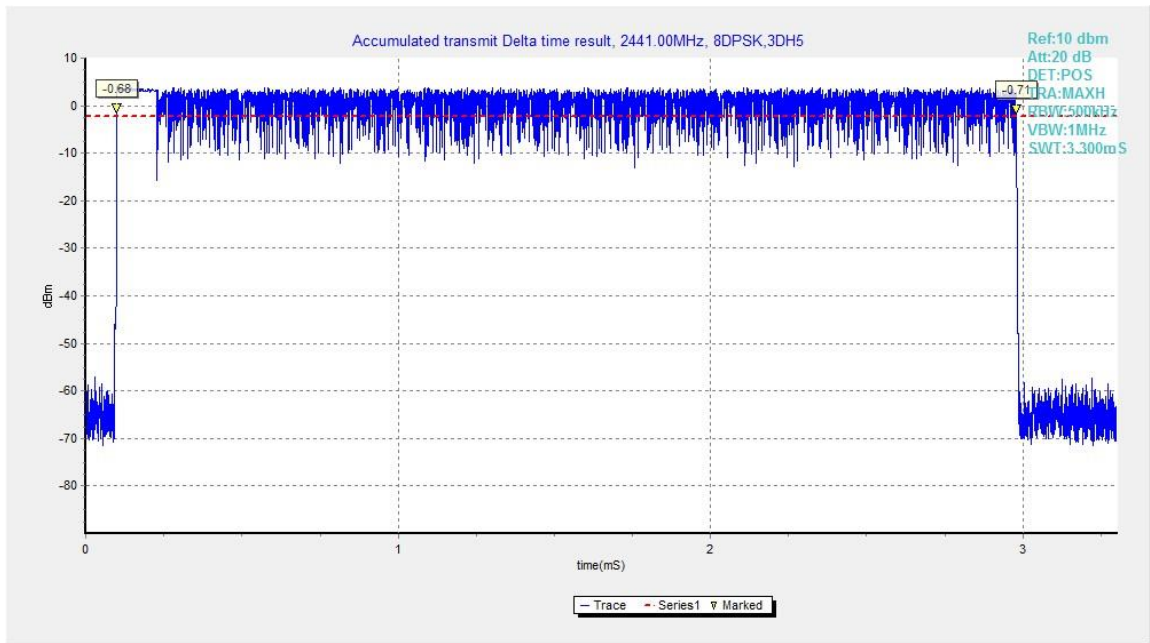


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

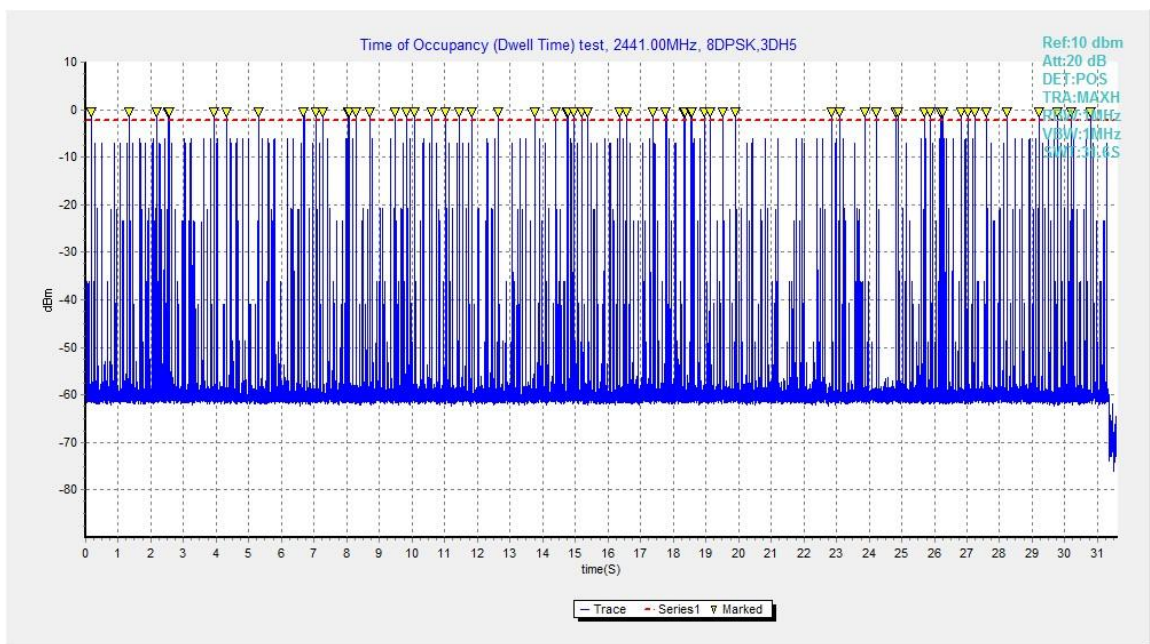


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5



A.7. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	944.25	NA
39	Fig.83	951.00	NA
78	Fig.84	945.75	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1268.25	NA
39	Fig.86	1268.25	NA
78	Fig.87	1291.50	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1289.25	NA
39	Fig.89	1286.25	NA
78	Fig.90	1290.75	NA

Conclusion: NA

Test graphs as below:

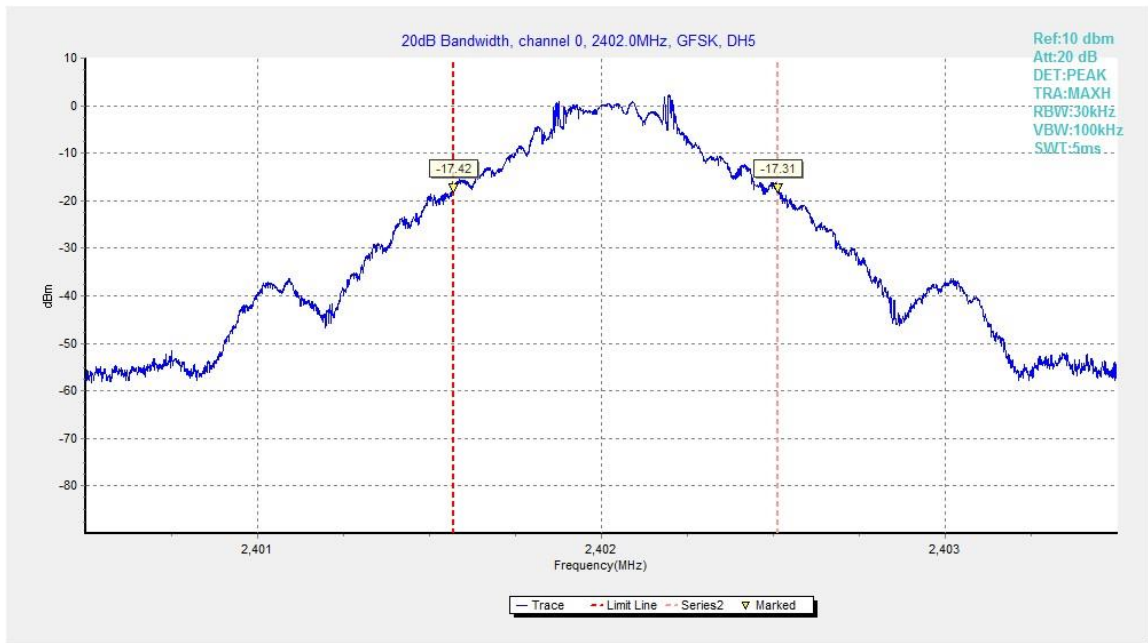


Fig.82. 20dB Bandwidth: GFSK, Channel 0

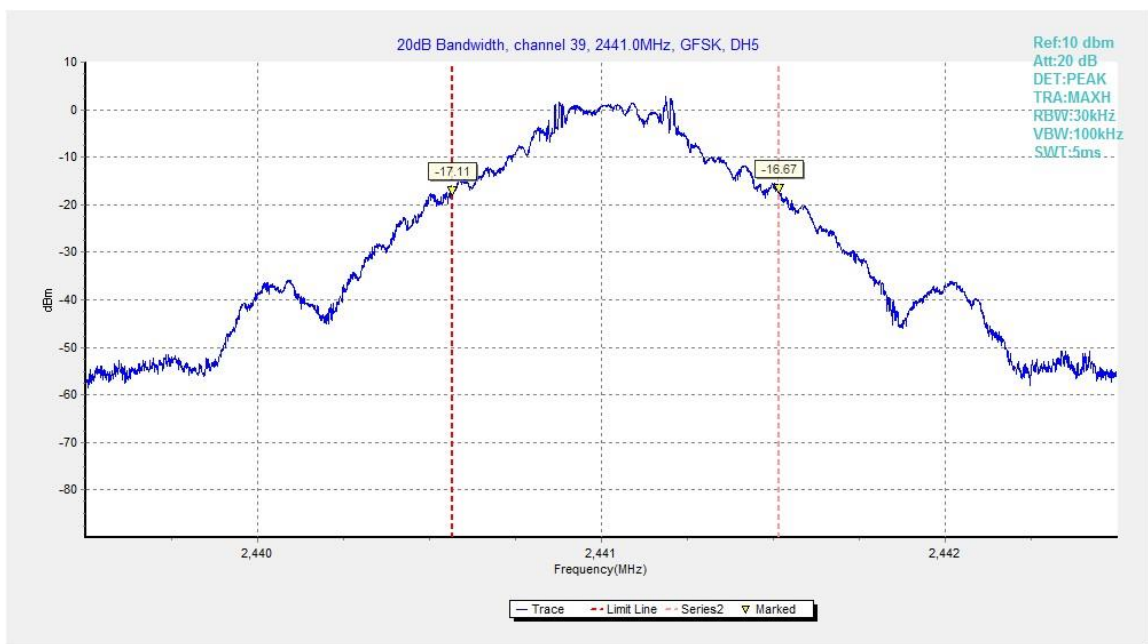


Fig.83. 20dB Bandwidth: GFSK, Channel 39

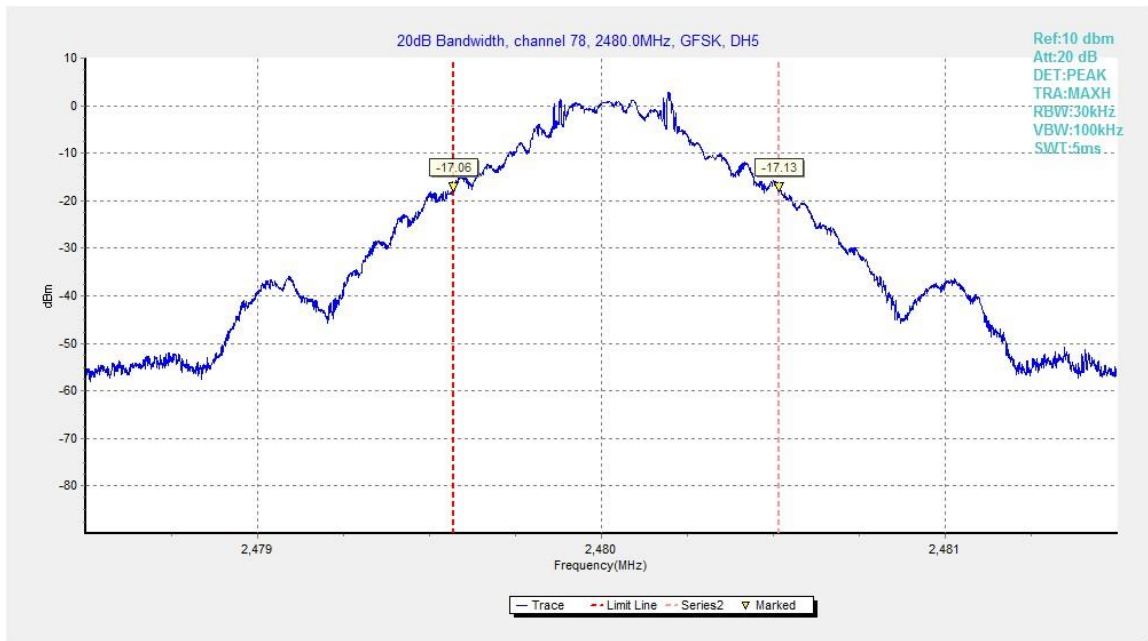


Fig.84. 20dB Bandwidth: GFSK, Channel 78

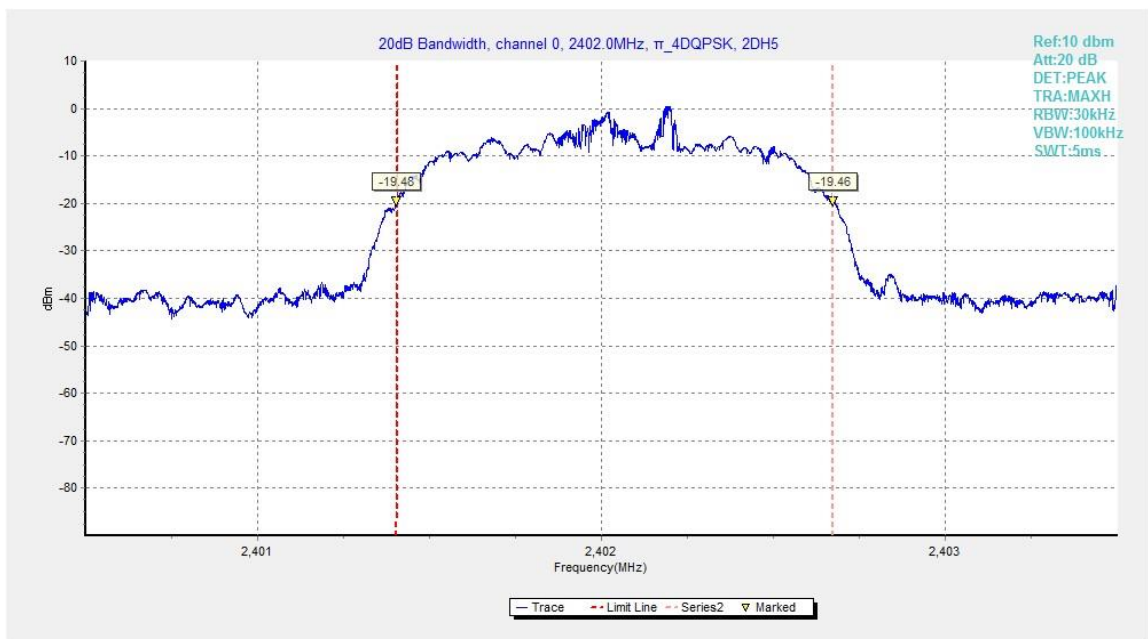


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

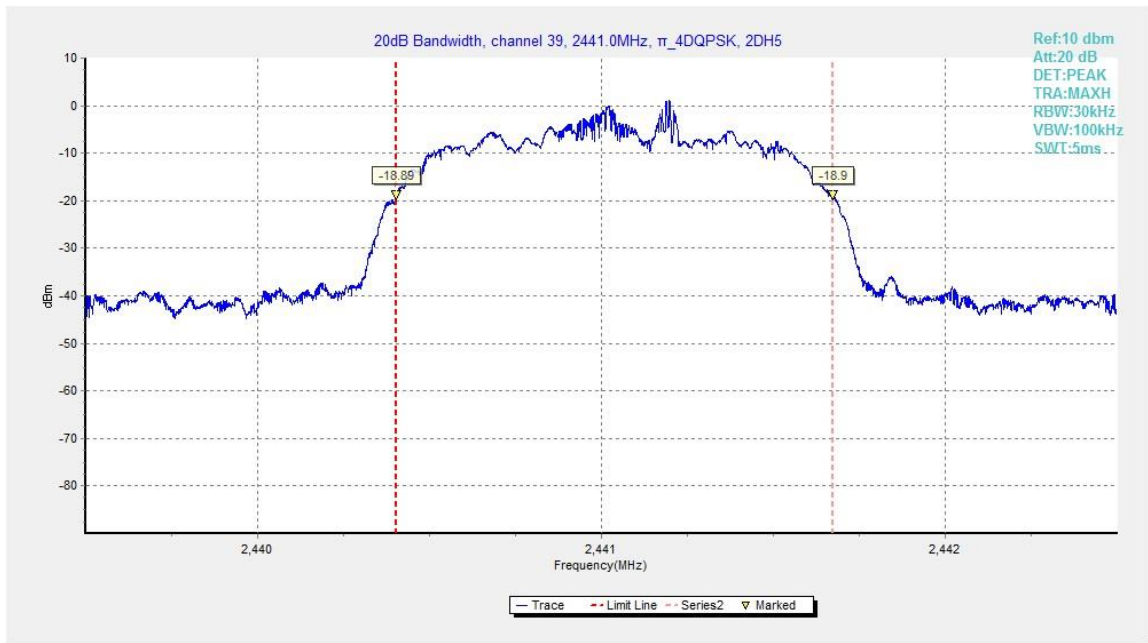


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

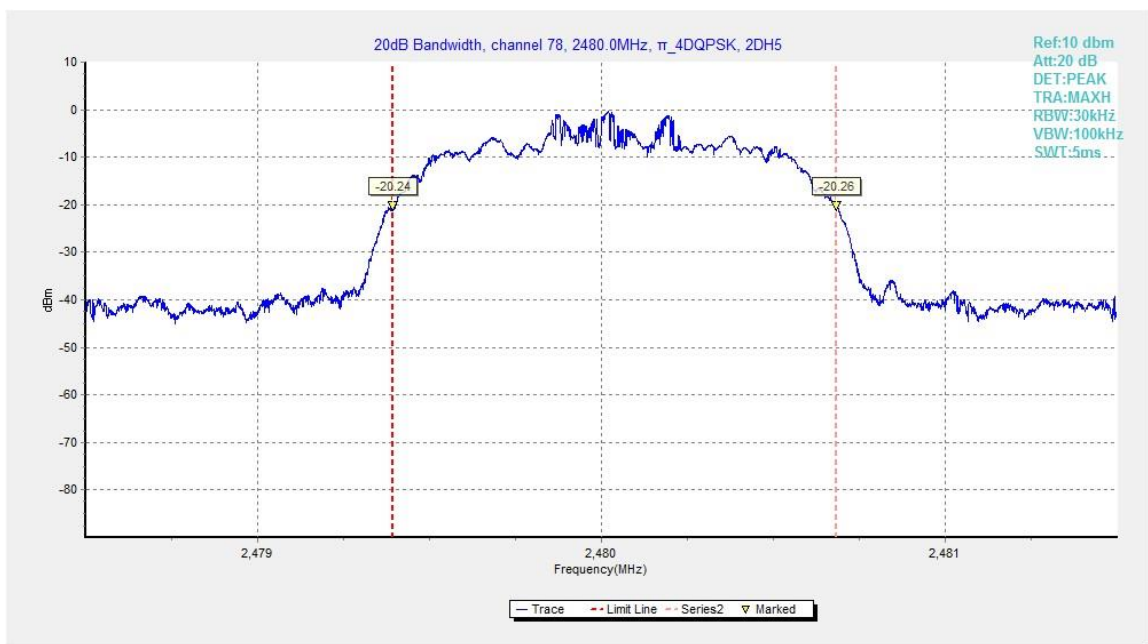


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

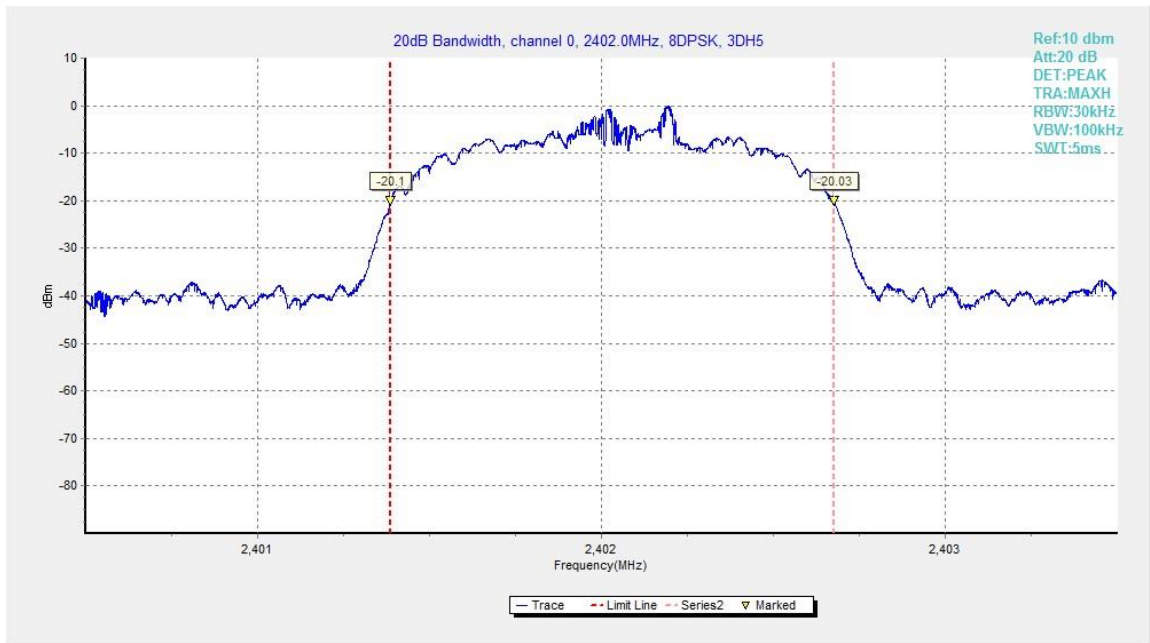


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

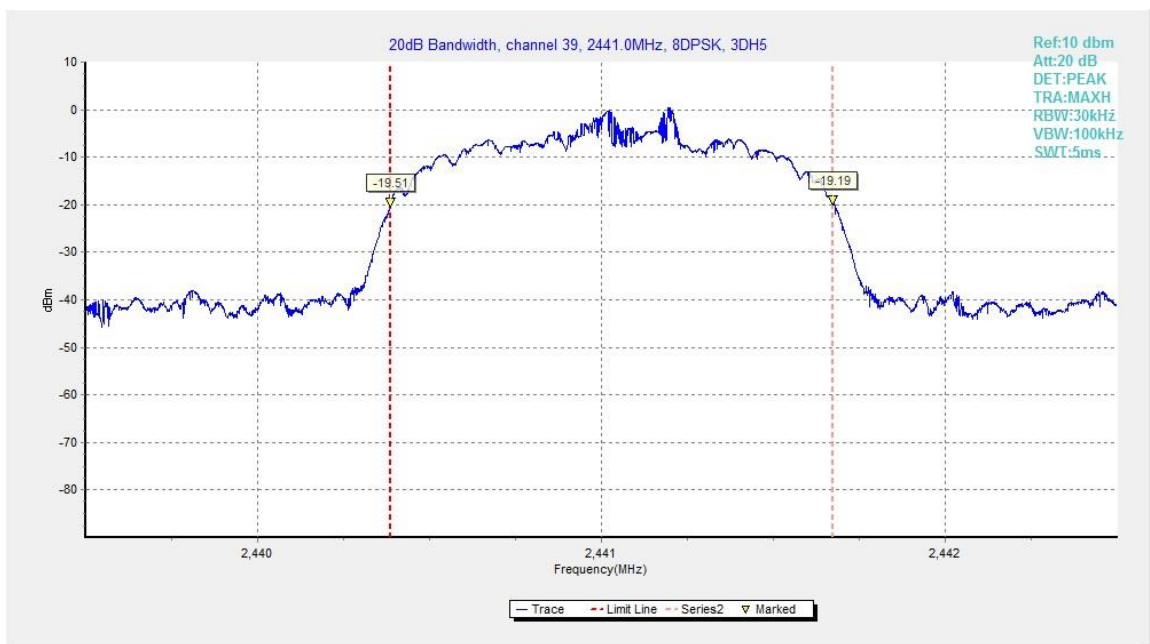


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

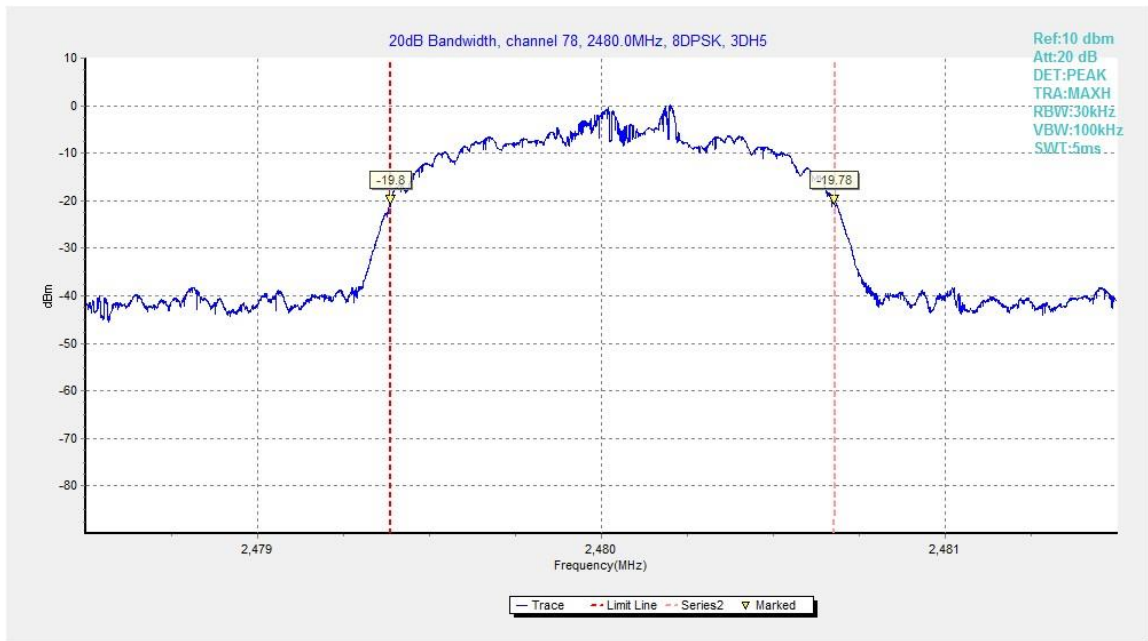


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

A.8. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.91	997.50	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.92	999.75	P

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.93	962.25	P

Conclusion: PASS

Test graphs as below:

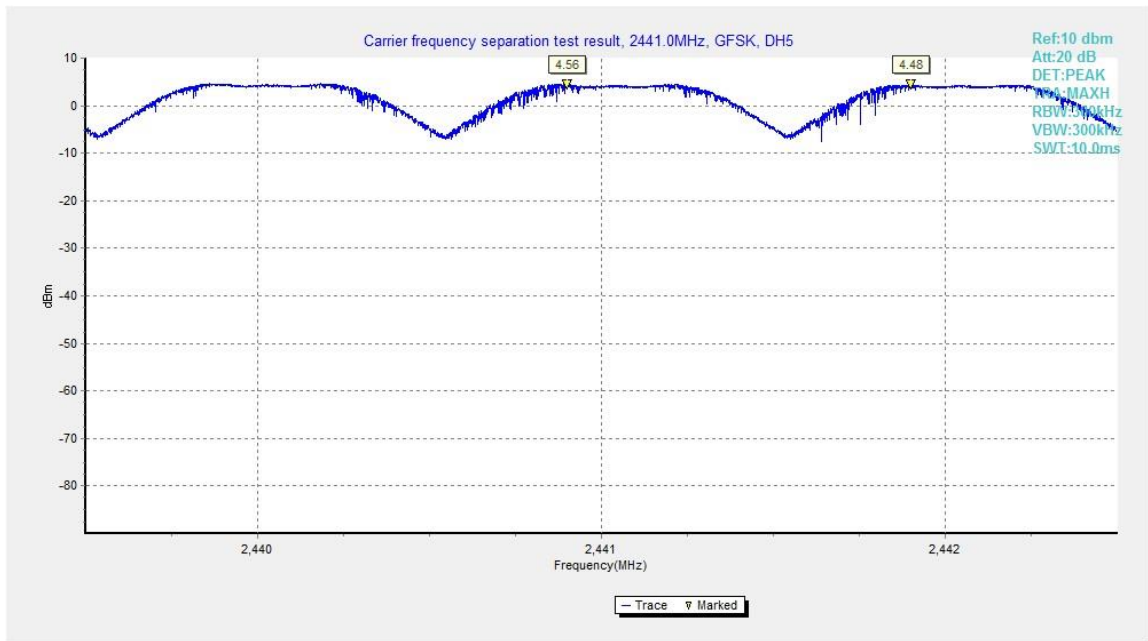


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

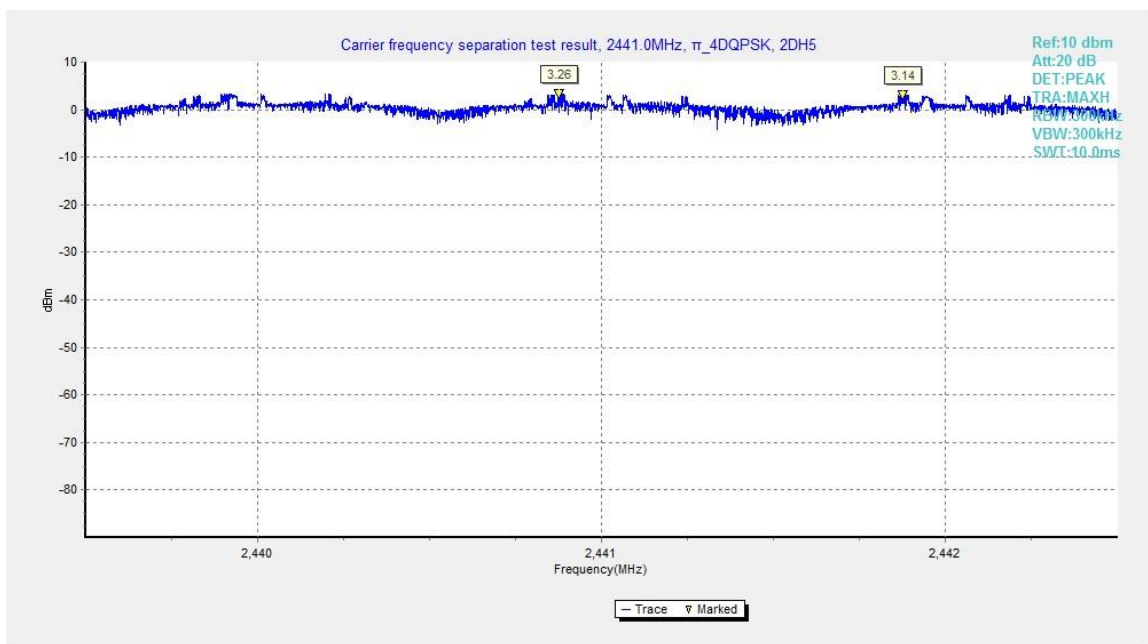


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

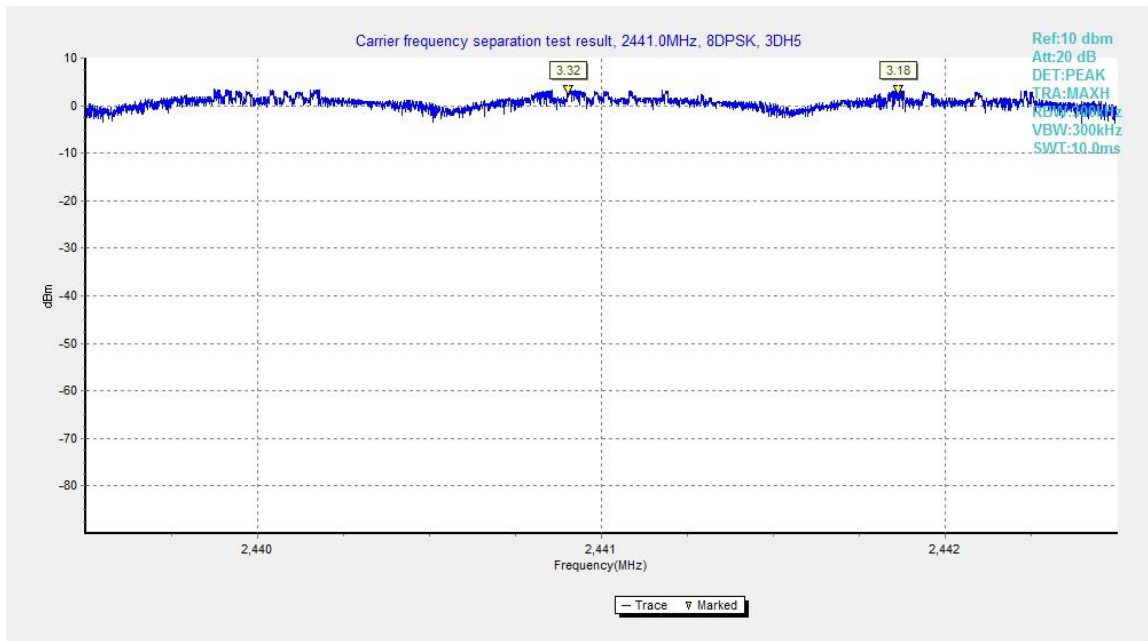


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

A.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	79 P
40~78	Fig.95	

For $\pi/4$ DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	79 P
40~78	Fig.97	

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	79 P
40~78	Fig.99	

Conclusion: PASS

Test graphs as below:

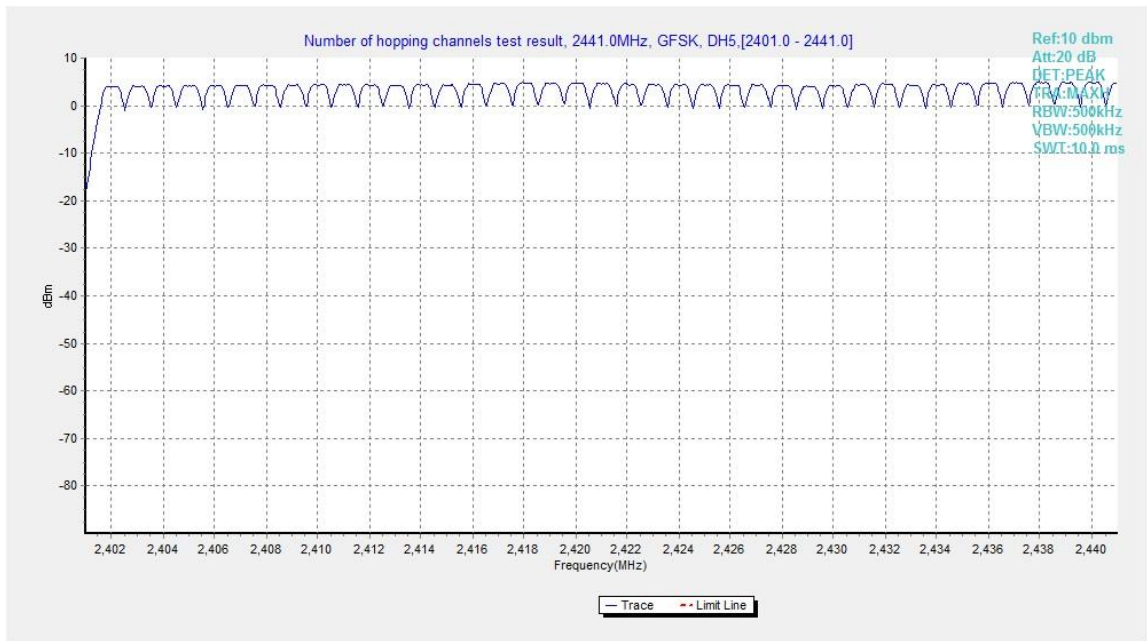


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39



Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

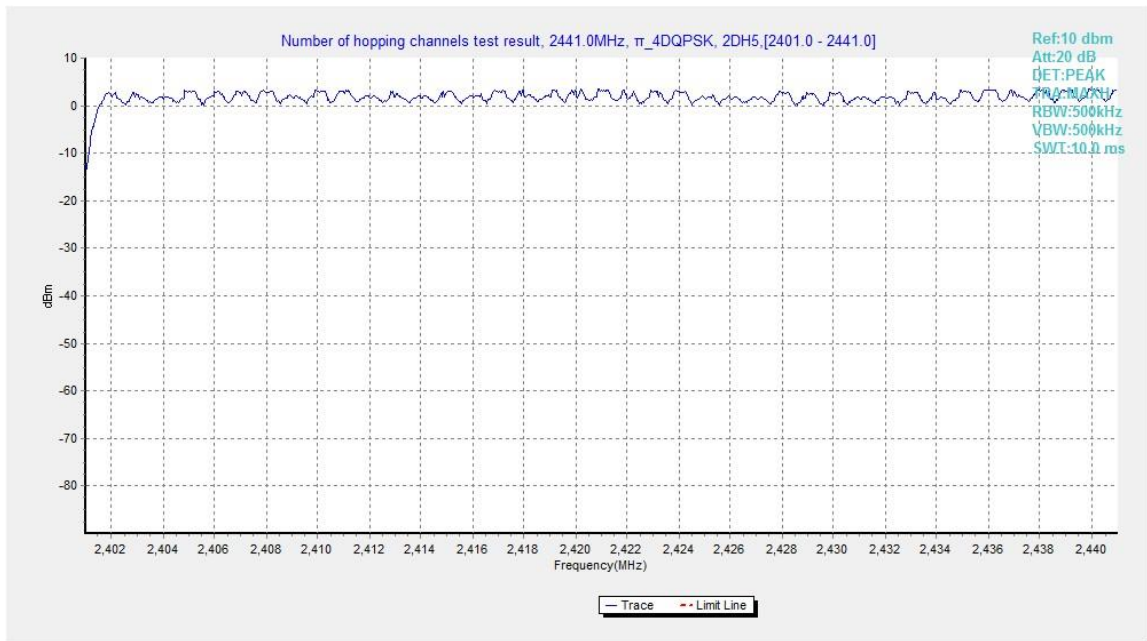


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

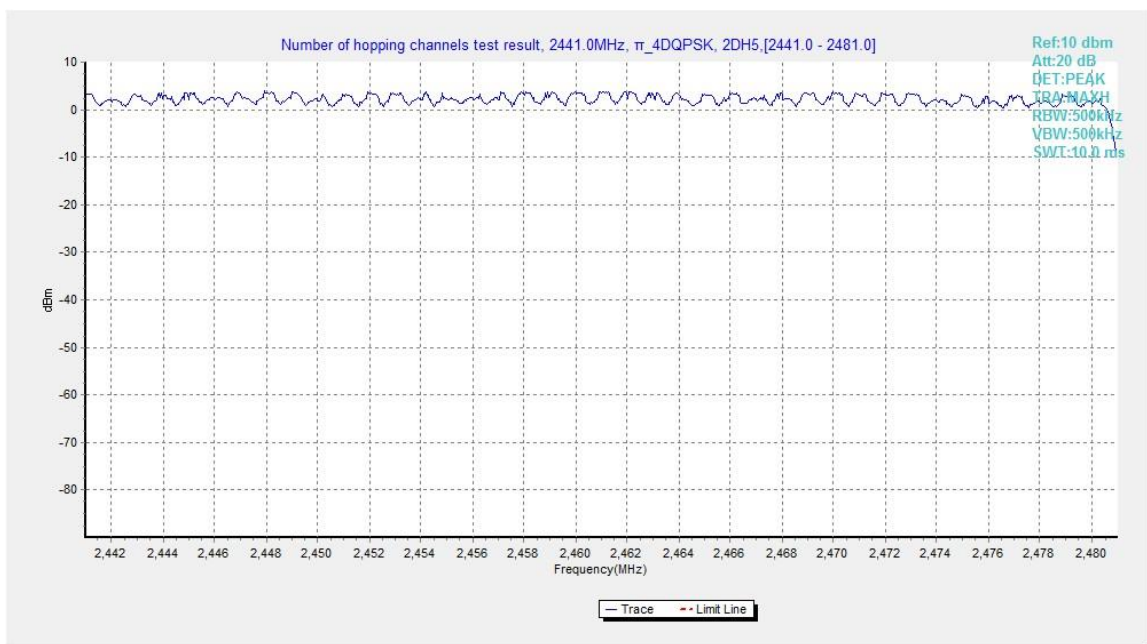


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

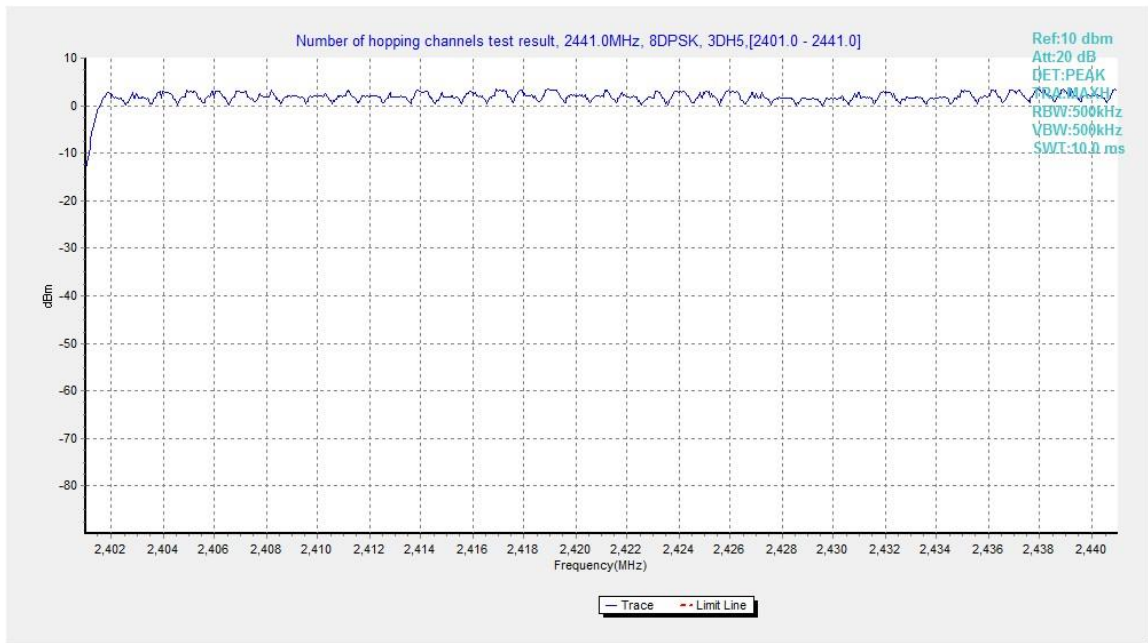


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

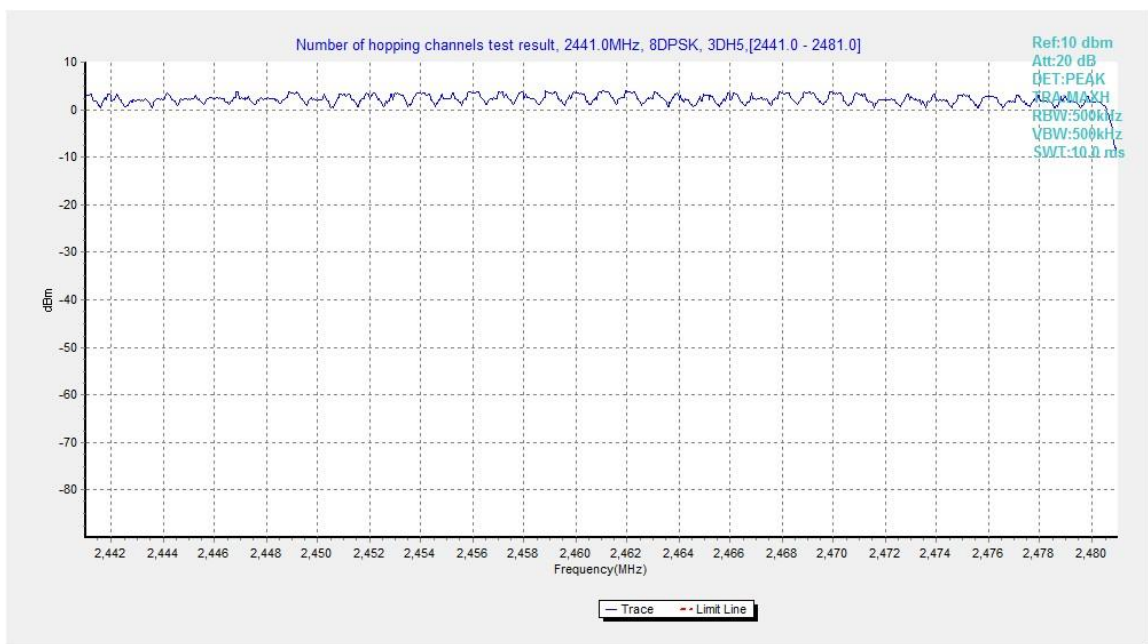


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

A.10. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		



Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Set.10 Traffic:

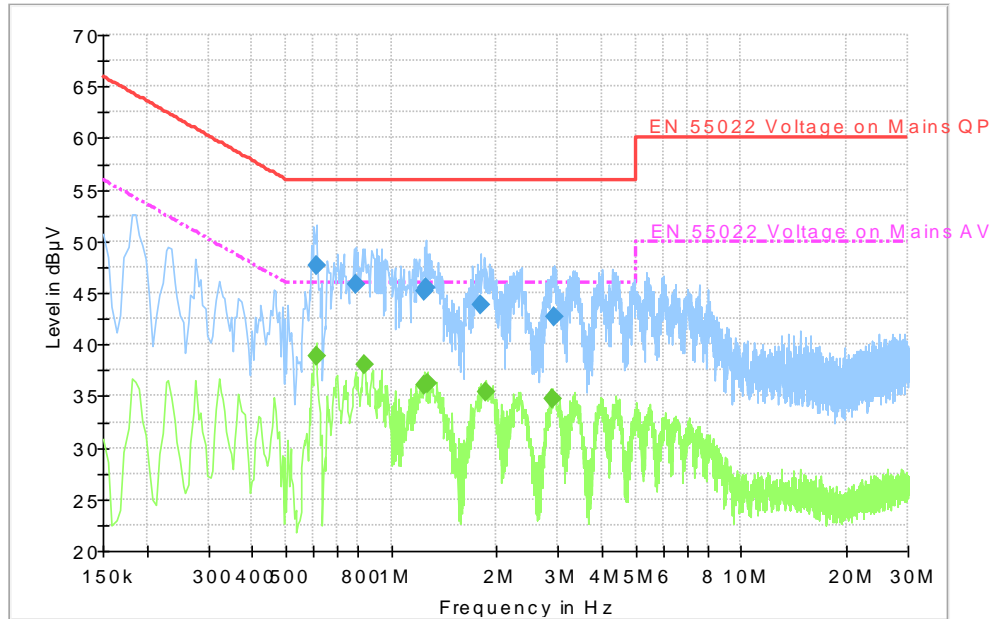


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.609000	47.6	2000.0	9.000	L1	10.2	8.4	56.0
0.789000	45.8	2000.0	9.000	L1	10.2	10.2	56.0
1.248000	45.1	2000.0	9.000	L1	10.2	10.9	56.0
1.257000	45.5	2000.0	9.000	L1	10.2	10.5	56.0
1.806000	43.8	2000.0	9.000	L1	10.2	12.2	56.0
2.922000	42.7	2000.0	9.000	L1	10.3	13.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.609000	38.9	2000.0	9.000	L1	10.2	7.1	46.0
0.834000	38.0	2000.0	9.000	L1	10.2	8.0	46.0
1.248000	36.0	2000.0	9.000	L1	10.2	10.0	46.0
1.266000	36.2	2000.0	9.000	L1	10.2	9.8	46.0
1.855500	35.5	2000.0	9.000	L1	10.2	10.5	46.0
2.899500	34.7	2000.0	9.000	L1	10.3	11.3	46.0

Set.10 Idle:

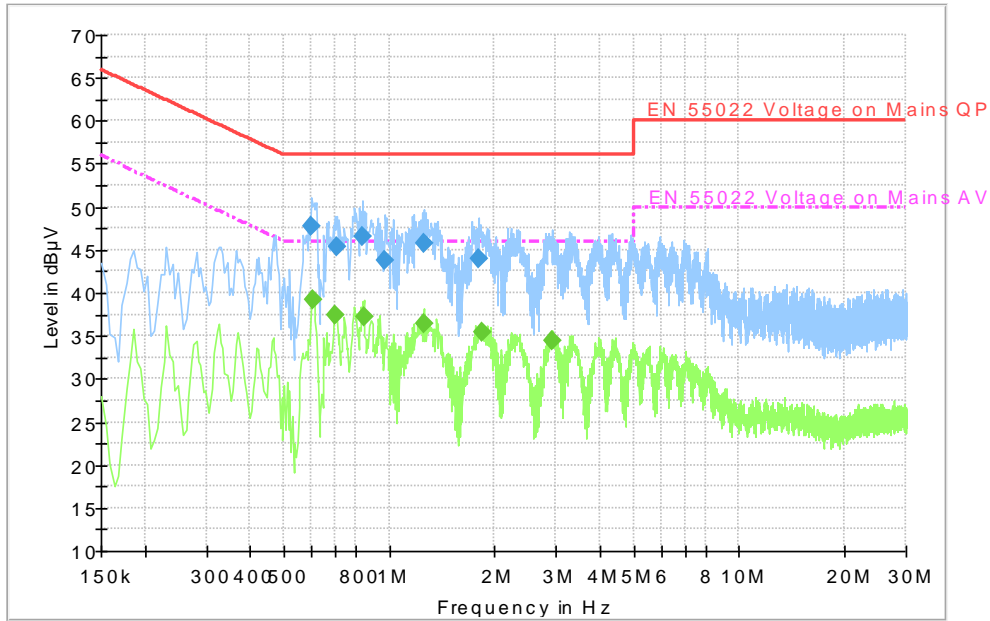


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.600000	47.8	2000.0	9.000	L1	10.2	8.2	56.0
0.708000	45.3	2000.0	9.000	L1	10.2	10.7	56.0
0.838500	46.5	2000.0	9.000	L1	10.2	9.5	56.0
0.973500	43.8	2000.0	9.000	L1	10.2	12.2	56.0
1.252500	45.7	2000.0	9.000	L1	10.2	10.3	56.0
1.801500	44.0	2000.0	9.000	L1	10.2	12.0	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.604500	39.2	2000.0	9.000	L1	10.2	6.8	46.0
0.699000	37.4	2000.0	9.000	L1	10.2	8.6	46.0
0.847500	37.3	2000.0	9.000	L1	10.2	8.7	46.0
1.252500	36.4	2000.0	9.000	L1	10.2	9.6	46.0
1.851000	35.5	2000.0	9.000	L1	10.2	10.5	46.0
2.926500	34.4	2000.0	9.000	L1	10.3	11.6	46.0

Set.11 Traffic:

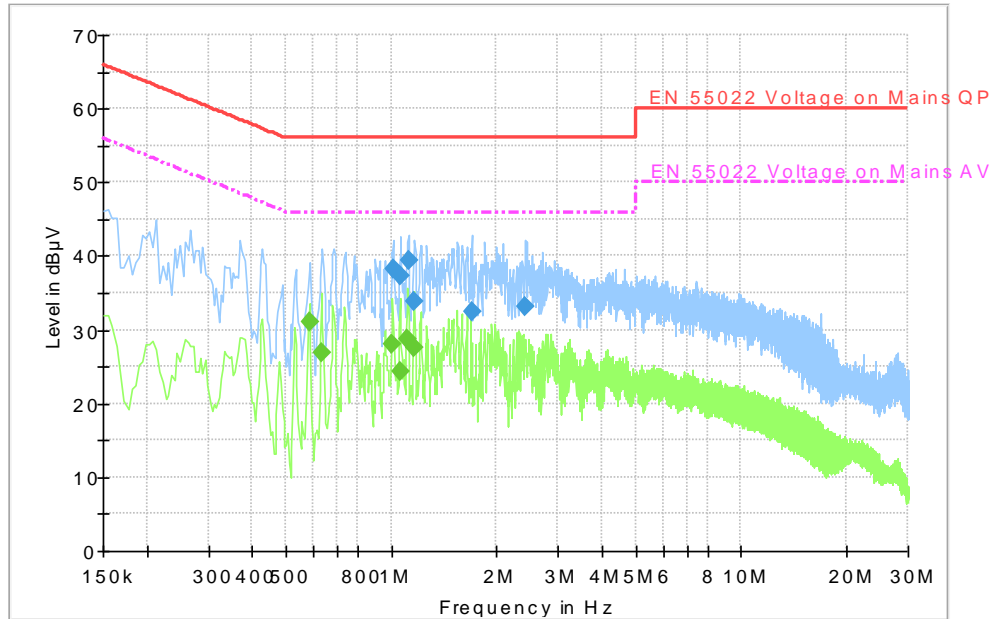


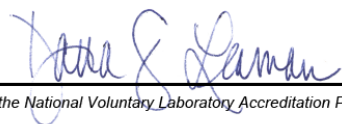
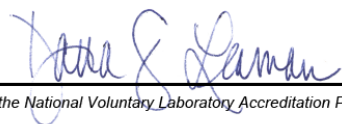
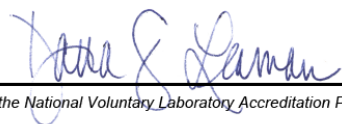
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.014000	38.3	2000.0	9.000	N	10.2	17.7	56.0
1.063500	37.2	2000.0	9.000	N	10.2	18.8	56.0
1.117500	39.5	2000.0	9.000	N	10.2	16.5	56.0
1.162500	33.8	2000.0	9.000	N	10.2	22.2	56.0
1.698000	32.4	2000.0	9.000	N	10.2	23.6	56.0
2.413500	33.2	2000.0	9.000	N	10.2	22.8	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.582000	31.1	2000.0	9.000	L1	10.2	14.9	46.0
0.631500	27.0	2000.0	9.000	L1	10.2	19.0	46.0
1.009500	28.1	2000.0	9.000	L1	10.2	17.9	46.0
1.059000	24.3	2000.0	9.000	L1	10.2	21.7	46.0
1.113000	28.8	2000.0	9.000	L1	10.2	17.2	46.0
1.162500	27.7	2000.0	9.000	L1	10.2	18.3	46.0

ANNEX E: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p>Telecommunication Technology Labs, CAICT Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <table border="0" style="width: 100%;"><tr><td style="width: 40%;"><hr/><p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p></td><td style="width: 20%; text-align: center;"></td><td style="width: 40%; text-align: right;"><hr/><p><i>For the National Voluntary Laboratory Accreditation Program</i></p></td></tr></table>		<hr/> <p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>
<hr/> <p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>		

END OF REPORT