

FCC TEST REPORT

For

MOVETIME FAMILY WATCH

Model Number: MT43KW

FCC ID: 2ACCJB127

Report Number : WT208001198

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,
Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

TEST REPORT DECLARATION

Applicant : TCL Communication Ltd.
Address : 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong
Science Park, Shatin, NT, Hong Kong
Manufacturer : TCL Communication Ltd.
Address : 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong
Science Park, Shatin, NT, Hong Kong
EUT Description : MOVETIME FAMILY WATCH
Model No. : MT43KW
Trade mark : TCL
Serial Number : /
FCC ID : 2ACCJB127


Test Standards:

FCC Part 15 Subpart B (2019)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Jul.10, 2020
(Zhou Fangai 周芳媛)

Checked by:  Date: Jul.10, 2020
(Lin Yixiang 林奕翔)


Approved by:  Date: Jul.10, 2020
(Lin Bin 林斌)

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION	7
3.1. EUT Description	7
3.2. Block Diagram of EUT Configuration	8
3.3. Operating Condition of EUT	8
3.4. Support Equipment List.....	8
3.5. Test Conditions	8
3.6. Modifications	8
4. TEST EQUIPMENT USED	9
4.1. Test Equipment Used to Measure Conducted Emission.....	9
4.2. Test Equipment Used to Measure Radiated Emission.....	9
5. CONDUCTED EMISSION TEST	10
5.1. Test Standard and Limit	10
5.2. Test Procedure.....	10
5.3. Test Arrangement	10
5.4. Test Data.....	10
6. RADIATION DISTURBANCE TEST	14
6.1. Test Standard and Limit	14
6.2. Test Procedure.....	14
6.3. Test Arrangement	15
6.4. Test Data.....	15

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.107	Pass
Radiation Emission	15.109	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacture.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3.Measurement Uncertainty

Conducted Emission

9 kHz~30MHz 2.9dB

Radiated Emission

30MHz~1000MHz 5.1dB

1GHz~6GHz 5.04dB

6GHz~18GHz 5.54dB

3. PRODUCT DESCRIPTION

NOTE: The antenna gain was declared by the manufacturer.


3.1.EUT Description

Table 2 Specification of the Equipment under Test

Product Type:	MOVETIME FAMILY WATCH
Hardware Version:	V05
Software Version :	MT43K_NA_00.01_15
FCC-ID:	2ACCJB127
Frequency:	<p>GSM850: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>WCDMA 850: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>WCDMA 1700: TX: 1710MHz~1755MHz RX 2110MHz~2155MHz</p> <p>WCDMA 1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>LTE Band 2: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>LTE Band 4: TX: 1710MHz~1755MHz RX 2110MHz~2155MHz</p> <p>LTE Band 5: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>LTE Band 12: TX 699 ~ 716MHz RX 729 ~ 746MHz</p> <p>LTE Band 13: TX 777~ 787MHz RX 746~ 756MHz</p> <p>LTE Band 66: TX: 1710MHz~1780MHz RX 2110MHz~2200MHz</p> <p>BLE:2402MHz~2480MHz</p>
Type(s) of Modulation:	<p>GSM850/PCS1900:GMSK 8PSK</p> <p>WCDMA:QPSK LTE:QPSK, 16QAM</p> <p>BLE:GFSK</p>
Antenna Type:	<p>GSM/WCDMA/LTE: PIFA ANTENNA</p> <p>699MHz~716MHz: -12 dBi</p> <p>777MHz~787MHz: -9 dBi</p> <p>824MHz~849MHz: -8 dBi</p> <p>1710MHz~1780MHz: -7 dBi</p> <p>1850MHz~1910MHz: -7 dBi</p> <p>BLE: PIFA ANTENNA -5dBi</p>
Operating voltage:	Internal battery, 120V AC Adapter 3.3V (Low)/3.85V (Nominal)/ 4.2V (Max)

Remark: --

3.2. Block Diagram of EUT Configuration



Test mode 1

3.3. Operating Condition of EUT

Test mode 1: Charging+ BT

Test mode 2: Charging + GSM 850 Idle

Test mode 3: Charging + WCDMA 850 Idle

Test mode 4: Charging + LTE band 5 Idle

Test mode 5: Charging + LTE band 12 Idle

Test mode 6: Charging + LTE band 13 Idle

EUT has more than one typical operation, only the worst test mode will be recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4. Support Equipment List

Table 3 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adaptor for EUT	OP92KAUH	--	--
Li-ion Battery for EUT	TLp005F1	--	Shenzhen BYD Lithium Battery Company Limited.
USB for EUT	CDB0000076CF	--	--

3.5. Test Conditions

Date of test : Jul.04, 2020- Jul.07, 2020

Date of EUT Receive : Jun.19, 2020

Temperature: 24°C-26 °C

Relative Humidity: 46%-51%

3.6. Modifications

No modification was made.

4. TEST EQUIPMENT USED

4.1. Test Equipment Used to Measure Conducted Emission

Table 4 Conducted Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.27,2019	1 Year
SB4357	AMN	R&S	ENN216	Aug.27,2019	1 Year

4.2. Test Equipment Used to Measure Radiated Emission

Table 5 Radiated Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB3436	Test Receiver	R&S	ESI26	Nov.07,2019	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Jan.10,2020	1 Year
SB13958	Horn Antenna	R&S	HF907	Apr.15,2020	1 Year

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15: Section 15.107

5.1.2. Test Limit

Table 6 Conducted Emission Test Limit (Class B)

Frequency	Power Port limits (dB μ V)	
	Quasi-peak	Average
0.15MHz ~ 0.5MHz	66~56*	56~46*
0.5MHz ~ 5 MHz	56	46
5 MHz ~ 30MHz	60	50

* Decreasing linearly with logarithm of the frequency

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data


The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.

Table 7 Conducted Emission Test Data at mains Port


Model No.: MT43KW								
Test mode: 1								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)
Line	0.172	9.7	32.7	42.4	64.9	18.8	28.5	54.9
	0.262	9.7	24.7	34.4	61.4	10.4	20.1	51.4
	0.307	9.7	21.3	31.0	60.1	10.4	20.1	50.1
	0.442	9.7	16.9	26.6	57.0	12.2	21.9	47.0
	4.195	9.9	8.0	17.9	56	2.7	12.6	46
	12.498	9.9	8.6	18.5	60	8.2	18.1	50
Neutral	0.168	9.7	32.6	42.3	65.1	20.4	30.1	55.1
	0.222	9.7	28.4	38.1	62.7	17.7	27.4	52.7
	0.267	9.7	24.7	34.4	61.2	14.5	24.2	51.2
	0.487	9.7	24.7	34.4	56.2	14.6	24.3	46.2
	0.915	9.8	13.4	23.2	56	9.1	18.9	46
	3.673	9.9	12.2	22.1	56	7.5	17.4	46

- REMARKS: 1. Emission level (dB μ V) =Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
 3. The other emission levels were more than 20dB below the limits.

EUT: MT43KW
Operating Condition: Test mode 1
Test Specification: L
Test Voltage: AC 120V/60Hz

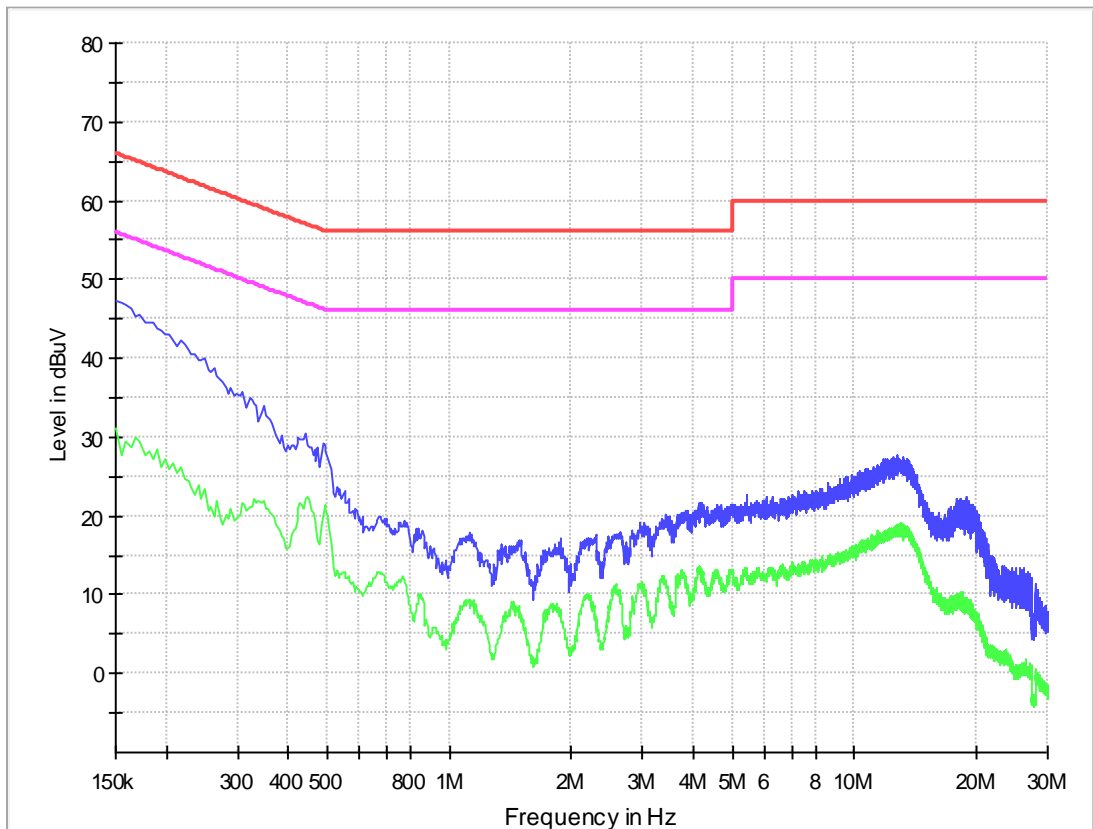

EUT: MT43KW
Operating Condition: Test mode 1
Test Specification: N
Test Voltage: AC 120V/60Hz

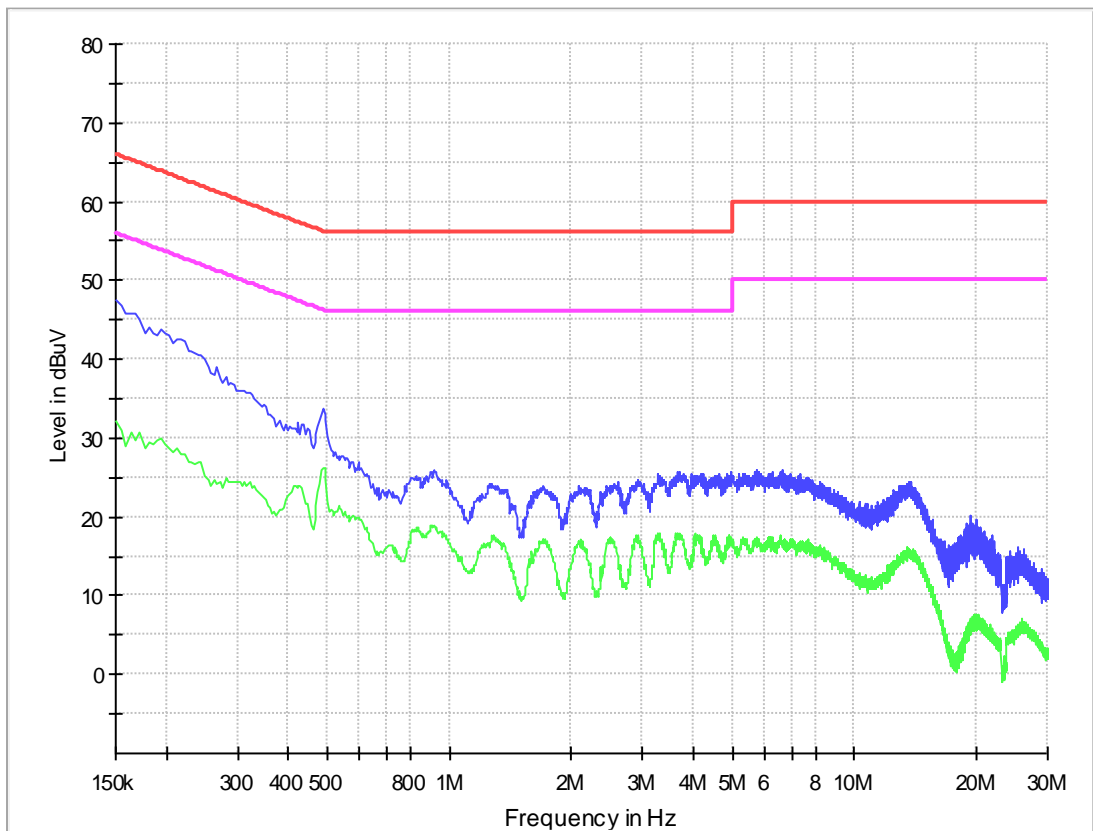

6. RADIATION EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15: Section 15.109

6.1.2. Test Limit

Table 8 Radiation Emission Test Limit for FCC (Class B)

Frequency	Test distance	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30MHz~88MHz	3m	40		
88MHz~216MHz	3m	43.5		
216MHz~960MHz	3m	46		
960MHz~1000MHz	3m	54		
>1000MHz	3m	/	54	74
Conditional testing procedure for above 1 GHz :				
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)		Upper frequency of measurement range (MHz)		
Below 1.705		30		
1.705~108		1000		
108~500		2000		
500~1000		5000		
Above 1000		5th harmonic of the highest frequency or 40 GHz, whichever is lower.		

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an

antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)

VBW \geq 3 x RBW

Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);

Peak & Average (frequency range above 1 GHz);

Changing VBW to 10 Hz for average measurement

The use of a higher-than-specified video bandwidth produces a conservative measurement result.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.

Table 9 Radiated Emission Test Data


Model No.: MT43KW								
Test mode: 1								
Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB μ V/m)	Level (dB μ V/m)	Polarity (Horizontal/Vertical)	Limit (dB μ V/m)	Margin (dB)	Note
31.944	0.6	12.3	3.3	16.2	Horizontal	40	23.8	QP
43.607	0.7	13.6	1.6	15.9	Horizontal	40	24.1	QP
55.270	0.8	13.0	10.6	24.4	Horizontal	40	15.6	QP
107.755	1.2	13.2	2.0	16.4	Horizontal	43.5	27.1	QP
134.968	1.4	10.5	9.7	21.6	Horizontal	43.5	21.9	QP
146.633	1.4	10.5	8.4	20.3	Horizontal	43.5	23.2	QP
43.644	0.7	13.6	11.3	25.6	Vertical	40	14.4	QP
53.627	0.7	13.3	10.8	24.8	Vertical	40	15.2	QP
72.765	1.0	8.7	8.0	17.7	Vertical	40	22.3	QP
90.261	1.1	11.9	5.5	18.5	Vertical	43.5	25.0	QP
146.634	1.4	10.5	11.4	23.3	Vertical	43.5	20.2	QP
164.128	1.5	8.7	9.7	19.9	Vertical	43.5	23.6	QP
7813.627	-37.7	36.2	52.9	51.4	Horizontal	74	22.6	PK
11935.871	-35.5	37.5	52.6	54.6	Horizontal	74	19.4	PK
14763.527	-34.6	40.4	51.0	56.8	Horizontal	74	17.2	PK
15274.549	-34.1	40.8	51.7	58.4	Horizontal	74	15.6	PK
16943.887	-32.3	42.2	50.7	60.6	Horizontal	74	13.4	PK

17795.591	-31.2	43.1	48.4	60.3	Horizontal	74	13.7	PK
7132.264	-38.4	35.4	52.6	49.6	Vertical	74	24.4	PK
11969.939	-35.4	37.5	51.8	53.9	Vertical	74	20.1	PK
14320.641	-34.5	40.0	51.1	56.6	Vertical	74	17.4	PK
15274.549	-34.1	40.8	51.6	58.3	Vertical	74	15.7	PK
17012.024	-32.0	42.7	49.9	60.6	Vertical	74	13.4	PK
17724.454	-31.4	43.1	49.6	61.3	Vertical	74	12.7	PK
7813.627	-37.7	36.2	52.9	37.3	Horizontal	54	16.7	AV
11935.871	-35.5	37.5	52.6	39.8	Horizontal	54	14.2	AV
14763.527	-34.6	40.4	51.0	43.9	Horizontal	54	10.1	AV
15274.549	-34.1	40.8	51.7	45.4	Horizontal	54	8.6	AV
16943.887	-32.3	42.2	50.7	46.7	Horizontal	54	7.3	AV
17795.591	-31.2	43.1	48.4	46.9	Horizontal	54	7.1	AV
7132.264	-38.4	35.4	52.6	36.9	Vertical	54	17.1	AV
11969.939	-35.4	37.5	51.8	43.1	Vertical	54	10.9	AV
14320.641	-34.5	40.0	51.1	43.9	Vertical	54	10.1	AV
15274.549	-34.1	40.8	51.6	46.7	Vertical	54	7.3	AV
17012.024	-32.0	42.7	49.9	46.7	Vertical	54	7.3	AV
17724.454	-31.4	43.1	49.6	47.6	Vertical	54	6.4	AV

Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)


Radiated Emission

EUT Name: MT43KW
Operating Condition: Test Mode 1
Test site: SMQ NETC EMC Lab.3m Chamber
Antenna Position: Horizontal & Vertical
Test Voltage: AC 120V60Hz

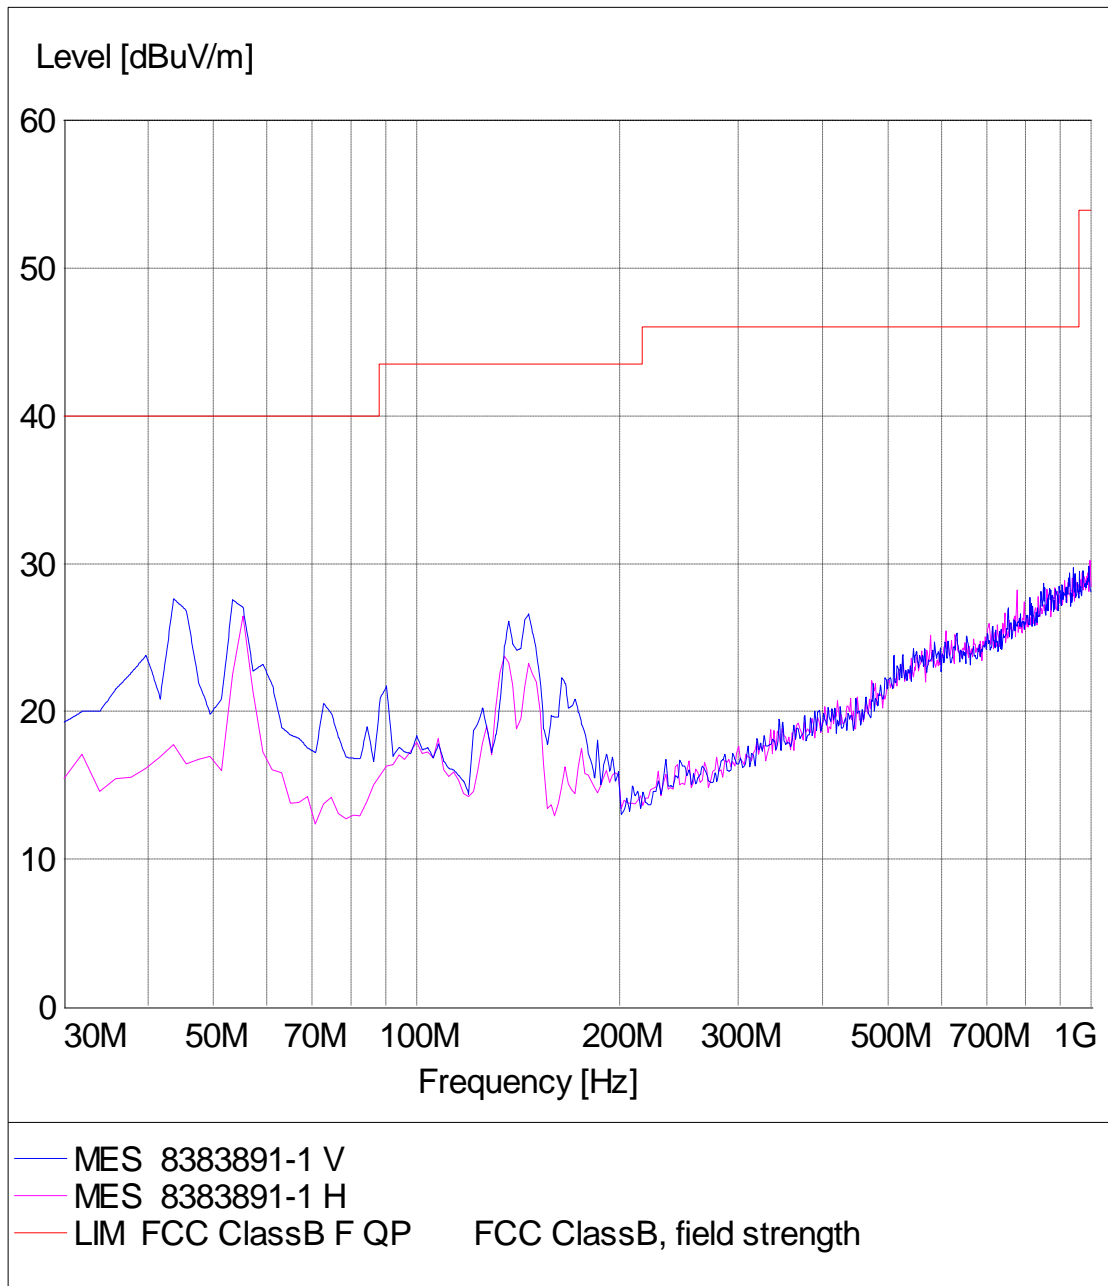

Radiated Emission

EUT Name: MT43KW
Operating Condition: Test Mode 1
Test site: SMQ NETC EMC Lab.3m Chamber
Antenna Position: Vertical & Horizontal
Test Voltage: AC 120V/60Hz

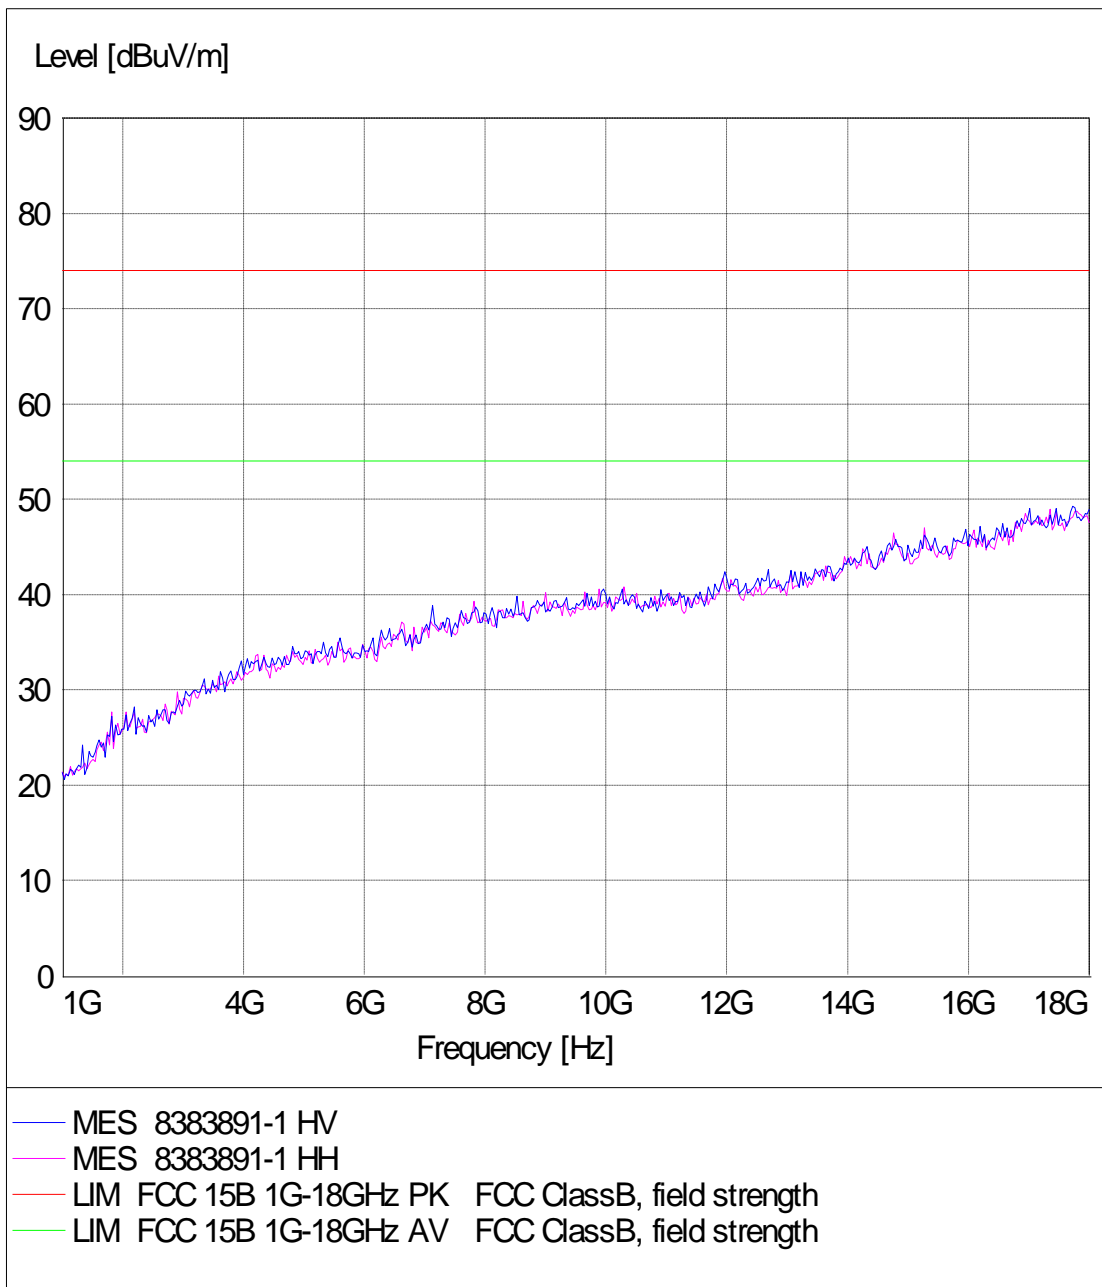

-----End of Report -----