

**TW20 headset BT DH5 0CH Left side 0mm-left ear**

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.826$  S/m;  $\epsilon_r = 38.318$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/1/3;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (6x6x1):** Measurement grid:  $dx=12$  mm,  $dy=12$  mm

Maximum value of SAR (measured) = 0.486 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$  mm,  $dy=5$  mm,  $dz=5$  mm

Reference Value = 11.94 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.615 W/kg

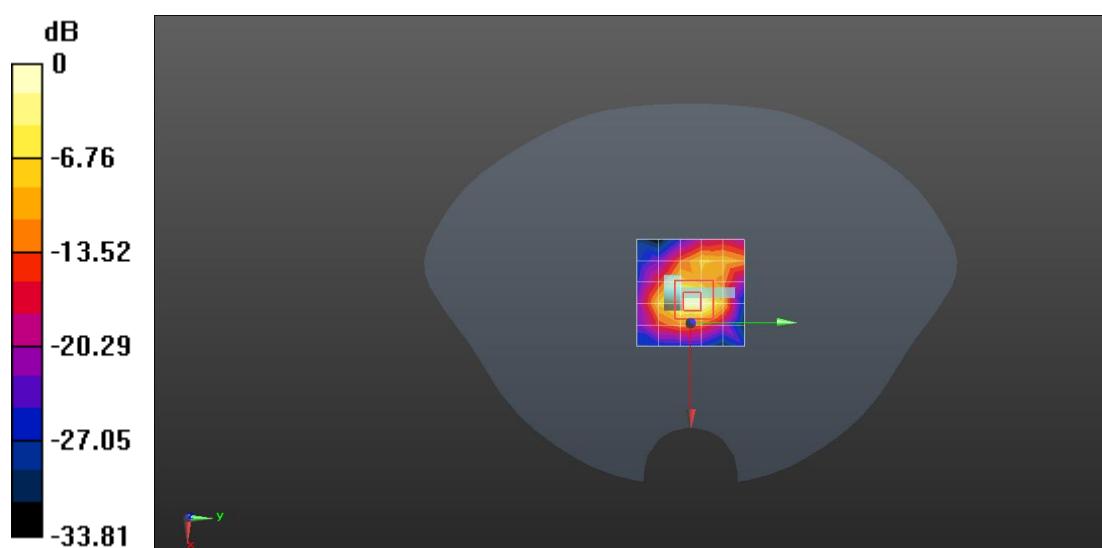

0 dB = 0.486 W/kg = -3.13 dBW/kg