



SAR TEST REPORT

No. I20Z61448-SEM01

For

TCL Communication Ltd.

LTE/UMTS/GSM Mobile Phone

Model Name:3082X

with

Hardware Version: PIO

Software Version:V1.0

FCC ID: 2ACCJB139

Issued Date: 2020-8-31

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

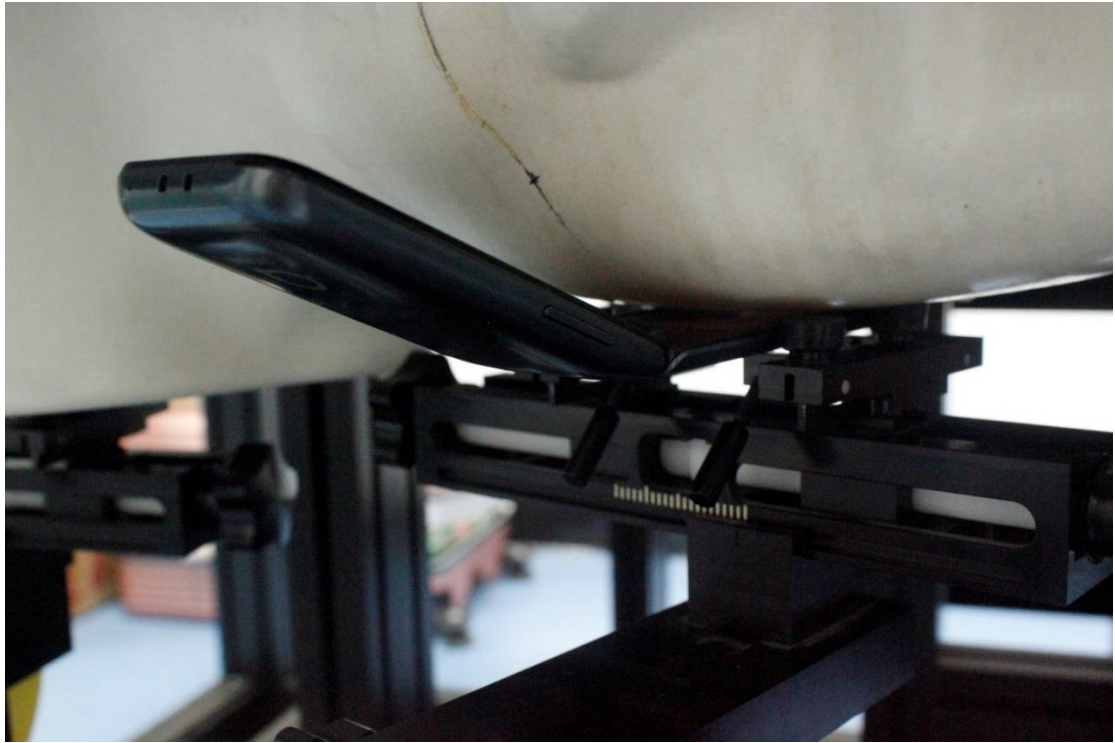


Picture 2: Left Head Touch Cheek Position



Picture 3: Left Head Tilt 15° Position

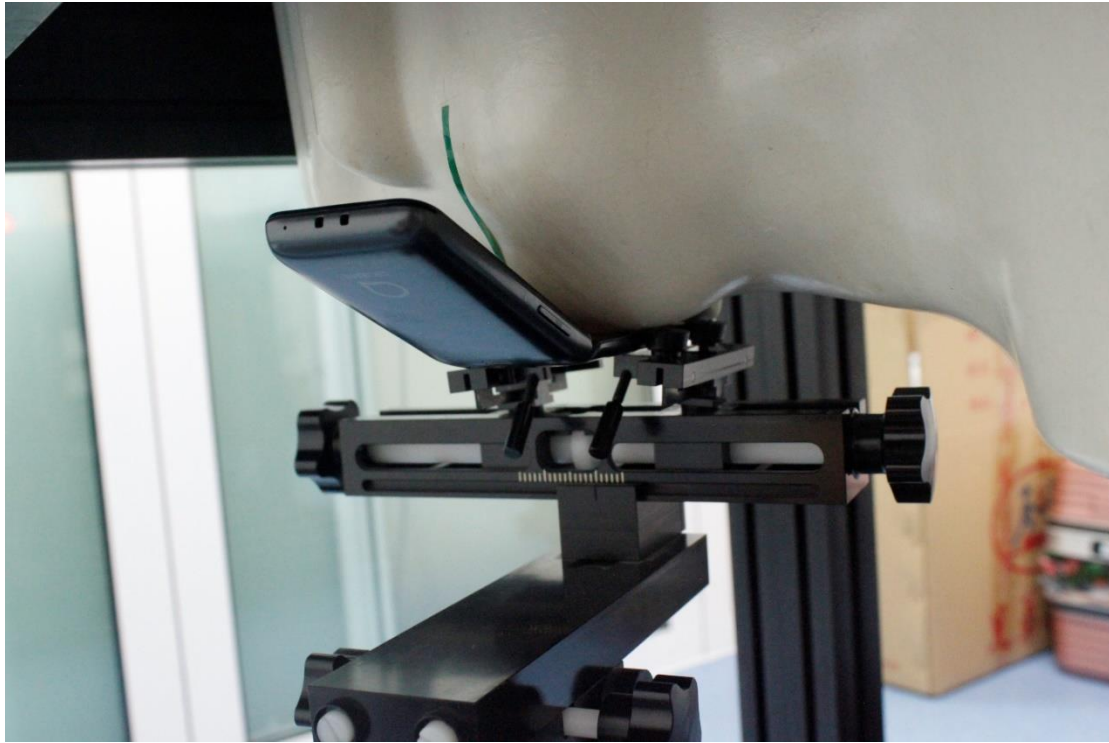


Picture 4: Right Head Touch Cheek Position

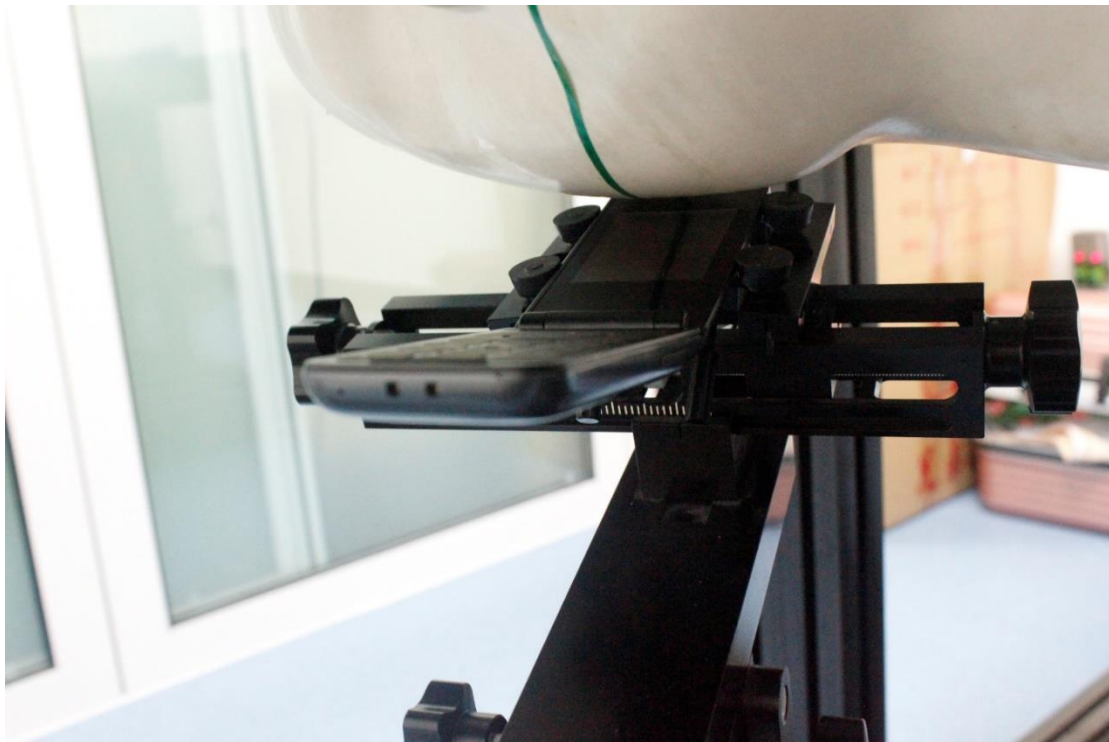


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions, with the distance 10mm between the EUT and the phantom bottom:

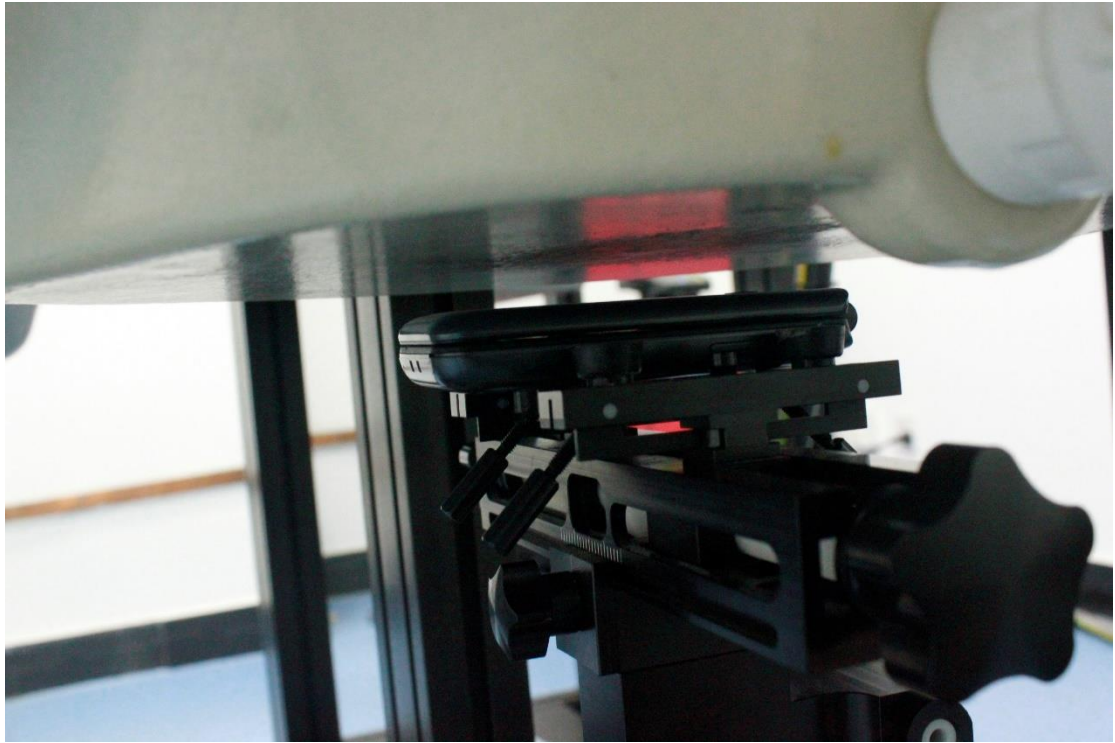


Picture 6: Front 10mm

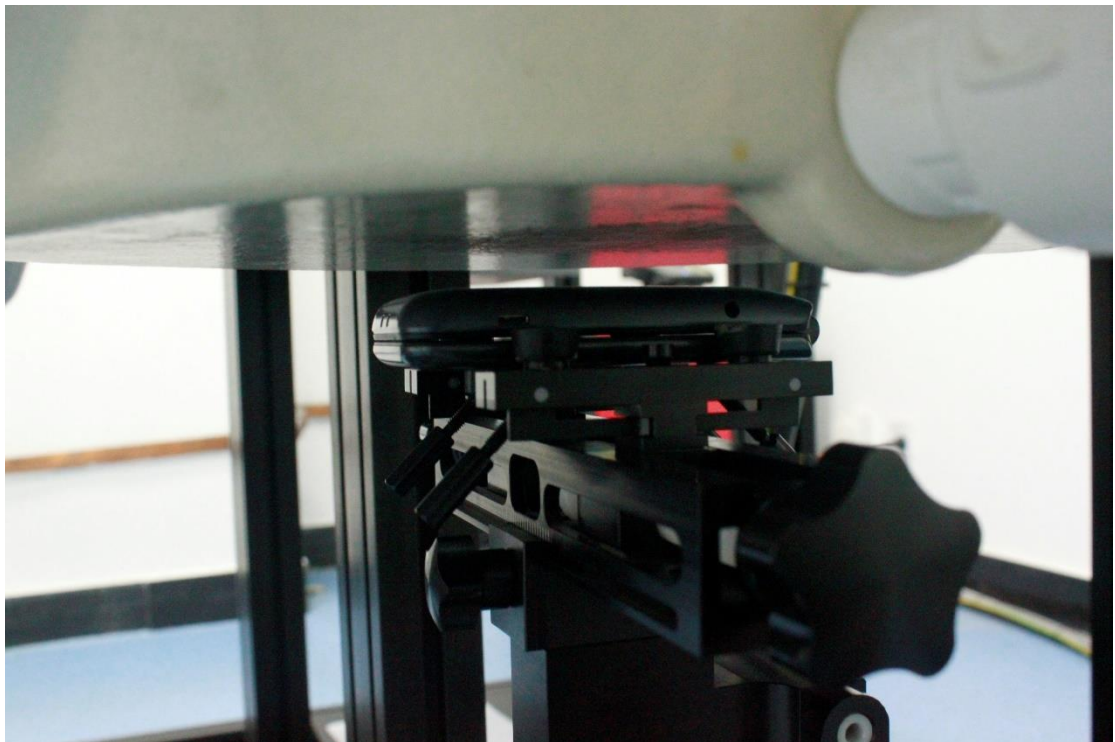


Picture 7: Rear 10mm

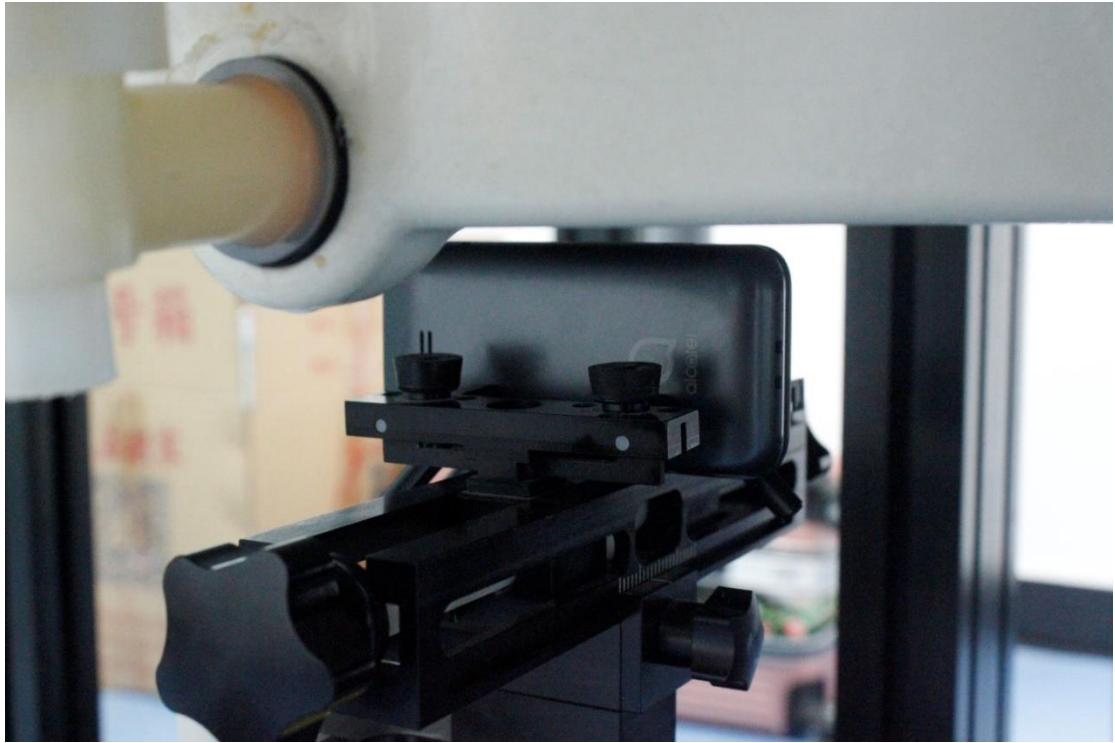


Picture 8: Left 10mm

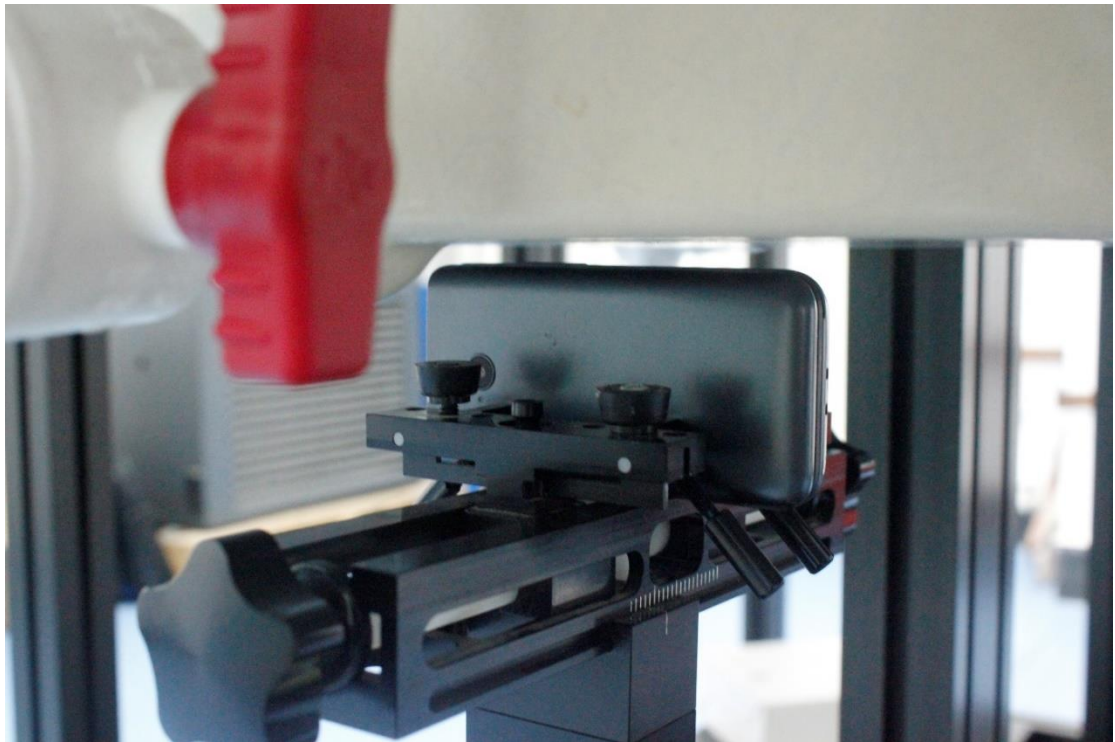

Picture 9: Right 10mm

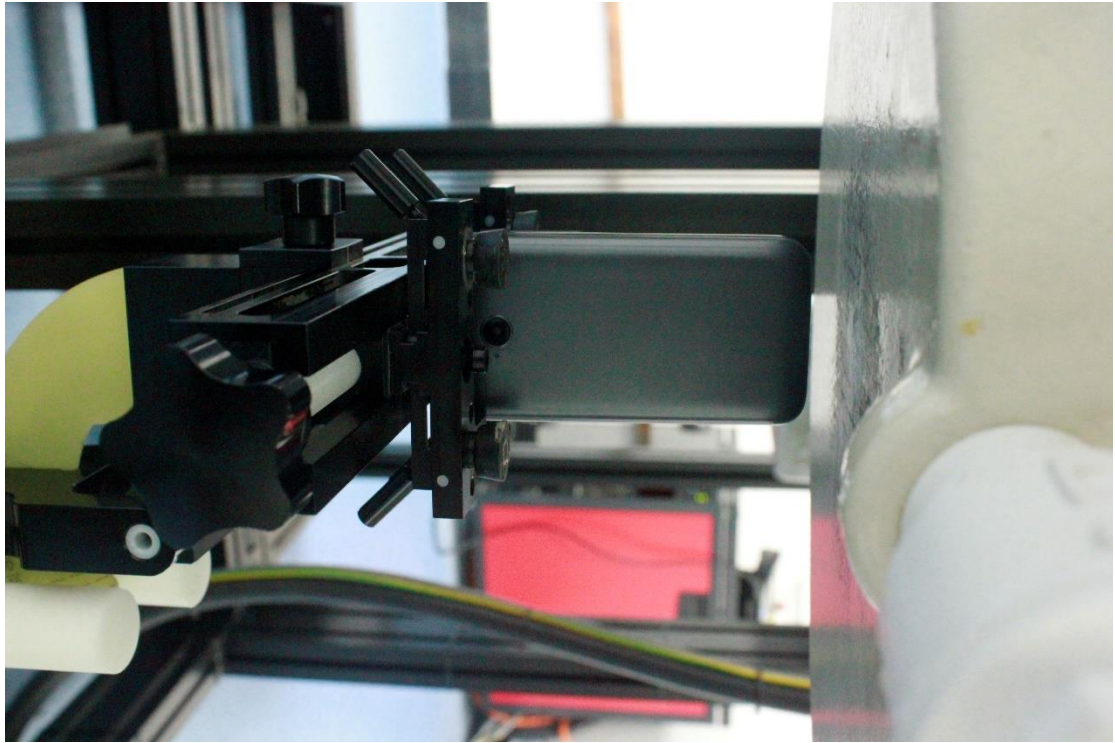

Picture 10: Bottom 10mm

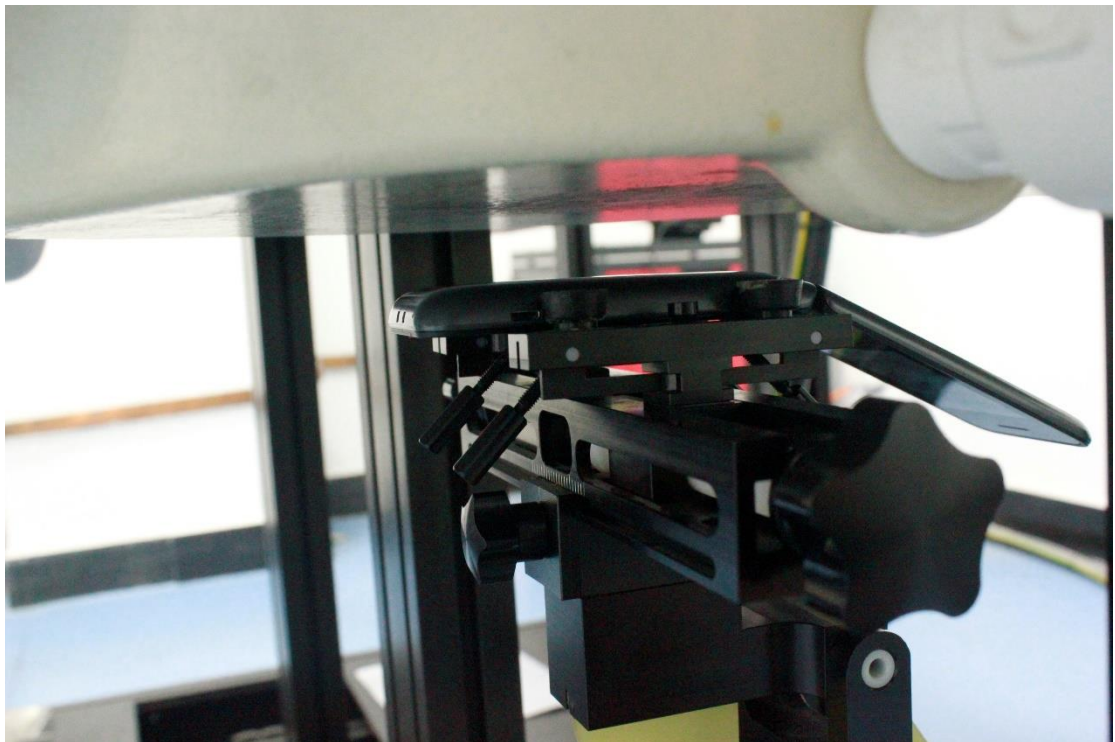

Picture 11: Rear(open) 10mm