



TEST REPORT

No. I20N03205-BLE

for

TCL Communication Ltd.

LTE/WCDMA/GSM mobile phone

Model Name: 4063A

with

Hardware Version: V1.0

Software Version: 8K16

FCC ID: 2ACCJB143

Issued Date: 2021-01-26

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



CONTENTS

CONTENTS	2
1. SUMMARY OF TEST REPORT.....	3
1.1. TEST ITEMS.....	3
1.2. TEST STANDARDS	3
1.3. TEST RESULT	3
1.4. TESTING LOCATION	3
1.5. PROJECT DATA	3
1.6. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. TEST RESULTS	8
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS	8
5.3. STATEMENTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. LABORATORY ENVIRONMENT.....	10
8. MEASUREMENT UNCERTAINTY	11
ANNEX A: DETAILED TEST RESULTS.....	12
A.0 ANTENNA REQUIREMENT	12
A.1 MAXIMUM PEAK OUTPUT POWER	15
A.2 PEAK POWER SPECTRAL DENSITY	19
A.3 6DB BANDWIDTH.....	23
A.4 BAND EDGES COMPLIANCE	27
A.5 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	30
A.6 TRANSMITTER SPURIOUS EMISSION - RADIATED	42
A.7 AC POWER LINE CONDUCTED EMISSION	55



1. Summary of Test Report

1.1. Test Items

Description	LTE/WCDMA/GSM mobile phone
Model Name	4063A
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

1.2. Test Standards

FCC Part15-2019; ANSI C63.10-2013

1.3. Test Result

Pass

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date:	2020-12-14
Testing End Date:	2020-01-21

1.6. Signature

Lin Zechuang
(Prepared this test report)

Tang Weisheng
(Reviewed this test report)

Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Gong Zhizhou
E-Mail: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Gong Zhizhou
E-Mail: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE/WCDMA/GSM mobile phone
Model Name	4063A
Frequency Range	2400MHz~2483.5MHz
Type of Modulation	GFSK
Number of Channels	40
Antenna Type	Integrated
Antenna Gain	-1.0dBi
Power Supply	3.85V DC by Battery
FCC ID	2ACCJB143
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Receive Date
UT08aa	351656200001042	V1.0	8K16	2020-12-14
UT01aa	351656200001158	V1.0	8K16	2020-12-15
UT03aa	351656200001166	V1.0	8K16	2020-12-15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	CAB2880000C7
AE2	Charger	/
AE3	Date Cable	/
AE4	Headset	/

AE1

Model	TLi028C7
Manufacturer	VEKEN
Capacity	2880mAh
Nominal Voltage	3.85V

AE2

Model	UC11US
Manufacturer	puan

AE3

Model	CDA3122005C2
Manufacturer	SHENGHUA



AE4

Model	CCB0046A15C1
Manufacturer	DALIN

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of LTE/WCDMA/GSM mobile phone with integrated antenna and battery.

It consists of normal options: Lithium Battery, Charger, USB Cable and Headset.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	Occupied 6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Transmitter Spurious Emission - Conducted	15.247 (d)	P
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
7	AC Power line Conducted Emission	15.107, 15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2021-12-30	1 year
2	Test Receiver	ESCI	100701	Rohde & Schwarz	2021-08-09	1 year
3	LISN	ENV216	102067	Rohde & Schwarz	2021-07-16	1 year

Radiated emission test system

NO.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2022-04-25	3 years
2	BiLog Antenna	3142E	00224831	ETS-Lindgren	2021-05-17	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2022-04-02	3 years
4	Test Receiver	ESR7	101676	Rohde & Schwarz	2021-11-25	1 year
5	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2021-01-14	1 year
6	Chamber	FACT3-2.0	1285	ETS-Lindgren	2021-07-19	2 years
7	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2023-01-06	3 years

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

The path loss value of conduction test is automatically compensated by the test system.
 EUT is engineering software provided by the customer to control the transmitting signal.
 The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Laboratory Environment

Semi-anechoic chambe

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. RF Output Power - Conducted	1.32dB	
2. Power Spectral Density - Conducted	2.32dB	
3. Occupied channel bandwidth - Conducted	66Hz	
4. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f \leq 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f \leq 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f \leq 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f \leq 30\text{MHz}$	1.74dB
	$30\text{MHz} \leq f \leq 1\text{GHz}$	4.84dB
	$1\text{GHz} \leq f \leq 18\text{GHz}$	4.68dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	3.76dB
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	3.00dB


ANNEX A: Detailed Test Results

Test Configuration

The measurement is made according to ANSI C63.10.


1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the spectrum analyzer to start measurement.
5. Record the values.




2) Radiated Measurements

Test setup: EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the receive antenna. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiving antenna polarization.

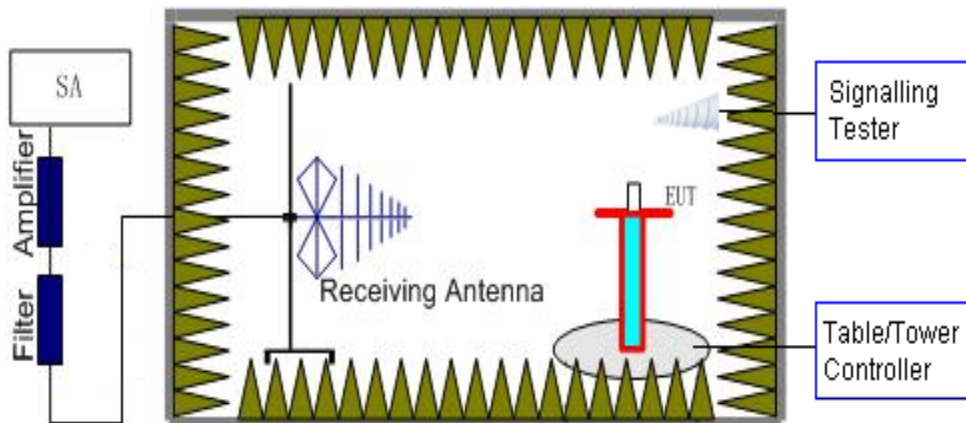

3) AC Power line Conducted Emission Measurement

For Bluetooth LE, the EUT is working under test mode. The EUT is commanded to operate at maximum transmitting power.

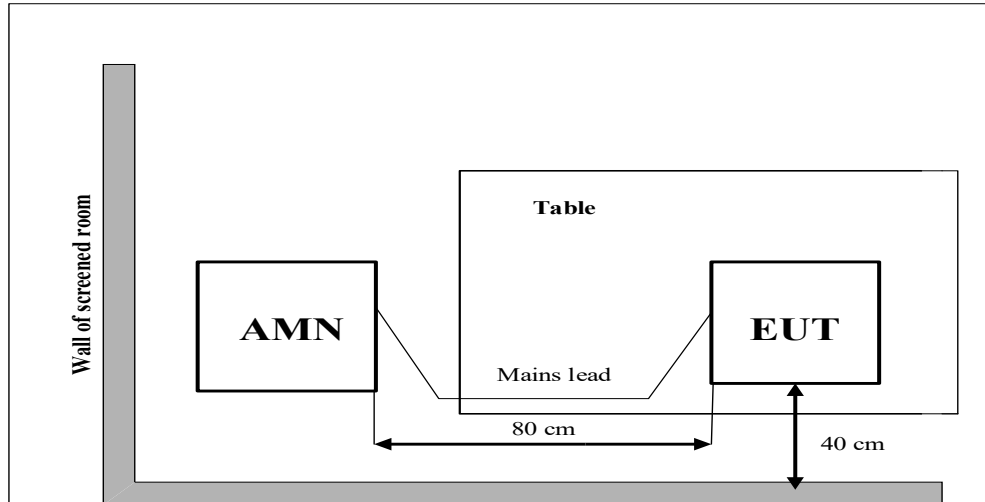



A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is -1.0dBi.

The RF transmitter uses an integrate antenna without connector.



A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

Use the following spectrum analyzer settings:

- a) Set the RBW = 3 MHz.
- b) Set VBW = 10 MHz.
- c) Set span = 10 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CRF Part 15.247(b)	< 30

Measurement Results:

Mode	Frequency (MHz)	Peak Conducted Output Power (dBm)		Conclusion
		Fig.	Value	
LE 1M	2402(CH0)	Fig.1	-4.10	P
	2440(CH19)	Fig.2	-3.70	P
	2480(CH39)	Fig.3	-3.36	P
LE 2M	2402(CH0)	Fig.4	-4.19	P
	2440(CH19)	Fig.5	-3.85	P
	2480(CH39)	Fig.6	-3.44	P

See below for test graphs.

Conclusion: Pass

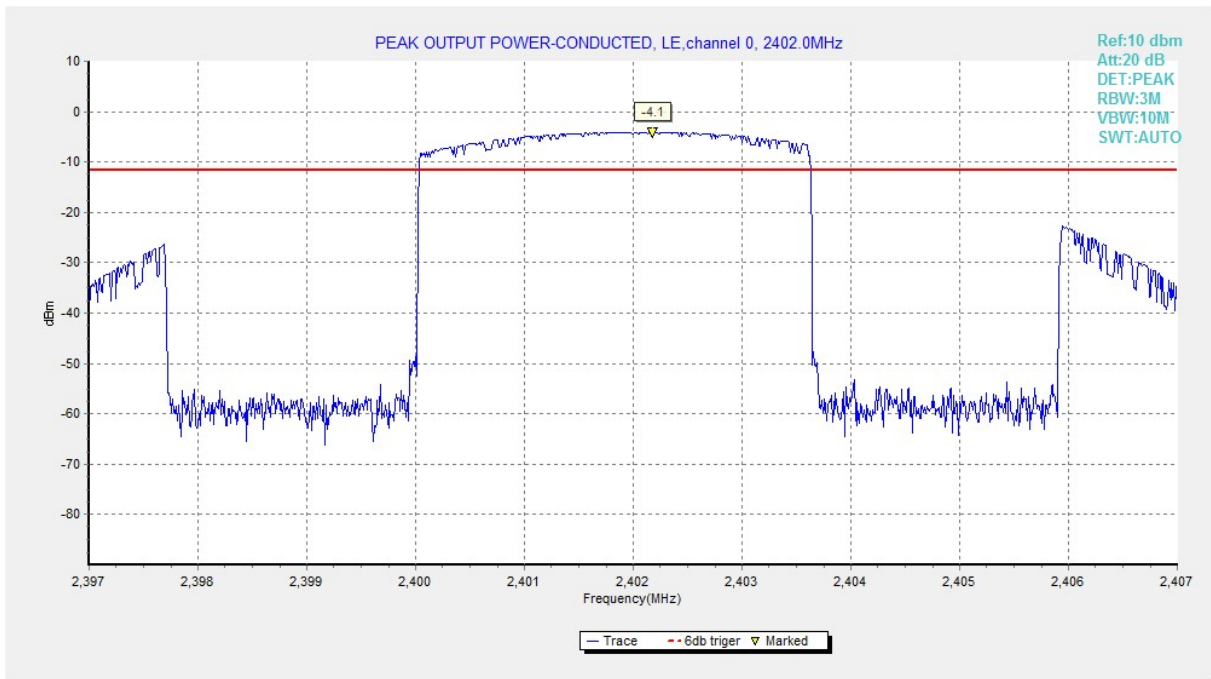


Fig.1 Peak Conducted Output Power (Ch 0), LE 1M

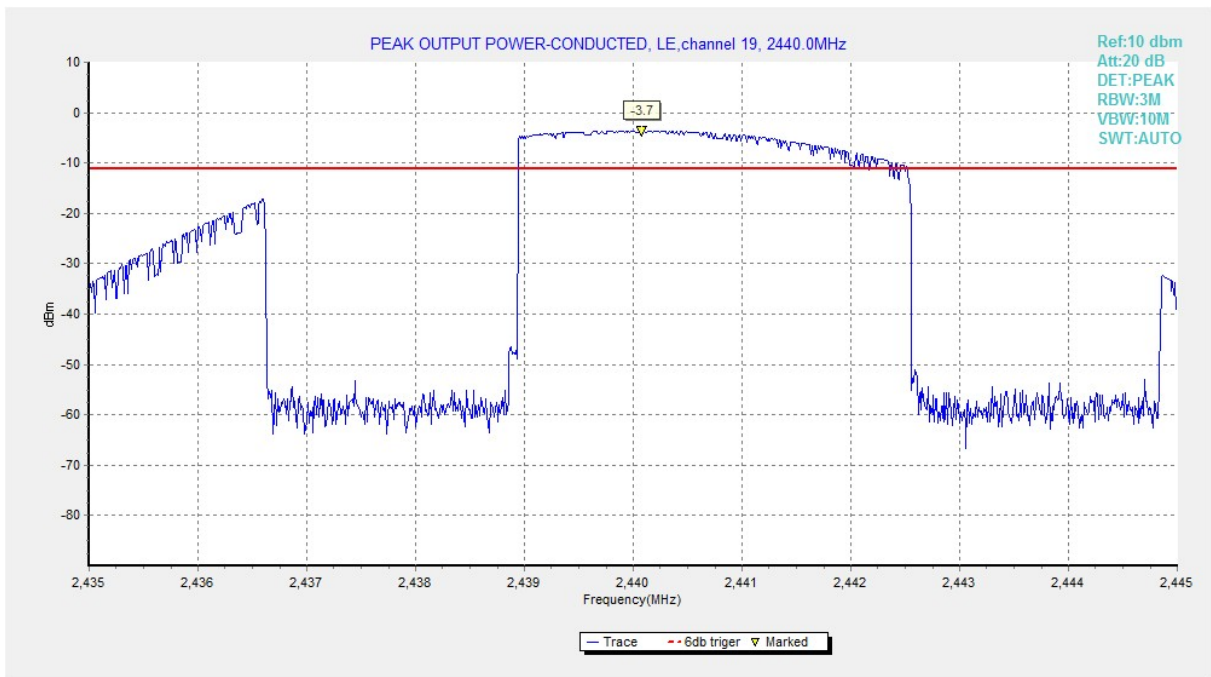


Fig.2 Peak Conducted Output Power (Ch 19), LE 1M

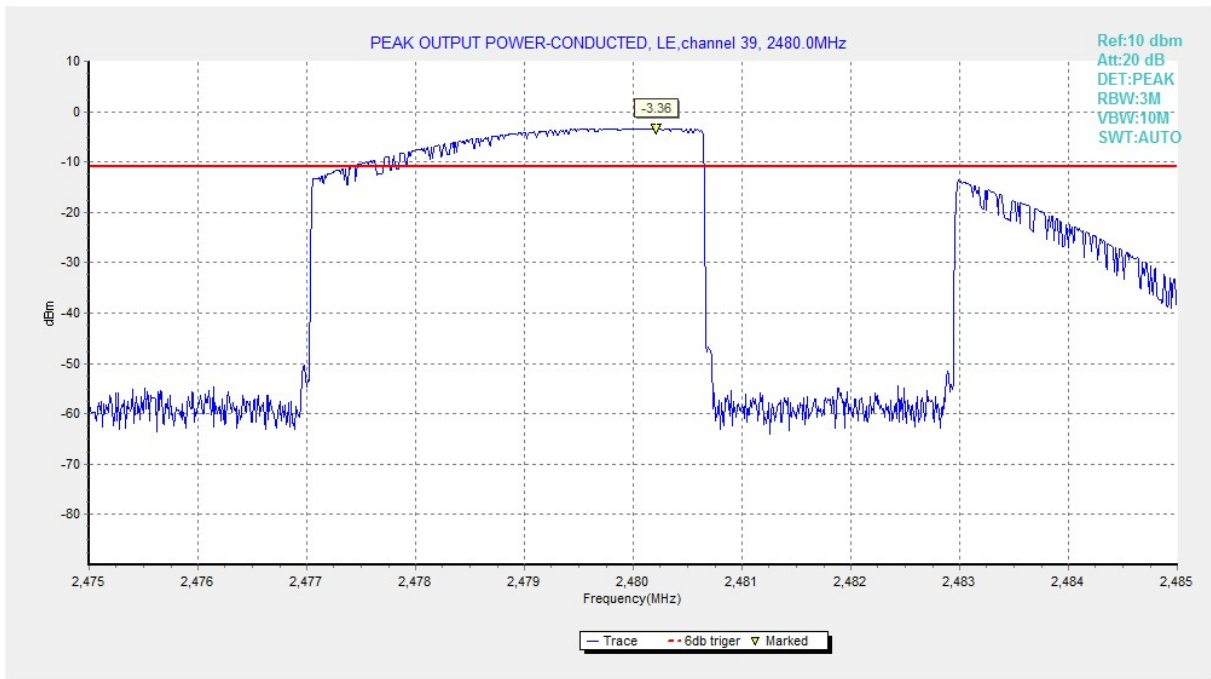


Fig.3 Peak Conducted Output Power (Ch 39), LE 1M

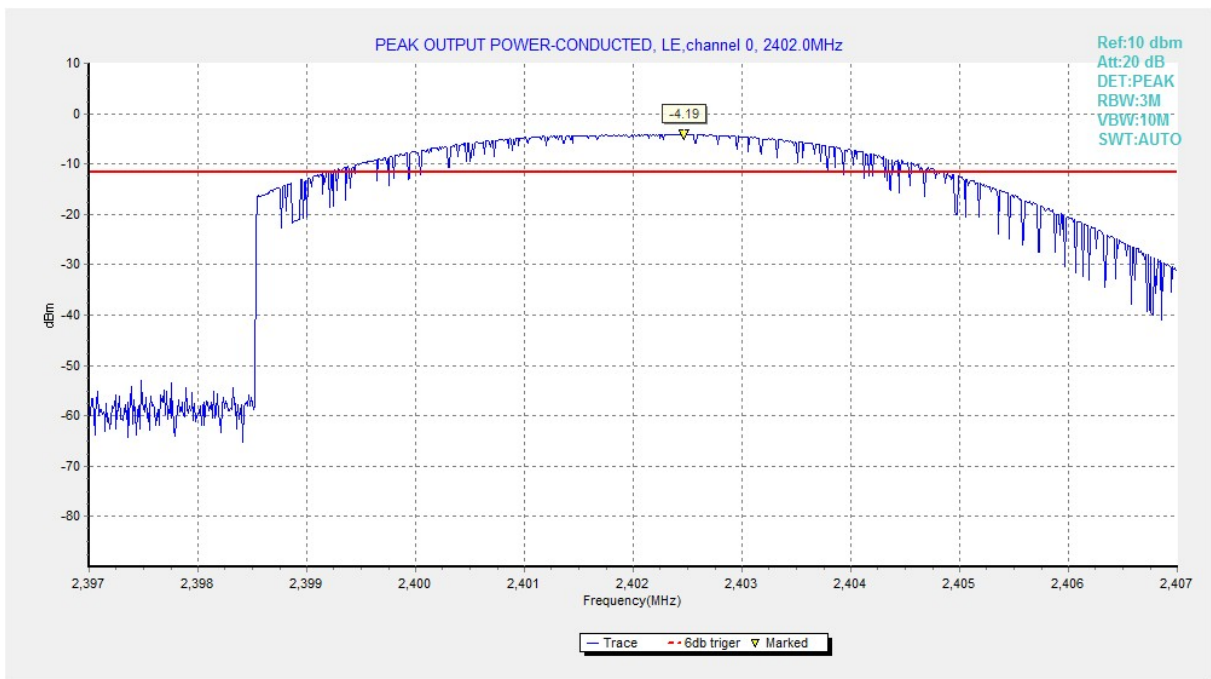


Fig.4 Peak Conducted Output Power (Ch 0), LE 2M

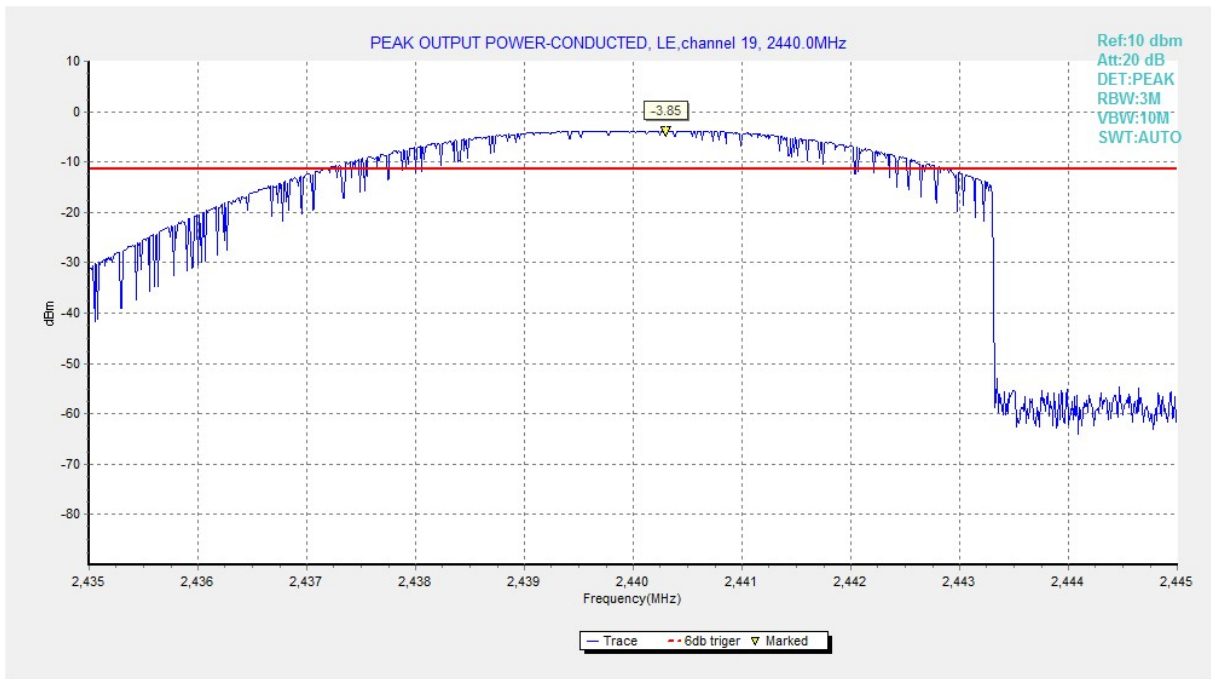


Fig.5 Peak Conducted Output Power (Ch 19), LE 2M

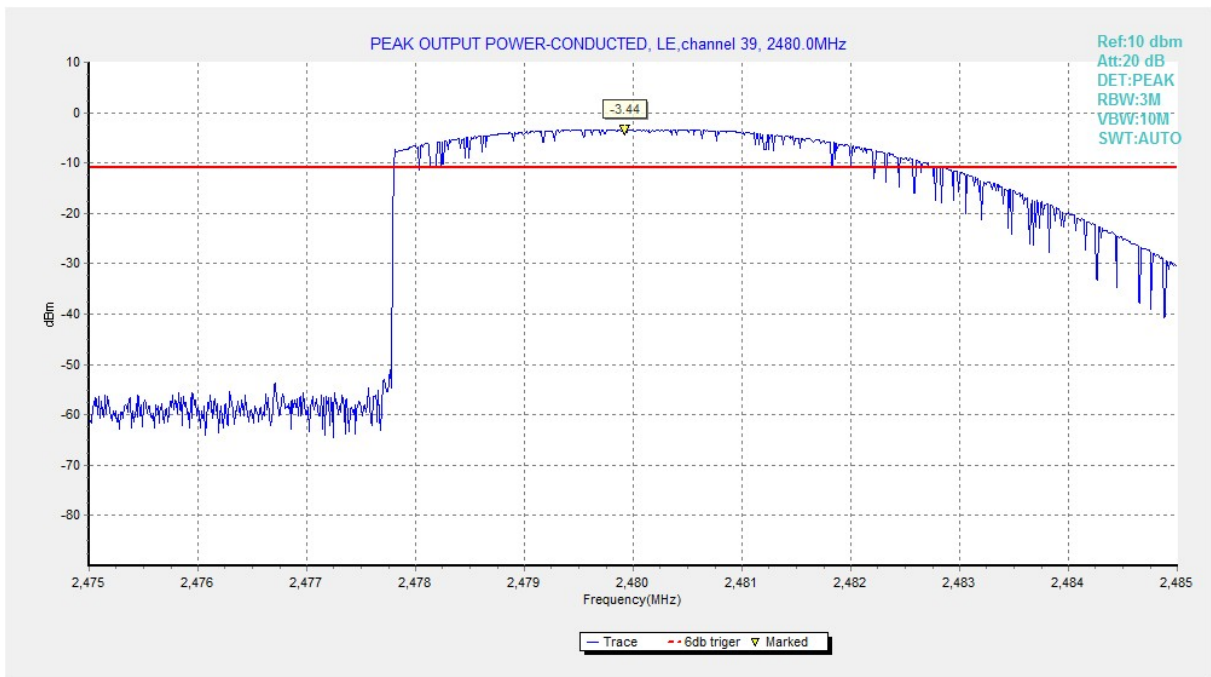


Fig.6 Peak Conducted Output Power (Ch 39), LE 2M



A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2

Measurement Limit:

Standard	Limit
FCC 47 CRF Part 15.247(e)	< 8 dBm/3 kHz

Measurement Results:

Mode	Frequency (MHz)	Peak Power Spectral Density (dBm)		Conclusion
		Fig.	Value	
LE 1M	2402(CH0)	Fig.7	-19.09	P
	2440(CH19)	Fig.8	-18.72	P
	2480(CH39)	Fig.9	-18.35	P
LE 2M	2402(CH0)	Fig.10	-22.90	P
	2440(CH19)	Fig.11	-22.54	P
	2480(CH39)	Fig.12	-22.16	P

See below for test graphs.

Conclusion: PASS

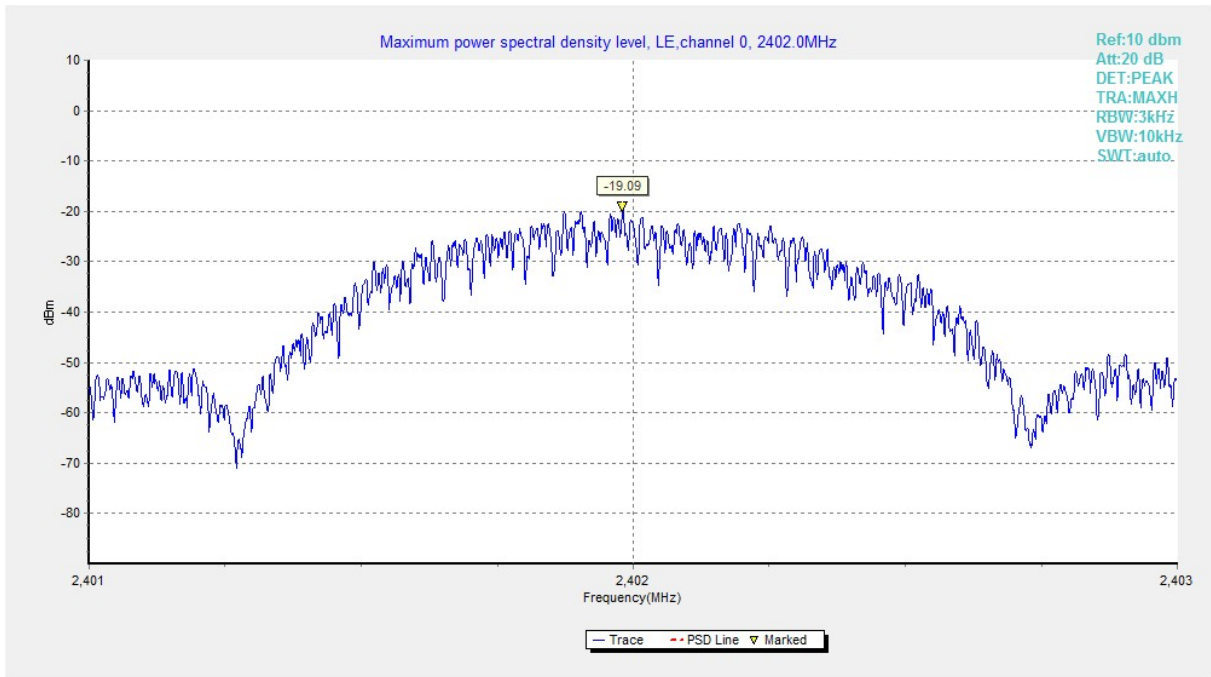


Fig.7 Power Spectral Density (Ch 0), LE 1M

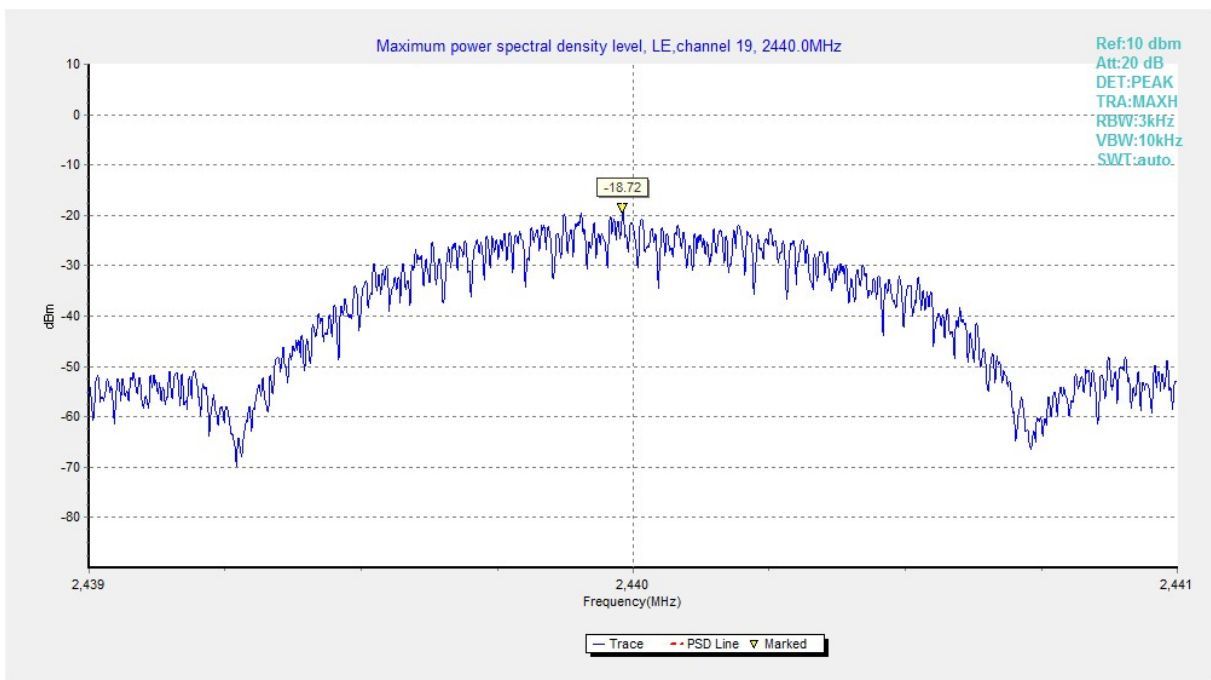


Fig.8 Power Spectral Density (Ch 19), LE 1M

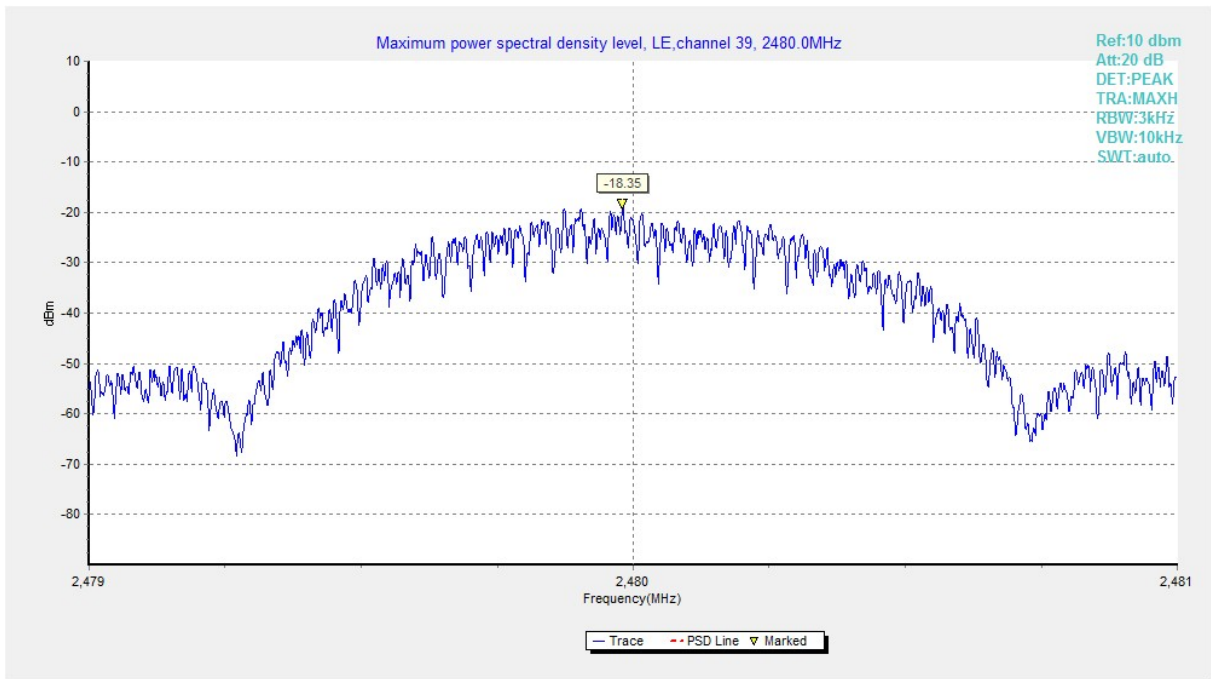


Fig.9 Power Spectral Density (Ch 39), LE 1M

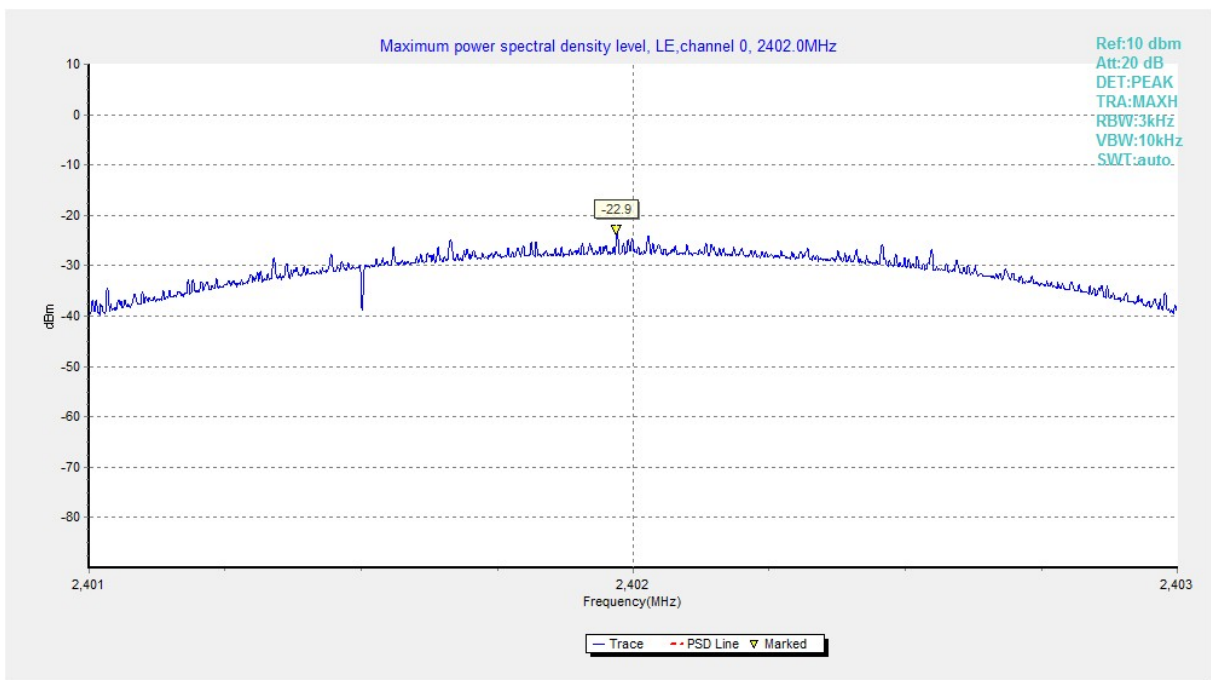


Fig.10 Power Spectral Density (Ch 0), LE 2M

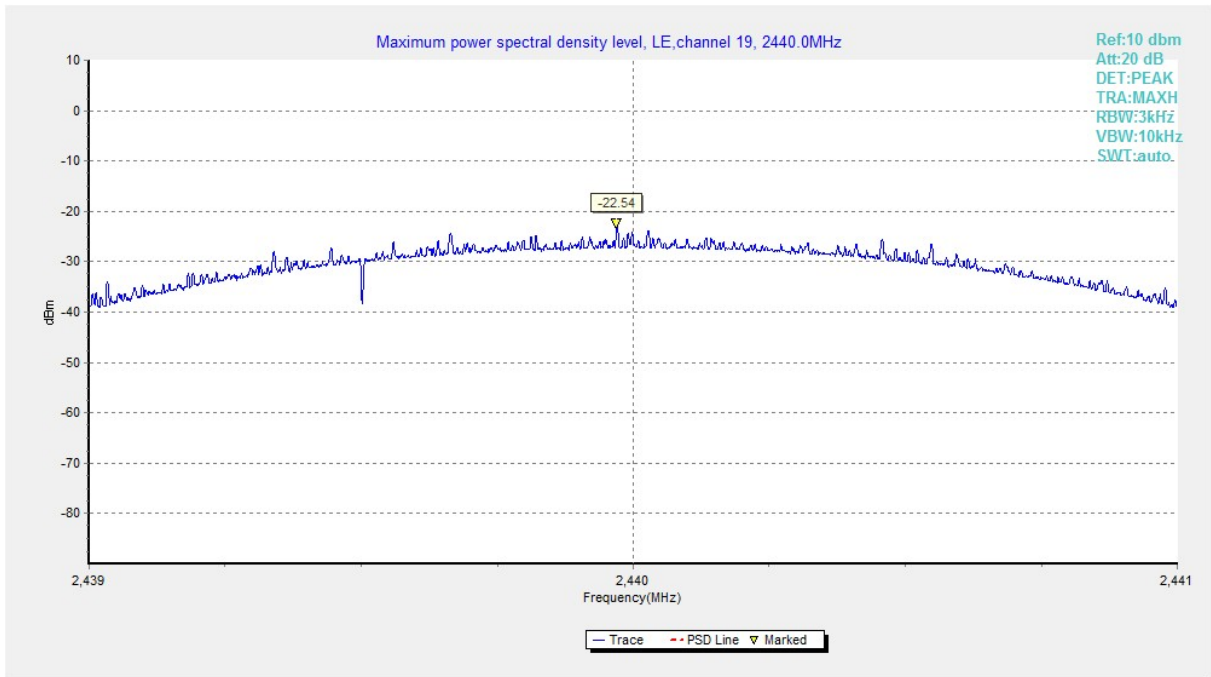


Fig.11 Power Spectral Density (Ch 19), LE 2M

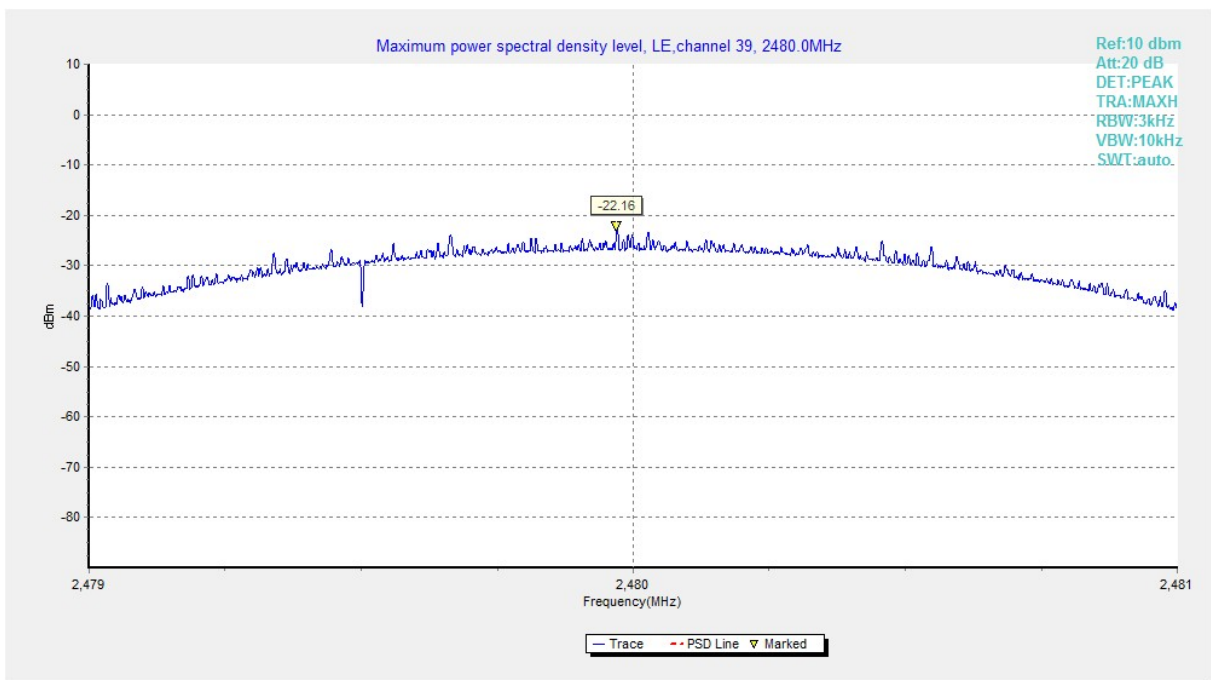


Fig.12 Power Spectral Density (Ch 39), LE 2M



A.3 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

Measurement Result:

Mode	Frequency (MHz)	Test Results (kHz)		Conclusion
LE 1M	2402(CH0)	Fig.13	696.00	P
	2440(CH19)	Fig.14	702.50	P
	2480(CH39)	Fig.15	697.50	P
LE 2M	2402(CH0)	Fig.16	1158.50	P
	2440(CH19)	Fig.17	1162.00	P
	2480(CH39)	Fig.18	1162.50	P

See below for test graphs.

Conclusion: PASS

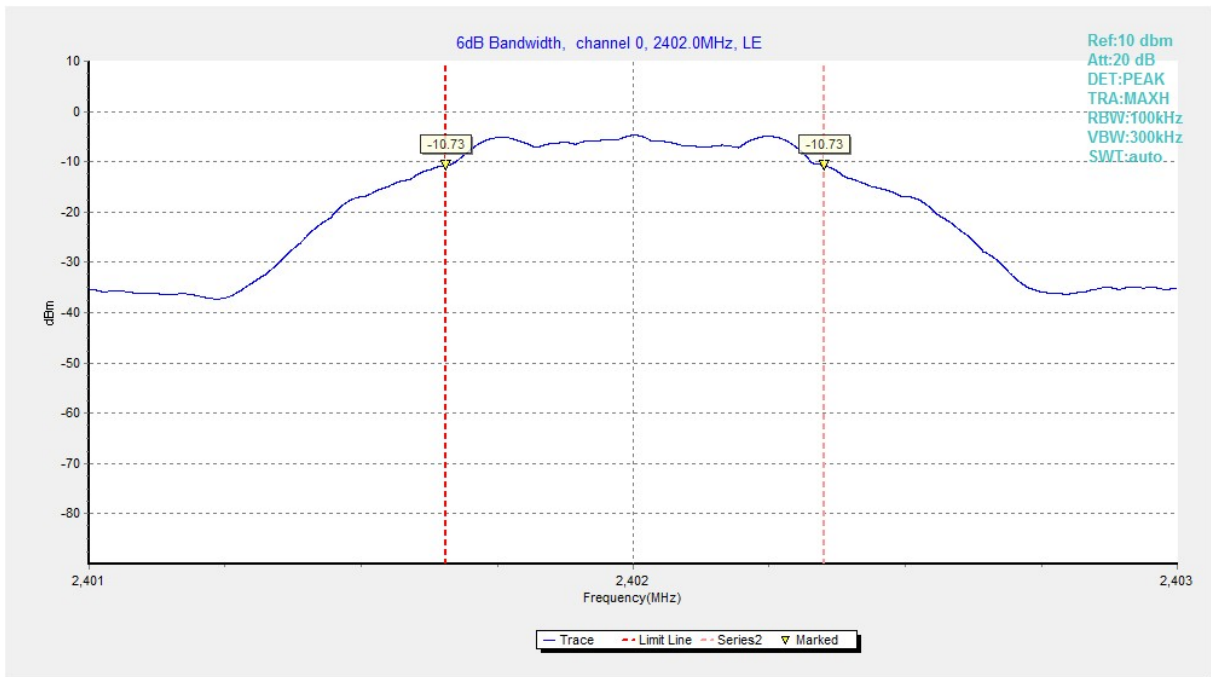


Fig.13 6dB Bandwidth (Ch 0), LE 1M

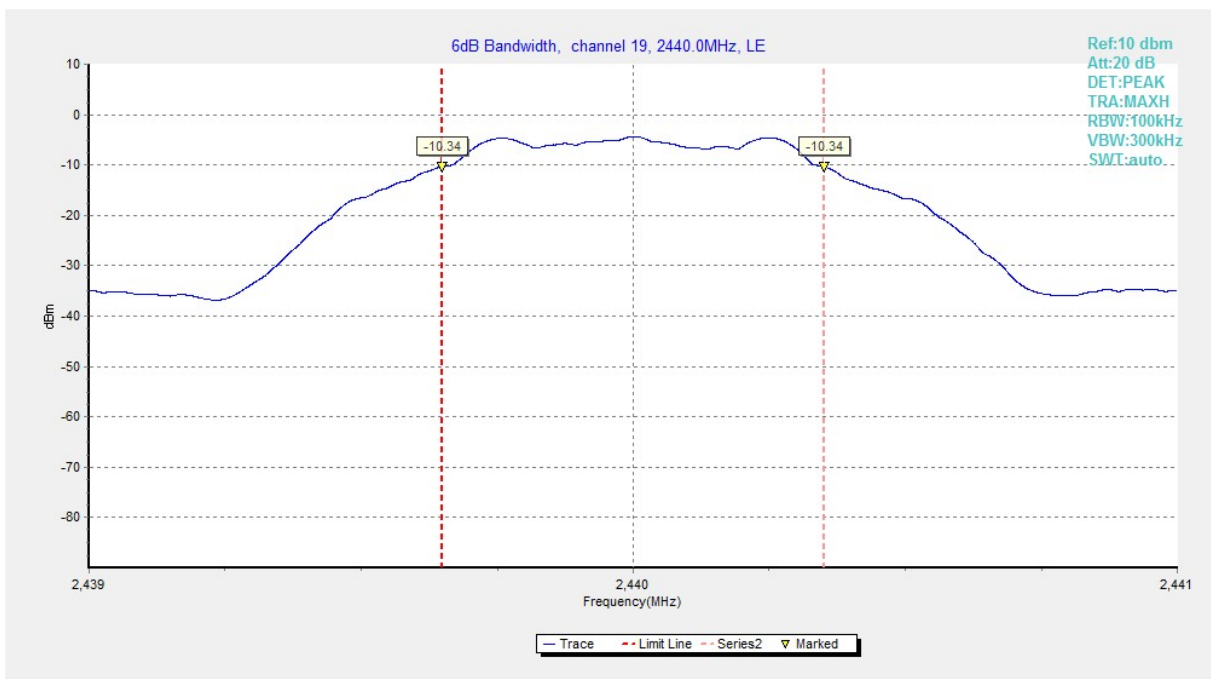


Fig.14 6dB Bandwidth (Ch 19), LE 1M

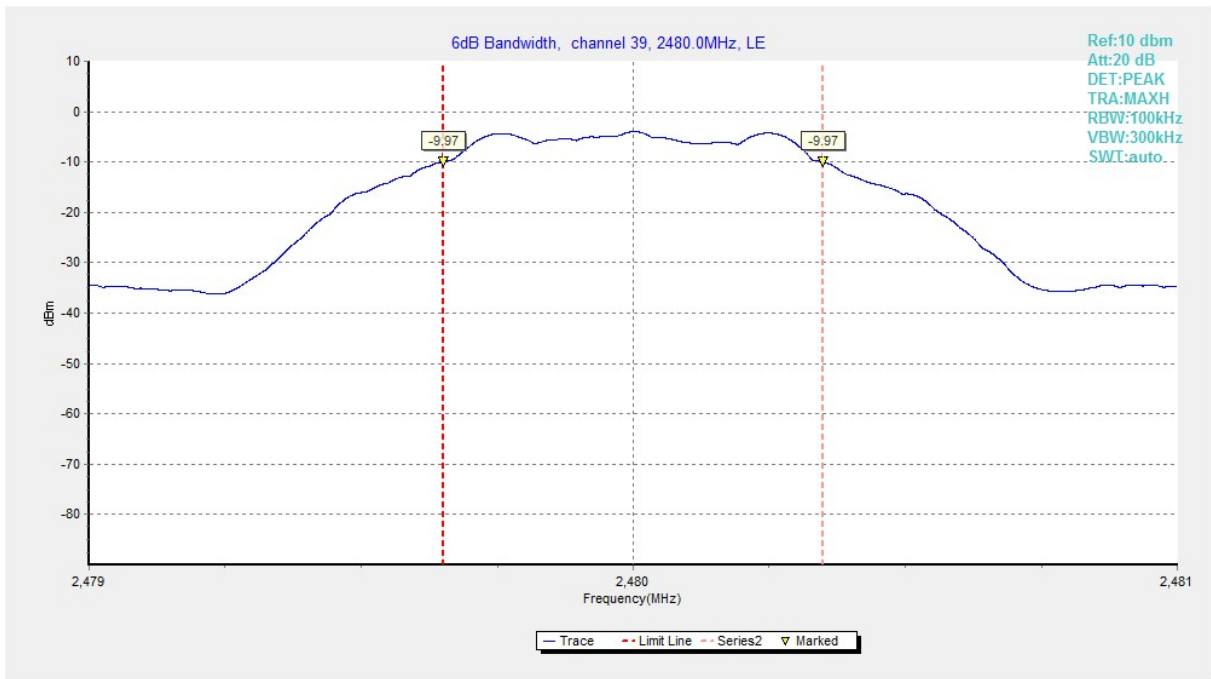


Fig.15 6dB Bandwidth (Ch 39), LE 1M

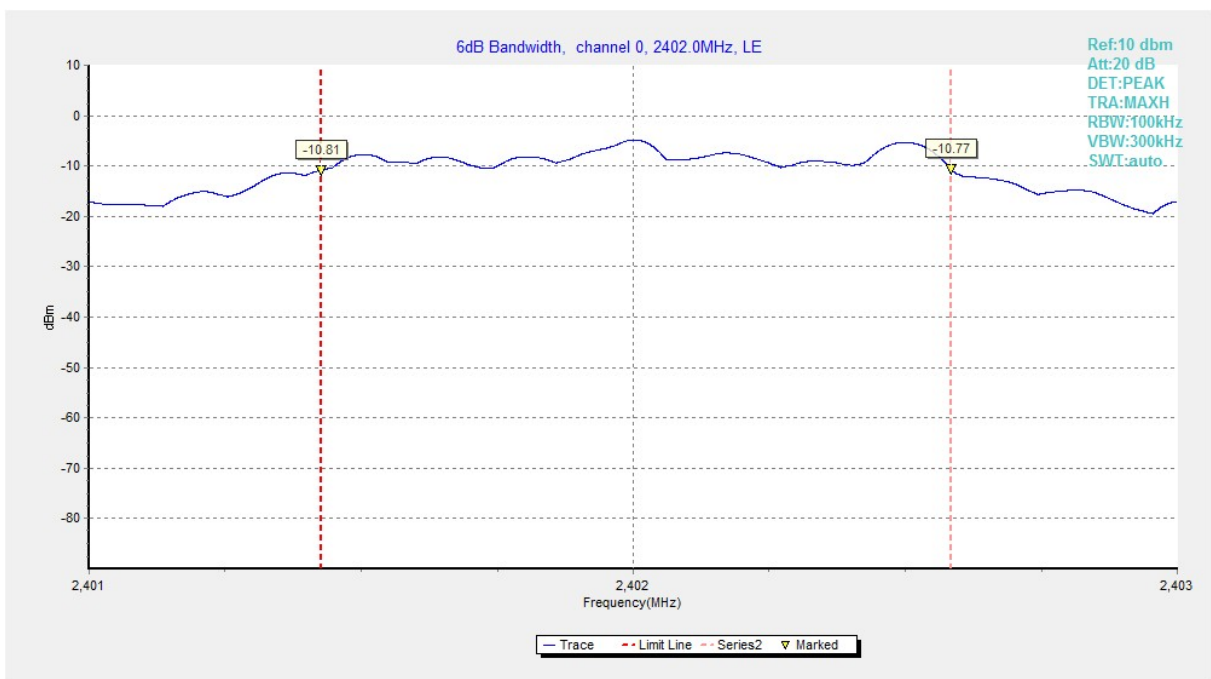


Fig.16 6dB Bandwidth (Ch 0), LE 2M

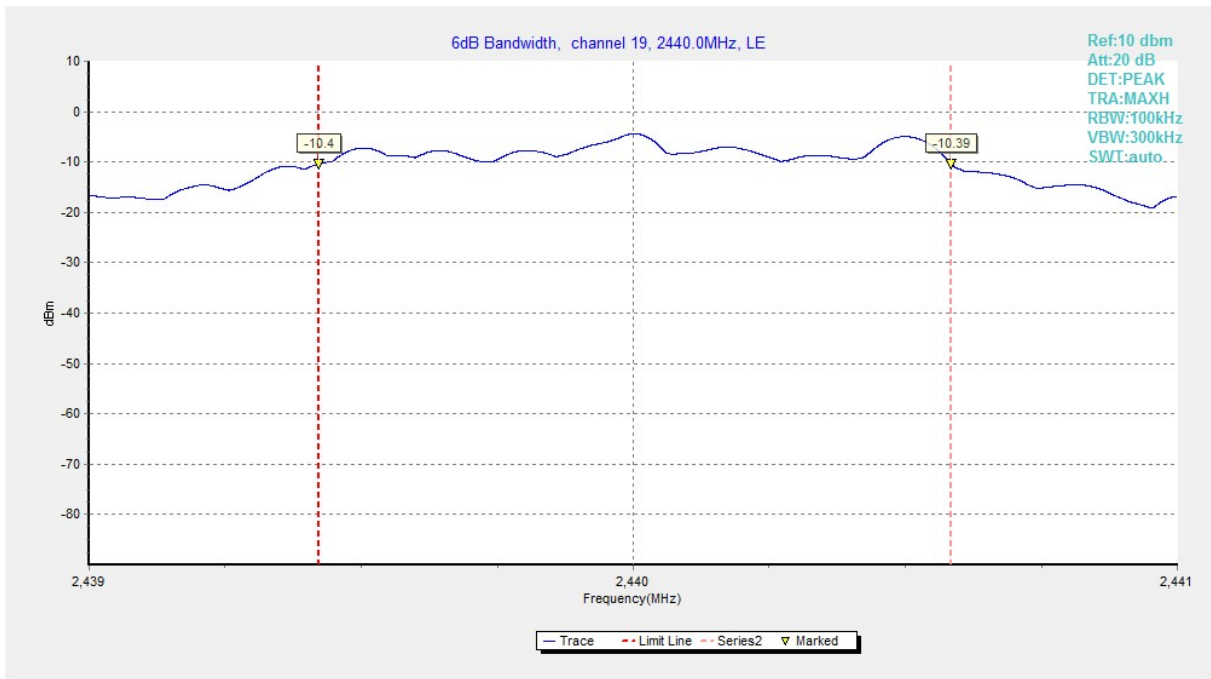


Fig.17 6dB Bandwidth (Ch 19), LE 2M

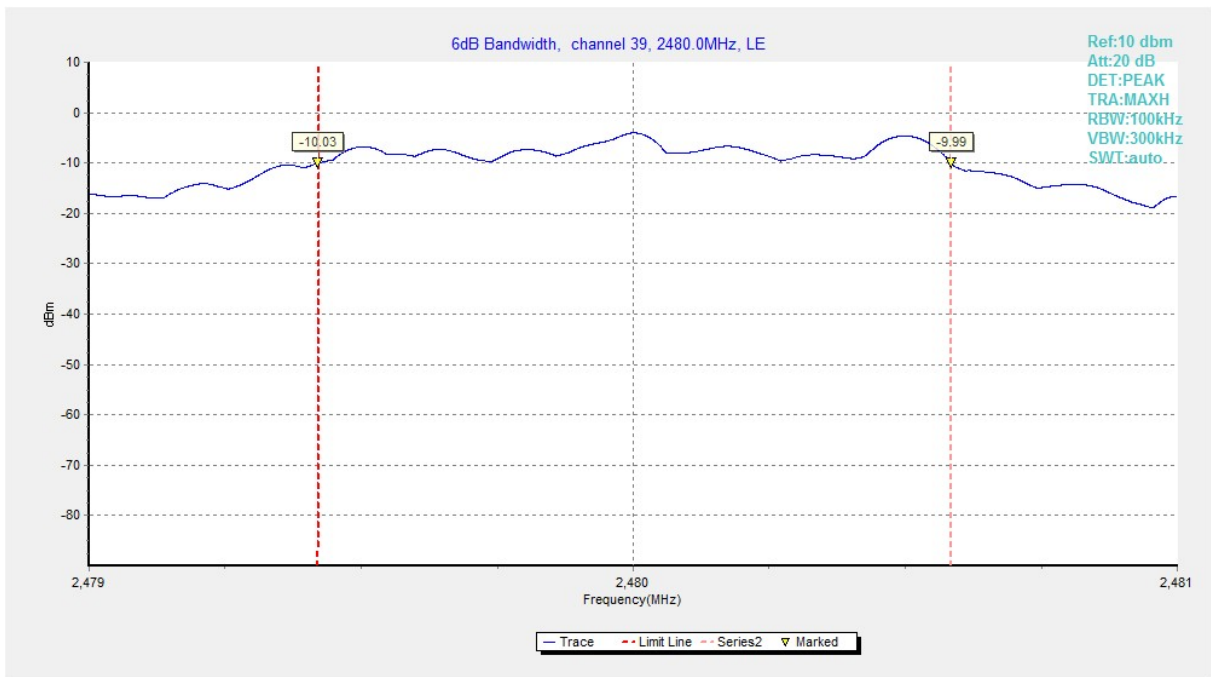


Fig.18 6dB Bandwidth (Ch 39), LE 2M



A.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Frequency (MHz)	Test Results (dBc)		Conclusion
LE 1M	2402(CH0)	Fig.19	58.34	P
	2480(CH39)	Fig.20	61.12	P
LE 2M	2402(CH0)	Fig.21	31.18	P
	2480(CH39)	Fig.22	56.73	P

See below for test graphs.

Conclusion: PASS

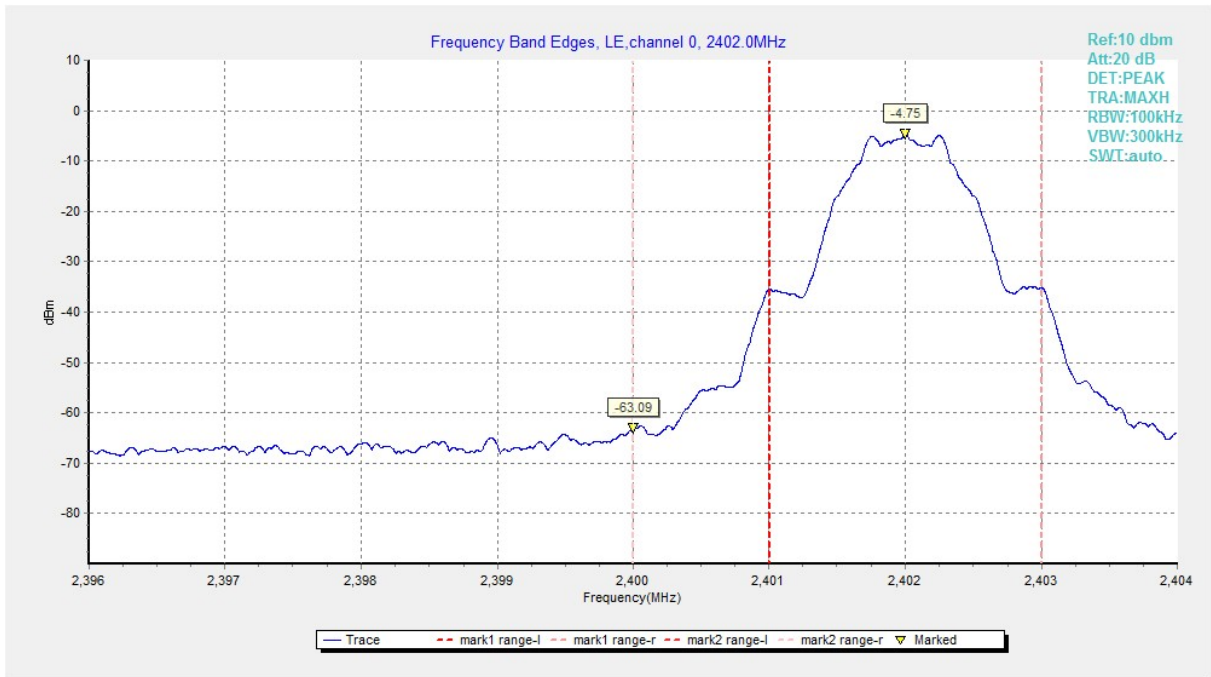


Fig.19 Band Edges (Ch 0), LE 1M

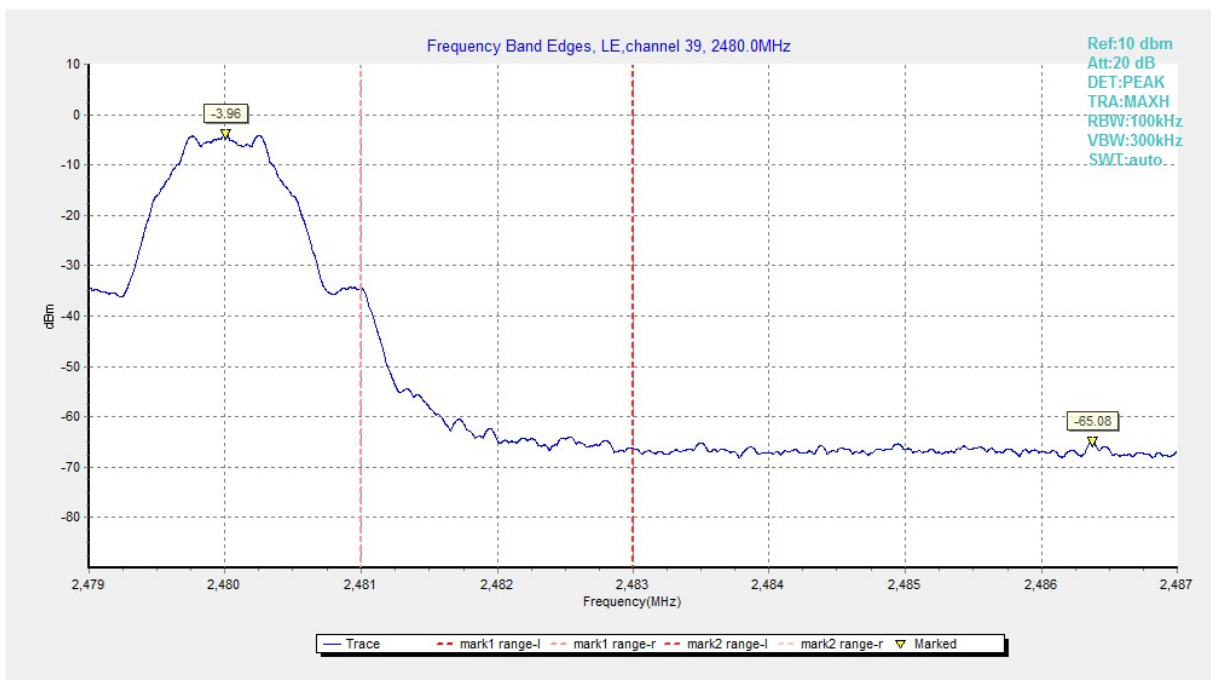


Fig.20 Band Edges (Ch 39), LE 1M

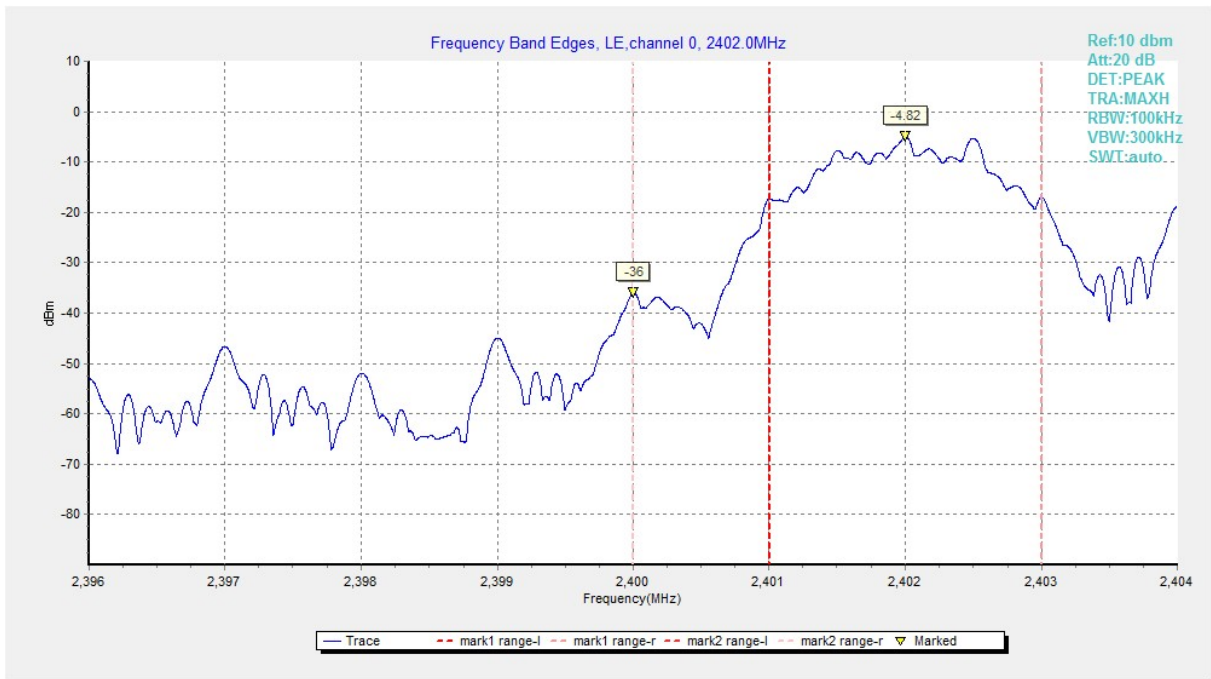


Fig.21 Band Edges (Ch 0), LE 2M

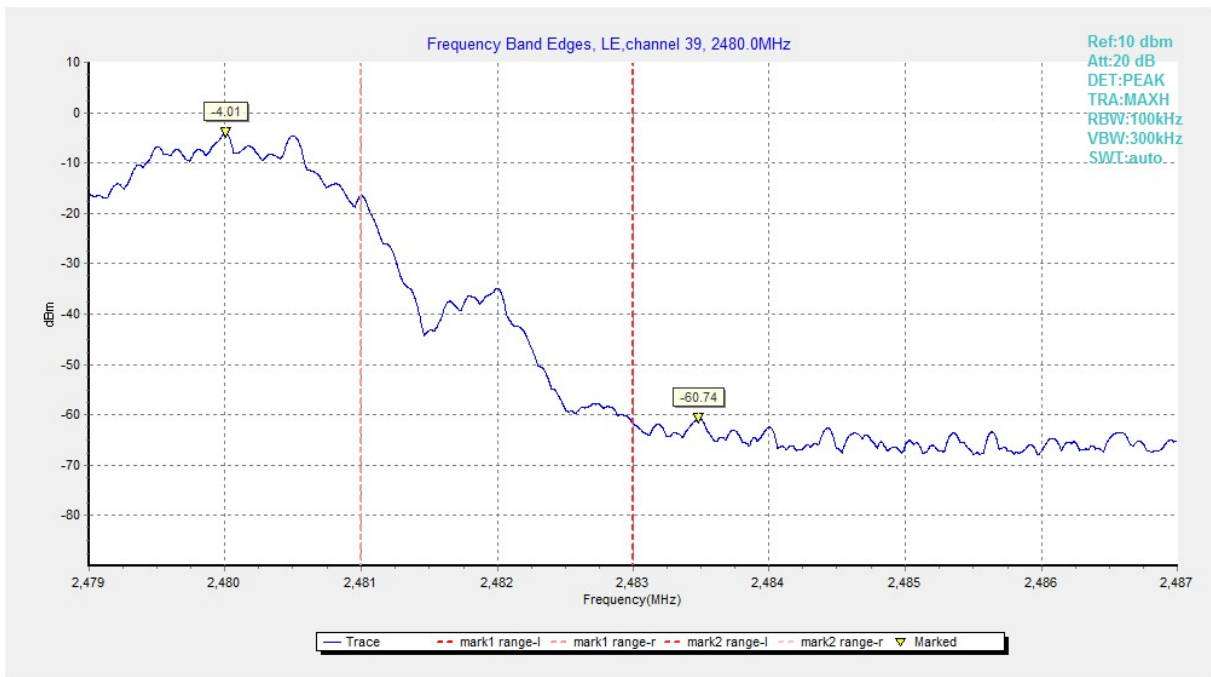


Fig.22 Band Edges (Ch 39), LE 2M



A.5 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
LE 1M	0	2.402 GHz	Fig.23	P
		1GHz -3GHz	Fig.24	P
		3GHz-10GHz	Fig.25	P
	19	2.440 GHz	Fig.26	P
		1GHz -3GHz	Fig.27	P
		3GHz-10GHz	Fig.28	P
	39	2.480 GHz	Fig.29	P
		1GHz -3GHz	Fig.30	P
		3GHz-10GHz	Fig.31	P
	All channels	30MHz-1GHz	Fig.32	P
10GHz-26GHz		Fig.33	P	
LE 2M	0	2.402 GHz	Fig.34	P
		1GHz -3GHz	Fig.35	P
		3GHz-10GHz	Fig.36	P
	19	2.440 GHz	Fig.37	P
		1GHz -3GHz	Fig.38	P
		3GHz-10GHz	Fig.39	P
	39	2.480 GHz	Fig.40	P
		1GHz -3GHz	Fig.41	P
		3GHz-10GHz	Fig.42	P
	All channels	30MHz-1GHz	Fig.43	P
		10GHz-26GHz	Fig.44	P

See below for test graphs.

Conclusion: Pass

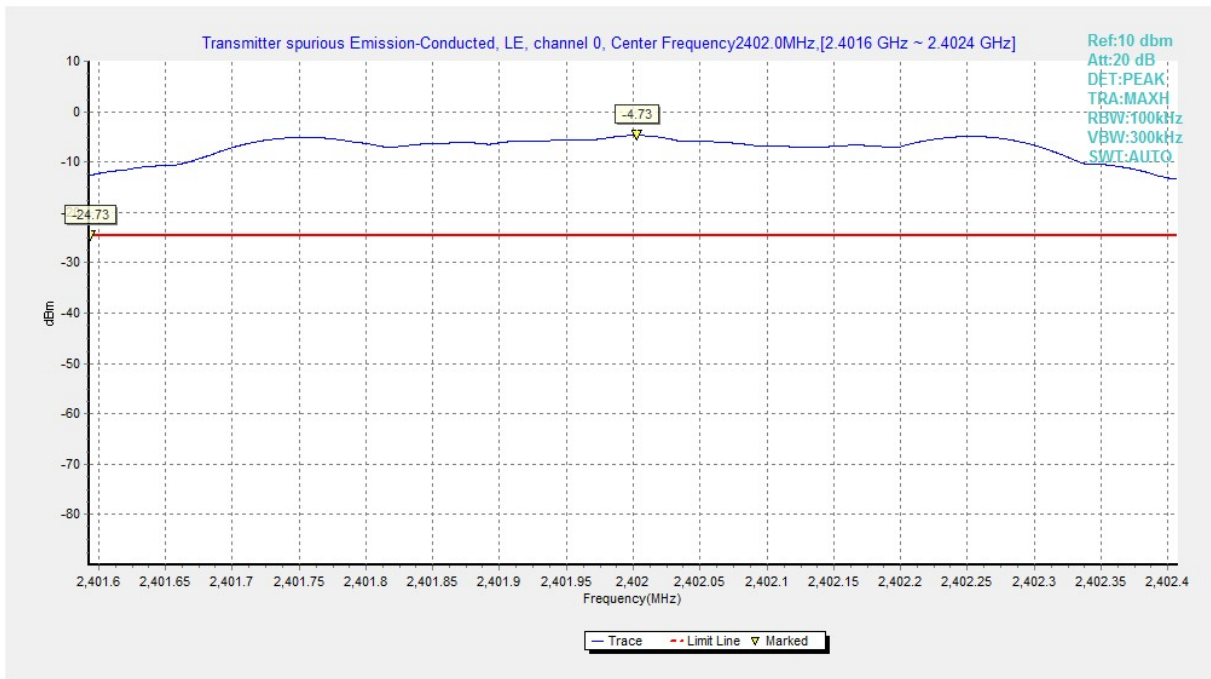


Fig.23 Conducted Spurious Emission (Ch0, Center Frequency), LE 1M

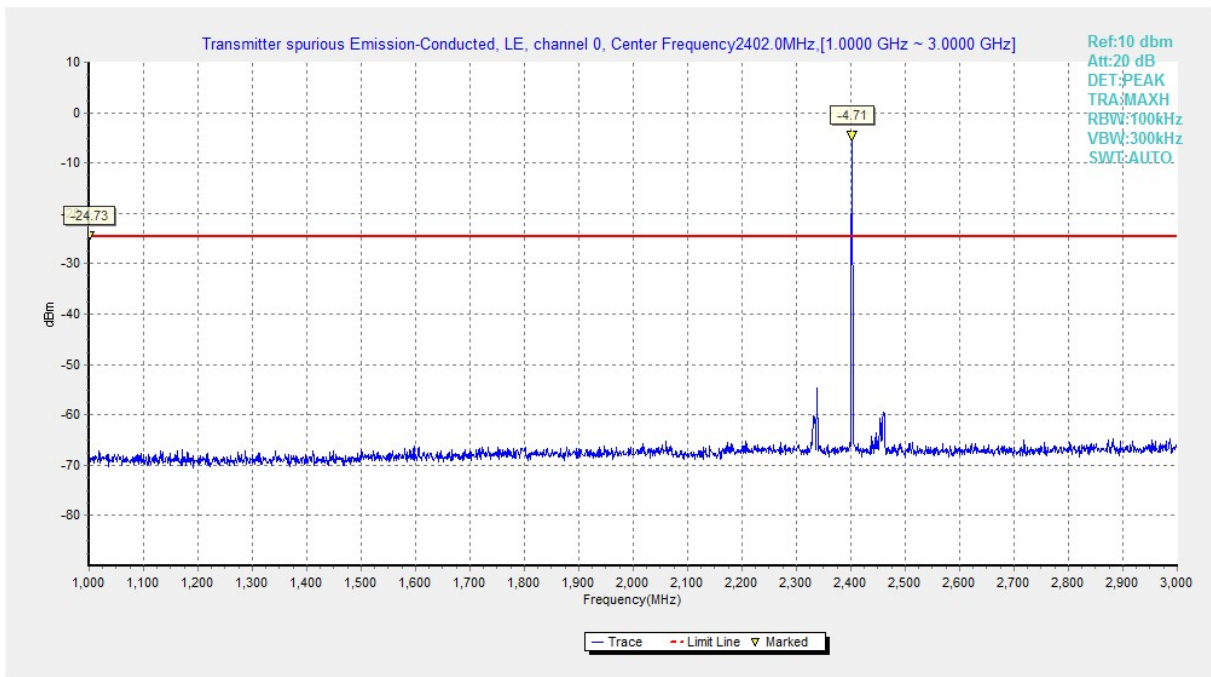


Fig.24 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 1M

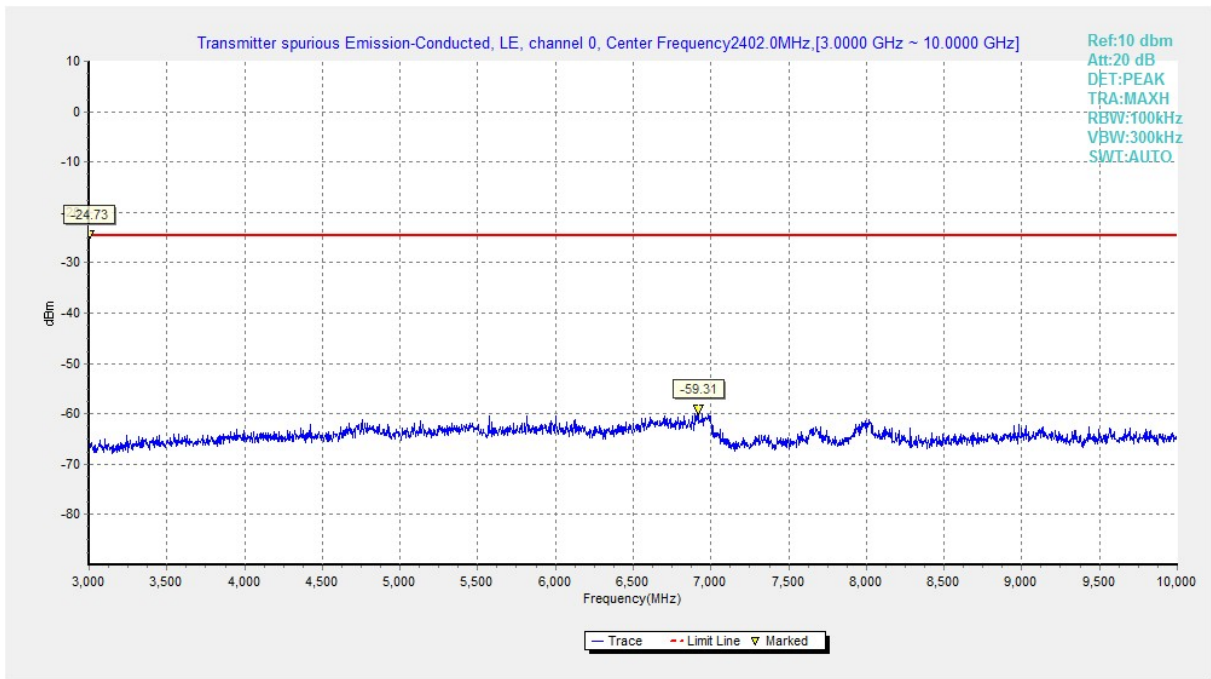


Fig.25 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 1M

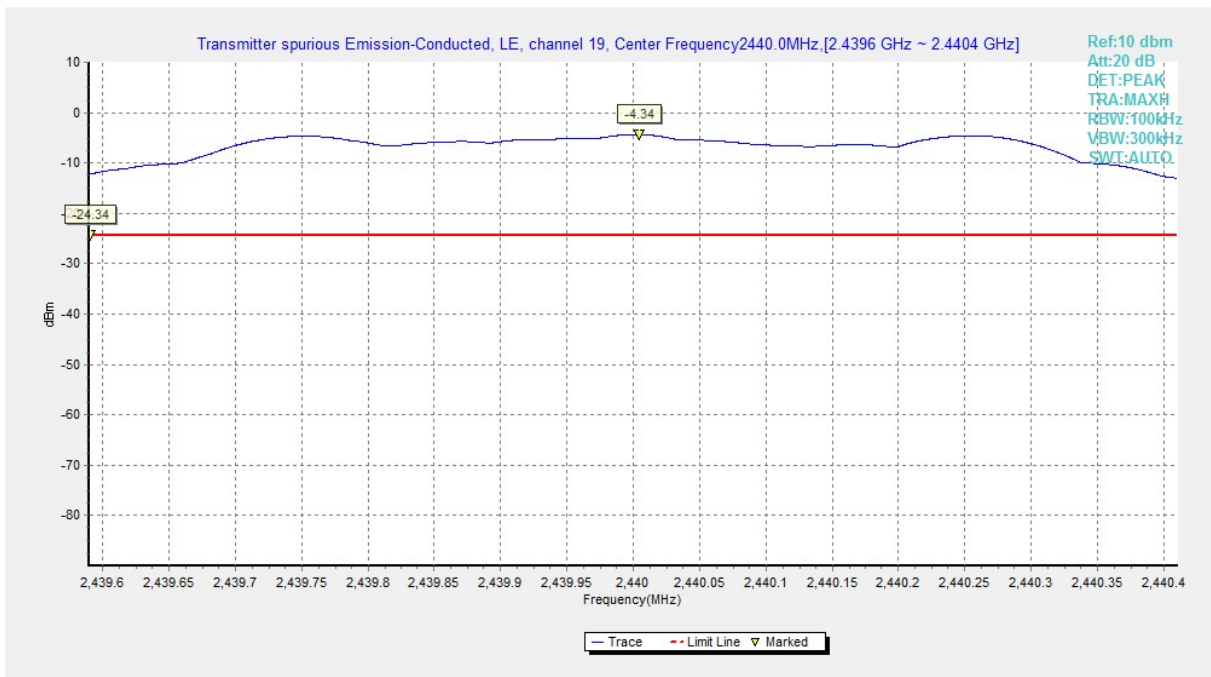


Fig.26 Conducted Spurious Emission (Ch19, Center Frequency), LE 1M

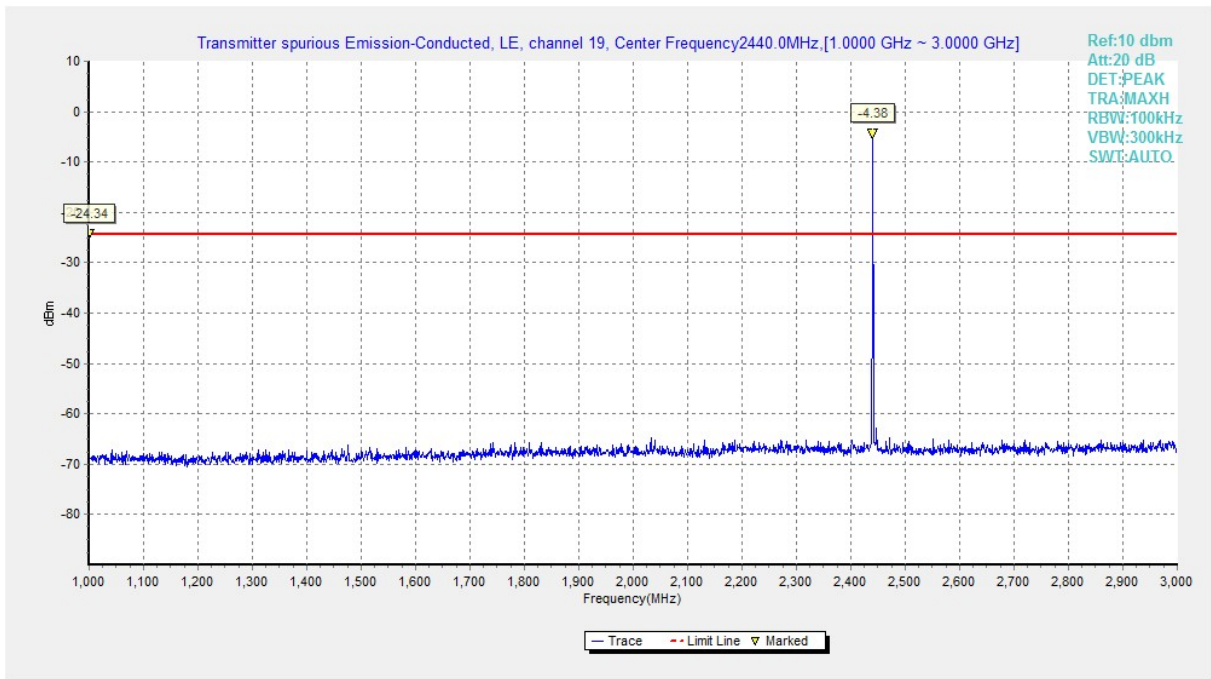


Fig.27 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 1M

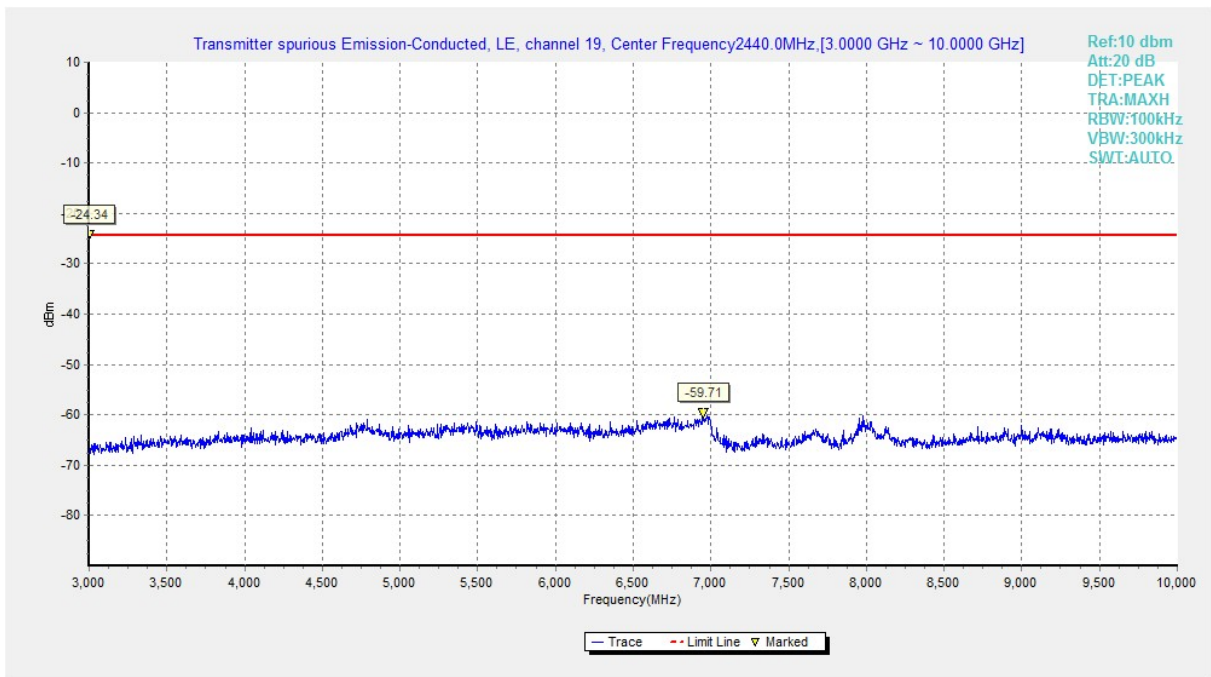


Fig.28 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 1M

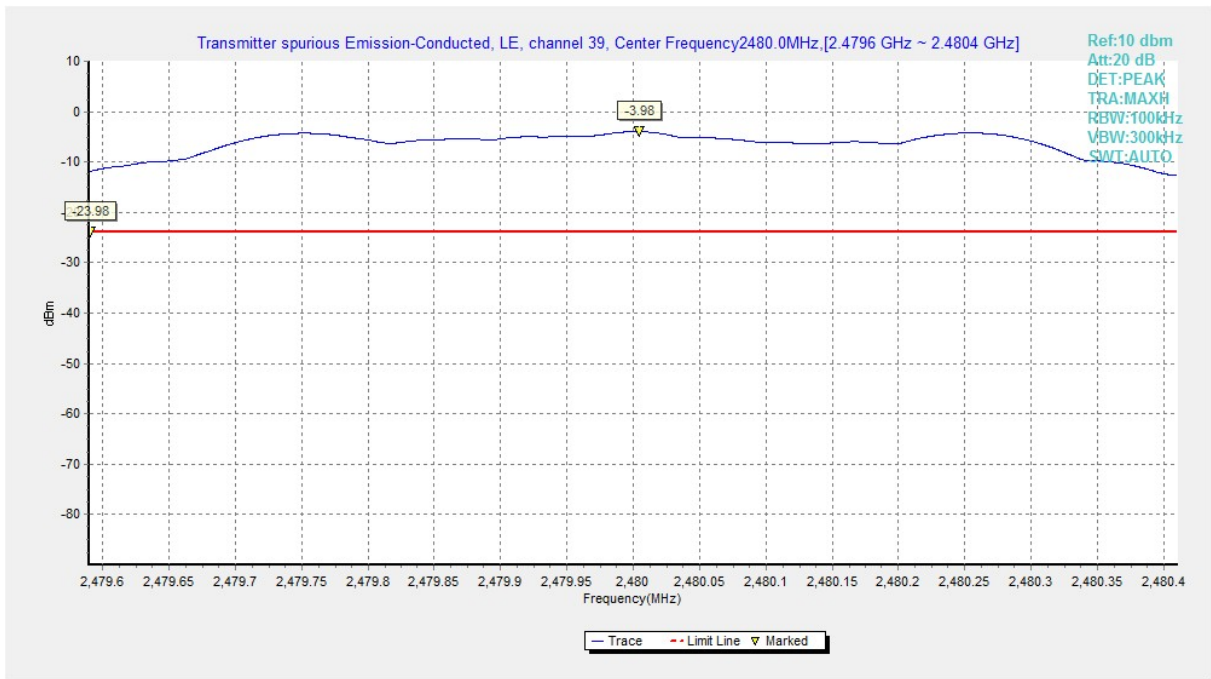


Fig.29 Conducted Spurious Emission (Ch39, Center Frequency), LE 1M

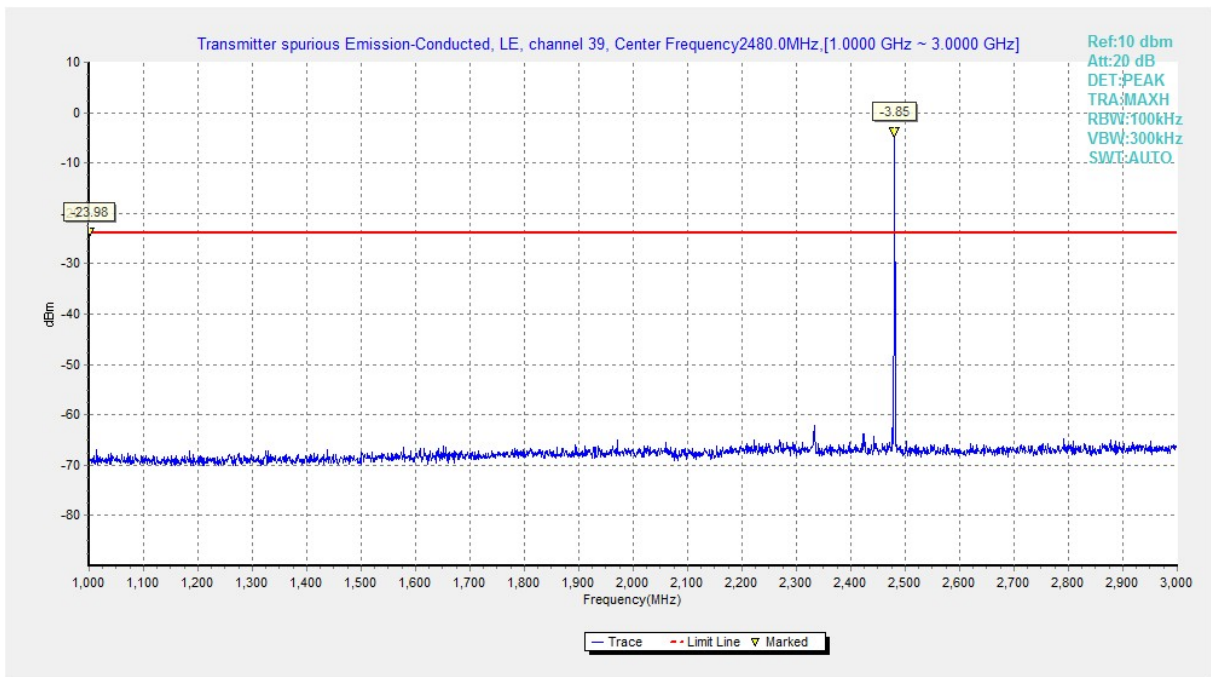


Fig.30 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE 1M

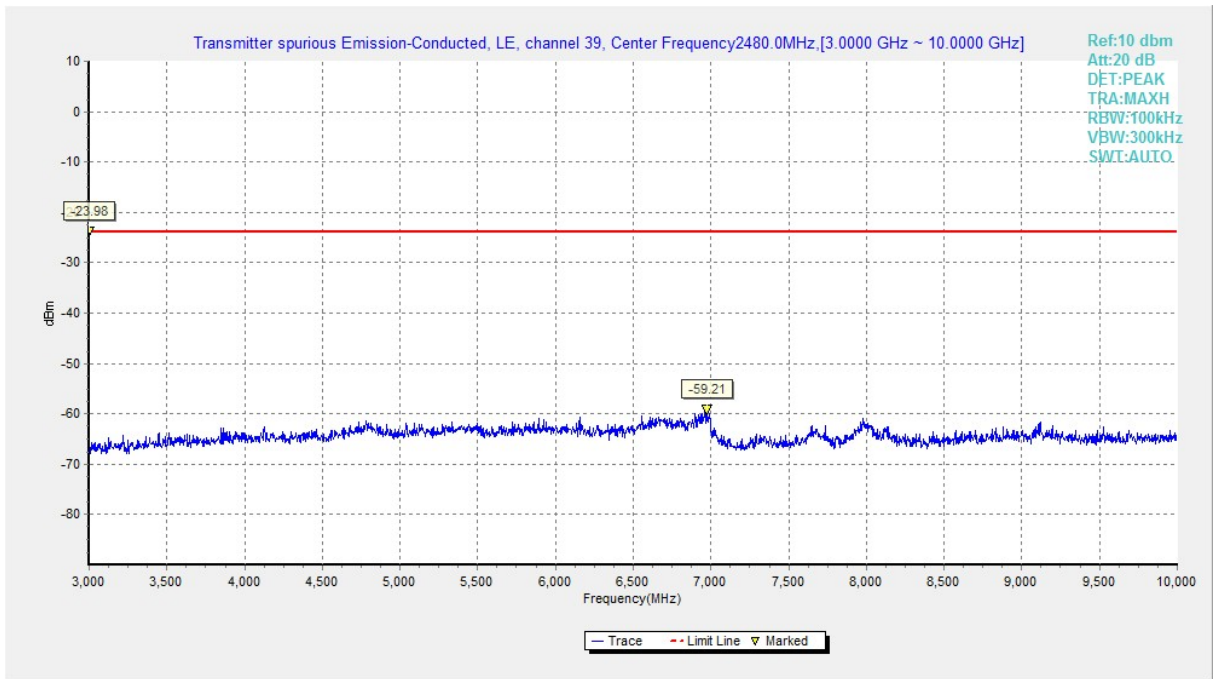


Fig.31 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE 1M

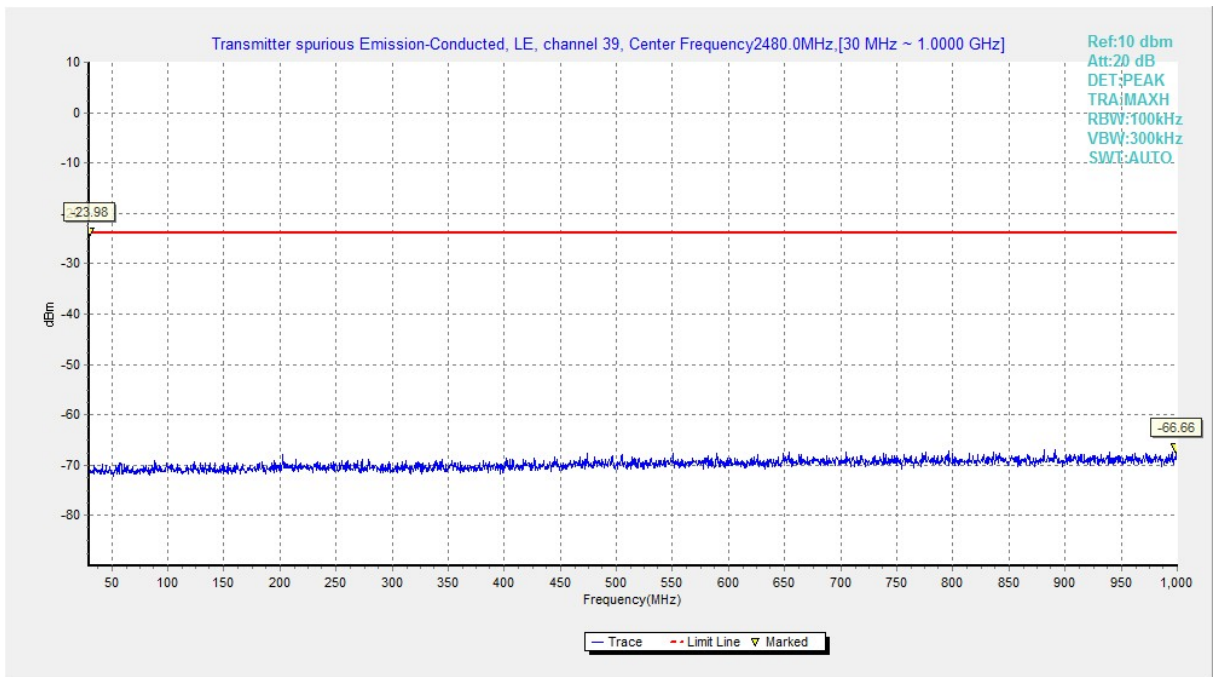


Fig.32 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE 1M

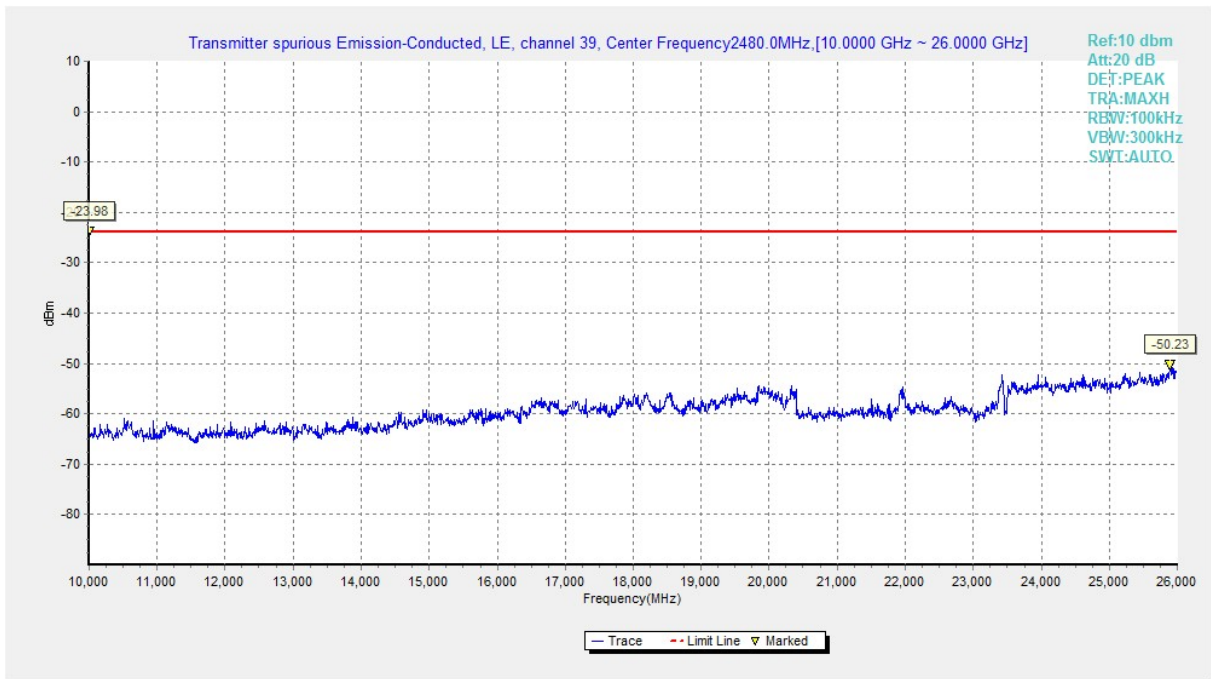


Fig.33 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE 1M

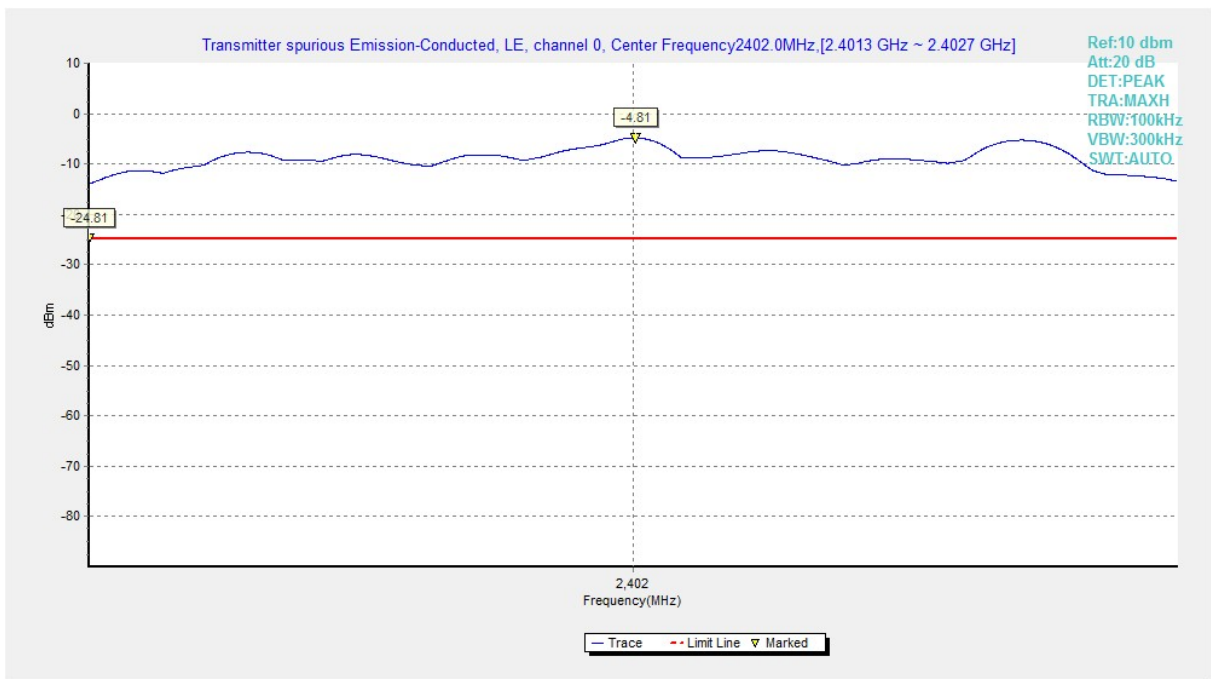


Fig.34 Conducted Spurious Emission (Ch0, Center Frequency), LE 2M

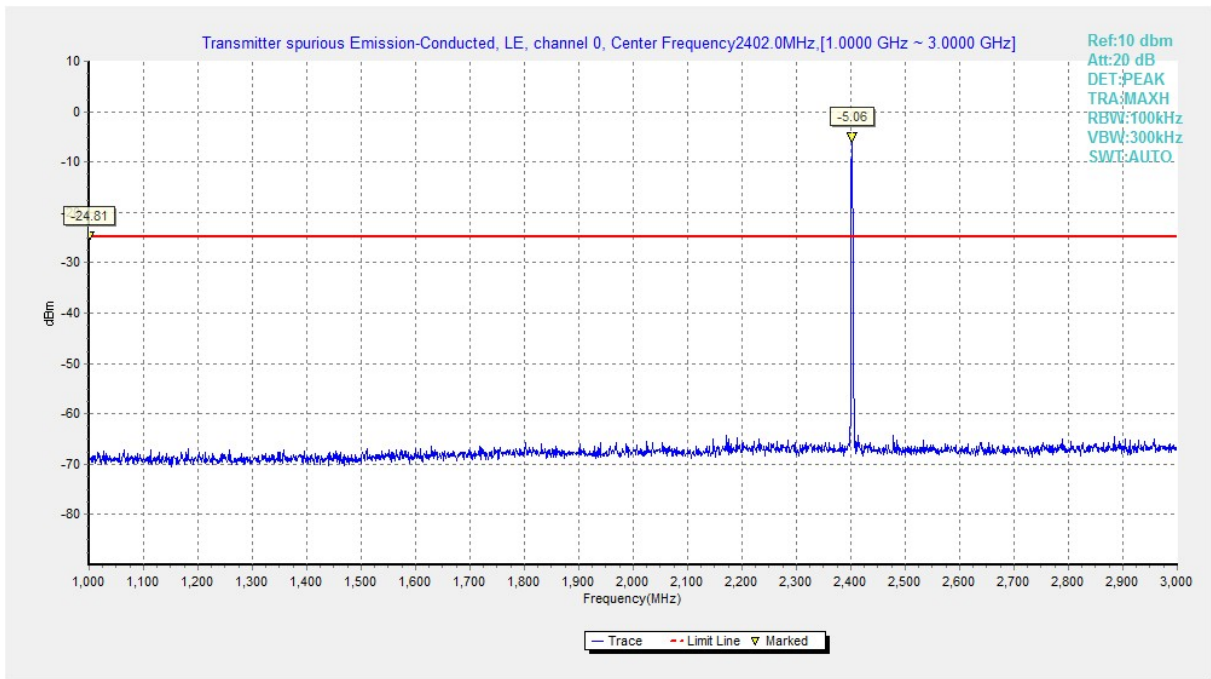


Fig.35 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 2M

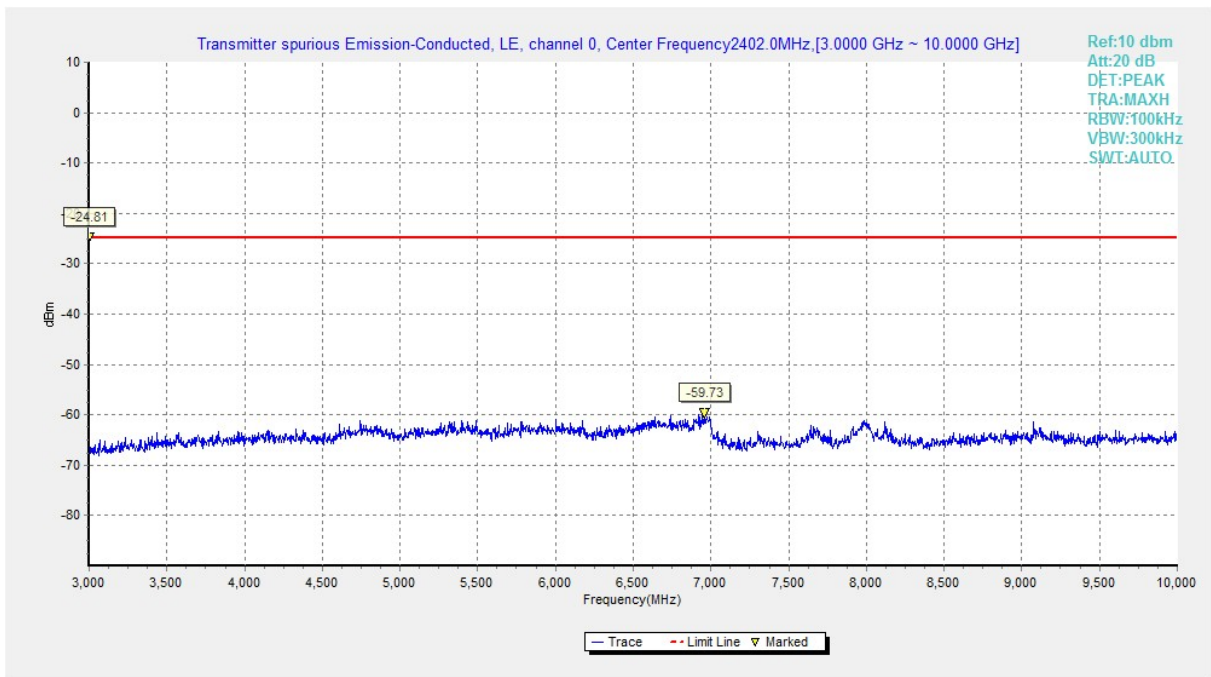


Fig.36 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 2M

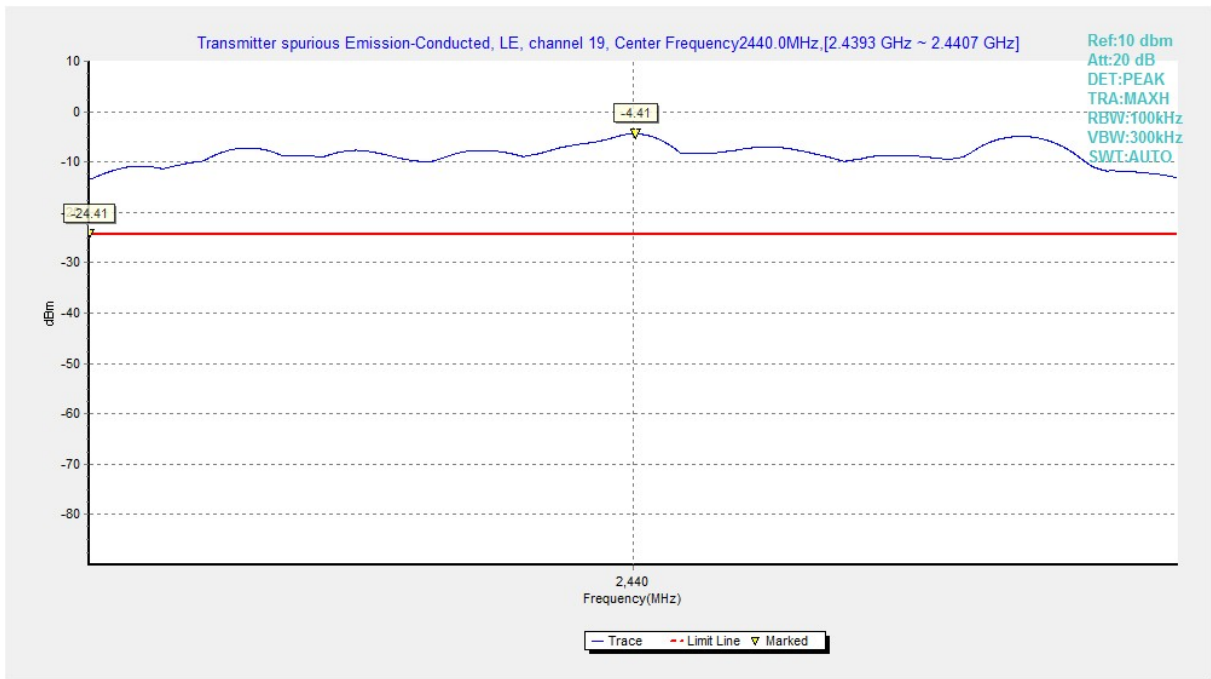


Fig.37 Conducted Spurious Emission (Ch19, Center Frequency), LE 2M

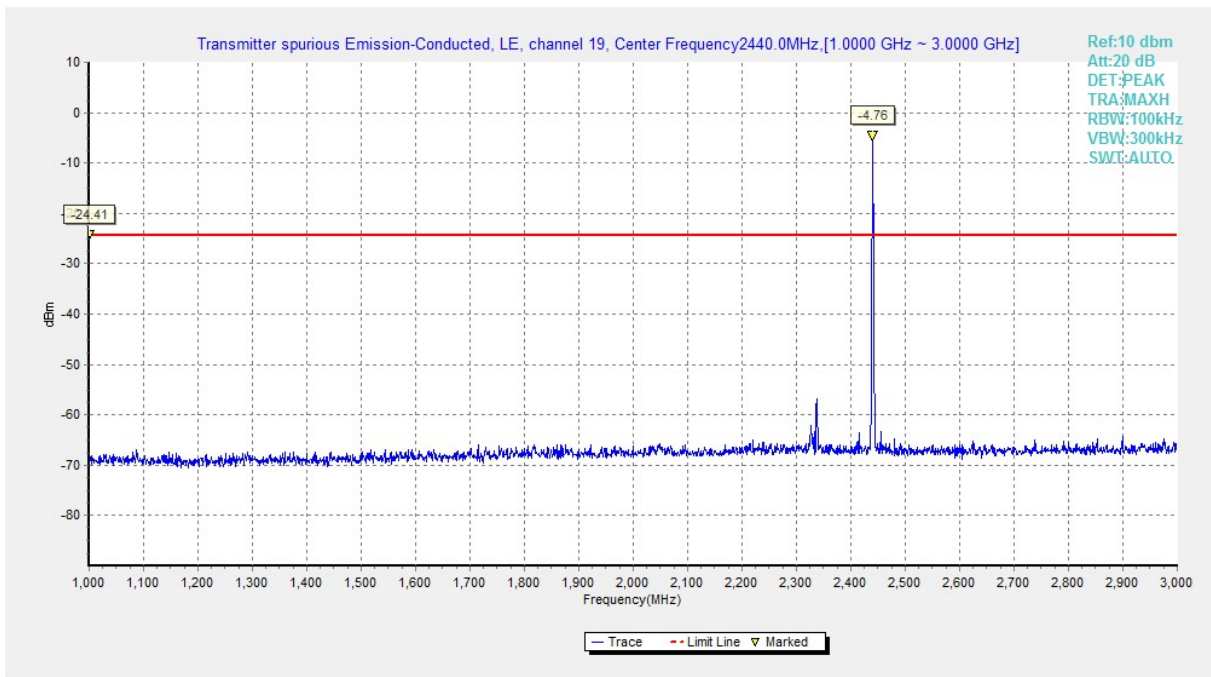


Fig.38 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 2M

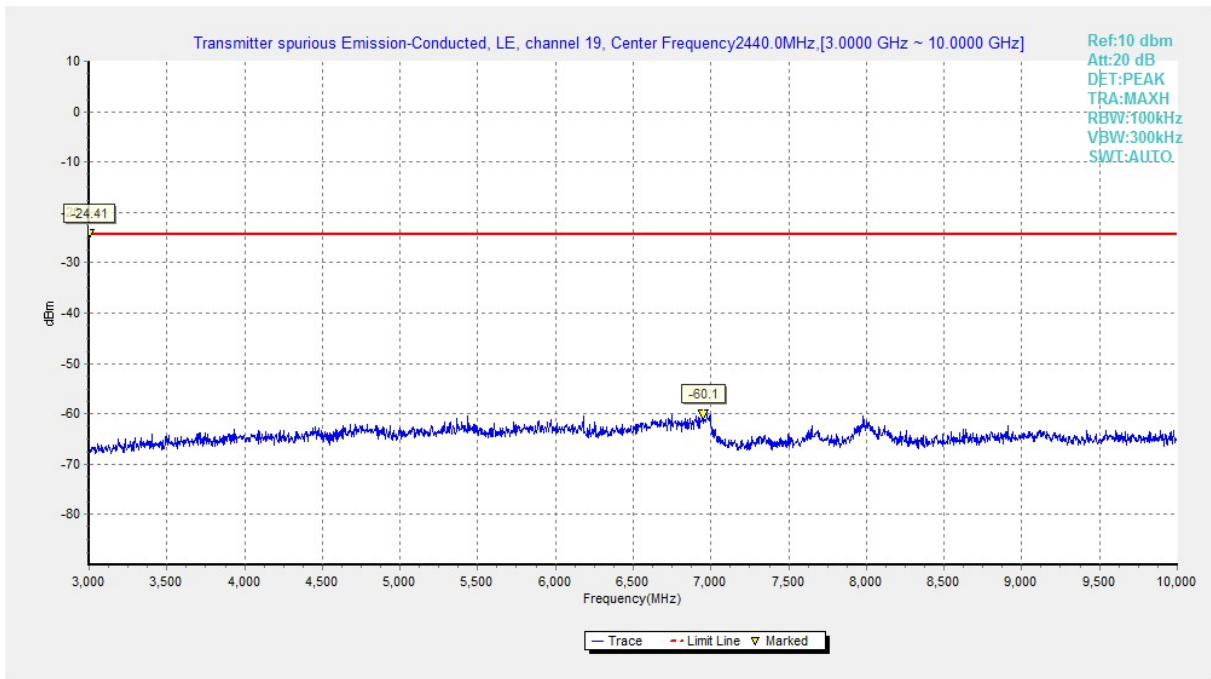


Fig.39 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 2M

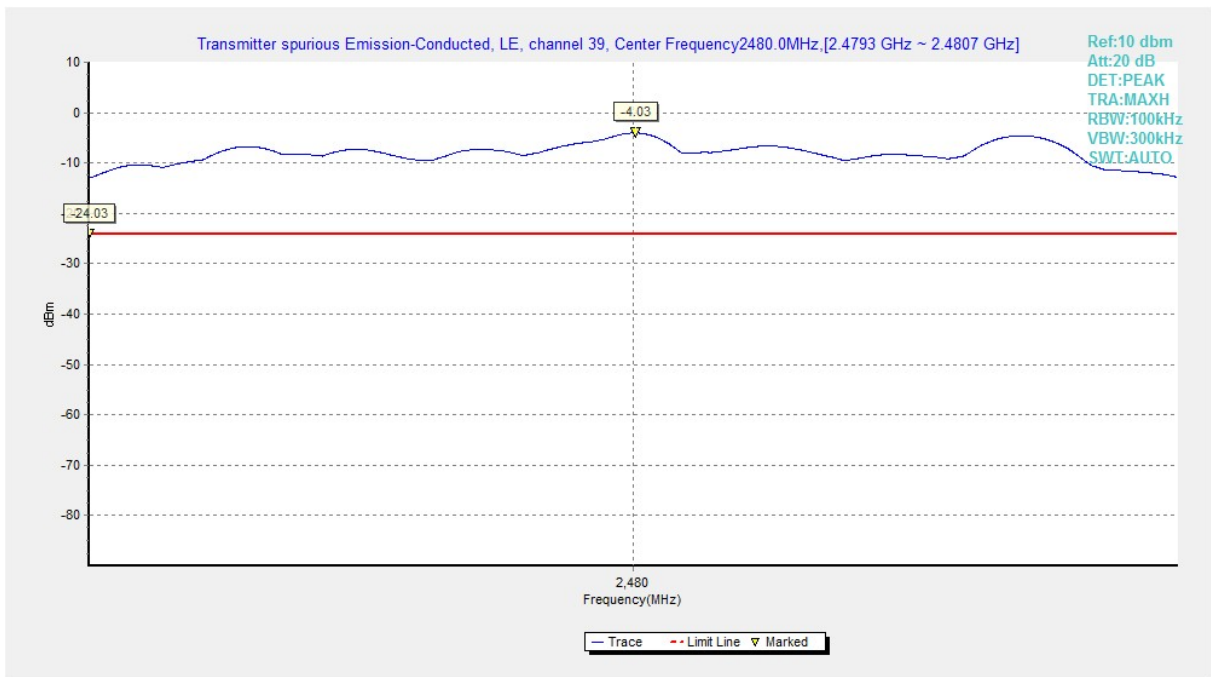


Fig.40 Conducted Spurious Emission (Ch39, Center Frequency), LE 2M