



No. I21Z60176-SEM01

For

TCL Communication Ltd.

LTE/WCDMA/GSM mobile phone

Model name: 6056A/6156A

With

Hardware Version: PIO

Software Version: AN55

FCC ID: 2ACCJB148

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

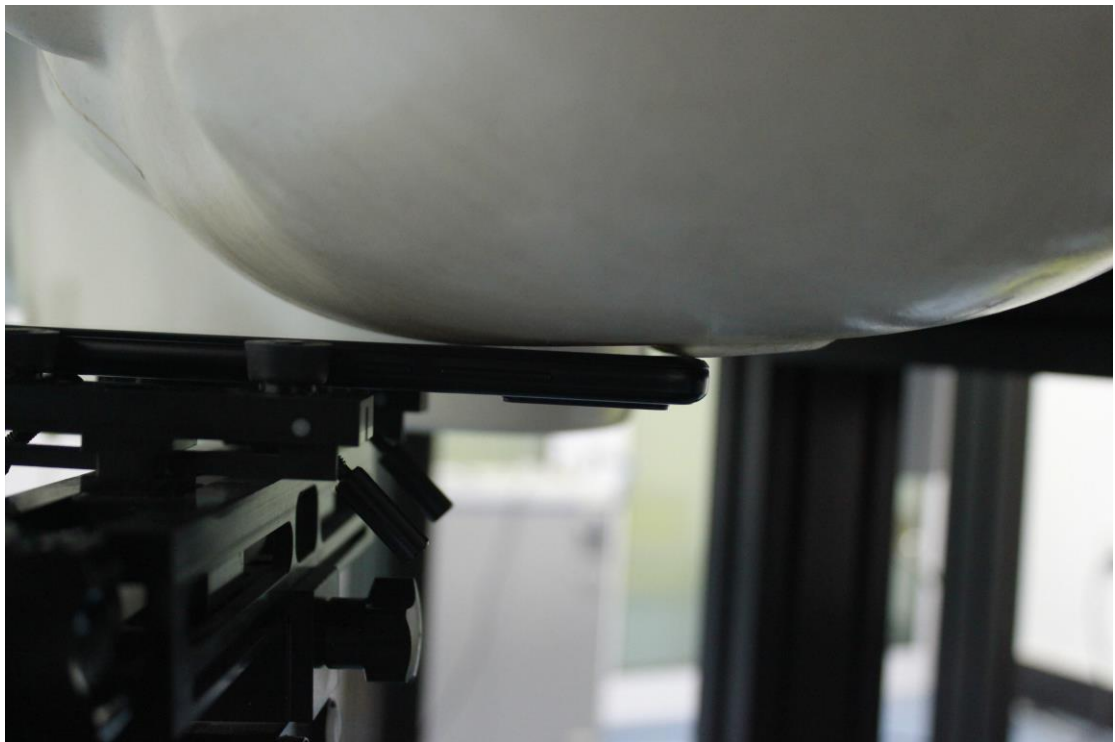


Picture 2: Left Head Touch Cheek Position

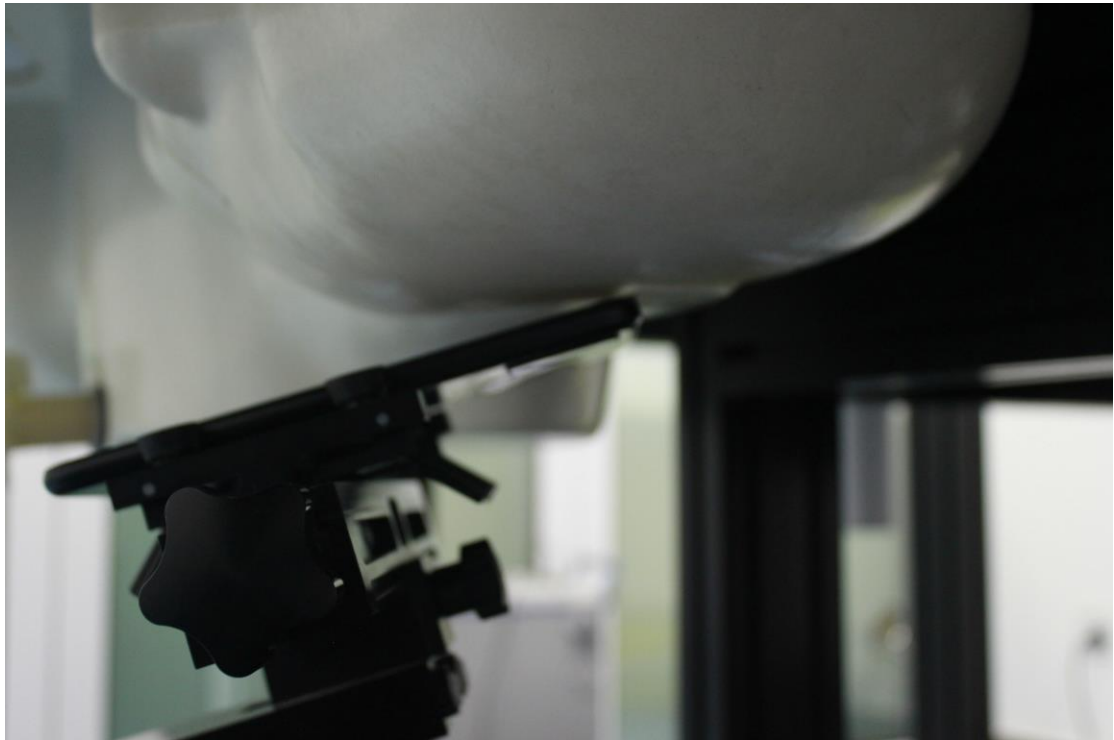

Picture 3: Left Head Tilt 15° Position

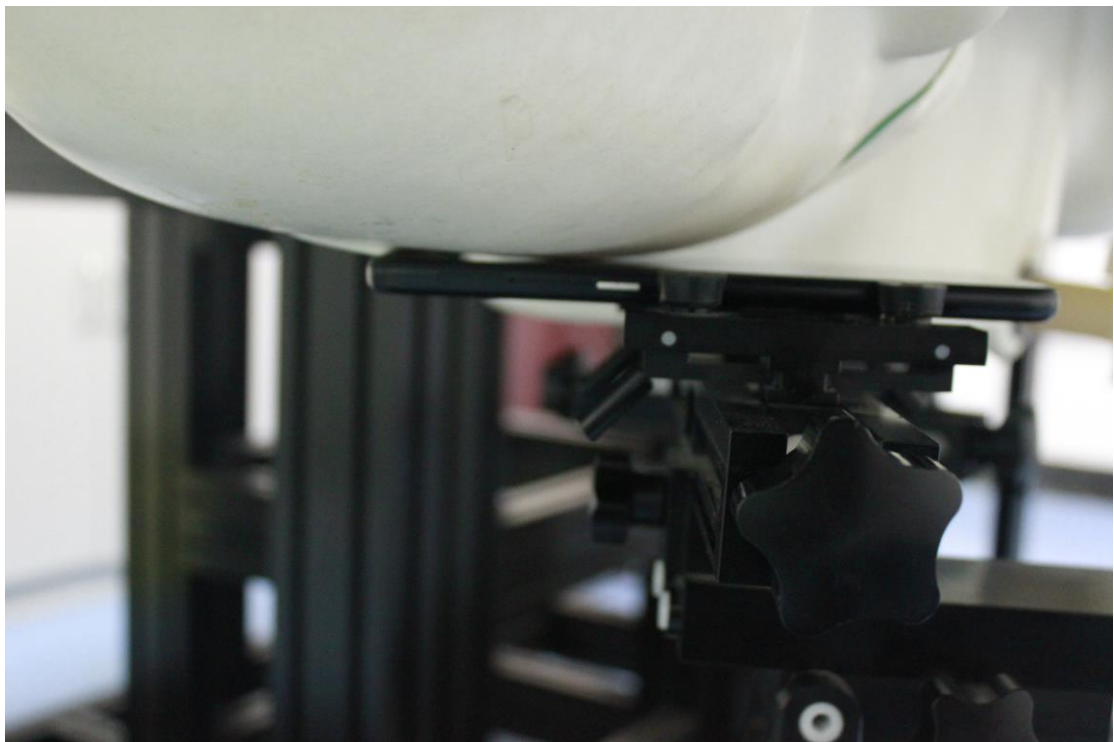


Picture 4: Right Head Touch Cheek Position

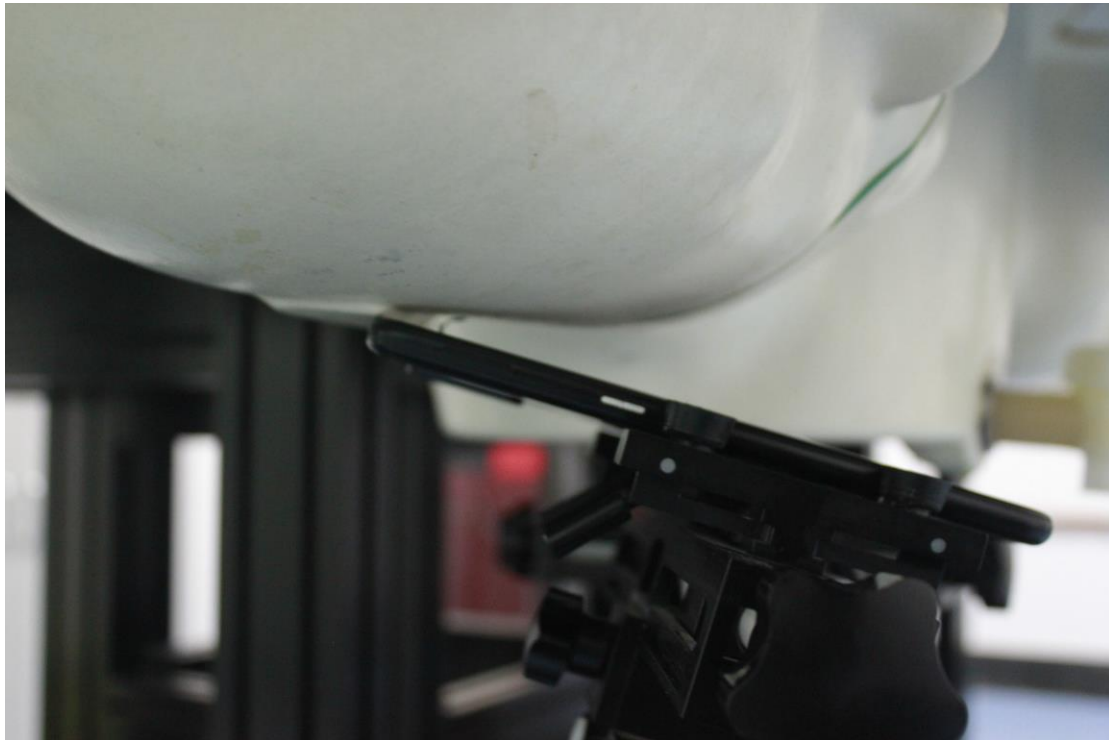


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 108 test positions all with the distance =0/10/15mm between the EUT and the phantom bottom:

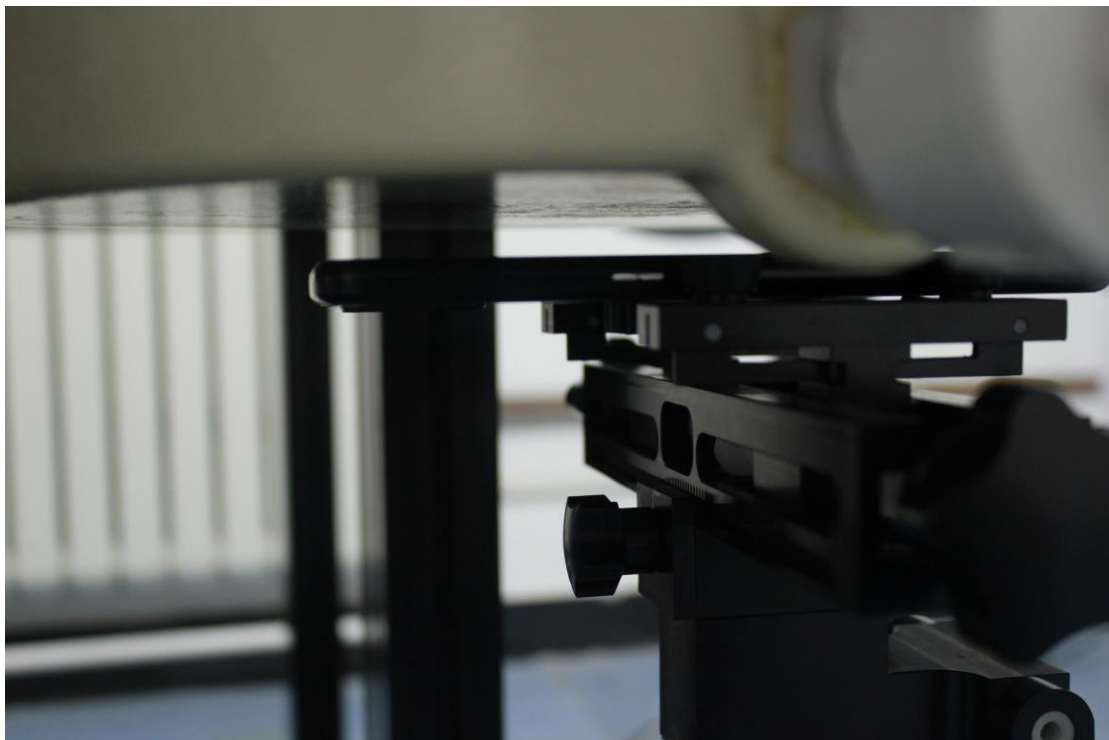


Picture 6: Front 10mm

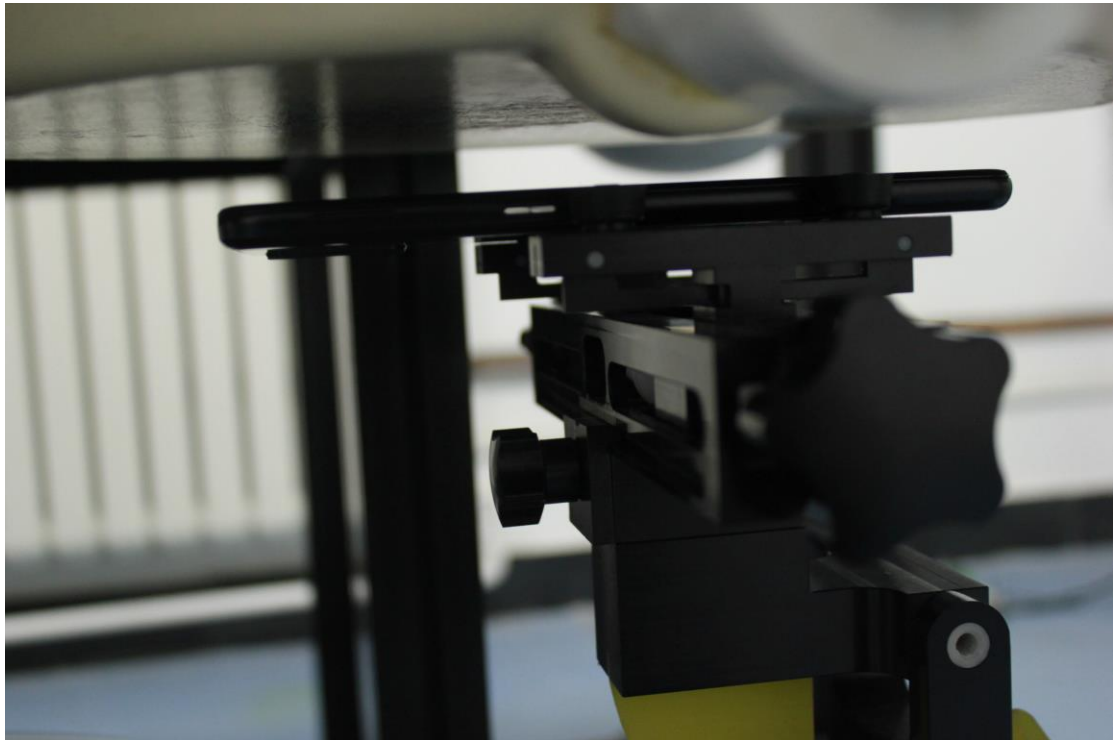


Picture 7: Front 15mm

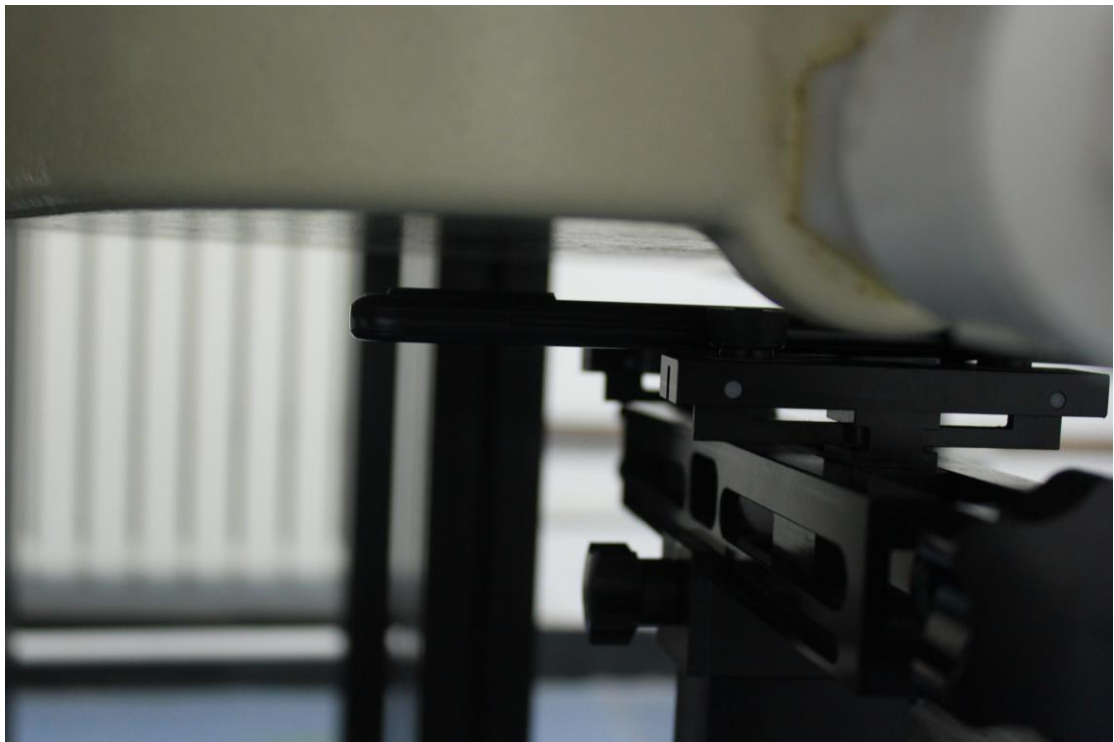


Picture 8: Rear 10mm

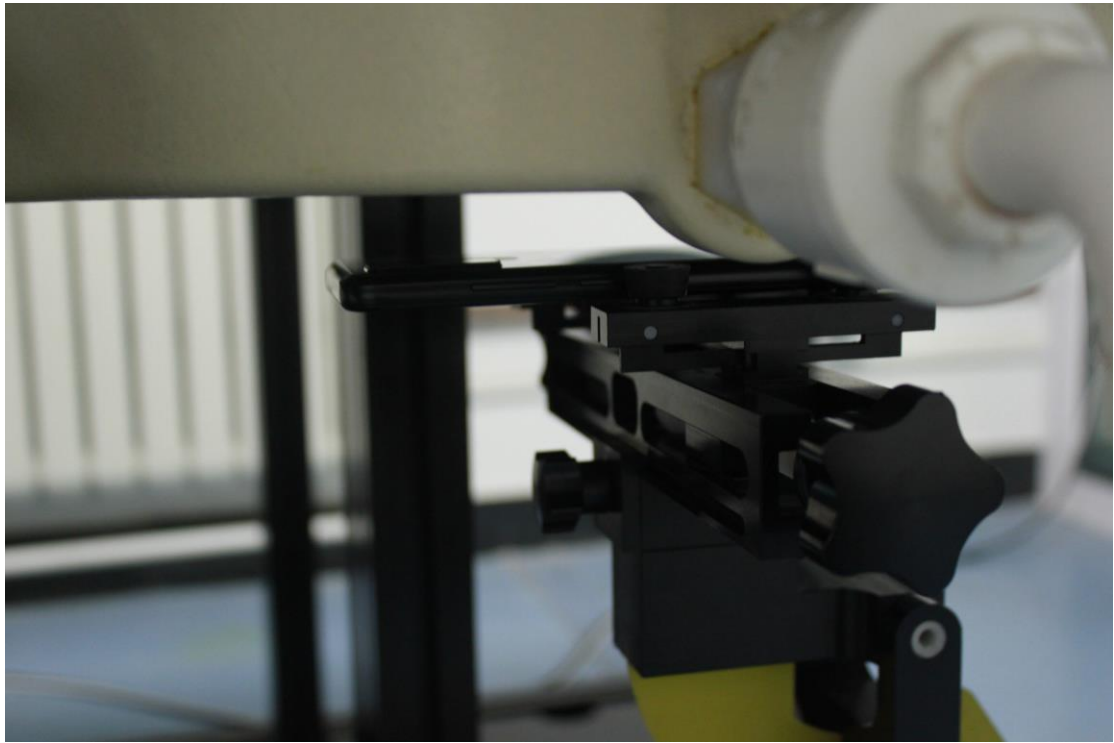


Picture 9: Rear 15mm

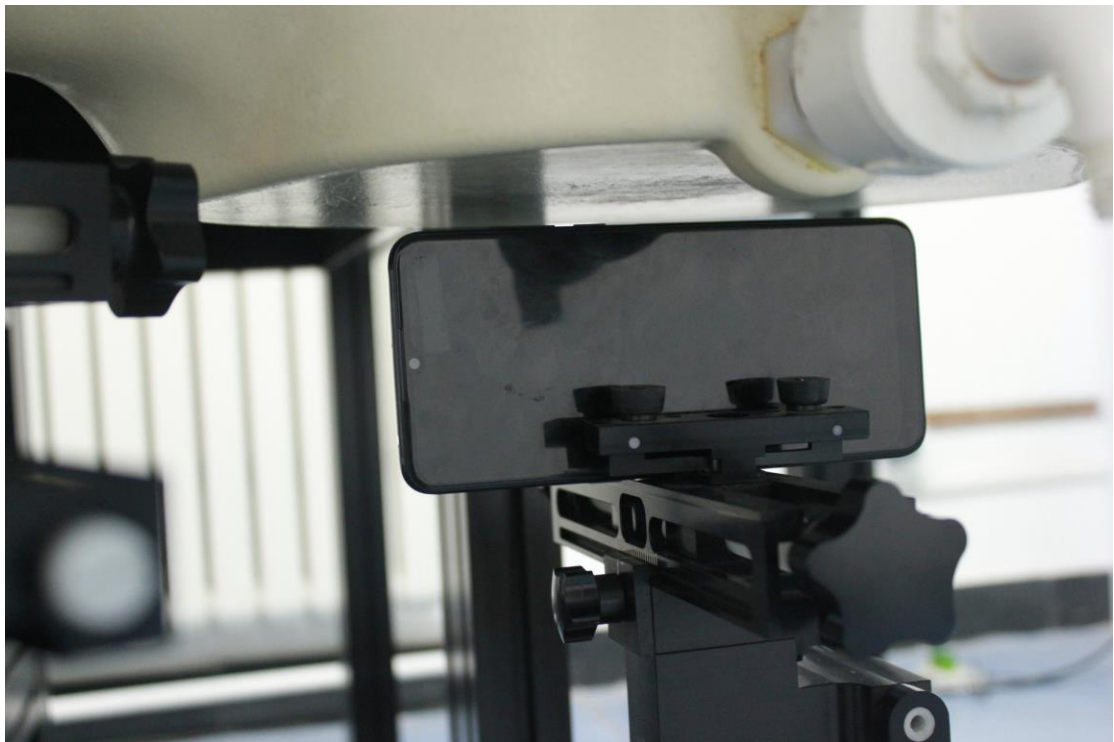

Picture 10: Left 10mm

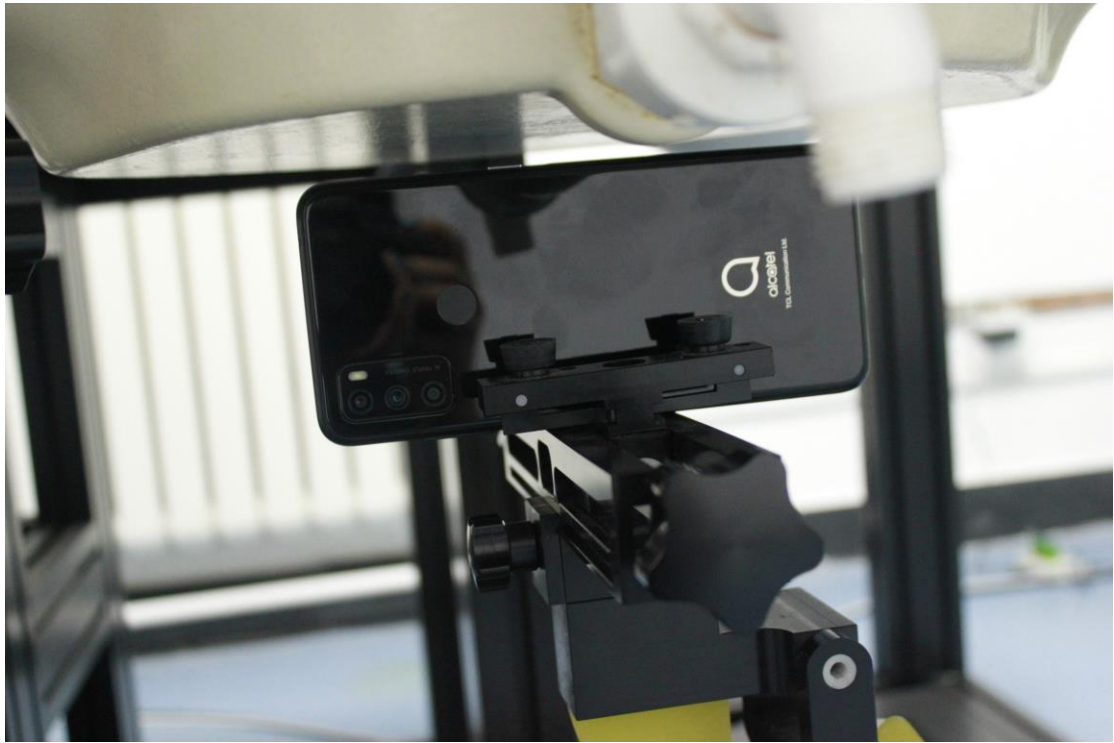


Picture 11: Right 10mm

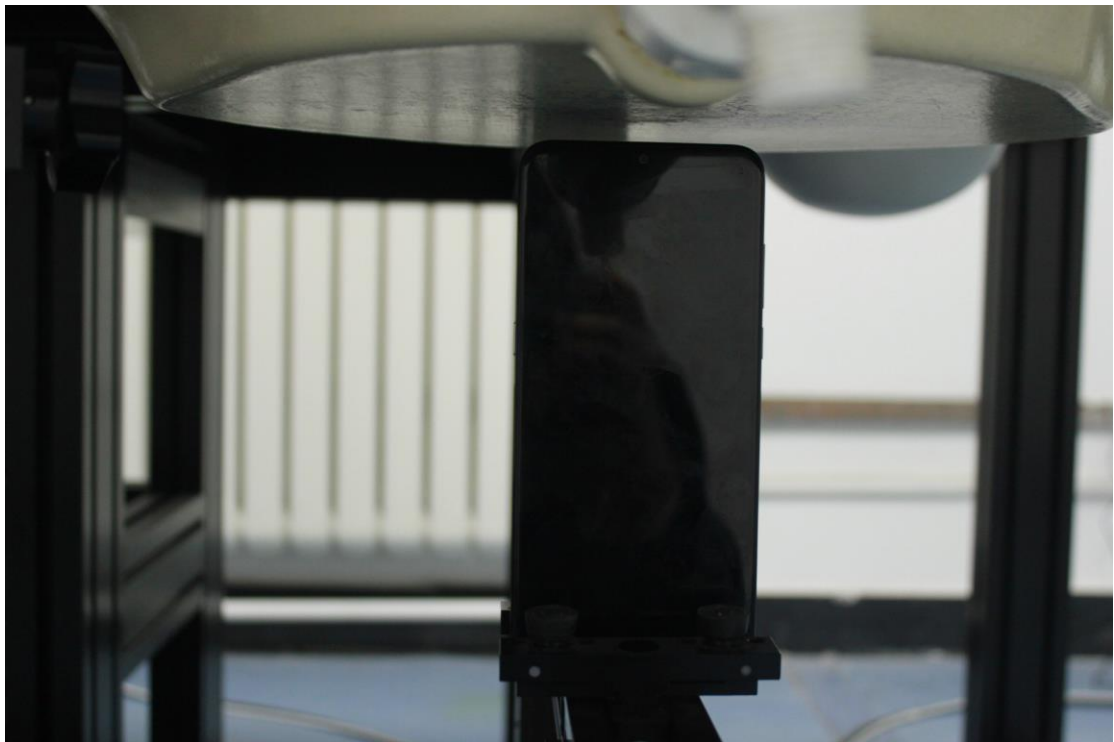


Picture 12: Top 10mm



Picture 13: Bottom 10mm

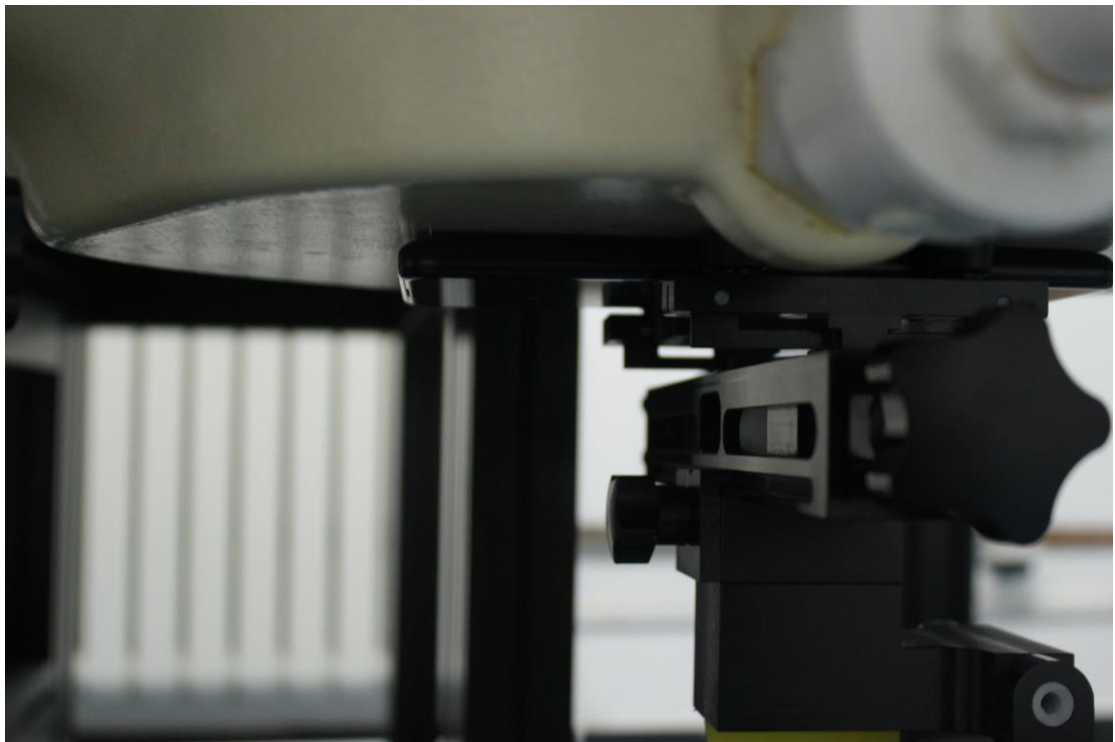

Picture 14: Rear 0mm

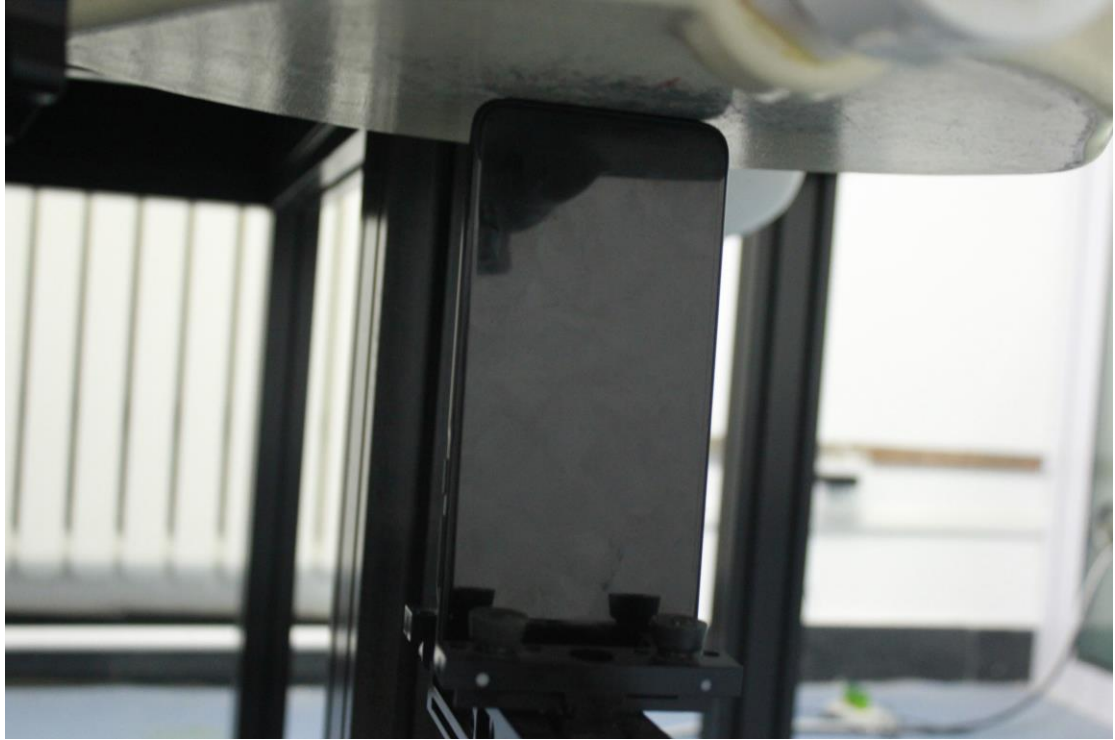

Picture 15: Bottom 0mm



Picture 16: Bottom 10mm with Headset