



TEST REPORT

No. I21N00742-BT

TCL Communication Ltd.

Tablet PC

Model Name: 9081X

with

Hardware Version: PIO

Software Version: 6A62

FCC ID: 2ACCJB153

Issued Date: 2021-04-06

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn, website: www.cszit.com



CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION.....	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT.....	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. TEST RESULTS	9
5.1. TESTING ENVIRONMENT.....	9
5.2. TEST RESULTS.....	9
5.3. STATEMENTS	9
6. TEST EQUIPMENTS UTILIZED	10
7. LABORATORY ENVIRONMENT	11
8. MEASUREMENT UNCERTAINTY	12
ANNEX A: DETAILED TEST RESULTS.....	13
A.0 ANTENNA REQUIREMENT	13
A.1 MAXIMUM PEAK OUTPUT POWER.....	14
A.2 BAND EDGES COMPLIANCE.....	15
A.3 CONDUCTED EMISSION	22
A.4 RADIATED EMISSION	38
A.5 20dB BANDWIDTH	51
A.6 TIME OF OCCUPANCY (DWELL TIME).....	56
A.7 NUMBER OF HOPPING CHANNELS.....	60
A.8 CARRIER FREQUENCY SEPARATION	64



A.9 AC POWER LINE CONDUCTED EMISSION 66



1. Summary of Test Report

1.1. Test Items

Description	Tablet PC
Model Name	9081X
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

1.2. Test Standards

FCC Part15-2019; ANSI C63.10-2013

1.3. Test Result

Pass

Please refer to 5.2 Test Results.

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date:	2021-03-15
Testing End Date:	2021-04-02

1.6. Signature

Lin Kanfeng
(Prepared this test report)

Tang Weisheng
(Reviewed this test report)

Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Gong Zhizhou
E-Mail: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Gong Zhizhou
E-Mail: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Tablet PC
Model Name	9081X
Frequency Band	2400MHz~2483.5MHz
Type of Modulation	GFSK/ π /4 DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated
Antenna Gain	1.3 dBi
Power Supply	3.9V DC by Battery
FCC ID	2ACCJB153
Condition of EUT as received	No abnormality in appearance

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
UT03aa	6409ACCE7B78296	PIO	6A62	2021-03-09
UT01aa	6409ACCE7B78297	PIO	6A62	2021-03-09

*EUT ID: is used to identify the test sample in the lab internally.

*UT03aa is used for Conduction test; UT01aa is used for Radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE

AE ID*	Description	SN
AE1	Battery	CAC7800000C1
AE2	Battery	CAC7800002CA
AE3	Charger	CBA0064BGTC1
AE4	Charger	CBA0064BGTC5

AE1

Model	TLp078A1
Manufacturer	BYD
Capacity	7800mAh
Nominal Voltage	3.85v

AE2

Model	TLp078AA
Manufacturer	TMB
Capacity	7800mAh
Nominal Voltage	3.85v

AE3

Model	QC13EU
Manufacturer	BYD



AE4

Model QC13UK

Manufacturer PUAN

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Tablet PC with integrated antenna and battery. It consists of normal options: Lithium Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247(b)	P
2	Band Edges Compliance	15.247(d)	P
3	Conducted Spurious Emission	15.247(d)	P
4	Radiated Spurious Emission	15.247,15.205,15.209	P
5	Occupied 20dB bandwidth	15.247(a)	/
6	Time of Occupancy (Dwell Time)	15.247(a)	P
7	Number of Hopping Channel	15.247(a)	P
8	Carrier Frequency Separation	15.247(a)	P
9	AC Power line Conducted Emission	15.107,15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2021-12-30	1 year
2	Bluetooth Tester	CBT32	100584	Rohde & Schwarz	2021-12-30	1 year
3	Power Sensor	U2021XA	MY55430013	Agilent	2022-01-13	1 year
4	Data Acquisition	U2531A	TW55443507	Agilent	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	LISN	ESH2-Z5	100196	R&S	2022-01-01	1 year
2	Test Receiver	ESCI	100701	R&S	2021-08-05	1 year
3	Loop Antenna	HLA6120	35779	TESEQ	2022-05-01	3 year
4	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2024-02-15	3 year
5	Horn Antenna	3117	00066585	ETS-Lindgren	2022-03-04	3 year
6	Test Receiver	ESR7	101675	R&S	2021-07-17	1 year
7	Spectrum Analyzer	FSP 40	100378	R&S	2021-12-11	1 year
8	Chamber	FACT5-2.0	4166	ETS-Lindgren	2021-05-12	3 year
9	Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2024-01-13	3 year
10	Antenna	QSH-SL-2 6-40-K-20	17014	Q-par	2024-01-19	3 year

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

EUT is engineering software provided by the customer to control the transmitting signal.

The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Laboratory Environment

Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. RF Output Power - Conducted	1.32dB	
2. Time of Occupancy - Conducted	0.58ms	
3. Occupied channel bandwidth - Conducted	66Hz	
4. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.70dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.90dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.60dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	4.10dB
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	3.00dB



ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is 1.3dBi. The RF transmitter uses an integrate antenna without connector.



A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 7.8.5.

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

Measurement Limit:

Standard	Limit (dBm)	E.I.R.P Limit (dBm)
FCC CRF Part 15.247 (b)	< 30	< 36

Measurement Results:

Conducted transmitter power

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	9.44	9.13	9.70
π /4 DQPSK	8.64	8.51	8.80
8DPSK	8.64	8.65	8.96

E.I.R.P

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	10.74	10.43	11.00
π /4 DQPSK	9.94	9.81	10.10
8DPSK	9.94	9.95	10.26

Note: E.I.R.P value = Conducted values (with conducted samples) + Antenna Gain.

Conclusion: Pass



A.2 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.1	P
	78	ON	Fig.2	P
$\pi/4$ DQPSK	0	ON	Fig.3	P
	78	ON	Fig.4	P
8DPSK	0	ON	Fig.5	P
	78	ON	Fig.6	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.7	P
	78	OFF	Fig.8	P
$\pi/4$ DQPSK	0	OFF	Fig.9	P
	78	OFF	Fig.10	P
8DPSK	0	OFF	Fig.11	P
	78	OFF	Fig.12	P

See below for test graphs.

Conclusion: Pass

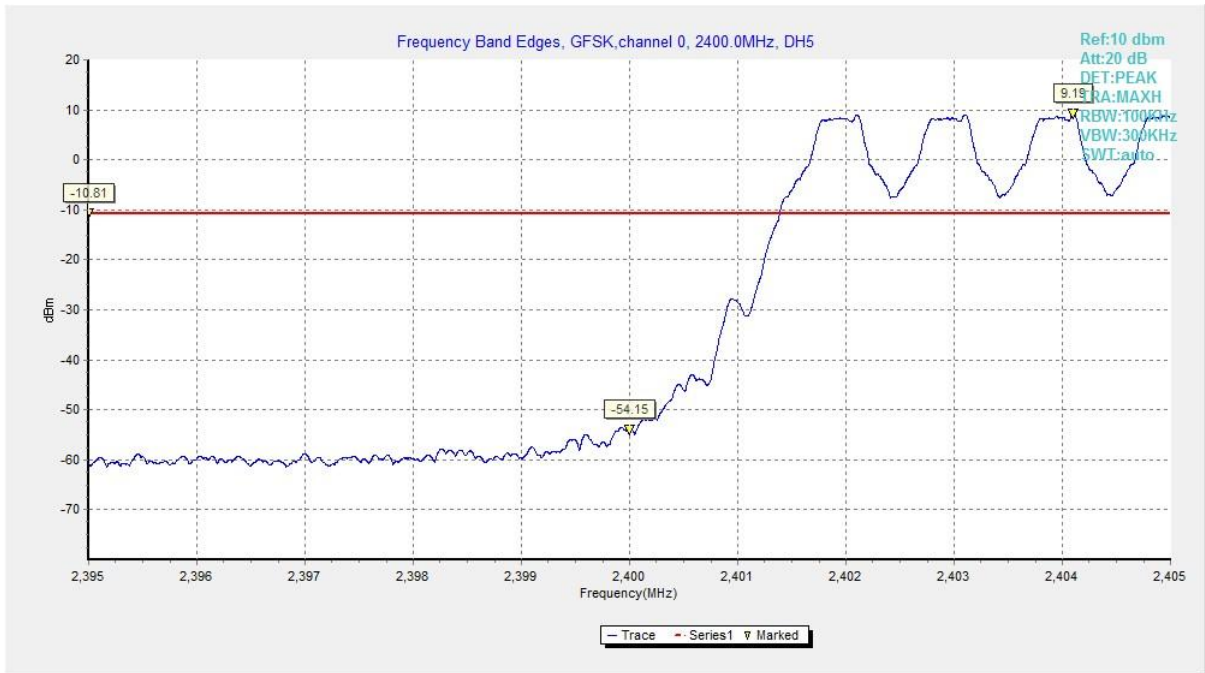


Fig. 1 Band Edges (GFSK, Ch 0, Hopping ON)

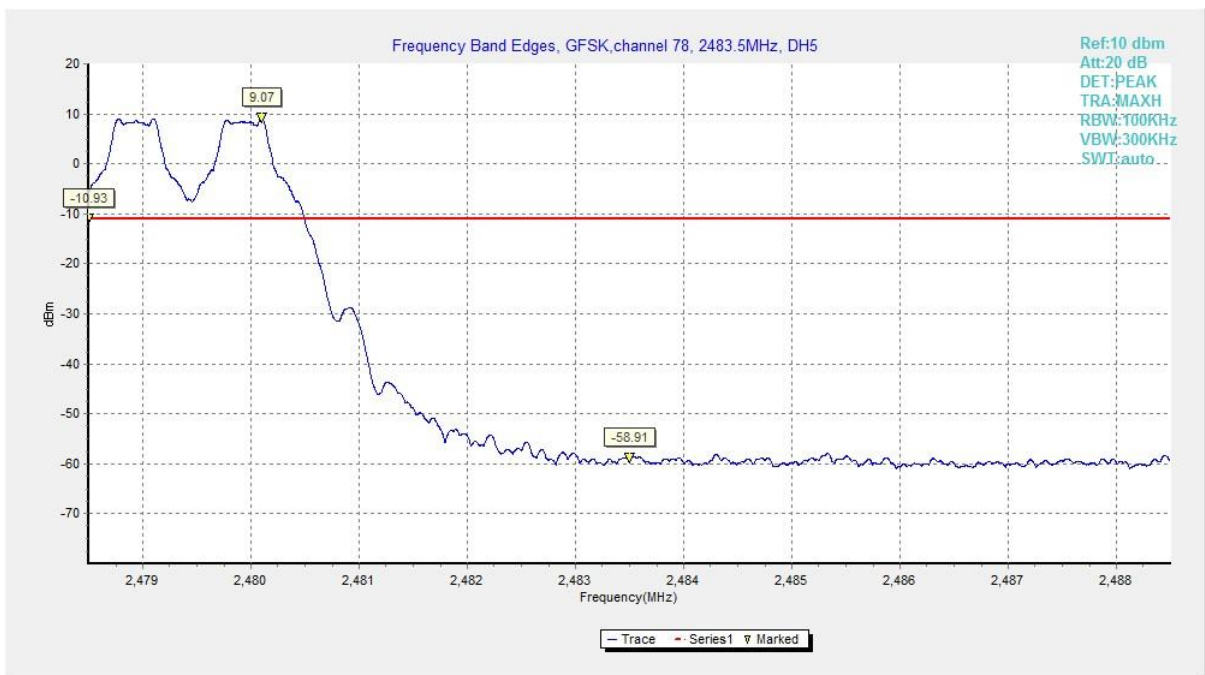


Fig. 2 Band Edges (GFSK, Ch 78, Hopping ON)

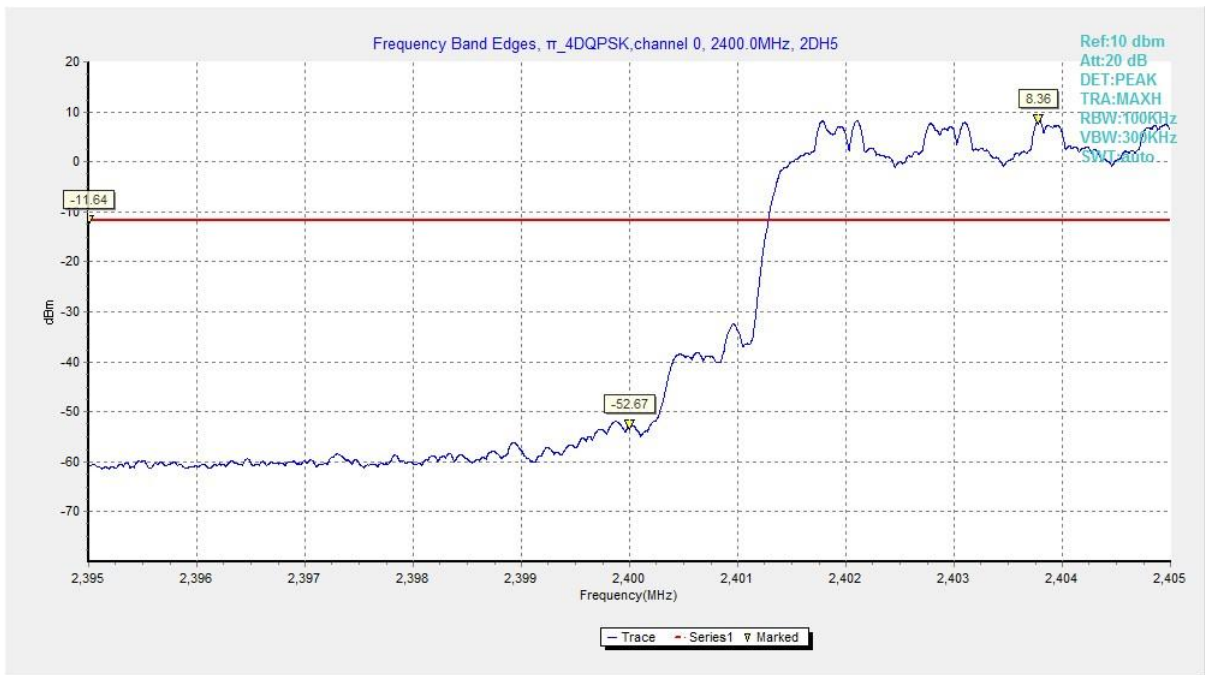


Fig. 3 Band Edges (π /4 DQPSK, Ch 0, Hopping ON)

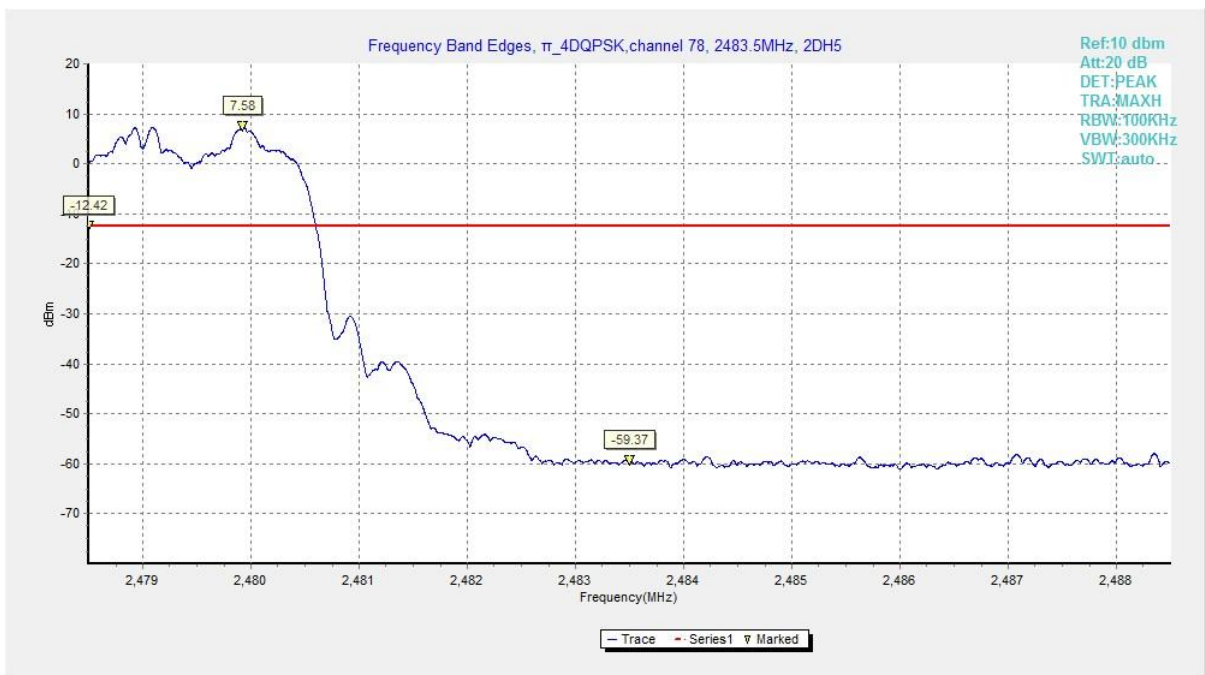


Fig. 4 Band Edges (π /4 DQPSK, Ch 78, Hopping ON)

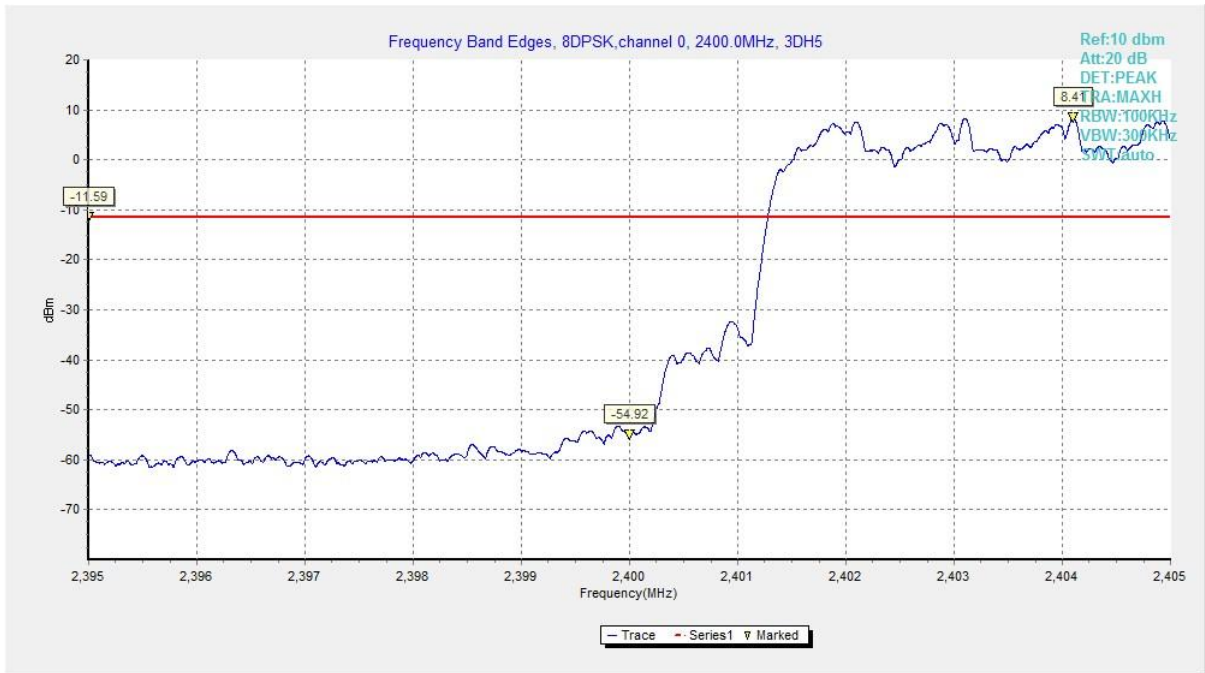


Fig. 5 Band Edges (8DPSK, Ch 0, Hopping ON)

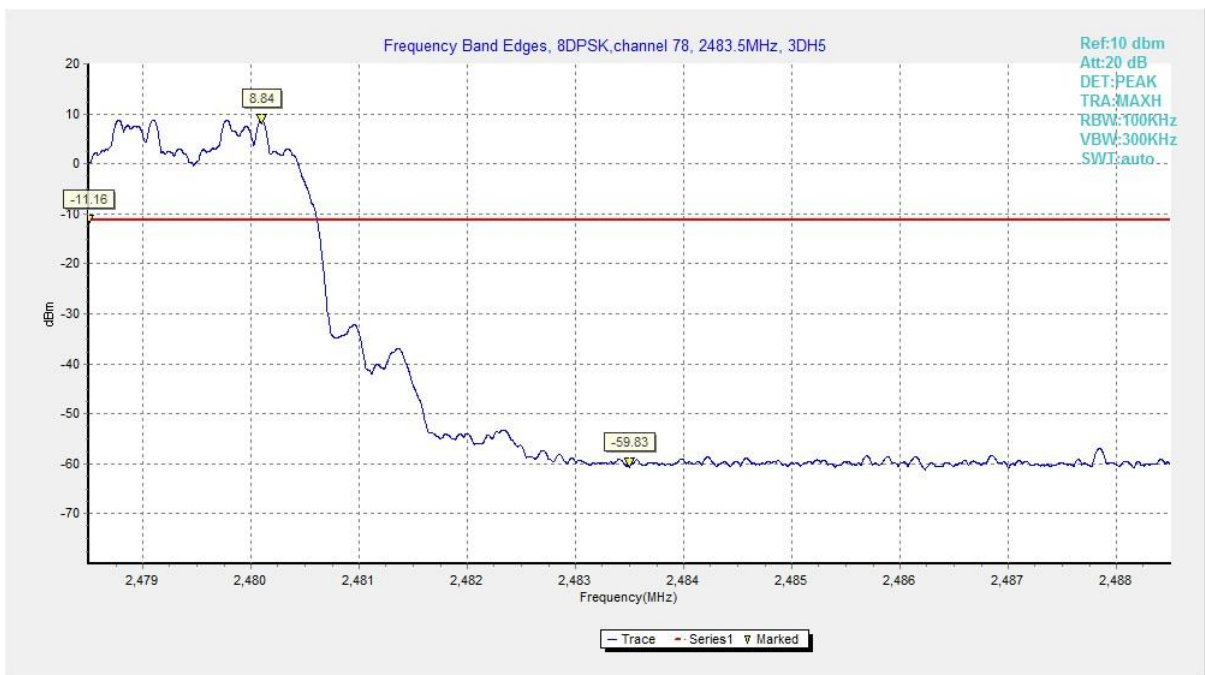


Fig. 6 Band Edges (8DPSK, Ch 78, Hopping ON)

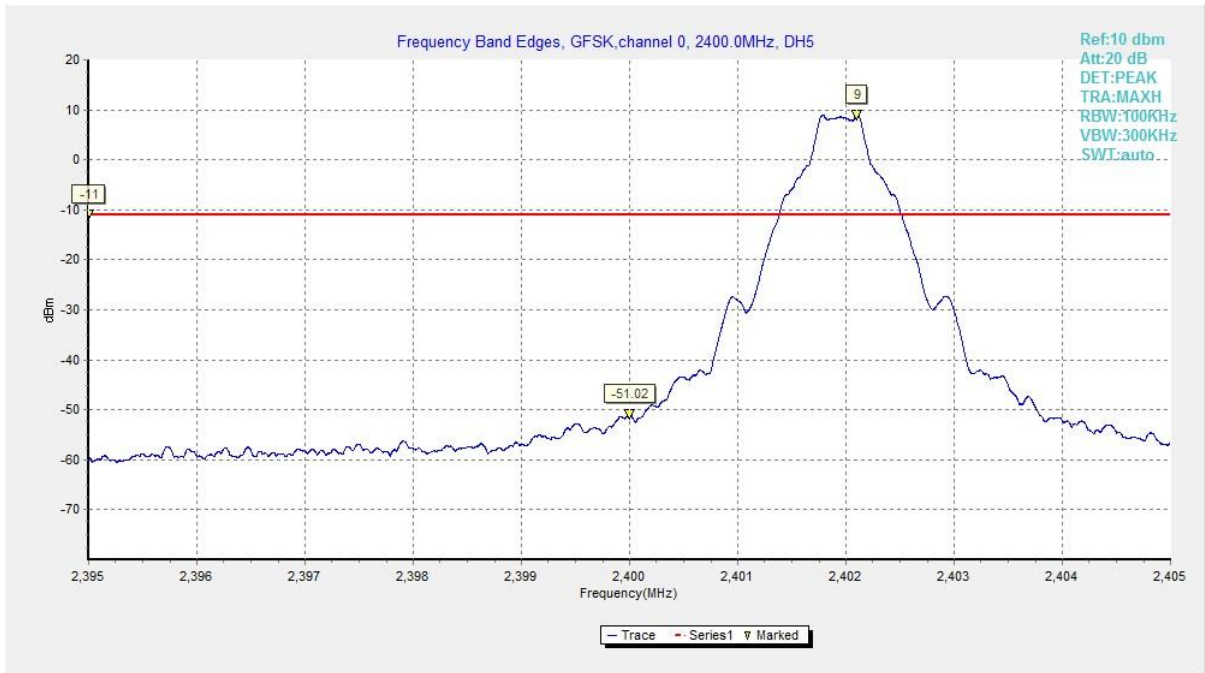


Fig. 7 Band Edges (GFSK, Ch 0, Hopping OFF)

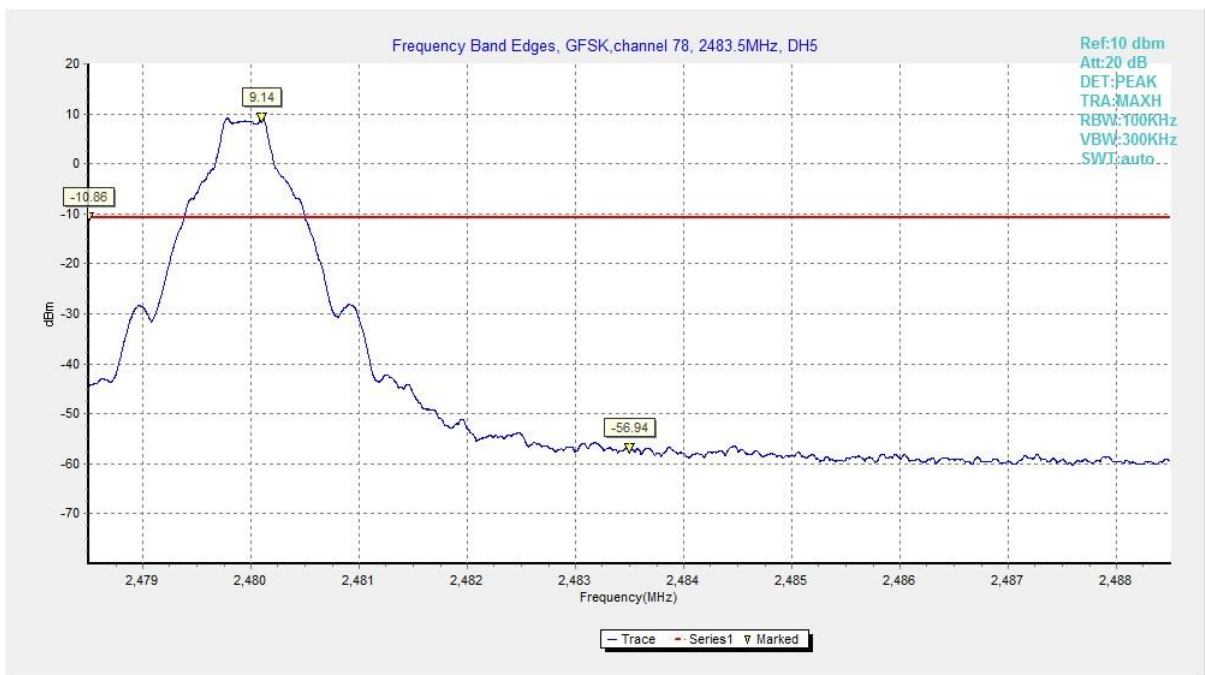


Fig. 8 Band Edges (GFSK, Ch 78, Hopping OFF)

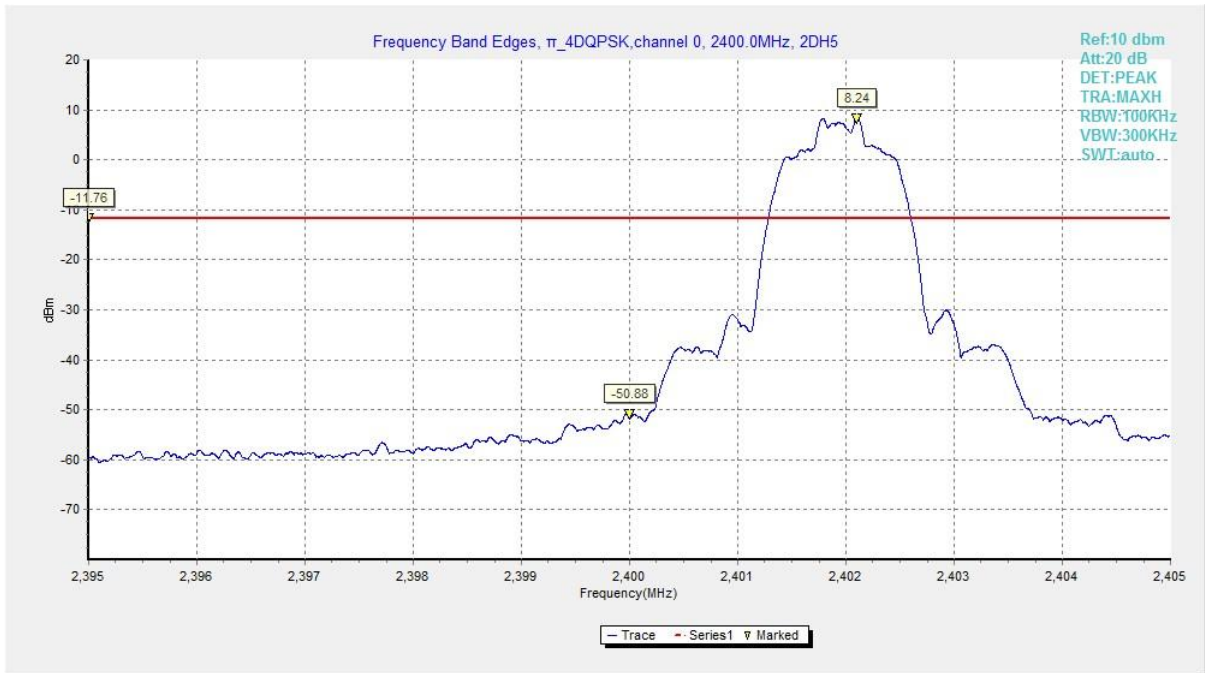


Fig. 9 Band Edges (π /4 DQPSK, Ch 0, Hopping OFF)

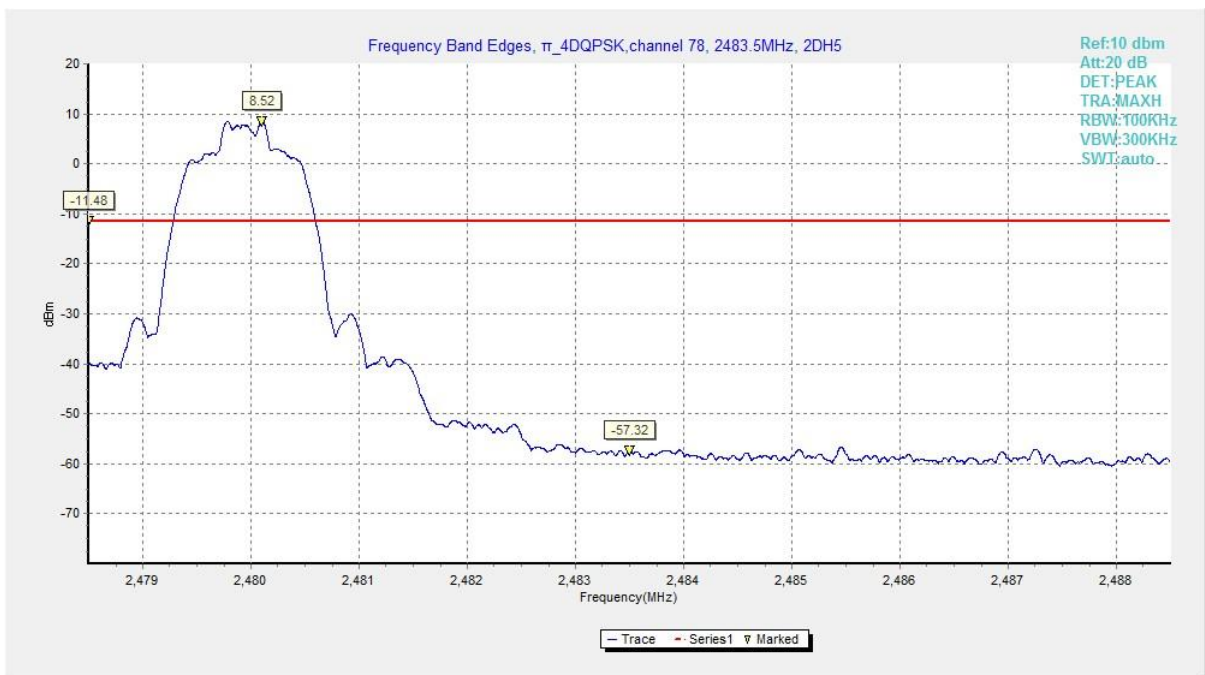


Fig. 10 Band Edges (π /4 DQPSK, Ch 78, Hopping OFF)

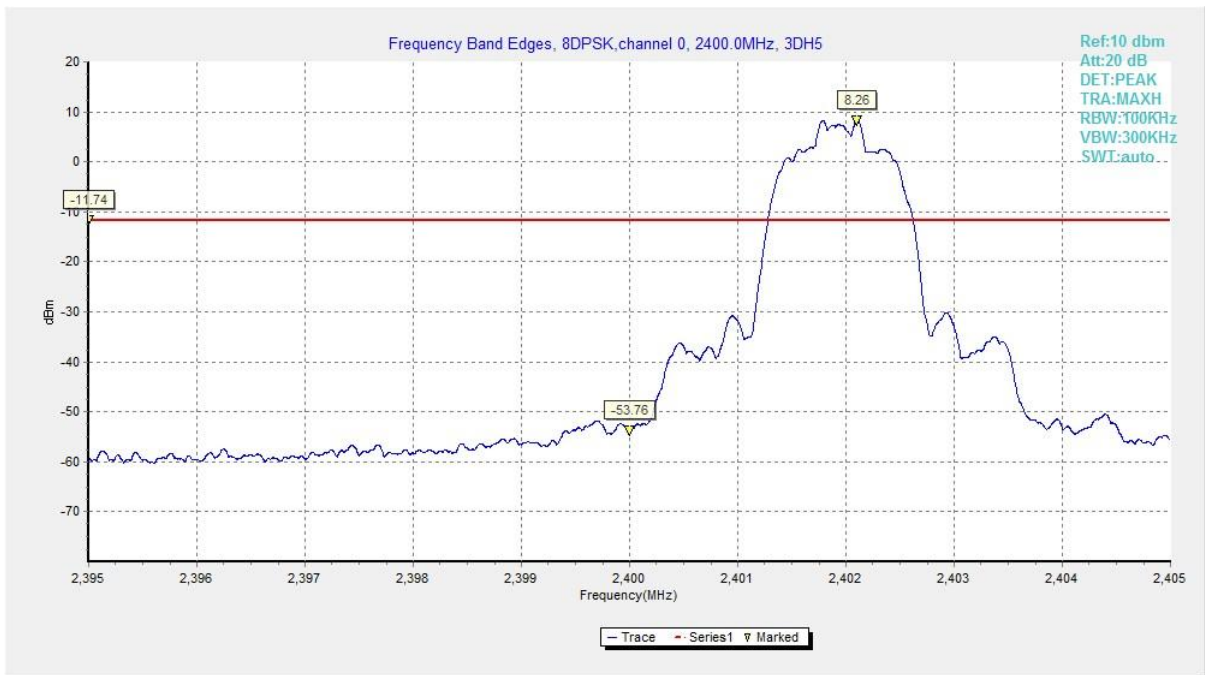


Fig. 11 Band Edges (8DPSK, Ch 0, Hopping OFF)

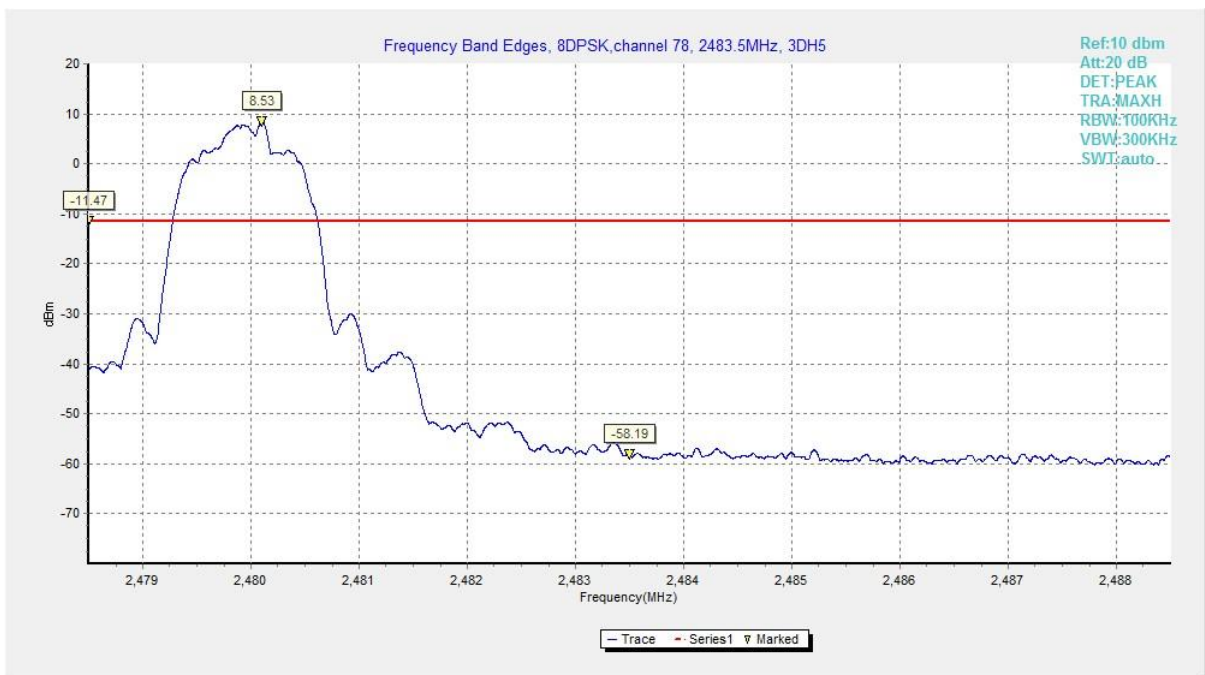


Fig. 12 Band Edges (8DPSK, Ch 78, Hopping OFF)

A.3 Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.402 GHz	Fig.13	P
		1GHz-3GHz	Fig.14	P
		3GHz-10GHz	Fig.15	P
	39	2.441 GHz	Fig.16	P
		1GHz-3GHz	Fig.17	P
		3GHz-10GHz	Fig.18	P
	78	2.480 GHz	Fig.19	P
		1GHz-3GHz	Fig.20	P
		3GHz-10GHz	Fig.21	P
$\pi/4$ DQPSK	0	2.402 GHz	Fig.22	P
		1GHz-3GHz	Fig.23	P
		3GHz-10GHz	Fig.24	P
	39	2.441 GHz	Fig.25	P
		1GHz-3GHz	Fig.26	P
		3GHz-10GHz	Fig.27	P
	78	2.480 GHz	Fig.28	P
		1GHz-3GHz	Fig.29	P
		3GHz-10GHz	Fig.30	P
8DPSK	0	2.402 GHz	Fig.31	P
		1GHz-3GHz	Fig.32	P
		3GHz-10GHz	Fig.33	P
	39	2.441 GHz	Fig.34	P
		1GHz-3GHz	Fig.35	P
		3GHz-10GHz	Fig.36	P
	78	2.480 GHz	Fig.37	P
		1GHz-3GHz	Fig.38	P
		3GHz-10GHz	Fig.39	P
/	All channels	30 MHz-1GHz	Fig.40	P
		10GHz-26GHz	Fig.41	P

See below for test graphs.

Conclusion: Pass

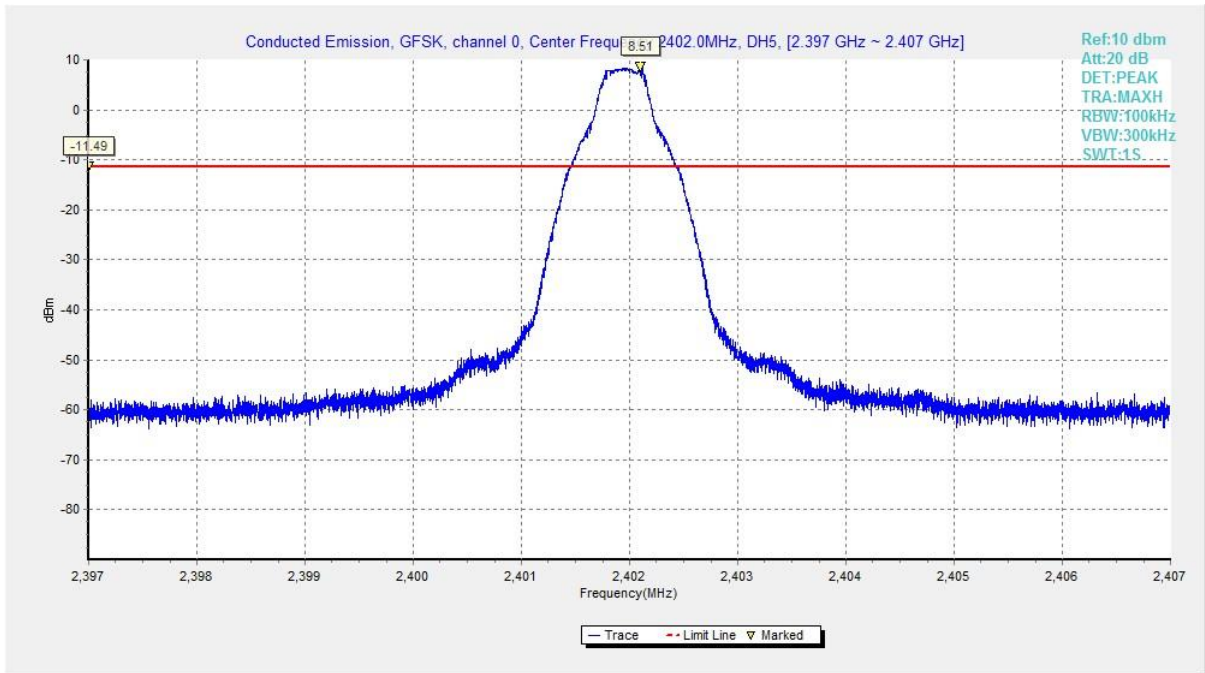


Fig. 13 Conducted Spurious Emission (GFSK, Ch0, 2.402GHz)

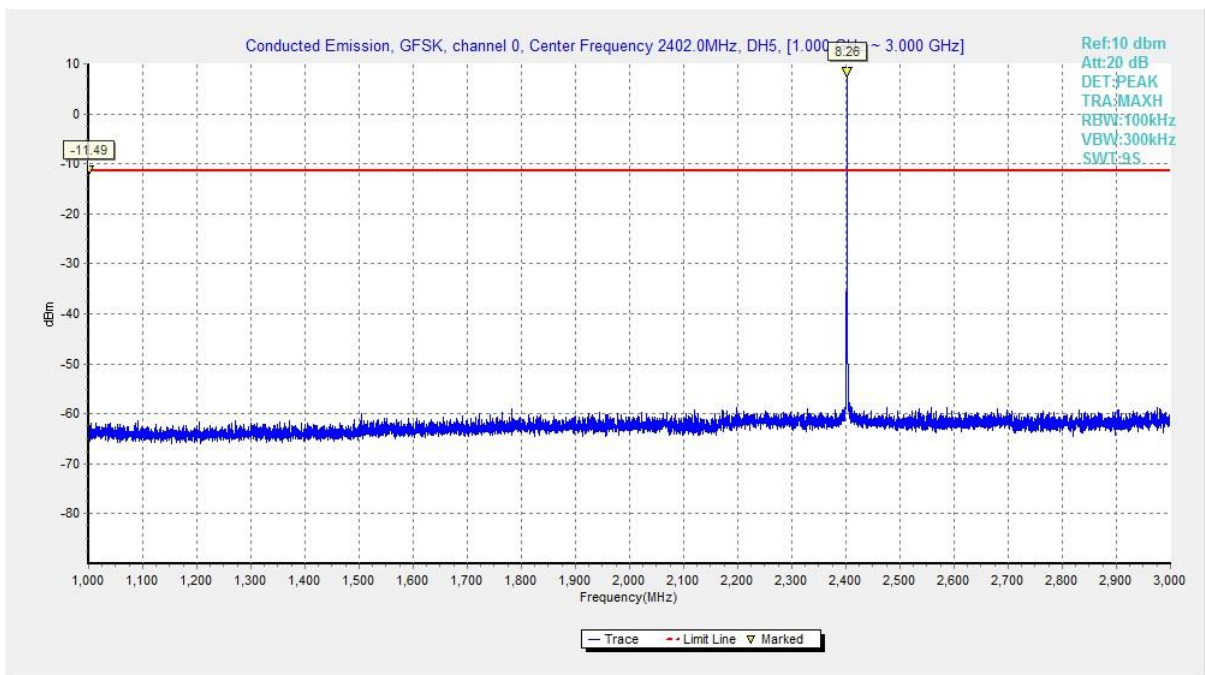


Fig. 14 Conducted Spurious Emission (GFSK, Ch0, 1GHz-3GHz)

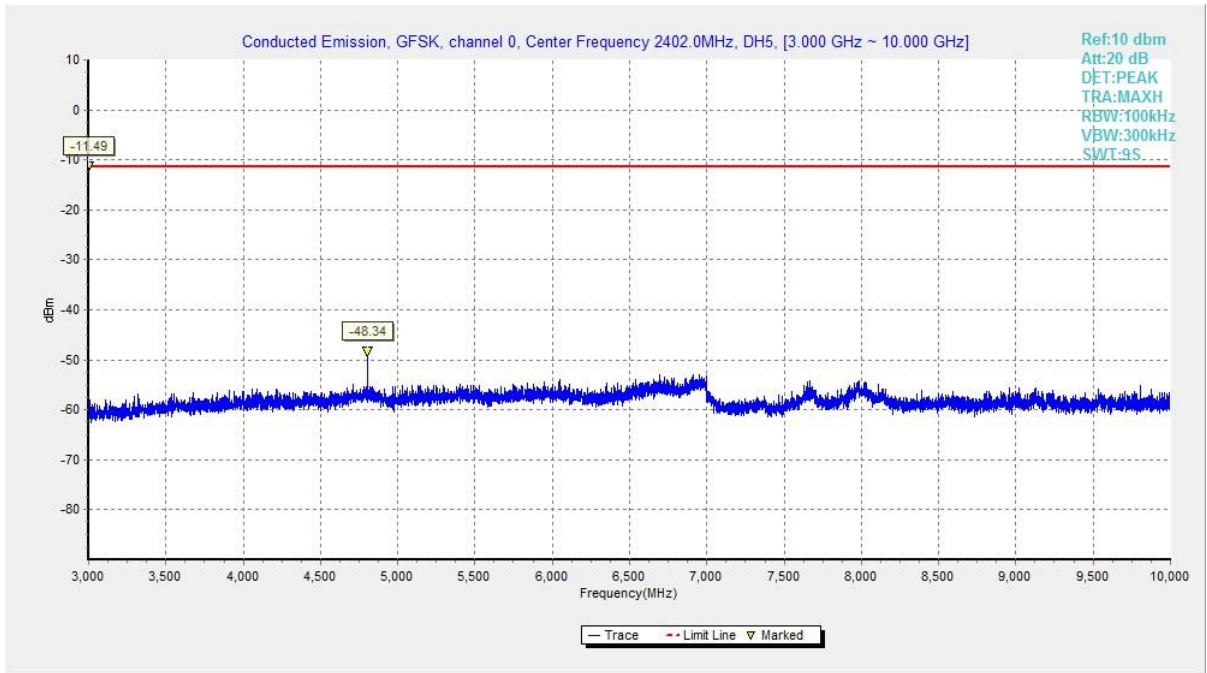


Fig. 15 Conducted Spurious Emission (GFSK, Ch0, 3GHz-10GHz)

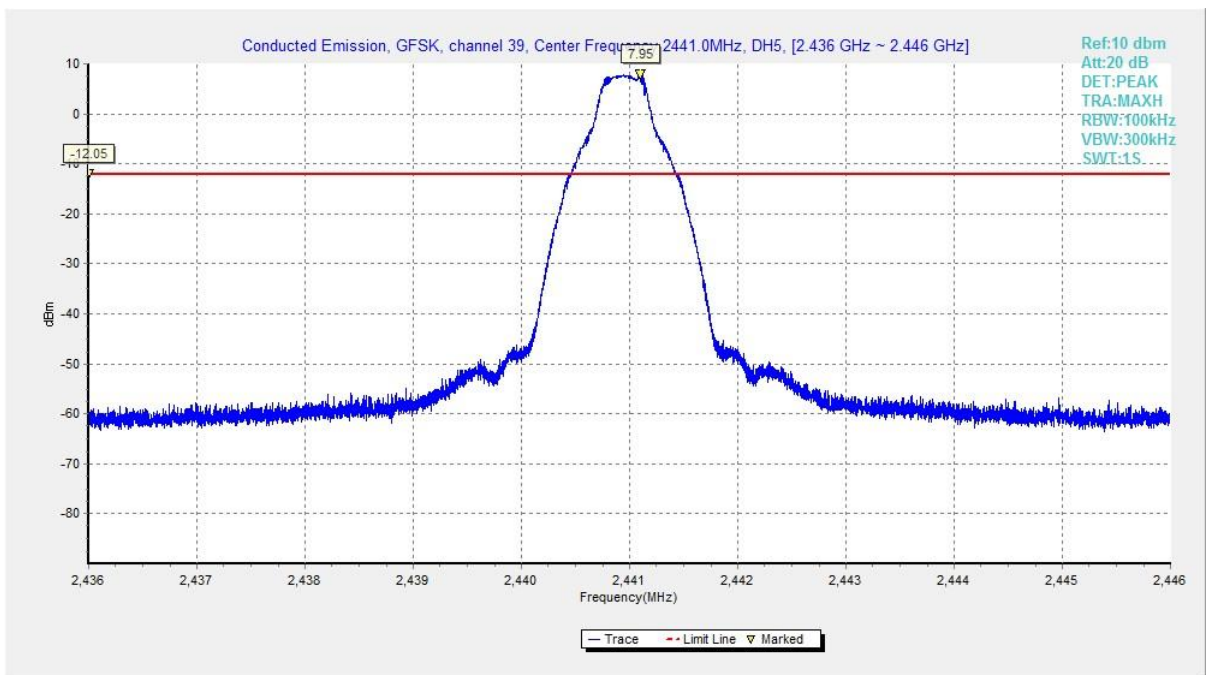


Fig. 16 Conducted Spurious Emission (GFSK, Ch39, 2.441GHz)

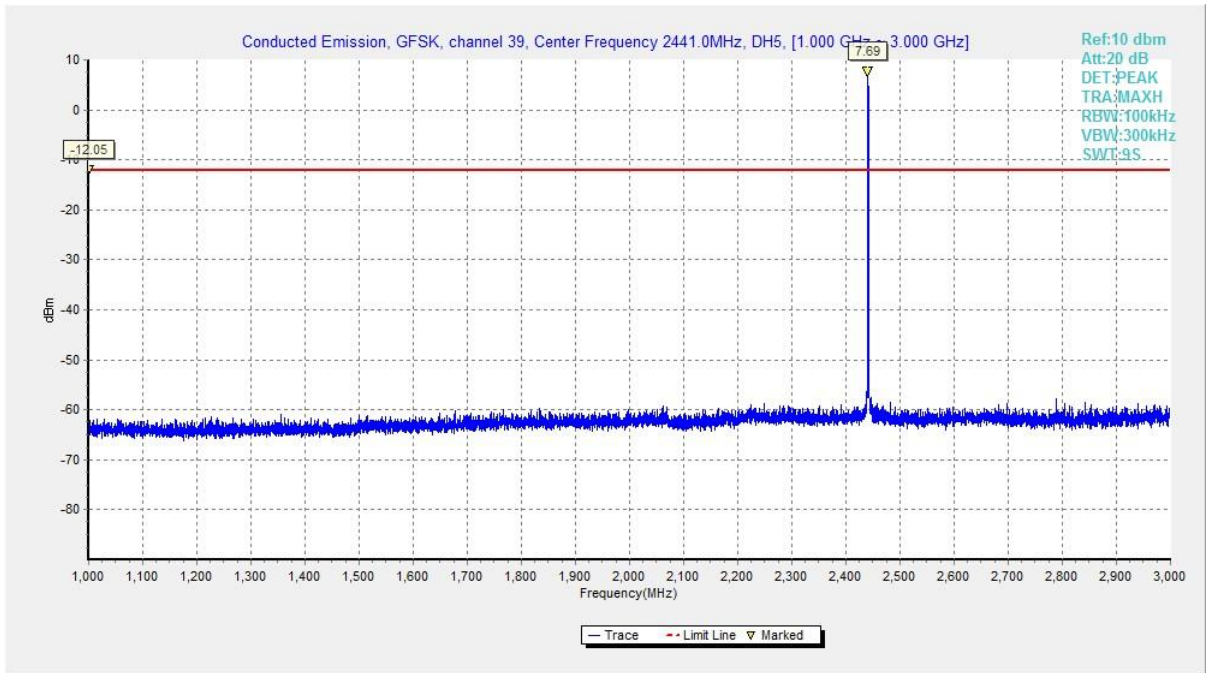


Fig. 17 Conducted Spurious Emission (GFSK, Ch39, 1GHz-3GHz)

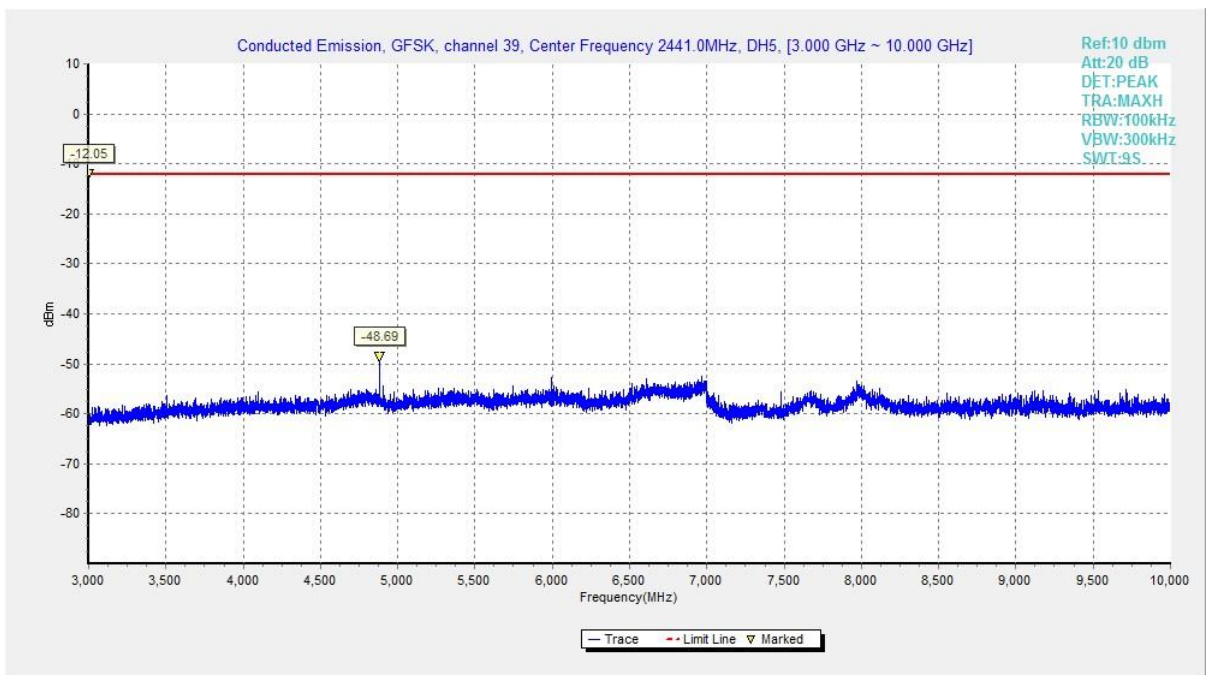


Fig. 18 Conducted Spurious Emission (GFSK, Ch39, 3GHz-10GHz)

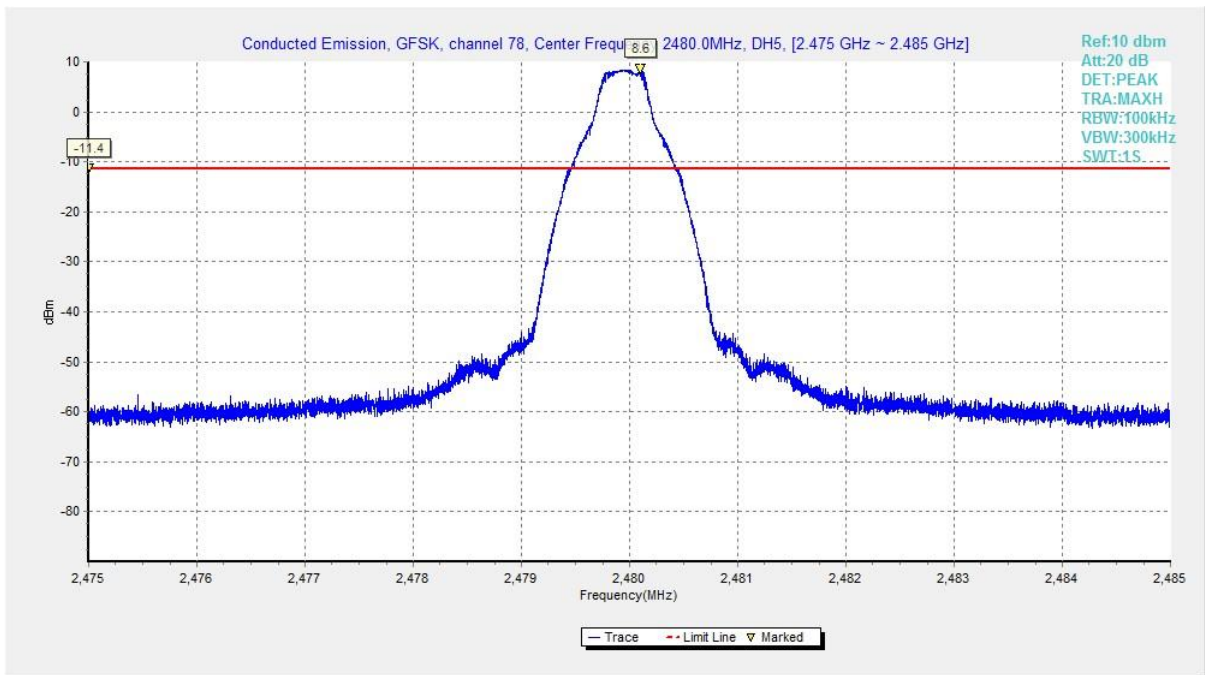


Fig. 19 Conducted Spurious Emission (GFSK, Ch78, 2.480GHz)

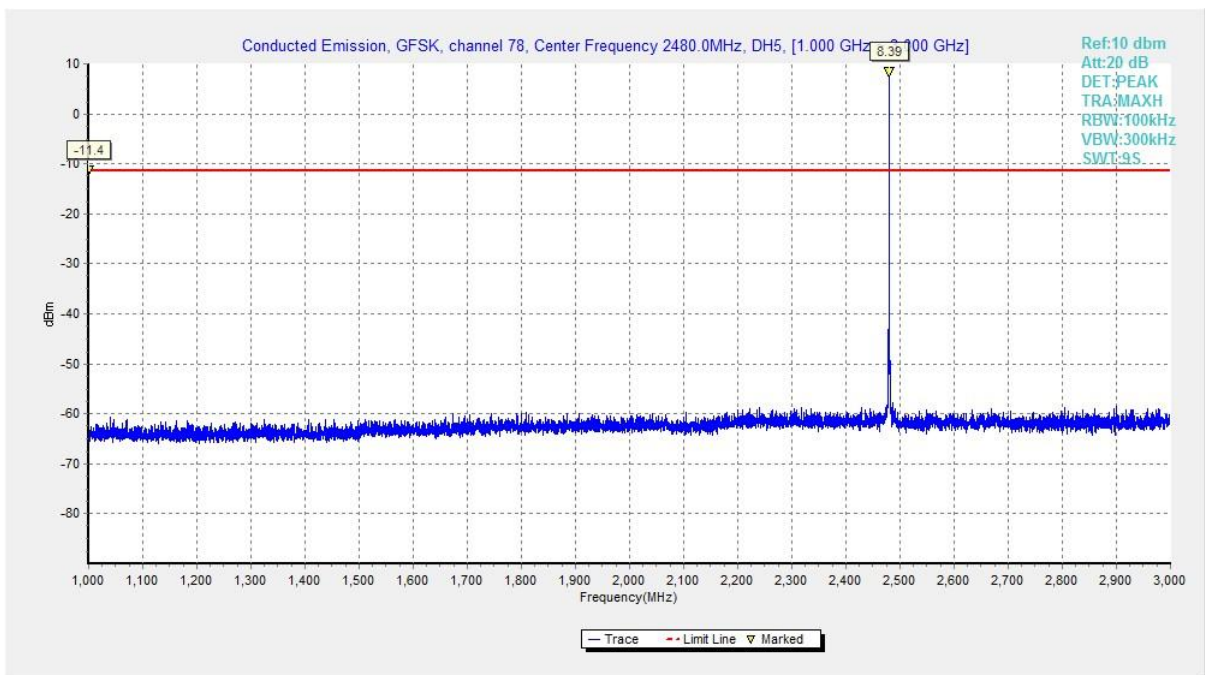


Fig. 20 Conducted Spurious Emission (GFSK, Ch78, 1GHz-3GHz)

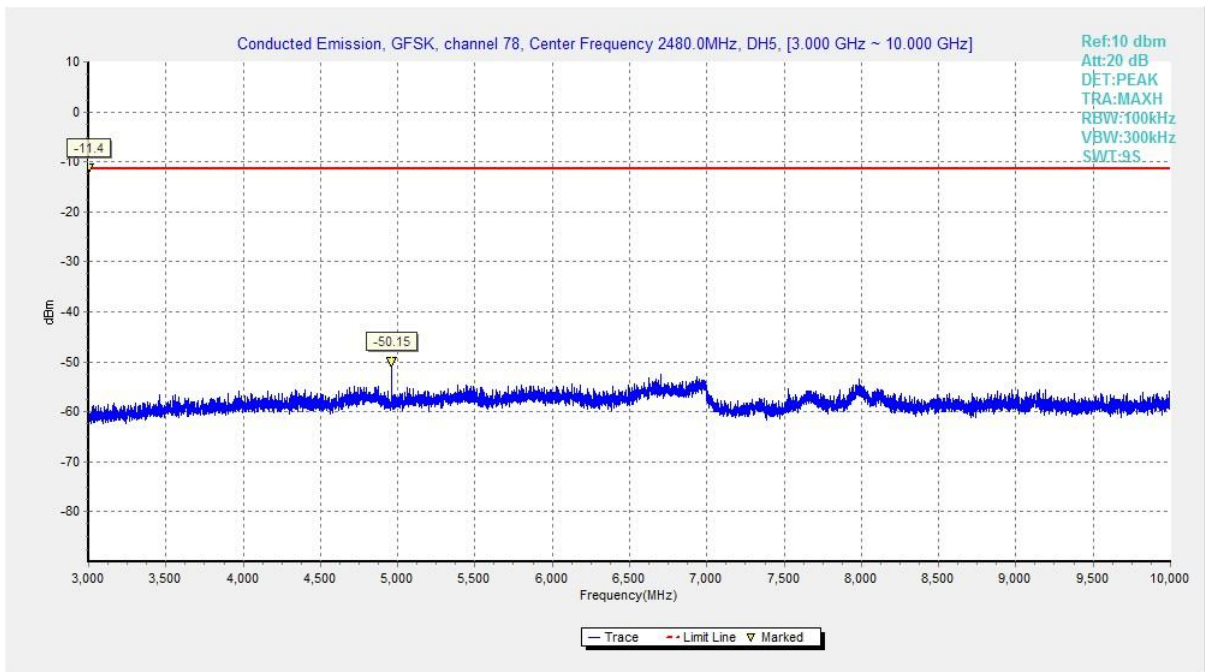


Fig. 21 Conducted Spurious Emission (GFSK, Ch78, 3GHz-10GHz)

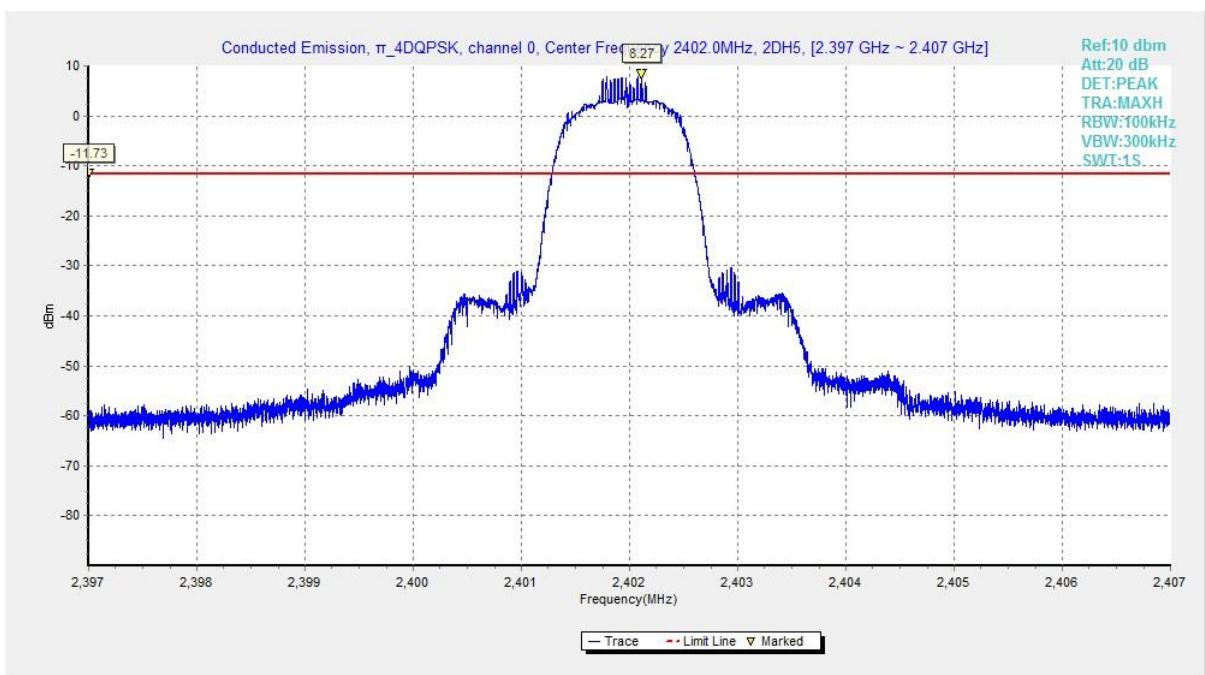


Fig. 22 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 2.402GHz)

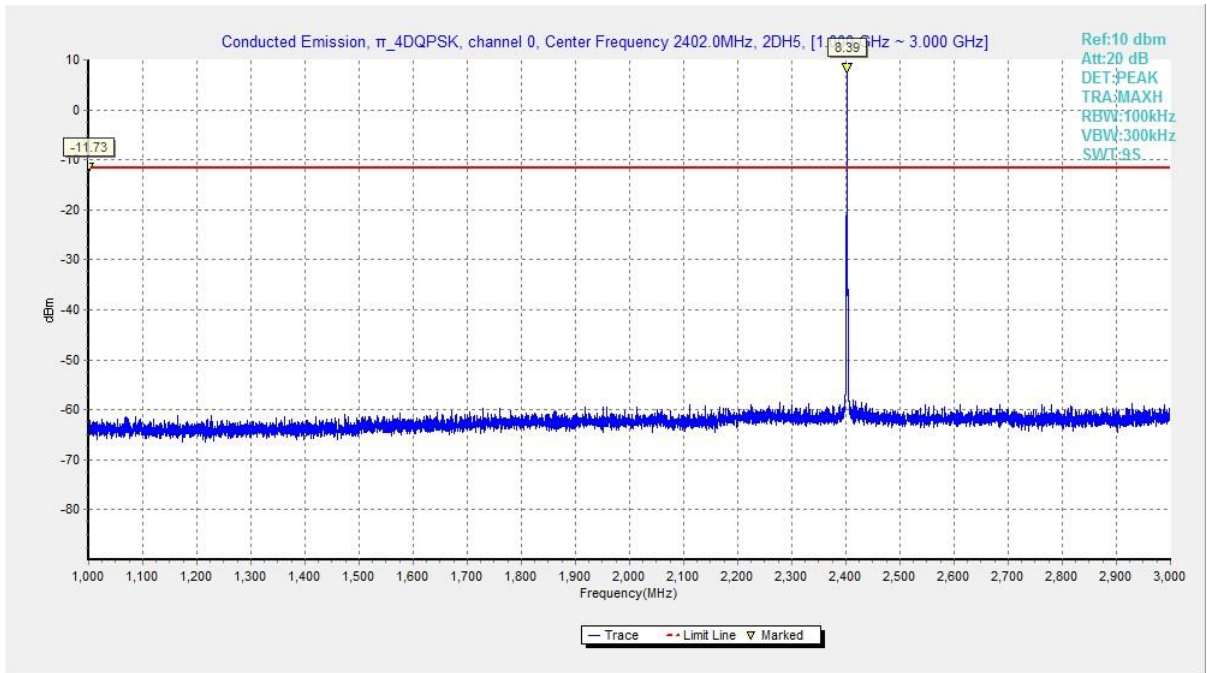


Fig. 23 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 1GHz-3GHz)

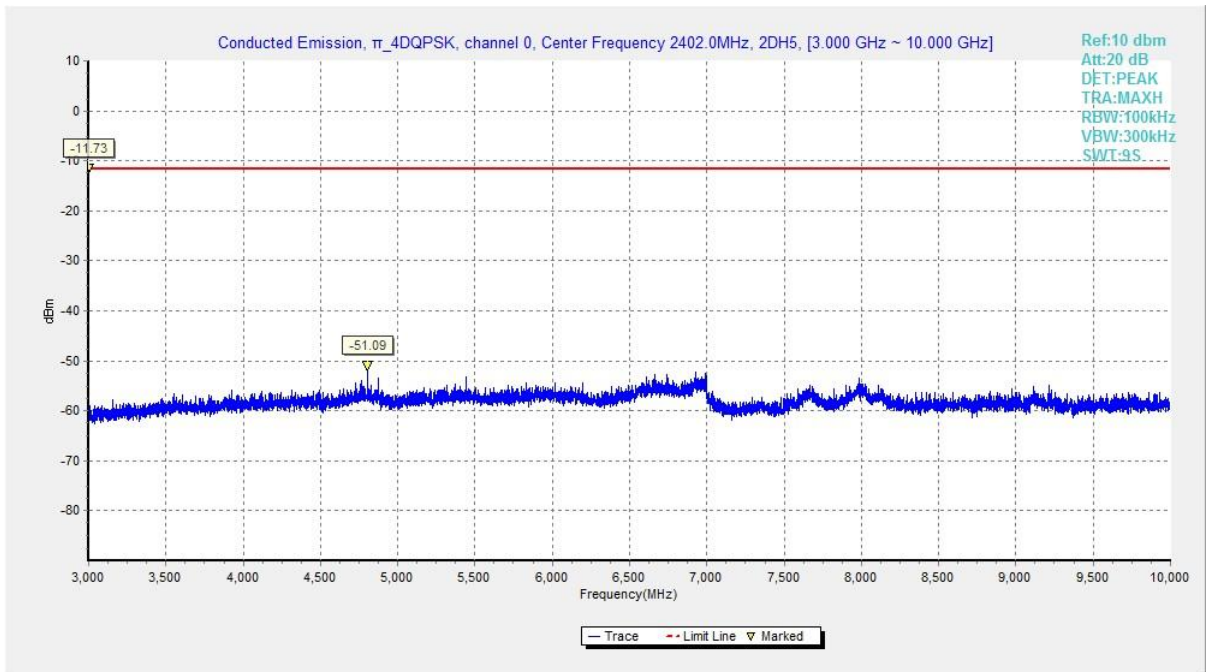


Fig. 24 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 3GHz-10GHz)

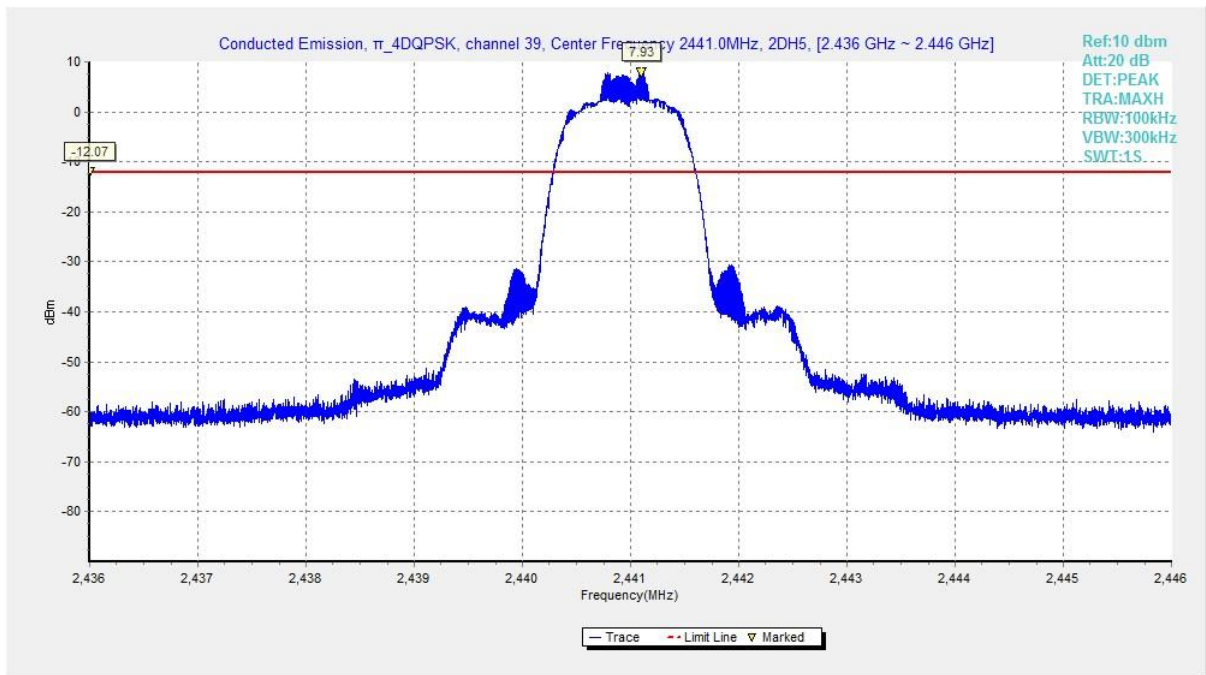


Fig. 25 Conducted Spurious Emission (π /4 DQPSK, Ch39, 2.441GHz)

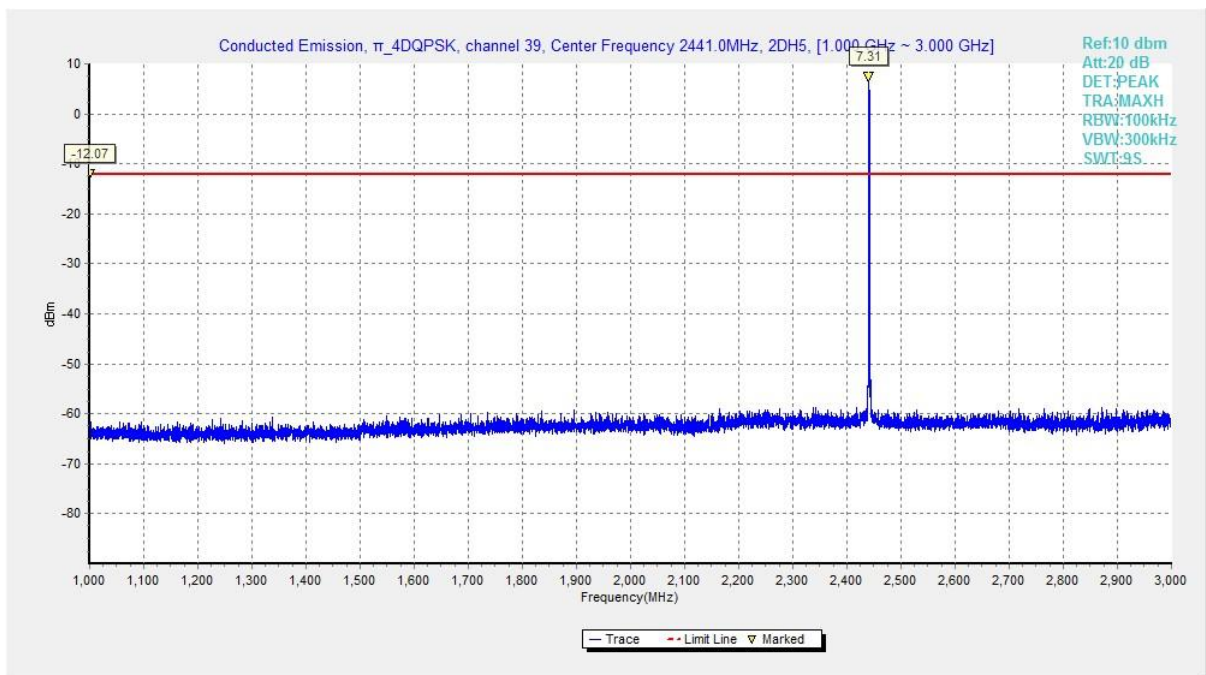


Fig. 26 Conducted Spurious Emission (π /4 DQPSK, Ch39, 1GHz-3GHz)

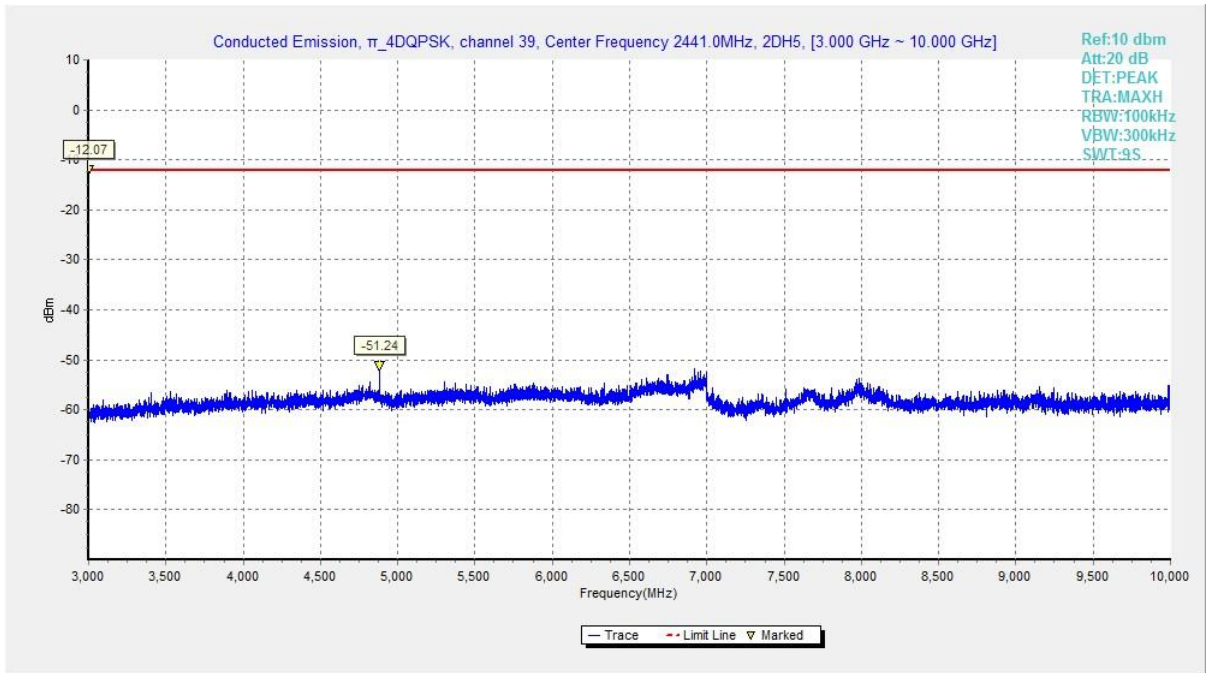


Fig. 27 Conducted Spurious Emission (π /4 DQPSK, Ch39, 3GHz-10GHz)

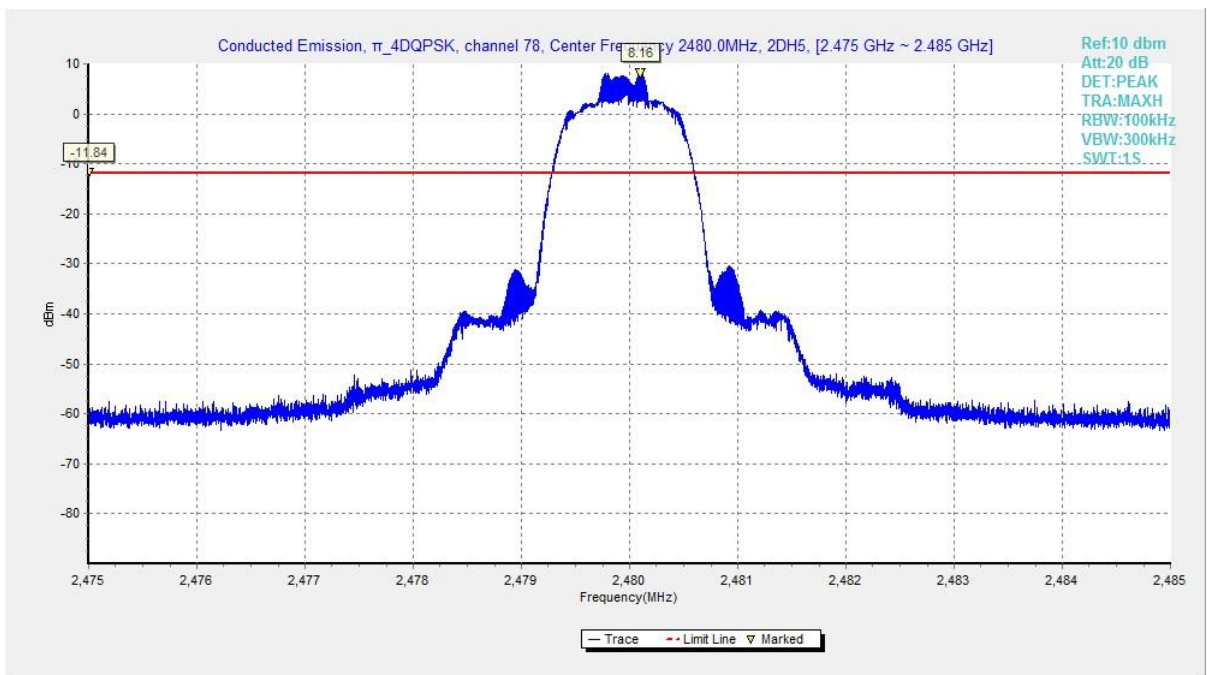


Fig. 28 Conducted Spurious Emission (π /4 DQPSK, Ch78, 2.480GHz)

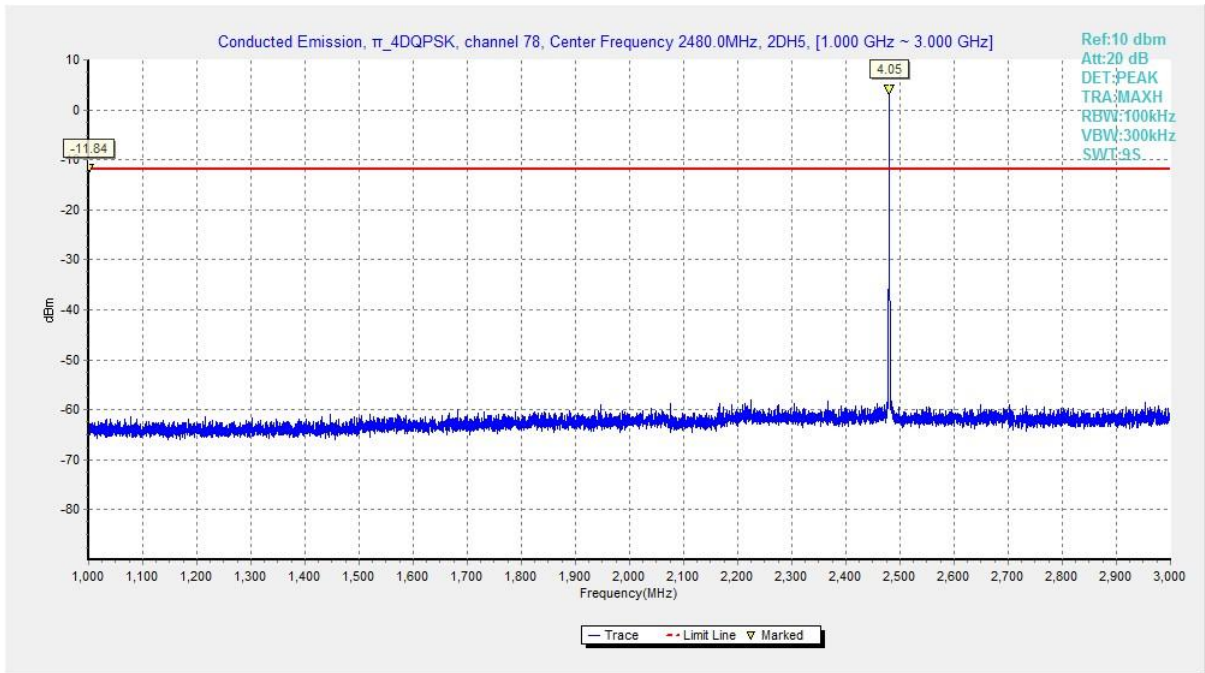


Fig. 29 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 1GHz-3GHz)

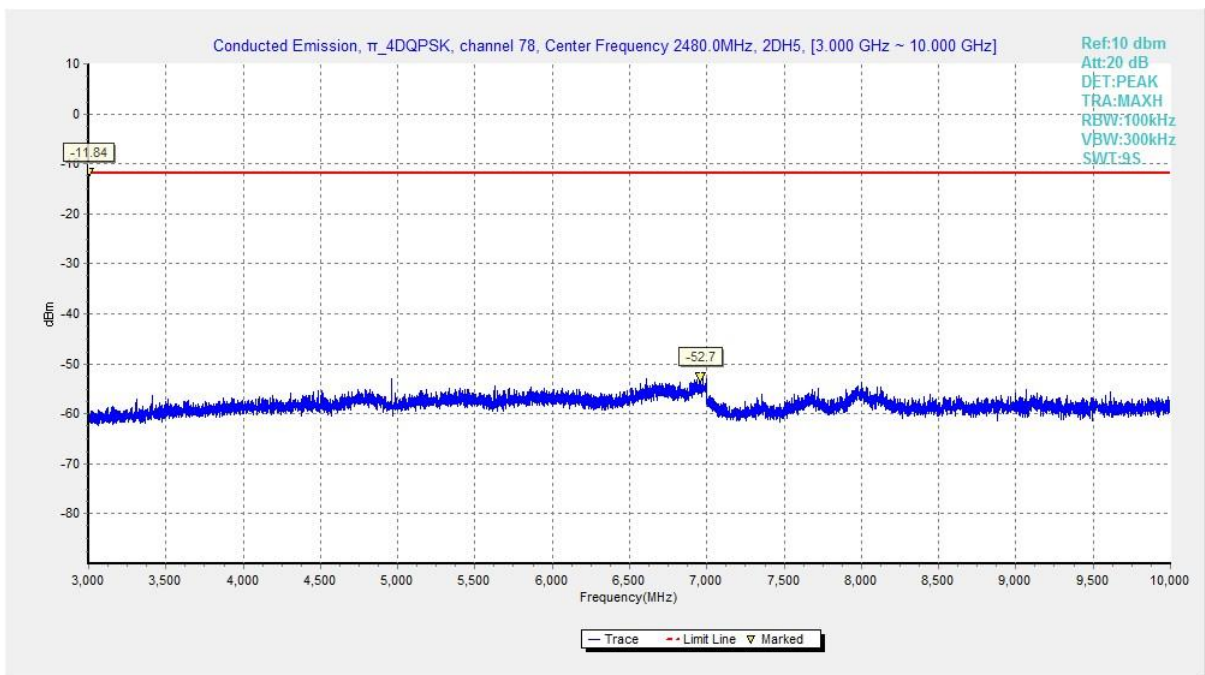


Fig. 30 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 3GHz-10GHz)

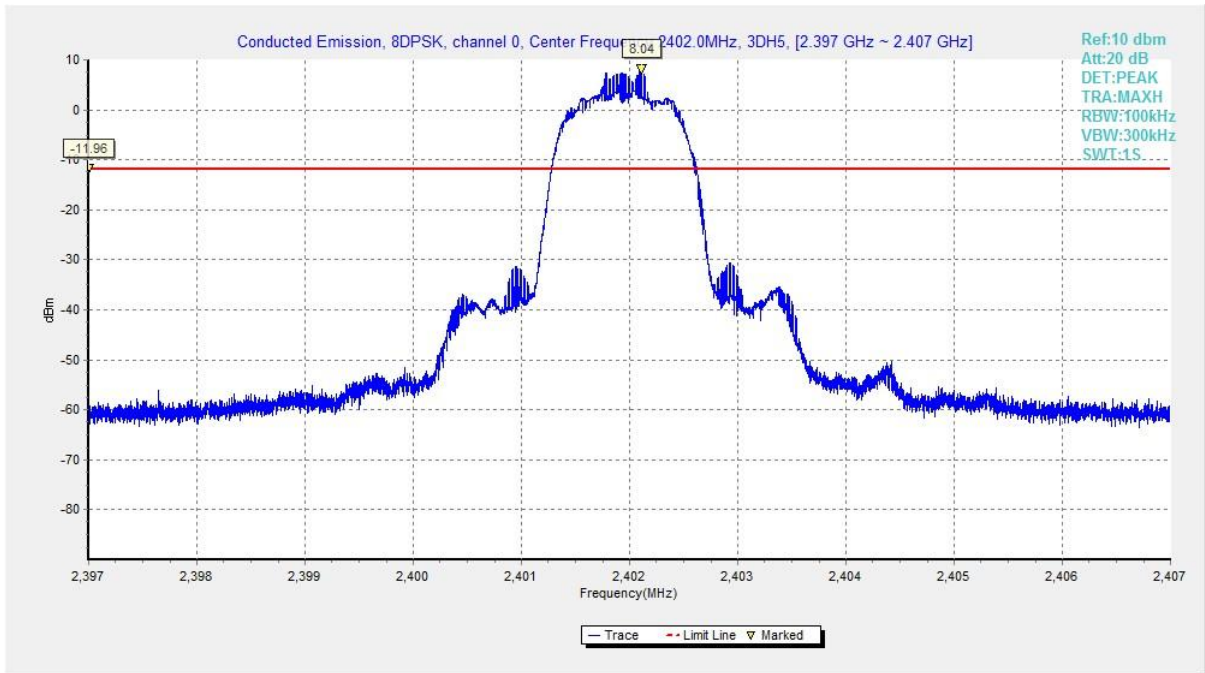


Fig. 31 Conducted Spurious Emission (8DPSK, Ch0, 2.402GHz)

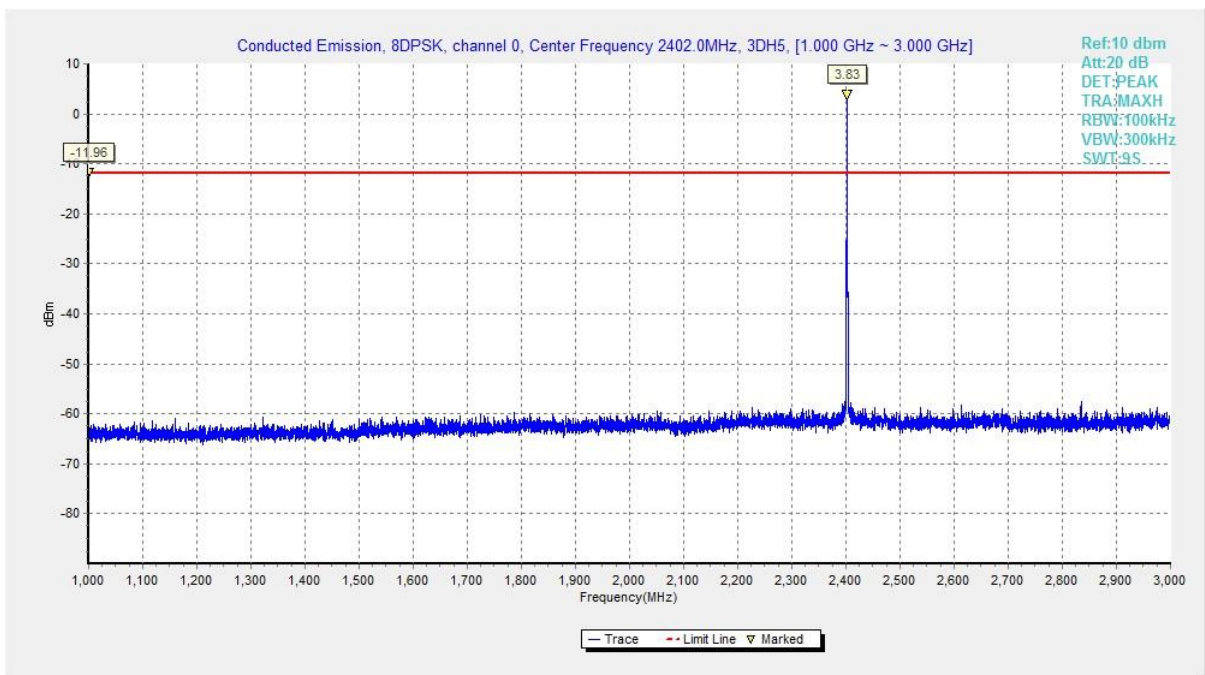


Fig. 32 Conducted Spurious Emission (8DPSK, Ch0, 1GHz-3GHz)

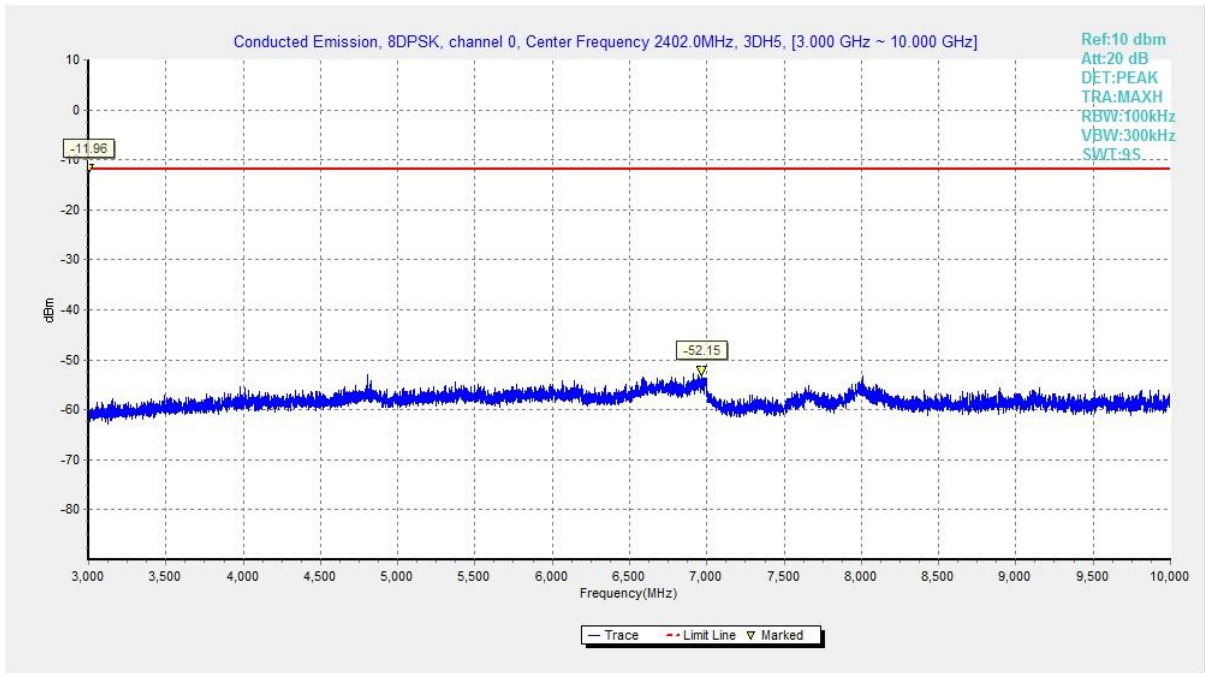


Fig. 33 Conducted Spurious Emission (8DPSK, Ch0, 3GHz-10GHz)

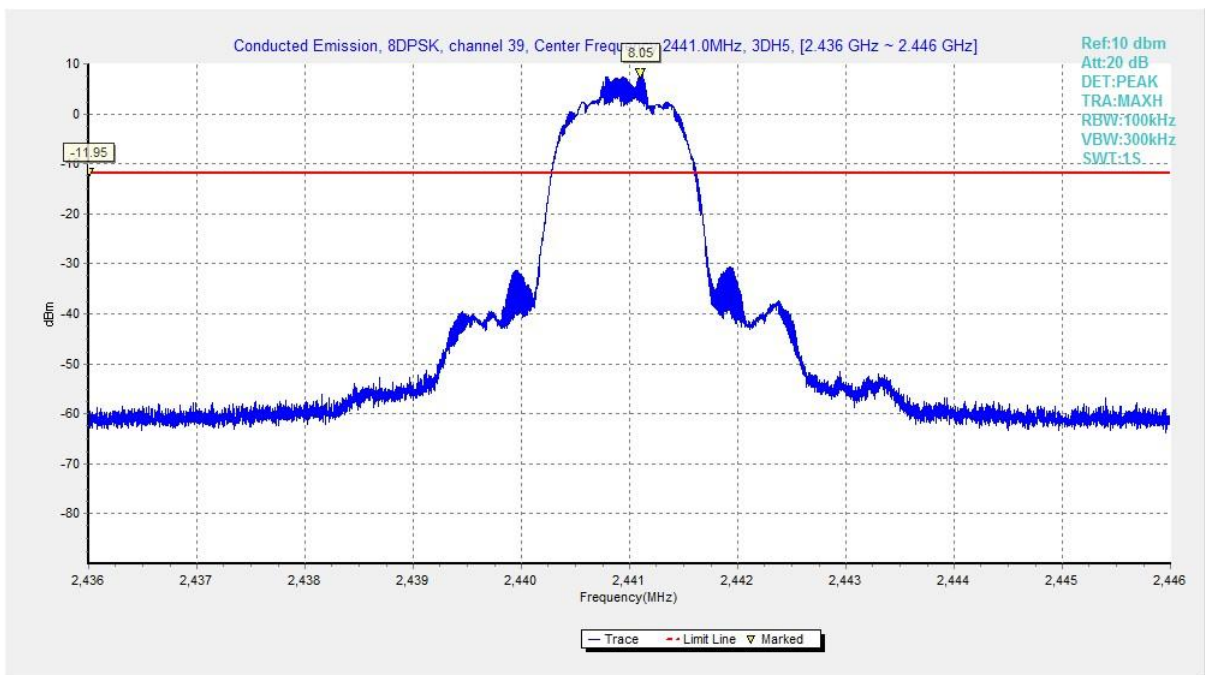


Fig. 34 Conducted Spurious Emission (8DPSK, Ch39, 2.441GHz)

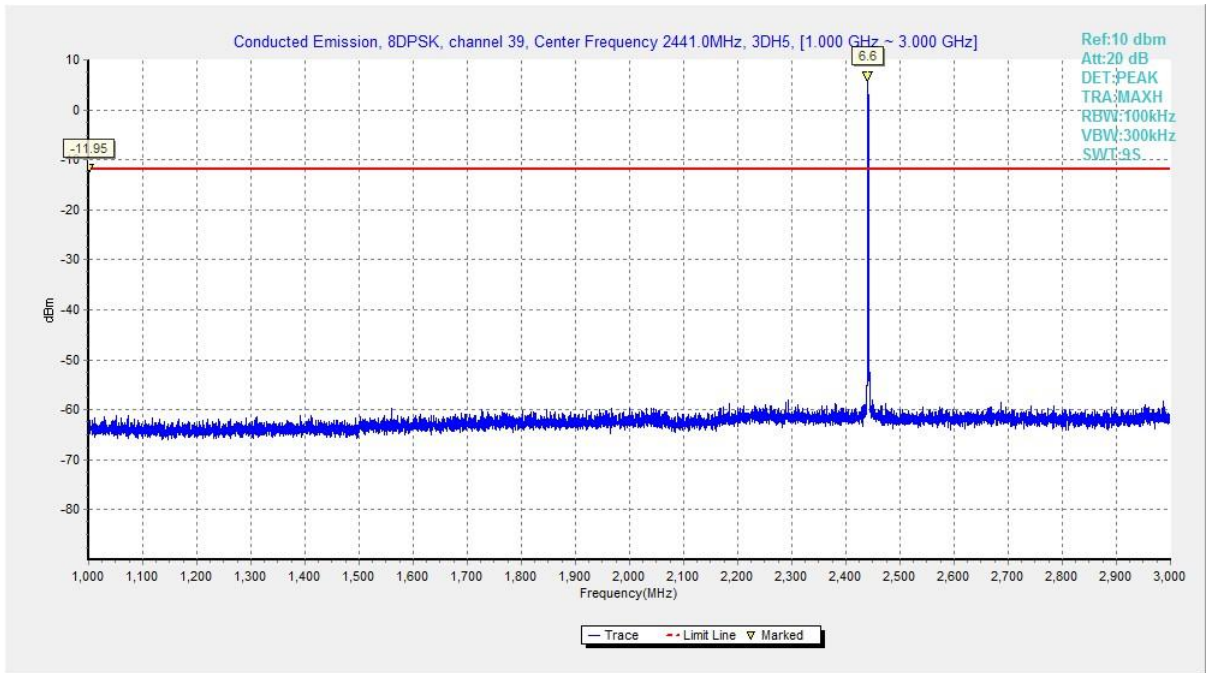


Fig. 35 Conducted Spurious Emission (8DPSK, Ch39, 1GHz-3GHz)

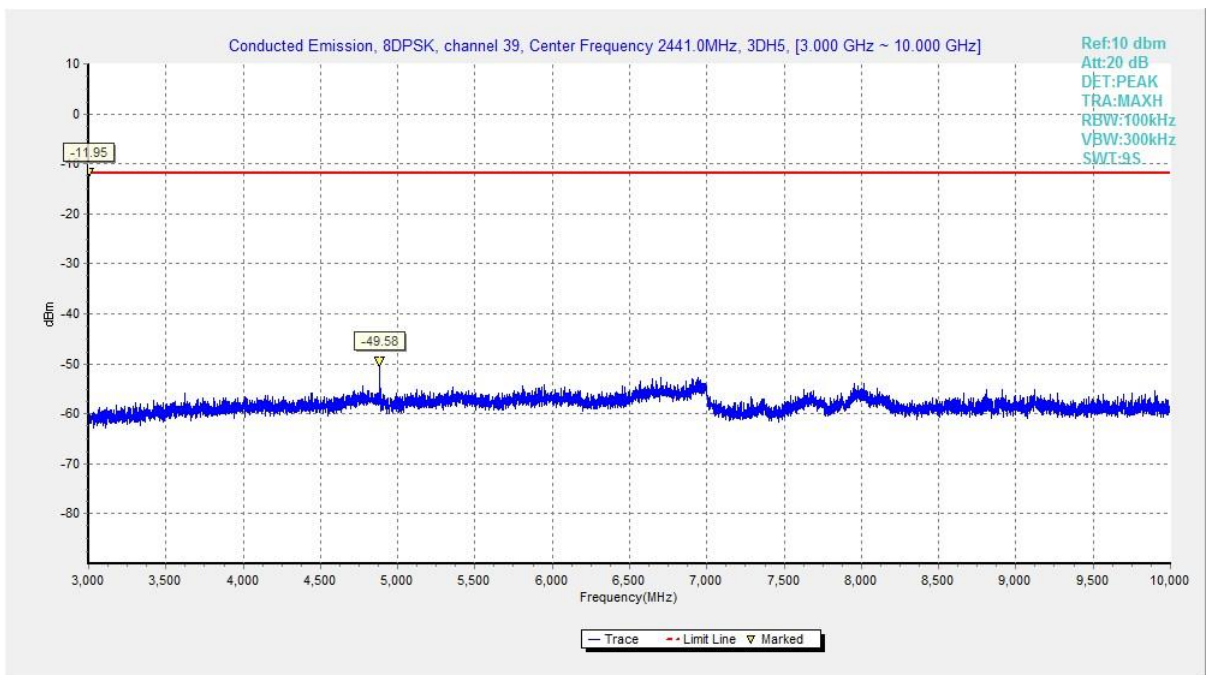


Fig. 36 Conducted Spurious Emission (8DPSK, Ch39, 3GHz-10GHz)

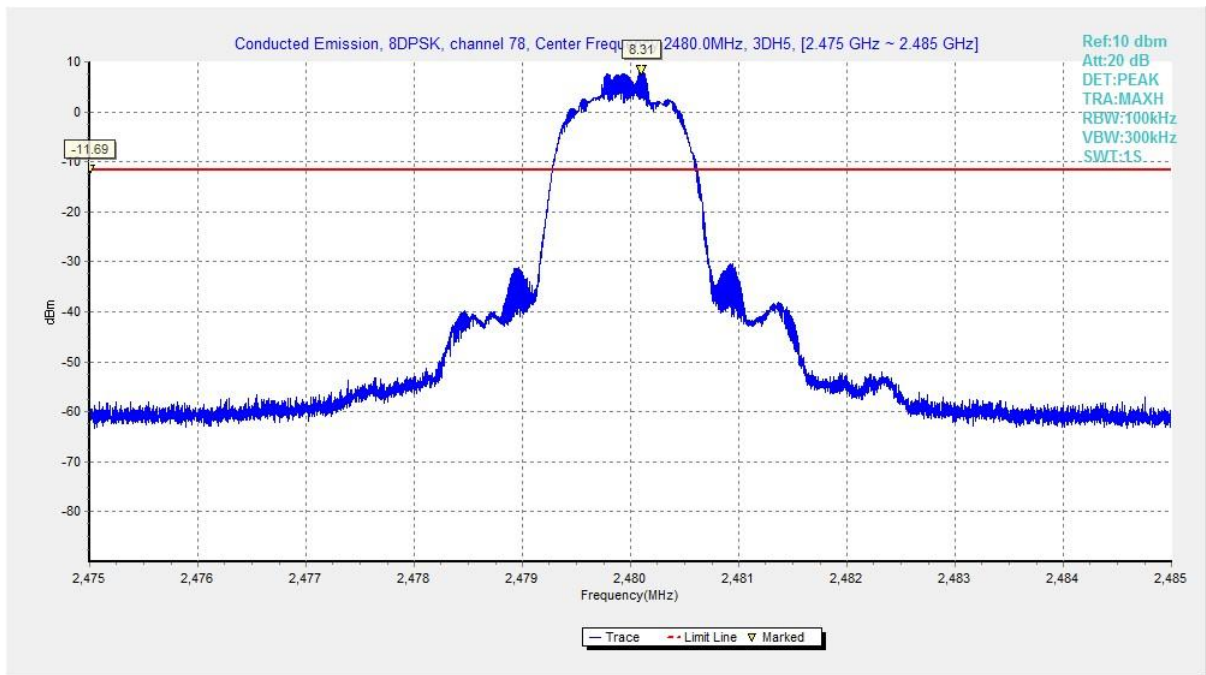


Fig. 37 Conducted Spurious Emission (8DPSK, Ch78, 2.480GHz)

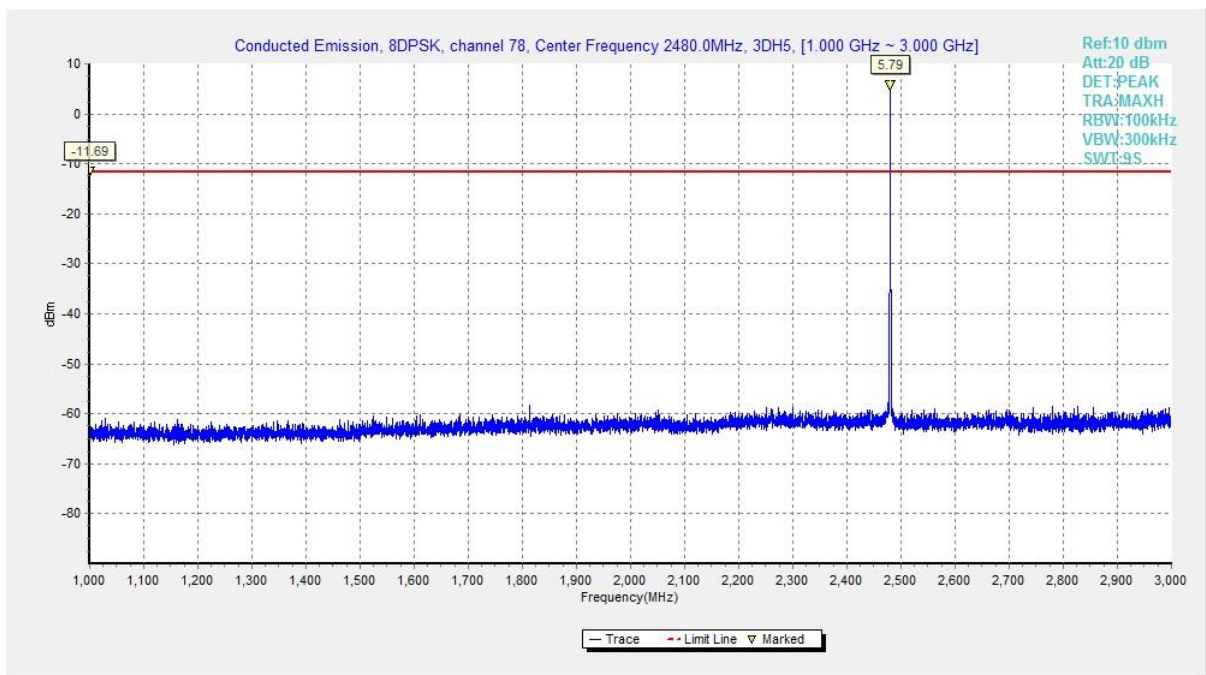


Fig. 38 Conducted Spurious Emission (8DPSK, Ch78, 1GHz-3GHz)

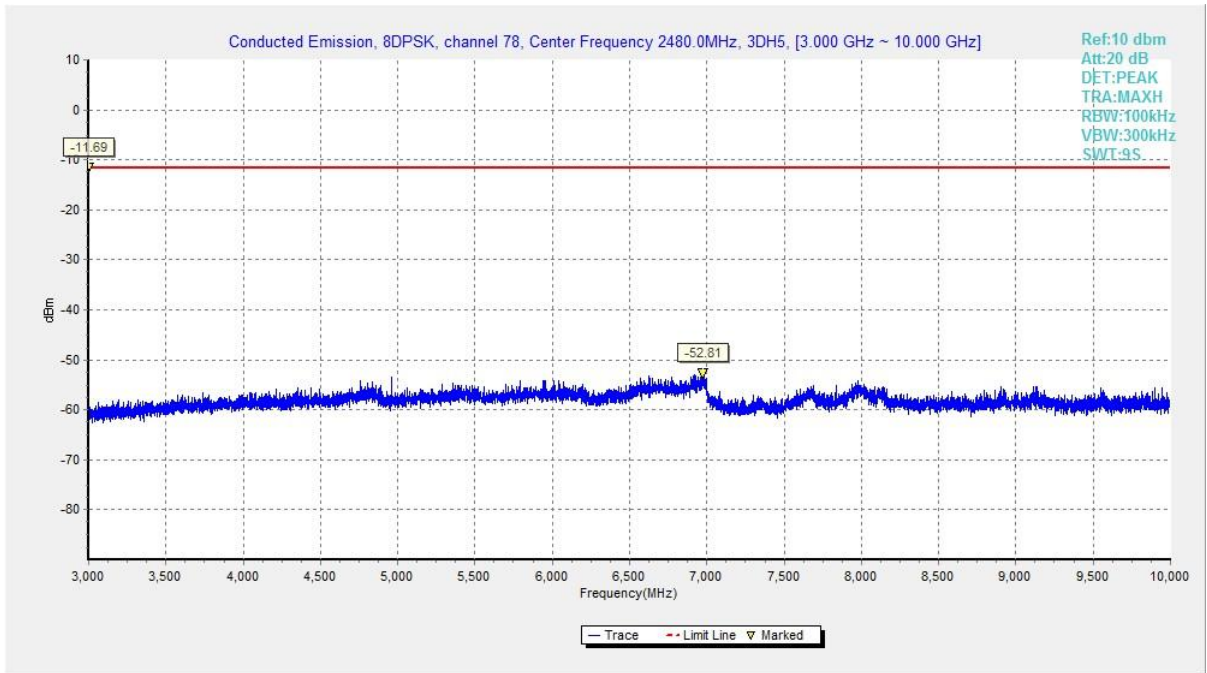


Fig. 39 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-10GHz)

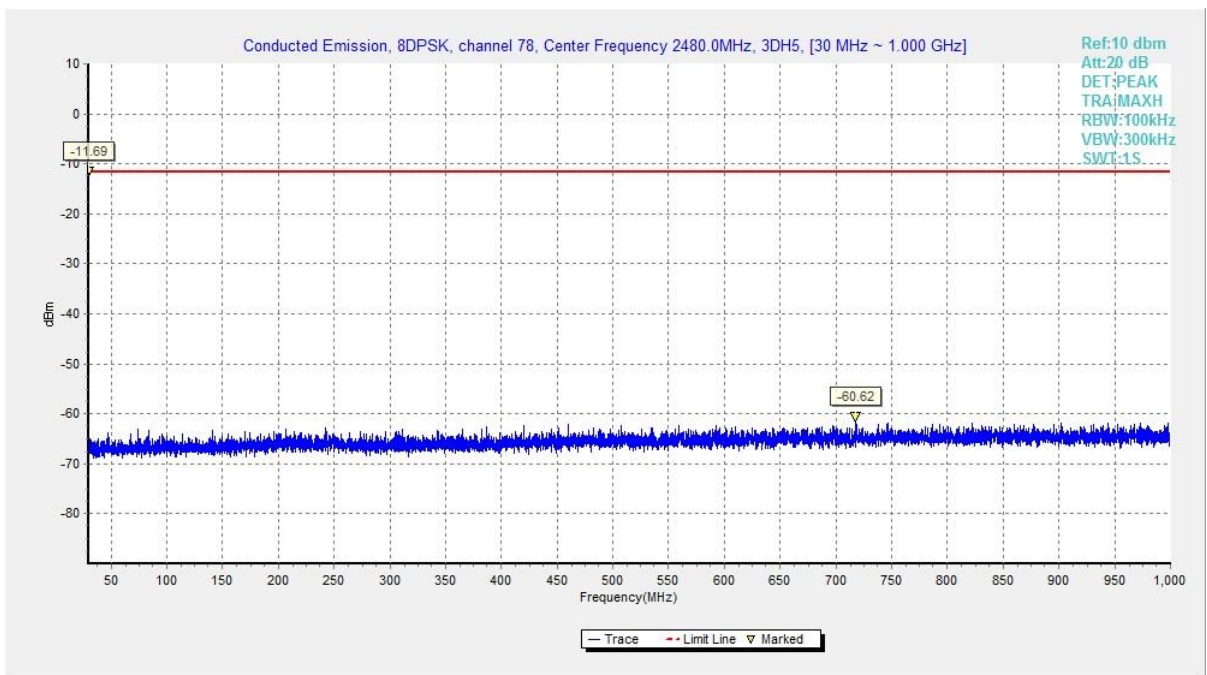


Fig. 40 Conducted Spurious Emission (All channel, 30MHz-1GHz)

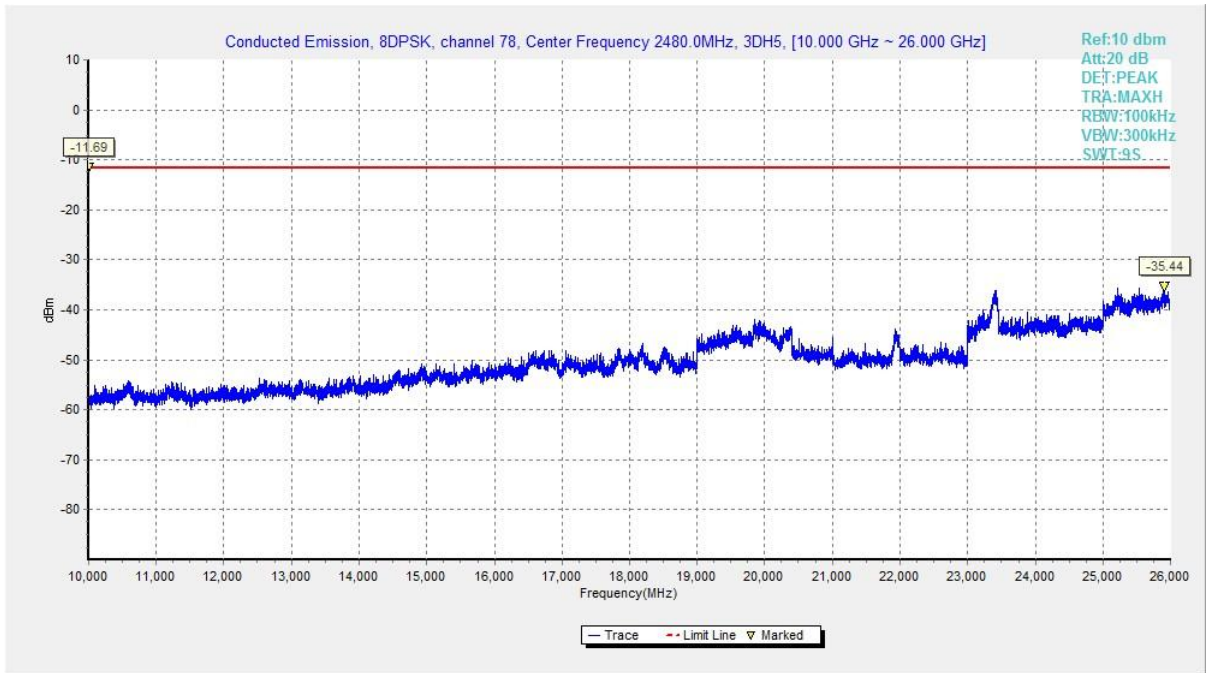


Fig. 41 Conducted Spurious Emission (All channel, 10GHz-26GHz)

A.4 Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1 GHz ~ 18 GHz	Fig.42	P
	39	1 GHz ~ 18 GHz	Fig.43	P
	78	1 GHz ~ 18 GHz	Fig.44	P
	Restricted Band(CH0)	2.38 GHz ~ 2.45 GHz	Fig.45	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.46	P
$\pi/4$ DQPSK	0	1 GHz ~ 18 GHz	Fig.47	P
	39	1 GHz ~ 18 GHz	Fig.48	P
	78	1 GHz ~ 18 GHz	Fig.49	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.50	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.51	P
8DPSK	0	1 GHz ~ 18 GHz	Fig.52	P
	39	1 GHz ~ 18 GHz	Fig.53	P
	78	1 GHz ~ 18 GHz	Fig.54	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.55	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.56	P
/	All channels	9 kHz ~ 30 MHz	Fig.57	P
		30 MHz ~ 1 GHz	Fig.58	P
		18 GHz ~ 26.5 GHz	Fig.59	P



**Worst Case Result
GFSK CH78 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4959.500000	54.63	74.00	19.37	V	13.7
6189.500000	51.63	74.00	22.37	H	18.9
13376.500000	45.79	74.00	28.21	H	12.6
14300.500000	46.16	74.00	27.84	V	12.9
15648.000000	47.60	74.00	26.40	H	13.9
17181.875000	49.71	74.00	24.29	V	17.0

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4959.500000	46.23	54.00	7.77	V	13.7
6199.500000	41.07	54.00	12.93	V	18.8
13451.750000	35.93	54.00	18.07	V	12.6
14409.875000	36.81	54.00	17.19	H	13.0
15648.437500	37.75	54.00	16.25	H	14.0
17238.750000	39.58	54.00	14.42	V	17.0

π /4 DQPSK CH78 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4960.500000	52.02	74.00	21.98	V	13.7
6214.500000	50.13	74.00	23.87	V	18.7
13369.500000	45.77	74.00	28.23	V	12.6
14463.687500	48.90	74.00	25.10	H	13.0
15798.500000	48.70	74.00	25.30	H	14.6
16995.937500	49.30	74.00	24.70	V	16.5

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4960.000000	40.80	54.00	13.20	V	13.7
6209.000000	40.87	54.00	13.13	V	18.8
13488.500000	35.97	54.00	18.03	V	12.5
14367.000000	36.54	54.00	17.46	H	13.0
15752.562500	37.95	54.00	16.05	H	14.4
17215.562500	39.04	54.00	14.96	H	17.0

**8DPSK CH78 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4960.000000	52.79	74.00	21.21	V	13.7
6197.500000	50.70	74.00	23.30	H	18.9
13429.000000	45.90	74.00	28.10	H	12.6
14357.812500	46.57	74.00	27.43	H	12.9
15742.500000	48.40	74.00	25.60	V	14.4
17411.125000	49.97	74.00	24.03	H	17.0

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
4960.000000	39.71	54.00	14.29	V	13.7
6217.000000	40.49	54.00	13.51	V	18.7
13530.062500	36.46	54.00	17.54	V	12.4
14517.062500	36.72	54.00	17.28	V	13.0
15699.187500	37.81	54.00	16.19	H	14.2
17210.750000	39.04	54.00	14.96	H	17.0

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = P_{Mea} + Cable Loss + Antenna Factor - Gain of the preamplifier

See below for test graphs.

Conclusion: Pass

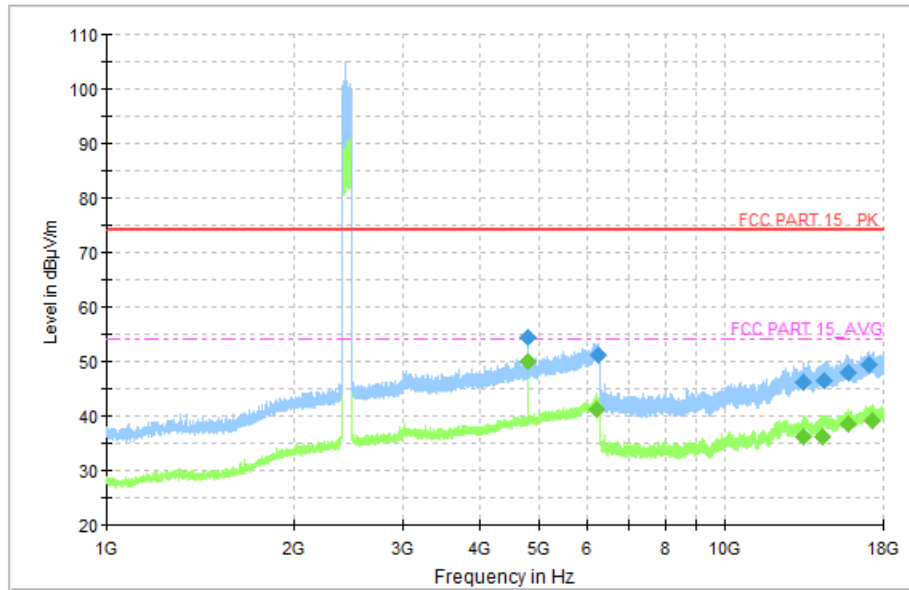


Fig. 42 Radiated Spurious Emission (GFSK, Ch0, 1GHz ~ 18GHz)

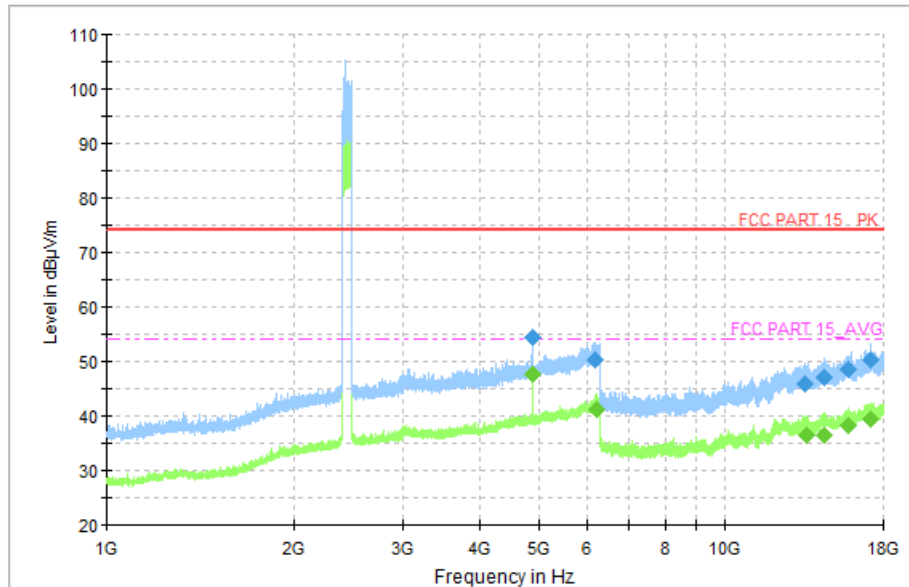


Fig. 43 Radiated Spurious Emission (GFSK, Ch39, 1GHz ~ 18GHz)

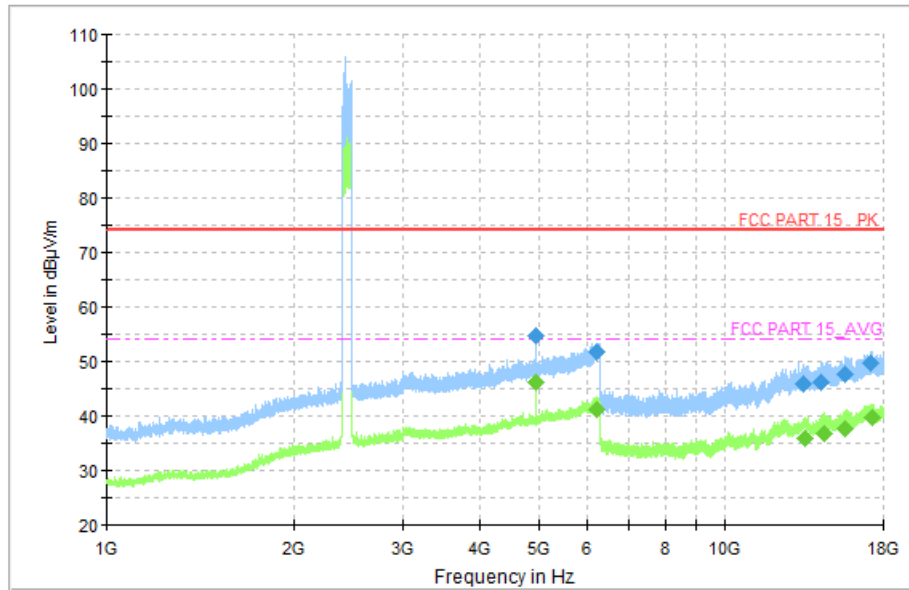


Fig. 44 Radiated Spurious Emission (GFSK, Ch78, 1GHz ~ 18GHz)

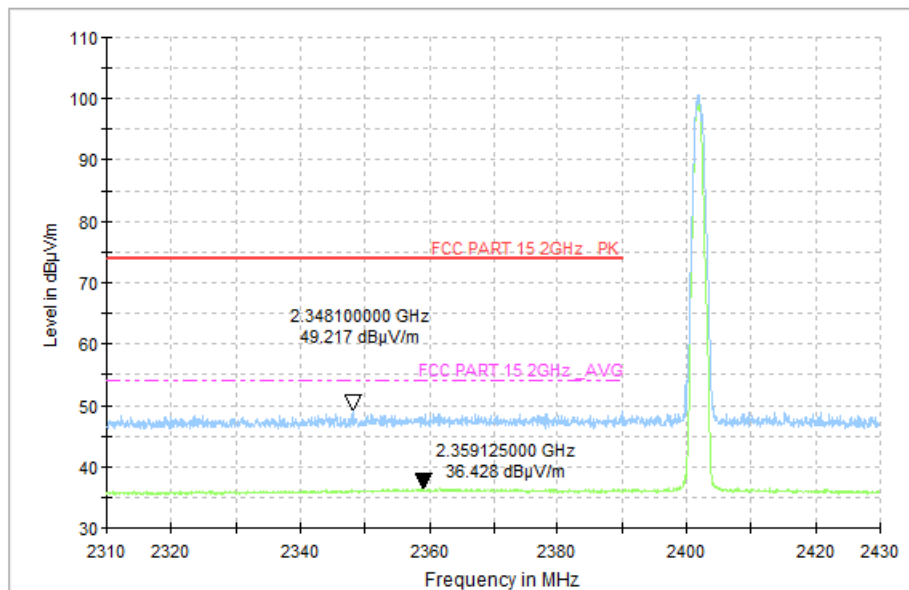


Fig. 45 Radiated Band Edges (GFSK, Ch0, 2380GHz ~ 2450GHz)

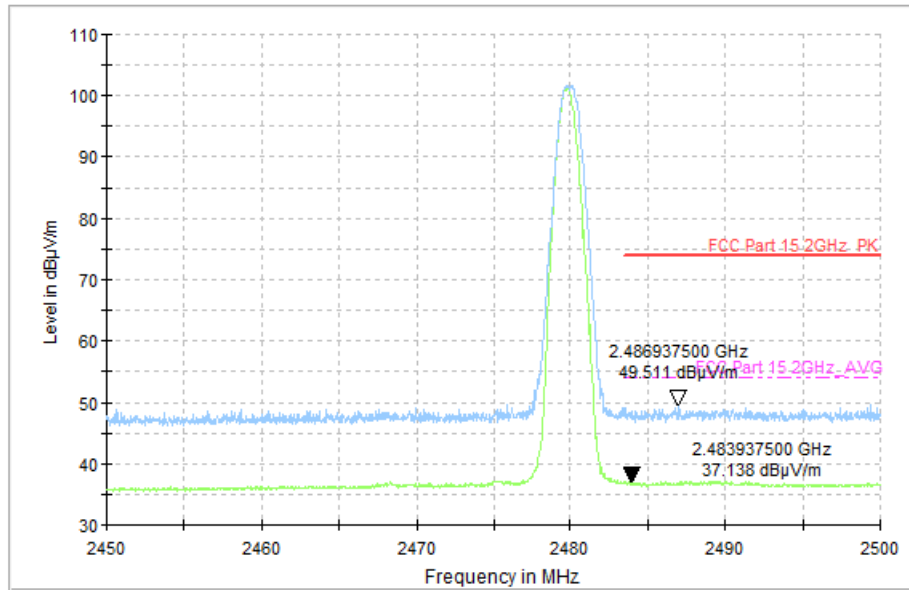


Fig. 46 Radiated Band Edges (GFSK, Ch78, 2450GHz ~ 2500GHz)

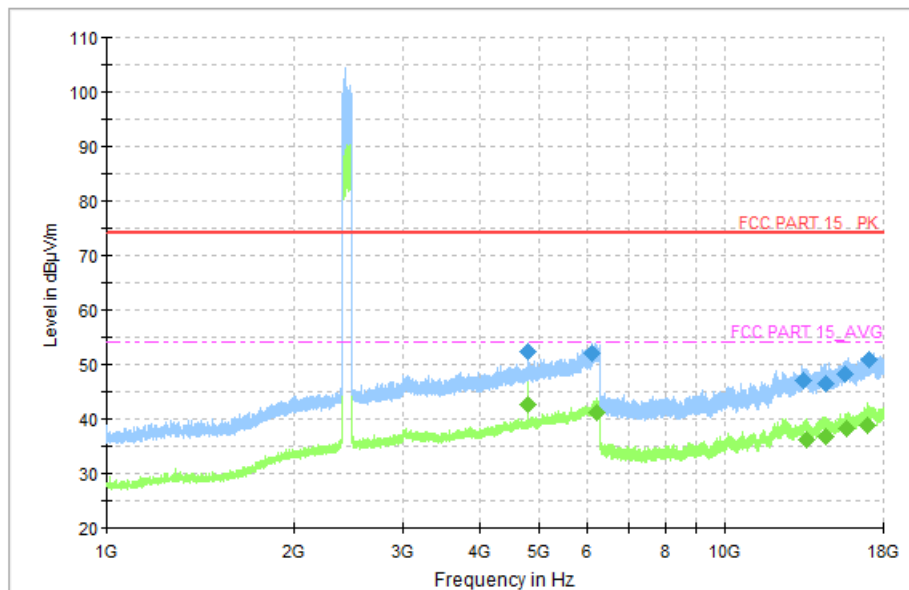


Fig. 47 Radiated Spurious Emission ($\pi/4$ DQPSK, Ch0, 1GHz ~ 18GHz)

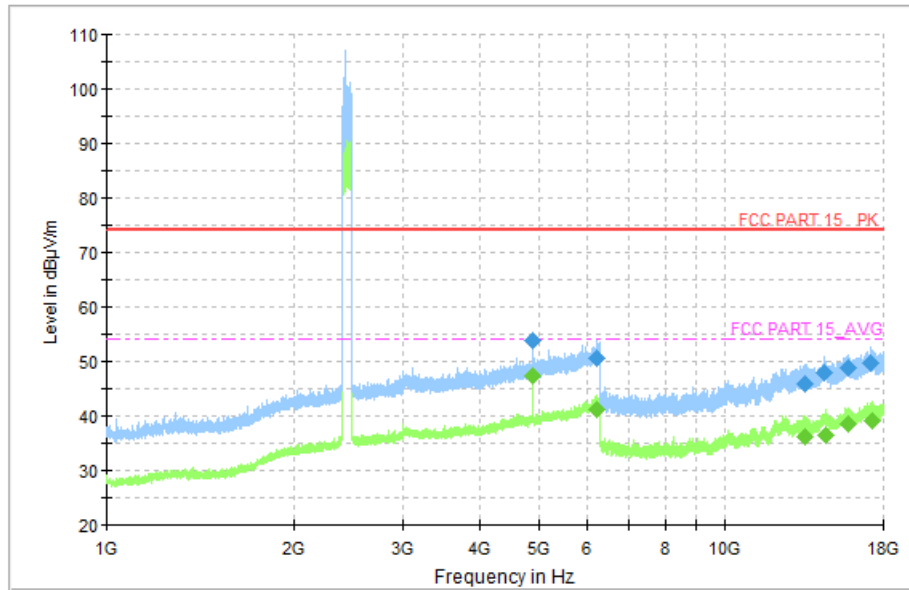


Fig. 48 Radiated Spurious Emission ($\pi/4$ DQPSK, Ch39, 1GHz ~ 18GHz)

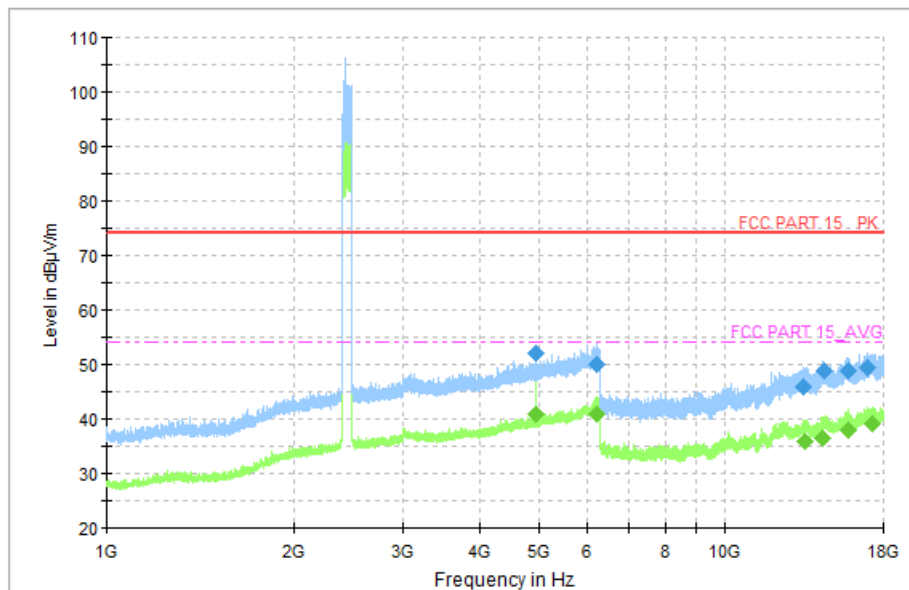


Fig. 49 Radiated Spurious Emission ($\pi/4$ DQPSK, Ch78, 1GHz ~ 18GHz)

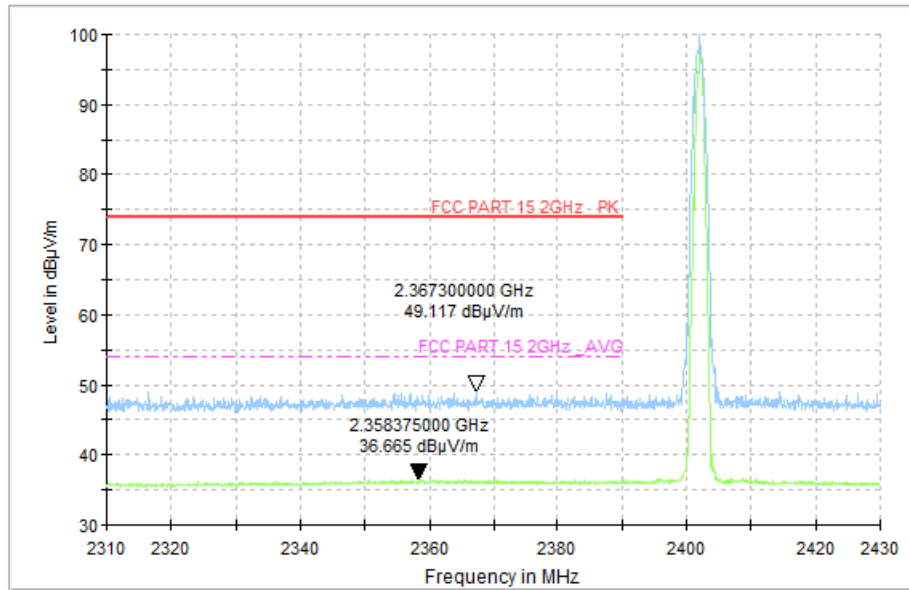


Fig. 50 Radiated Band Edges ($\pi/4$ DQPSK, Ch0, 2380GHz ~ 2450GHz)

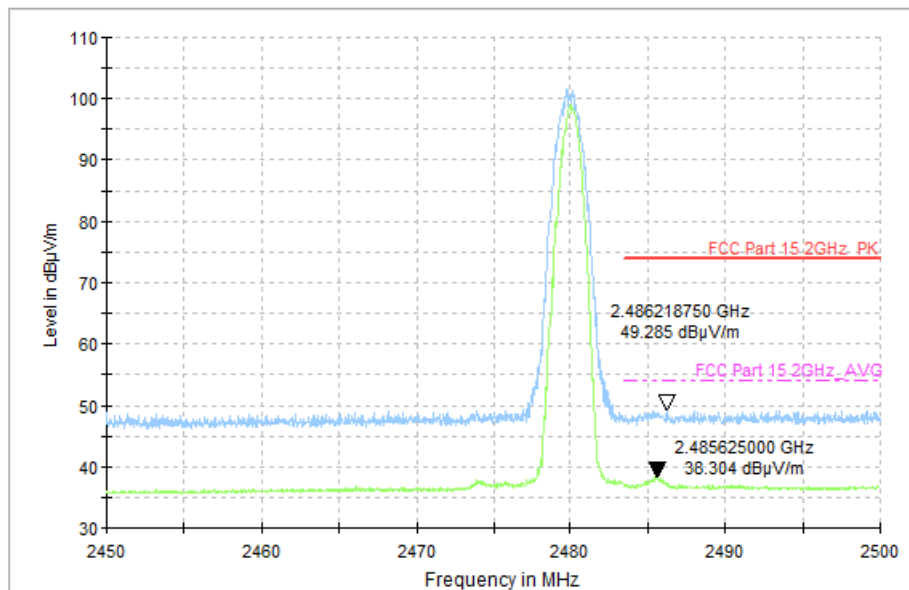


Fig. 51 Radiated Band Edges ($\pi/4$ DQPSK, Ch78, 2450GHz ~ 2500GHz)

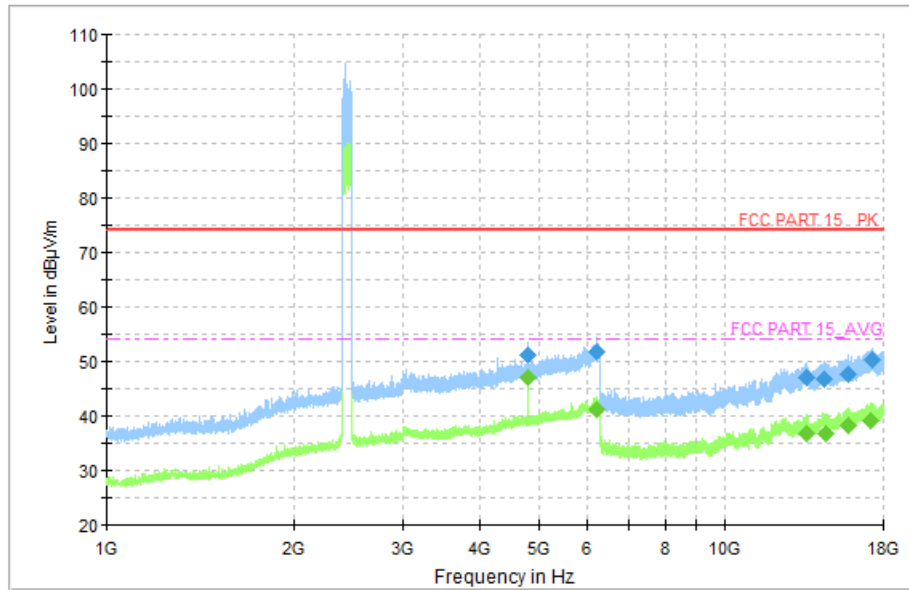


Fig. 52 Radiated Spurious Emission (8DPSK, Ch0, 1GHz ~ 18GHz)

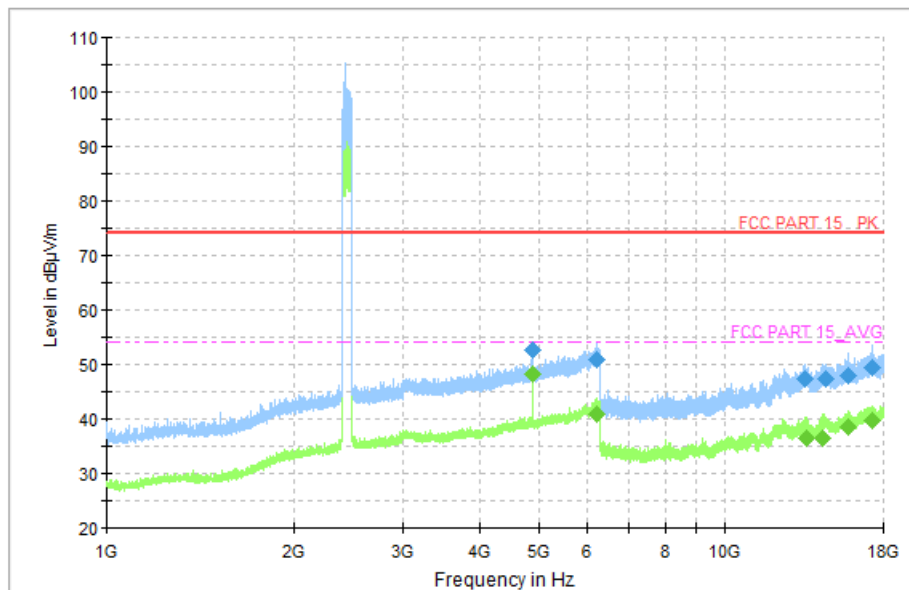


Fig. 53 Radiated Spurious Emission (8DPSK, Ch39, 1GHz ~ 18GHz)

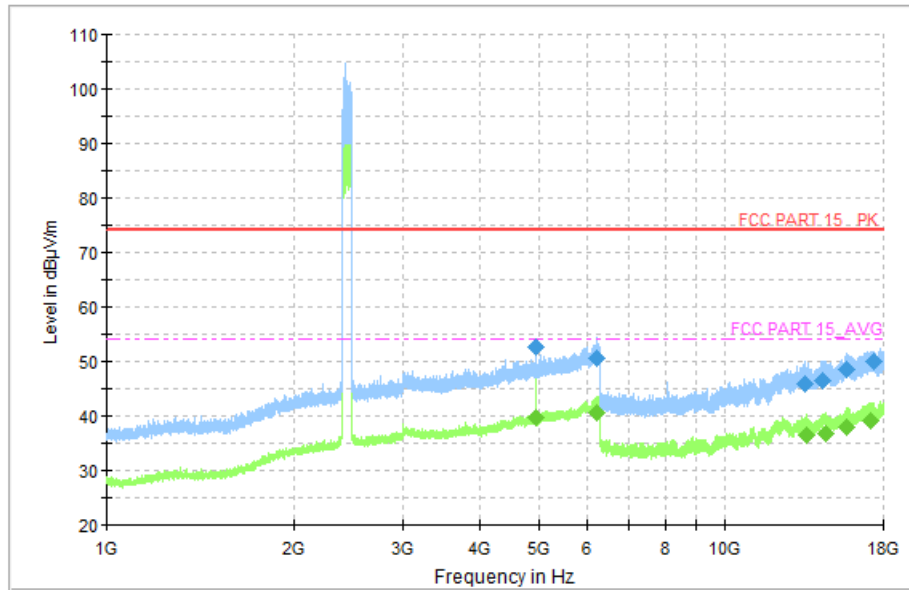


Fig. 54 Radiated Spurious Emission (8DPSK, Ch78, 1GHz ~ 18GHz)

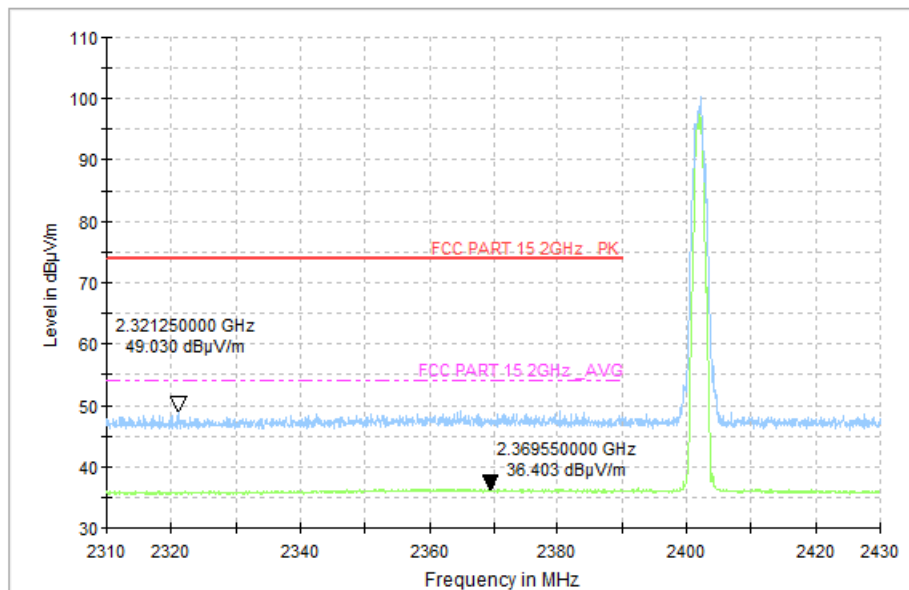


Fig. 55 Radiated Band Edges (8DPSK, Ch0, 2380GHz ~ 2450GHz)

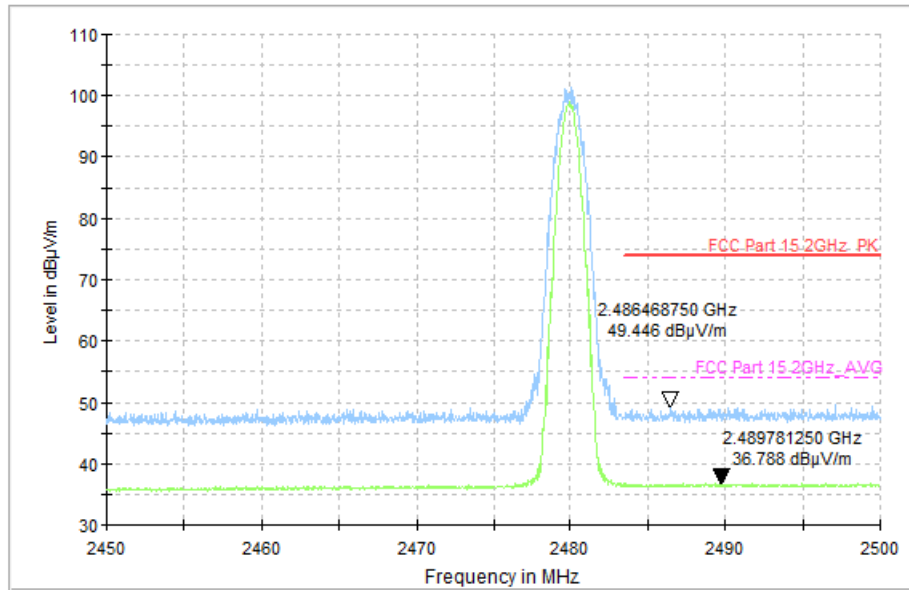


Fig. 56 Radiated Band Edges (8DPSK, Ch78, 2450GHz ~ 2500GHz)

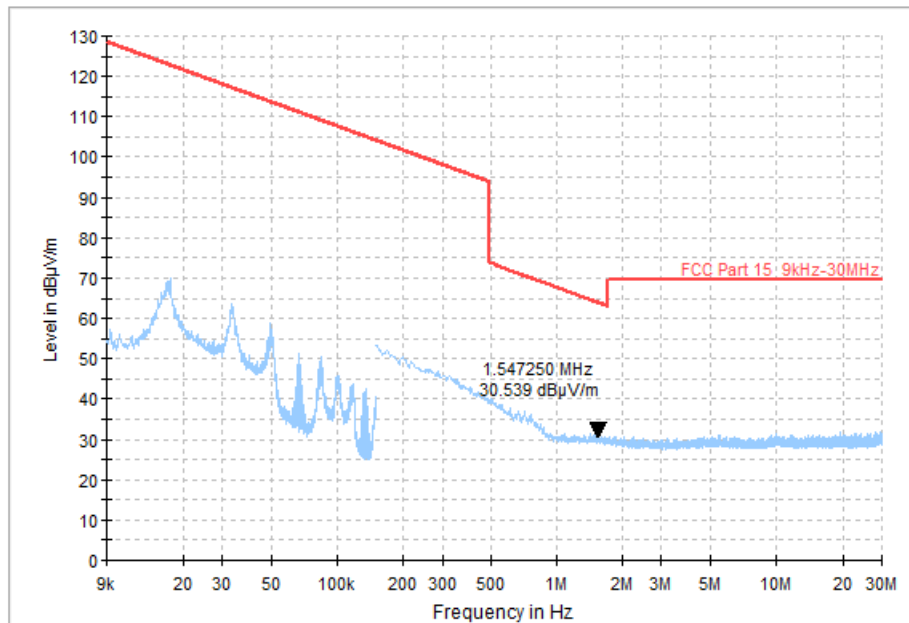


Fig. 57 Radiated Spurious Emission (All Channels, 9kHz ~ 30MHz)

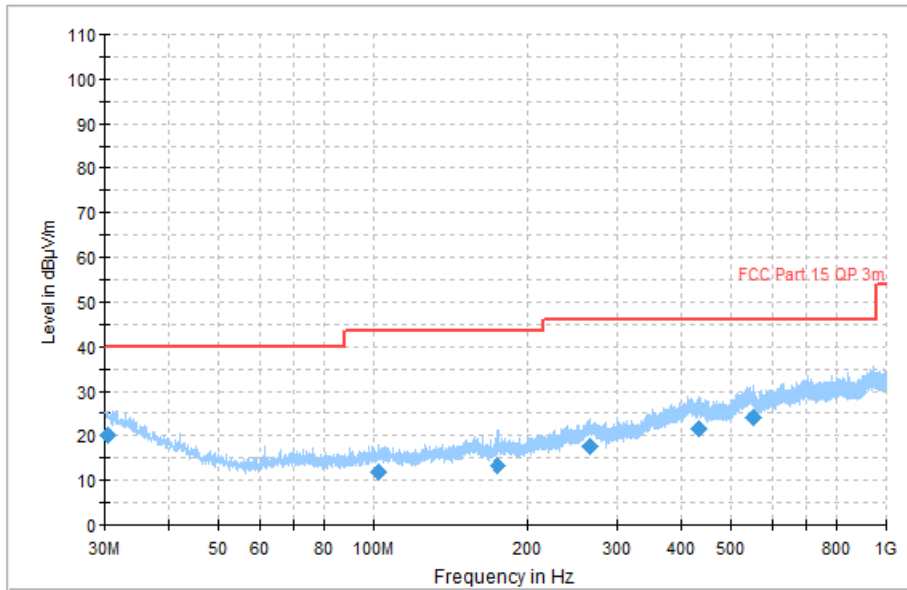


Fig. 58 Radiated Spurious Emission (All Channels, 30MHz ~ 1GHz)

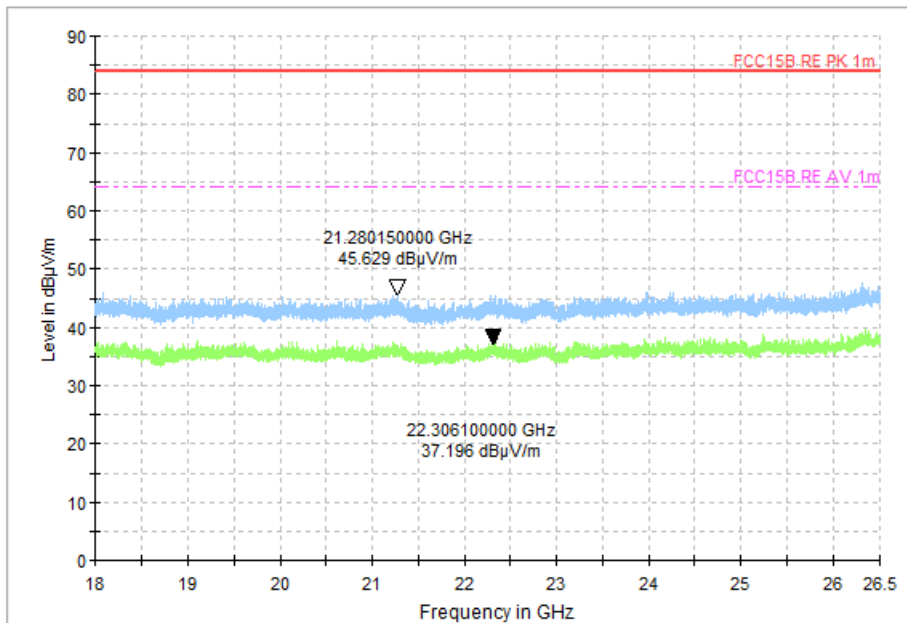


Fig. 59 Radiated Spurious Emission (All Channels, 18GHz ~ 26.5GHz)

A.5 20dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

Measurement Result:

Mode	Channel	20dB Bandwidth (kHz)		conclusion
GFSK	0	Fig.60	985.50	/
	39	Fig.61	940.50	
	78	Fig.62	941.25	
$\pi/4$ DQPSK	0	Fig.63	1230.75	/
	39	Fig.64	1251.75	
	78	Fig.65	1252.50	
8DPSK	0	Fig.66	1238.25	/
	39	Fig.67	1254.75	
	78	Fig.68	1253.25	

See below for test graphs.

Conclusion: PASS

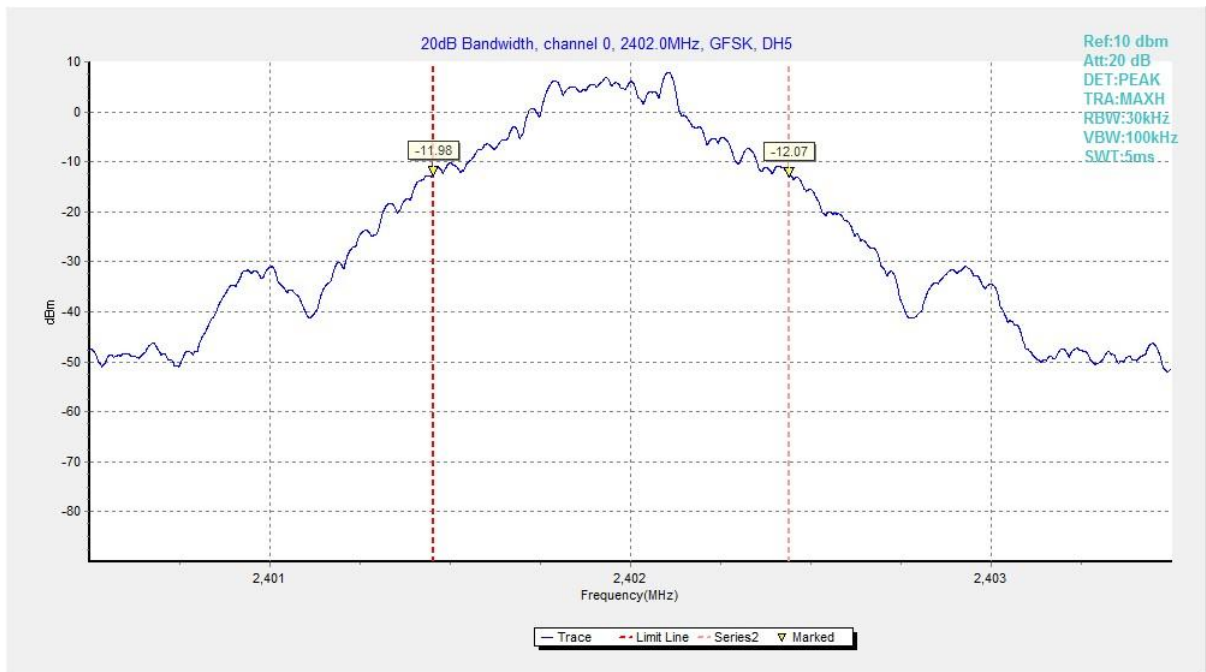


Fig. 60 20dB Bandwidth (GFSK, Ch 0)

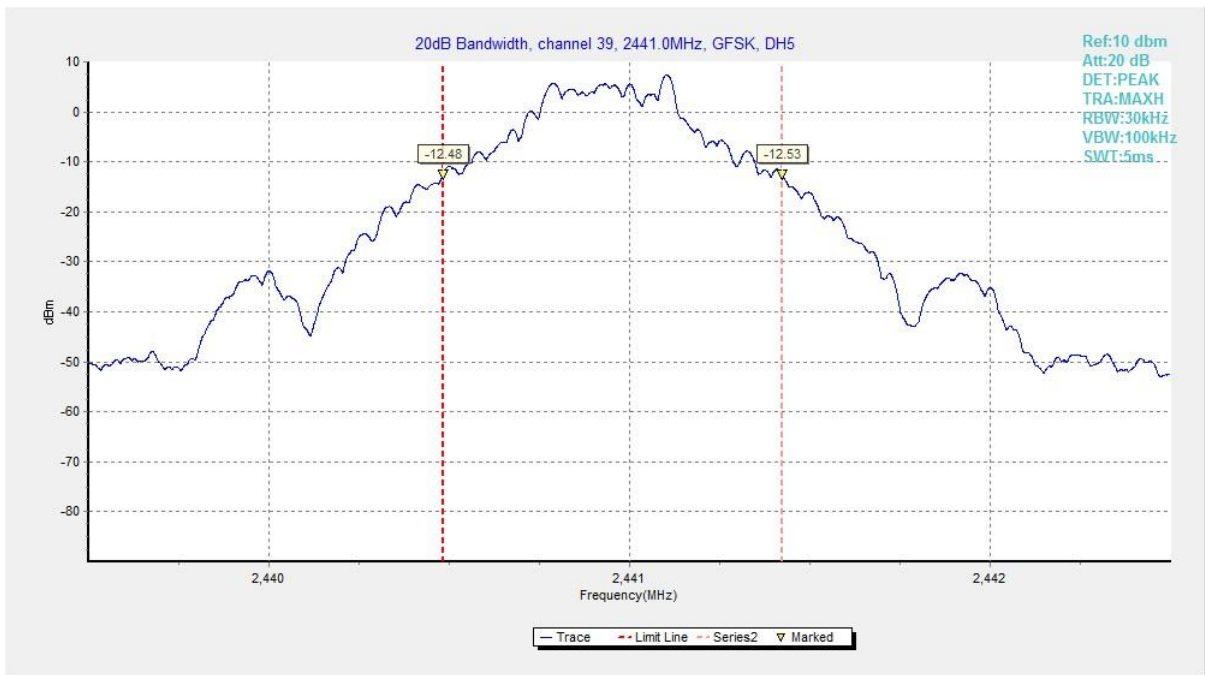


Fig. 61 20dB Bandwidth (GFSK, Ch 39)

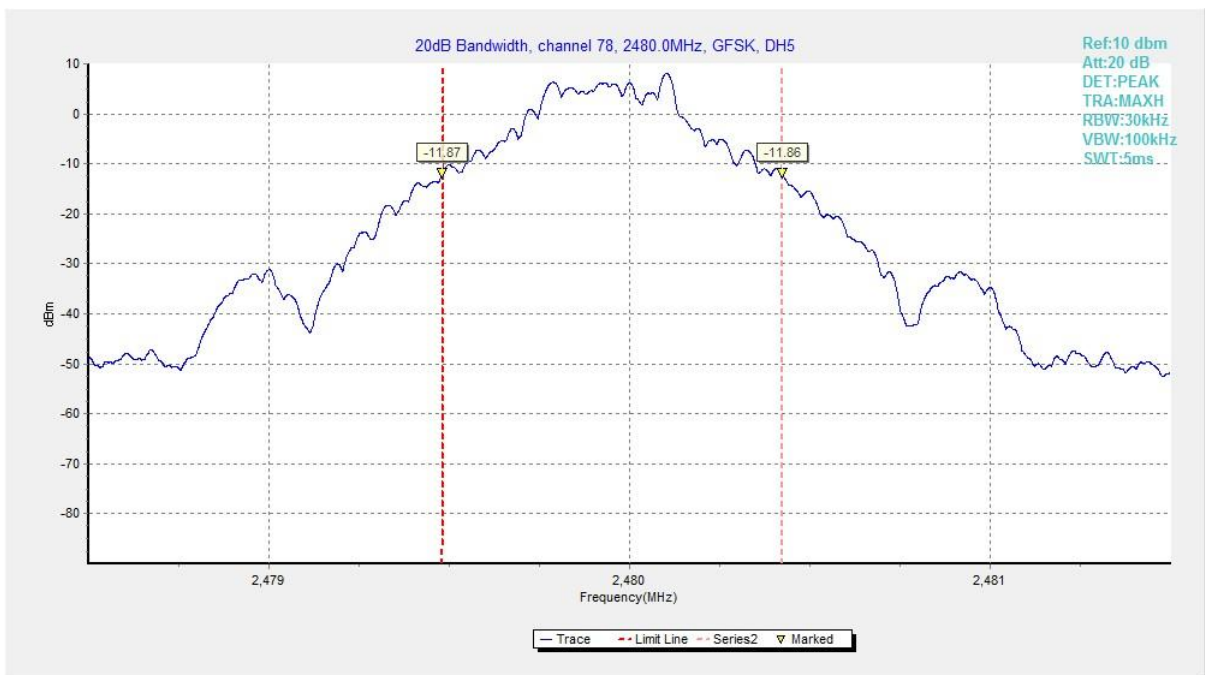


Fig. 62 20dB Bandwidth (GFSK, Ch 78)

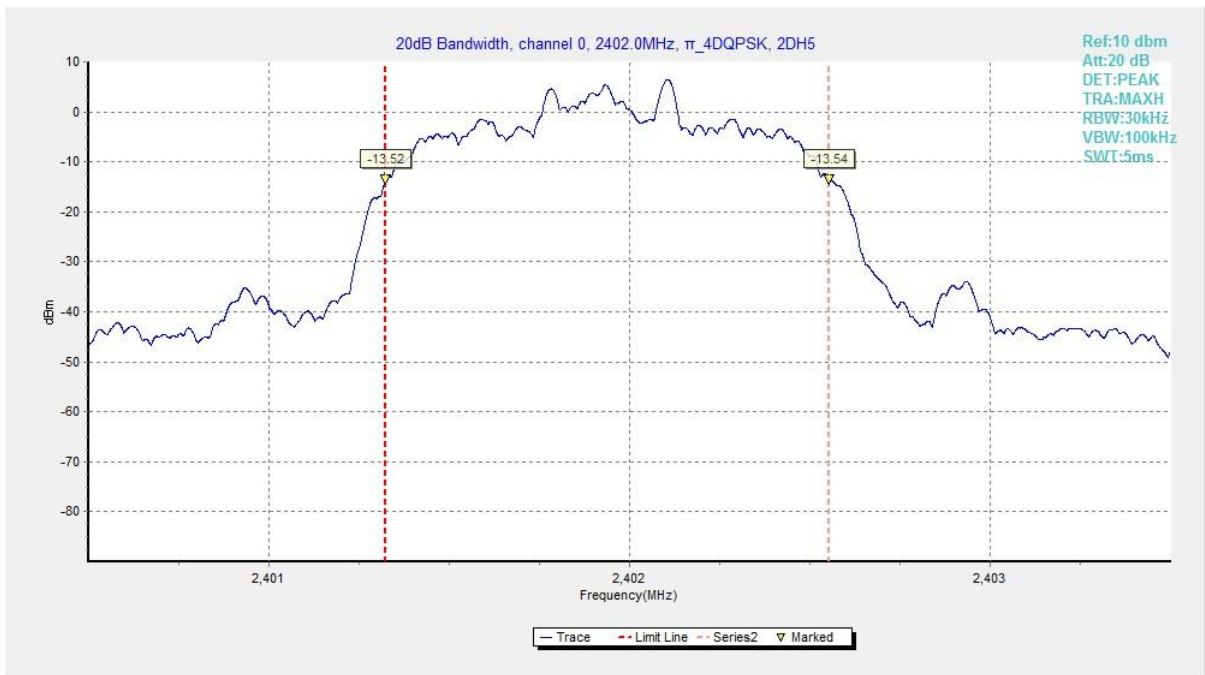


Fig. 63 20dB Bandwidth (π /4 DQPSK, Ch 0)

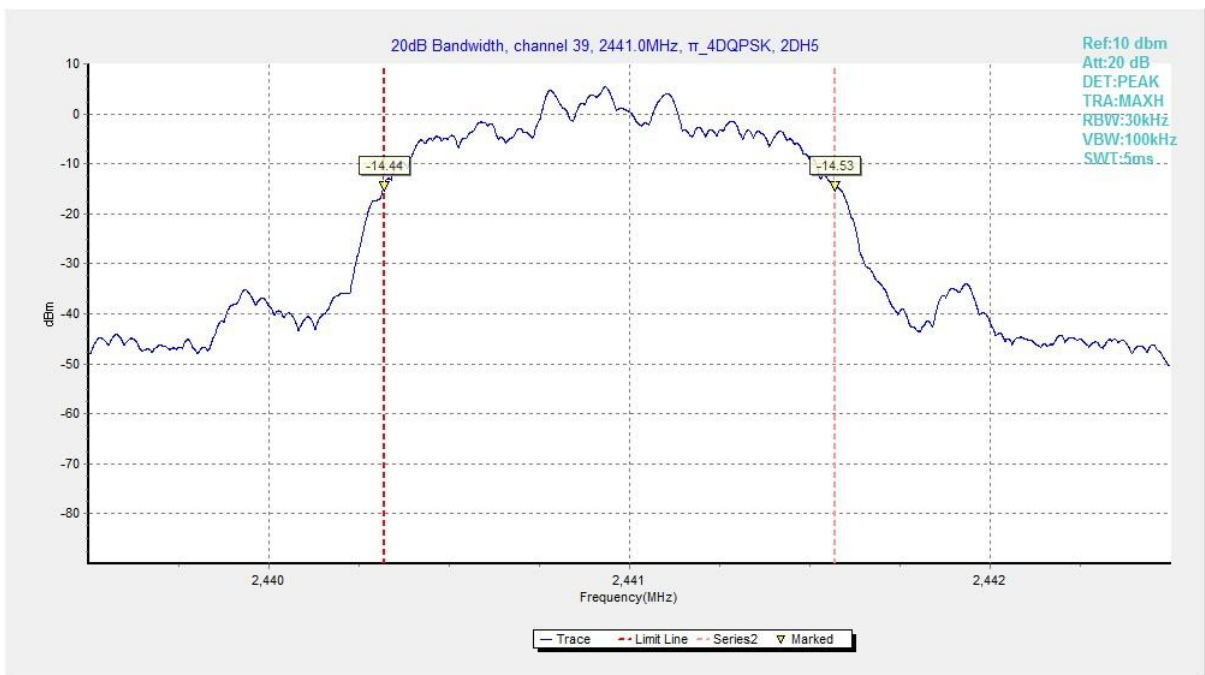


Fig. 64 20dB Bandwidth (π /4 DQPSK, Ch 39)

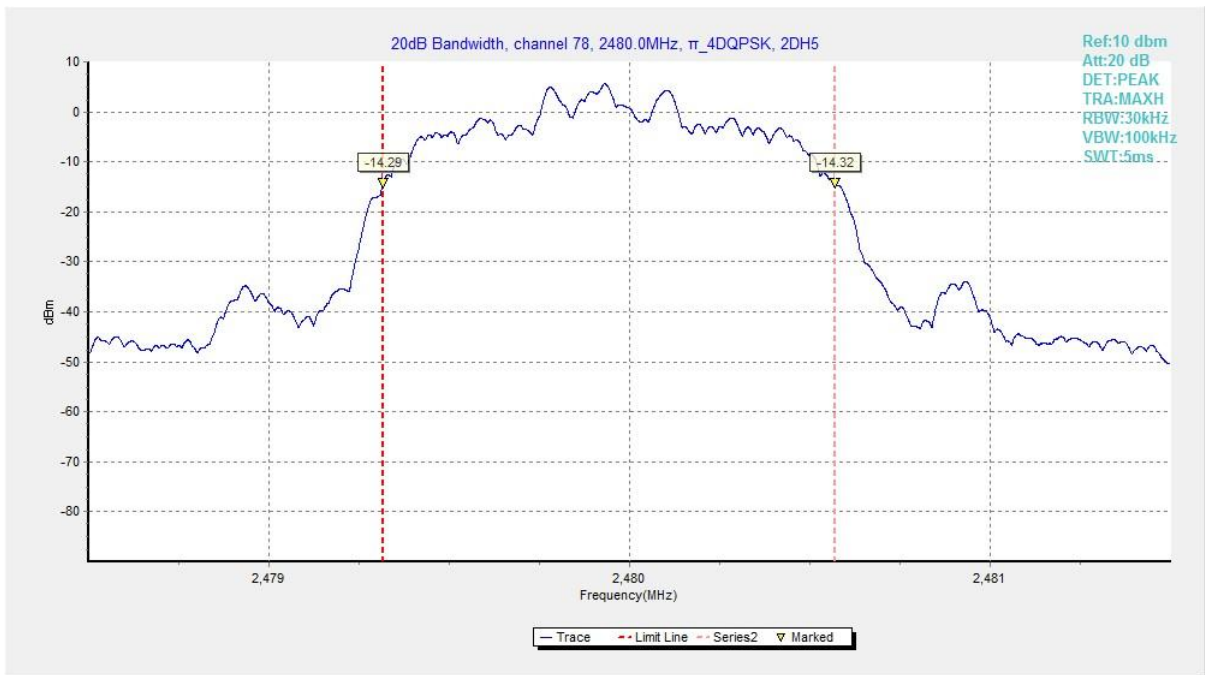


Fig. 65 20dB Bandwidth ($\pi/4$ DQPSK, Ch 78)

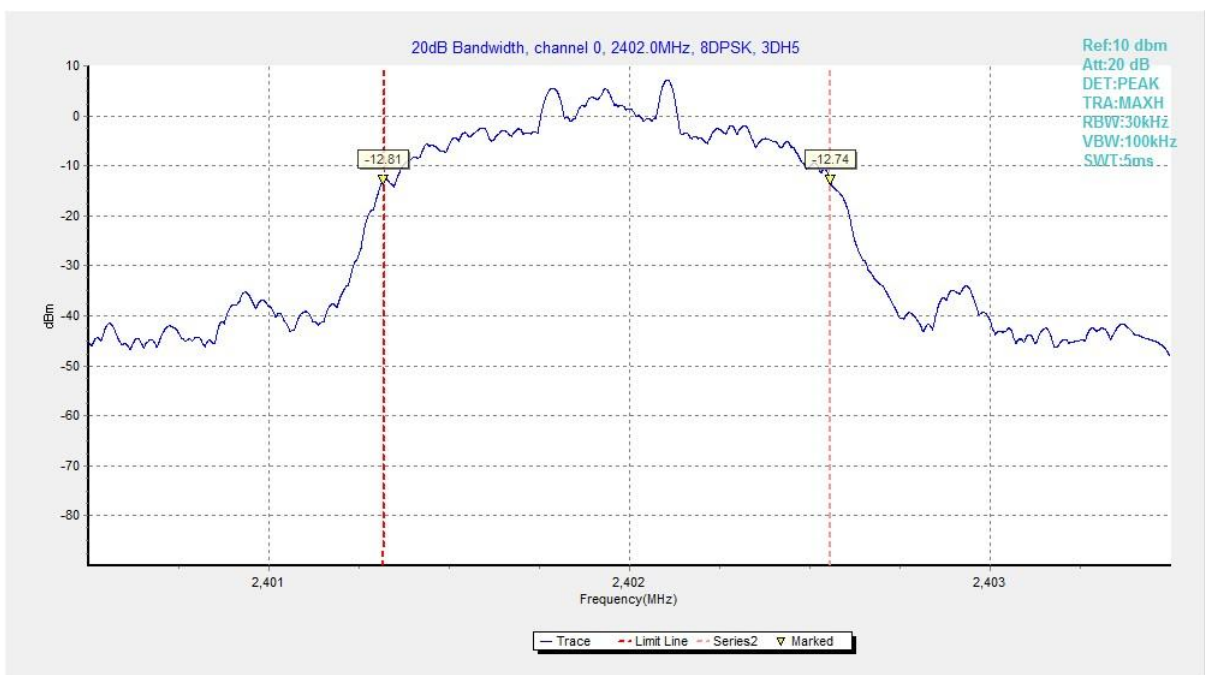


Fig. 66 20dB Bandwidth (8DPSK, Ch 0)

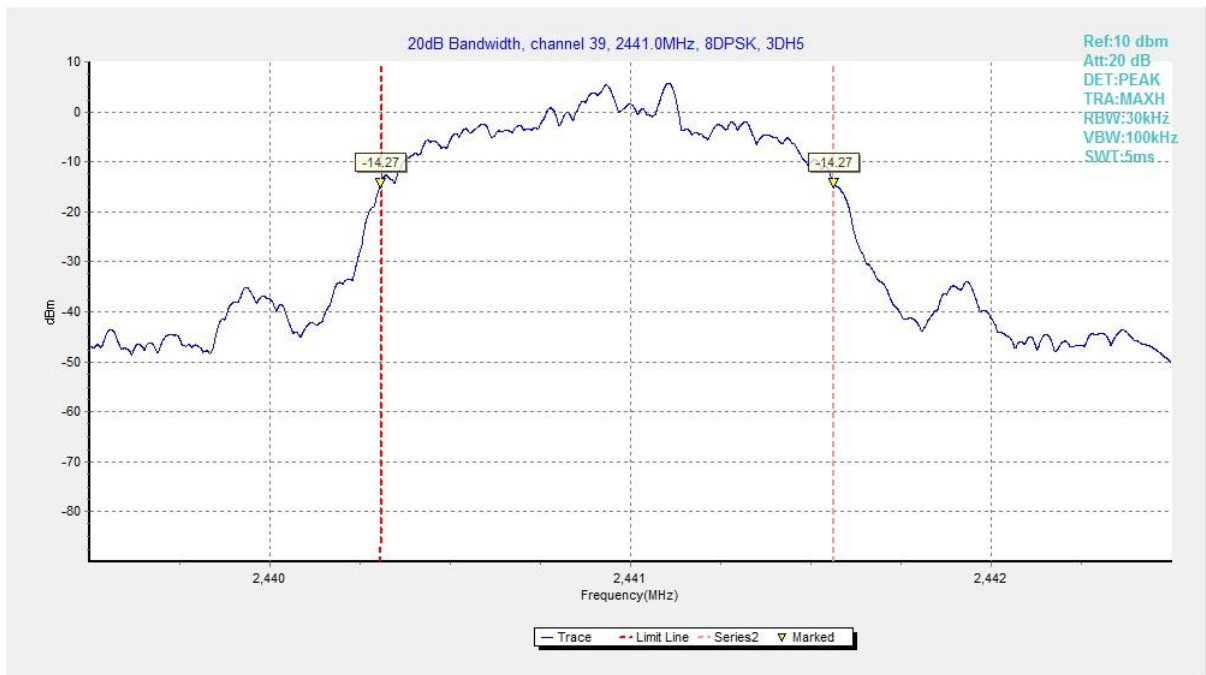


Fig. 67 20dB Bandwidth (8DPSK, Ch 39)

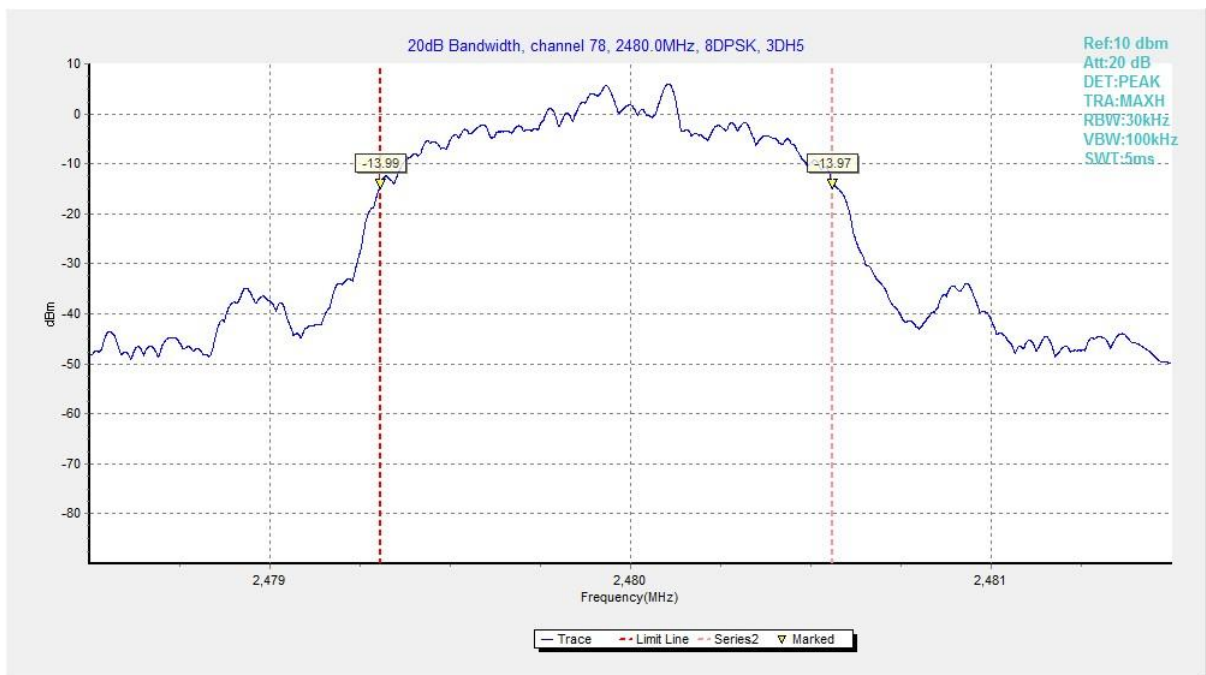


Fig. 68 20dB Bandwidth (8DPSK, Ch 78)

A.6 Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)	< 400 ms

Measurement Results:

Mode	Channel	Packet	Dwell Time(ms)		Conclusion
GFSK	39	DH5	Fig.69	201.73	P
			Fig.70		
$\pi/4$ DQPSK	39	2-DH5	Fig.71	190.00	P
			Fig.72		
8DPSK	39	3-DH5	Fig.73	173.23	P
			Fig.74		

See below for test graphs.

Conclusion: Pass

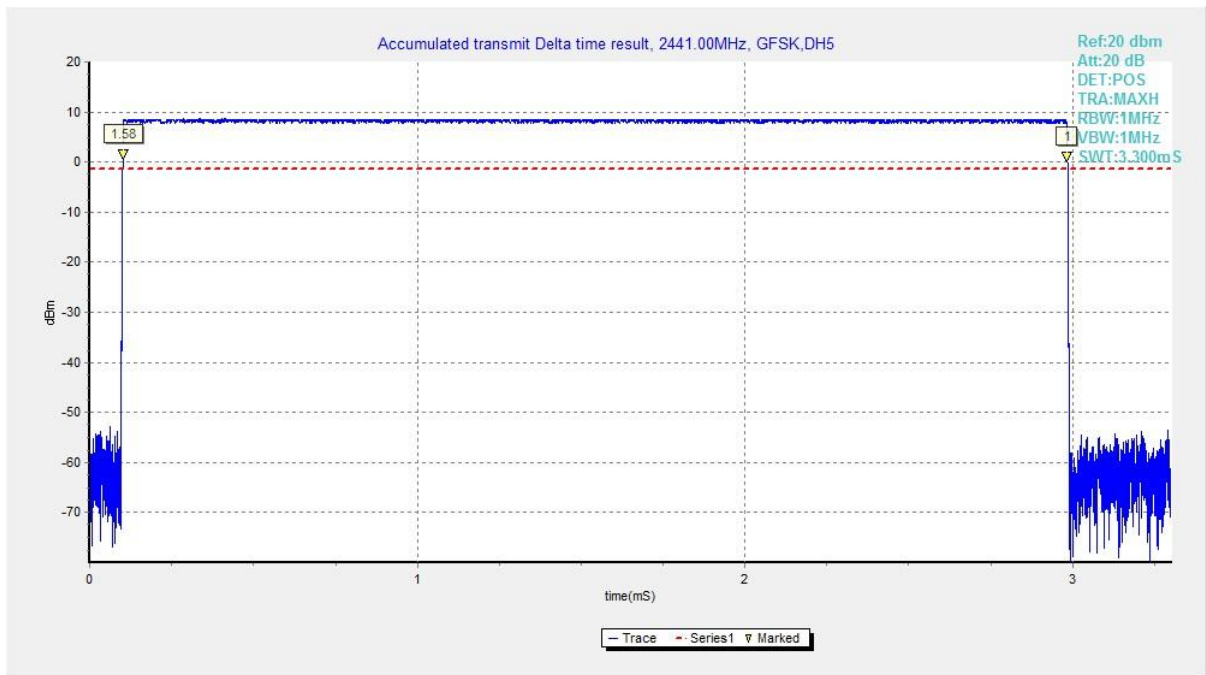


Fig. 69 Time of Occupancy(Dwell Time) (GFSK, Ch39)

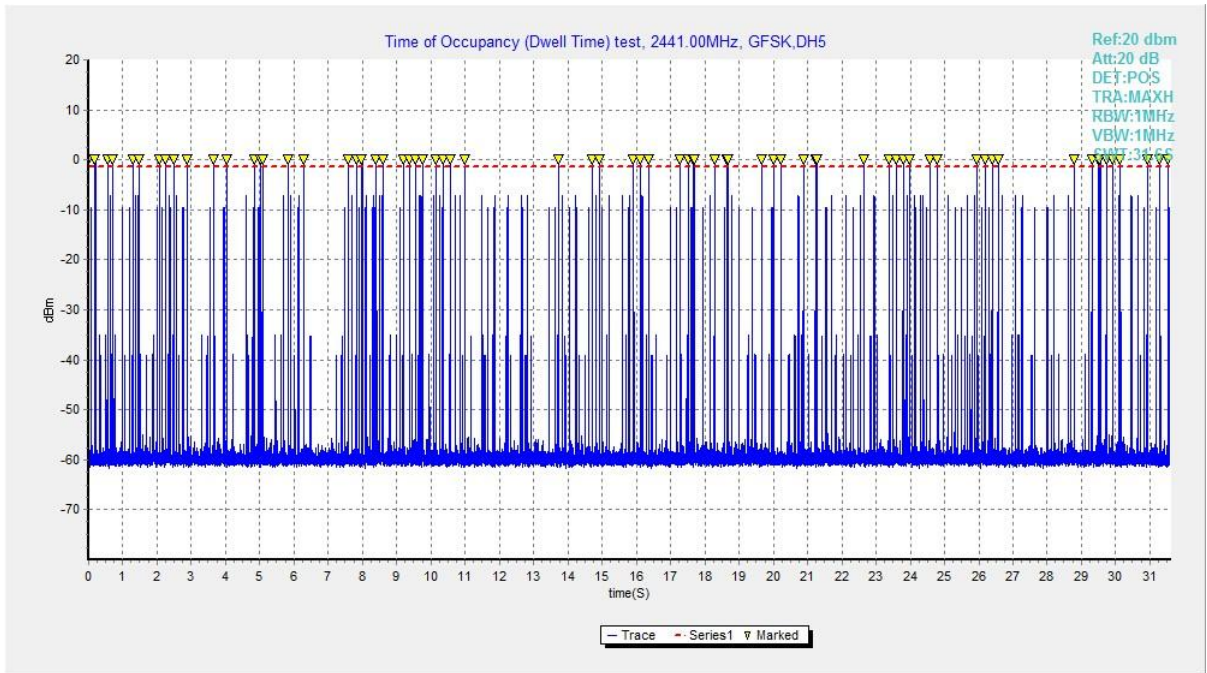


Fig. 70 Time of Occupancy(Dwell Time) (GFSK, Ch39)

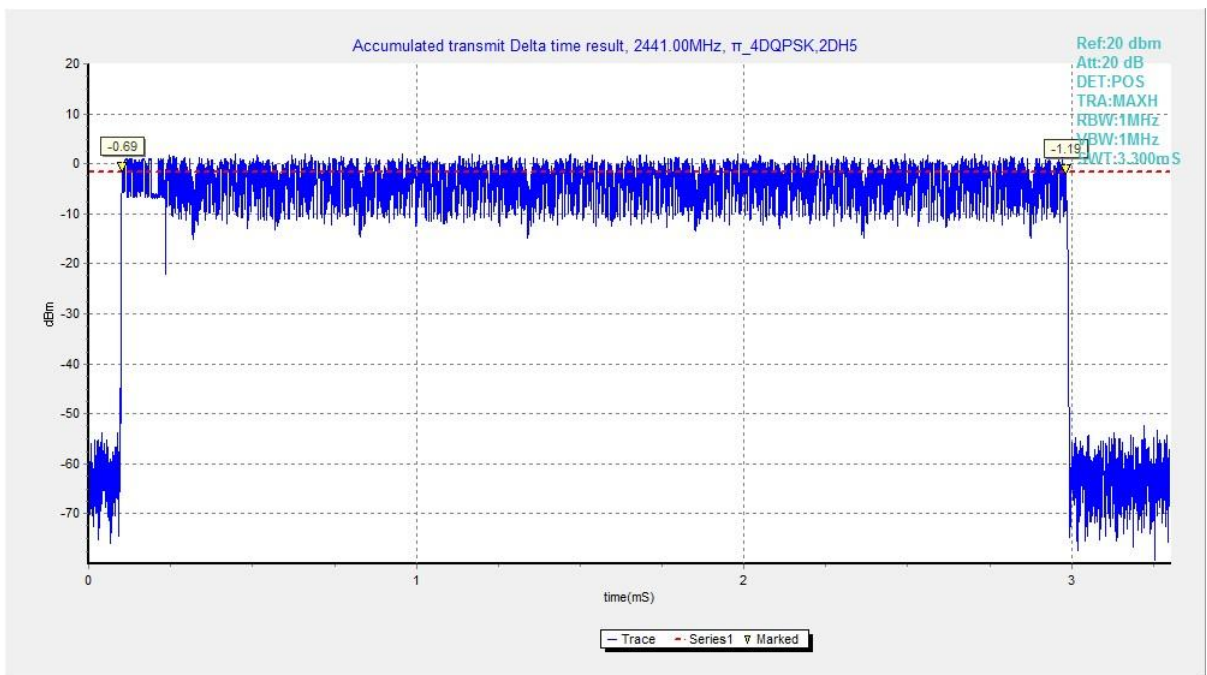


Fig. 71 Time of Occupancy(Dwell Time) ($\pi/4$ DQPSK, Ch39)

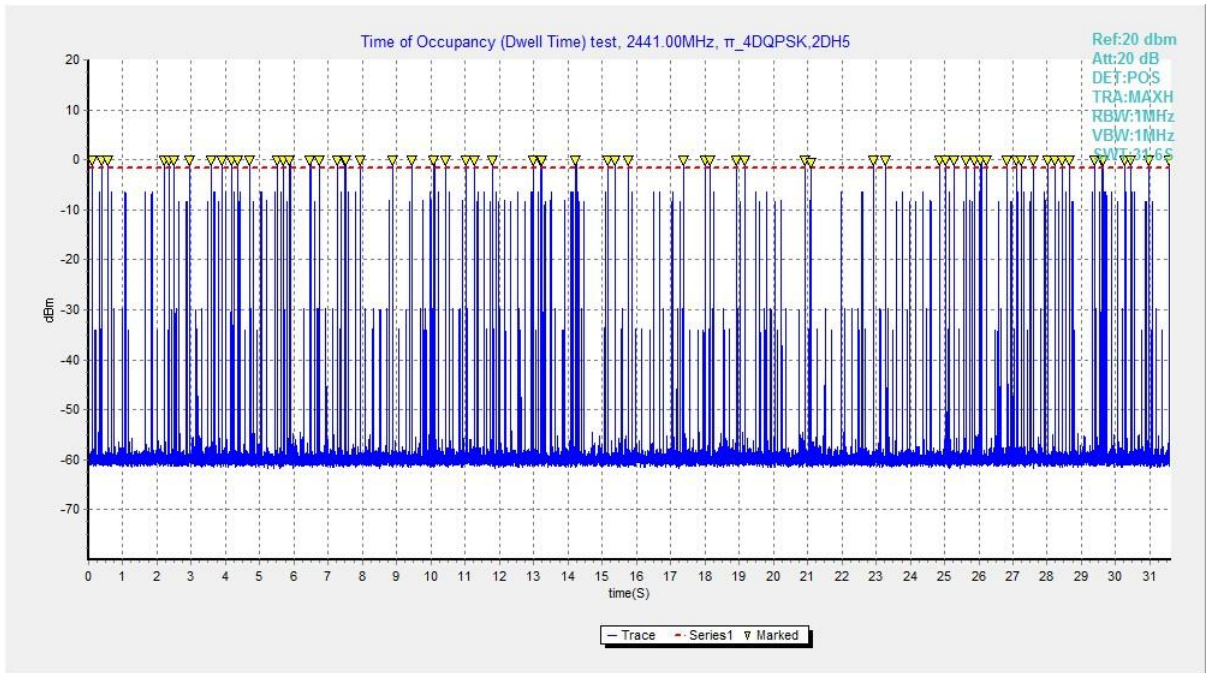


Fig. 72 Time of Occupancy(Dwell Time) ($\pi/4$ DQPSK, Ch39)

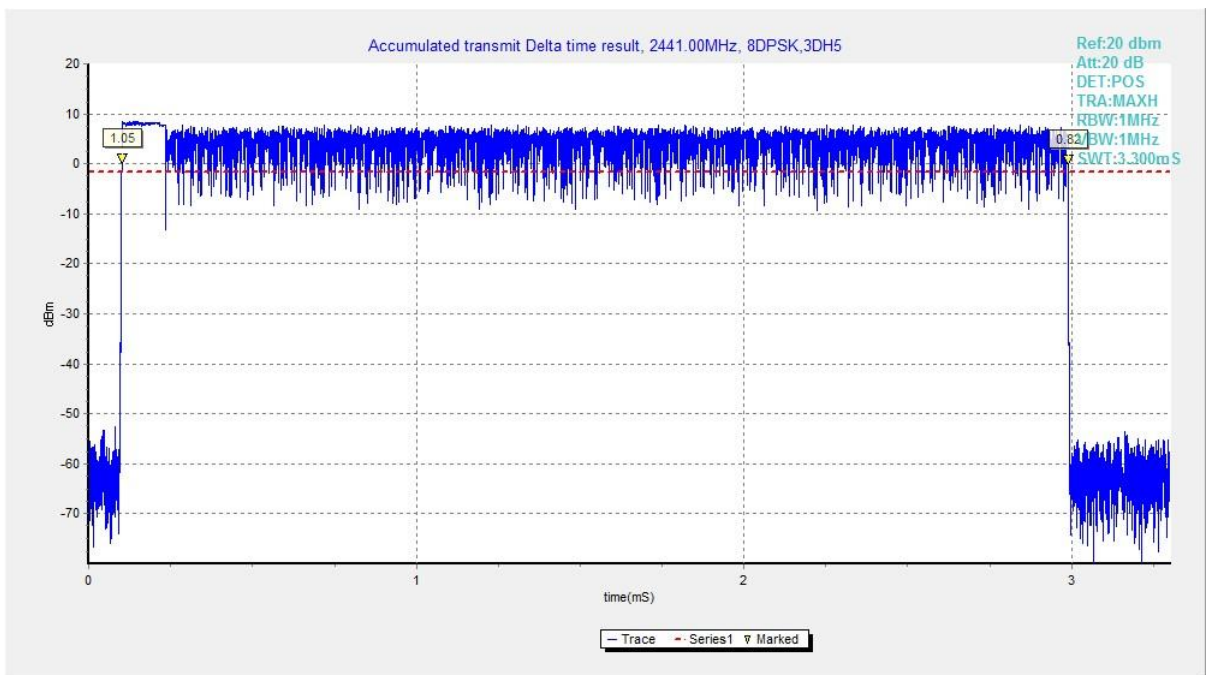


Fig. 73 Time of Occupancy(Dwell Time) (8DPSK, Ch39)

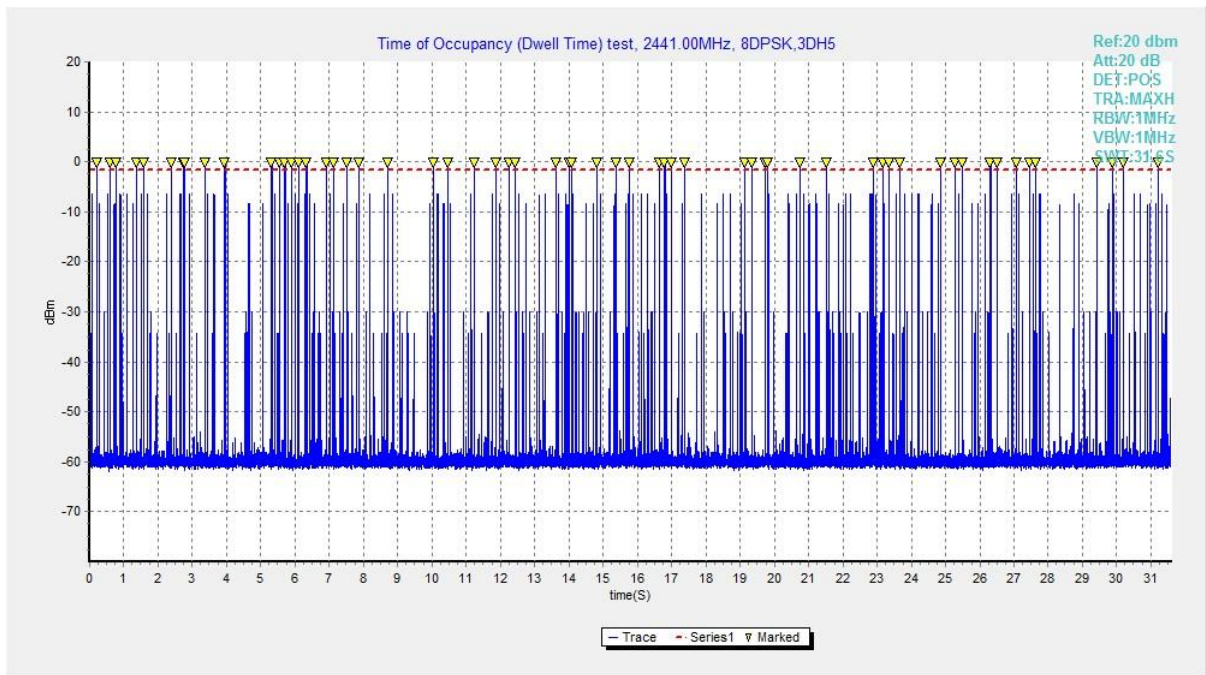


Fig. 74 Time of Occupancy(Dwell Time) (8DPSK, Ch39)

A.7 Number of Hopping Channels

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

Measurement Results:

Mode	Packet	Number of hopping channels		Test result	Conclusion
GFSK	DH5	Fig.75	Fig.76	79	P
$\pi/4$ DQPSK	2-DH5	Fig.77	Fig.78	79	P
8DPSK	3-DH5	Fig.79	Fig.80	79	P

See below for test graphs.

Conclusion: Pass

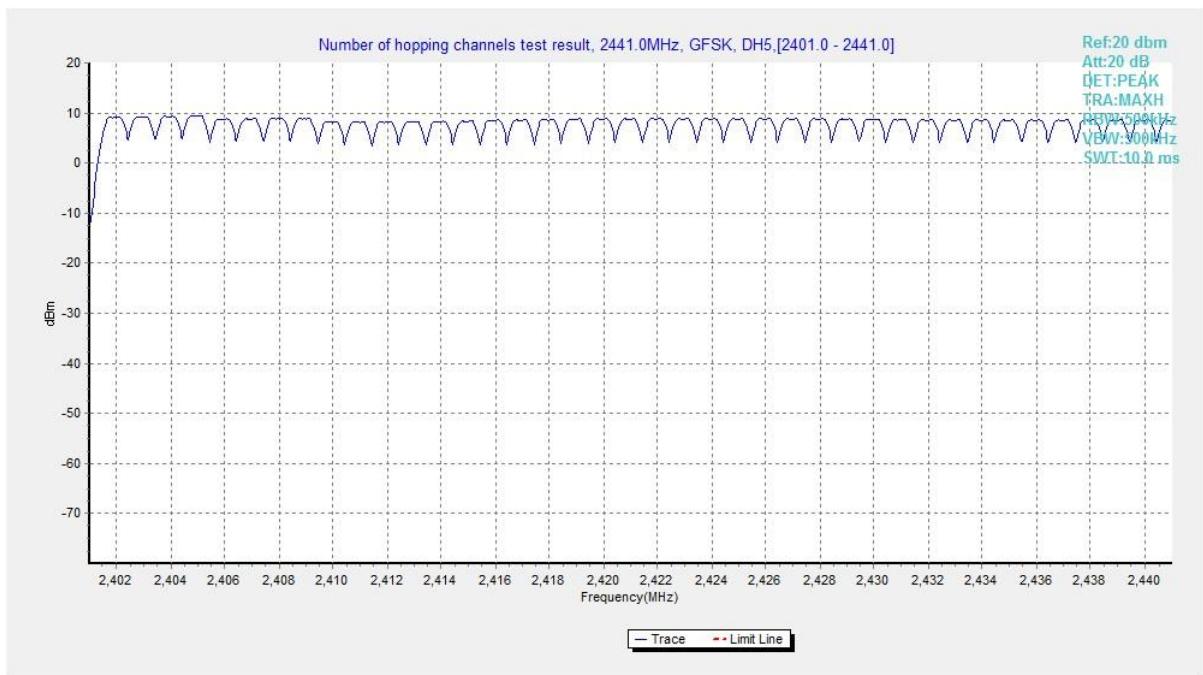


Fig. 75 Hopping channel ch0~39 (GFSK, Ch39)

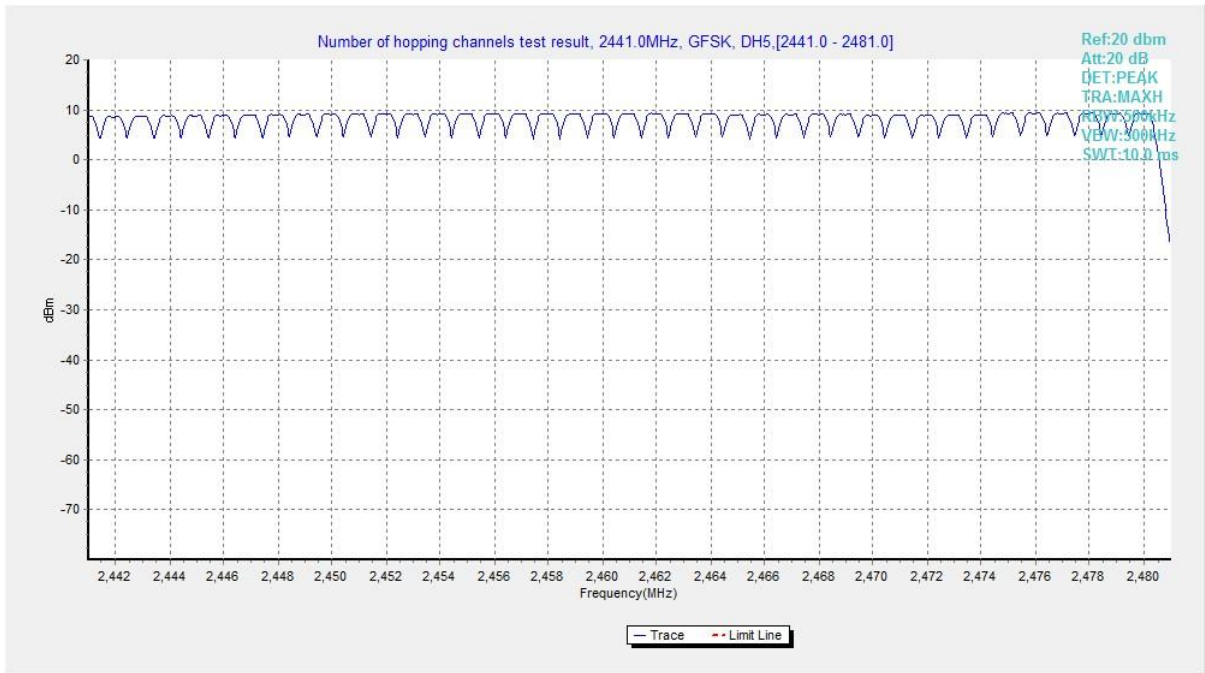


Fig. 76 Hopping channel ch40~78 (GFSK, Ch39)

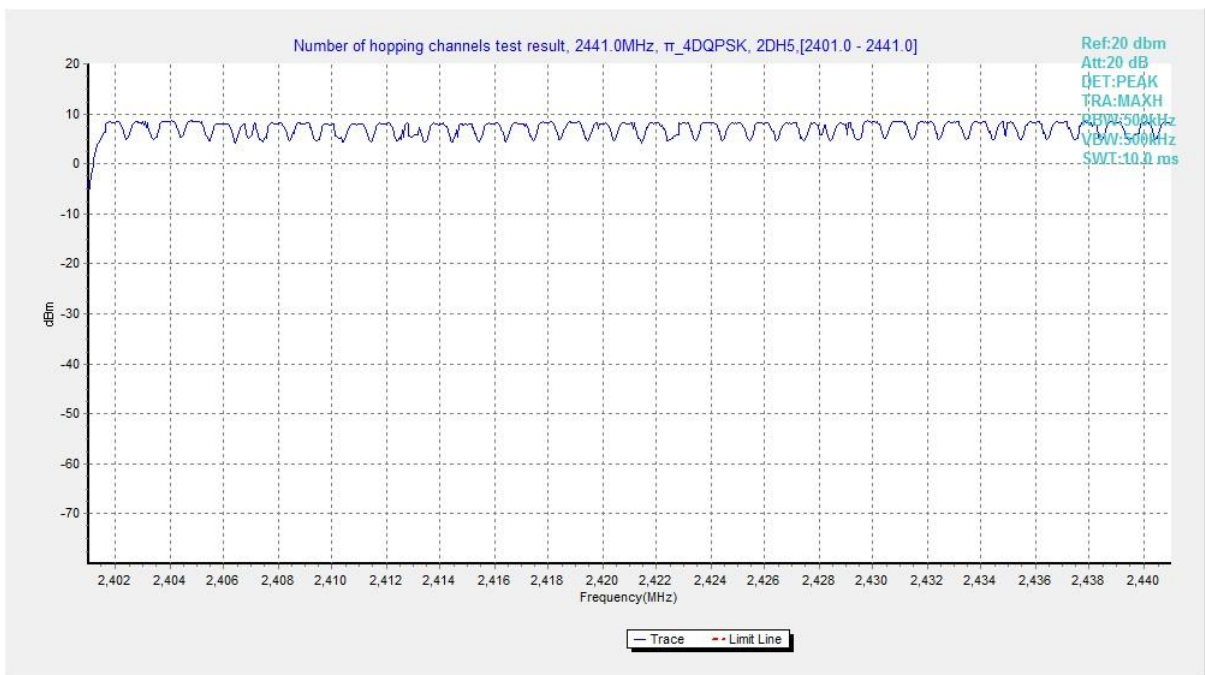


Fig. 77 Hopping channel ch0~39 ($\pi/4$ DQPSK, Ch39)

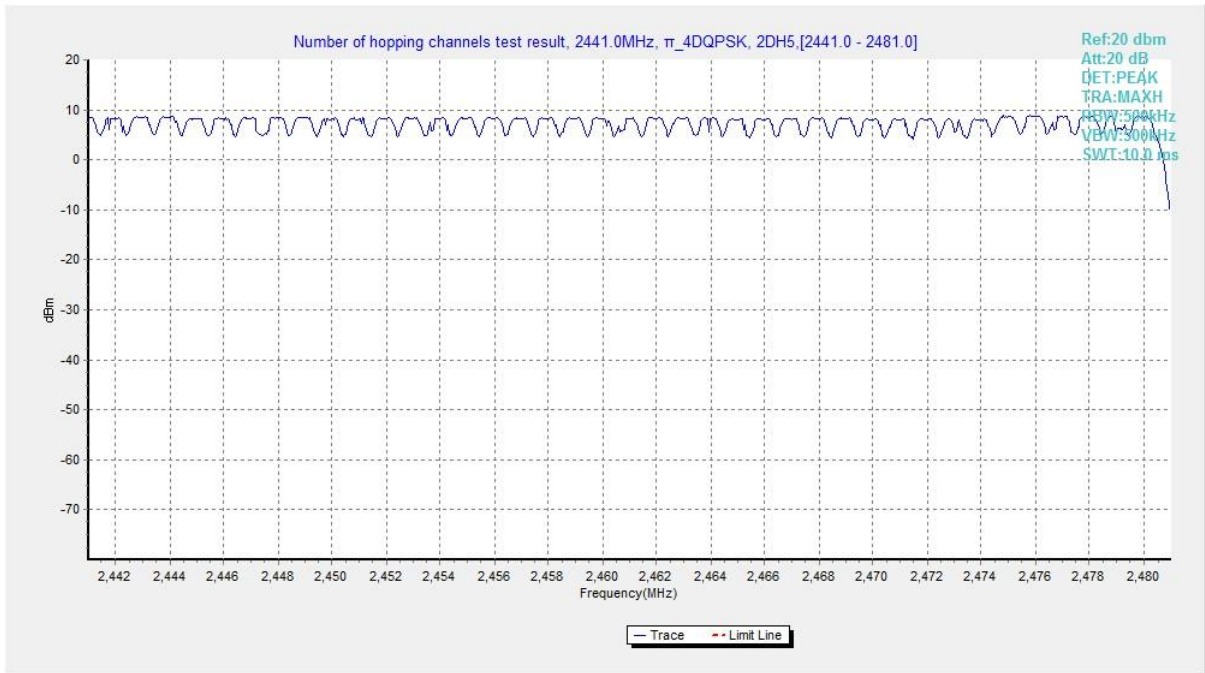


Fig. 78 Hopping channel ch40~78 (π /4 DQPSK, Ch39)

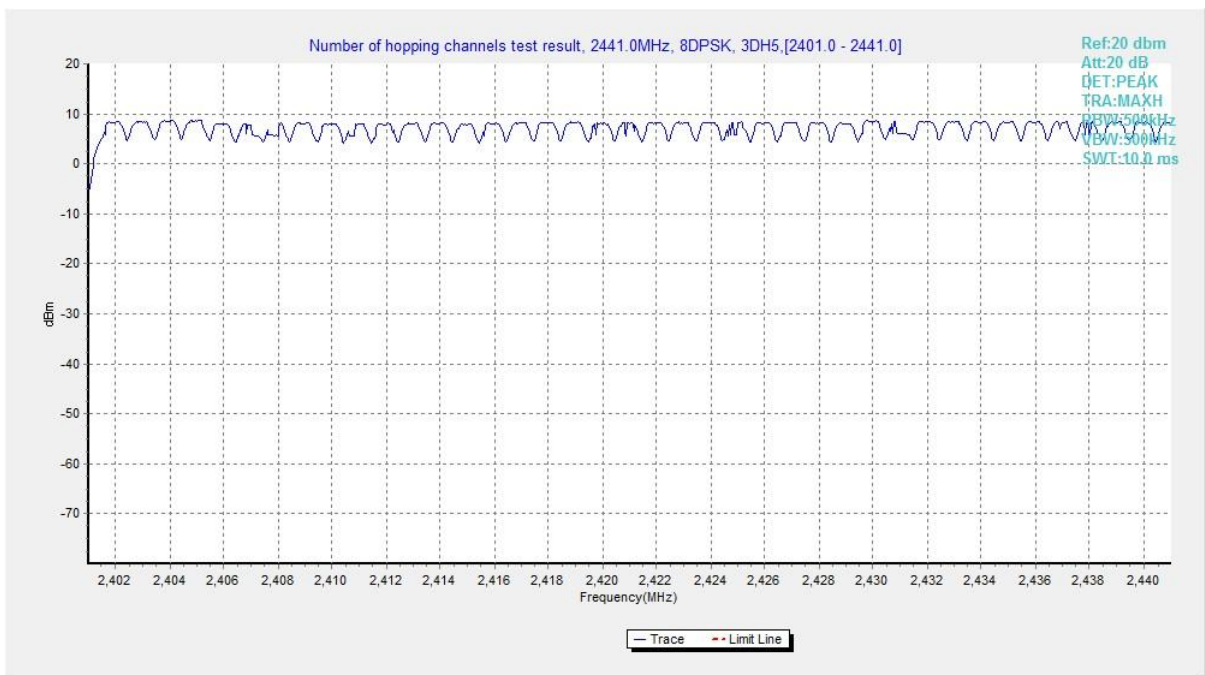


Fig. 79 Hopping channel ch0~39 (8DPSK, Ch39)

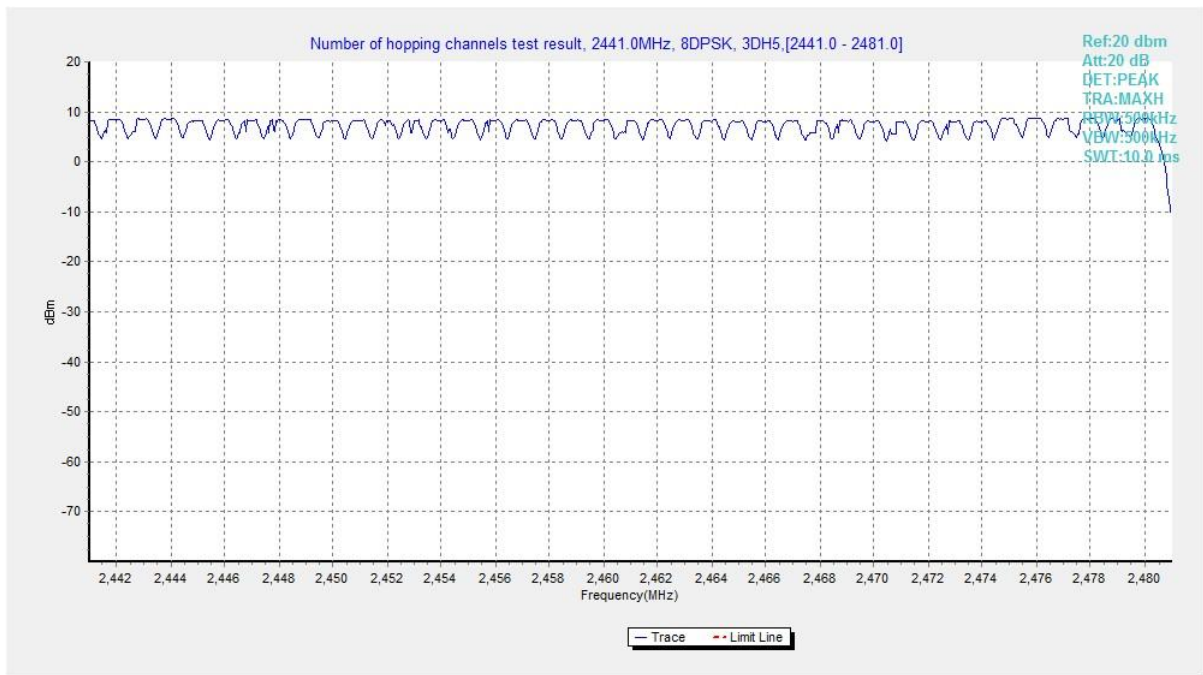


Fig. 80 Hopping channel ch40~78 (8DPSK, Ch39)

A.8 Carrier Frequency Separation

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (MHz)	Conclusion
GFSK	39	DH5	Fig.81	1.00	P
$\pi/4$ DQPSK	39	2-DH5	Fig.82	1.00	P
8DPSK	39	3-DH5	Fig.83	1.00	P

See below for test graphs.

Conclusion: Pass

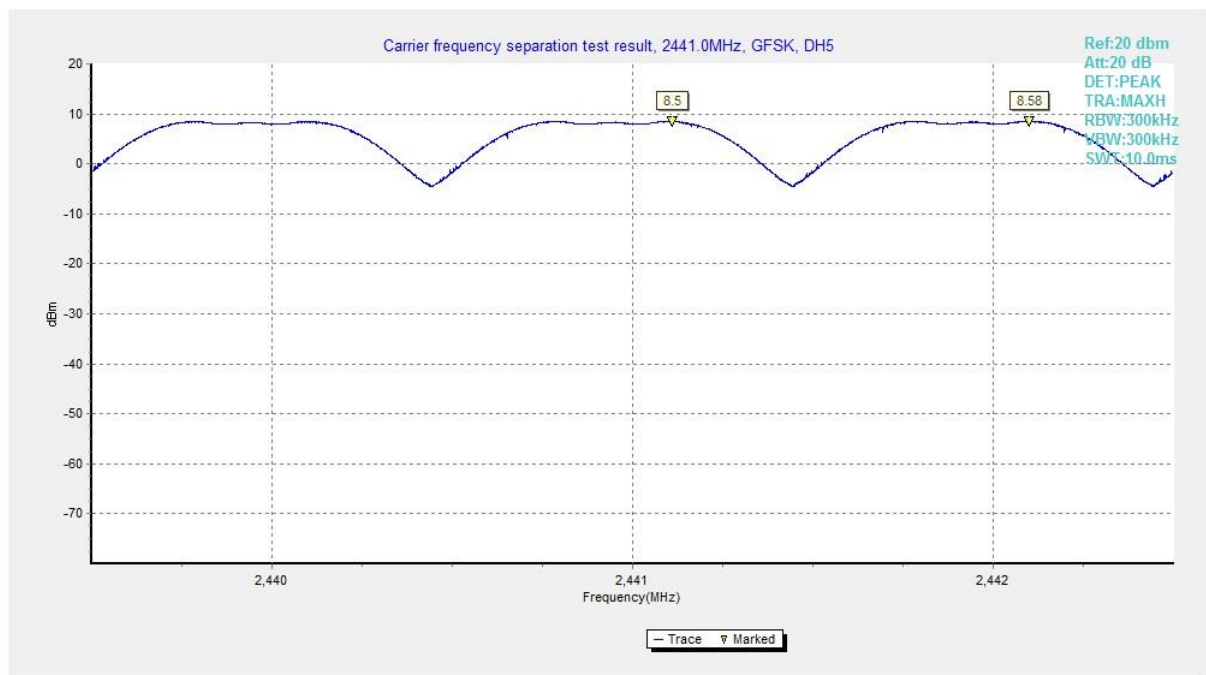


Fig. 81 Carrier Frequency Separation (GFSK, Ch39)

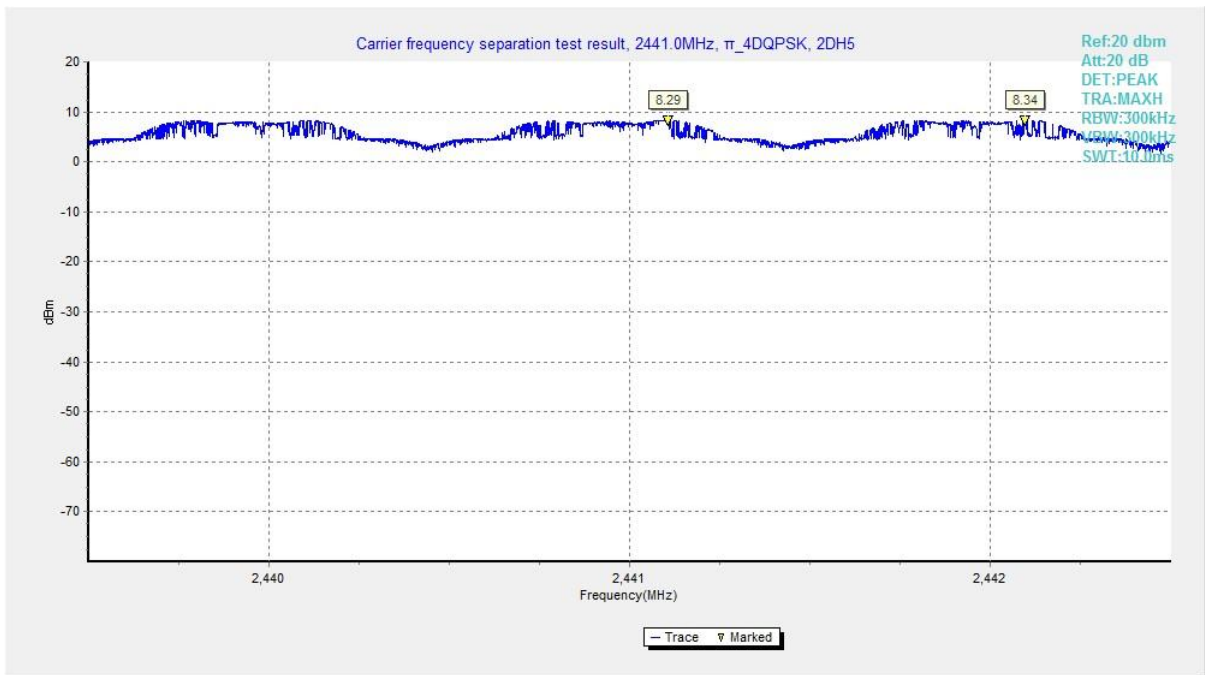


Fig. 82 Carrier Frequency Separation (π /4 DQPSK, Ch39)

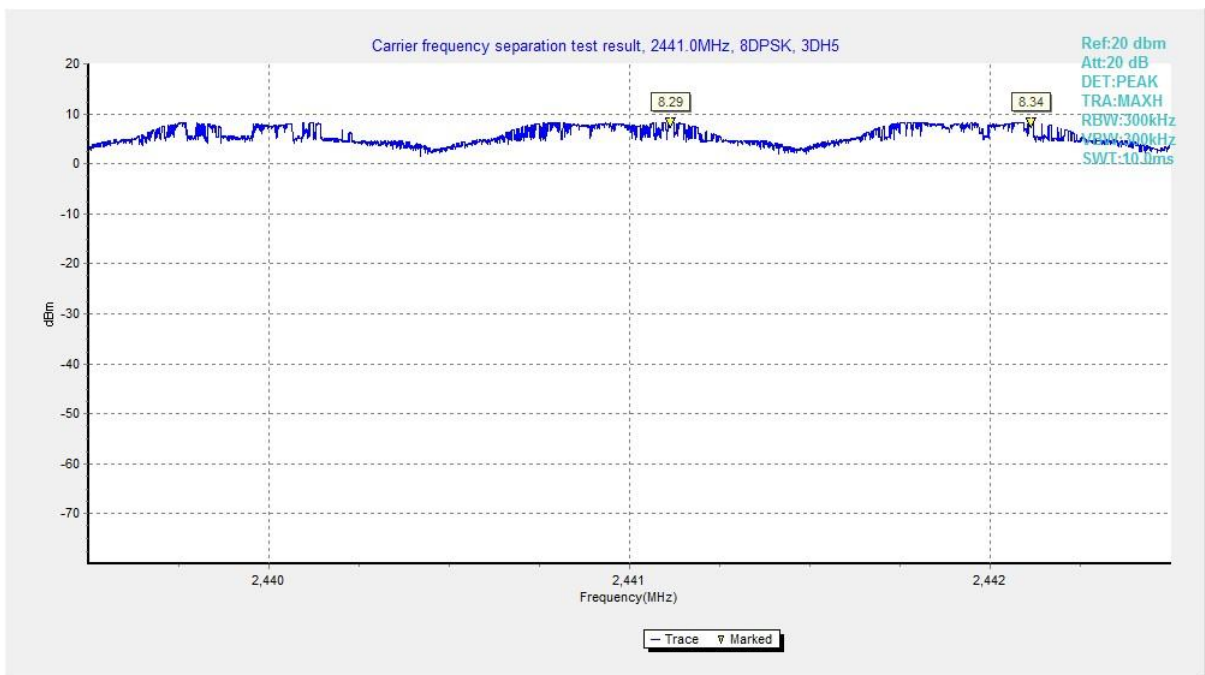


Fig. 83 Carrier Frequency Separation (8DPSK, Ch39)

A.9 AC Power line Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

BT (Quasi-peak Limit) - AE3

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.84	Fig.85	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BT (Average Limit) - AE3

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.84	Fig.85	P
0.5 to 5	46			
5 to 30	50			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BT (Quasi-peak Limit) - AE4

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.86	Fig.87	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BT (Average Limit) - AE4

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.86	Fig.87	P
0.5 to 5	46			
5 to 30	50			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.



No. I21N00742-BT

See below for test graphs.

Conclusion: Pass

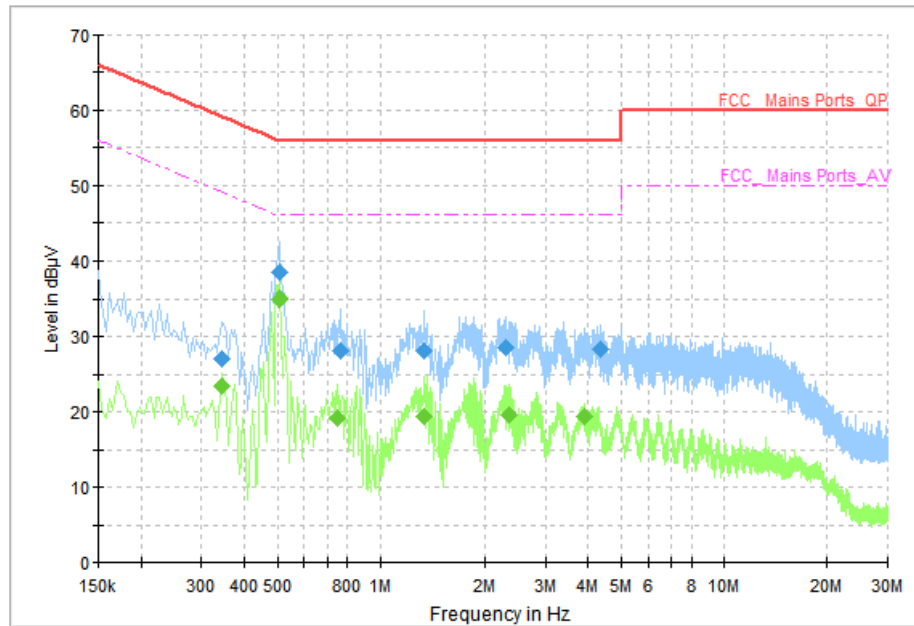


Fig. 84 AC Powerline Conducted Emission (Traffic, AE3, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.346000	27.12	59.06	31.94	L1	ON	10
0.506000	38.38	56.00	17.62	L1	ON	10
0.762000	28.19	56.00	27.81	L1	ON	10
1.338000	28.20	56.00	27.80	L1	ON	10
2.302000	28.53	56.00	27.47	L1	ON	10
4.370000	28.49	56.00	27.51	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.346000	23.43	49.06	25.63	L1	ON	10
0.506000	35.01	46.00	10.99	L1	ON	10
0.746000	19.17	46.00	26.83	L1	ON	10
1.338000	19.35	46.00	26.65	L1	ON	10
2.354000	19.65	46.00	26.35	L1	ON	10
3.882000	19.36	46.00	26.64	L1	ON	10

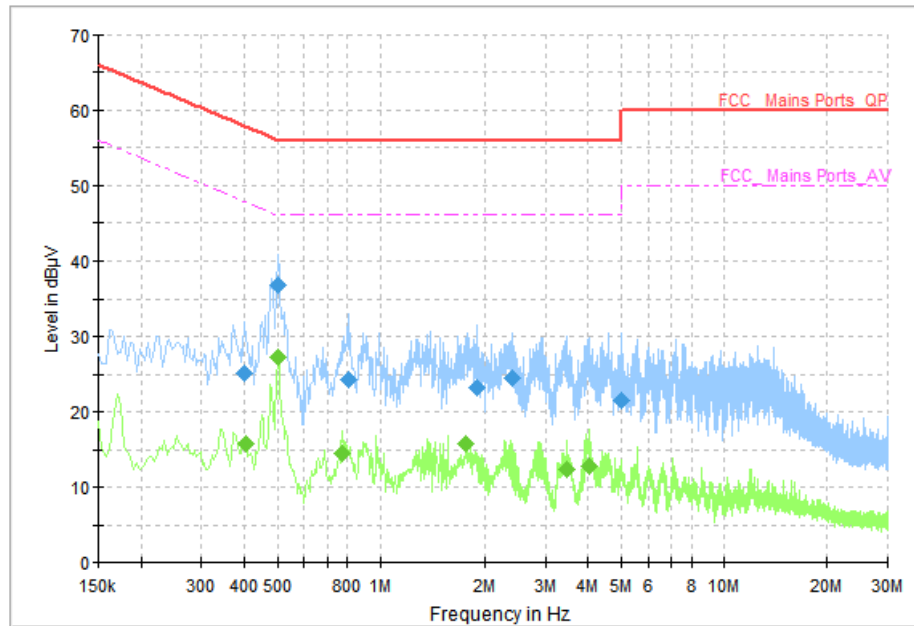


Fig. 85 AC Power line Conducted Emission (Idle, AE3, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.402000	25.16	57.81	32.65	L1	ON	10
0.502000	36.65	56.00	19.35	L1	ON	10
0.806000	24.27	56.00	31.73	L1	ON	10
1.902000	23.35	56.00	32.65	L1	ON	10
2.402000	24.55	56.00	31.45	L1	ON	10
4.982000	21.58	56.00	34.42	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.406000	15.89	47.73	31.84	L1	ON	10
0.502000	27.28	46.00	18.72	L1	ON	10
0.774000	14.42	46.00	31.58	N	ON	10
1.762000	15.85	46.00	30.15	L1	ON	10
3.462000	12.31	46.00	33.69	N	ON	10
4.014000	12.90	46.00	33.10	L1	ON	10

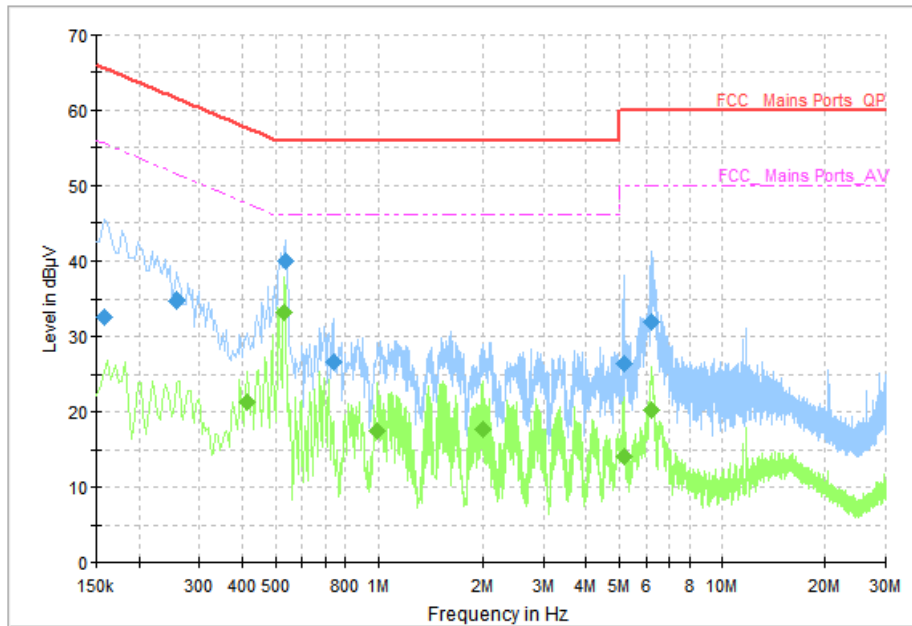


Fig. 86 AC Powerline Conducted Emission (Traffic, AE4, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	32.55	65.57	33.02	N	ON	10
0.258000	34.81	61.50	26.69	N	ON	10
0.534000	39.86	56.00	16.14	N	ON	10
0.738000	26.59	56.00	29.41	L1	ON	10
5.186000	26.55	60.00	33.45	L1	ON	10
6.190000	32.11	60.00	27.89	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.414000	21.42	47.57	26.15	N	ON	10
0.530000	33.26	46.00	12.74	N	ON	10
0.990000	17.60	46.00	28.40	N	ON	10
2.002000	17.64	46.00	28.36	N	ON	10
5.190000	14.10	50.00	35.90	L1	ON	10
6.238000	20.36	50.00	29.64	L1	ON	10

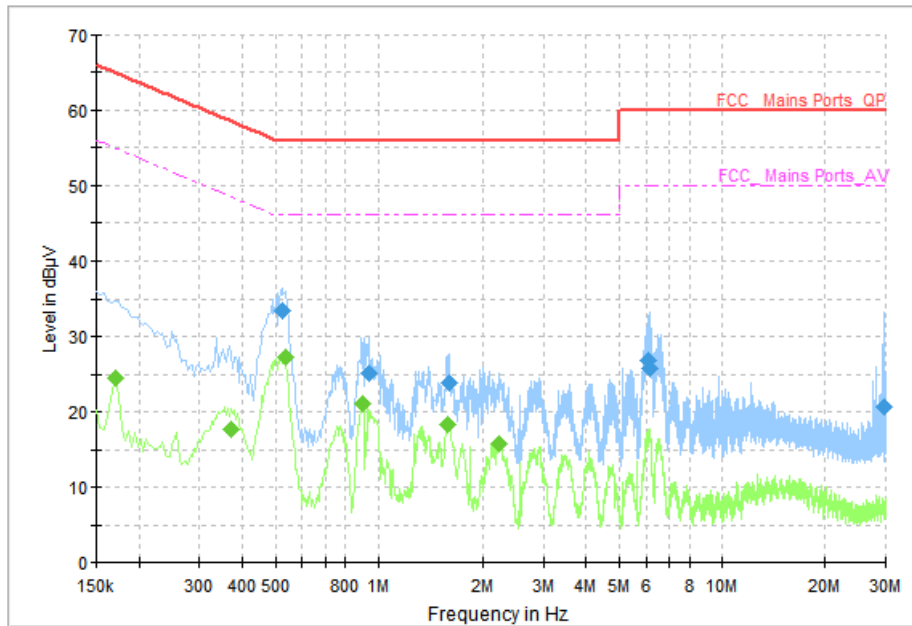


Fig. 87 AC Power line Conducted Emission (Idle, AE4, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.522000	33.58	56.00	22.42	L1	ON	10
0.938000	25.08	56.00	30.92	N	ON	10
1.590000	23.86	56.00	32.14	L1	ON	10
6.074000	26.95	60.00	33.05	L1	ON	10
6.126000	25.87	60.00	34.13	L1	ON	10
29.690000	20.66	60.00	39.34	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170000	24.63	54.96	30.33	L1	ON	10
0.370000	17.61	48.50	30.89	N	ON	10
0.534000	27.29	46.00	18.71	N	ON	10
0.902000	21.03	46.00	24.97	N	ON	10
1.582000	18.34	46.00	27.66	N	ON	10
2.234000	15.79	46.00	30.21	N	ON	10

END OF REPORT