



# TESTREPORT

No.I21N02075-EMC

**TCL Communication Ltd.**

**LTE/UMTS/GSM Smartphone**

**Model Name: 4165F**

**With**

**Hardware Version: Proto**

**Software Version: V1.0**

**FCC ID: 2ACCJB156**

**Issued Date: 2021-07-06**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,  
Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn.www.saict.ac.cn



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21N02075-EMC	Rev.0	1st edition	2021-07-06

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>5</b>
<b>1.1. TEST ITEMS .....</b>	<b>5</b>
<b>1.2. TEST STANDARDS.....</b>	<b>5</b>
<b>1.3. TEST RESULT .....</b>	<b>5</b>
<b>1.4. TESTING LOCATION .....</b>	<b>5</b>
<b>1.5. PROJECT DATA.....</b>	<b>5</b>
<b>1.6. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. GENERAL DESCRIPTION .....</b>	<b>7</b>
<b>ANNEX A: THE REPORT OF THE INITIAL MODEL.....</b>	<b>8</b>
<b>A.1. SUMMARY OF TEST REPORT.....</b>	<b>8</b>
<b>A.1.1 TEST ITEMS.....</b>	<b>8</b>
<b>A.1.2 TEST STANDARDS .....</b>	<b>8</b>
<b>A.1.3 TEST RESULT.....</b>	<b>8</b>
<b>A.1.4 TESTING LOCATION.....</b>	<b>8</b>
<b>A.1.5 PROJECT DATA .....</b>	<b>8</b>
<b>A.2. CLIENT INFORMATION .....</b>	<b>9</b>
<b>A.2.1 APPLICANT INFORMATION .....</b>	<b>9</b>
<b>A.2.2 MANUFACTURER INFORMATION .....</b>	<b>9</b>
<b>A.3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>10</b>
<b>A.3.1 ABOUT EUT .....</b>	<b>10</b>
<b>A.3.2 INTERNAL IDENTIFICATION OF EUT.....</b>	<b>10</b>
<b>A.3.3 INTERNAL IDENTIFICATION OF AE .....</b>	<b>10</b>
<b>A.3.4 EUT SET-UPS .....</b>	<b>12</b>
<b>A.3.5 GENERAL DESCRIPTION.....</b>	<b>13</b>
<b>A.4. REFERENCE DOCUMENTS.....</b>	<b>14</b>



<b>A.4.1 REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>14</b>
<b>A.5. LABORATORY ENVIRONMENT.....</b>	<b>15</b>
<b>A.6. SUMMARY OF TEST RESULTS.....</b>	<b>16</b>
<b>A.6.1 TESTING ENVIRONMENT.....</b>	<b>16</b>
<b>A.6.2 SUMMARY OF MEASUREMENT RESULTS.....</b>	<b>16</b>
<b>A.6.3 STATEMENT.....</b>	<b>16</b>
<b>A.7. MEASUREMENT UNCERTAINTY.....</b>	<b>17</b>
<b>A.8. TEST FACILITIES UTILIZED.....</b>	<b>17</b>
<b>A.9. TEST ACCESSORY UTILIZED.....</b>	<b>17</b>
<b>ANNEX A.10: MEASUREMENT RESULTS.....</b>	<b>18</b>
<b>A.10.1 RADIATED EMISSION (§15.109(A)).....</b>	<b>18</b>
<b>A.10.2 CONDUCTED EMISSION (§15.107(A)).....</b>	<b>74</b>



## 1. Summary of Test Report

### 1.1. Test Items

Description	LTE/UMTS/GSM Smartphone
Model Name	4165F
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

### 1.2. Test Standards

FCC Part 15, Subpart B 10-1-2019 Edition; ANSI C63.4 2014

### 1.3. Test Result

Pass

### 1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

### 1.5. Project data

Testing Start Date: 2021-05-26

Testing End Date: 2021-06-25

### 1.6. Signature

Liang Yong  
(Prepared this test report)

Zhang Yunzhuan  
(Reviewed this test report)

Cao Junfei  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Tel: 0086-755-36611722  
Fax: /

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Tel: 0086-755-36611722  
Fax: /



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	LTE/UMTS/GSM Smartphone
Model Name	4165F
FCC ID	2ACCJB156
Antenna Type	Internal Antenna
Condition of EUT as received	No obvious damage in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

#### **3.2. General Description**

The Equipment Under Test (EUT) is a model of LTE/UMTS/GSM Smartphone with internal antenna.

It supports GSM 850/900/1800/1900MHz, WCDMA Bands 1/2/4/5/8, and LTE Bands 1/2/3/4/5/7/8/12/17/28/66.

It has Camera, Video Player, FM Receiver, USB Data Transfer, Bluetooth and Wi-Fi functions.

It consists of normal options: Battery, Charger USB Cable and Headset

Samples (EUT+AE) undergoing test were selected by the Client. Relevant information is provided by the Client.

The LTE/UMTS/GSM Smartphone 4165F Applicant by TCL Communication Ltd. is a variant model based on 4065F Applicant by TCL Communication Ltd, for conformance test.

According to client's description, the table below shows the difference between 4165F and 4065F.

Relationship	Initial model	Variant model
Model Name	4065F	4165F
Brand Name	Alcatel	TCL

According to client's description, all results are cited from the initial report; see Annex A for details, there is no need to add any additional tests.

The report number for initial model is I21N01673-EMC.

The FCC ID for initial model is 2ACCJB156.

**\*\*\*END OF REPORT BODY\*\*\***



## **ANNEX A: The report of the initial model**

### **A.1. Summary of Test Report**

#### **A.1.1 Test Items**

Description	LTE/UMTS/GSM Smartphone
Model Name	4065F
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

#### **A.1.2 Test Standards**

FCC Part 15, Subpart B 10-1-2019 Edition; ANSI C63.4 2014

#### **A.1.3 Test Result**

##### **Pass**

Total test 2 items, pass 2 items. Please refer to "A.6.2 Summary of Measurement Results"

#### **A.1.4 Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

#### **A.1.5 Project data**

Testing Start Date: 2021-05-26

Testing End Date: 2021-06-25





## **A.2. Client Information**

### **A.2.1 Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Tel: 0086-755-36611722  
Fax: /

### **A.2.2 Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Tel: 0086-755-36611722  
Fax: /



### **A.3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **A.3.1 About EUT**

Description	LTE/UMTS/GSM Smartphone
Model Name	4065F
FCC ID	2ACCJB156
Antenna Type	Internal Antenna
Condition of EUT as received	No obvious damage in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

#### **A.3.2 Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Receive Date</b>
UT01aa	355246690000161	Proto	V1.0	2021-05-26
UT02aa	355246690000153	Proto	V1.0	2021-05-26

\*EUT ID: is used to identify the test sample in the lab internally.

#### **A.3.3 Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Charger
AE3	USB Cable
AE4	Headset
AE1-1	
Model	TLp029D7
SN	CAC2900009C7
Manufacturer	BYD
Capacity	3000mAh
Nominal Voltage	3.85V
AE1-2	
Model	TLp029D1
SN	CAC2900019C1
Manufacturer	BYD
Capacity	3000mAh
Nominal Voltage	3.85V



AE2-1	
Model	UC11US / CBA0058AGAC5
Manufacturer	PUAN
AE2-2	
Model	UC11US/ CBA0058AGAC7
Manufacturer	Chenyang
AE3-1	
Name	CDA3122005C8
Manufacturer	PUAN
AE3-2	
Name	CDA3122005C2
Manufacturer	SHENGHUA
AE4-1	
Type	WH15
Wh15	CCB0046A10C1(alcatel logo)
Manufacturer	DALIN
AE4-2	
Type	WH15
Name	CCB0046A10C4(alcatel logo)
Manufacturer	MEIHAO
AE4-3	
Type	WH15
Name	CCB0046A15C1(no logo)
Manufacturer	DALIN
AE4-4	
Type	WH15
Name	CCB0046A15C4(no logo)
Manufacturer	MEIHAO

\*AE ID and AE Label: is used to identify the test sample in the lab internally.

\*AE Label: To distinguish the type and number of AE

AE4: The material of model CCB0046A10C1 (AE4-1) and CCB0046A15C1 (AE4-3) are the same.

The material of model CCB0046A10C4 (AE4-2) and CCB0046A15C4 (AE4-4) are the same.

AE: ancillary equipment



### **A.3.4 EUT set-ups**

#### **EUT set-up No.**

- Set.1
- Set.2
- Set.3
- Set.4

#### **Combination of EUT and AE**

- EUT+AE1+AE2-1+AE3-1+AE4-1
- EUT+AE1+AE2-2+AE3-2+AE4-2
- EUT+AE1+AE3-1+PC+AE4-1
- EUT+AE1+AE3-2+PC+AE4-2



### **A.3.5 General Description**

The Equipment Under Test (EUT) is a model of LTE/UMTS/GSM Smartphone with internal antenna.

It supports GSM 850/900/1800/1900MHz, WCDMA Bands 1/2/4/5/8, and LTE Bands 1/2/3/4/5/7/8/12/17/28/66.

It has Camera, Video Player, FM Receiver, USB Data Transfer, Bluetooth and Wi-Fi functions.

It consists of normal options: Battery, Charger USB Cable and Headset

Samples (EUT+AE) undergoing test were selected by the Client. Relevant information is provided by the Client.

## **A.4. Reference Documents**

### **A.4.1 Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-2019 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

## A.5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** did not exceed following limits along the EMC testing:

9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 °C, Max. = 35°C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Normalised site attenuation (NSA)	<±4 dB, 3 m distance, from 30 to 1000 MHz

**Shield room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-10000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω

**Fully-anechoic chamber** did not exceed following limits along the EMC testing:

9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 °C, Max. = 35°C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## **A.6. SUMMARY OF TEST RESULTS**

### **A.6.1 Testing Environment**

Normal Temperature: 15~35°C  
Relative Humidity: 20~75%  
Atmospheric pressure 86~106kPa

### **A.6.2 Summary of Measurement Results**

<b>Abbreviations used in this clause:</b>	
P	Pass
NA	Not applicable
F	Fail

<b>Items</b>	<b>Test Name</b>	<b>Clause in FCC rules</b>	<b>Section in this report</b>	<b>Verdict</b>
1	Radiated Emission	15.109(a)	A.10.1	P
2	Conducted Emission	15.107(a)	A.10.2	P

### **A.6.3 Statement**

#### **A.6.3.1 Statements of conformity**

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.



### A.7. Measurement uncertainty

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.84dB(k=2)
	1GHz-18GHz	4.68dB(k=2)
	18GHz-40GHz	3.76dB(k=2)
Conducted Emission	150kHz-30MHz	3.00dB(k=2)

### A.8. Test Facilities Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL.DUE DATE	CAL. PERIOD
1.	Test Receiver	ESR7	101676	R&S	2021.11.25	1 year
2.	Test Receiver	ESCI	100701	R&S	2021.08.09	1 year
3.	Spectrum Analyzer	FSV40	101192	R&S	2022.01.13	1 year
4.	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024.05.24	3 years
5.	LISN	ENV216	102067	R&S	2021.07.16	1 year
6.	Horn Antenna	3117	00066577	ETS-Lindgren	2022.04.02	3 years
7.	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2023.01.06	3 years
8.	Horn Antenna	QSH-SL-8-26-40-K-20	17014	Q-par	2023.01.06	3 years
9.	Universal Radio Communication Tester	CMU200	114545	R&S	2022.01.13	1 year
10.	Universal Radio Communication Tester	CMW500	152499	R&S	2021.07.16	1 year
11.	Signal Generator	SMB100A	179725	R&S	2021.11.25	1 year
12.	Chamber	FACT3-2.0	1285	ETS-Lindgren	2021.07.19	2 years
13.	Software	EMC32	V10.50.40	R&S	/	/

Note: CAL.: Calibration

### A.9. Test Accessory Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL.DUE DATE	CAL. PERIOD
1.	PC	ThinkPad T480	PF-13LW0C	Lenovo	/	/
2.	Printer	V1.0008	VNF6C12491	HP	/	/
3.	Mouse	MOEUJUA	44NY517	Lenovo	/	/

Note: CAL.: Calibration

## **ANNEX A.10: MEASUREMENT RESULTS**

### **A.10.1 Radiated Emission (§15.109(a))**

#### **Reference**

FCC: CFR Part 15.109(a)

#### **A.10.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (Data transfer mode of EUT and charging mode of EUT) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 -2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.10.1.2 EUT Operating Mode:**

**FM receiver:** The EUT is connected to a charger for charging and open FM function. The EUT is synchronized to a FM signal generator. The EUT is keeping on demodulating the FM signal and outputting the audio signal through the headset.

**Camera:** At the beginning of measurement, the battery is completely discharged. The battery and charger are installed so that the EUT works well and keeping on taking photos.

**Video Player:** The EUT is connected to a charger for charging and keeping on playing mp3.

**Data Transfer:** The model of the PC is Lenovo ThinkPad T480, and the serial number of the PC is PF-13LW0C. The EUT is connected to a PC for transmitting data. The software is used to let the PC keep on copying data to MS or TF Card, reading and erasing the data after copy action was finished.

**GSM receiver:** The EUT is connected to a charger for charging. The EUT is synchronized to SS, and able to respond to paging messages and incoming call. An established call has been released.

**WCDMA receiver:** The EUT is connected to a charger for charging. The EUT is synchronized to SS, and able to respond to paging messages and incoming call. An established call has been released.

**LTE receiver:** The EUT is connected to a charger for charging. The EUT is synchronized to SS, and able to respond to paging messages and incoming call. An established call has been released.

This device contains the receivers which tune and operate between 30MHz-960MHz in the following bands:

GSM850MHz, WCDMA Band 5, LTE Band 5, LTE Band 12, LTE Band 17.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

**A.10.1.3 Measurement Limit**

Limit from CFR Part 15.109(a)


Frequency range (MHz)	Field strength limit ( $\mu\text{V/m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

\*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.


**A.10.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/3MHz	15

**A.10.1.5 Test set-up:  
30MHz-1GHz**

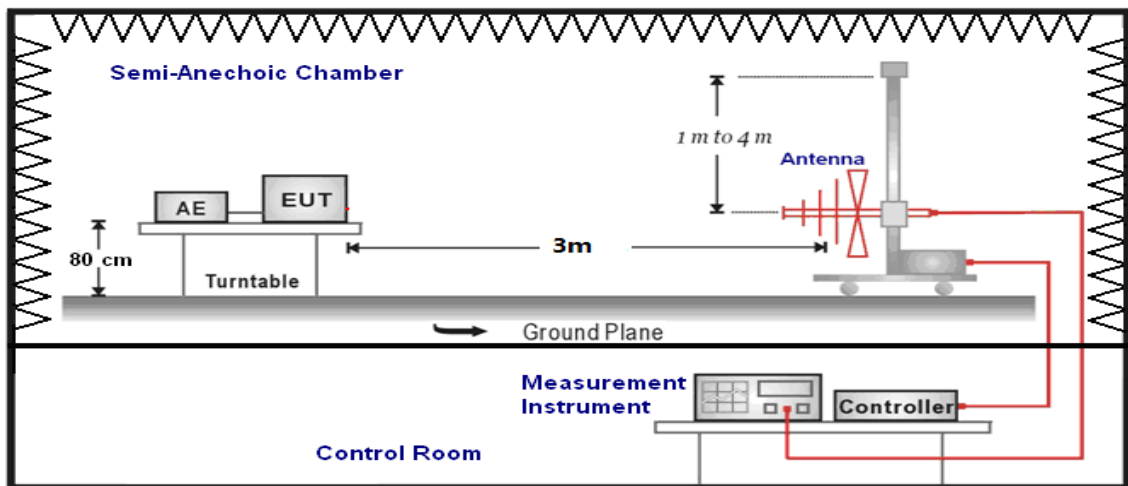

**1GHz-26.5GHz**

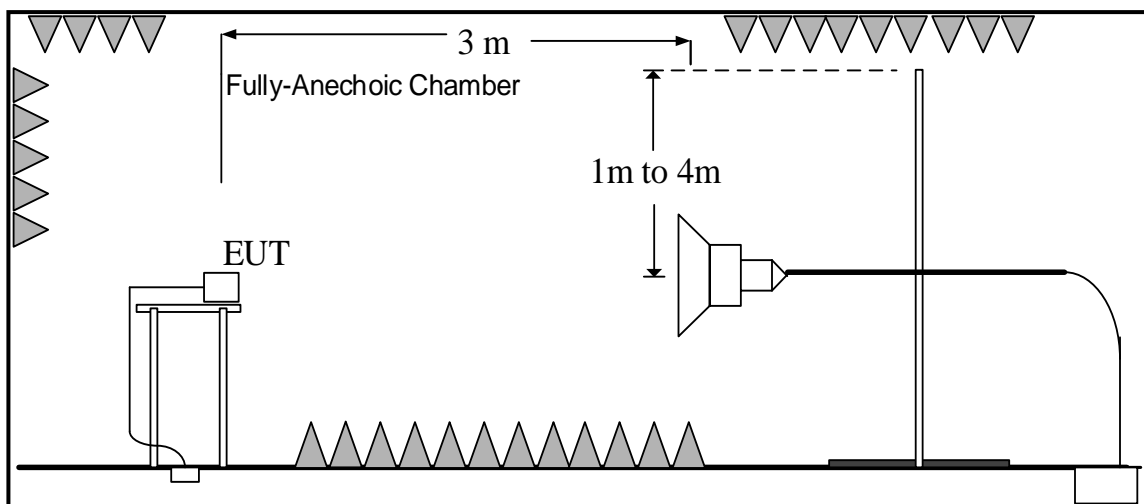

**A.10.1.6 Measurement Results**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Result: Quasi-Peak (dB $\mu$ V/m) / Average (dB $\mu$ V/m) / Peak (dB $\mu$ V/m)

Note: the result contains vertical part and Horizontal part

## GSM Receiver 850MHz

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.1	Conclusion
30-88	40.00	See Figure A.10.1.1.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.2.	P
18000 to 26500			See Figure A.10.1.3.	P

## WCDMA Receiver Band 5

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.1	Conclusion
30-88	40.00	See Figure A.10.1.4.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.5.	P
18000 to 26500			See Figure A.10.1.6.	P



LTE Receiver Band 5

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.1	Conclusion
30-88	40.00	See Figure A.10.1.7.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.8.	P
18000 to 26500			See Figure A.10.1.9.	P

LTE Receiver Band 12

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.1	Conclusion
30-88	40.00	See Figure A.10.1.10.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.11.	P
18000 to 26500			See Figure A.10.1.12.	P

## LTE Receiver Band 17

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.1	Conclusion
30-88	40.00	See Figure A.10.1.13.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.14.	P
18000 to 26500			See Figure A.10.1.15.	P

## GSM Receiver 850MHz

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m) UT02aa/Set.2	Conclusion
30-88	40.00	See Figure A.10.1.16.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.2	
1000 to 18000	54.00	74.00	See Figure A.10.1.17.	P
18000 to 26500			See Figure A.10.1.18.	P

## FM receiver

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.1	
30-88	40.00	See Figure A.10.1.19.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.20.	P
18000 to 26500			See Figure A.10.1.21.	P

## Video Player

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.1	
30-88	40.00	See Figure A.10.1.22.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.23.	P
18000 to 26500			See Figure A.10.1.24.	P



Camera

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.1	
30-88	40.00	See Figure A.10.1.25.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.10.1.26.	P
18000 to 26500			See Figure A.10.1.27.	P

Camera

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.2	
30-88	40.00	See Figure A.10.1.28.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.2	
1000 to 18000	54.00	74.00	See Figure A.10.1.29.	P
18000 to 26500			See Figure A.10.1.30.	P

## Data Transfer: EUT to PC

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.3	
30-88	40.00	See Figure A.10.1.31.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.3	
1000 to 18000	54.00	74.00	See Figure A.10.1.32.	P
18000 to 26500			See Figure A.10.1.33.	P

## Data Transfer: PC to EUT

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.3	
30-88	40.00	See Figure A.10.1.34.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.3	
1000 to 18000	54.00	74.00	See Figure A.10.1.35.	P
18000 to 26500			See Figure A.10.1.36.	P

## Data Transfer: PC to TF Card

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.3	
30-88	40.00	See Figure A.10.1.37.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.3	
1000 to 18000	54.00	74.00	See Figure A.10.1.38.	P
18000 to 26500			See Figure A.10.1.39.	P

## Data Transfer: TF Card to PC

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.3	
30-88	40.00	See Figure A.10.1.40.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.3	
1000 to 18000	54.00	74.00	See Figure A.10.1.41.	P
18000 to 26500			See Figure A.10.1.42.	P



Data Transfer: TF Card to PC

Frequency range (MHz)	Quasi-Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
		UT02aa/Set.4	
30-88	40.00	See Figure A.10.1.43.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Conclusion
			UT02aa/Set.4	
1000 to 18000	54.00	74.00	See Figure A.10.1.44.	P
18000 to 26500			See Figure A.10.1.45.	P

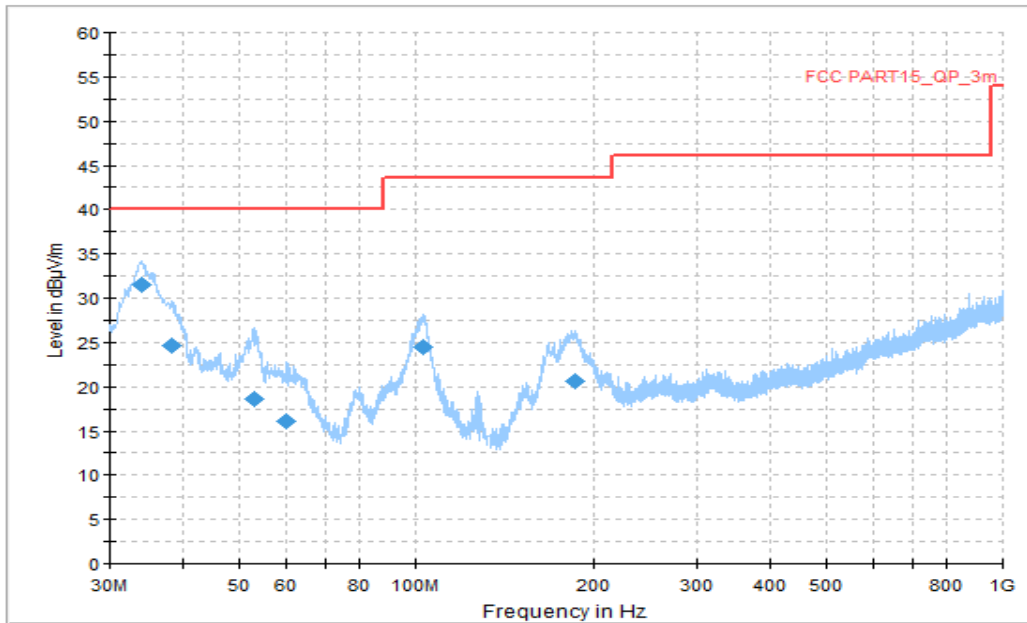


Figure A.10.1.1. Radiated Emission (GSM Receiver 850MHz, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P <sub>Mea</sub> (dBµV)
34.095556	31.49	40.00	8.51	V	-16	47.49
38.245000	24.62	40.00	15.38	V	-16	40.62
53.118333	18.52	40.00	21.48	V	-15	33.52
60.231667	16.02	40.00	23.98	V	-15	31.02
103.127222	24.54	43.52	18.98	V	-16	40.54
185.523333	20.65	43.52	22.87	V	-17	37.65

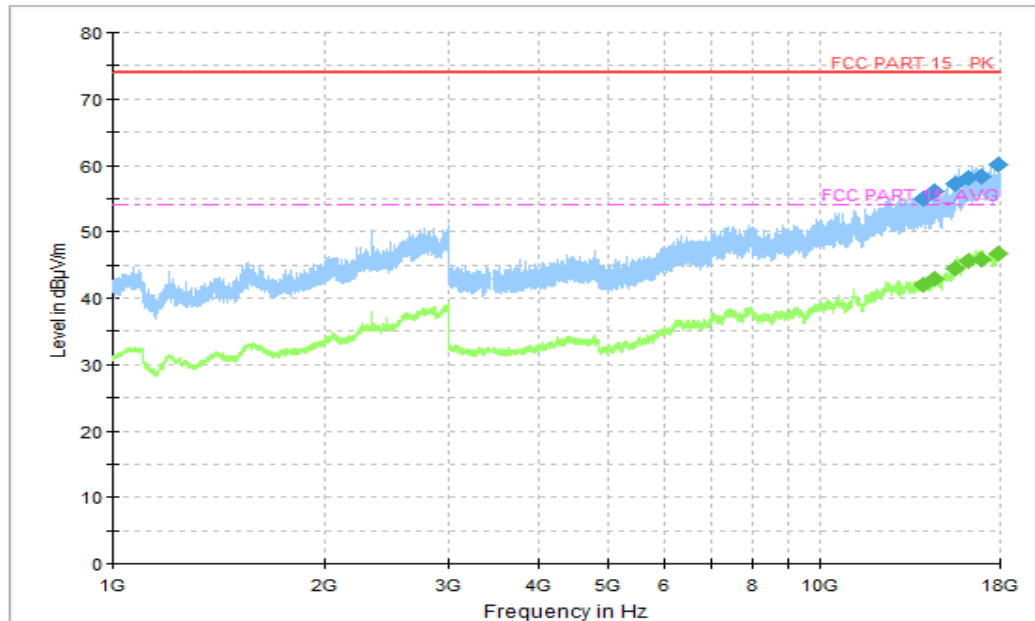


Figure A.10.1.2. Radiated Emission (GSM Receiver 850MHz,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P <sub>Mea</sub> (dBµV)
14014.750000	54.87	74.00	19.13	V	17	37.87
14565.000000	56.04	74.00	17.96	H	18	38.04
15563.250000	57.30	74.00	16.70	V	19	38.3
16257.000000	58.02	74.00	15.98	H	21	37.02
16951.750000	58.24	74.00	15.76	H	22	36.24
17903.250000	60.20	74.00	13.80	H	24	36.2

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P <sub>Mea</sub> (dBµV)
14014.750000	42.09	54.00	11.91	V	17	25.09
14565.000000	42.93	54.00	11.07	H	18	24.93
15563.250000	44.42	54.00	9.58	V	19	25.42
16257.000000	45.52	54.00	8.48	H	21	24.52
16951.750000	45.81	54.00	8.19	H	22	23.81
17903.250000	46.64	54.00	7.36	H	24	22.64

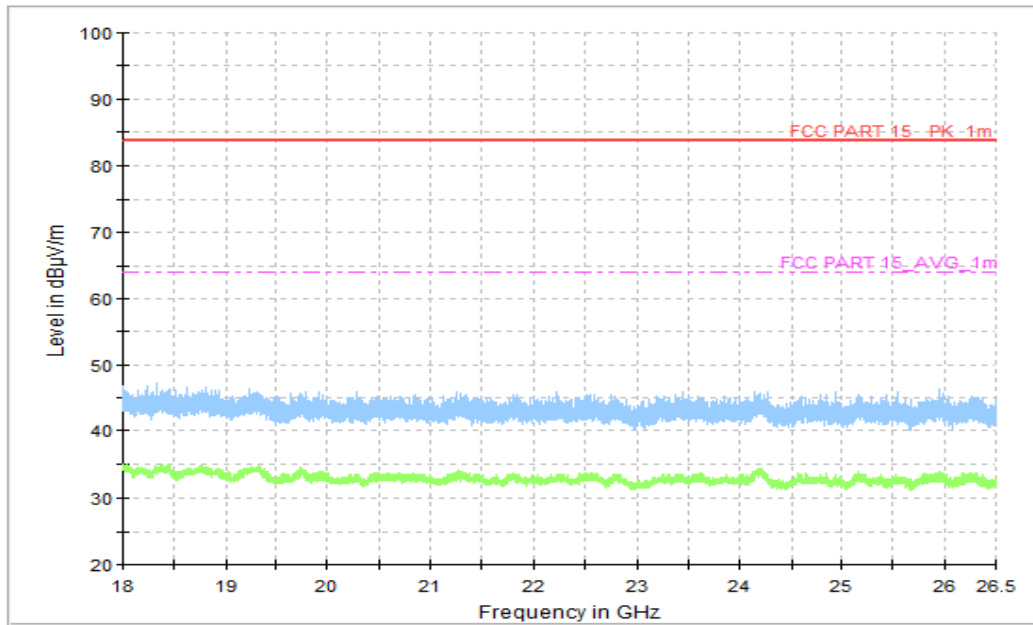


Figure A.10.1.3. Radiated Emission (GSM Receiver 850MHz,18GHz to 26.5GHz)

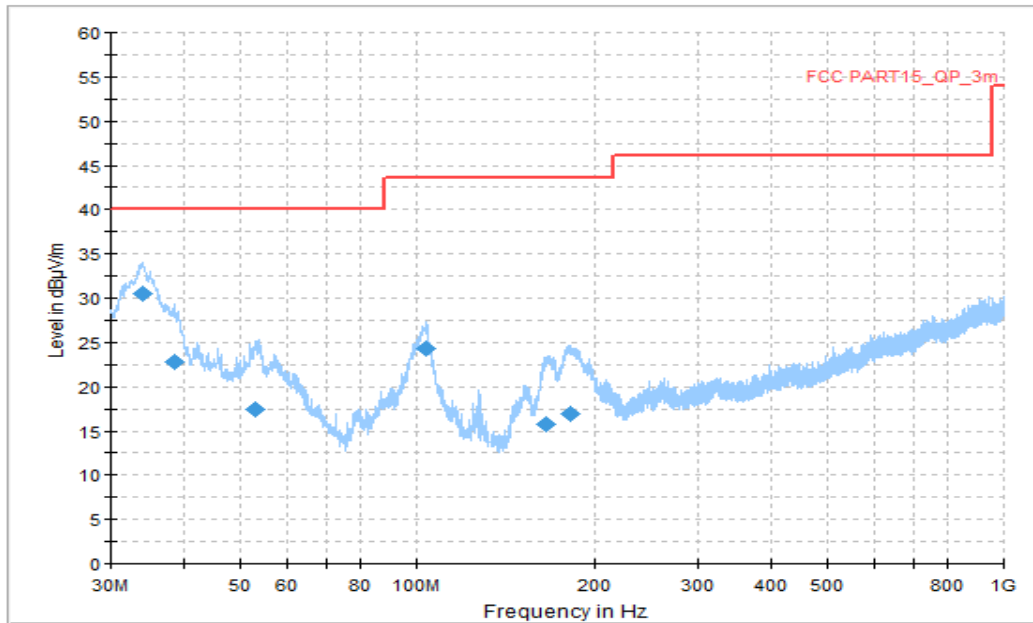


Figure A.10.1.4. Radiated Emission (WCDMA Receiver Band 5, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
33.933889	30.51	40.00	9.49	V	-16	46.51
38.568333	22.85	40.00	17.15	V	-15	37.85
52.902778	17.45	40.00	22.55	V	-15	32.45
103.450556	24.32	43.52	19.20	V	-16	40.32
165.530556	15.74	43.52	27.78	V	-19	34.74
182.236111	16.94	43.52	26.58	V	-18	34.94



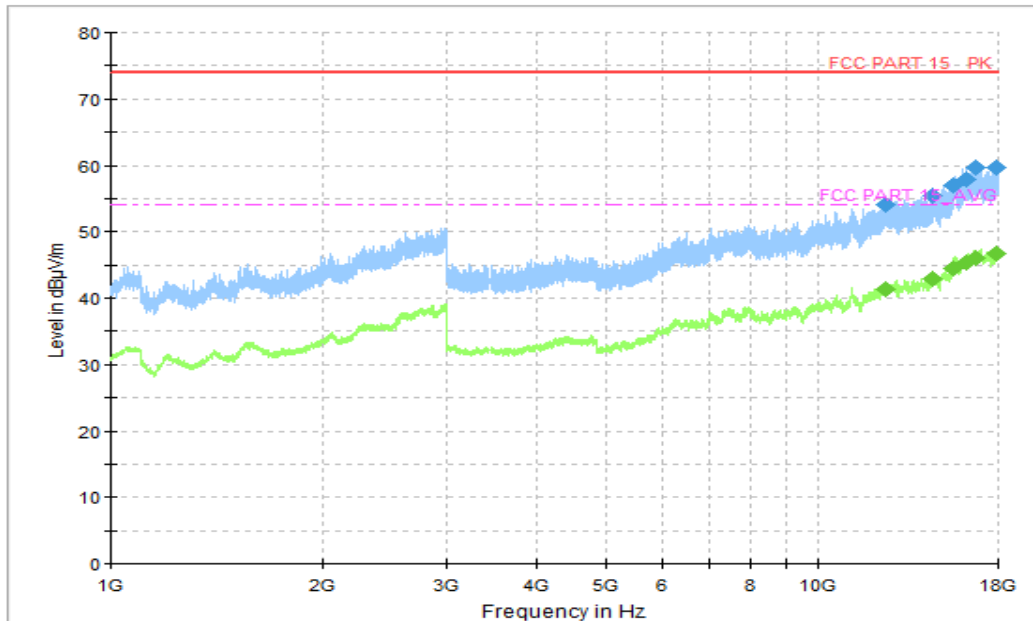


Figure A.10.1.5. Radiated Emission (WCDMA Receiver Band 5,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12484.500000	54.02	74.00	19.99	V	17	37.02
14568.750000	55.41	74.00	18.59	H	18	37.41
15567.500000	56.95	74.00	17.05	V	20	36.95
16269.500000	57.83	74.00	16.17	H	21	36.83
16726.750000	59.62	74.00	14.38	H	21	38.62
17888.500000	59.65	74.00	14.35	H	24	35.65

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12484.500000	41.36	54.00	12.64	V	17	24.36
14568.750000	42.88	54.00	11.12	H	18	24.88
15567.500000	44.49	54.00	9.51	V	20	24.49
16269.500000	45.44	54.00	8.56	H	21	24.44
16726.750000	46.05	54.00	7.95	H	21	25.05
17888.500000	46.60	54.00	7.40	H	24	22.60

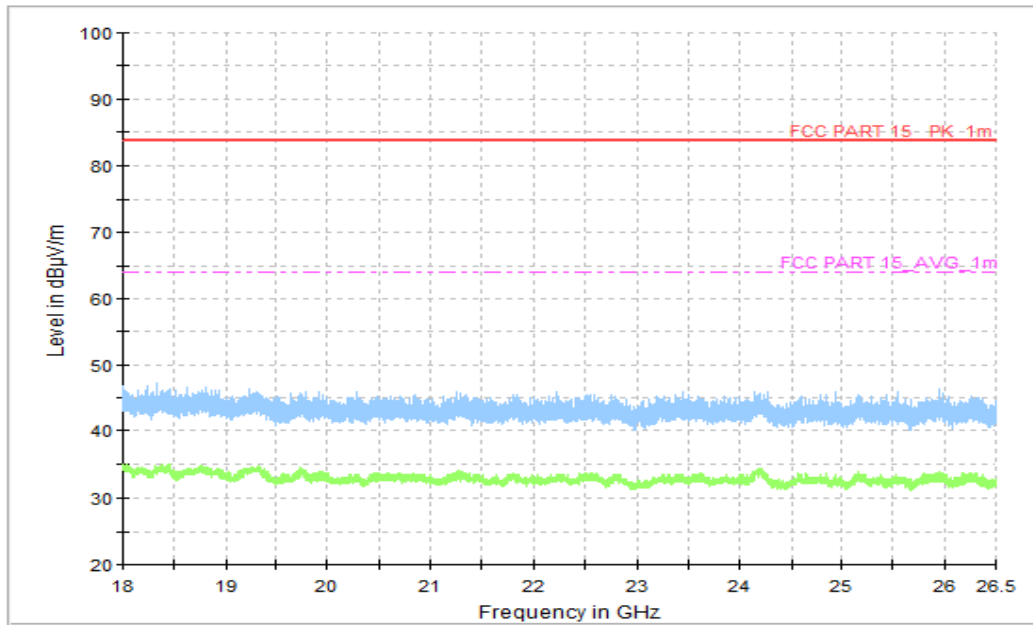


Figure A.10.1.6. Radiated Emission (WCDMA Receiver Band 5,18GHz to 26.5GHz)

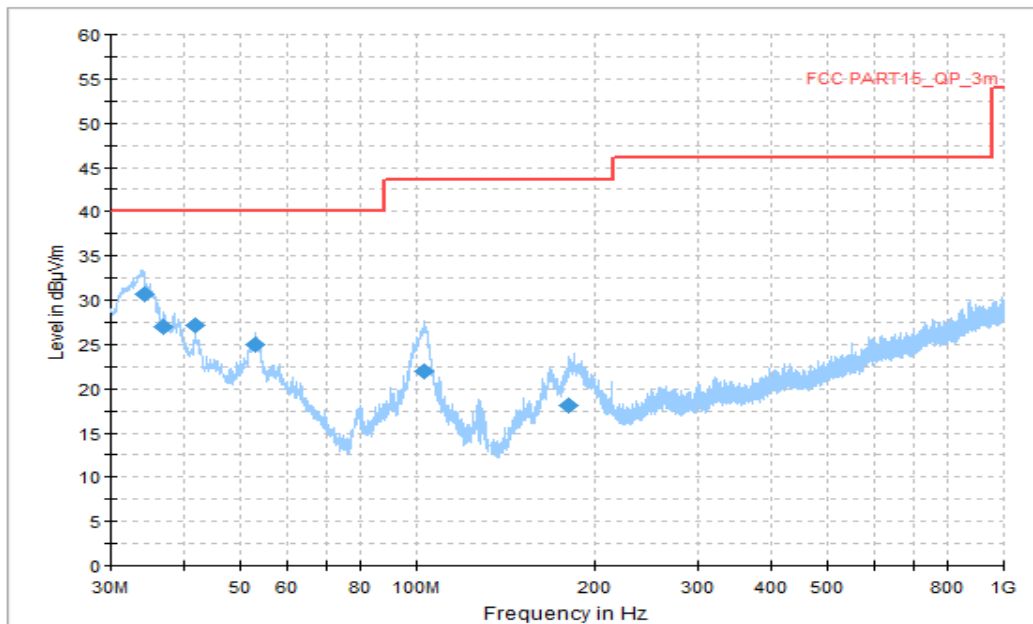


Figure A.10.1.7. Radiated Emission (LTE Receiver Band 5, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
34.257222	30.65	40.00	9.35	V	-16	46.65
37.005556	26.95	40.00	13.04	V	-16	42.95
41.909444	27.12	40.00	12.88	V	-15	42.12
52.956667	24.97	40.00	15.03	V	-15	39.97
103.127222	21.91	43.52	21.63	V	-16	37.91
180.835000	18.11	43.52	25.41	V	-18	36.11

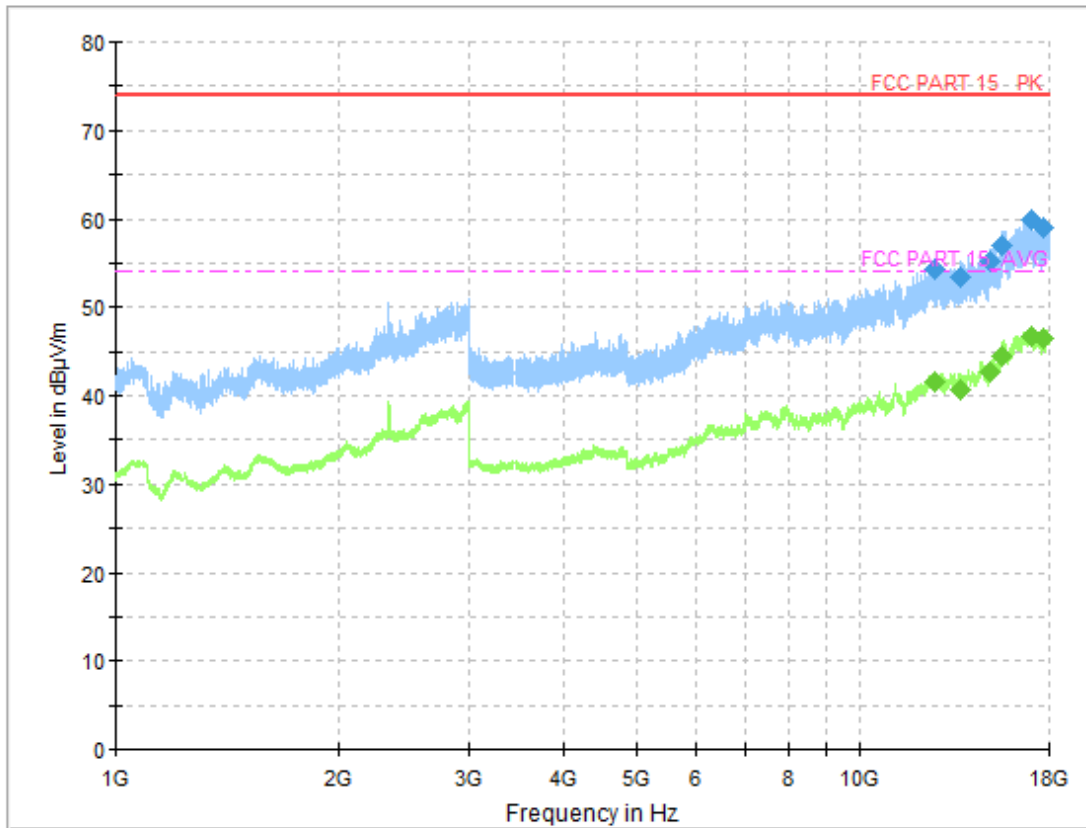


Figure A.10.1.8. Radiated Emission (LTE Receiver Band 5,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12642.000000	54.31	74.00	19.69	V	17	37.31
13652.250000	53.32	74.00	20.68	V	17	36.32
14970.250000	55.15	74.00	18.85	H	18	37.15
15583.250000	56.95	74.00	17.05	H	20	36.95
17002.500000	59.88	74.00	14.12	V	23	36.88
17667.500000	59.04	74.00	14.96	H	23	36.04

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12642.000000	41.53	54.00	12.47	V	17	24.53
13652.250000	40.68	54.00	13.32	V	17	23.68
14970.250000	42.76	54.00	11.24	H	18	24.76
15583.250000	44.48	54.00	9.52	H	20	24.48
17002.500000	46.75	54.00	7.25	V	23	23.75
17667.500000	46.38	54.00	7.62	H	23	23.38

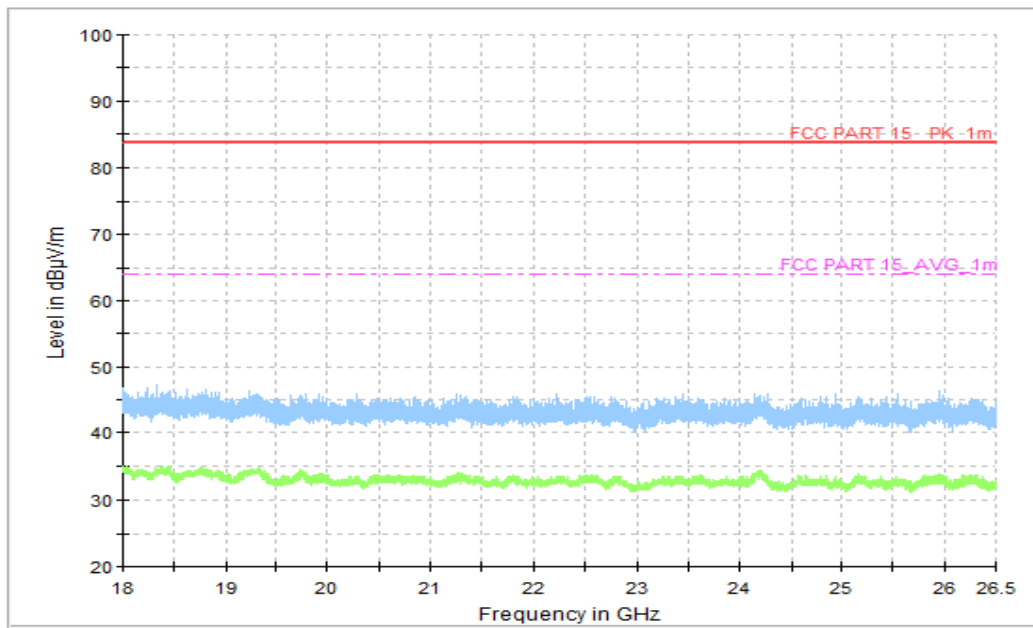


Figure A.10.1.9. Radiated Emission (LTE Receiver Band 5 ,18GHz to 26.5GHz)

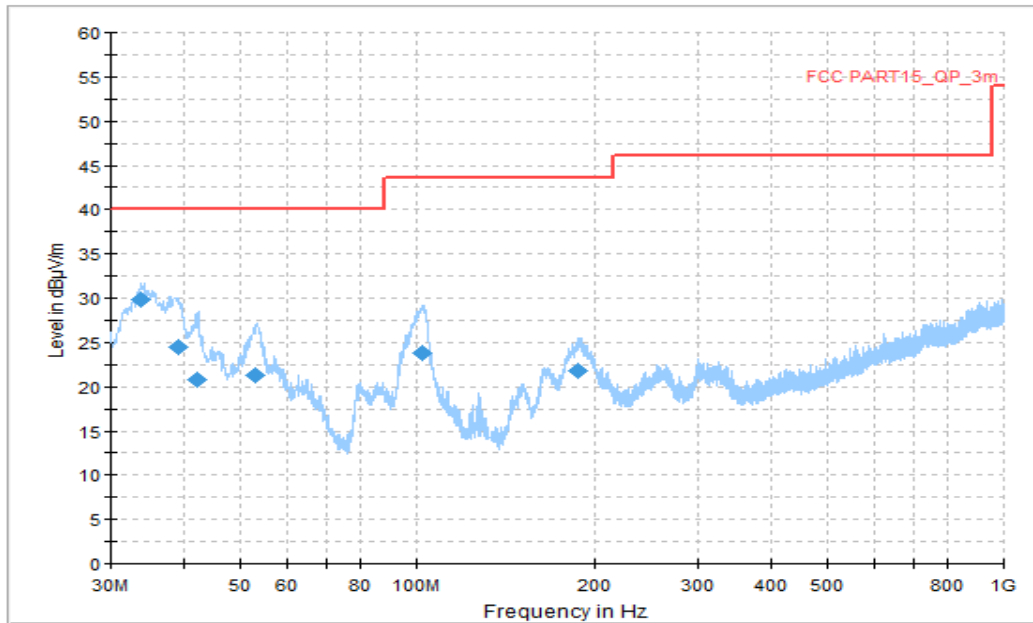


Figure A.10.1.10. Radiated Emission (LTE Receiver Band 12, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
33.880000	29.76	40.00	10.24	V	-16	45.76
38.999444	24.44	40.00	15.56	V	-15	39.44
42.232778	20.75	40.00	19.25	V	-15	35.75
53.064444	21.25	40.00	18.75	V	-15	36.25
101.833889	23.86	43.52	19.66	V	-16	39.86
187.247778	21.87	43.52	21.65	V	-17	38.87

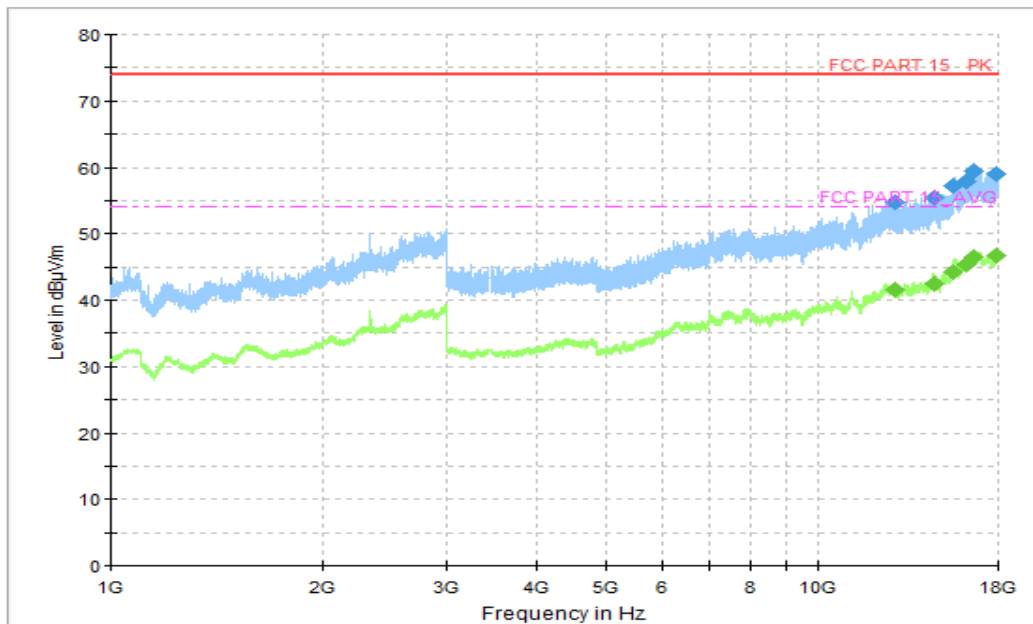


Figure A.10.1.11.Radiated Emission (LTE Receiver Band 12,,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12891.750000	54.79	74.00	19.21	V	17	37.79
14572.750000	55.53	74.00	18.47	H	18	37.53
15553.500000	57.31	74.00	16.69	V	19	38.31
16270.000000	57.81	74.00	16.19	V	21	36.81
16591.750000	59.50	74.00	14.50	H	22	37.5
17894.250000	58.93	74.00	15.07	H	24	34.93

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12891.750000	41.57	54.00	12.43	V	17	24.57
14572.750000	42.49	54.00	11.51	H	18	24.49
15553.500000	44.26	54.00	9.74	V	19	25.26
16270.000000	45.39	54.00	8.61	V	21	24.39
16591.750000	46.43	54.00	7.57	H	22	24.43
17894.250000	46.61	54.00	7.39	H	24	22.61

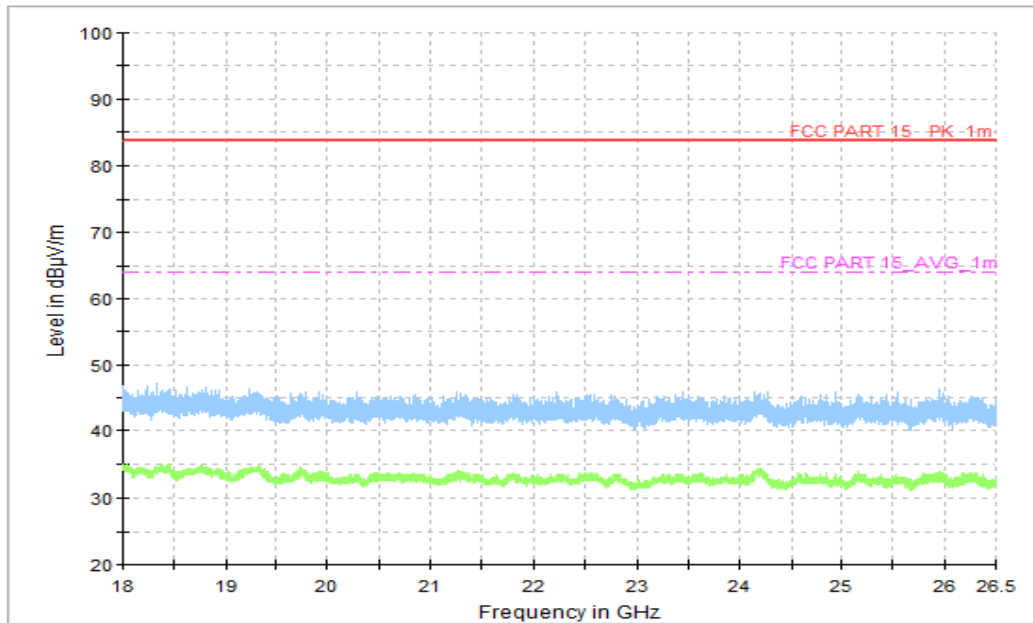


Figure A.10.1.12.Radiated Emission (LTE Receiver Band 12 ,18GHz to 26.5GHz)



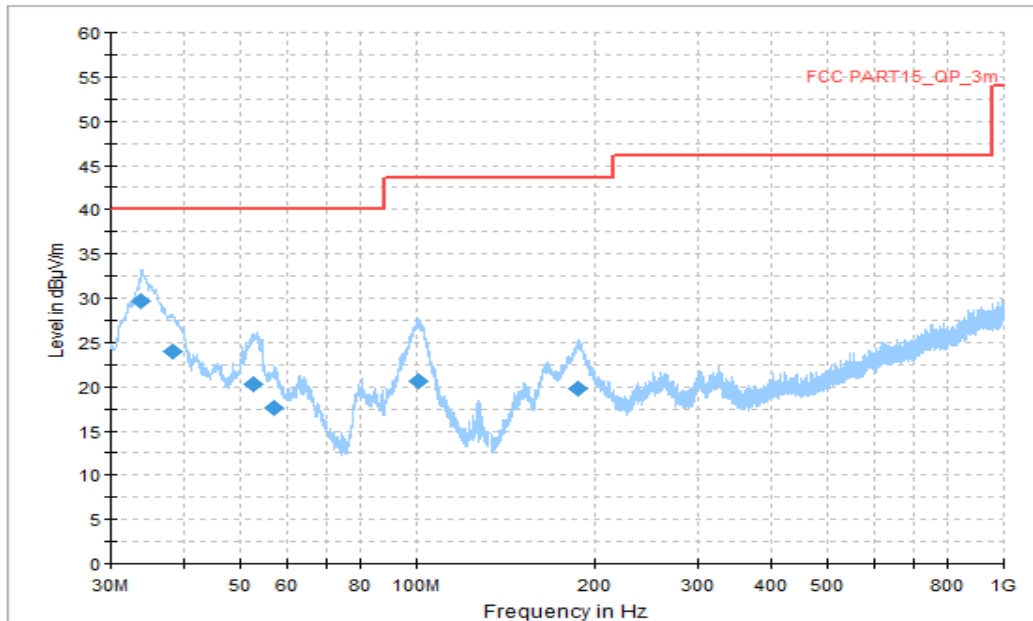


Figure A.10.1.13. Radiated Emission (LTE Receiver Band 17, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
33.880000	29.73	40.00	10.27	V	-16	45.73
38.245000	23.91	40.00	16.09	V	-16	39.91
52.417778	20.35	40.00	19.65	V	-15	35.35
57.160000	17.65	40.00	22.35	V	-14	31.65
100.325000	20.68	43.52	22.84	V	-16	36.68
186.870556	19.78	43.52	23.74	V	-17	36.78

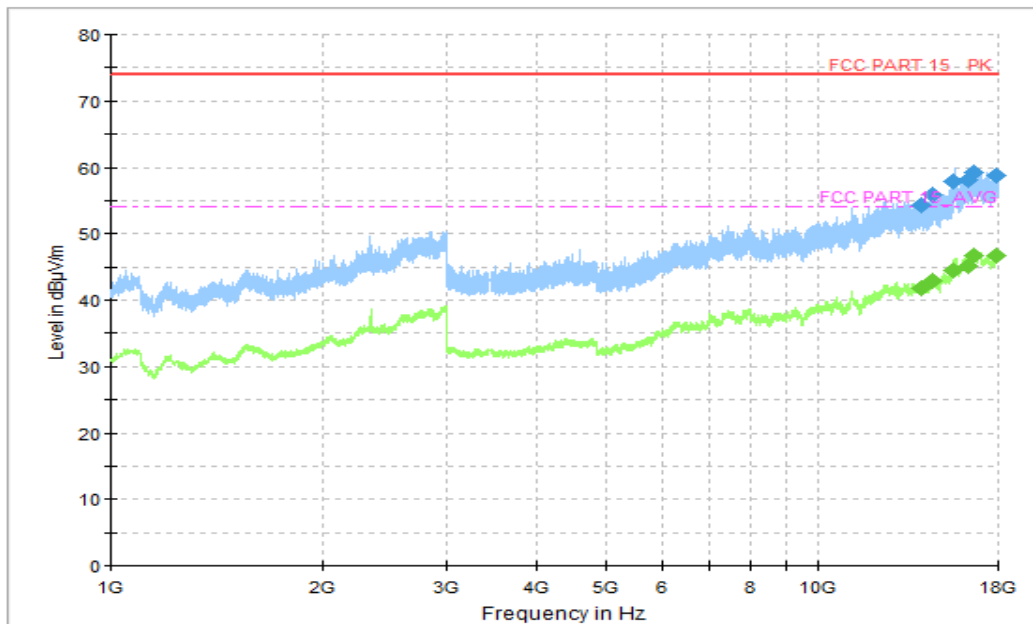


Figure A.10.1.14.Radiated Emission (LTE Receiver Band 17,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14037.250000	54.40	74.00	19.60	V	17	37.40
14564.750000	55.91	74.00	18.09	H	18	37.91
15577.750000	57.93	74.00	16.07	H	20	37.93
16288.250000	58.15	74.00	15.85	V	21	37.15
16616.750000	59.29	74.00	14.71	H	22	37.29
17895.250000	58.85	74.00	15.15	H	24	34.85

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14037.250000	41.73	54.00	12.27	V	17	24.73
14564.750000	42.96	54.00	11.04	H	18	24.96
15577.750000	44.47	54.00	9.53	H	20	24.47
16288.250000	45.18	54.00	8.82	V	21	24.18
16616.750000	46.62	54.00	7.38	H	22	24.62
17895.250000	46.63	54.00	7.37	H	24	22.63

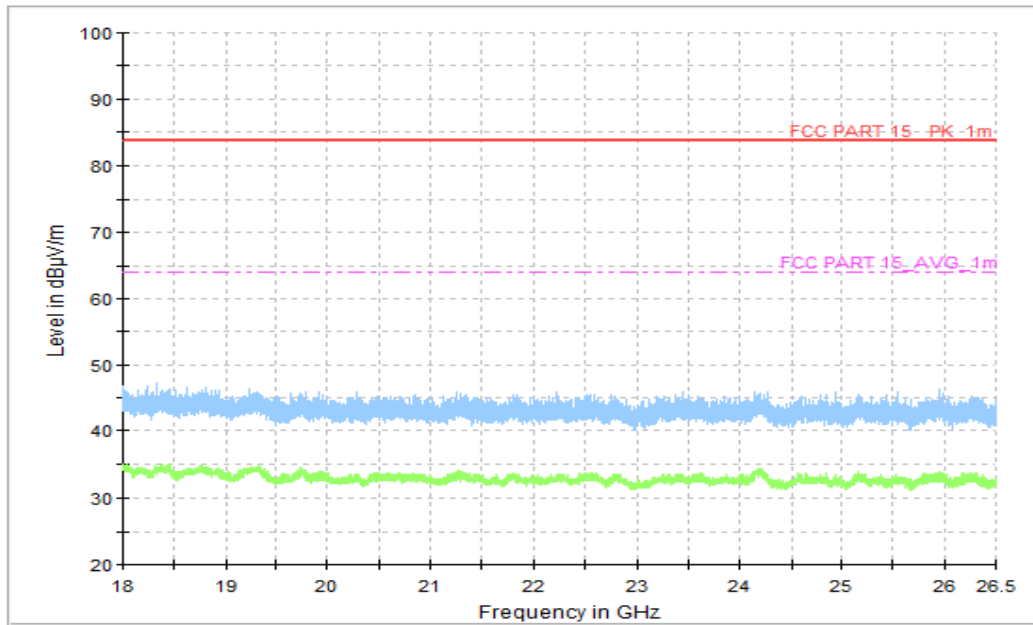


Figure A.10.1.15.Radiated Emission (LTE Receiver Band 17 ,18GHz to 26.5GHz)

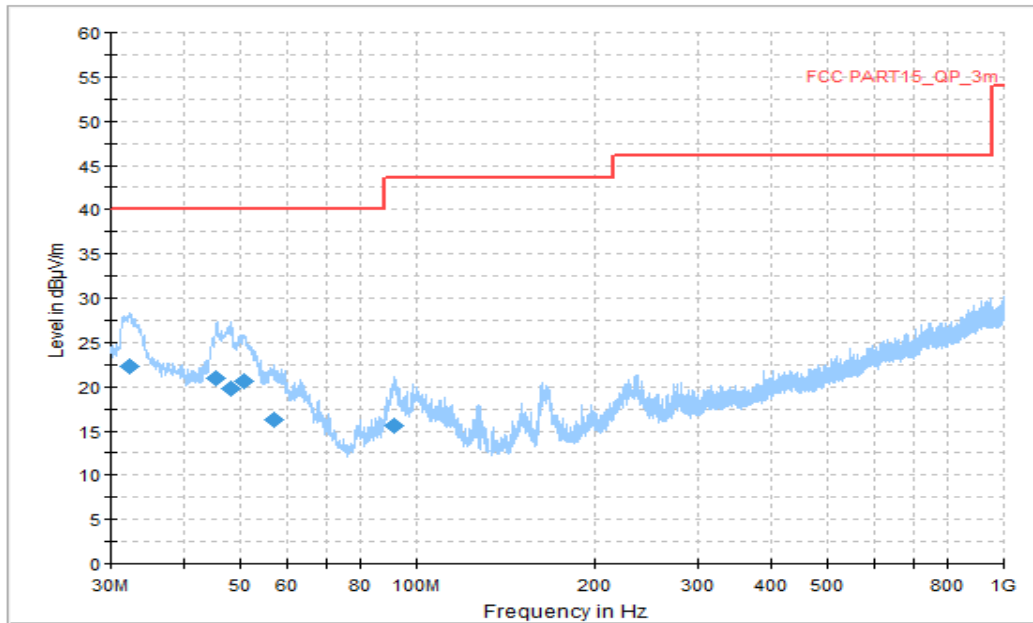


Figure A.10.1.16.Radiated Emission (GSM Receiver 850MHz, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
32.263333	22.35	40.00	17.65	V	-17	39.35
45.304444	20.93	40.00	19.07	V	-15	35.93
48.106667	19.71	40.00	20.29	V	-15	34.71
50.855000	20.59	40.00	19.41	V	-15	35.59
56.836667	16.21	40.00	23.79	V	-14	30.21
91.541111	15.52	43.52	28.00	V	-18	33.52

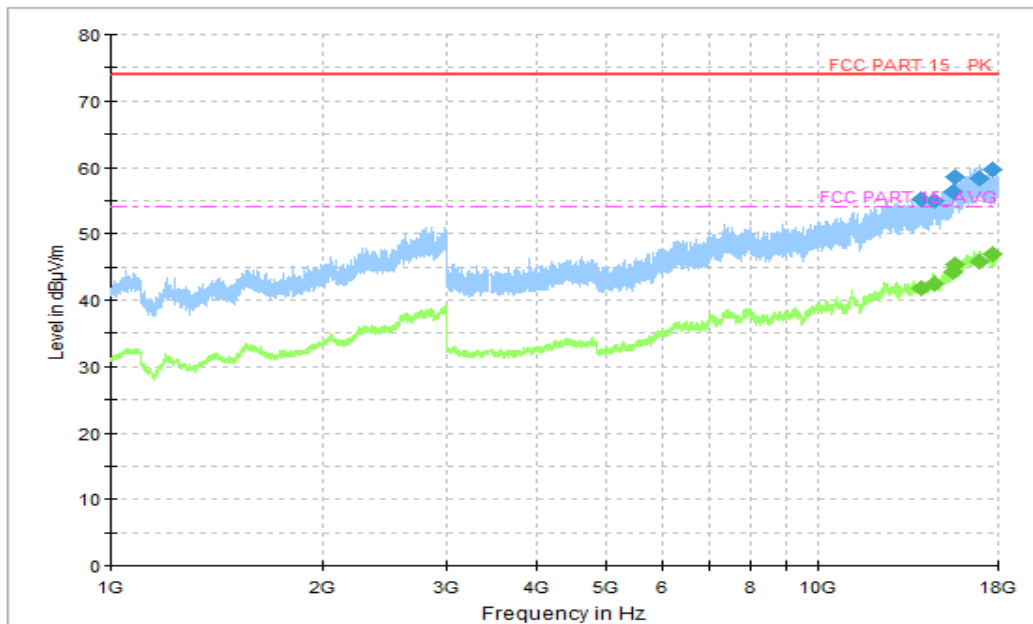


Figure A.10.1.17.Radiated Emission (GSM Receiver 850MHz,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14035.000000	55.18	74.00	18.82	V	17	38.18
14576.750000	55.08	74.00	18.92	H	18	37.08
15574.000000	56.34	74.00	17.66	V	20	36.34
15672.750000	58.44	74.00	15.56	V	20	38.44
16955.500000	58.23	74.00	15.77	H	23	35.23
17699.000000	59.70	74.00	14.30	H	23	36.70

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14035.000000	55.18	74.00	18.82	V	17	38.18
14576.750000	55.08	74.00	18.92	H	18	37.08
15574.000000	56.34	74.00	17.66	V	20	36.34
15672.750000	58.44	74.00	15.56	V	20	38.44
16955.500000	58.23	74.00	15.77	H	23	35.23
17699.000000	59.70	74.00	14.30	H	23	36.70

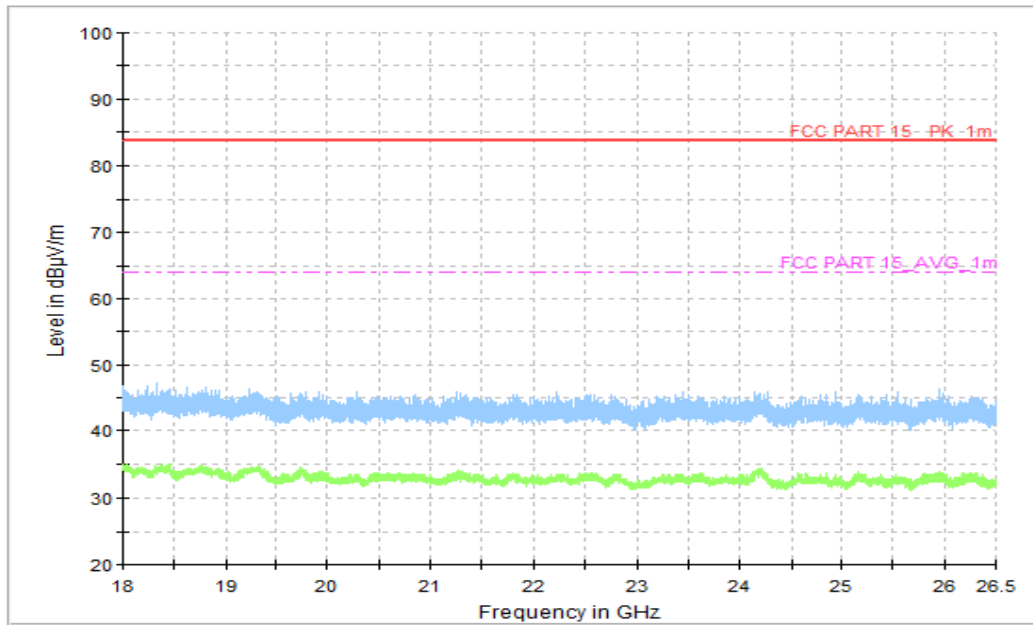
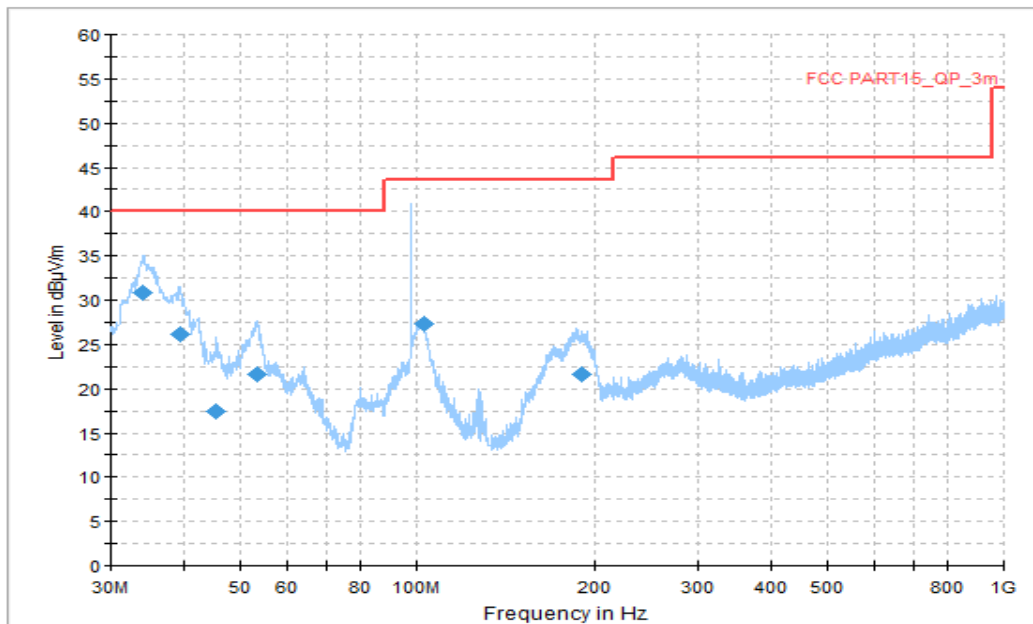


Figure A.10.1.18. Radiated Emission (GSM Receiver 850MHz ,18GHz to 26.5GHz)



**Figure A.10.1.19. Radiated Emission (FM receiver, 30MHz to 1GHz)**

Note: the spike over the limit is coming from the traffic carrier.

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
34.095556	30.77	40.00	9.23	V	-16	46.77
39.376667	26.14	40.00	13.86	V	-15	41.14
45.520000	17.48	40.00	22.52	V	-15	32.48
53.172222	21.55	40.00	18.45	V	-15	36.55
102.911667	27.34	43.52	16.18	V	-16	43.34
190.265556	21.64	43.52	21.88	V	-17	38.64

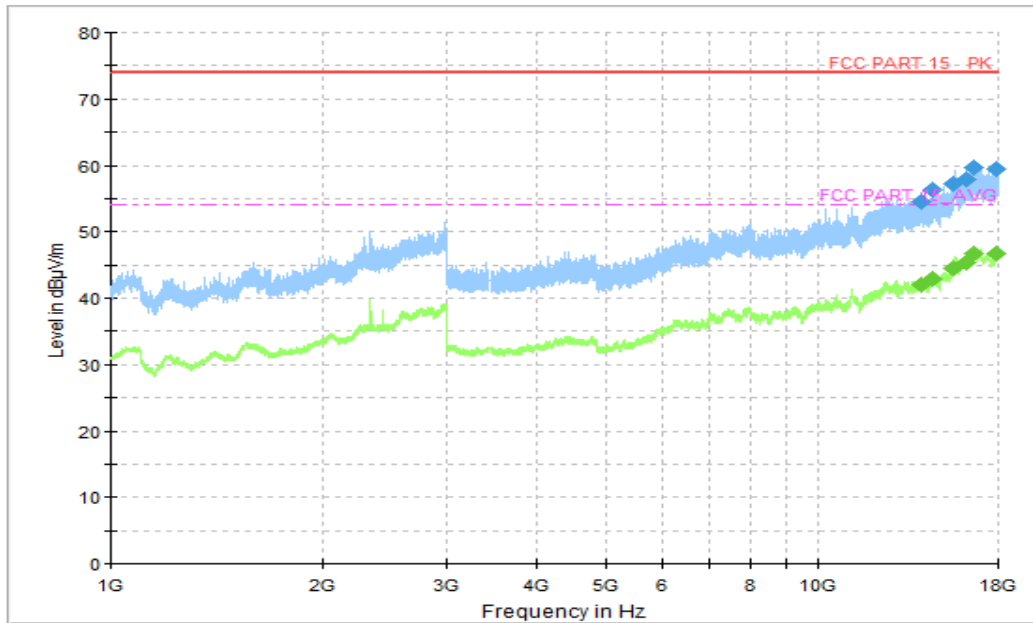


Figure A.10.1.20. Radiated Emission (FM receiver, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14019.250000	54.63	74.00	19.37	H	17	37.63
14563.750000	56.27	74.00	17.74	H	18	38.27
15562.000000	57.26	74.00	16.74	V	19	38.26
16252.750000	57.82	74.00	16.18	V	21	36.82
16618.000000	59.57	74.00	14.43	H	22	37.57
17898.750000	59.44	74.00	14.56	H	24	35.44

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14019.250000	42.03	54.00	11.97	H	17	25.03
14563.750000	42.94	54.00	11.06	H	18	24.94
15562.000000	44.36	54.00	9.64	V	19	25.36
16252.750000	45.46	54.00	8.54	V	21	24.46
16618.000000	46.73	54.00	7.27	H	22	24.73
17898.750000	46.75	54.00	7.25	H	24	22.75



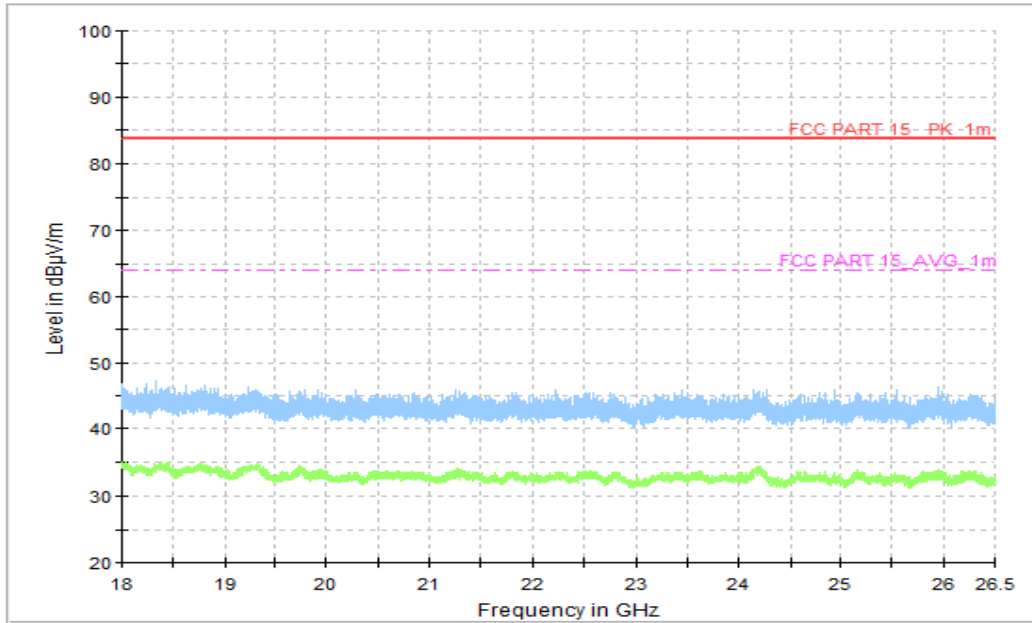


Figure A.10.1.21. Radiated Emission (FM receiver ,18GHz to 26.5GHz)

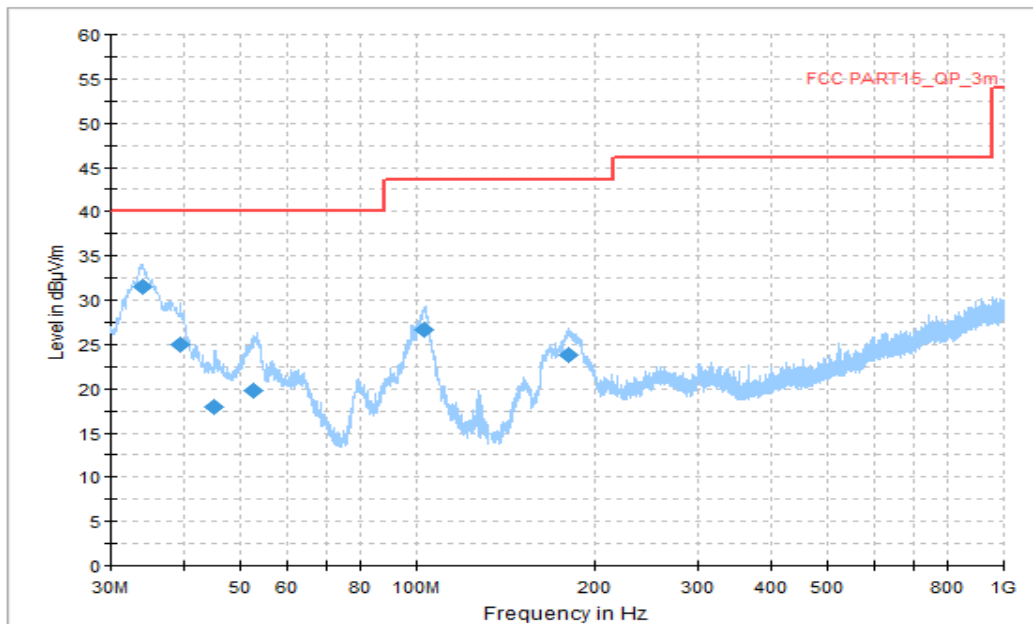


Figure A.10.1.22.Radiated Emission (Video Player, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
33.933889	31.49	40.00	8.51	V	-16	47.49
39.430556	25.02	40.00	14.98	V	-15	40.02
45.142778	17.93	40.00	22.07	V	-15	32.93
52.687222	19.72	40.00	20.28	V	-15	34.72
102.911667	26.71	43.52	16.81	V	-16	42.71
180.781111	23.73	43.52	19.79	V	-18	41.73

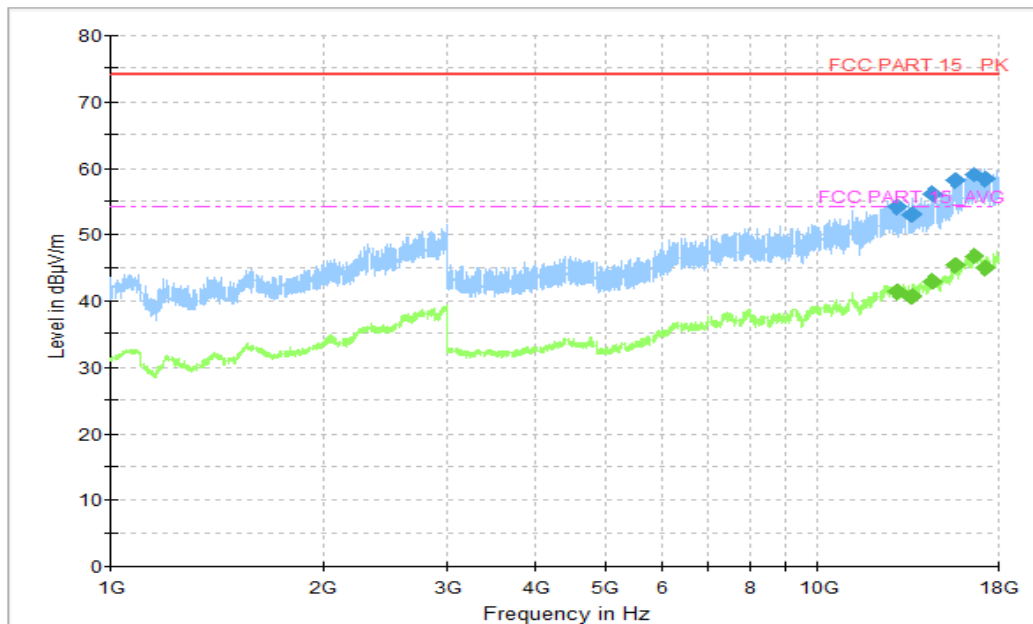


Figure A.10.1.23. Radiated Emission (Video Player, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12893.250000	54.07	74.00	19.93	V	17	37.07
13614.750000	53.02	74.00	20.98	V	17	36.02
14556.250000	56.06	74.00	17.94	H	18	38.06
15621.000000	58.07	74.00	15.93	H	20	38.07
16660.500000	59.00	74.00	15.00	H	22	37
17296.000000	58.27	74.00	15.73	H	22	37

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12893.250000	41.38	54.00	12.62	V	17	24.38
13614.750000	40.78	54.00	13.22	V	17	23.78
14556.250000	42.94	54.00	11.06	H	18	24.94
15621.000000	45.27	54.00	8.73	H	20	25.27
16660.500000	46.72	54.00	7.28	H	22	24.72
17296.000000	44.98	54.00	9.02	H	22	24.72

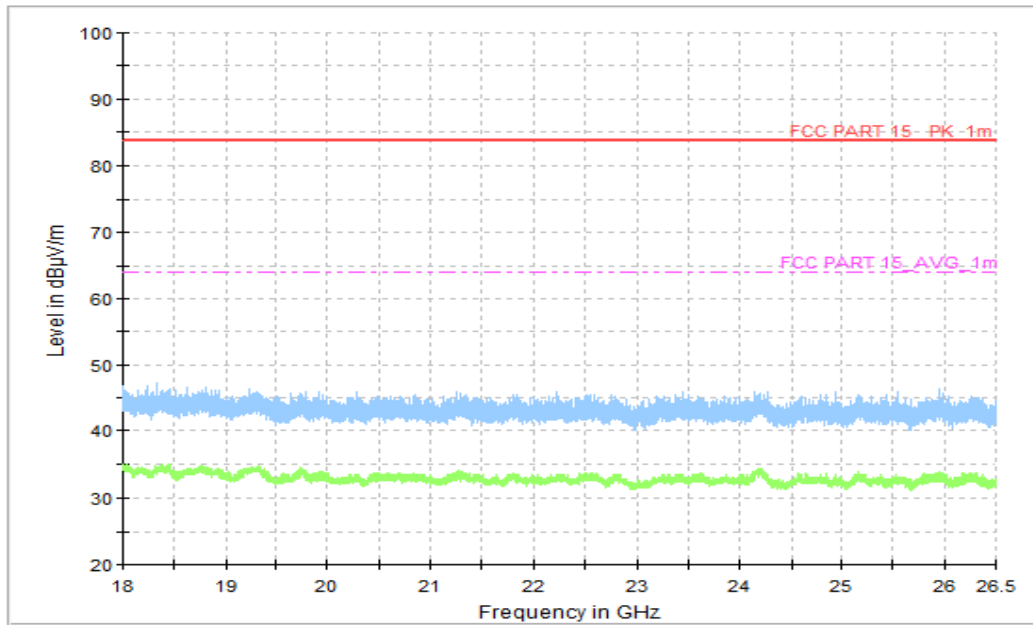


Figure A.10.1.24. Radiated Emission (Video Player, 18GHz to 26.5GHz)

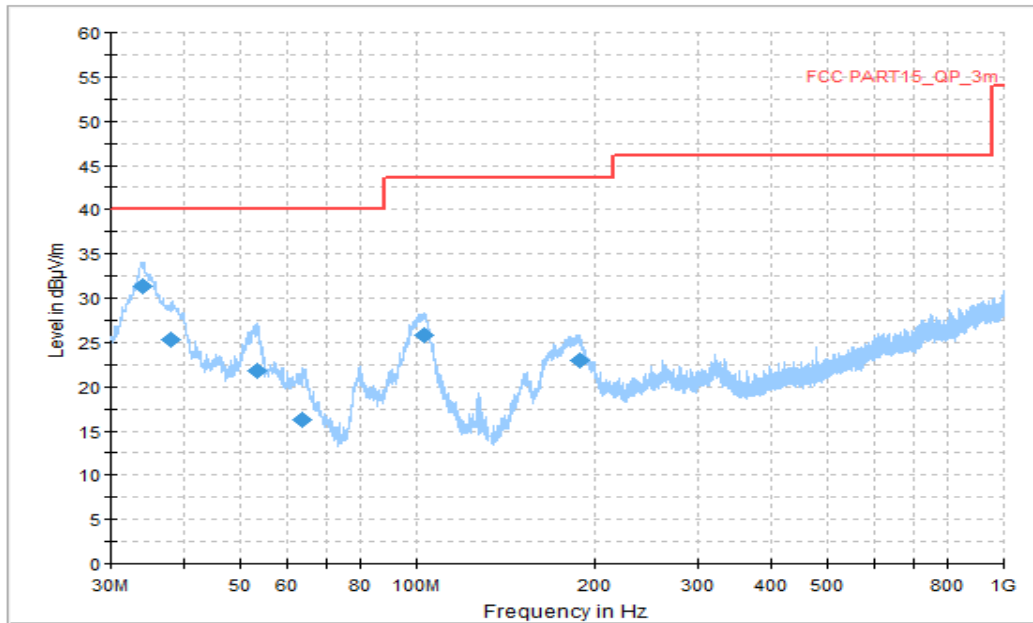


Figure A.10.1.25. Radiated Emission (Camera, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
34.095556	31.26	40.00	8.74	V	-16	47.26
38.029444	25.28	40.00	14.72	V	-16	41.28
53.549444	21.71	40.00	18.29	V	-15	36.71
63.896111	16.32	40.00	23.68	V	-17	33.32
103.235000	25.82	43.52	17.70	V	-16	41.82
188.056111	22.95	43.52	20.57	V	-17	39.95

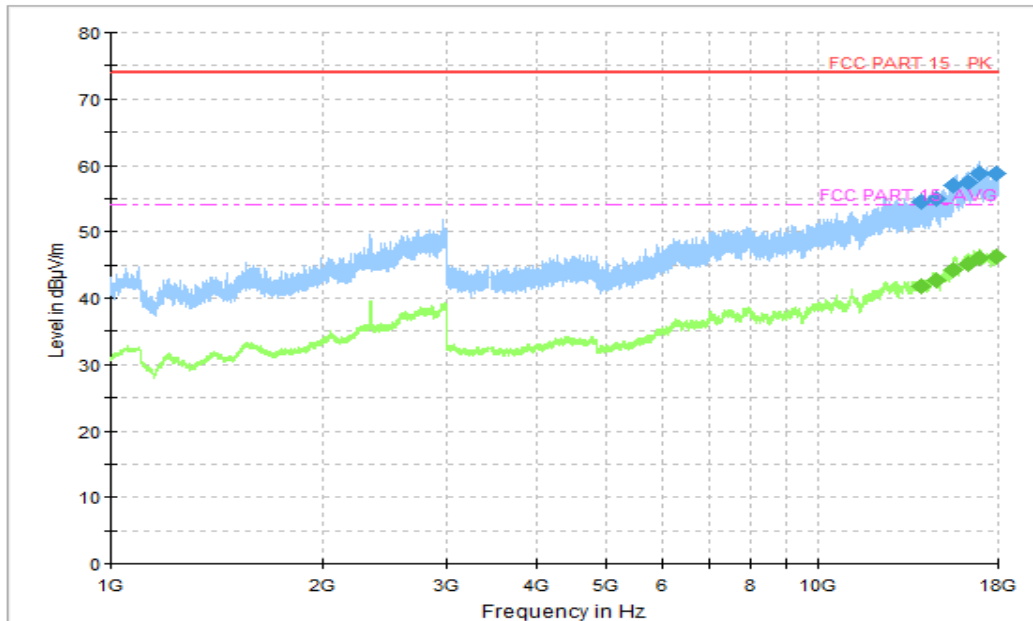


Figure A.10.1.26.Radiated Emission (Camera,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14028.750000	54.55	74.00	19.45	V	17	37.55
14682.250000	54.89	74.00	19.11	V	18	36.89
15572.250000	57.00	74.00	17.00	H	20	37.00
16287.500000	57.41	74.00	16.59	H	21	36.41
16979.500000	58.75	74.00	15.25	V	23	35.75
17913.250000	58.88	74.00	15.12	H	24	35.75

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14028.750000	41.86	54.00	12.14	V	17	24.86
14682.250000	42.62	54.00	11.38	V	18	24.62
15572.250000	44.17	54.00	9.83	H	20	24.17
16287.500000	45.14	54.00	8.86	H	21	24.14
16979.500000	46.10	54.00	7.90	V	23	23.1
17913.250000	46.28	54.00	7.72	H	24	23.1

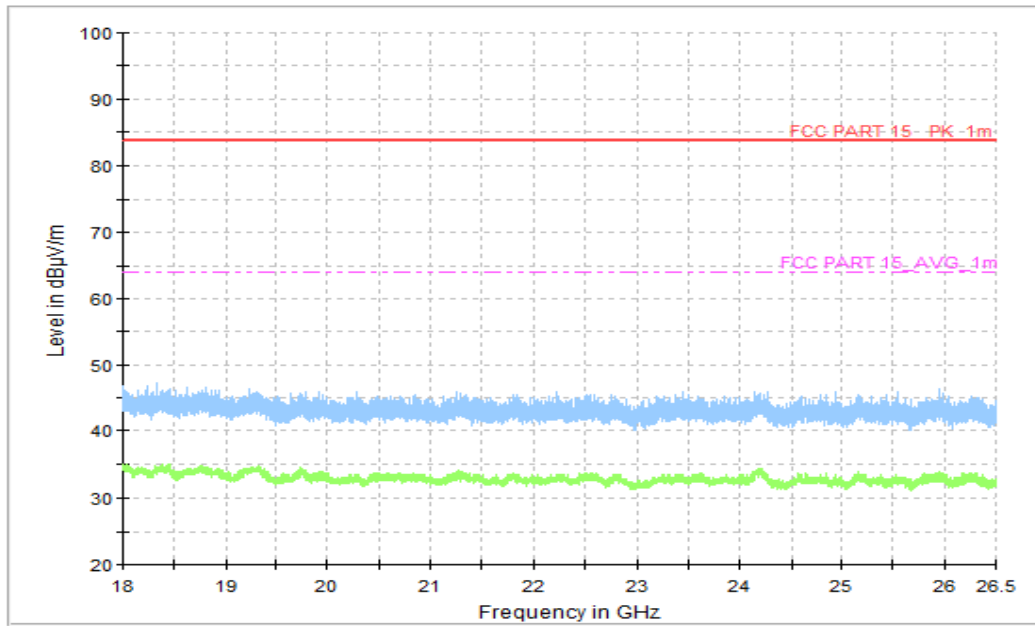


Figure A.10.1.27.Radiated Emission (Camera,18GHz to 26.5GHz)

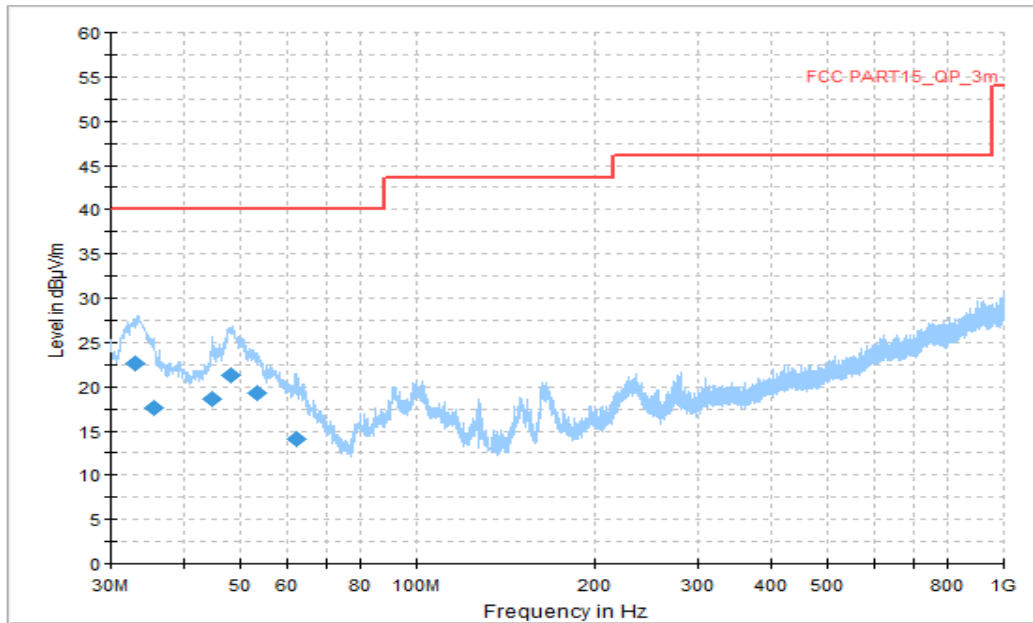


Figure A.10.1.28.Radiated Emission (Camera, 30MHz to 1GHz)

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
32.963889	22.57	40.00	17.43	V	-17	39.57
35.550556	17.66	40.00	22.34	V	-16	33.66
44.711667	18.59	40.00	21.41	V	-15	33.59
48.160556	21.31	40.00	18.69	V	-15	36.31
53.226111	19.21	40.00	20.79	V	-15	34.21
62.117778	14.13	40.00	25.87	V	-16	30.13



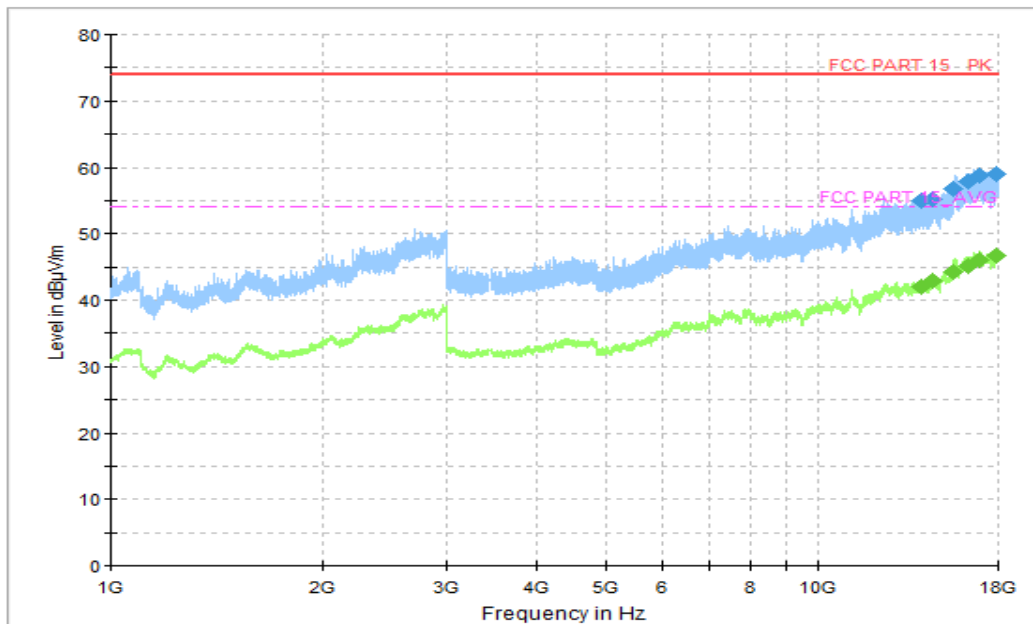


Figure A.10.1.29. Radiated Emission (Camera,1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14039.000000	54.89	74.00	19.11	H	17	37.89
14564.250000	55.19	74.00	18.81	V	18	37.19
15562.000000	56.87	74.00	17.13	H	19	37.87
16288.750000	57.86	74.00	16.14	V	21	36.86
16951.250000	58.77	74.00	15.23	H	22	36.77
17902.000000	59.09	74.00	14.91	H	24	36.77

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14039.000000	41.95	54.00	12.05	H	17	24.95
14564.250000	43.00	54.00	11.00	V	18	25
15562.000000	44.31	54.00	9.69	H	19	25.31
16288.750000	45.24	54.00	8.76	V	21	24.24
16951.250000	45.97	54.00	8.03	H	22	23.97
17902.000000	46.78	54.00	7.22	H	24	23.97

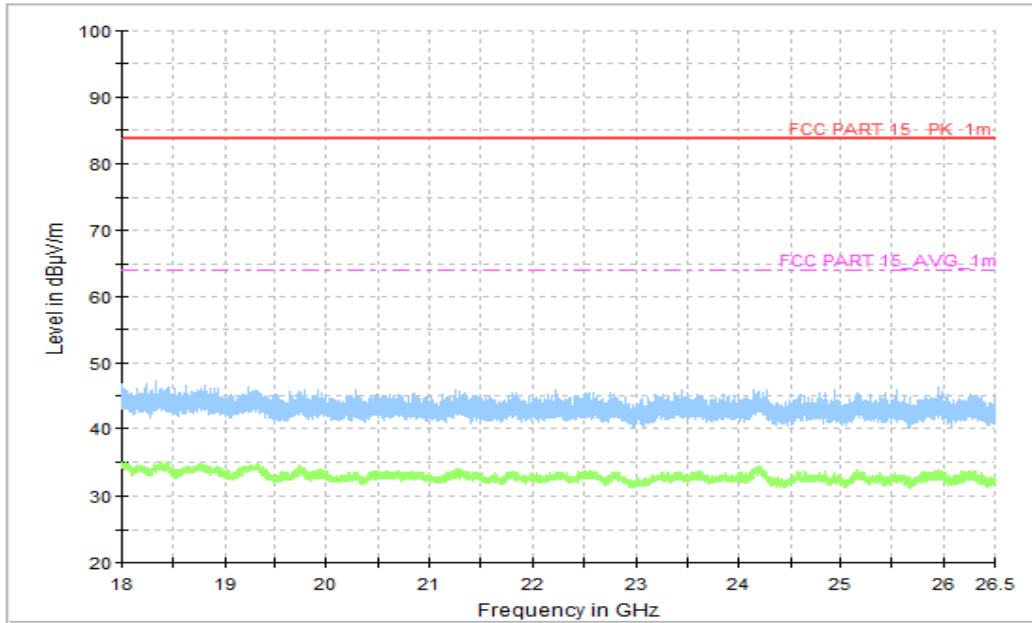


Figure A.10.1.30. Radiated Emission (Camera, 18GHz to 26.5GHz)

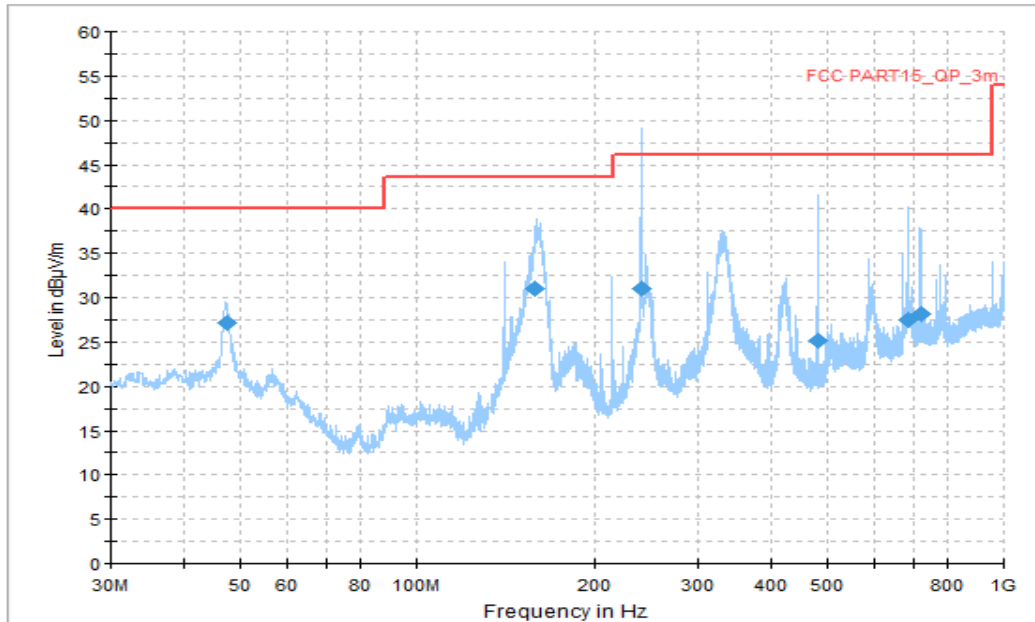


Figure A.10.1.31. Radiated Emission (Data Transfer : EUT to PC, 30MHz to 1GHz)

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
47.352222	27.19	40.00	12.81	V	-15	42.19
158.309444	31.04	43.52	12.48	V	-19	50.04
240.005000	31.01	46.02	15.01	V	-15	46.01
479.972222	25.10	46.02	20.92	V	-9	34.10
684.049444	27.42	46.02	18.60	V	-5	32.42
720.047222	28.21	46.02	17.81	V	-5	33.21

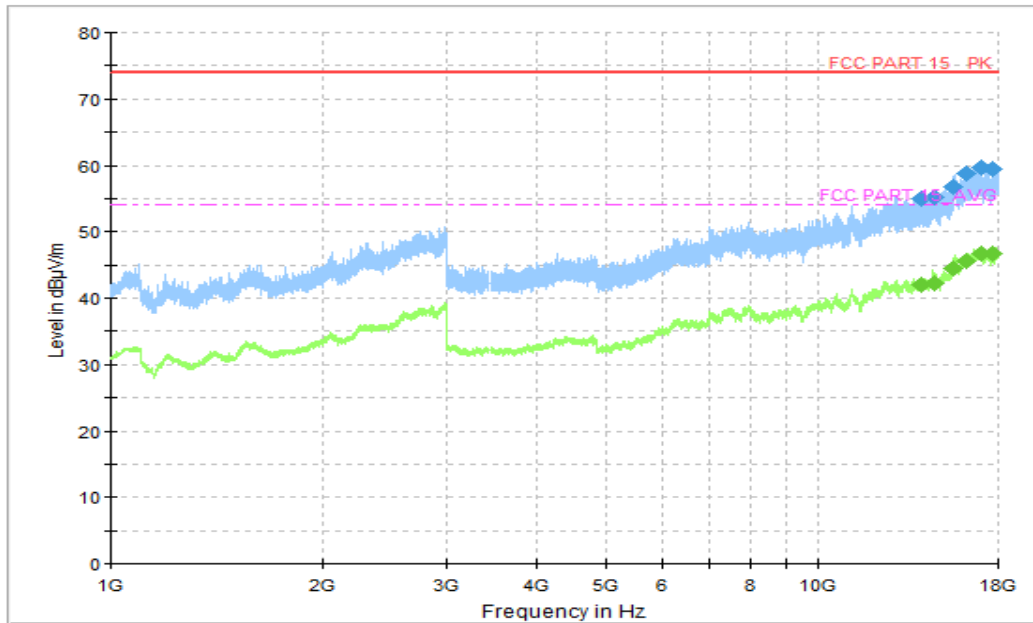


Figure A.10.1.32. Radiated Emission (Data Transfer: EUT to PC, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14030.250000	55.00	74.00	19.00	V	17	38.00
14650.000000	55.27	74.00	18.73	V	18	37.27
15566.000000	56.75	74.00	17.25	H	20	36.75
16250.500000	58.80	74.00	15.20	H	21	37.80
17011.750000	59.71	74.00	14.29	H	23	36.71
17712.500000	59.47	74.00	14.53	H	23	36.71

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14030.250000	41.91	54.00	12.09	V	17	24.91
14650.000000	42.18	54.00	11.82	V	18	24.18
15566.000000	44.37	54.00	9.63	H	20	24.37
16250.500000	45.53	54.00	8.47	H	21	24.53
17011.750000	46.64	54.00	7.36	H	23	23.64
17712.500000	46.71	54.00	7.29	H	23	23.64

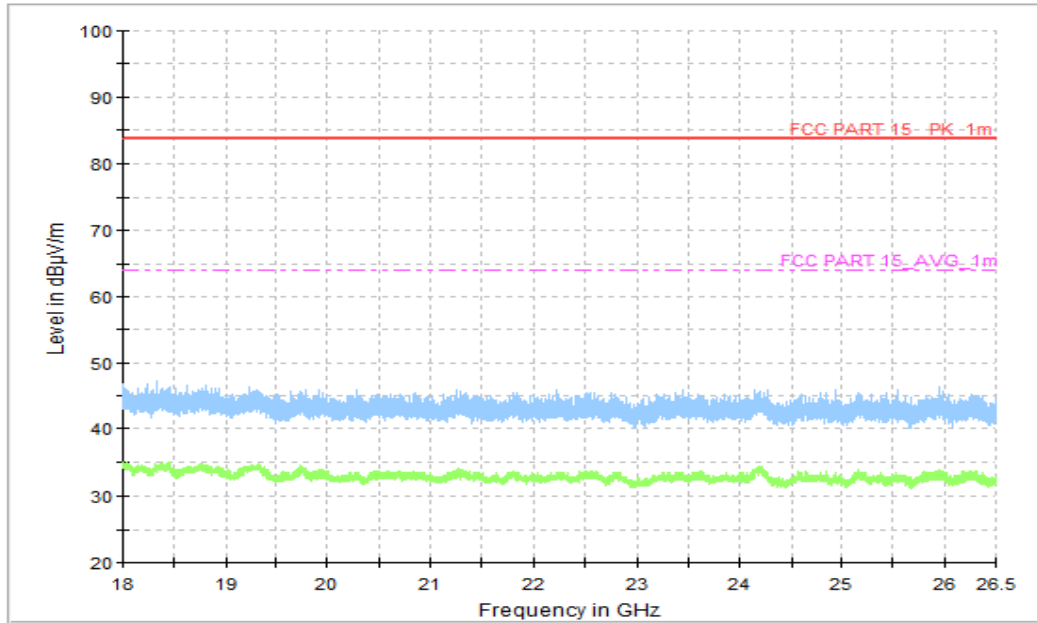


Figure A.10.1.33.Radiated Emission (Data Transfer: EUT to PC,18GHz to 26.5GHz)

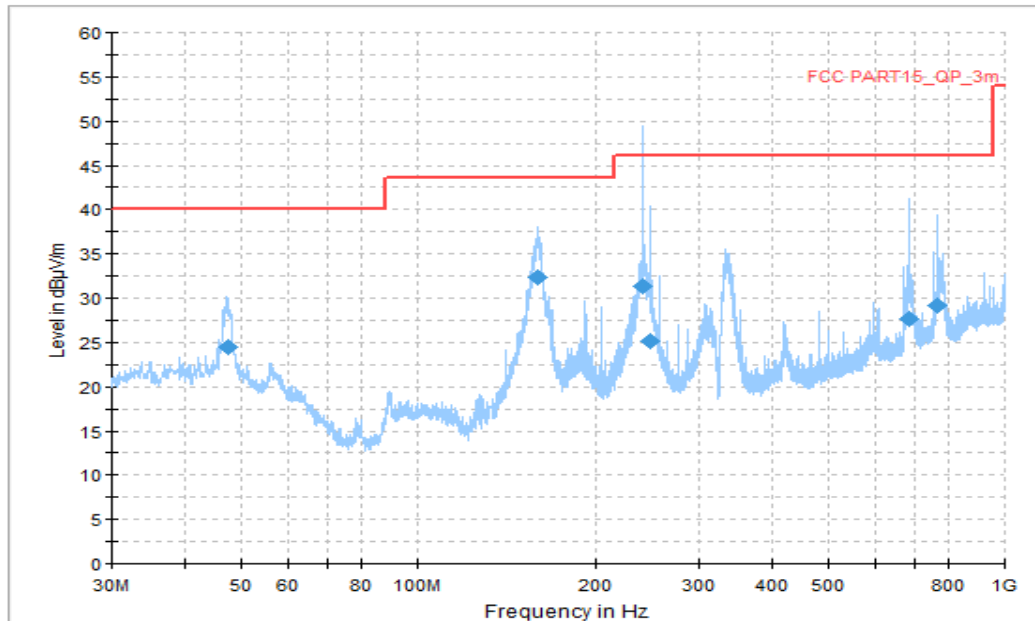


Figure A.10.1.34. Radiated Emission (Data Transfer: PC to EUT,30MHz to 1GHz)

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
47.298333	24.54	40.00	15.46	V	-14	38.54
159.010000	32.35	43.52	11.17	H	-19	51.35
240.005000	31.36	46.02	14.66	V	-15	46.36
248.519444	25.20	46.02	20.82	H	-15	40.20
683.995556	27.59	46.02	18.43	V	-5	32.59
768.008333	29.21	46.02	16.81	H	-4	32.59

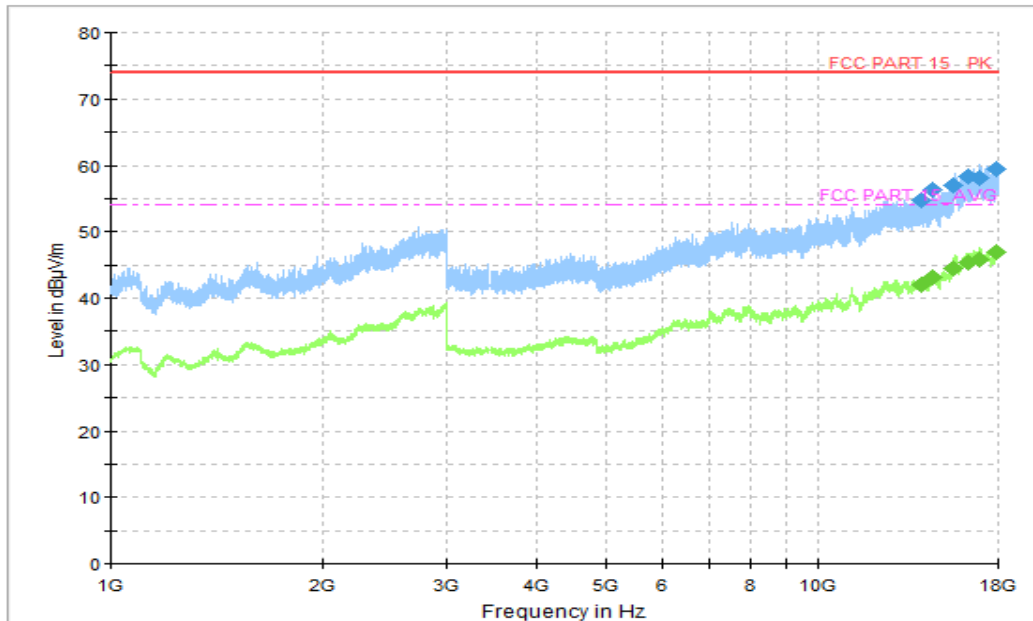


Figure A.10.1.35. Radiated Emission (Data Transfer: PC to EUT, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14015.250000	54.64	74.00	19.36	H	17	37.64
14565.250000	56.33	74.00	17.67	V	18	38.33
15562.000000	56.90	74.00	17.10	H	19	37.90
16286.000000	58.24	74.00	15.76	V	21	37.24
16951.750000	58.19	74.00	15.81	H	22	36.19
17899.500000	59.44	74.00	14.56	H	24	35.44

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14015.250000	42.12	54.00	11.88	H	17	25.12
14565.250000	43.08	54.00	10.92	V	18	25.08
15562.000000	44.42	54.00	9.58	H	19	25.42
16286.000000	45.37	54.00	8.63	V	21	24.37
16951.750000	45.79	54.00	8.21	H	22	23.79
17899.500000	46.86	54.00	7.14	H	24	22.86

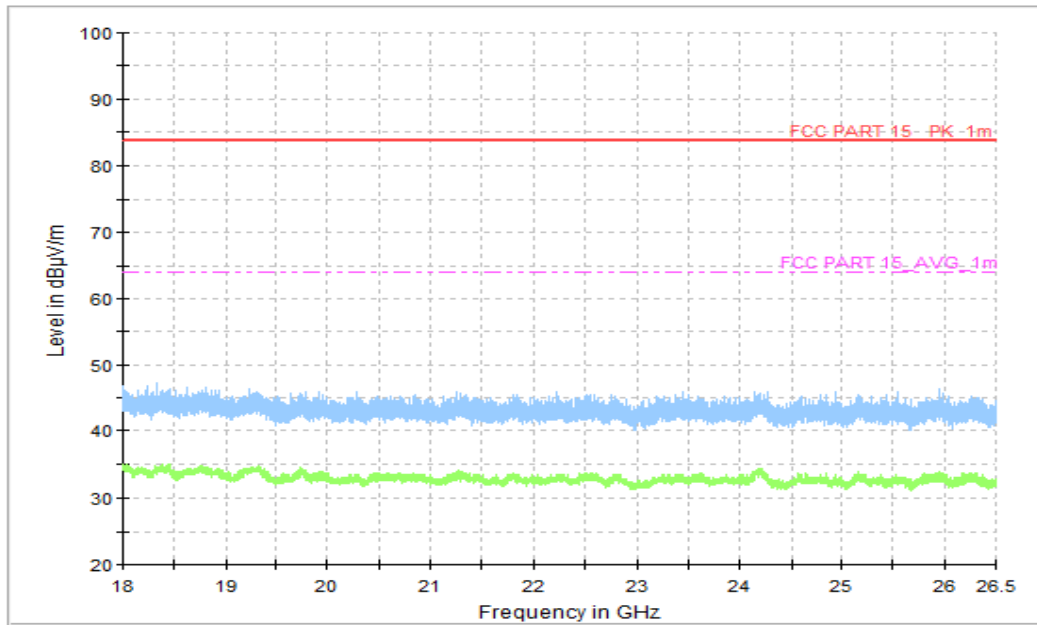


Figure A.10.1.36.Radiated Emission (Data Transfer: PC to EUT,18GHz to 26.5GHz)



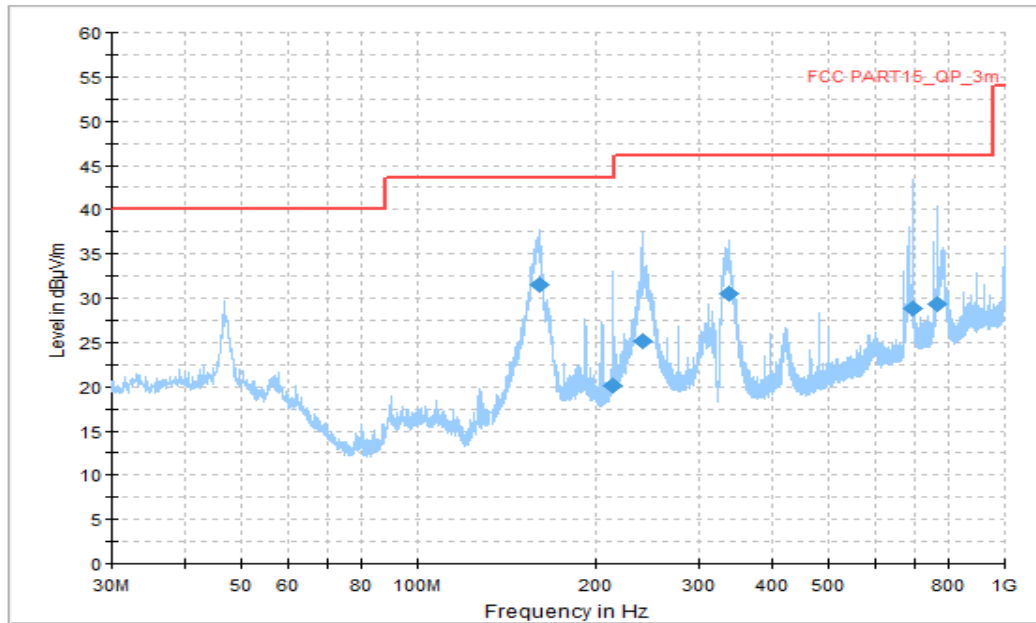


Figure A.10.1.37. Radiated Emission (Data Transfer: PC to TF Card, 30MHz to 1GHz)

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
159.818333	31.49	43.52	12.03	H	-19	50.49
214.246111	20.15	43.52	23.37	H	-17	37.15
240.382222	25.10	46.02	20.92	H	-15	40.10
336.843333	30.44	46.02	15.58	H	-12	42.44
694.288333	28.76	46.02	17.26	V	-5	33.76
768.008333	29.34	46.02	16.68	V	-4	33.34

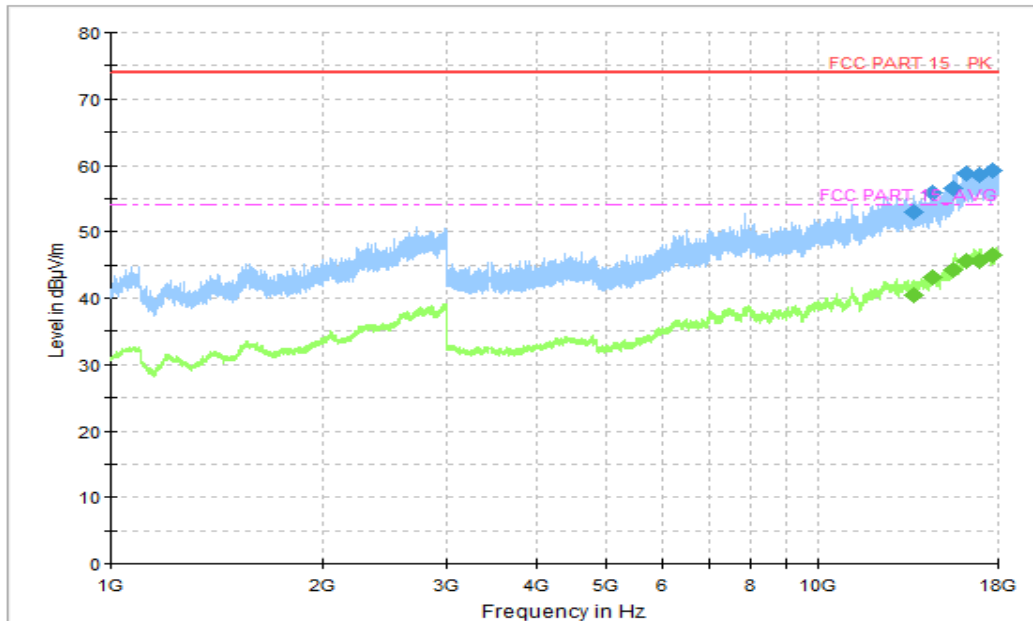


Figure A.10.1.38. Radiated Emission (Data Transfer: PC to TF Card, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
13657.500000	52.85	74.00	21.15	V	17	35.85
14560.000000	55.80	74.00	18.20	V	18	37.8
15576.250000	56.46	74.00	17.54	V	20	36.46
16268.750000	58.80	74.00	15.20	H	21	37.80
16959.250000	58.52	74.00	15.48	V	23	35.52
17678.500000	59.27	74.00	14.73	H	23	36.27

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
13657.500000	40.55	54.00	13.45	V	17	23.55
14560.000000	43.05	54.00	10.95	V	18	25.05
15576.250000	44.17	54.00	9.83	V	20	24.17
16268.750000	45.55	54.00	8.45	H	21	24.55
16959.250000	45.66	54.00	8.34	V	23	22.66
17678.500000	46.50	54.00	7.50	H	23	23.50

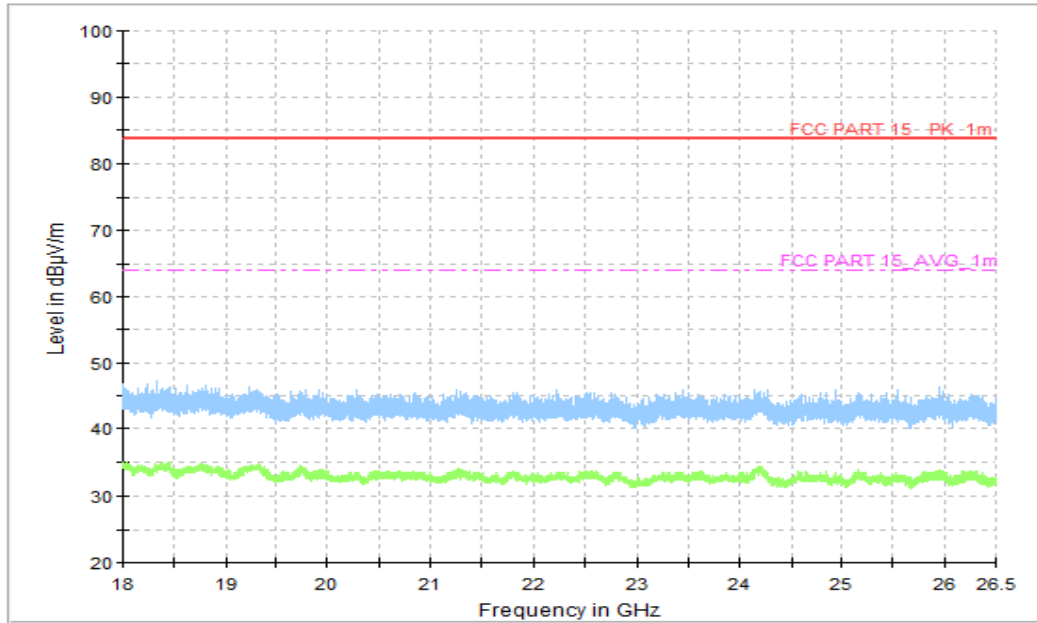


Figure A.10.1.39.Radiated Emission (Data Transfer: PC to TF Card,18GHz to 26.5GHz)

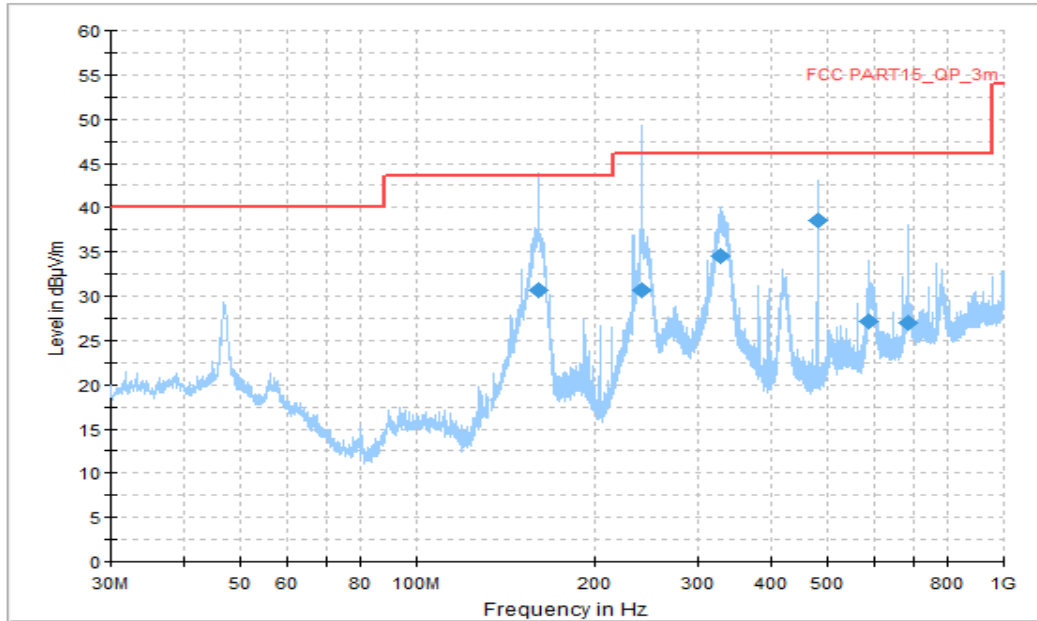


Figure A.10.1.40. Radiated Emission (Data Transfer: TF Card to PC, 30MHz to 1GHz)

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
159.980000	30.71	43.52	12.81	H	-19	49.71
240.005000	30.69	46.02	15.33	H	-15	45.69
327.736111	34.45	46.02	11.57	H	-13	47.45
480.026111	38.62	46.02	7.40	H	-9	47.62
588.019444	27.18	46.02	18.84	H	-6	33.18
683.887778	27.04	46.02	18.98	V	-5	32.04

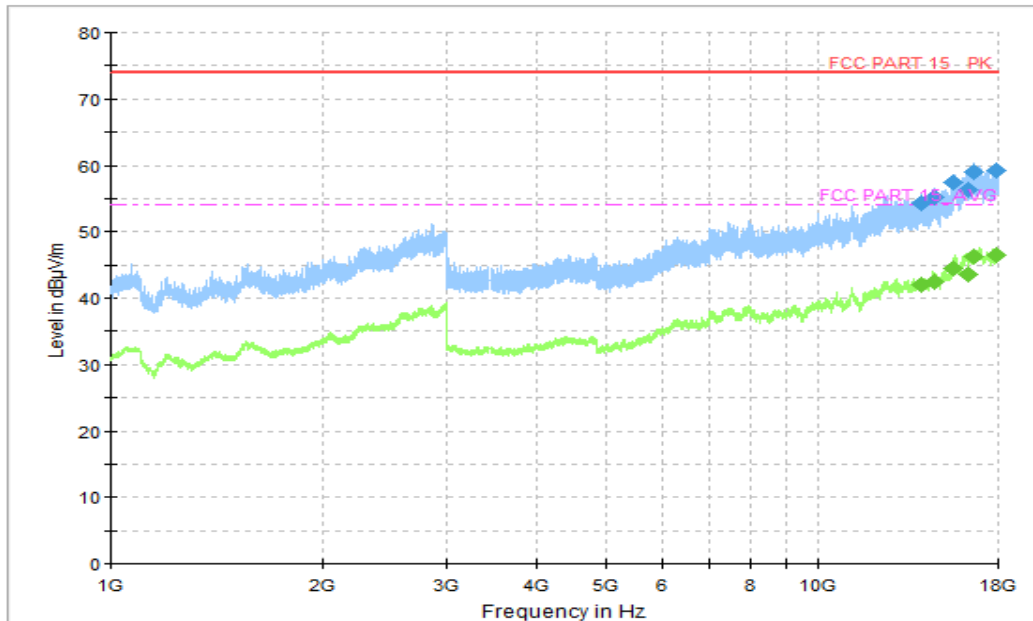


Figure A.10.1.41. Radiated Emission (Data Transfer: TF Card to PC, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14000.750000	54.36	74.00	19.64	V	17	37.36
14583.500000	55.10	74.00	18.90	H	18	37.10
15563.000000	57.42	74.00	16.58	V	19	38.42
16341.000000	56.31	74.00	17.69	V	21	35.31
16631.500000	58.91	74.00	15.09	H	22	36.91
17870.750000	59.16	74.00	14.84	H	24	35.16

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14000.750000	41.93	54.00	12.07	V	17	24.93
14583.500000	42.43	54.00	11.57	H	18	24.43
15563.000000	44.50	54.00	9.50	V	19	25.50
16341.000000	43.68	54.00	10.32	V	21	22.68
16631.500000	46.36	54.00	7.64	H	22	24.36
17870.750000	46.48	54.00	7.52	H	24	22.48

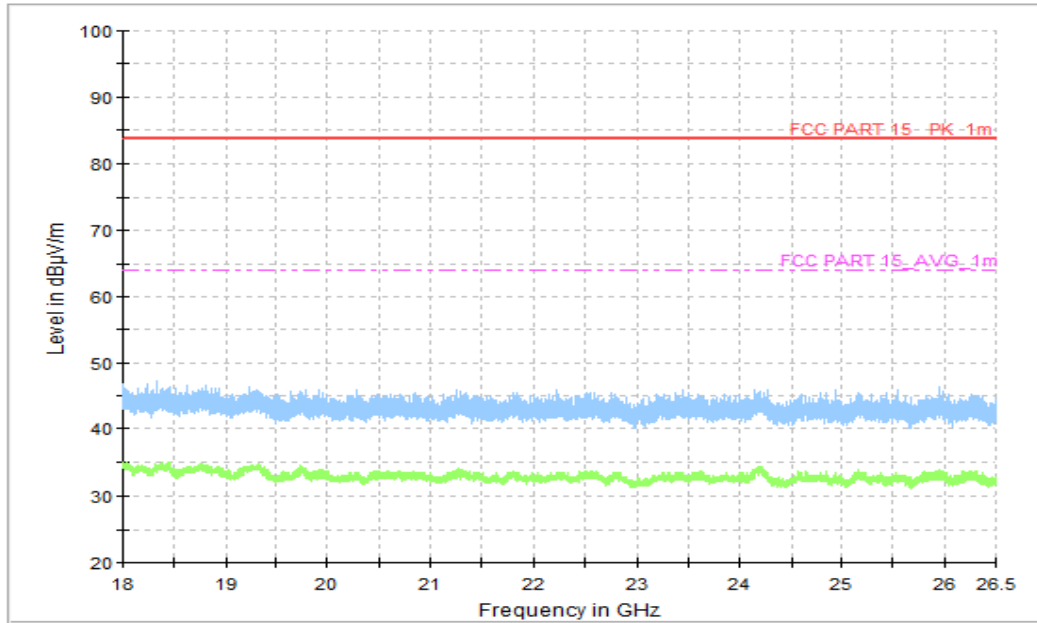


Figure A.10.1.42. Radiated Emission (Data Transfer: TF Card to PC, 18GHz to 26.5GHz)

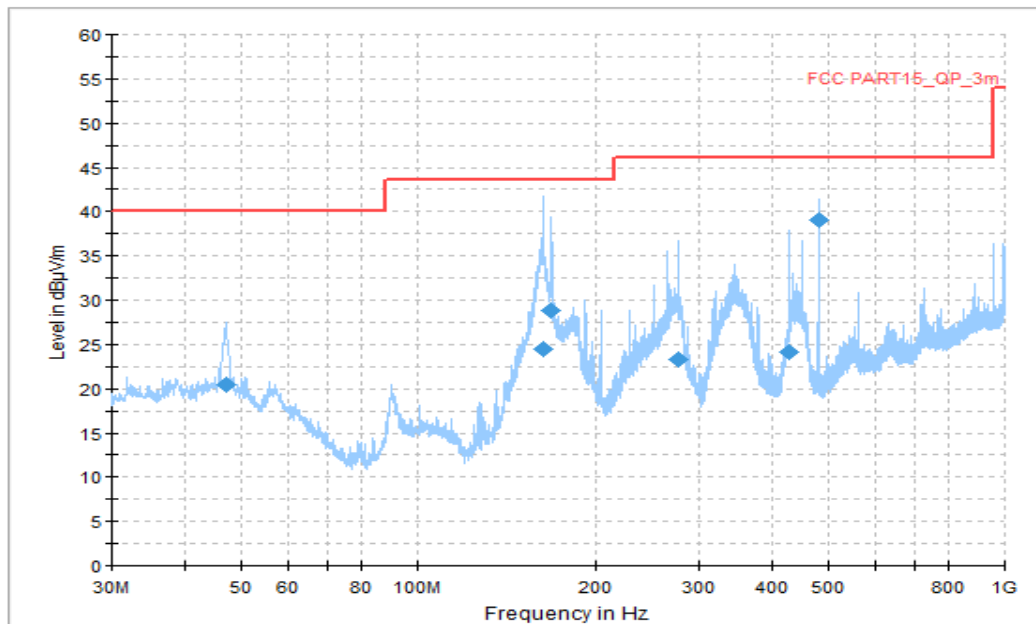


Figure A.10.1.43.Radiated Emission (Data Transfer: TF Card to PC,30MHz to 1GHz)

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
162.782222	24.46	43.52	19.06	V	-14	38.46
167.955556	28.91	43.52	14.61	V	-19	47.91
276.002778	23.24	46.02	22.78	H	-19	42.24
428.562222	24.17	46.02	21.85	H	-14	38.17
479.972222	39.09	46.02	6.93	H	-10	49.09
162.782222	24.46	43.52	19.06	V	-9	33.46

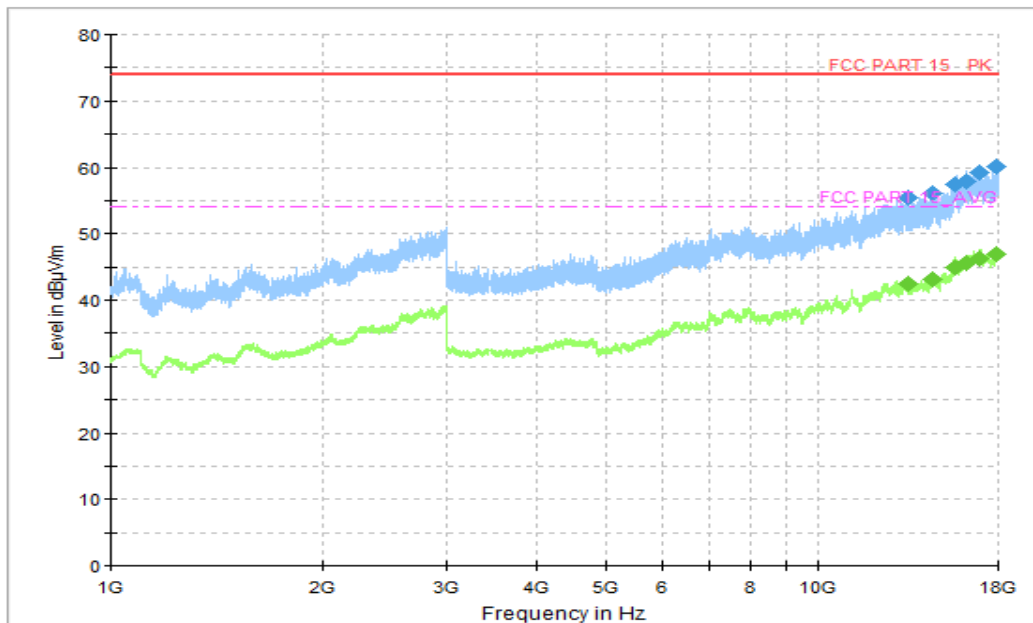


Figure A.10.1.44. Radiated Emission (Data Transfer: TF Card to PC, 1GHz to 18GHz)

**Final\_Results\_PK**

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
13383.500000	55.36	74.00	18.64	V	17	38.36
14560.250000	56.07	74.00	17.93	V	18	38.07
15620.000000	57.37	74.00	16.63	H	20	37.37
16251.000000	57.82	74.00	16.18	V	21	36.82
16978.750000	59.17	74.00	14.83	H	23	36.17
17898.000000	60.13	74.00	13.87	H	24	36.13

**Final\_Results\_AVG**

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
13383.500000	42.55	54.00	11.45	V	17	25.55
14560.250000	43.09	54.00	10.91	V	18	25.09
15620.000000	44.97	54.00	9.03	H	20	24.97
16251.000000	45.51	54.00	8.49	V	21	24.51
16978.750000	46.17	54.00	7.83	H	23	23.17
17898.000000	46.83	54.00	7.17	H	24	22.83



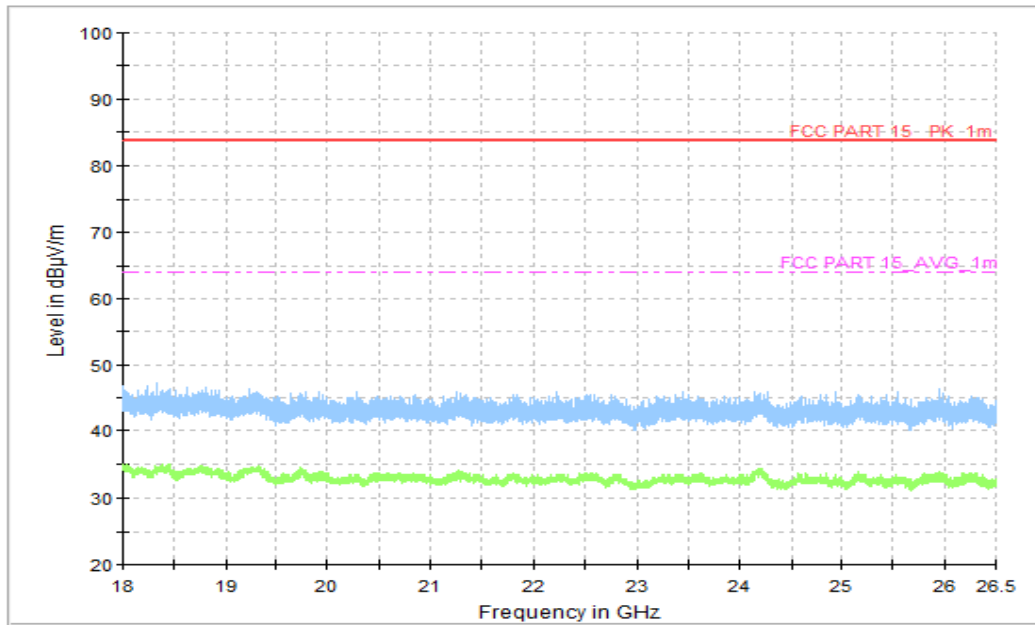


Figure A.10.1.45.Radiated Emission (Data Transfer: TF Card to PC,18GHz to 26.5GHz)



**A.10.2 Conducted Emission (§15.107(a))**

**Reference**

FCC: CFR Part 15.107(a)

**A.10.2.1 Method of measurement**

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 -2014, section 7.3.

**A.10.2.2 EUT Operating Mode:**

**FM receiver:** he EUT is connected to a charger for charging and open FM function. The EUT is synchronized to a FM signal generator. The EUT is keeping on demodulating the FM signal and outputting the audio signal through the headset.

**Camera:** At the beginning of measurement, the battery is completely discharged. The battery and charger are installed so that the EUT works well and keeping on taking photos.

**Video Player:** The EUT is connected to a charger for charging and keeping on playing mp3.


**Data Transfer:** The model of the PC is Lenovo ThinkPad T480, and the serial number of the PC is PF-13LW0C. The EUT is connected to a PC for transmitting data. The software is used to let the PC keep on copying data to MS or TF Card, reading and erasing the data after copy action was finished.

**A.10.2.3 Measurement Limit**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

**A.10.2.4 Test set-up:**

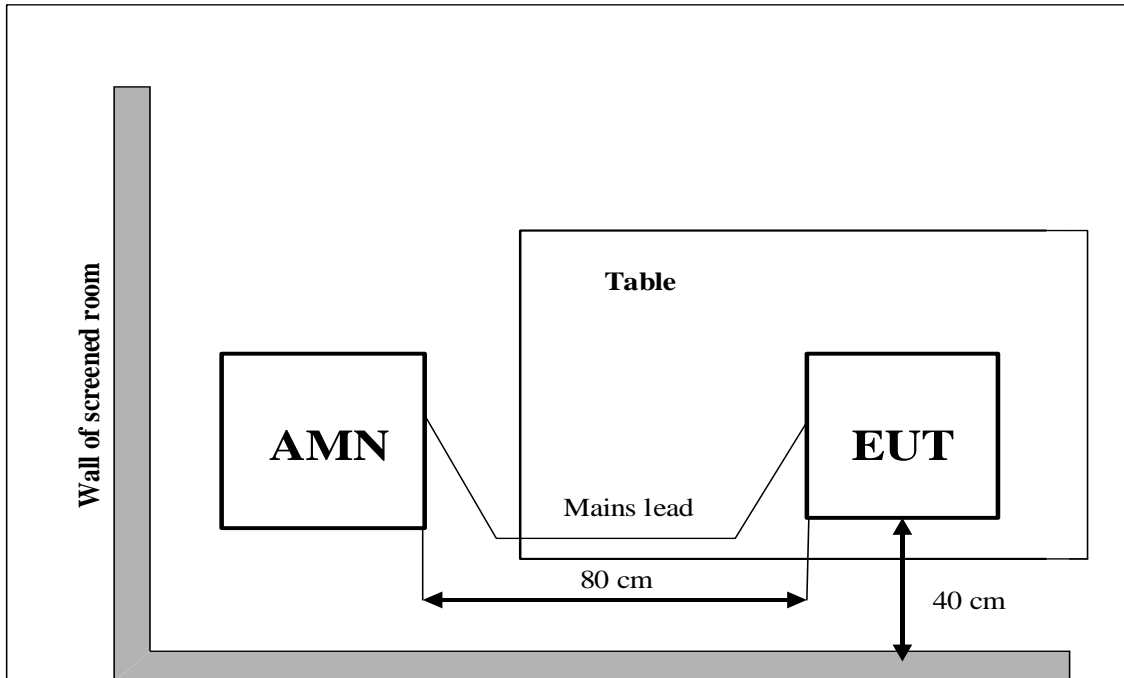

**A.10.2.5 Test Condition in charging mode**

Voltage (V)	Frequency (Hz)
120	60
240	60

RBW	Sweep Time(s)
9kHz	1

**A.10.2.6 Measurement Results**

$$\text{QuasiPeak(dB}\mu\text{V) /Average(dB}\mu\text{V) =PMea+Corr}$$

Where

Corr: PathLoss + Voltage Division Factor

PMea: Measurement result on receiver.

Camera

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.1.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Video Player

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.2.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Camera

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.2	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.3.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## FM receiver

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.4.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Data Transfer

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.3	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.5.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Data Transfer

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.4	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.6.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Camera

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT01aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.7.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Video Player

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT01aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.8.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Camera

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT01aa/Set.2	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.9.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## FM receiver

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT01aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.10.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Data Transfer

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.3	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.11.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Data Transfer

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			UT02aa/Set.4	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.10.2.12.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

AC Input Port/ Voltage: 120V/60Hz

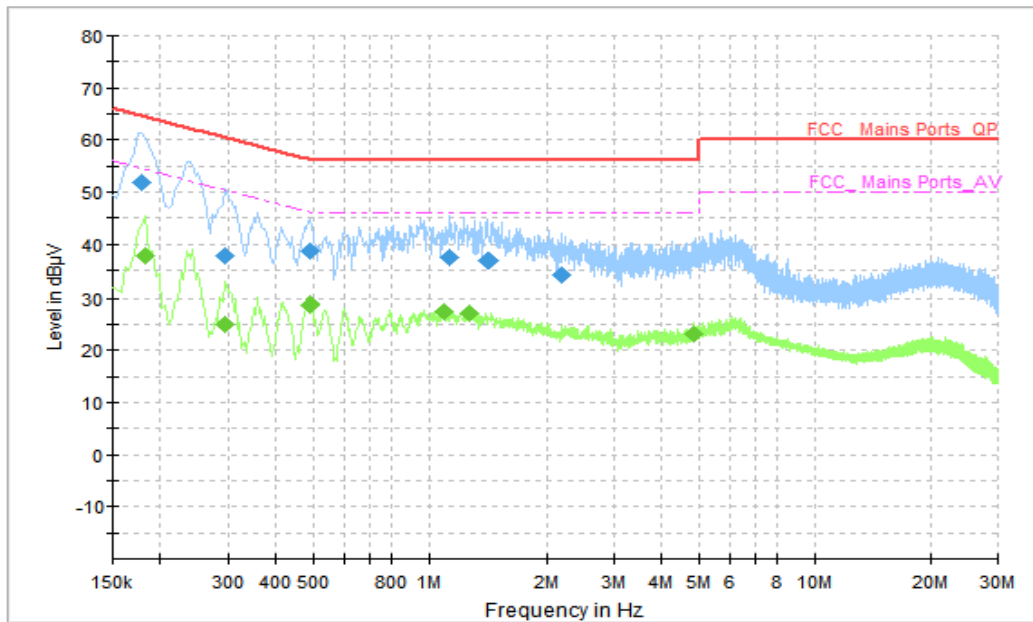


Figure A.10.2.1. Conducted Emission(Camera)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.178000	51.94	64.58	12.63	N	10	41.94
0.294000	37.88	60.41	22.53	N	10	27.88
0.490000	38.62	56.17	17.55	L1	10	28.62
1.134000	37.63	56.00	18.37	L1	10	27.63
1.414000	36.88	56.00	19.12	L1	10	26.88
2.190000	34.15	56.00	21.85	L1	10	24.15

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.182000	37.78	54.39	16.61	N	10	27.78
0.294000	24.93	50.41	25.48	N	10	14.93
0.490000	28.69	46.17	17.48	L1	10	18.69
1.090000	27.26	46.00	18.74	L1	10	17.26
1.274000	27.11	46.00	18.89	L1	10	17.11
4.826000	23.13	46.00	22.87	L1	10	13.13

AC Input Port/ Voltage: 120V/60Hz

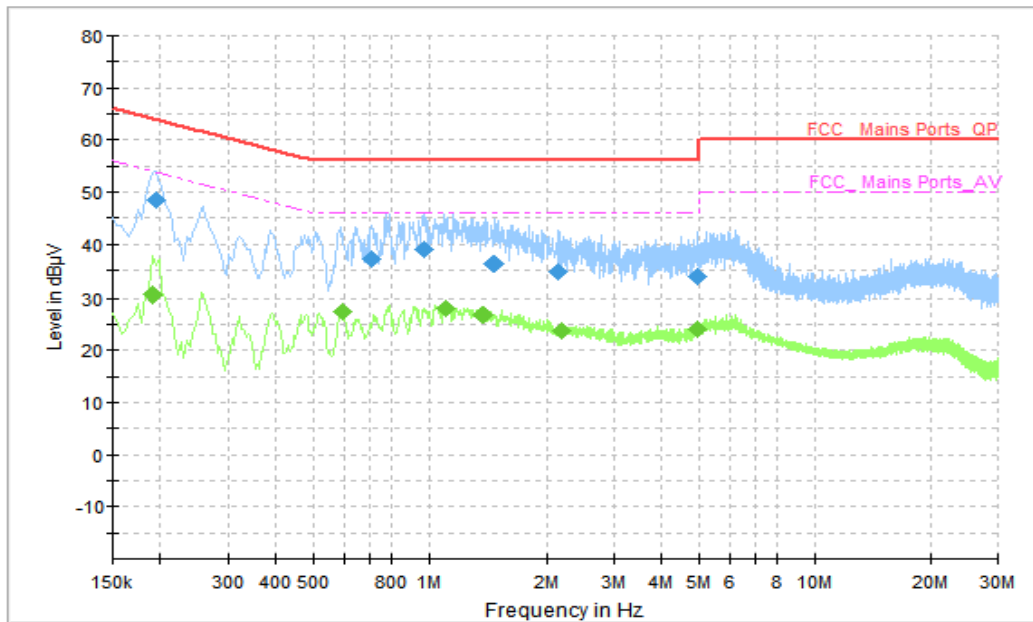


Figure A.10.2.2. Conducted Emission(Video Player)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.194000	48.38	63.86	15.49	N	10	38.38
0.710000	37.31	56.00	18.69	L1	10	27.31
0.966000	38.91	56.00	17.09	L1	10	28.91
1.462000	36.37	56.00	19.64	L1	10	26.37
2.154000	34.75	56.00	21.25	L1	10	24.75
4.962000	33.94	56.00	22.06	L1	10	23.94

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.190000	30.46	54.04	23.58	N	10	20.46
0.594000	27.52	46.00	18.48	L1	10	17.52
1.106000	27.98	46.00	18.02	L1	10	17.98
1.370000	26.91	46.00	19.09	L1	10	16.91
2.202000	23.83	46.00	22.17	L1	10	13.83
4.954000	24.10	46.00	21.90	L1	10	14.10



AC Input Port/ Voltage: 120V/60Hz

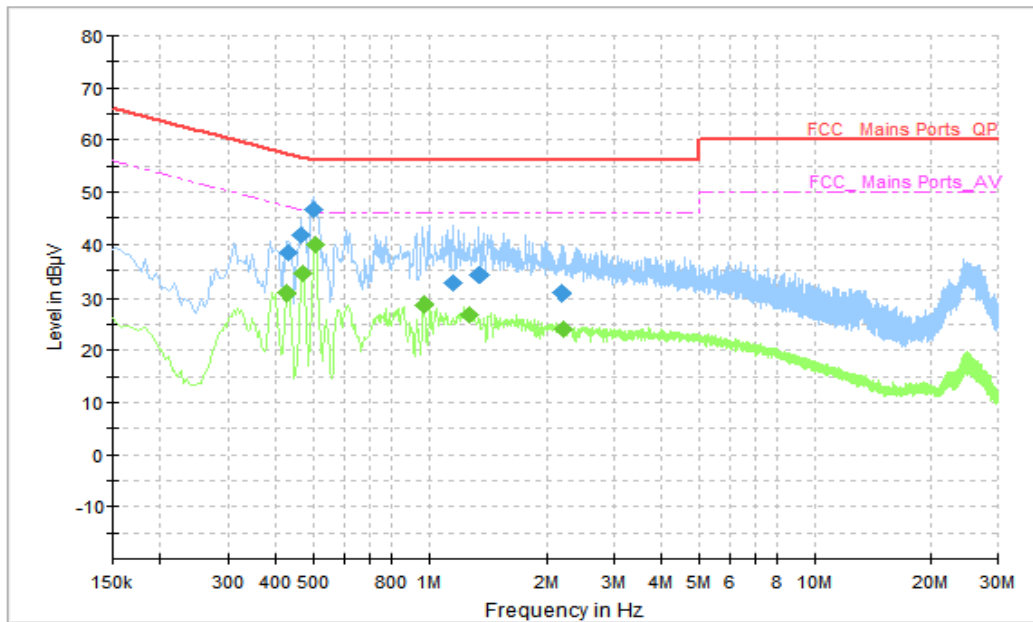


Figure A.10.2.3. Conducted Emission(Camera)

**Final\_Result\_QPK**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.430000	38.40	57.25	18.85	L1	10	28.40
0.502000	46.53	56.00	9.47	L1	10	36.53
1.158000	32.50	56.00	23.50	N	10	22.50
1.350000	34.09	56.00	21.91	N	10	24.09
2.186000	30.73	56.00	25.27	N	10	20.73
0.462000	41.90	56.50	14.60	N	10	31.90

**Final\_Result\_AVG**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.426000	30.90	47.33	16.43	L1	10	20.90
0.506000	39.90	46.00	6.10	L1	10	29.90
0.970000	28.55	46.00	17.45	L1	10	18.55
1.278000	26.92	46.00	19.08	L1	10	16.92
2.218000	24.04	46.00	21.96	L1	10	14.04
0.470000	34.46	46.50	12.04	L1	10	24.46

AC Input Port/ Voltage: 120V/60Hz

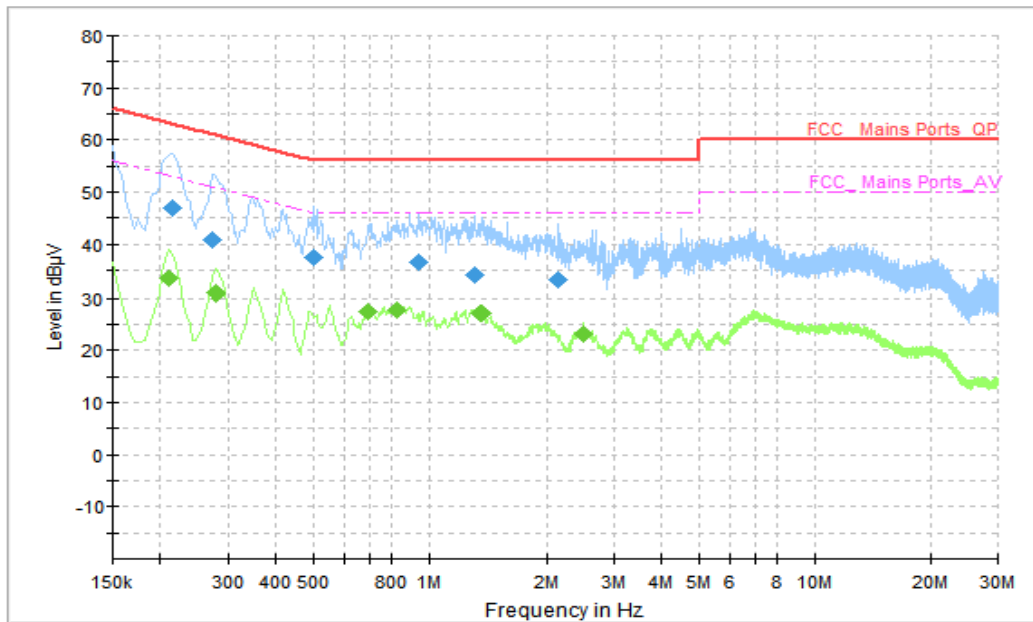


Figure A.10.2.4. Conducted Emission(FM receiver)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.214000	47.08	63.05	15.97	N	10	37.08
0.274000	40.93	61.00	20.07	N	10	30.93
0.498000	37.41	56.03	18.62	L1	10	27.41
0.942000	36.47	56.00	19.53	L1	10	26.47
1.318000	34.06	56.00	21.94	L1	10	24.06
2.138000	33.13	56.00	22.87	L1	10	23.13

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.210000	33.62	53.21	19.59	N	10	23.62
0.278000	30.64	50.88	20.23	N	10	20.64
0.694000	27.40	46.00	18.60	N	10	17.40
0.822000	27.69	46.00	18.31	N	10	17.69
1.362000	27.23	46.00	18.77	N	10	17.23
2.490000	23.02	46.00	22.98	N	10	13.02

AC Input Port/ Voltage: 120V/60Hz

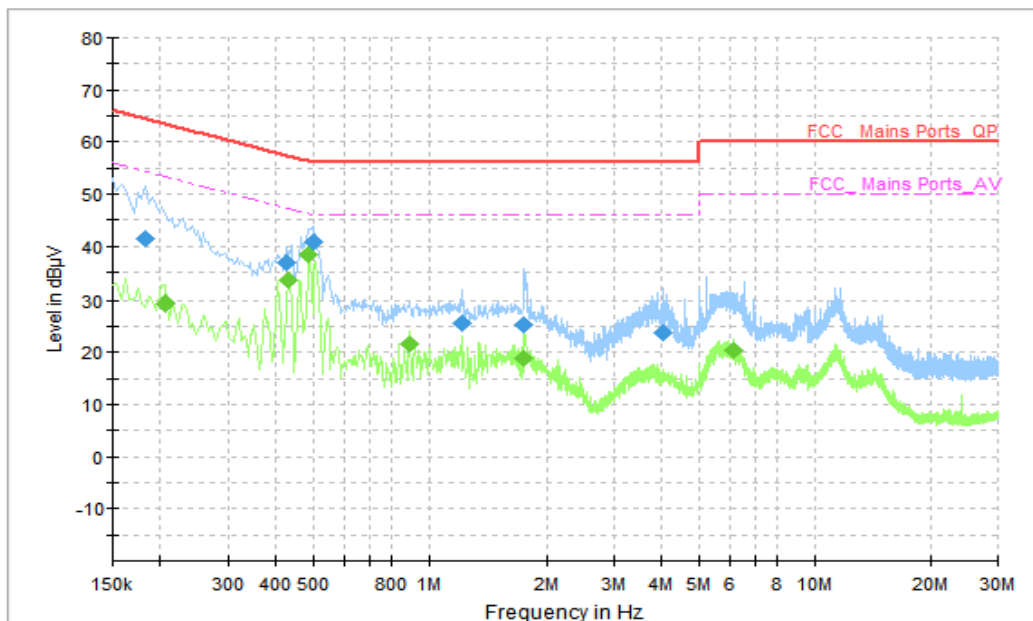


Figure A.10.2.5. Conducted Emission(Data Transfer)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.182000	41.43	64.39	22.97	L1	10	31.43
0.426000	37.03	57.33	20.30	L1	10	27.03
0.498000	40.75	56.03	15.28	L1	10	30.75
1.214000	25.46	56.00	30.54	L1	10	15.46
1.750000	25.37	56.00	30.63	L1	10	15.37
4.046000	23.70	56.00	32.30	L1	10	13.70

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.206000	29.33	53.37	24.03	L1	10	19.33
0.430000	33.58	47.25	13.68	L1	10	23.58
0.486000	38.26	46.24	7.97	N	10	28.26
0.890000	21.45	46.00	24.55	L1	10	11.45
1.754000	18.84	46.00	27.16	L1	10	8.84
6.142000	20.33	50.00	29.67	L1	10	10.33

AC Input Port/ Voltage: 120V/60Hz

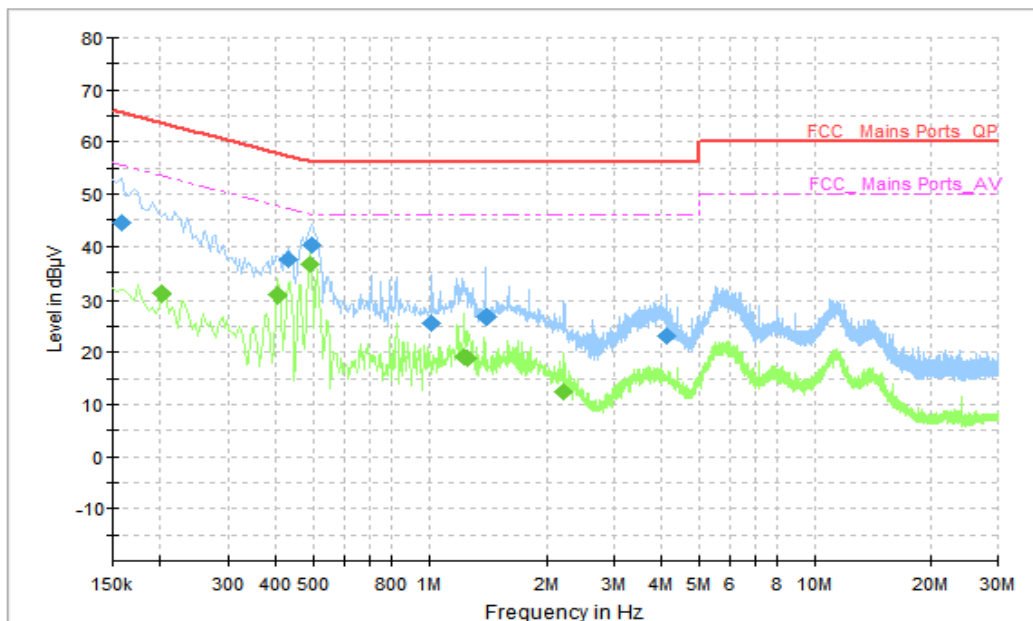


Figure A.10.2.6. Conducted Emission(Data Transfer)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.158000	44.65	65.57	20.91	L1	10	34.65
0.430000	37.55	57.25	19.70	L1	10	27.55
0.494000	40.32	56.10	15.78	L1	10	30.32
1.014000	25.54	56.00	30.46	L1	10	15.54
1.406000	26.80	56.00	29.20	L1	10	16.80
4.122000	23.05	56.00	32.95	L1	10	13.05

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.202000	31.10	53.53	22.43	L1	10	21.10
0.402000	30.83	47.81	16.98	L1	10	20.83
0.490000	36.63	46.17	9.53	N	10	26.63
1.234000	19.15	46.00	26.85	L1	10	9.15
1.258000	18.88	46.00	27.12	L1	10	8.88
2.226000	12.53	46.00	33.47	L1	10	2.53

AC Input Port/ Voltage: 240V/60Hz

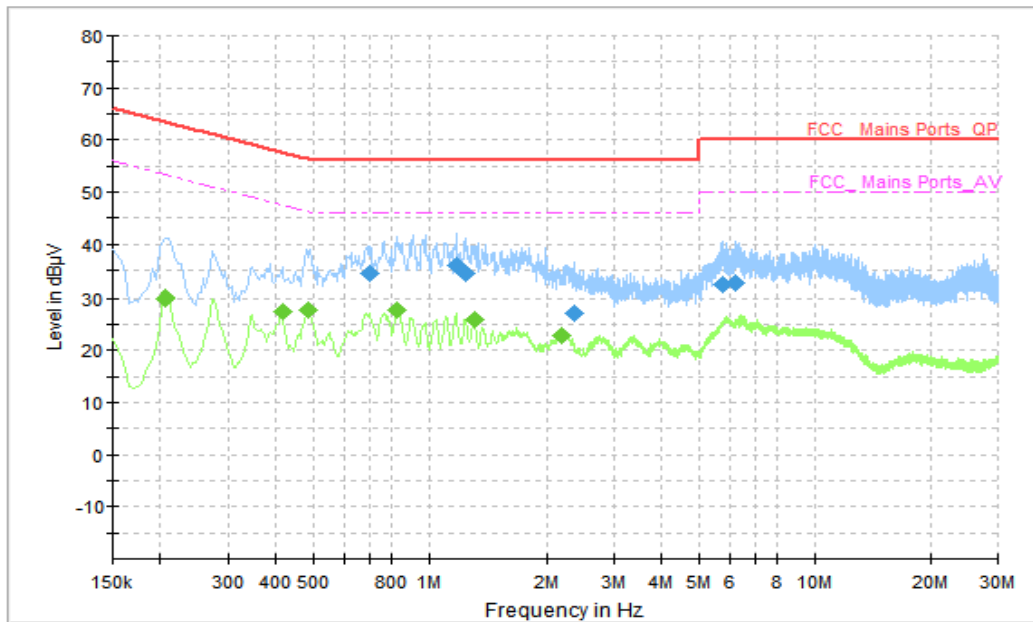


Figure A.10.2.7. Conducted Emission(Camera)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.698000	34.40	56.00	21.60	N	10	24.40
1.178000	35.88	56.00	20.12	N	10	25.88
1.250000	34.44	56.00	21.56	N	10	24.44
2.358000	27.01	56.00	28.99	L1	10	17.01
5.778000	32.36	60.00	27.64	N	10	22.36
6.222000	32.66	60.00	27.34	N	10	22.66

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.206000	29.90	53.37	23.47	N	10	19.90
0.414000	27.43	47.57	20.14	N	10	17.43
0.482000	27.85	46.31	18.46	N	10	17.85
0.826000	27.67	46.00	18.33	N	10	17.67
1.310000	25.83	46.00	20.17	N	10	15.83
2.198000	22.93	46.00	23.07	N	10	12.93

AC Input Port/ Voltage: 240V/60Hz

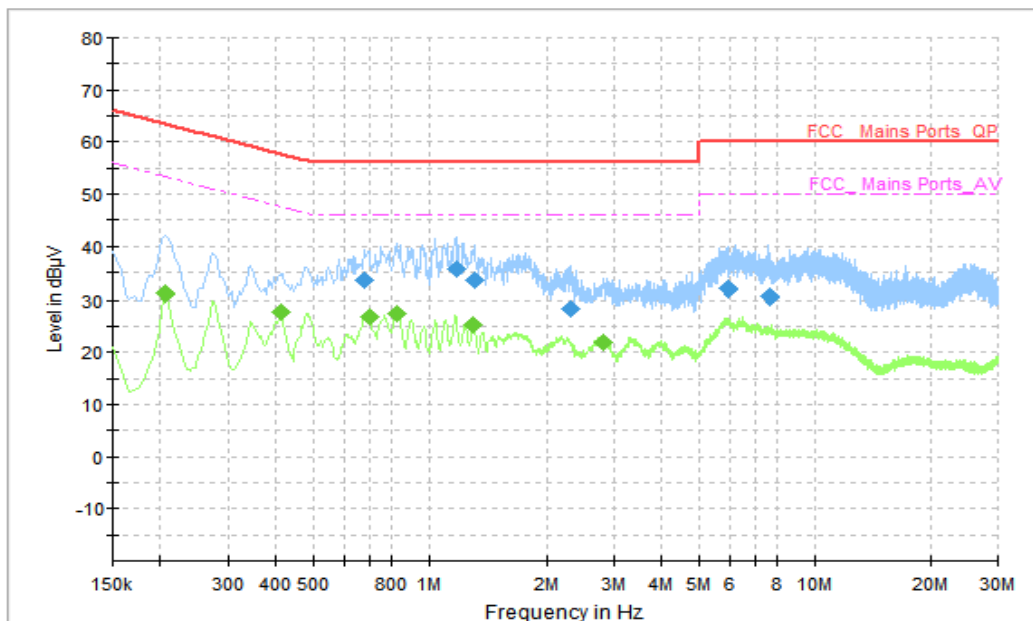


Figure A.10.2.8. Conducted Emission(Video Player)

**Final\_Result\_QPK**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.678000	33.56	56.00	22.44	N	10	23.56
1.174000	35.71	56.00	20.29	N	10	25.71
1.314000	33.51	56.00	22.49	N	10	23.51
2.326000	28.39	56.00	27.61	N	10	18.39
5.974000	31.96	60.00	28.04	N	10	21.96
7.626000	30.37	60.00	29.63	N	10	20.37

**Final\_Result\_AVG**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.206000	31.14	53.37	22.23	N	10	21.14
0.410000	27.58	47.65	20.07	N	10	17.58
0.698000	26.74	46.00	19.26	N	10	16.74
0.822000	27.45	46.00	18.55	N	10	17.45
1.306000	25.35	46.00	20.65	N	10	15.35
2.806000	21.84	46.00	24.16	N	10	11.84

AC Input Port/ Voltage: 240V/60Hz

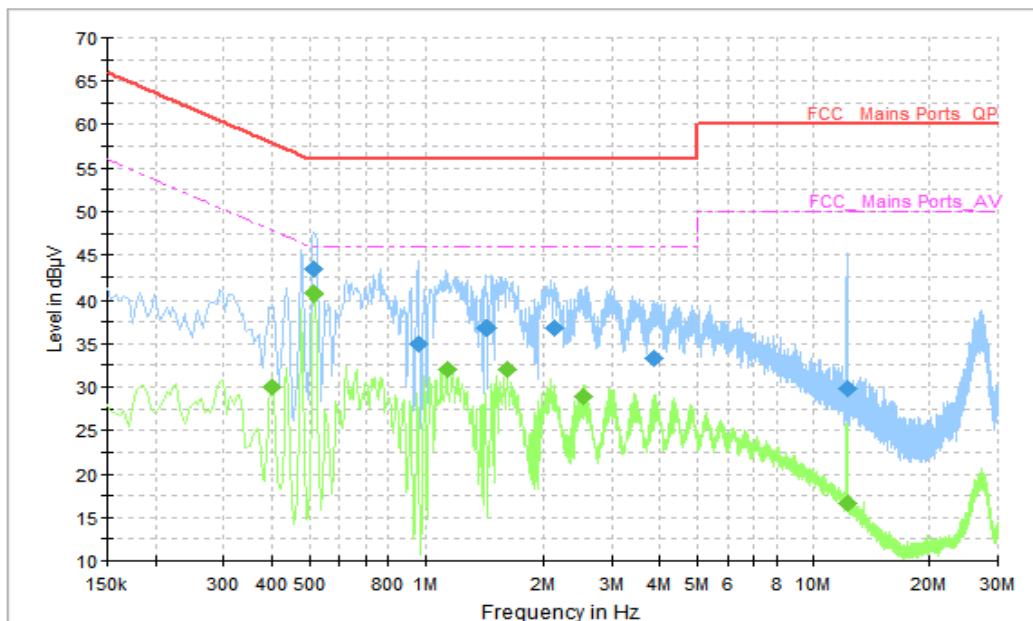


Figure A.10.2.9. Conducted Emission(Camera)

**Final\_Result\_QPK**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.514000	43.36	56.00	12.64	L1	10	33.36
0.958000	35.01	56.00	20.99	L1	10	25.01
1.438000	36.78	56.00	20.22	L1	10	26.78
2.138000	36.78	56.00	19.22	N	10	26.78
3.874000	33.36	56.00	22.64	N	10	23.36
12.302000	29.86	60.00	30.14	N	10	19.86

**Final\_Result\_AVG**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.402000	29.98	47.81	17.83	N	10	19.98
0.514000	40.62	46.00	5.38	N	10	30.62
1.138000	32.08	46.00	13.92	N	10	22.08
1.610000	31.95	46.00	14.05	N	10	21.95
2.522000	28.82	46.00	17.18	N	10	18.82
12.302000	16.56	50.00	33.44	N	10	6.56

AC Input Port/ Voltage: 240V/60Hz

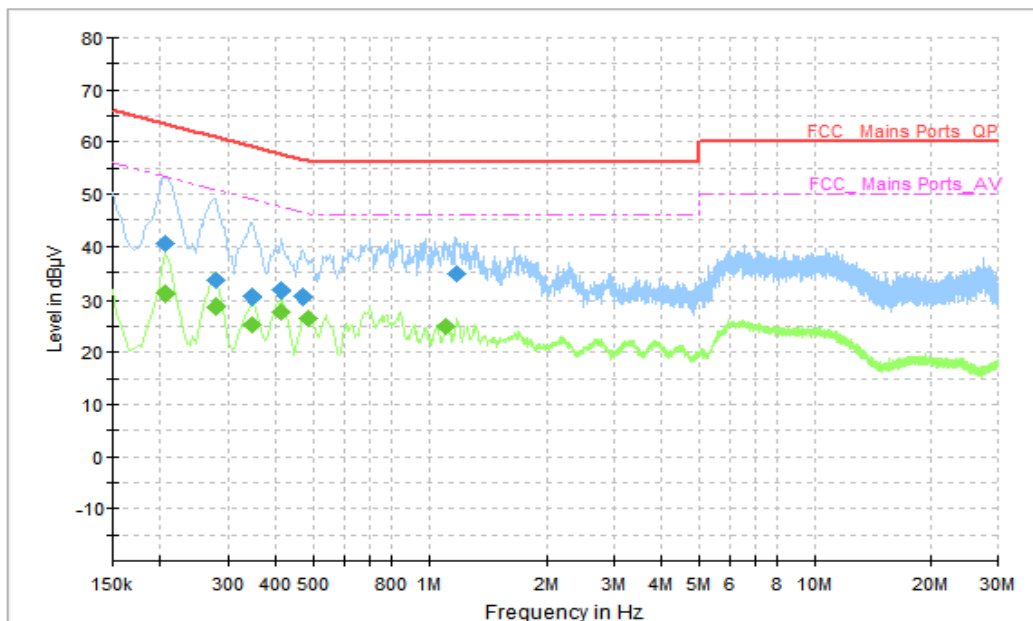


Figure A.10.2.10. Conducted Emission(FM receiver)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.206000	40.50	63.37	22.87	N	10	30.50
0.278000	33.49	60.88	27.39	N	10	23.49
0.346000	30.40	59.06	28.66	N	10	20.40
0.410000	31.65	57.65	26.00	N	10	21.65
0.470000	30.44	56.51	26.08	N	10	20.44
1.182000	34.86	56.00	21.14	N	10	24.86

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.206000	30.99	53.37	22.37	N	10	20.99
0.278000	28.64	50.88	22.23	N	10	18.64
0.346000	25.40	49.06	23.66	N	10	15.40
0.410000	27.74	47.65	19.91	N	10	17.74
0.486000	26.58	46.24	19.66	N	10	16.58
1.110000	24.91	46.00	21.09	N	10	14.91



AC Input Port/ Voltage: 240V/60Hz

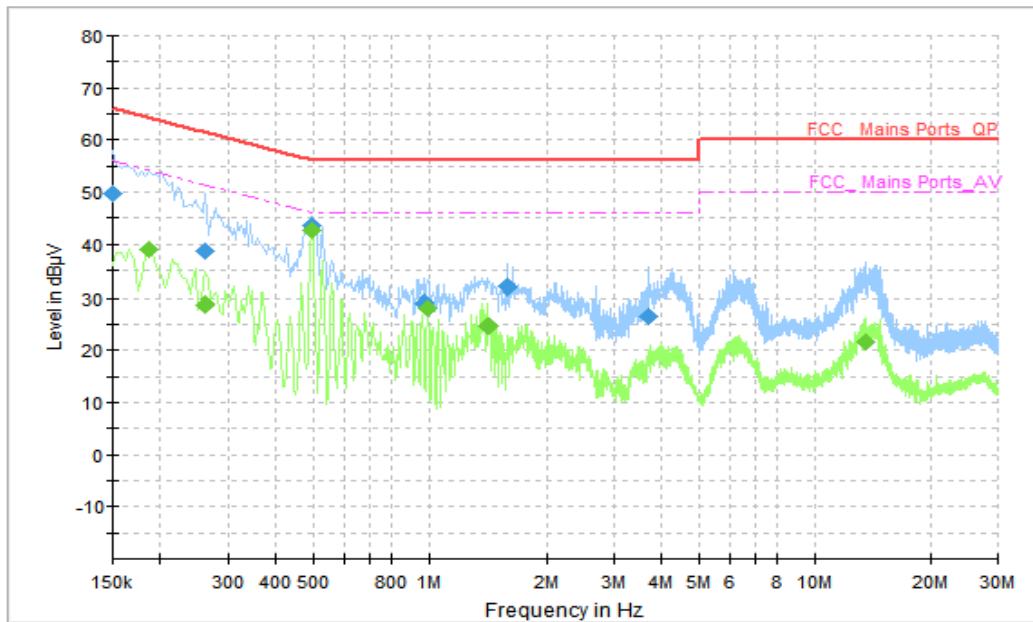


Figure A.10.2.11. Conducted Emission(Data Transfer)

**Final\_Result\_QPK**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.150000	49.82	66.00	16.18	N	10	39.82
0.262000	38.81	61.37	22.56	N	10	28.81
0.494000	43.71	56.10	12.39	L1	10	33.71
0.970000	29.06	56.00	26.94	L1	10	19.06
1.582000	31.86	56.00	24.14	L1	10	21.86
3.686000	26.59	56.00	29.41	L1	10	16.59

**Final\_Result\_AVG**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.186000	39.09	54.21	15.12	L1	10	29.09
0.262000	28.65	51.37	22.72	L1	10	18.65
0.494000	42.57	46.10	3.54	L1	10	32.57
0.990000	27.86	46.00	18.14	L1	10	17.86
1.418000	24.56	46.00	21.44	L1	10	14.56
13.534000	21.66	50.00	28.34	N	10	11.66

AC Input Port/ Voltage: 240V/60Hz

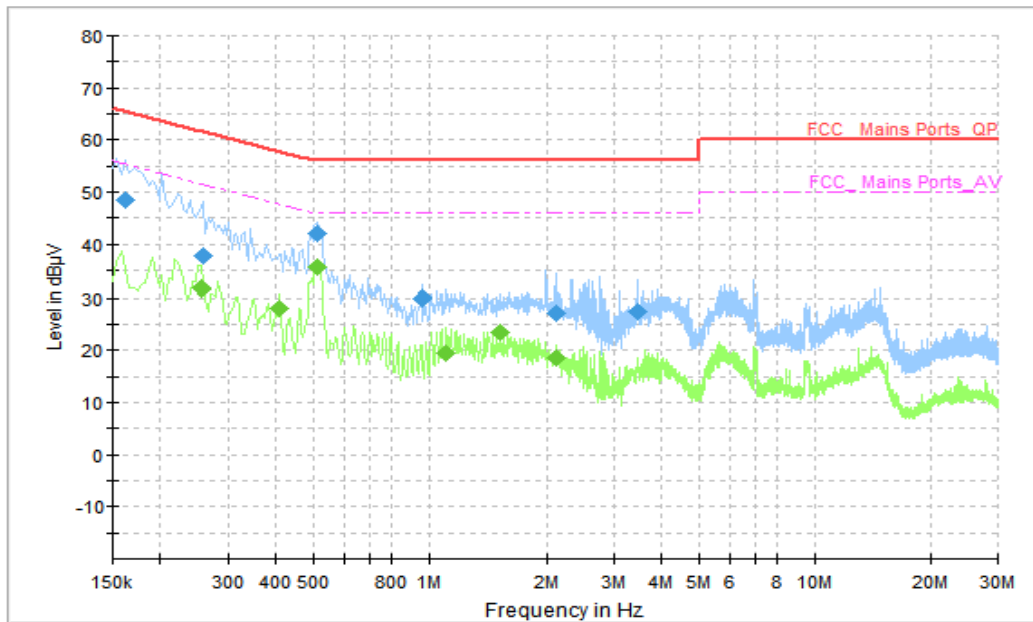


Figure A.10.2.12. Conducted Emission(Data Transfer)

Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.162000	48.43	65.36	16.93	N	10	38.43
0.258000	37.92	61.50	23.57	N	10	27.92
0.514000	42.12	56.00	13.88	L1	10	22.12
0.958000	29.95	56.00	26.05	L1	10	19.95
3.462000	27.35	56.00	28.65	N	10	17.35
2.126000	27.05	56.00	28.95	L1	10	17.05

Final\_Result\_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.254000	31.64	51.63	19.98	L1	10	21.64
0.406000	27.98	47.73	19.75	L1	10	9.98
0.510000	35.61	46.00	10.39	L1	10	5.61
1.110000	19.53	46.00	26.47	L1	10	9.53
1.518000	23.43	46.00	22.57	L1	10	13.43
2.126000	18.60	46.00	27.40	L1	10	8.60

\*\*\*END OF REPORT\*\*\*