



# TEST REPORT

No. I21N03609-BT

for

**TCL Communication Ltd.**

**GSM Quad Band Mobile Phone**

**Model Name: 1068D,1068X**

with

**Hardware Version: PIO**

**Software Version: V1.0**

**FCC ID: 2ACCJB168**

**Issued Date: 2022-01-13**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



## **CONTENTS**

<b>CONTENTS</b> .....	<b>2</b>
<b>1. SUMMARY OF TEST REPORT</b> .....	<b>3</b>
1.1. TEST ITEMS.....	3
1.2. TEST STANDARDS.....	3
1.3. TEST RESULT.....	3
1.4. TESTING LOCATION.....	3
1.5. PROJECT DATA.....	3
1.6. SIGNATURE.....	3
<b>2. CLIENT INFORMATION</b> .....	<b>4</b>
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> .....	<b>5</b>
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION.....	6
<b>4. REFERENCE DOCUMENTS</b> .....	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. TEST RESULTS</b> .....	<b>8</b>
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS.....	8
5.3. STATEMENTS.....	8
<b>6. TEST EQUIPMENTS UTILIZED</b> .....	<b>9</b>
<b>7. LABORATORY ENVIRONMENT</b> .....	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY</b> .....	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS</b> .....	<b>12</b>
TEST CONFIGURATION.....	12
A.0 ANTENNA REQUIREMENT.....	15
A.1 MAXIMUM PEAK OUTPUT POWER.....	16
A.2 BAND EDGES COMPLIANCE.....	17
A.3 CONDUCTED EMISSION.....	24
A.4 RADIATED EMISSION.....	35
A.5 20dB BANDWIDTH.....	53
A.6 TIME OF OCCUPANCY (DWELL TIME).....	59
A.7 NUMBER OF HOPPING CHANNELS.....	63
A.8 CARRIER FREQUENCY SEPARATION.....	67
A.9 AC POWER LINE CONDUCTED EMISSION.....	69



## **1. Summary of Test Report**

### **1.1. Test Items**

Product Name	GSM Quad Band Mobile Phone
Model Name	1068D,1068X
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

### **1.2. Test Standards**

FCC Part15-2019; ANSI C63.10-2013

### **1.3. Test Result**

#### **Pass**

Please refer to "5.2.Test Results"

### **1.4. Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,  
Futian District, Shenzhen, Guangdong, P. R. China

### **1.5. Project data**

Testing Start Date:	2021-12-07
Testing End Date:	2022-01-11

### **1.6. Signature**

---

**Lin Zechuang**  
**(Prepared this test report)**

---

**An Ran**  
**(Reviewed this test report)**

---

**Zhang Bojun**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person: Peter yang  
E-Mail: peter.yang@tcl.com  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person: Peter yang  
E-Mail: peter.yang@tcl.com  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Product Name	GSM Quad Band Mobile Phone
Model Name	1068D,1068X
Frequency Band	2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated
Antenna Gain	-1.28dBi
Power Supply	3.8V DC by Battery
FCC ID	2ACCJB168
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Receive Date</b>
UT04aa	358894690000637	PIO	V1.0	2021-12-03
UT09aa	358894690000595	PIO	V1.0	2021-12-08

\*EUT ID: is used to identify the test sample in the lab internally.

UT04aa is used for conduction test, UT09aa is used for radiation test and AC Power line Conducted Emission test.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>AE ID*</b>
AE1	Battery	/
AE2	Charger	CBA0066AGAC5, CBA0058AGAC5
AE3	Date Cable	/



AE1

Model	TLi009AA
Manufacturer	TIANMAO
Capacity	950mAh
Nominal Voltage	3.7V

AE2

Model	PA-5V550mA-005, UC11US
Manufacturer	PUAN

AE3

Model	CDA3122005C2, CDA3122005C1
Manufacturer	SHENGHUA, JUWEI

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment under Test (EUT) is a model of GSM Quad Band Mobile Phone with Integrated antenna and battery.

It consists of normal options: Lithium Battery Charger and Date Cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

The test sample in this report is 1068D.1068X is a variant product of 1068D,  
1068D: Dual SIM,1068X: Single SIM.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



## 5. Test Results

### 5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

### 5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Band Edges Compliance	15.247 (d)	P
3	Conducted Spurious Emission	15.247 (d)	P
4	Radiated Spurious Emission	15.247,15.205,15.209	P
5	Occupied 20dB bandwidth	15.247(a)	/
6	Time of Occupancy(Dwell Time)	15.247(a)	P
7	Number of Hopping Channel	15.247(a)	P
8	Carrier Frequency Separation	15.247(a)	P
9	AC Power line Conducted Emission	15.107,15.207	P

See **ANNEX A** for details.

### 5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.



## 6. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2022-12-29	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2022-12-29	1 year
3	Data Acquisition	U2531A	TW55443507	Keysight	/	/
4	RF Control Unit	JS0806-2	21C8060398	Tonscend	2022-05-09	1 year
5	Wireless Connective Tester	CMW270	100540	Rohde & Schwarz	2022-03-14	1 year
6	Test Receiver	ESCI	100701	Rohde & Schwarz	2022-08-08	1 year
7	LISN	ENV216	102067	Rohde & Schwarz	2022-07-15	1 year

### Radiated test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2022-04-25	3 years
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2022-04-02	3 years
4	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2023-01-06	3 years
5	Horn Antenna	QSH-SL-8-26-40-K-20	17014	Q-par	2023-01-06	3 years
6	Test Receiver	ESR7	101676	Rohde & Schwarz	2022-11-24	1 year
7	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2022-01-13	1 year
8	Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years

### Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

### Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

## 7. Laboratory Environment

### Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz

### Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

### Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



**8. Measurement Uncertainty**

Test Name	Uncertainty ( $k=2$ )	
1. Maximum Peak Output Power	1.32dB	
2. Band Edges Compliance	1.92dB	
3. Transmitter Spurious Emission - Conducted	30MHz≤f<1GHz	1.41dB
	1GHz≤f<7GHz	1.92dB
	7GHz≤f<13GHz	2.31dB
	13GHz≤f≤26GHz	2.61dB
4.. Transmitter Spurious Emission - Radiated	9kHz≤f<30MHz	1.79dB
	30MHz≤f<1GHz	4.86dB
	1GHz≤f<18GHz	4.82dB
	18GHz≤f≤40GHz	2.90dB
5. 20dB Bandwidth	66Hz	
6. Time of Occupancy (Dwell Time) & Number of Hopping Channels	0.58ms	
7. Carrier Frequency Separation	66Hz	
8. AC Power line Conducted Emission	150kHz≤f≤30MHz	2.62dB


## ANNEX A: Detailed Test Results

### Test Configuration

The measurement is made according to ANSI C63.10.

#### 1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the EUT hopping mode (hopping on or hopping off).
5. Set the spectrum analyzer to start measurement.
6. Record the values.

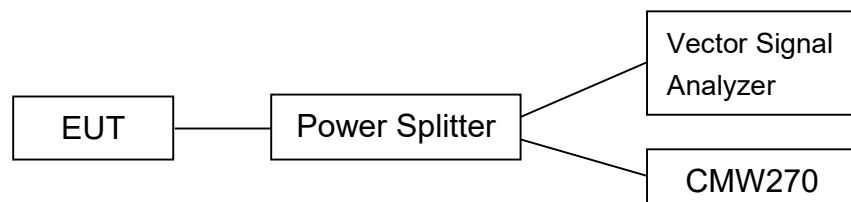


#### 2) Radiated Measurements

##### Test setup:


##### 9kHz-30MHz:

The EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

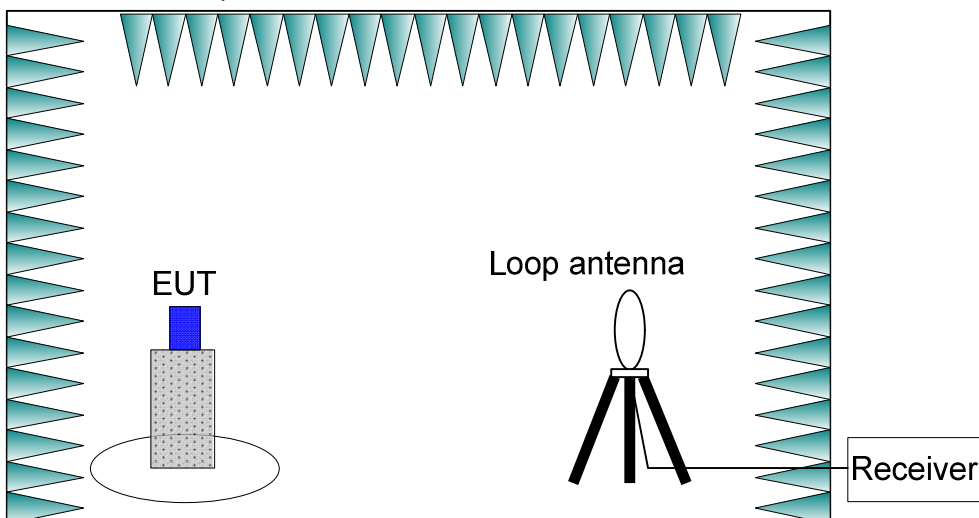

**30MHz-1GHz:**


The EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1.0 meter to 4.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

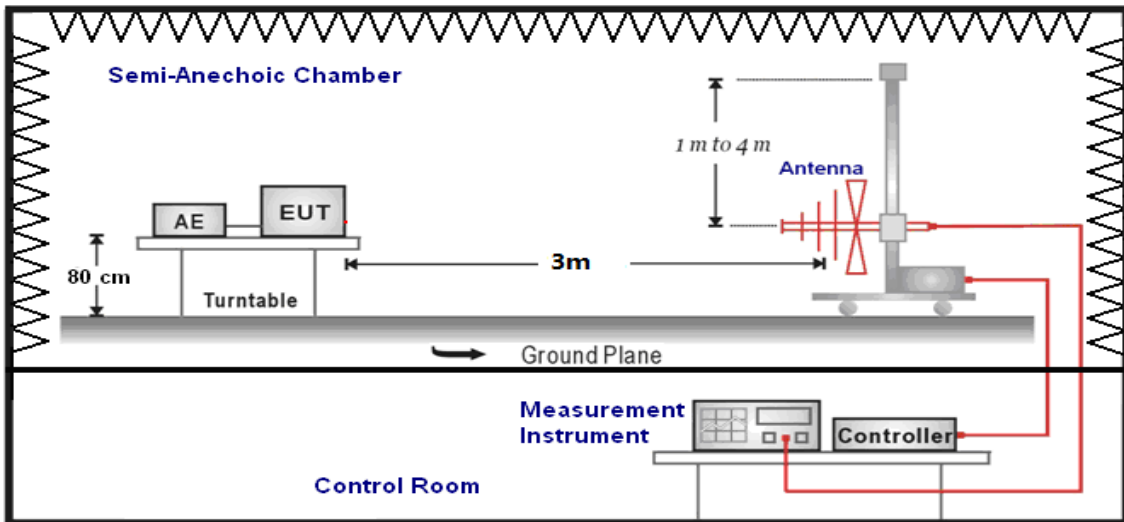


**Above 1GHz:**

EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the receive antenna. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiving antenna polarization.

**1GHz-3GHz:**

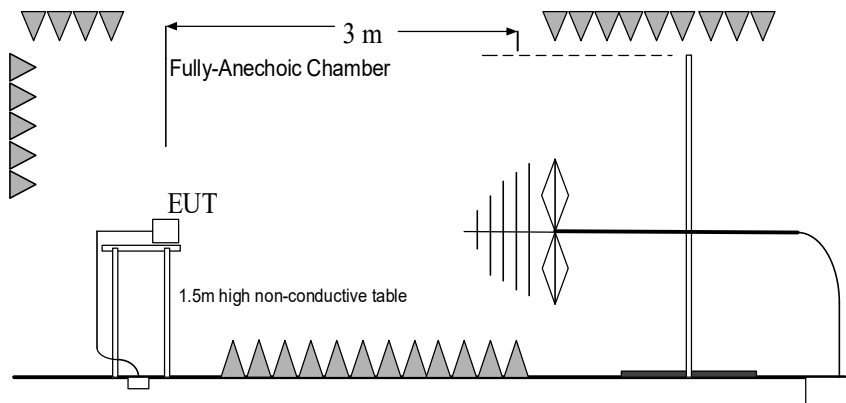


**3GHz-40GHz:**

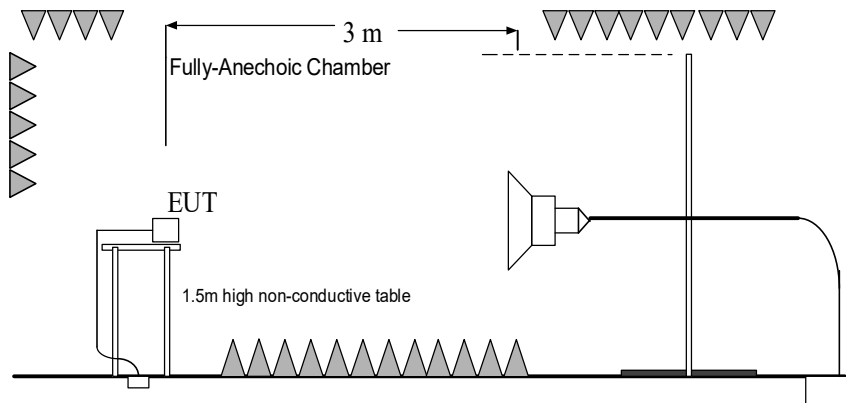

**3) AC Power line Conducted Emission Measurement**

The EUT is working as Bluetooth terminal. A communication link of Bluetooth is set up with a System Simulator (SS). The EUT is commanded to operate at maximum transmitting power.

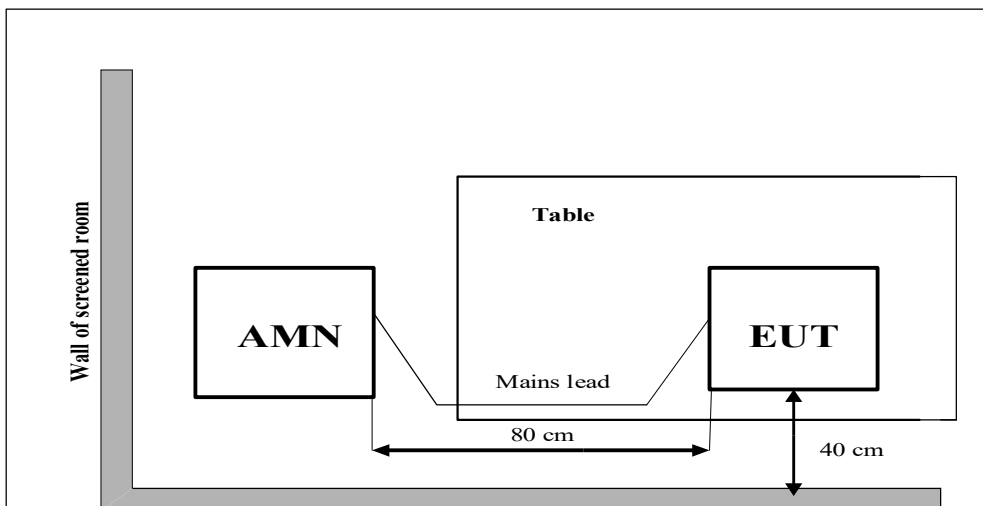



### A.0 Antenna requirement

**Measurement Limit:**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -1.28dBi.  
The RF transmitter uses an integrate antenna without connector.**



### A.1 Maximum Peak Output Power

**Method of Measurement: See ANSI C63.10-clause 7.8.5.**

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**Measurement Results:**

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	5.97	6.04	6.41
$\pi/4$ DQPSK	4.81	5.01	5.24
8DPSK	5.12	5.33	5.66

**Conclusion: Pass**





### A.2 Band Edges Compliance

Method of Measurement: See ANSI C63.10-clause 7.8.6.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.1	P
	78	OFF	Fig.2	P
	0	ON	Fig.3	P
	78	ON	Fig.4	P
$\pi/4$ DQPSK	0	OFF	Fig.5	P
	78	OFF	Fig.6	P
	0	ON	Fig.7	P
	78	ON	Fig.8	P
8DPSK	0	OFF	Fig.9	P
	78	OFF	Fig.10	P
	0	ON	Fig.11	P
	78	ON	Fig.12	P

See below for test graphs.

Conclusion: Pass

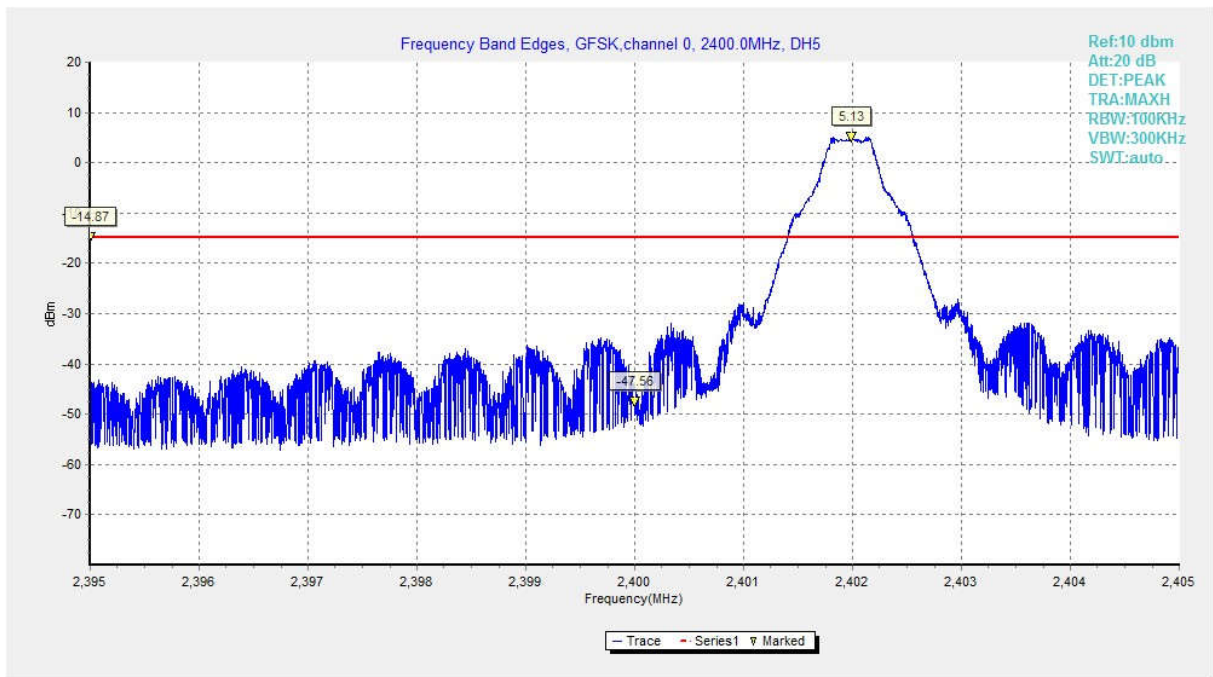


Fig. 1 Band Edges (GFSK, CH0, Hopping OFF)

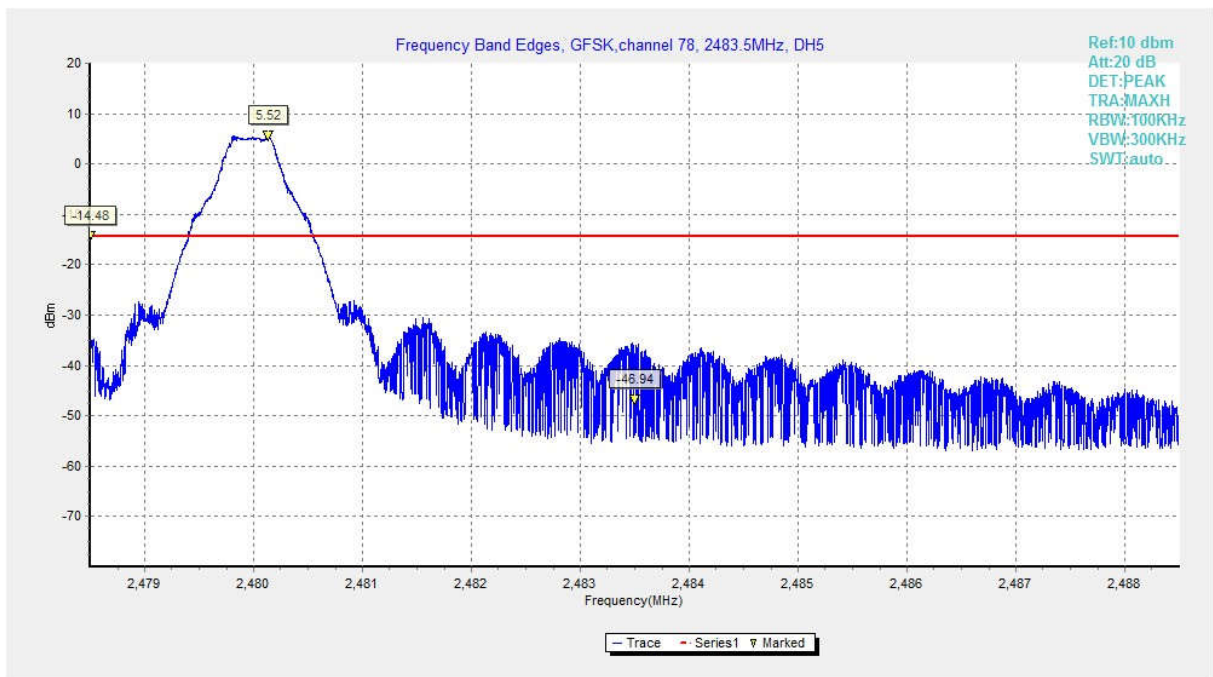


Fig. 2 Band Edges (GFSK, CH78, Hopping OFF)

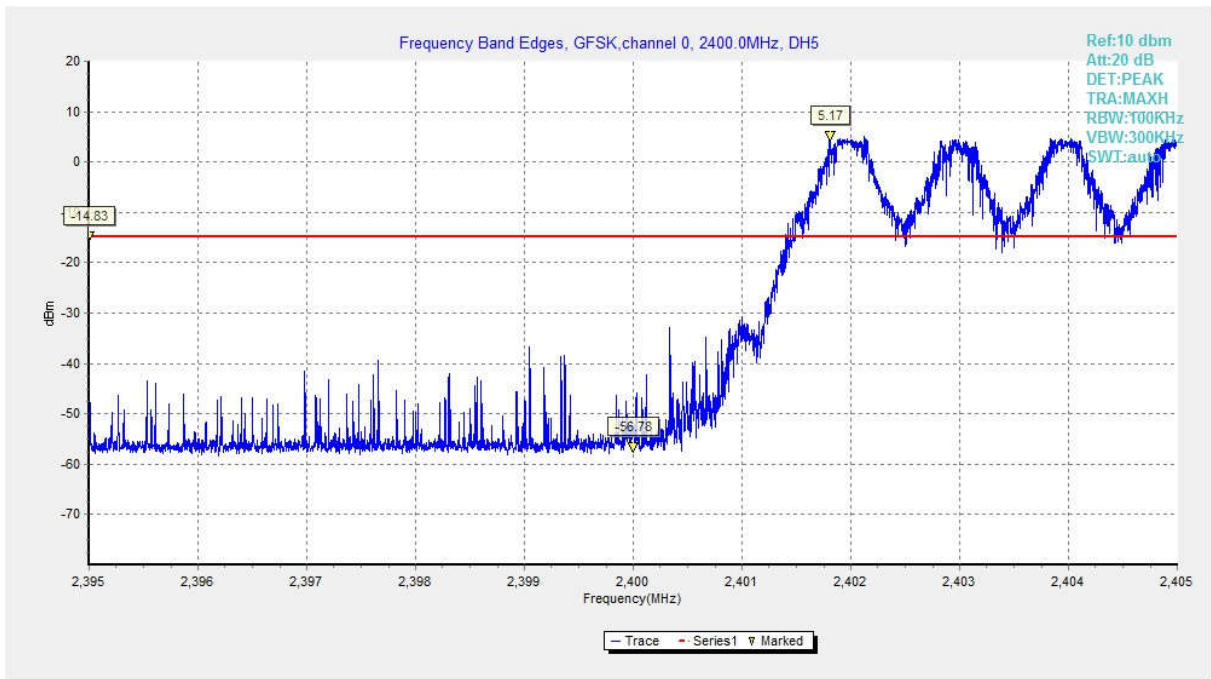


Fig. 3 Band Edges (GFSK, CH0, Hopping ON)



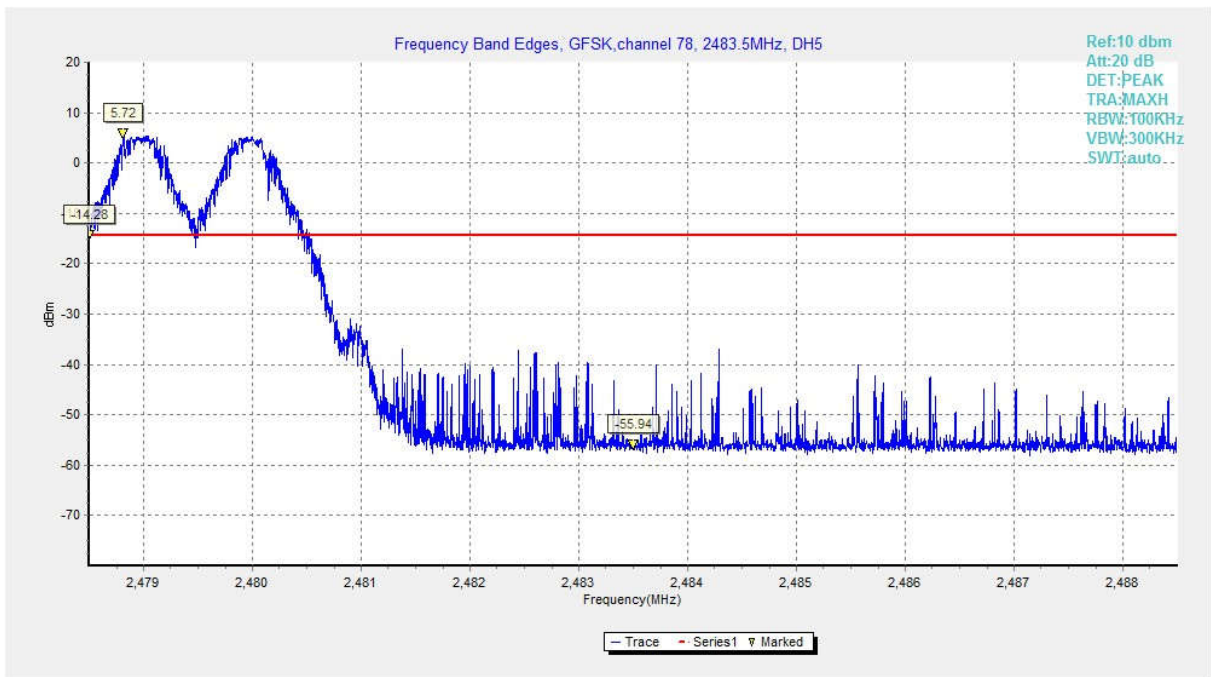


Fig. 4 Band Edges (GFSK, CH78, Hopping ON)

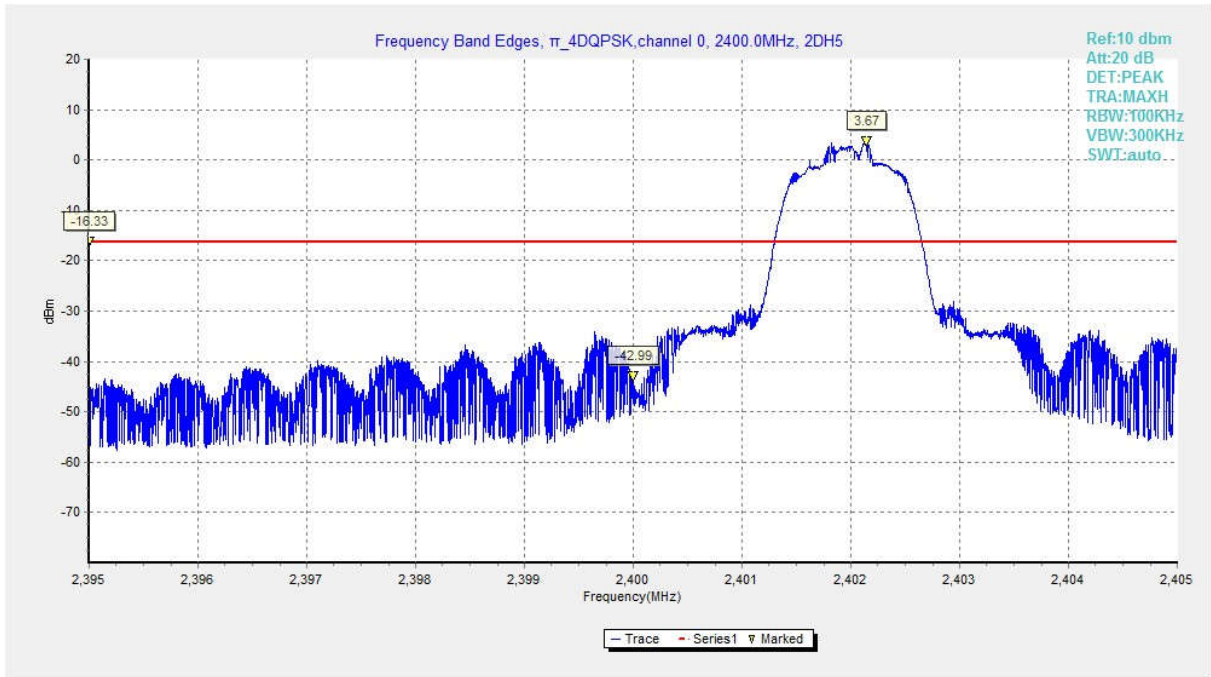

**Fig. 5 Band Edges ( $\pi/4$  DQPSK, CH0, Hopping OFF)**

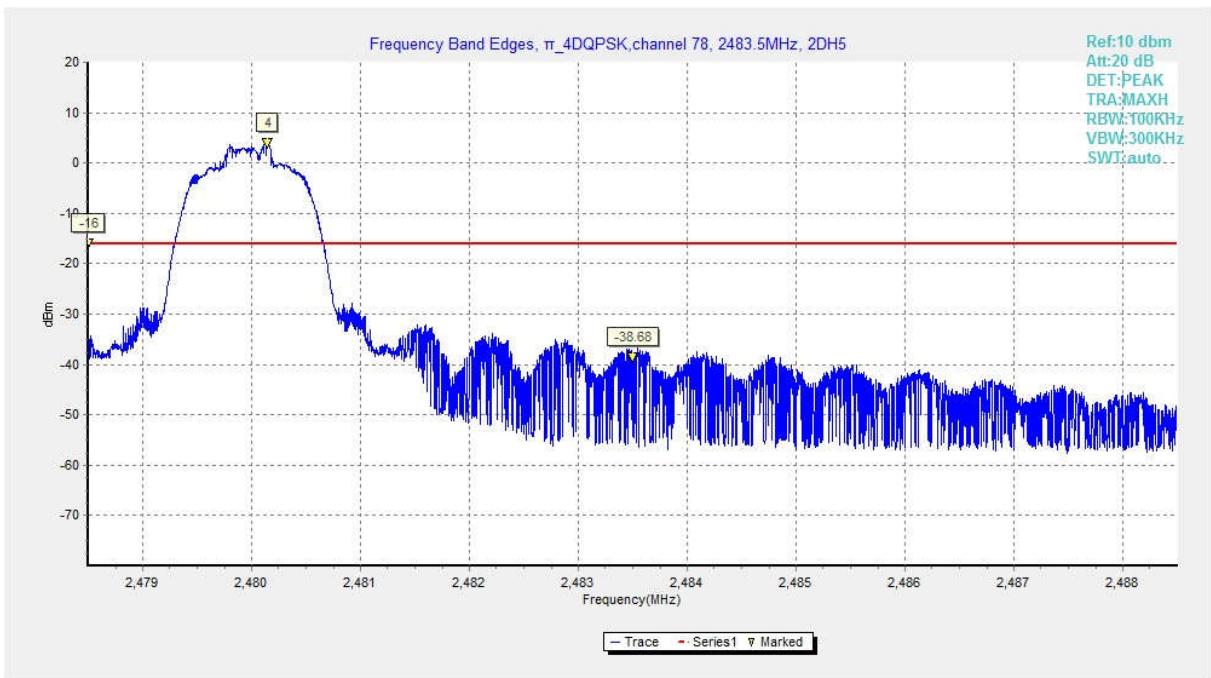

**Fig. 6 Band Edges ( $\pi/4$  DQPSK, CH78, Hopping OFF)**

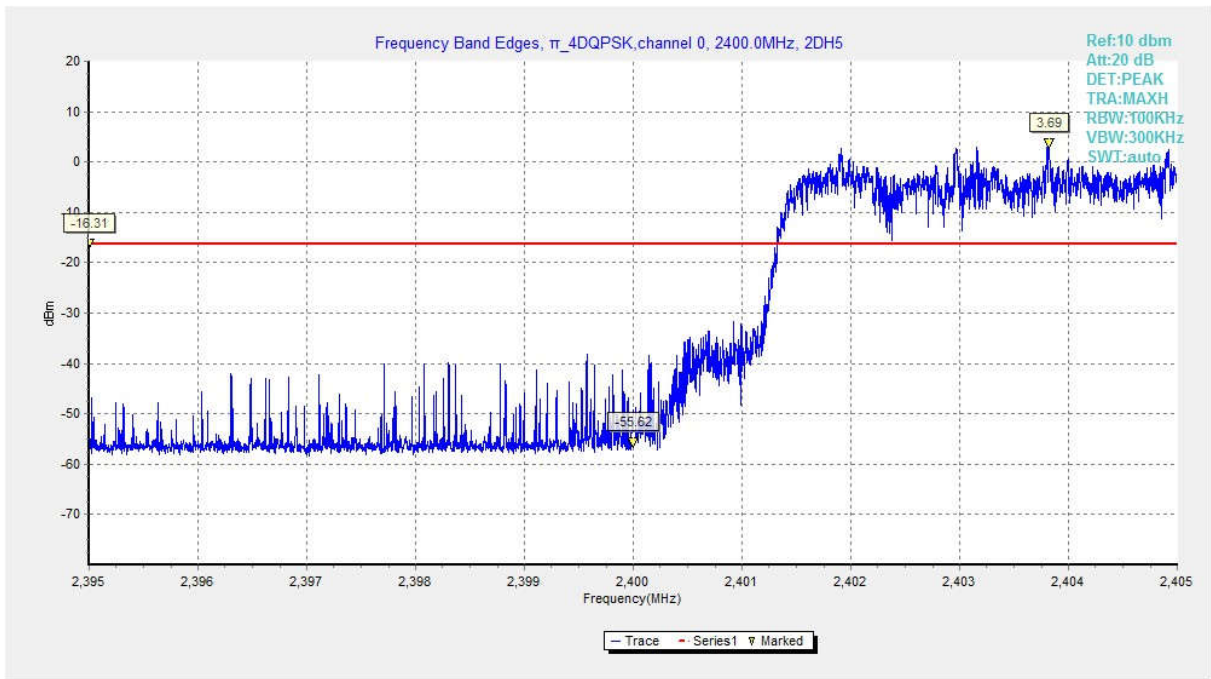


Fig. 7 Band Edges ( $\pi/4$  DQPSK, CH0, Hopping ON)



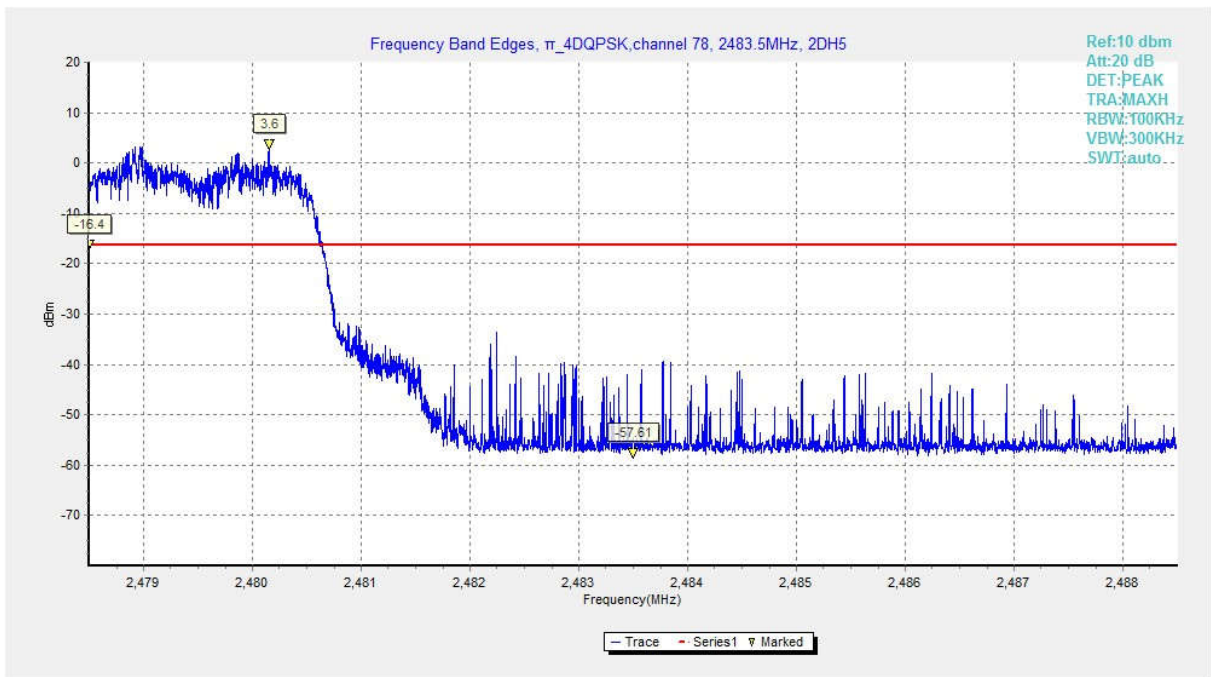


Fig. 8 Band Edges ( $\pi/4$  DQPSK, CH78, Hopping ON)




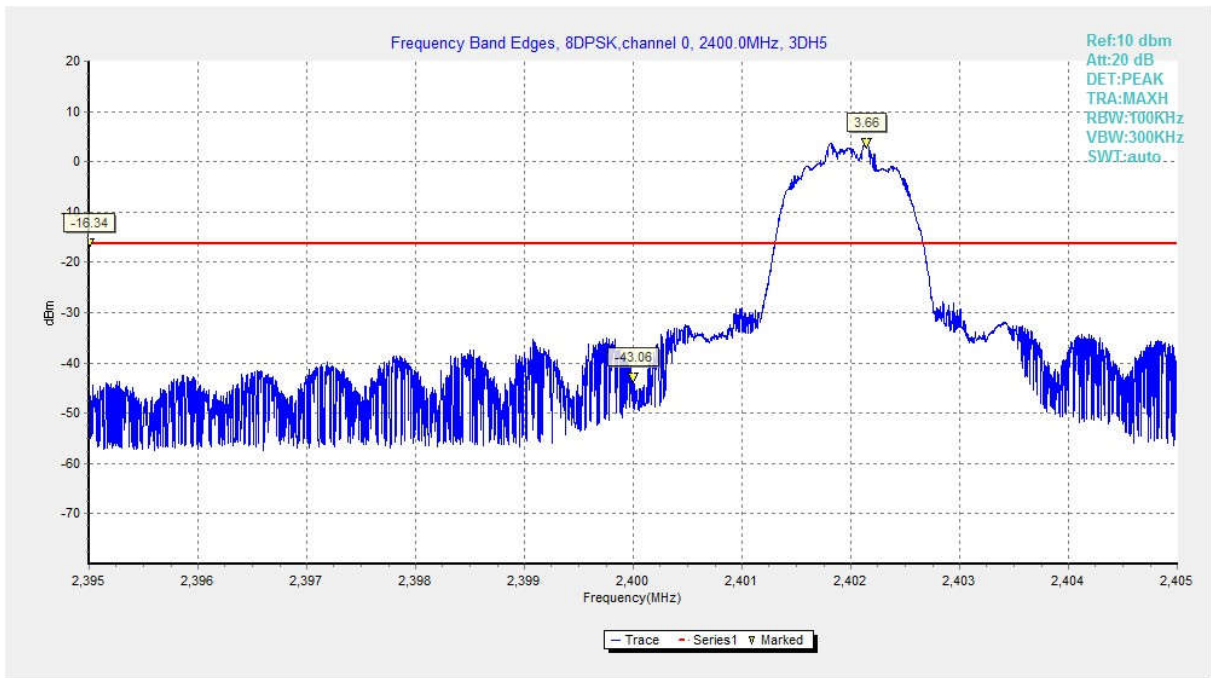


**Fig. 9 Band Edges (8DPSK, CH0, Hopping OFF)**

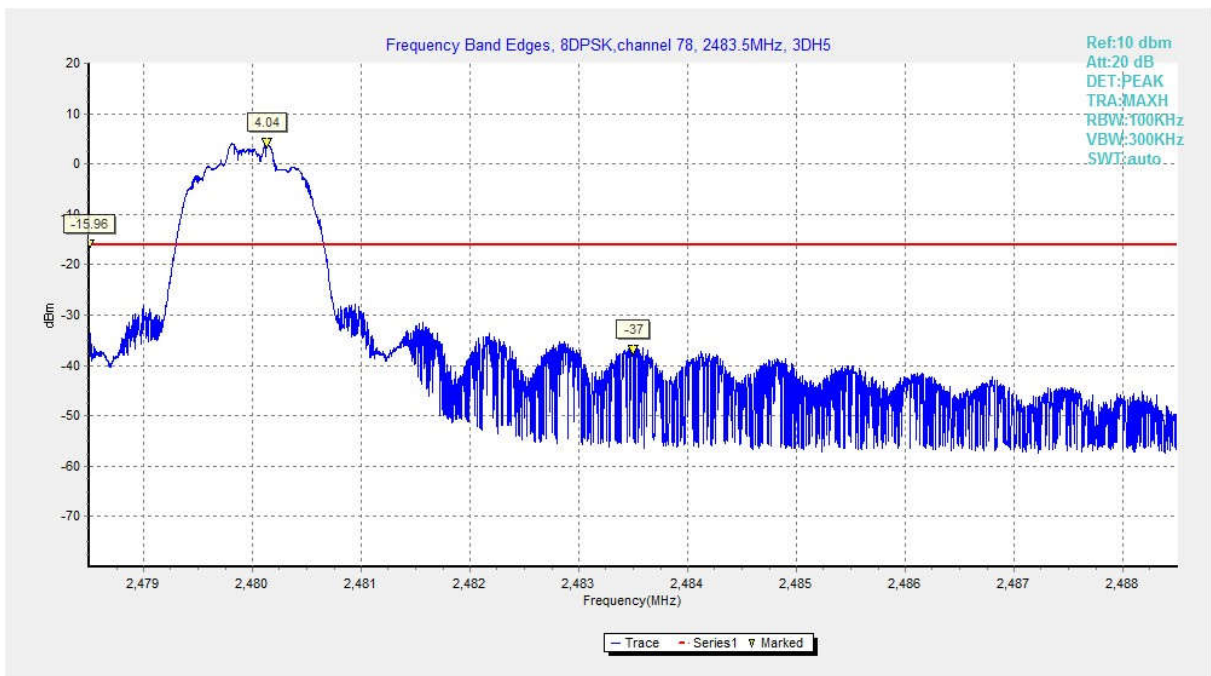

**Fig. 10 Band Edges (8DPSK, CH78, Hopping OFF)**

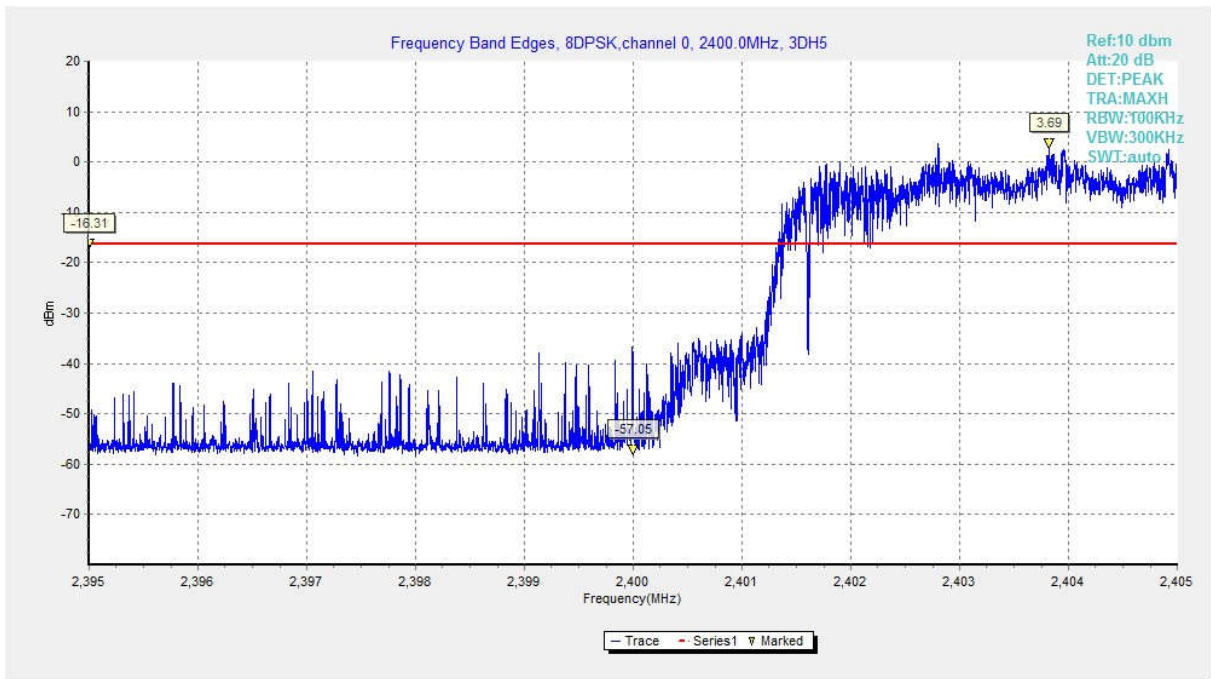

**Fig. 11 Band Edges (8DPSK, CH0, Hopping ON)**

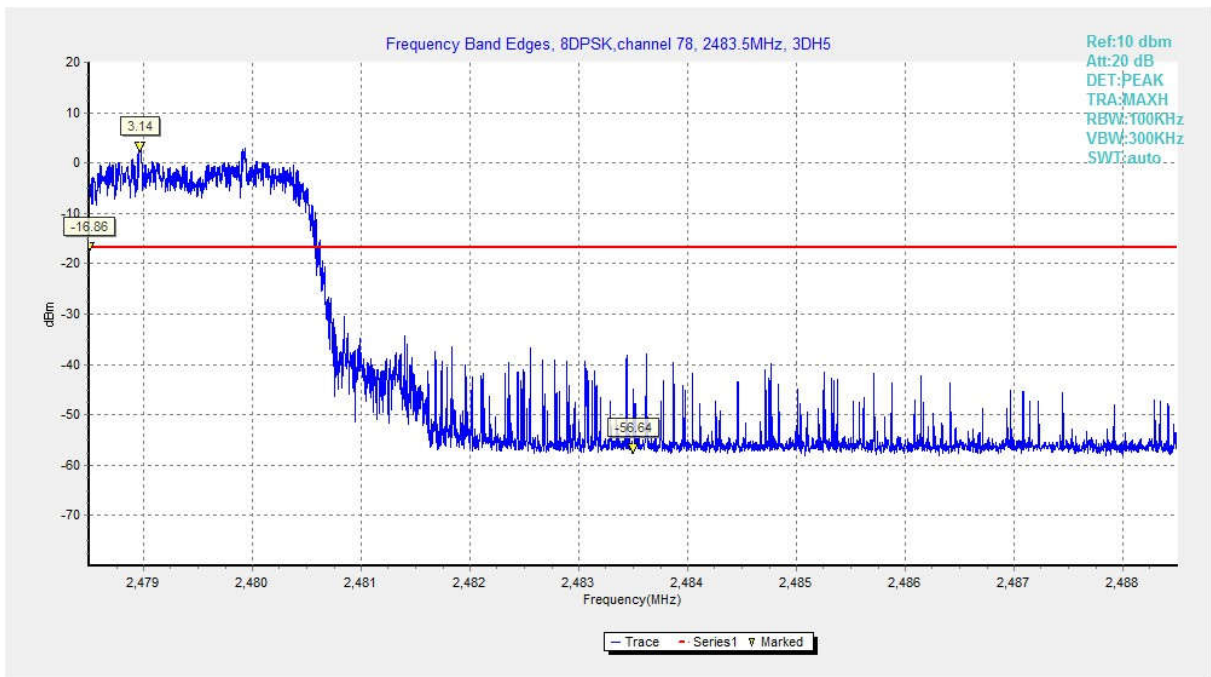

**Fig. 12 Band Edges (8DPSK, CH78, Hopping ON)**



### A.3 Conducted Emission

**Method of Measurement: See ANSI C63.10-clause 7.8.8.**

**Measurement Limit:**

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	20dBm below peak output power in 100kHz bandwidth

**Measurement Results:**

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1GHz-3GHz	Fig.13	<b>P</b>
		3GHz-10GHz	Fig.14	<b>P</b>
	39	1GHz-3GHz	Fig.15	<b>P</b>
		3GHz-10GHz	Fig.16	<b>P</b>
	78	1GHz-3GHz	Fig.17	<b>P</b>
		3GHz-10GHz	Fig.18	<b>P</b>
$\pi/4$ DQPSK	0	1GHz-3GHz	Fig.19	<b>P</b>
		3GHz-10GHz	Fig.20	<b>P</b>
	39	1GHz-3GHz	Fig.21	<b>P</b>
		3GHz-10GHz	Fig.22	<b>P</b>
	78	1GHz-3GHz	Fig.23	<b>P</b>
		3GHz-10GHz	Fig.24	<b>P</b>
8DPSK	0	1GHz-3GHz	Fig.25	<b>P</b>
		3GHz-10GHz	Fig.26	<b>P</b>
	39	1GHz-3GHz	Fig.27	<b>P</b>
		3GHz-10GHz	Fig.28	<b>P</b>
	78	1GHz-3GHz	Fig.29	<b>P</b>
		3GHz-10GHz	Fig.30	<b>P</b>
/	All channels	30 MHz-1GHz	Fig.31	<b>P</b>
		10GHz-26GHz	Fig.32	<b>P</b>

**See below for test graphs.**

**Conclusion: Pass**



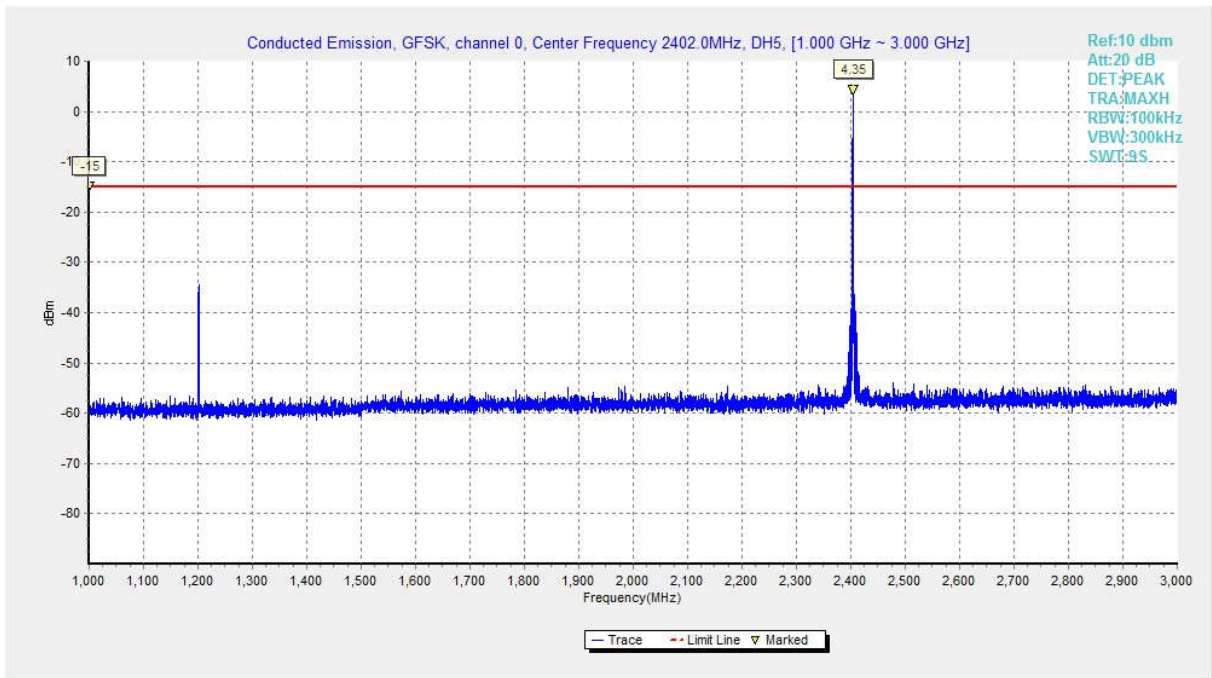


Fig. 13 Conducted Spurious Emission (GFSK, Ch0, 1 GHz-3 GHz)

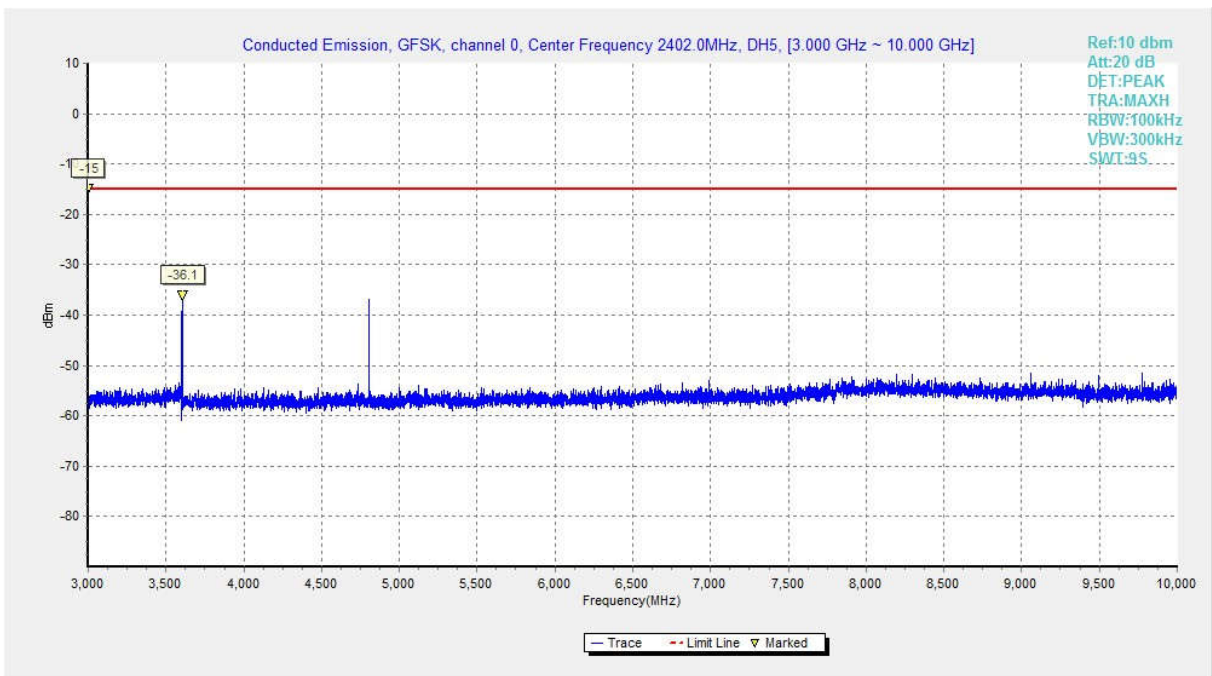


Fig. 14 Conducted Spurious Emission (GFSK, Ch0, 3GHz-10 GHz)

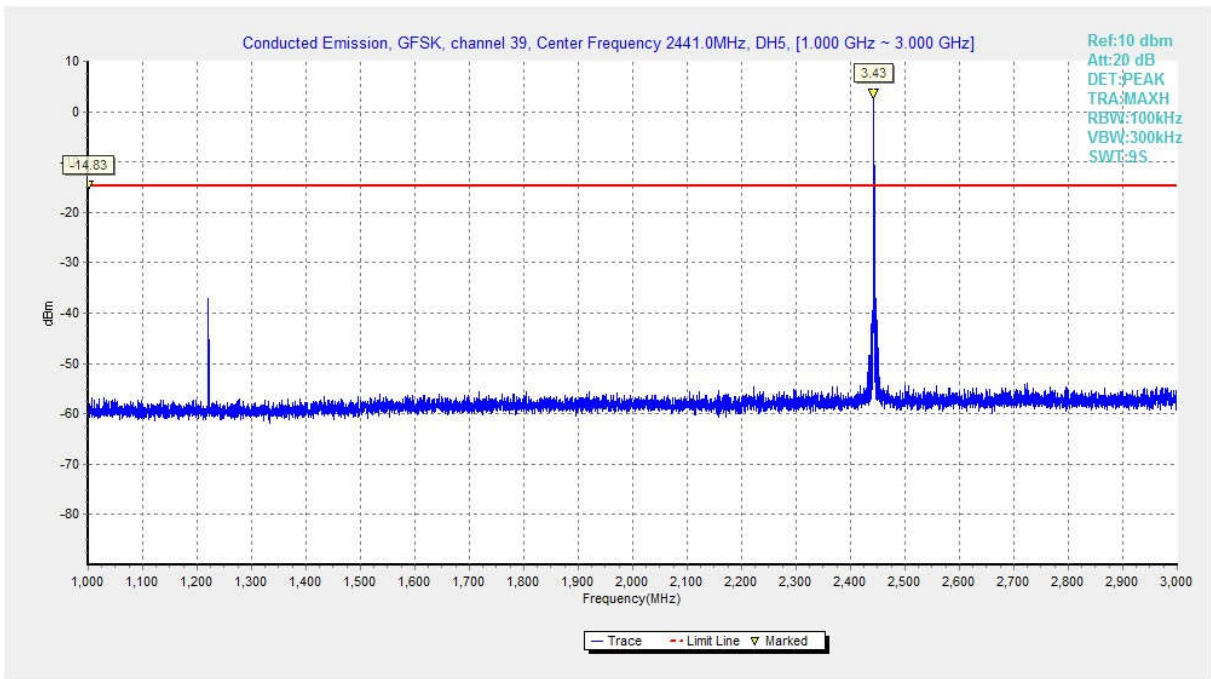


Fig. 15 Conducted Spurious Emission (GFSK, Ch39, 1GHz-3 GHz)

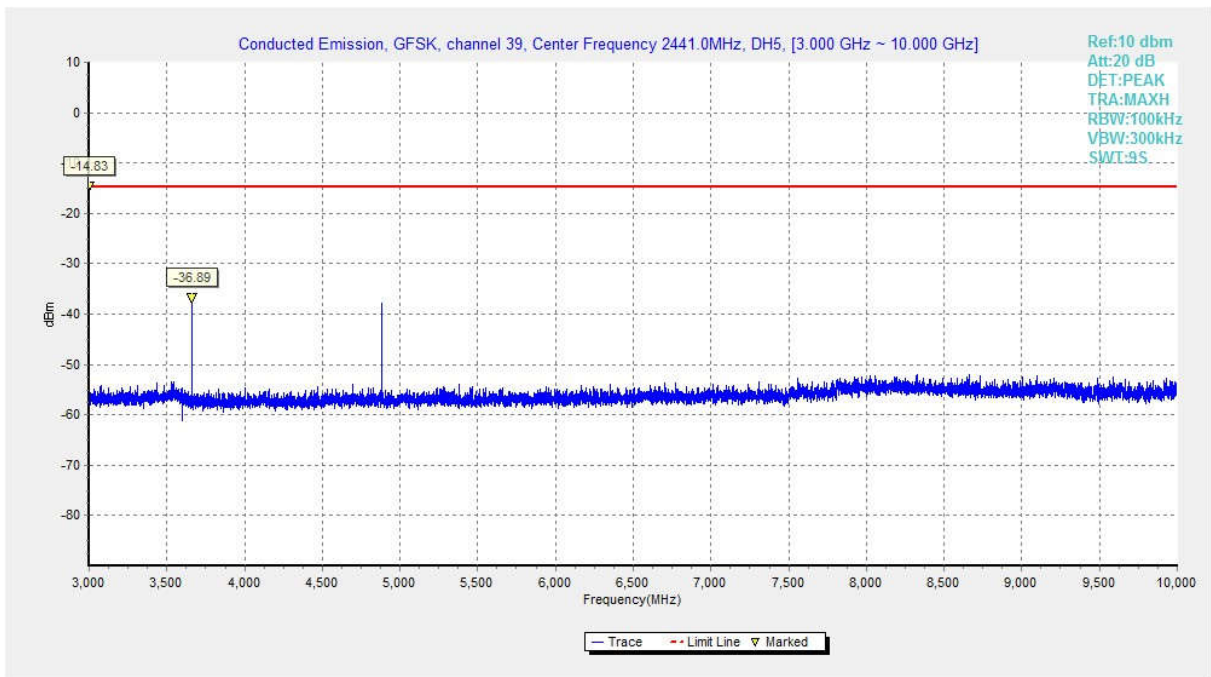


Fig. 16 Conducted Spurious Emission (GFSK, Ch39, 3GHz-10 GHz)

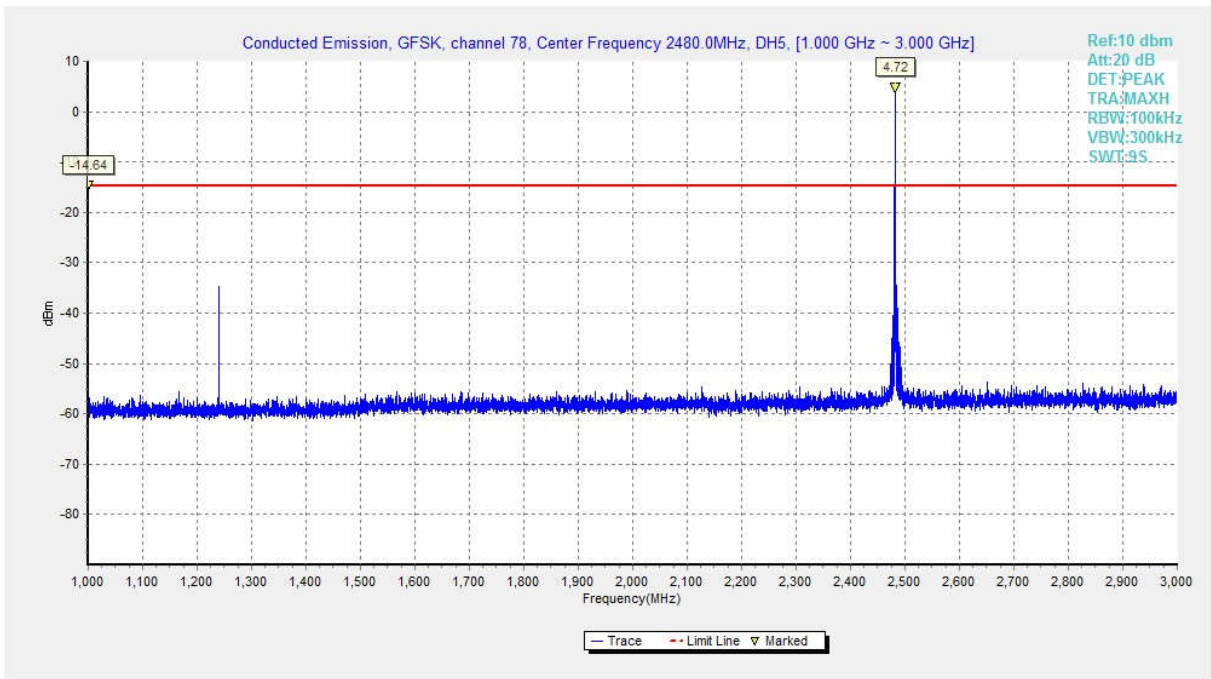


Fig. 17 Conducted Spurious Emission (GFSK, Ch78, 1GHz-3 GHz)

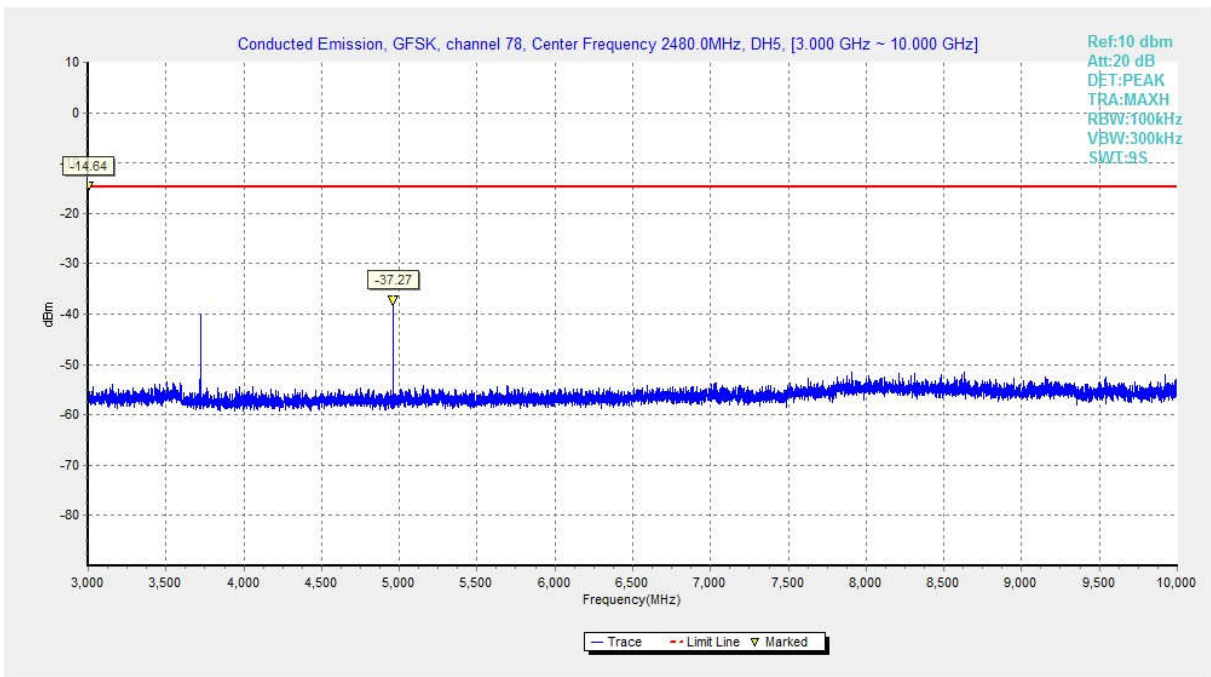


Fig. 18 Conducted Spurious Emission (GFSK, Ch78, 3GHz-10 GHz)

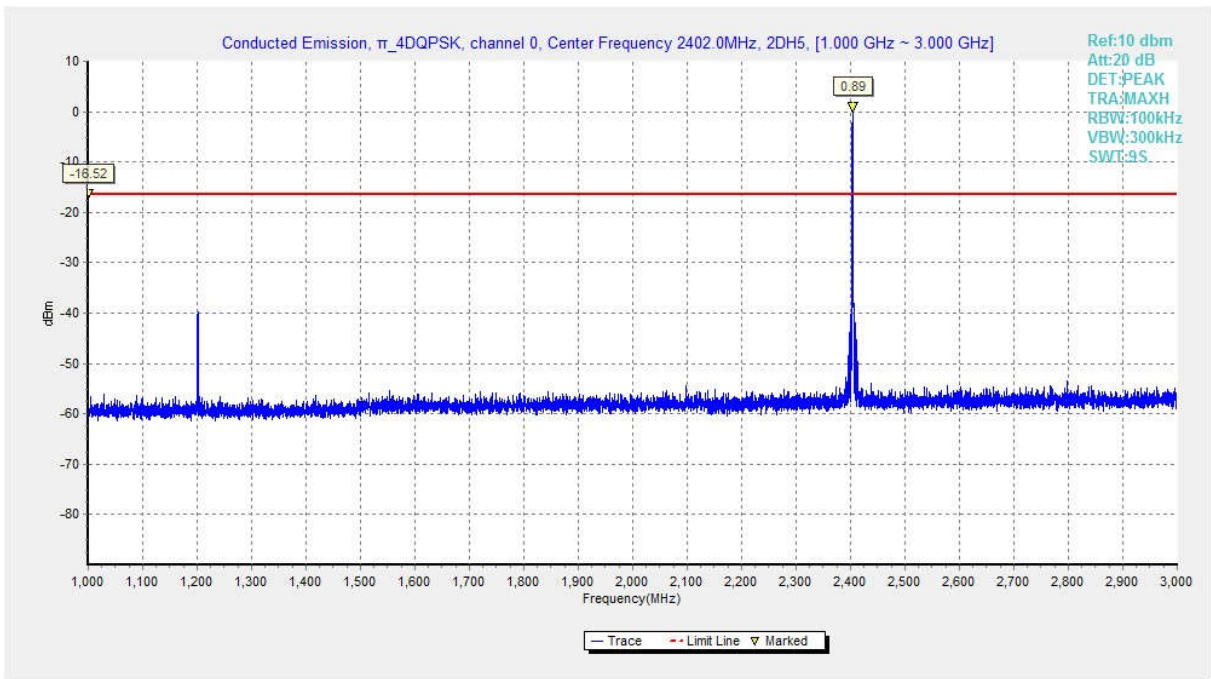


Fig. 19 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch0, 1GHz-3 GHz)

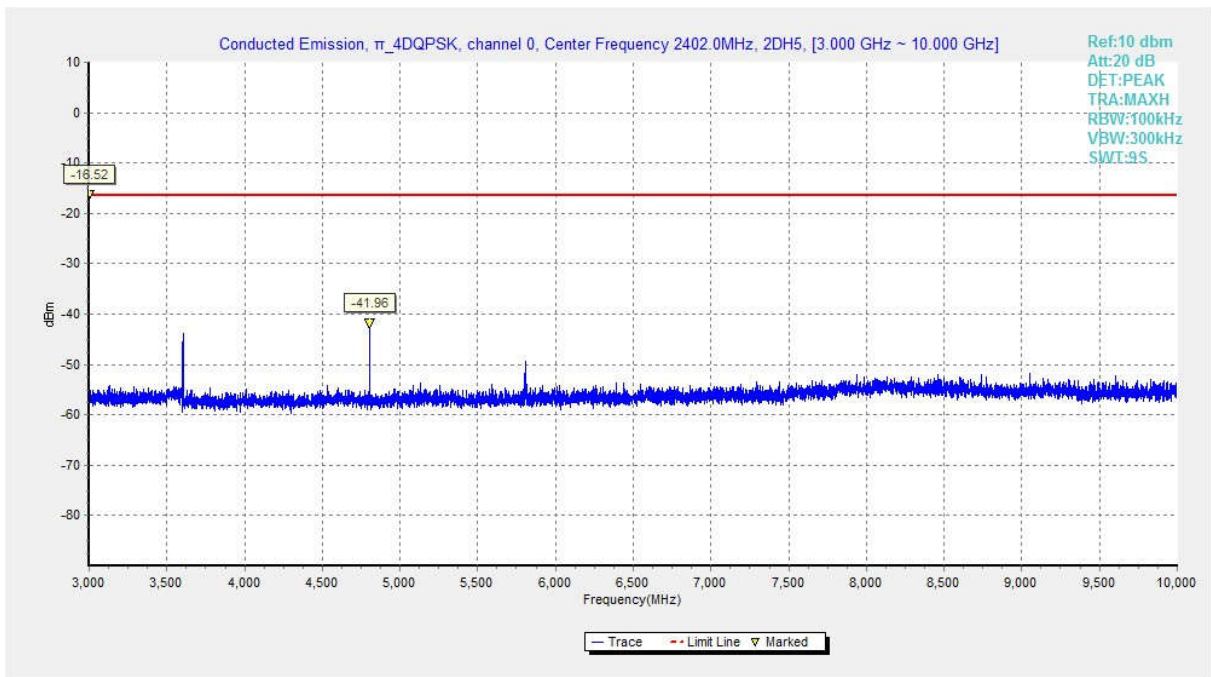


Fig. 20 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch0, 3GHz-10 GHz)



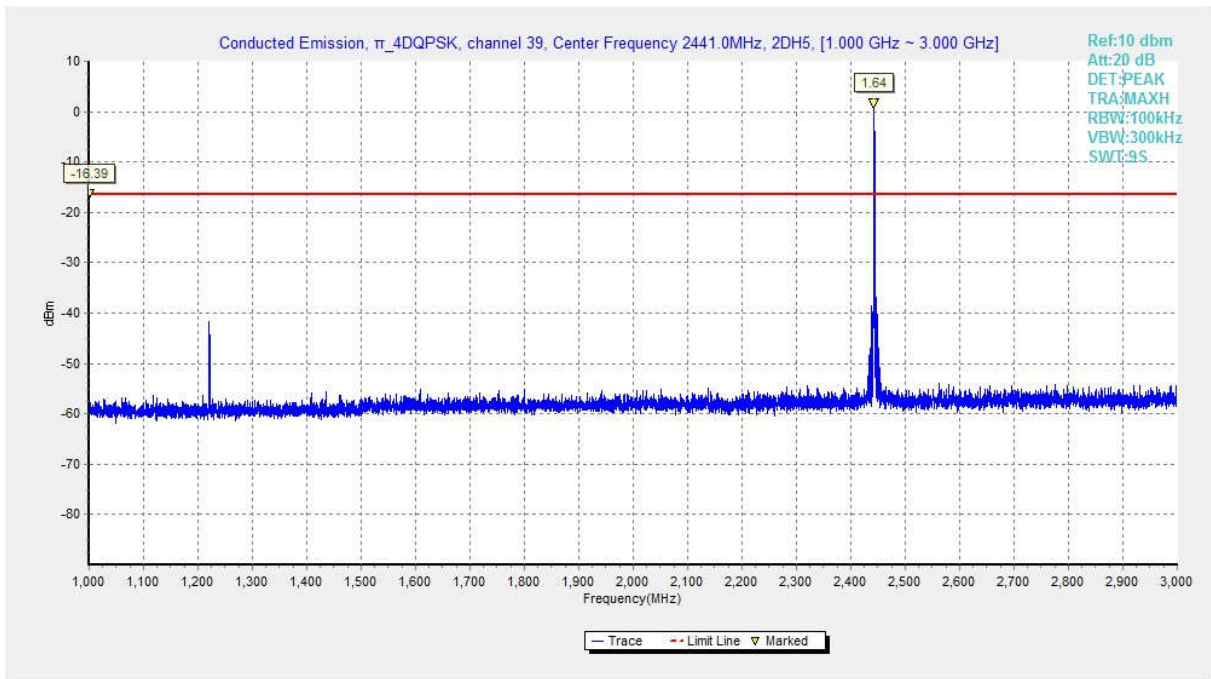


Fig. 21 Conducted Spurious Emission ( $\pi$ /4 DQPSK, Ch39, 1GHz-3 GHz)

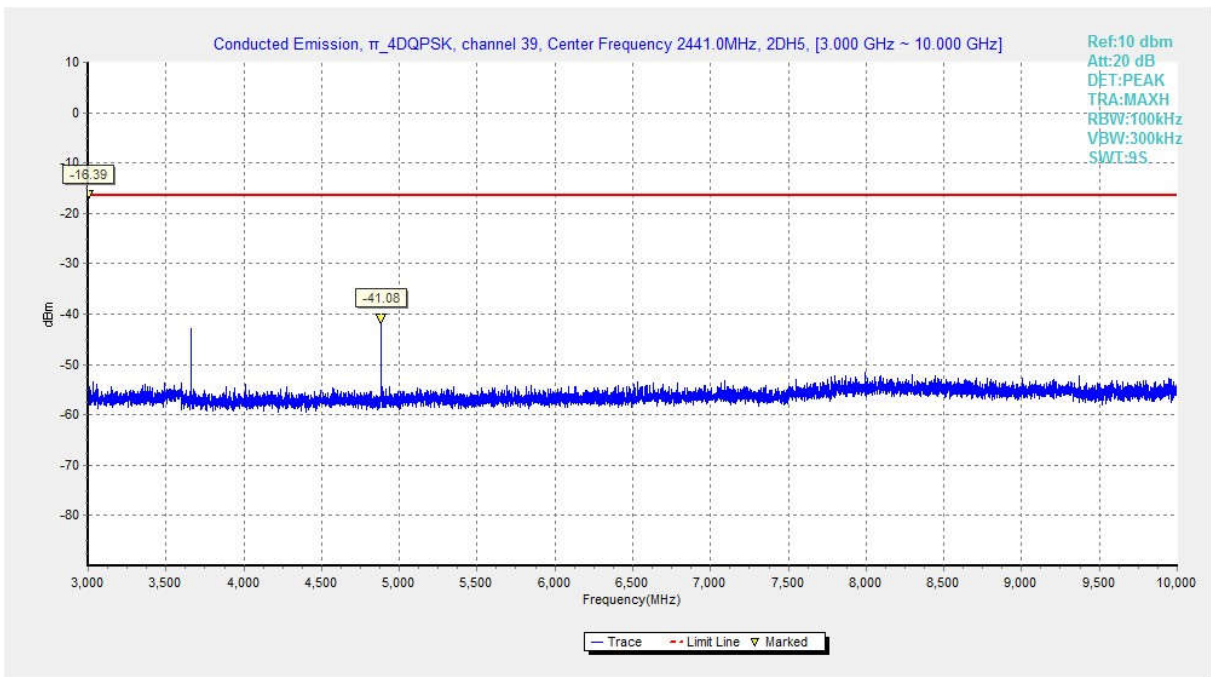


Fig. 22 Conducted Spurious Emission ( $\pi$ /4 DQPSK, Ch39, 3GHz-10 GHz)

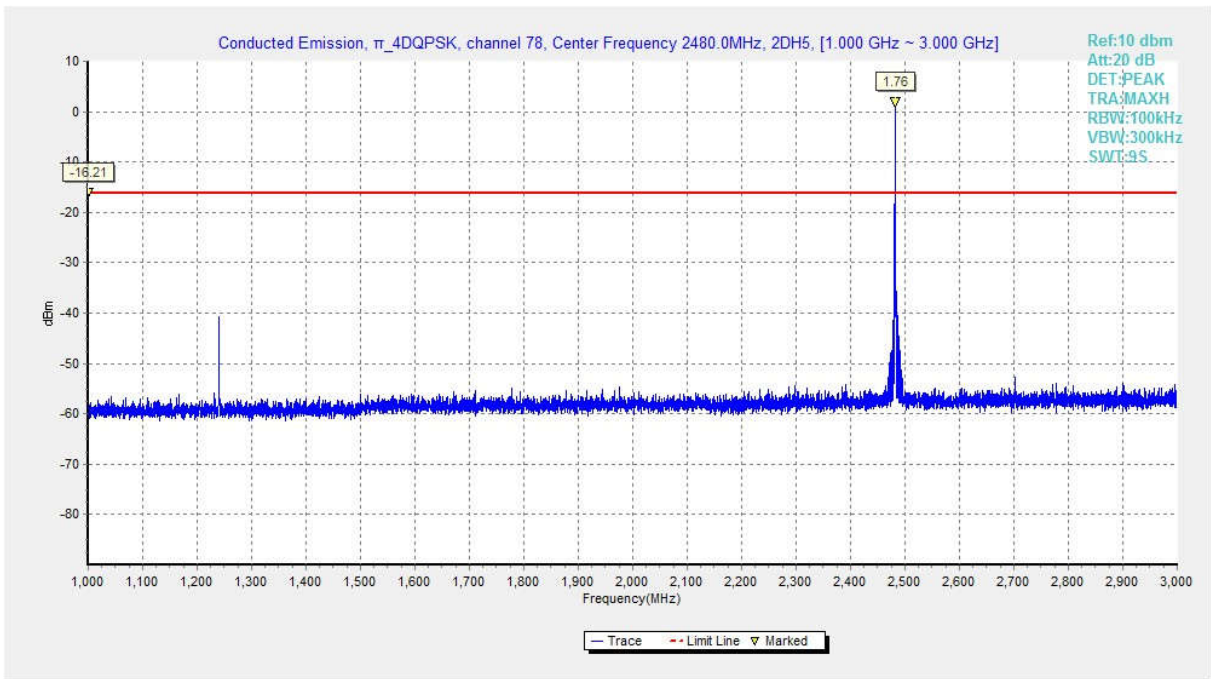


Fig. 23 Conducted Spurious Emission ( $\pi$  /4 DQPSK, Ch78, 1GHz-3 GHz)

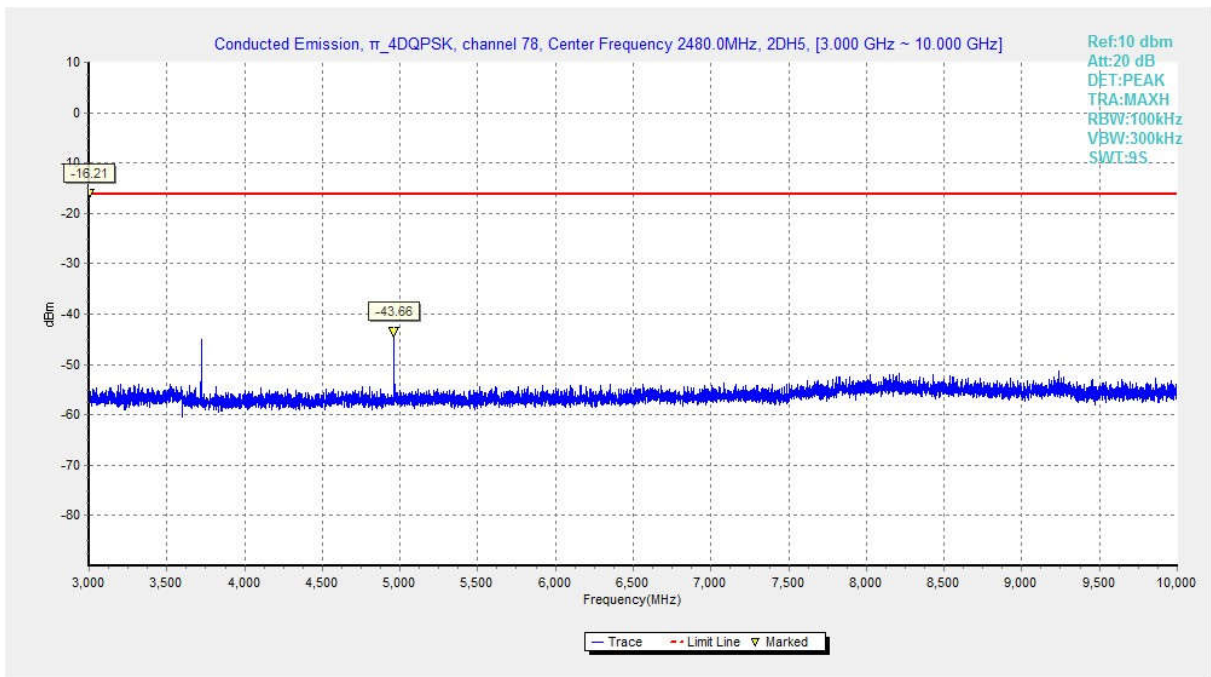


Fig. 24 Conducted Spurious Emission ( $\pi$  /4 DQPSK, Ch78, 3GHz-10 GHz)

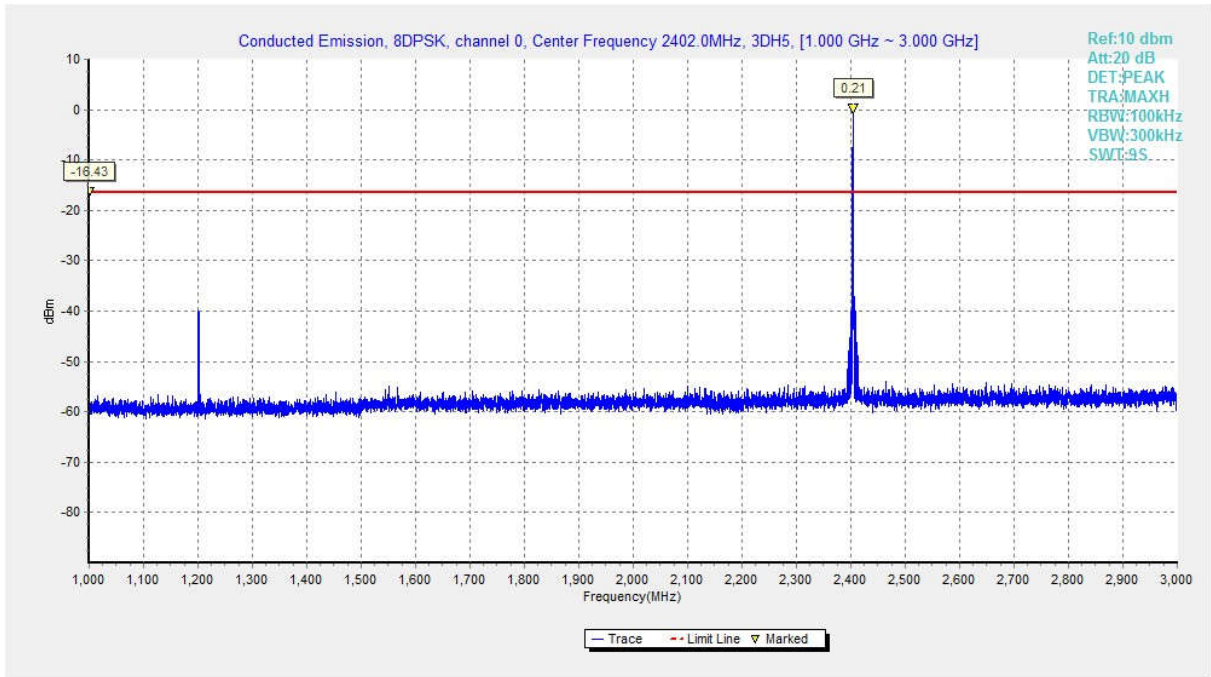


Fig. 25 Conducted Spurious Emission (8DPSK, Ch0, 1GHz-3 GHz)

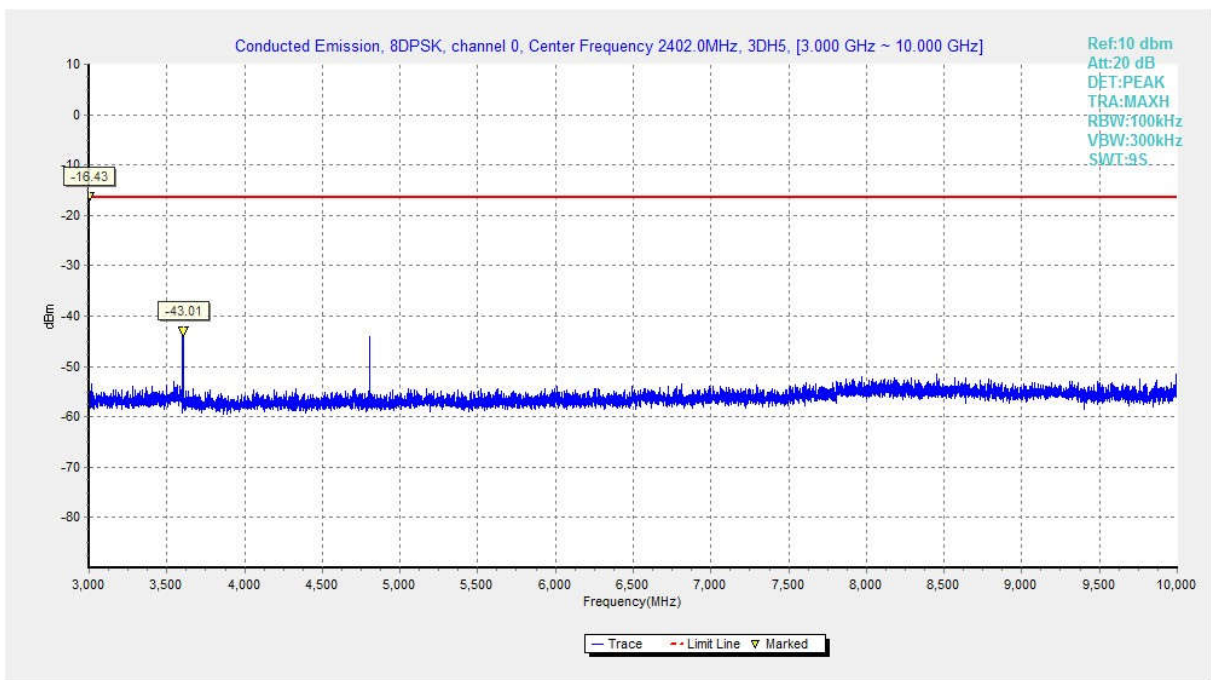


Fig. 26 Conducted Spurious Emission (8DPSK, Ch0, 3GHz-10 GHz)

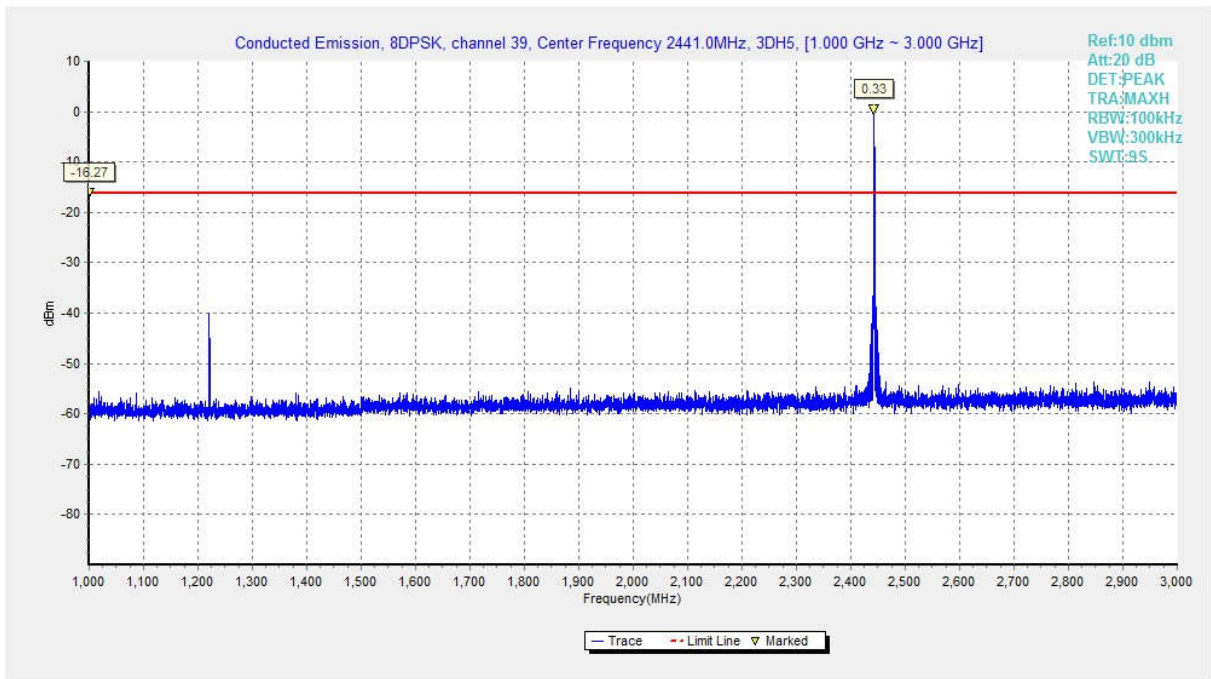


Fig. 27 Conducted Spurious Emission (8DPSK, Ch39, 1GHz-3 GHz)

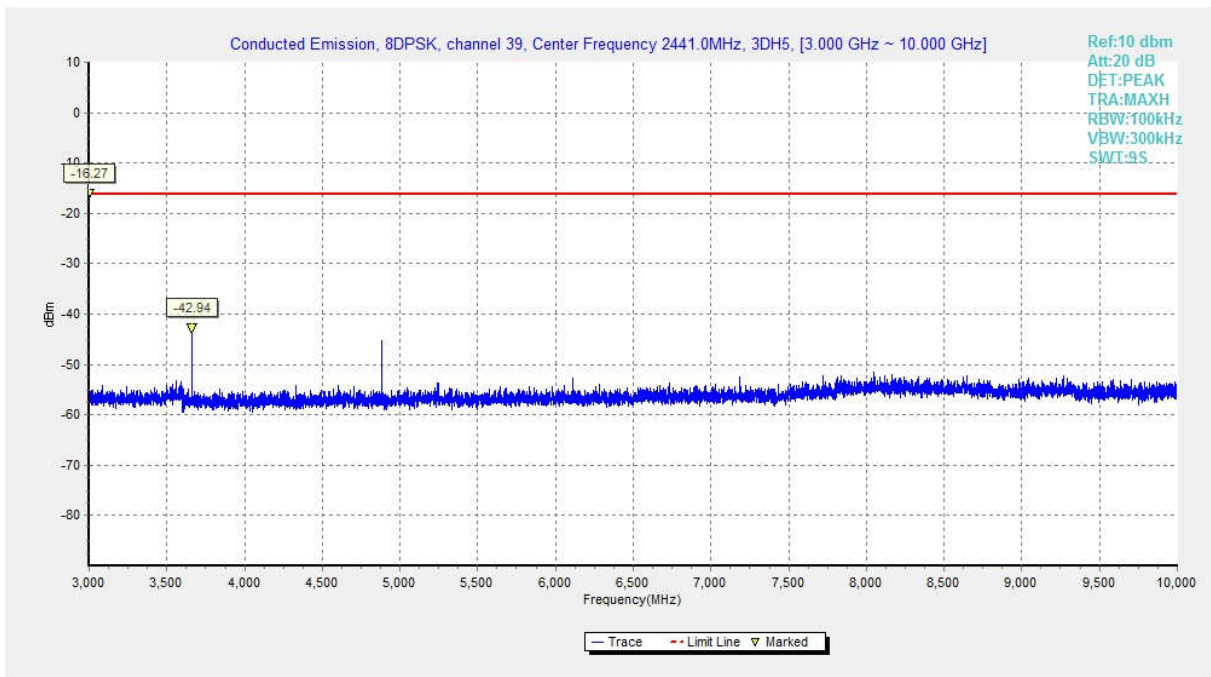


Fig. 28 Conducted Spurious Emission (8DPSK, Ch39, 3GHz-10 GHz)



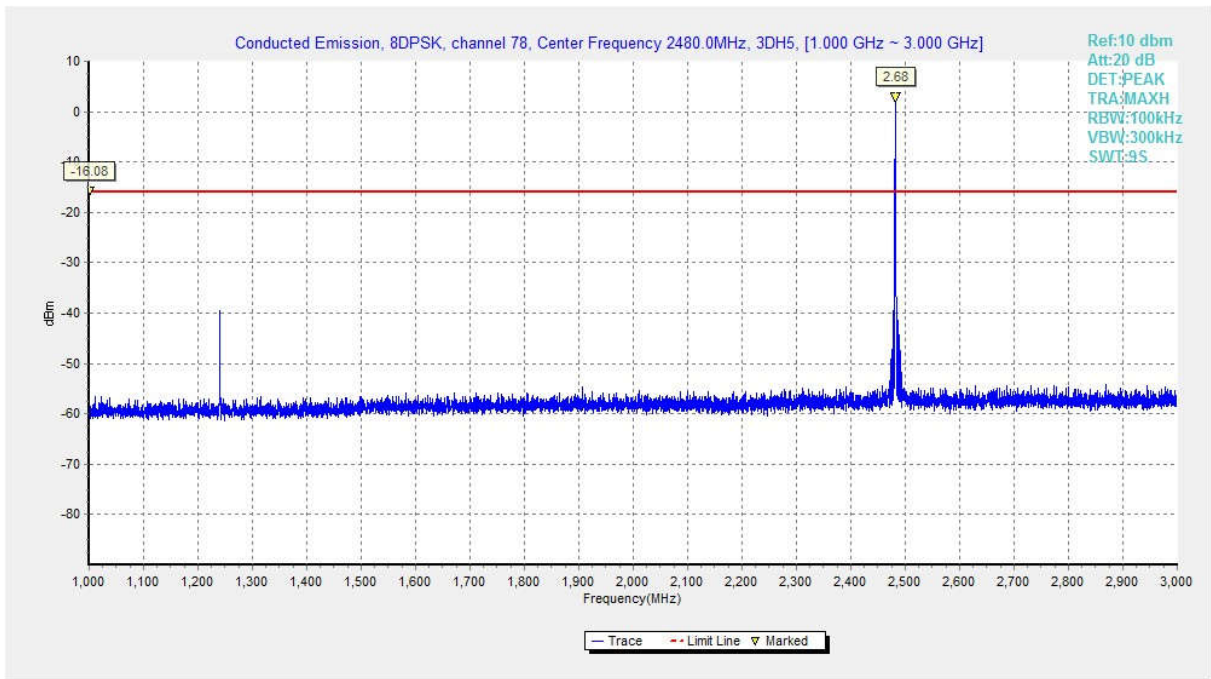


Fig. 29 Conducted Spurious Emission (8DPSK, Ch78, 1GHz-3 GHz)

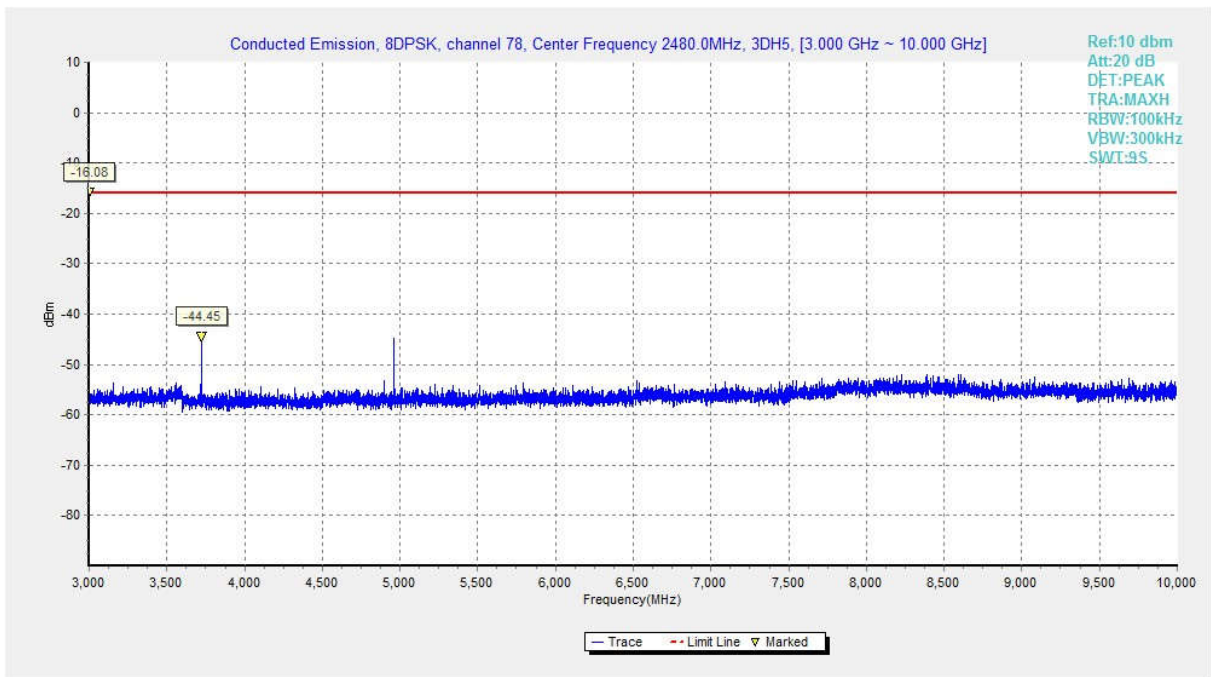


Fig. 30 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-10 GHz)

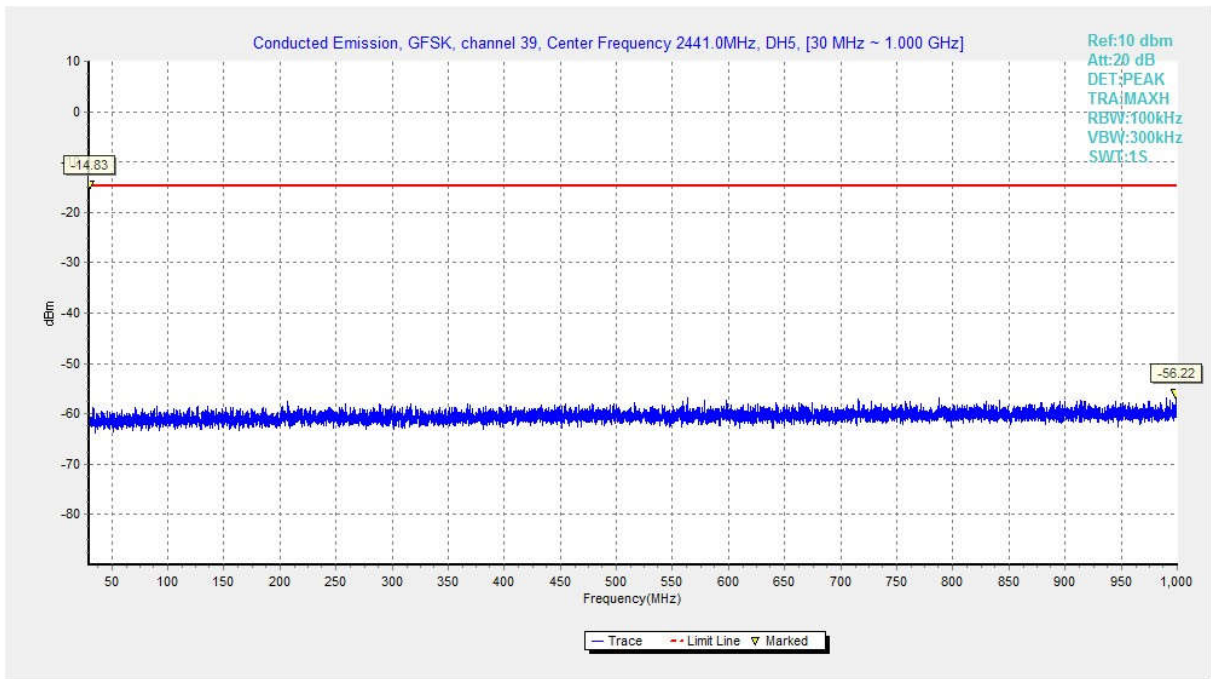


Fig. 31 Conducted Spurious Emission (All channel, 30 MHz-1 GHz)

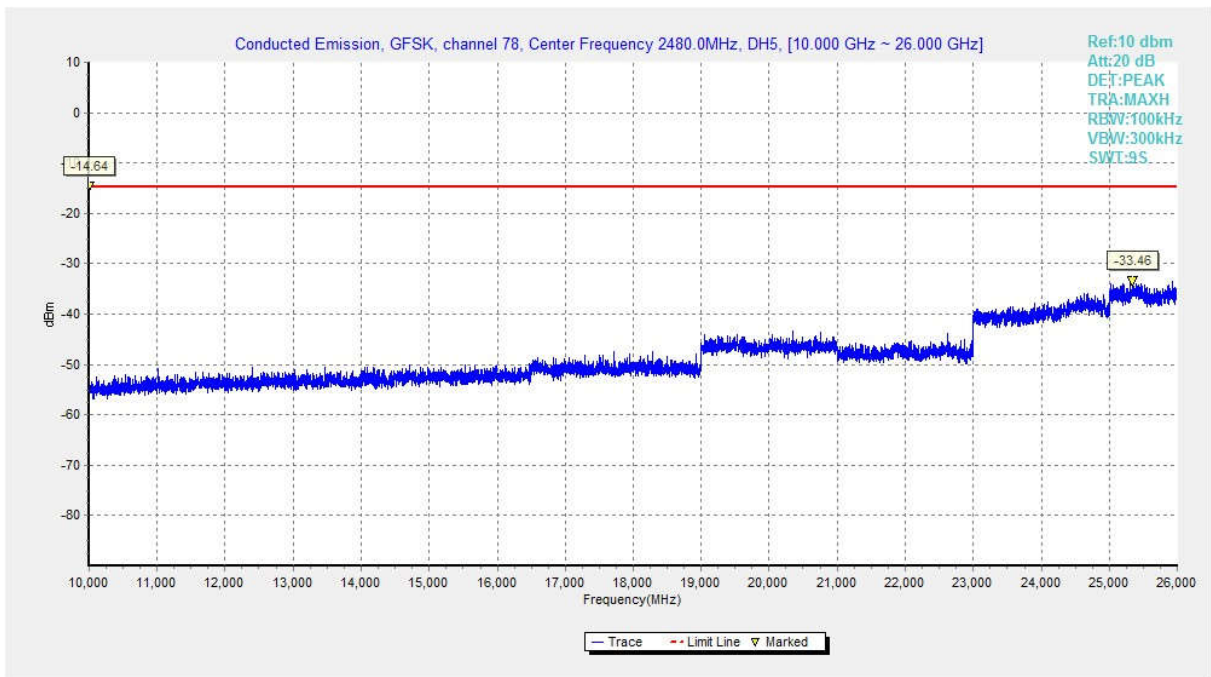


Fig. 32 Conducted Spurious Emission All channel, (10 GHz-26 GHz,)



#### A.4 Radiated Emission

**Method of Measurement:** See ANSI C63.10-clause 6.3.

**Measurement Limit:**

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength( $\mu$ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Condition:**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

**Note:** According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

**Measurement Results:**

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1 GHz ~6 GHz	Fig.33	<b>P</b>
		6 GHz ~18 GHz	Fig.34	<b>P</b>
	39	1 GHz ~6 GHz	Fig.35	<b>P</b>
		6 GHz ~18 GHz	Fig.36	<b>P</b>
	78	1 GHz ~6 GHz	Fig.37	<b>P</b>
		6 GHz ~18 GHz	Fig.38	<b>P</b>
	Restricted Band(CH0)	2.38 GHz ~ 2.45 GHz	Fig.39	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.40	<b>P</b>
$\pi/4$ DQPSK	0	1 GHz ~6 GHz	Fig.41	<b>P</b>
		6 GHz ~18 GHz	Fig.42	<b>P</b>
	39	1 GHz ~6 GHz	Fig.43	<b>P</b>
		6 GHz ~18 GHz	Fig.44	<b>P</b>
	78	1 GHz ~6 GHz	Fig.45	<b>P</b>
		6 GHz ~18 GHz	Fig.46	<b>P</b>
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.47	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.48	<b>P</b>
8DPSK	0	1 GHz ~6 GHz	Fig.49	<b>P</b>
		6 GHz ~18 GHz	Fig.50	<b>P</b>
	39	1 GHz ~6 GHz	Fig.51	<b>P</b>
		6 GHz ~18 GHz	Fig.52	<b>P</b>
	78	1 GHz ~6 GHz	Fig.53	<b>P</b>
		6 GHz ~18 GHz	Fig.54	<b>P</b>
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.55	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.56	<b>P</b>
/	All channels	9 kHz ~30 MHz	Fig.57	<b>P</b>
		30 MHz ~1 GHz	Fig.58	<b>P</b>
		18 GHz ~26.5 GHz	Fig.59	<b>P</b>



**Worst Case Result**

**GFSK CH0 (1-18GHz)**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
1240.000000	65.20	74.00	8.80	V	0.4
3719.700000	57.21	74.00	16.79	V	0.8
4959.900000	65.56	74.00	8.44	V	3.6
10419.428572	48.39	74.00	25.61	V	9.0
12259.285714	48.92	74.00	25.08	H	10.9
15819.857143	52.16	74.00	21.84	H	14.0

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
1240.000000	51.44	54.00	2.56	V	0.4
3719.700000	43.43	54.00	10.57	V	0.8
4959.900000	52.53	54.00	1.47	V	3.6
10419.428572	37.75	54.00	16.25	V	9.0
12259.285714	38.89	54.00	15.11	H	10.9
15819.857143	41.52	54.00	12.48	H	14.0

**CH39 (1-18GHz)**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
1240.000000	64.65	74.00	9.35	V	0.4
3720.000000	57.32	74.00	16.68	V	0.8
4960.200000	65.51	74.00	8.49	V	3.6
10416.000000	48.69	74.00	25.31	H	9.1
12342.000000	48.89	74.00	25.11	H	11.2
14198.142857	49.26	74.00	24.74	H	11.1

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
1240.000000	51.00	54.00	3.00	V	0.4
3720.000000	43.63	54.00	10.37	V	0.8
4960.200000	52.36	54.00	1.64	V	3.6
10416.000000	37.73	54.00	16.27	H	9.1
12342.000000	38.92	54.00	15.08	H	11.2
14198.142857	38.94	54.00	15.06	H	11.1

**CH78 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1239.642857	63.95	74.00	10.05	V	0.3
3720.000000	57.71	74.00	16.29	V	0.8
4960.200000	64.92	74.00	9.08	V	3.6
10837.714286	47.62	74.00	26.38	V	9.2
12459.428572	49.55	74.00	24.45	V	11.4
14234.142857	49.29	74.00	24.71	V	11.2

Frequency (MHz)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1239.642857	50.30	54.00	3.70	V	0.3
3720.000000	43.86	54.00	10.14	V	0.8
4960.200000	51.83	54.00	2.17	V	3.6
10837.714286	37.23	54.00	16.77	V	9.2
12459.428572	39.19	54.00	14.81	V	11.4
14234.142857	38.98	54.00	15.02	V	11.2

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument. The measurement results are obtained as described below:

Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.

**See below for test graphs.**

**Conclusion: Pass**

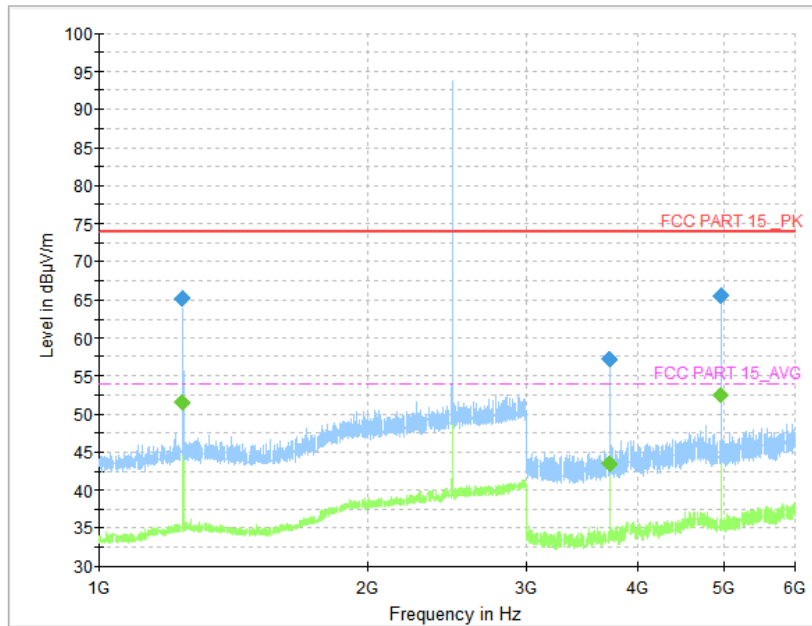


Fig. 33 Radiated Spurious Emission (GFSK, CH0, 1 GHz ~6 GHz)

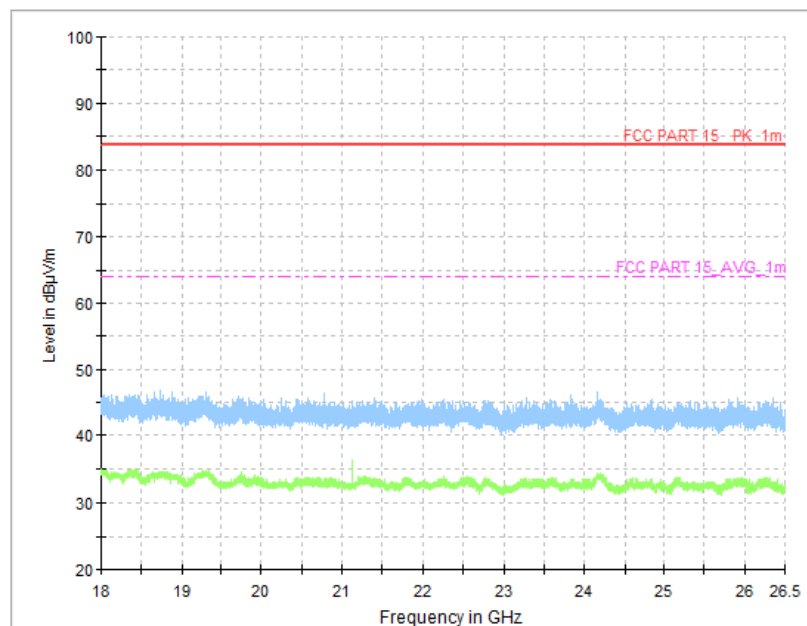


Fig. 34 Radiated Spurious Emission (GFSK, CH0, 6 GHz ~18 GHz)



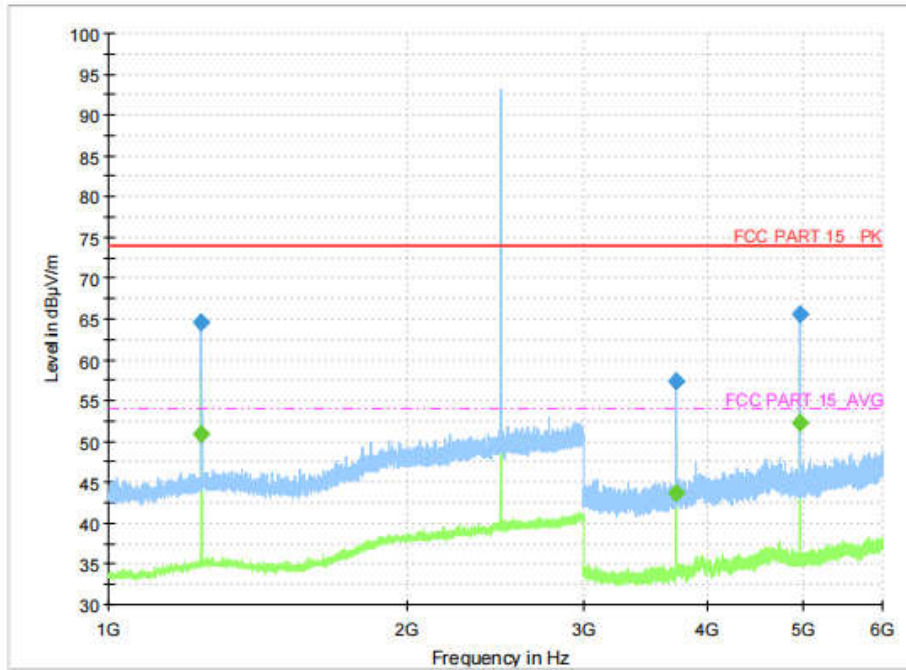


Fig. 35 Radiated Spurious Emission (GFSK, CH39, 1 GHz ~6 GHz)

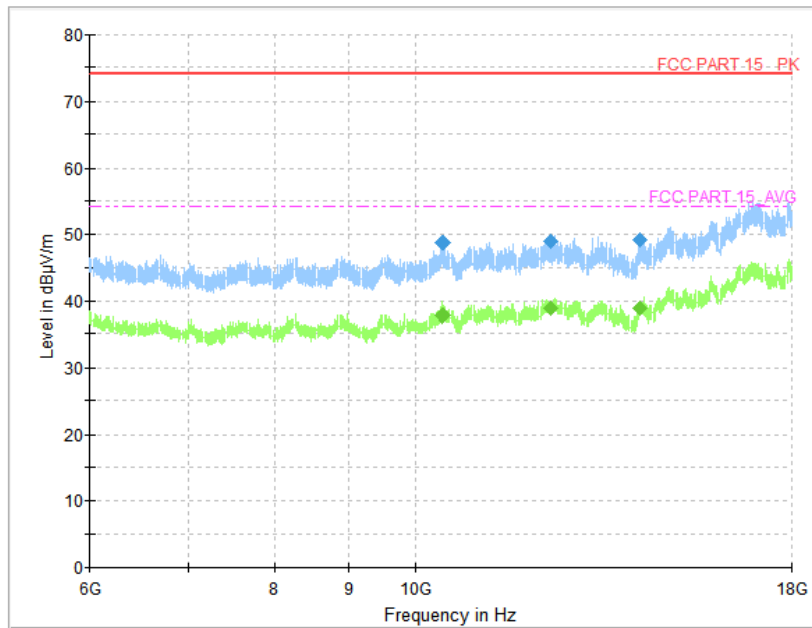


Fig. 36 Radiated Spurious Emission (GFSK, CH39, 6 GHz ~18 GHz)



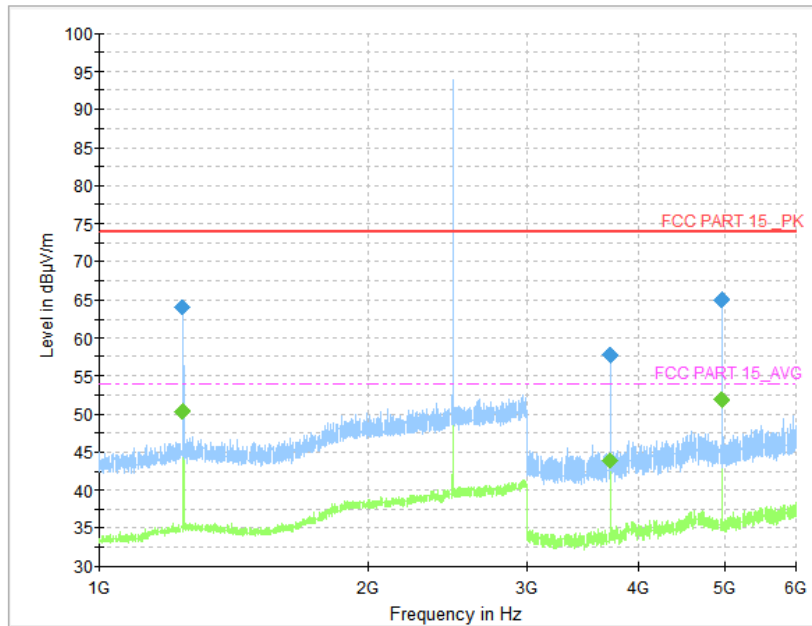


Fig. 37 Radiated Spurious Emission (GFSK, CH78, 1 GHz ~6 GHz)

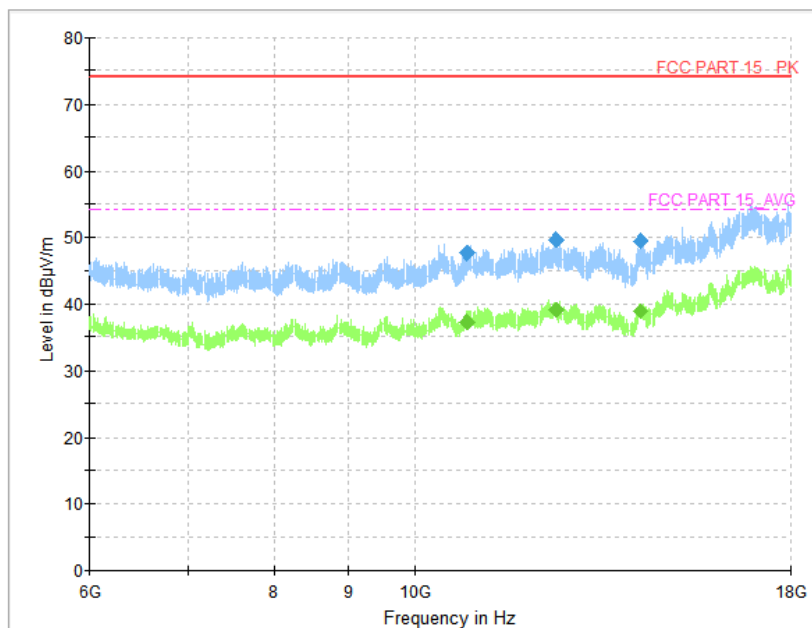


Fig. 38 Radiated Spurious Emission (GFSK, CH78, 6 GHz ~18 GHz)

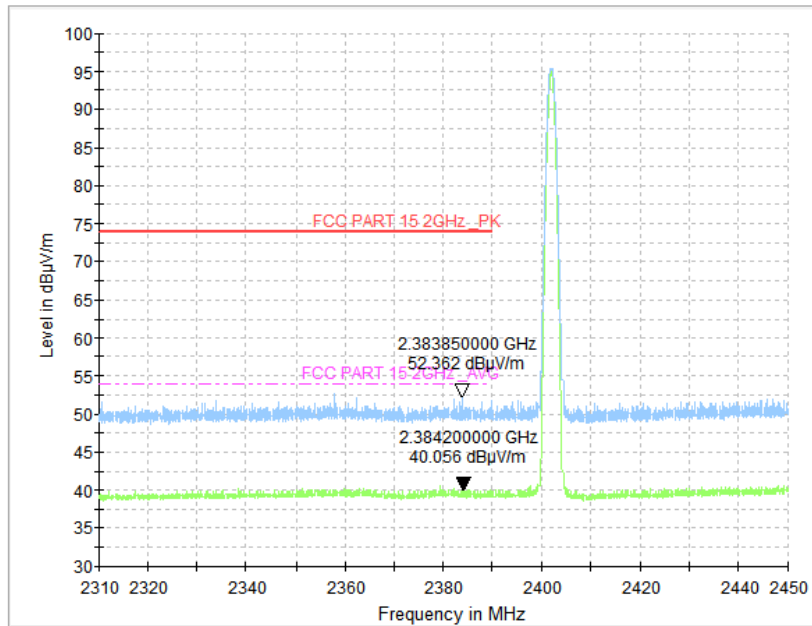


Fig. 39 Radiated Band Edges (GFSK, CH0, 2380GHz~2450GHz)

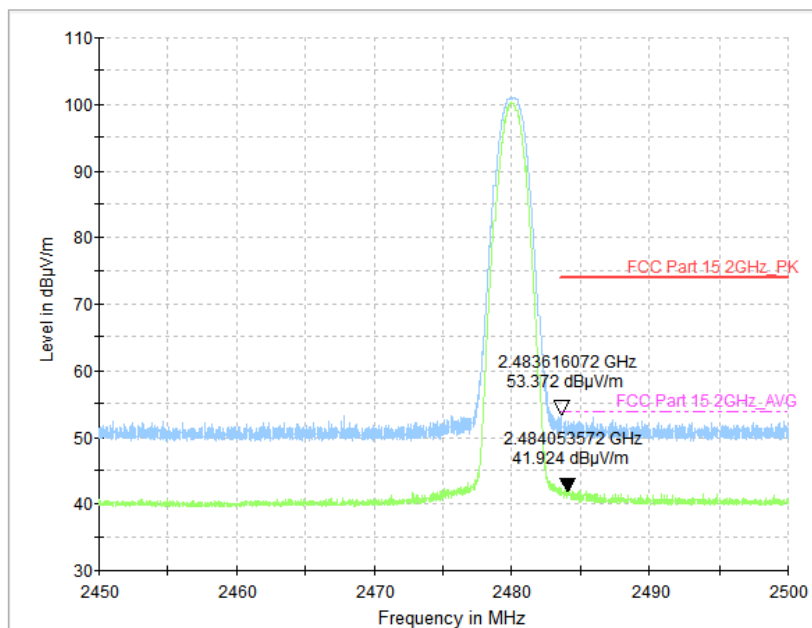


Fig. 40 Radiated Band Edges (GFSK, CH78, 2450GHz~2500GHz)

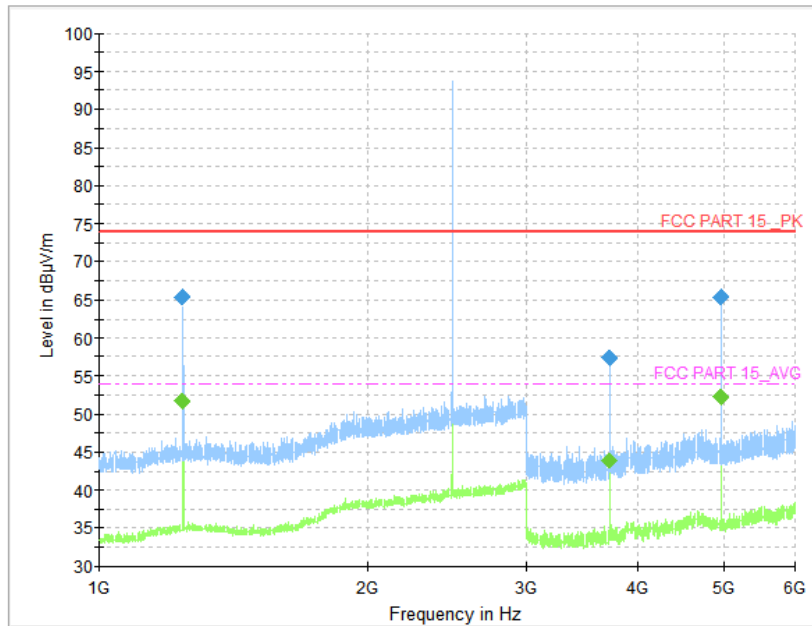


Fig. 41 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH0, 1 GHz ~6 GHz)



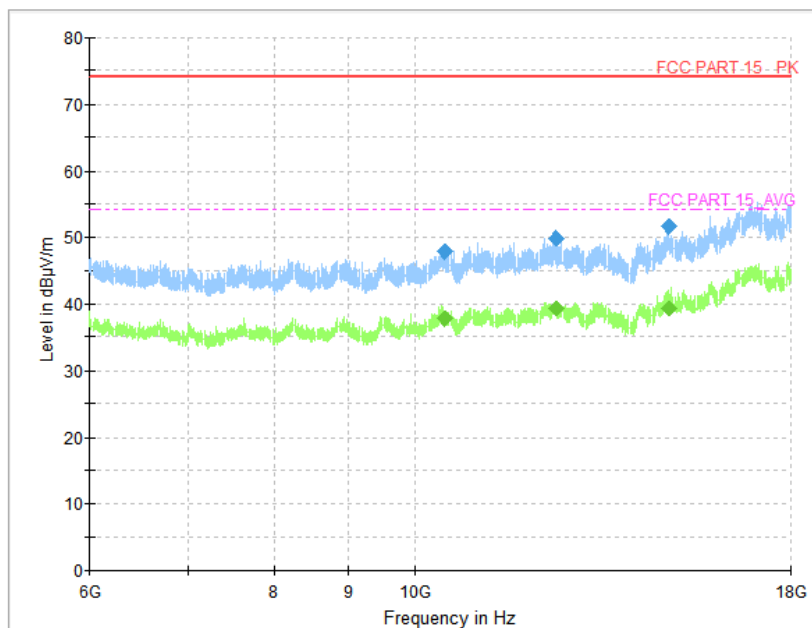



Fig. 42 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH0, 6 GHz ~18 GHz)

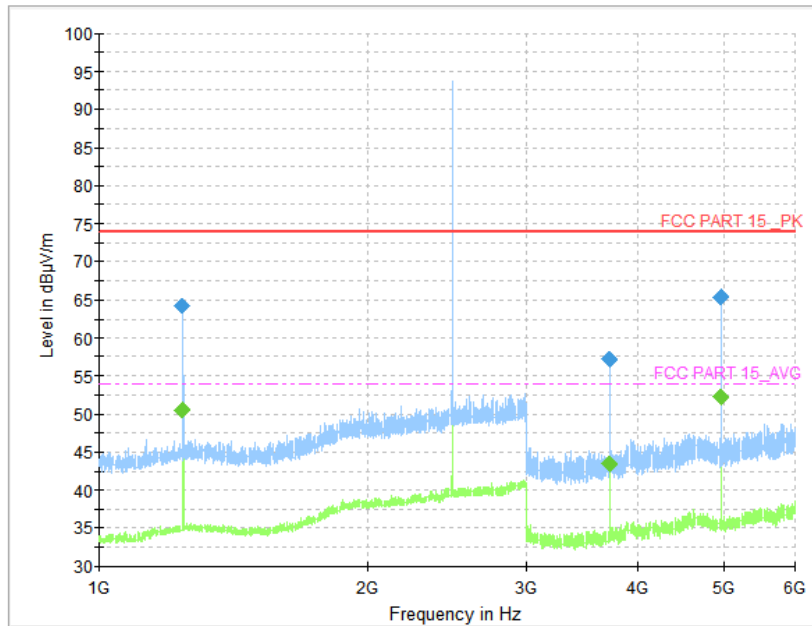


**Fig. 43 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH39, 1 GHz ~6 GHz)**

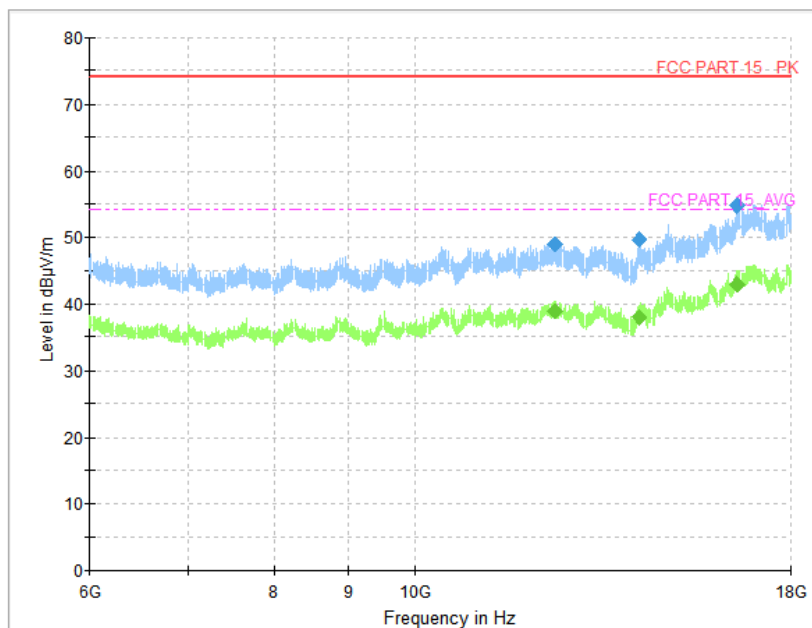

**Fig. 44 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH39, 6 GHz ~18 GHz)**

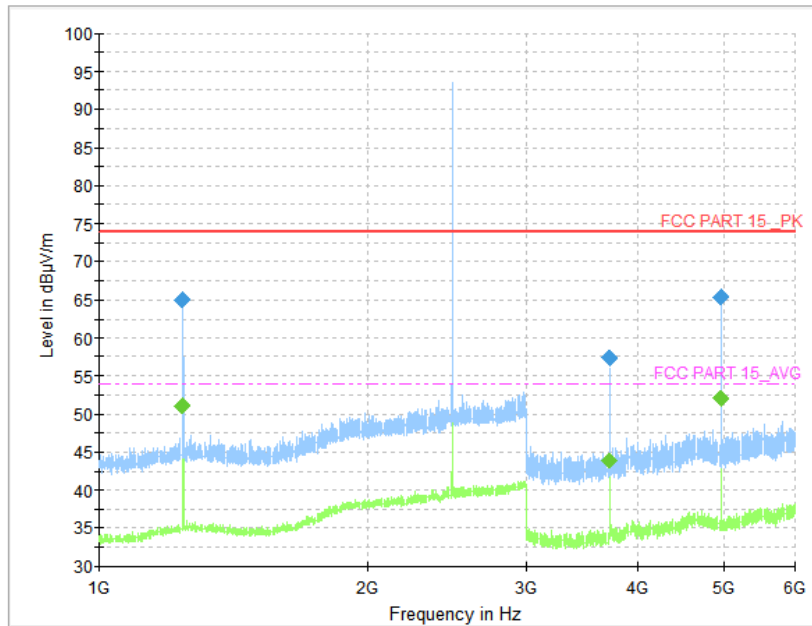

**Fig. 45 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH78, 1 GHz ~6 GHz)**

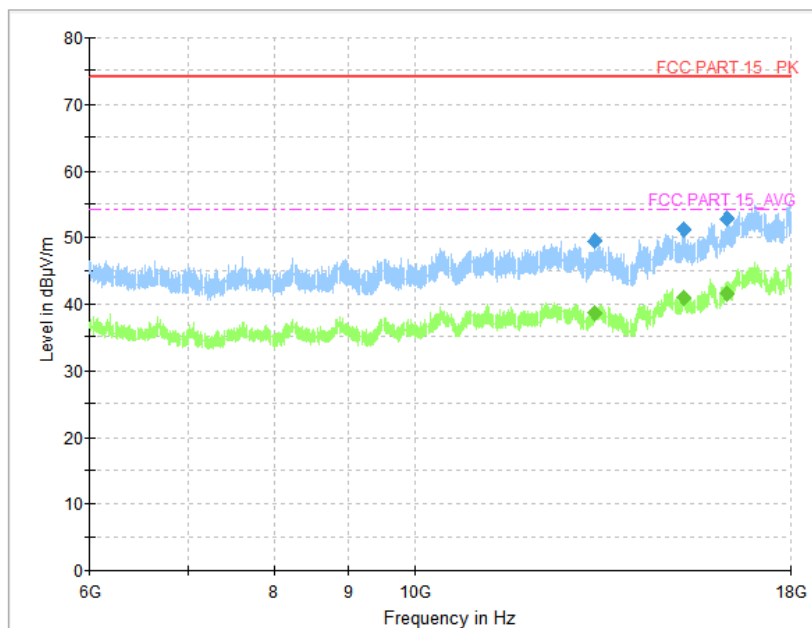

**Fig. 46 Radiated Spurious Emission ( $\pi/4$  DQPSK, CH78, 6 GHz ~18 GHz)**

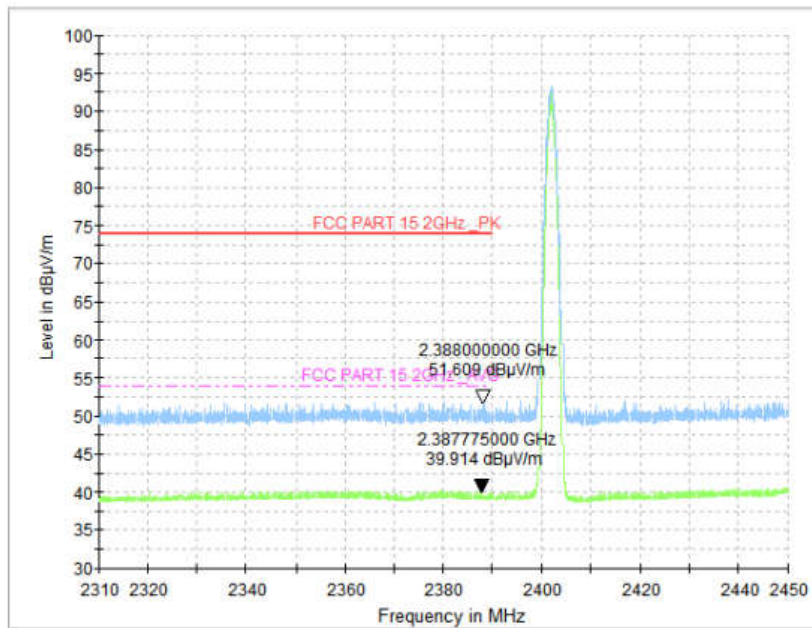


Fig. 47 Radiated Band Edges ( $\pi/4$  DQPSK, CH0, 2380GHz~2450GHz)

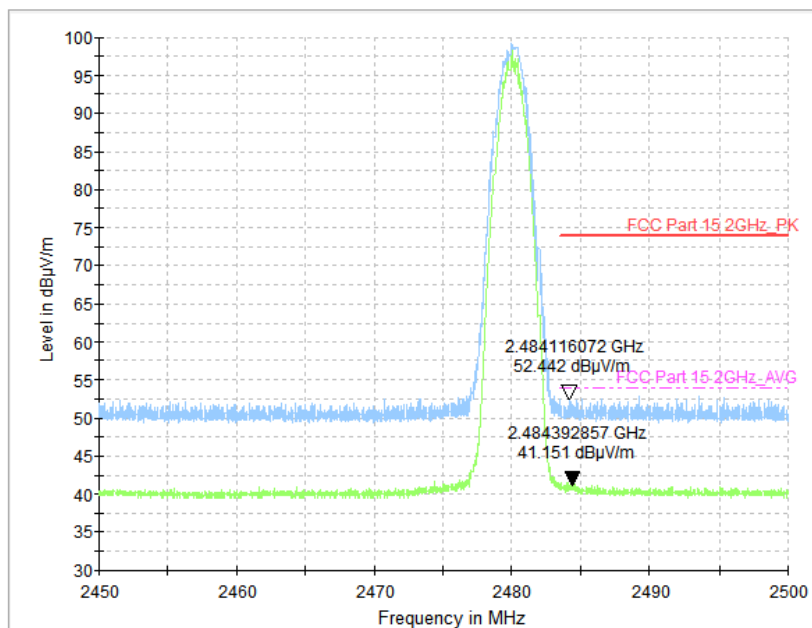


Fig. 48 Radiated Band Edges ( $\pi/4$  DQPSK, CH78, 2450GHz~2500GHz)

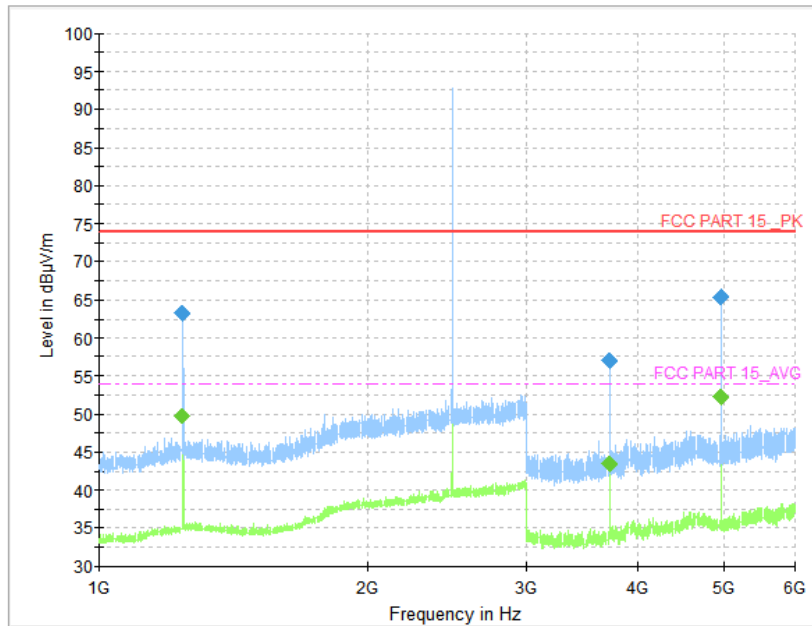


Fig. 49 Radiated Spurious Emission (8DPSK, CH0, 1 GHz ~6 GHz)

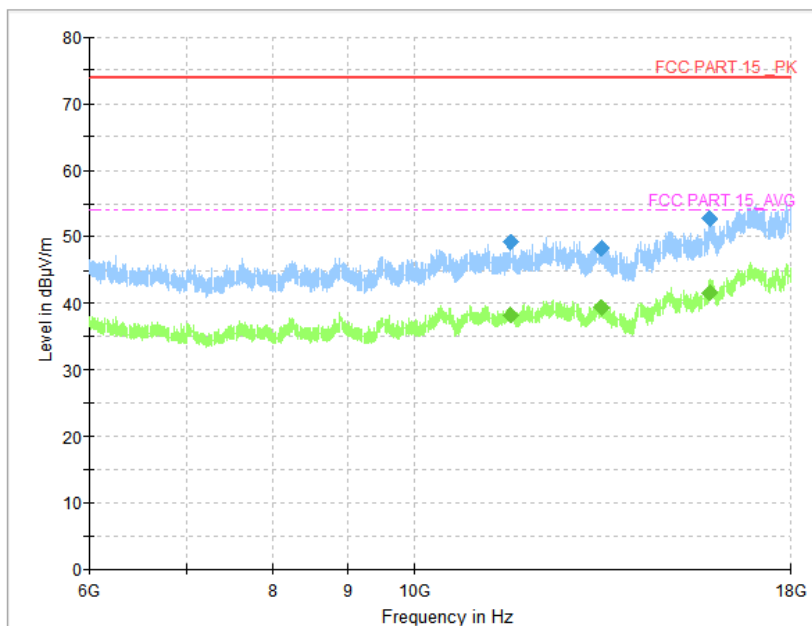


Fig. 50 Radiated Spurious Emission (8DPSK, CH0, 6 GHz ~18 GHz)



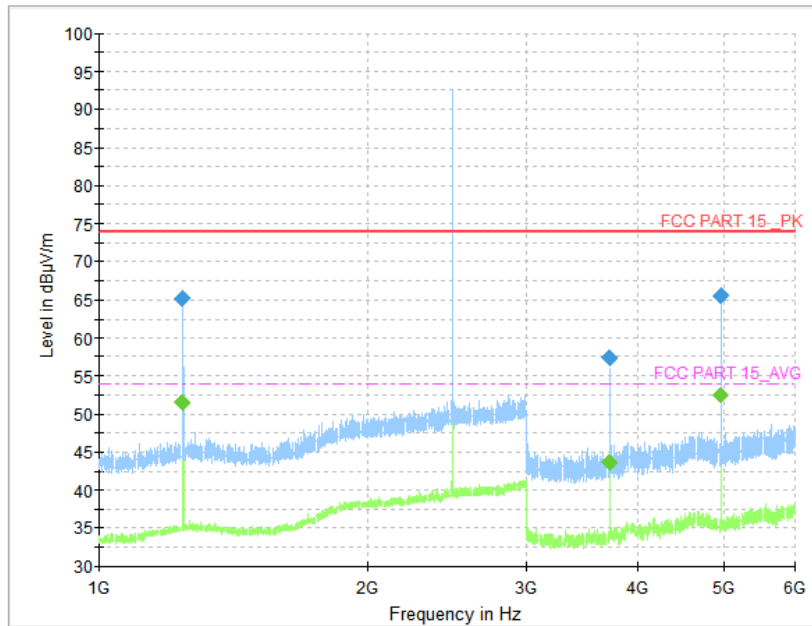


Fig. 51 Radiated Spurious Emission (8DPSK, CH39, 1 GHz ~6 GHz)



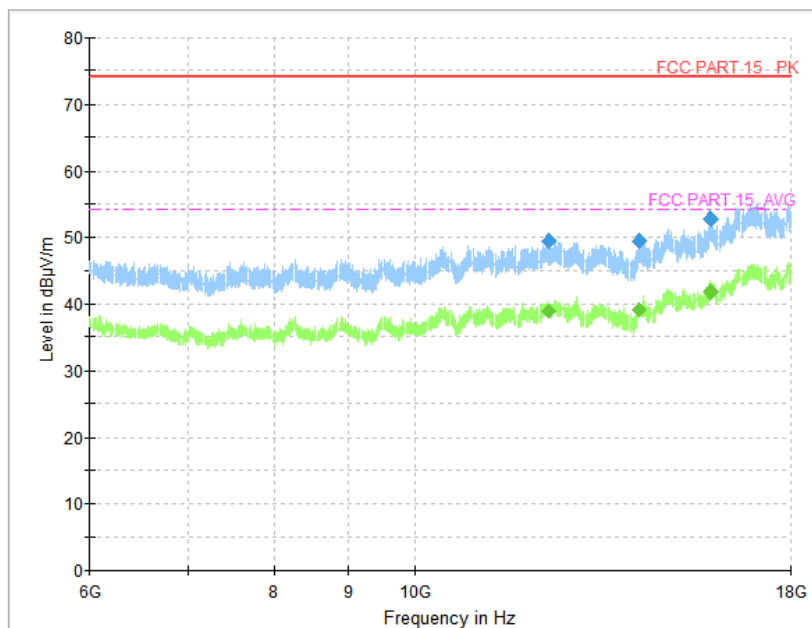


Fig. 52 Radiated Spurious Emission (8DPSK, CH39, 6 GHz ~18 GHz)

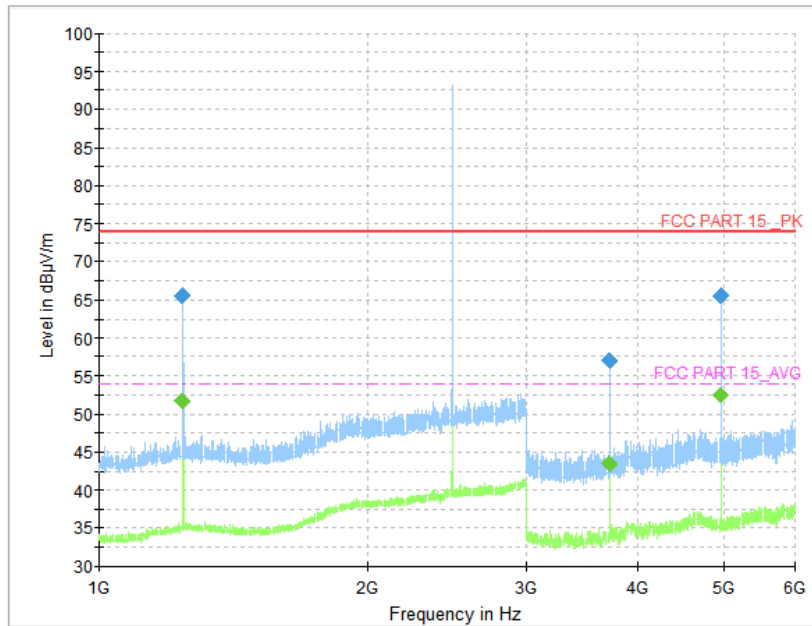

**Fig. 53 Radiated Spurious Emission (8DPSK, CH78, 1 GHz ~6 GHz)**

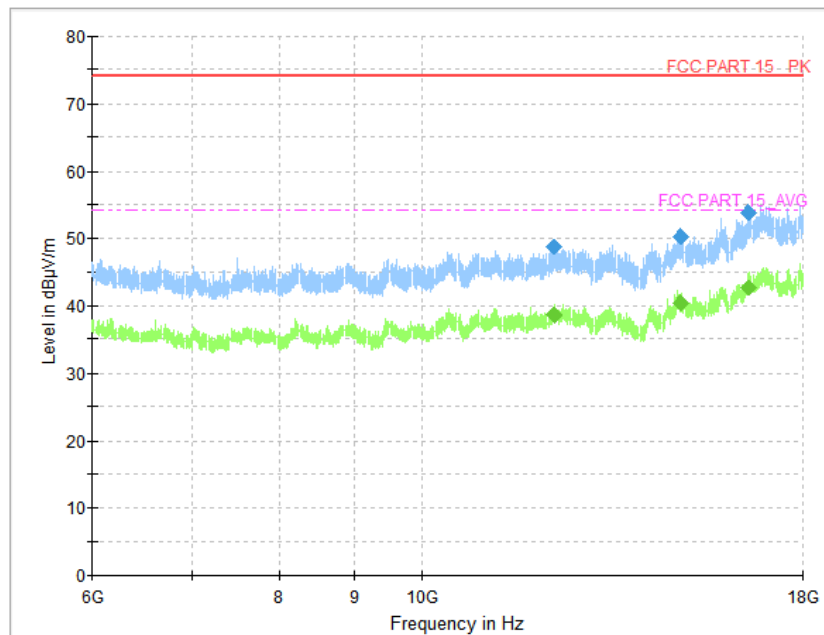

**Fig. 54 Radiated Spurious Emission (8DPSK, CH78, 6 GHz ~18 GHz)**

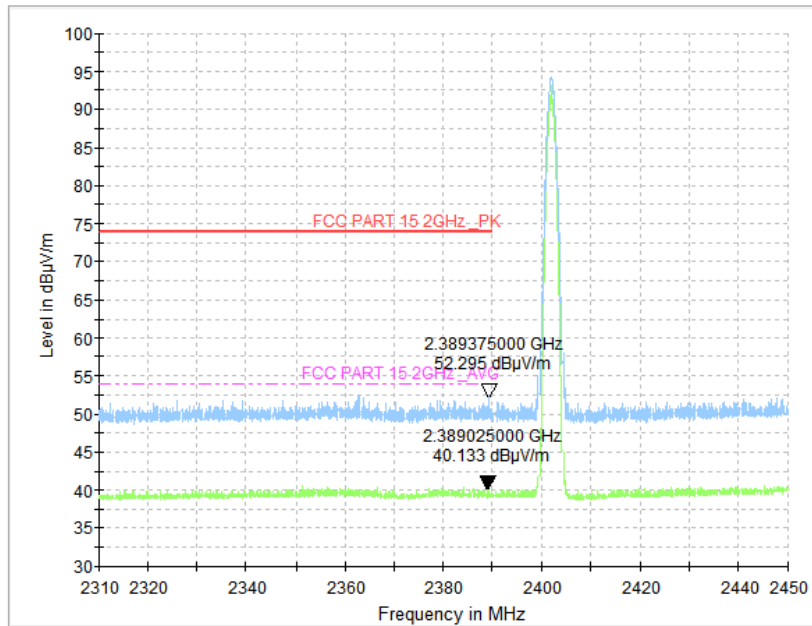


Fig. 55 Radiated Band Edges (8DPSK, CH0, 2380GHz~2450GHz)



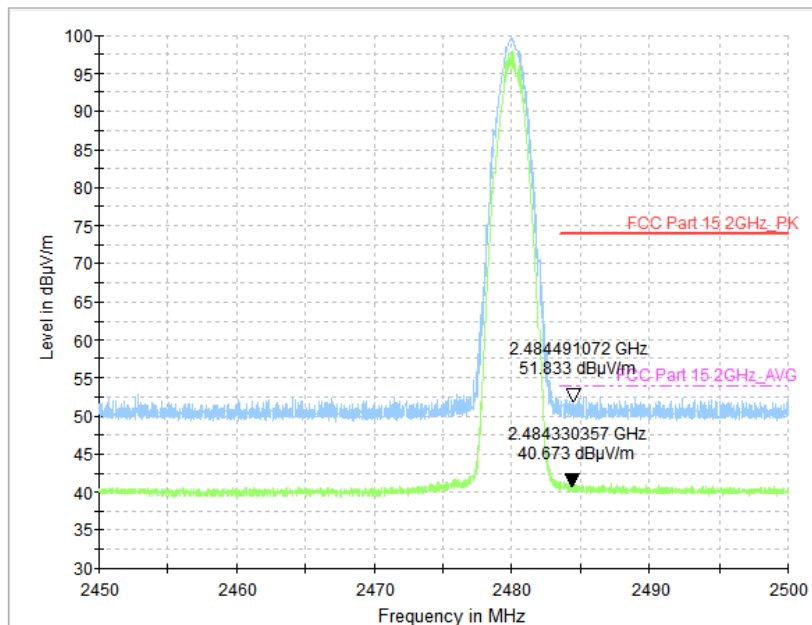



Fig. 56 Radiated Band Edges (8DPSK, CH78, 2450GHz~2500GHz)

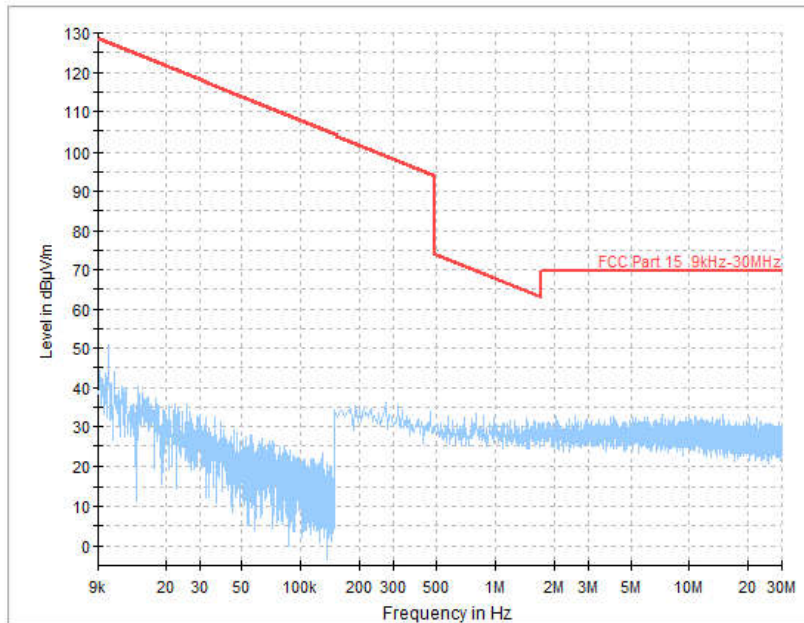

**Fig. 57 Radiated Spurious Emission (All Channels, 9 kHz ~30 MHz)**

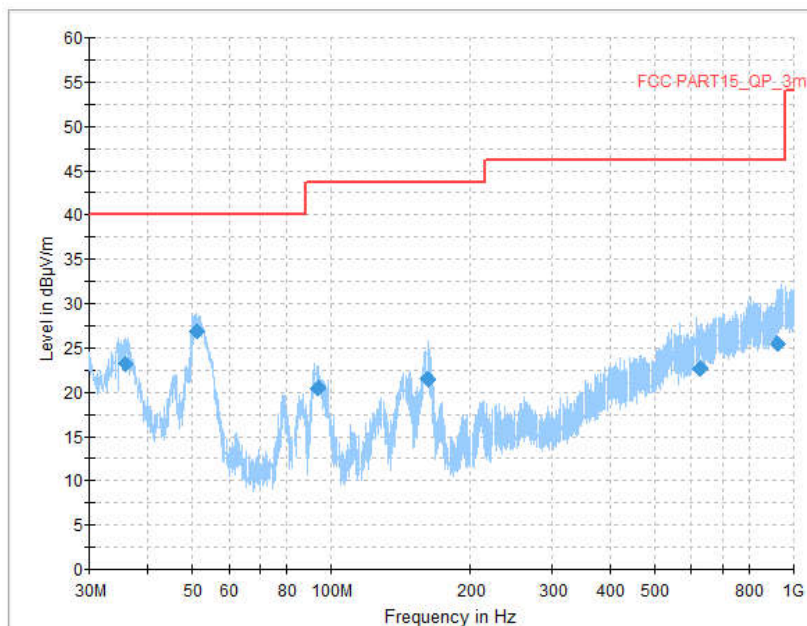

**Fig. 58 Radiated Spurious Emission (All Channels, 30 MHz ~1 GHz)**

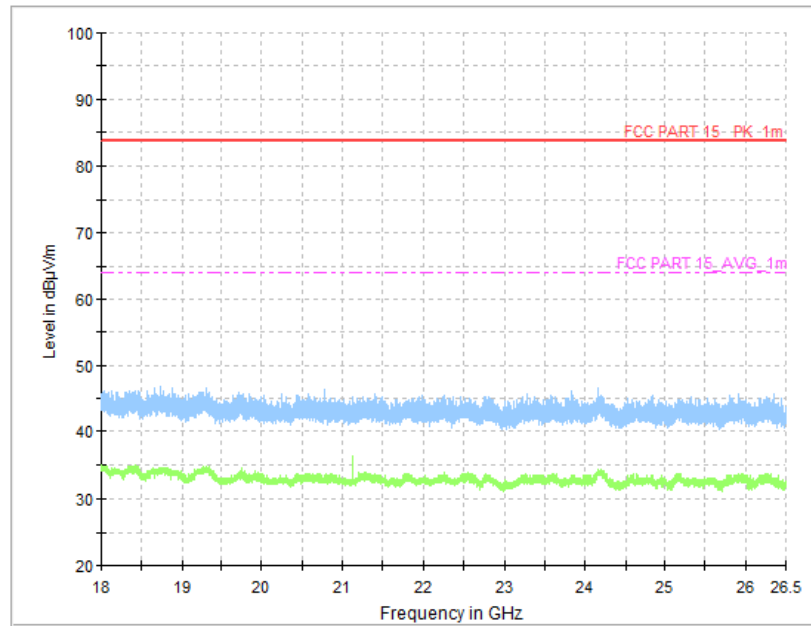

**Fig. 59 Radiated Spurious Emission (All Channels, 18 GHz ~26.5 GHz)**



**A.5 20dB Bandwidth**

**Method of Measurement: See ANSI C63.10-clause 7.8.7.**

**Measurement Limit:**

Standard	Limit (MHz)
FCC 47 CFR Part 15.247 (a)	/

**Measurement Result:**

Mode	Channel	20dB Bandwidth (KHz)		Conclusion
GFSK	0	Fig.60	1027.50	/
	39	Fig.61	1055.25	
	78	Fig.62	974.25	
$\pi/4$ DQPSK	0	Fig.63	1280.25	/
	39	Fig.64	1275.75	
	78	Fig.65	1279.50	
8DPSK	0	Fig.66	1269.75	/
	39	Fig.67	1287.00	
	78	Fig.68	1278.75	

**See below for test graphs.**

**Conclusion: PASS**

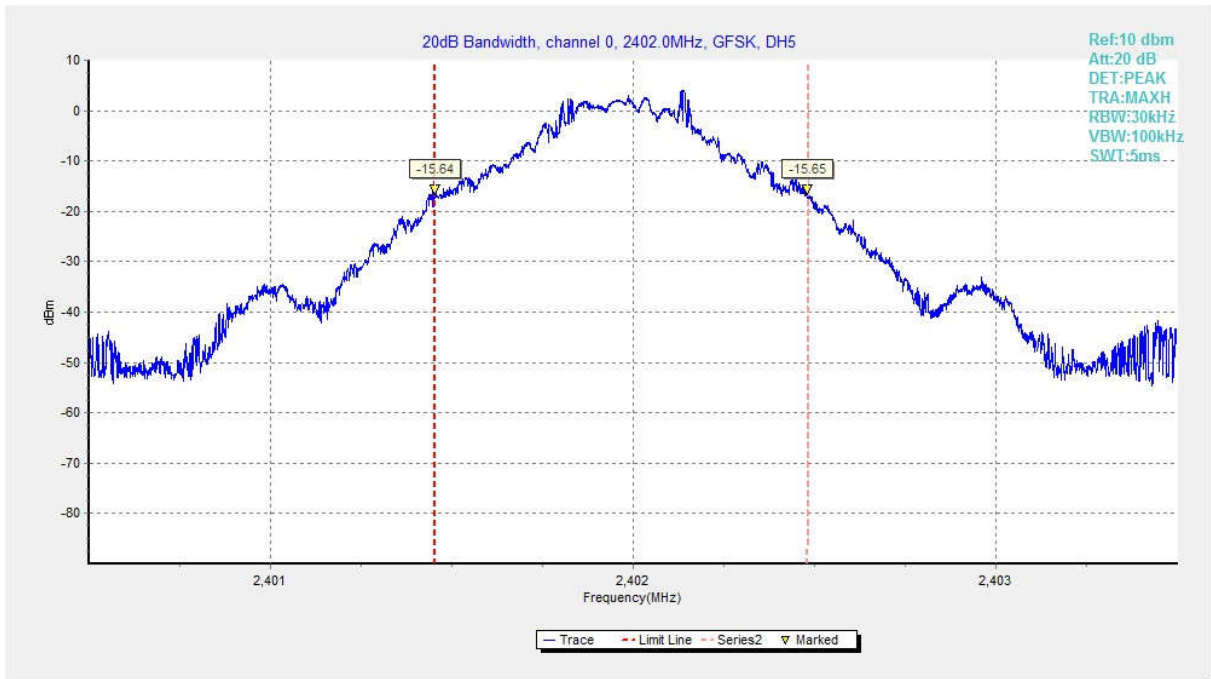


Fig. 60 20dB Bandwidth (GFSK, CH0)

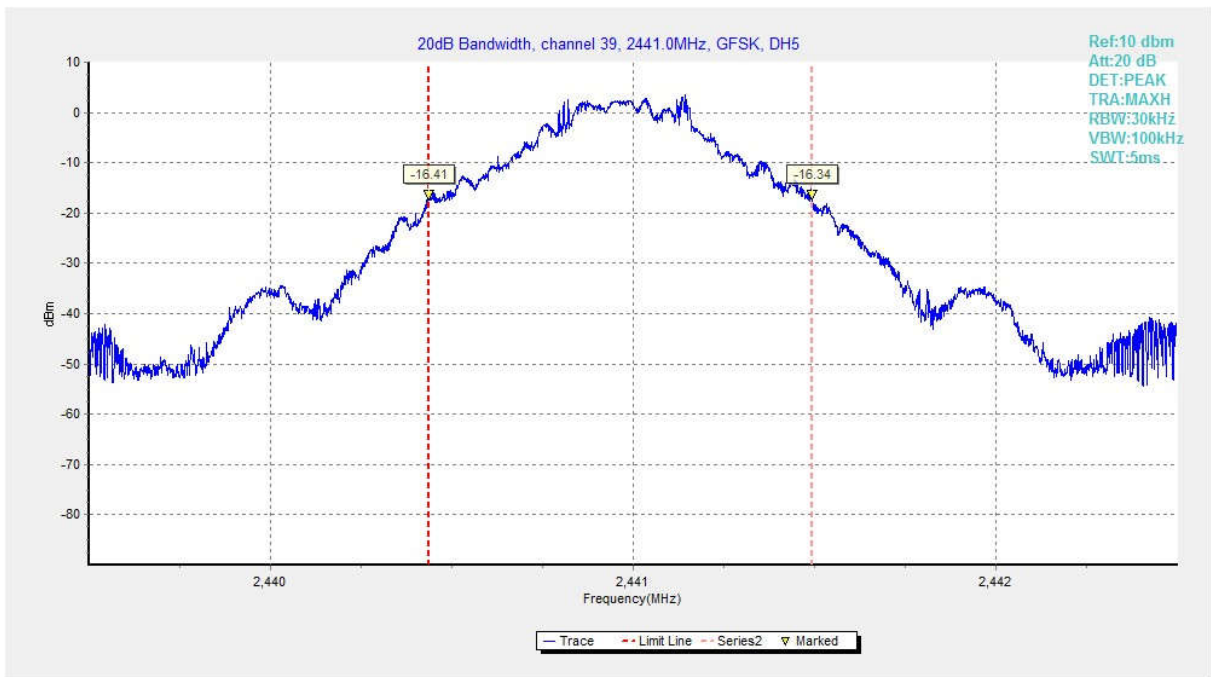


Fig. 61 20dB Bandwidth (GFSK, CH39)



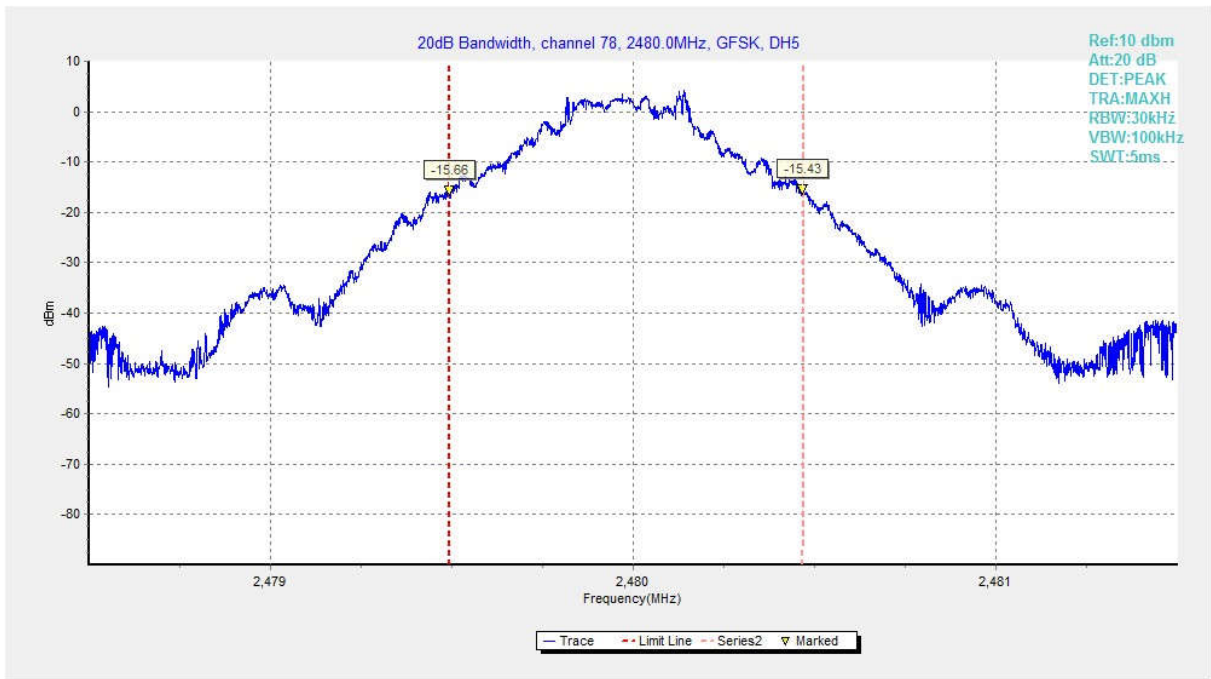


Fig. 62 20dB Bandwidth (GFSK, CH78)

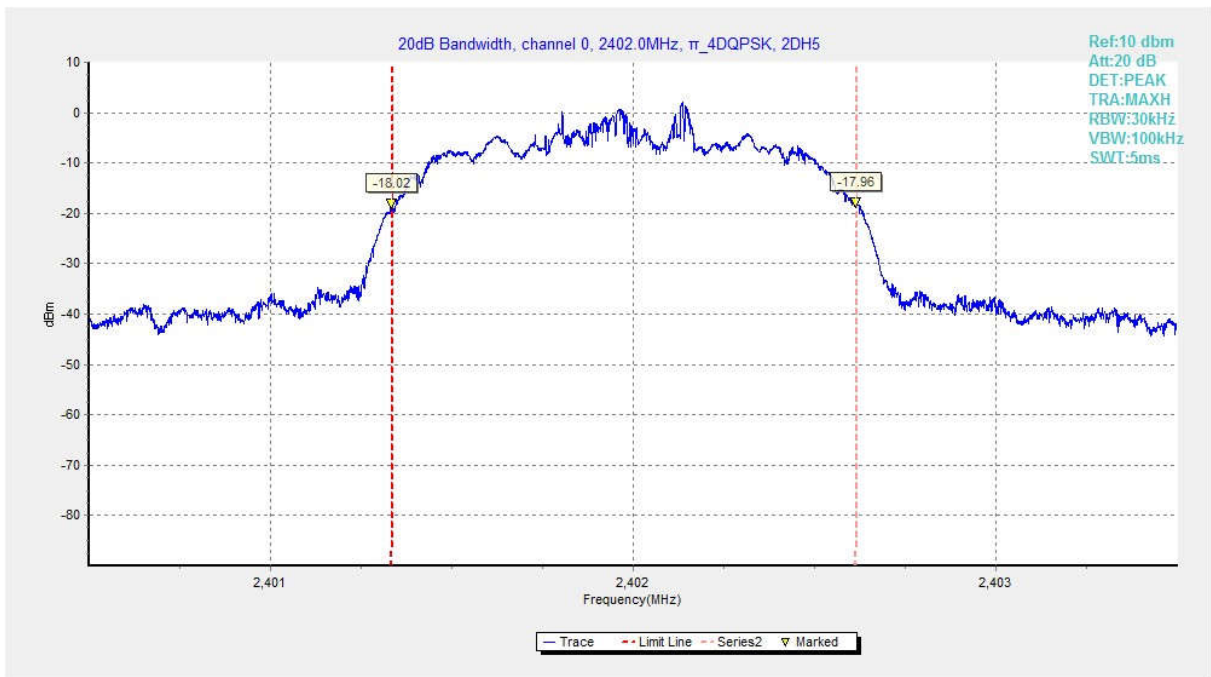


Fig. 63 20dB Bandwidth ( $\pi/4$  DQPSK, CH0)

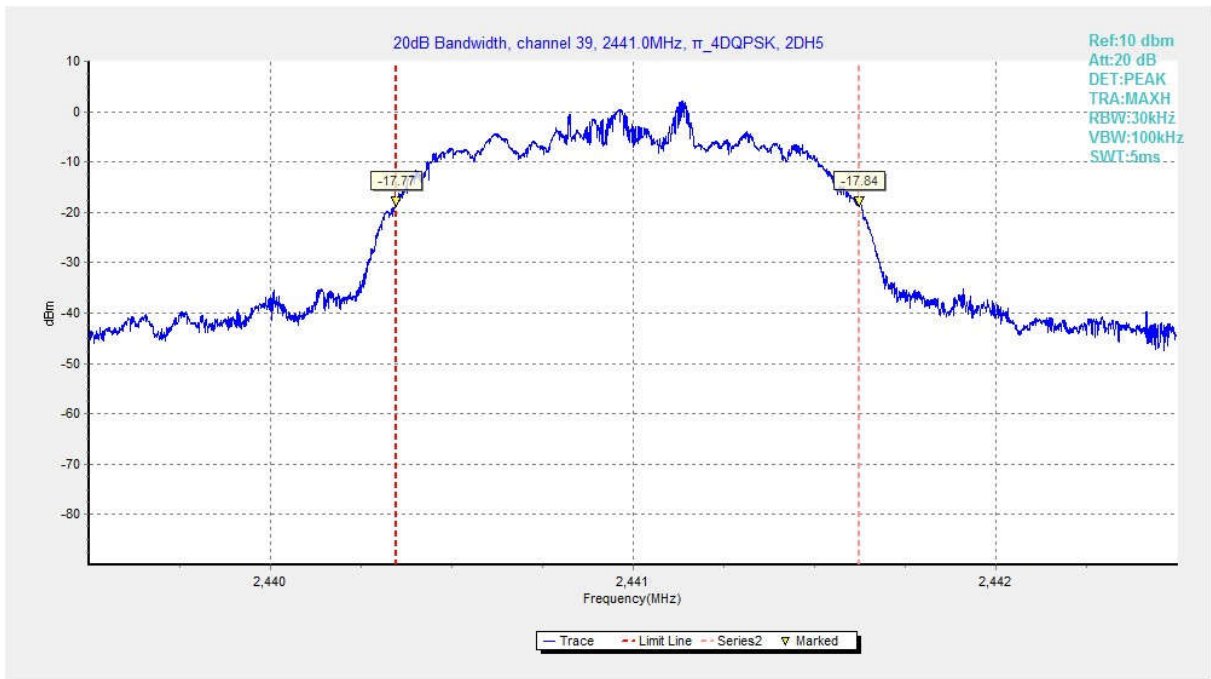


Fig. 64 20dB Bandwidth ( $\pi/4$  DQPSK, CH39)

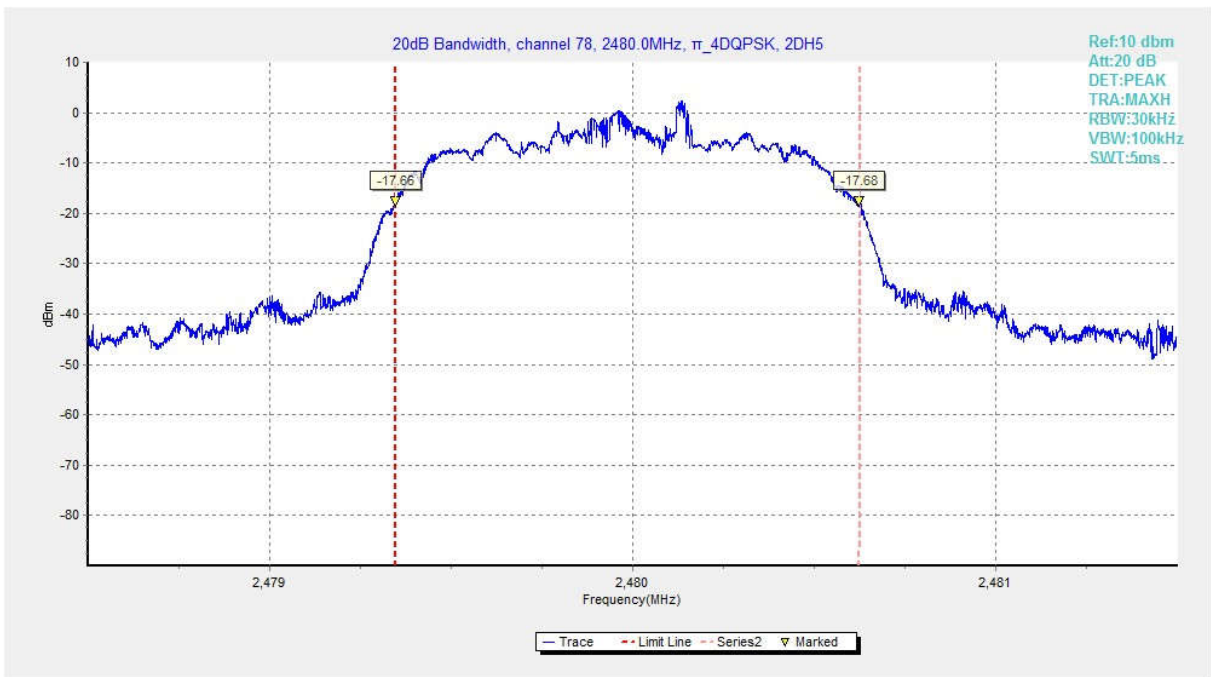


Fig. 65 20dB Bandwidth ( $\pi/4$  DQPSK, CH78)

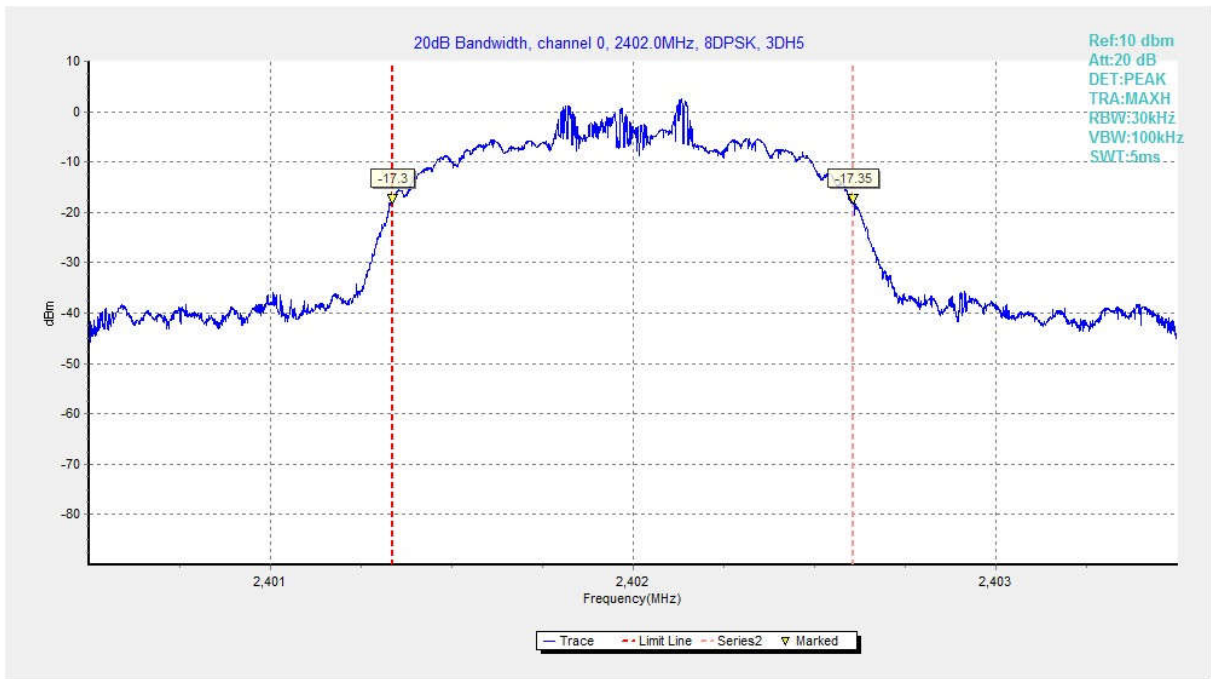


Fig. 66 20dB Bandwidth (8DPSK, CH0)

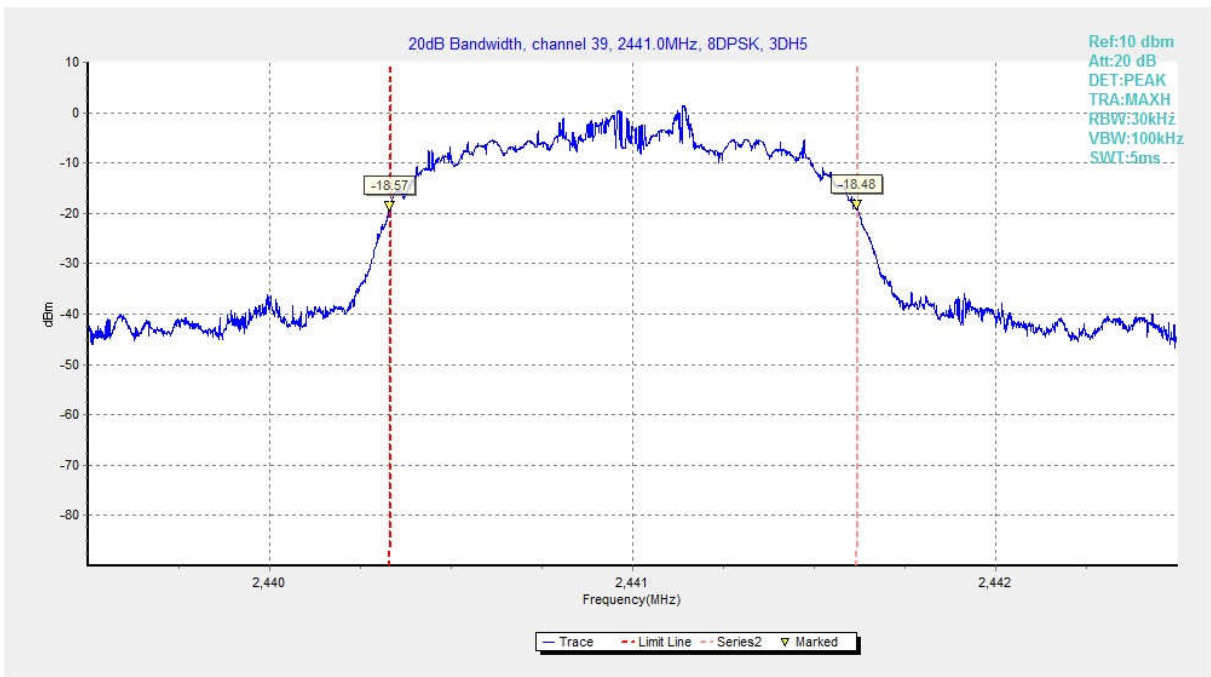


Fig. 67 20dB Bandwidth (8DPSK, CH39)

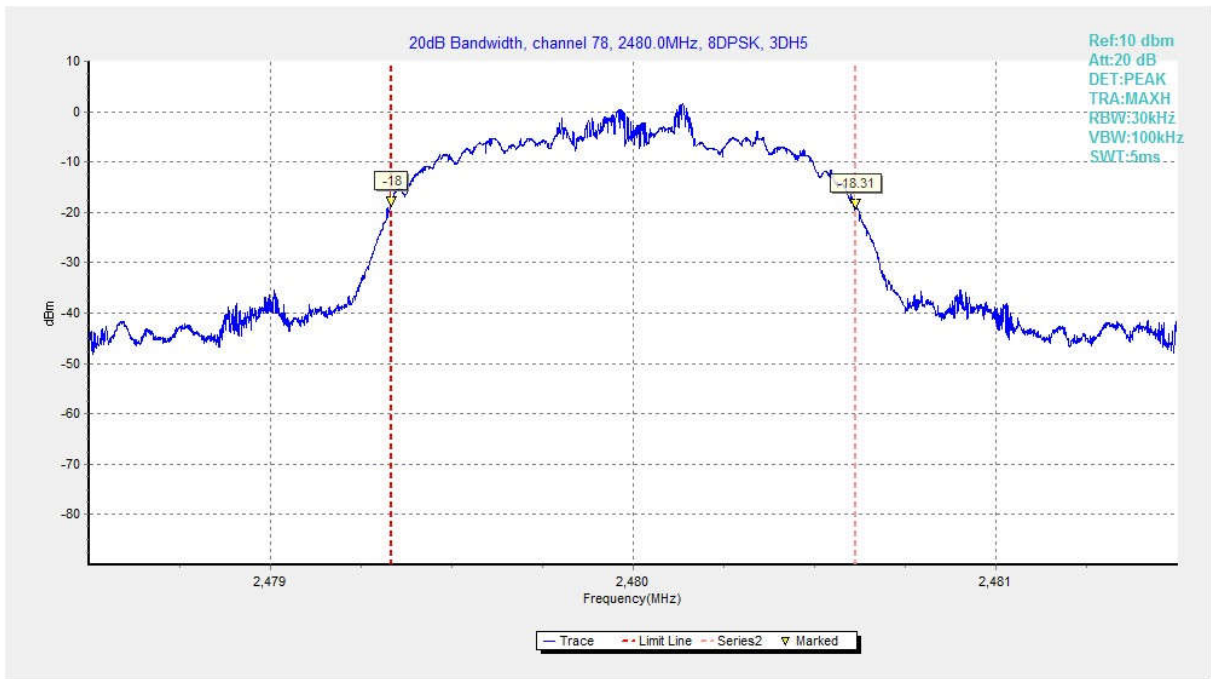


Fig. 68 20dB Bandwidth (8DPSK, CH78)



### A.6 Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	< 400 ms

Measurement Results:

Mode	Channel	Packet	Dwell Time(ms)		Conclusion
GFSK	39	DH5	Fig.69	311.24	<b>P</b>
			Fig.70		
$\pi/4$ DQPSK	39	2-DH5	Fig.71	271.46	<b>P</b>
			Fig.72		
8DPSK	39	3-DH5	Fig.73	255.37	<b>P</b>
			Fig.74		

See below for test graphs.

Conclusion: Pass

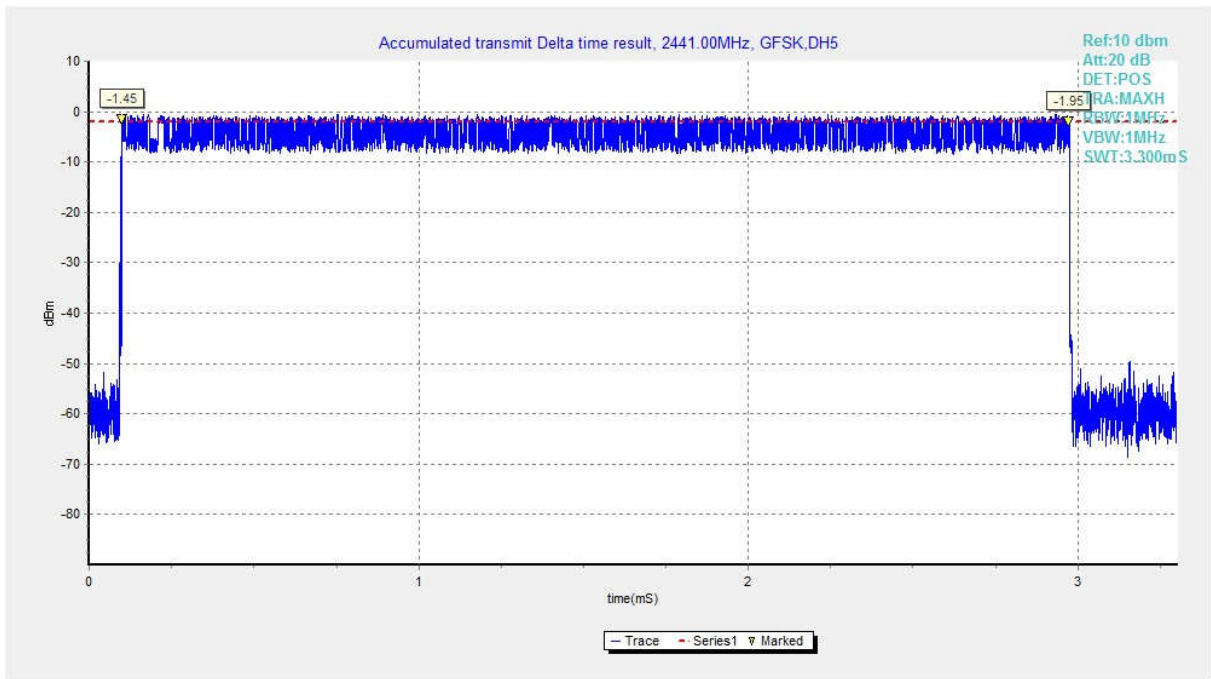


Fig. 69 Delta time (GFSK, CH39)

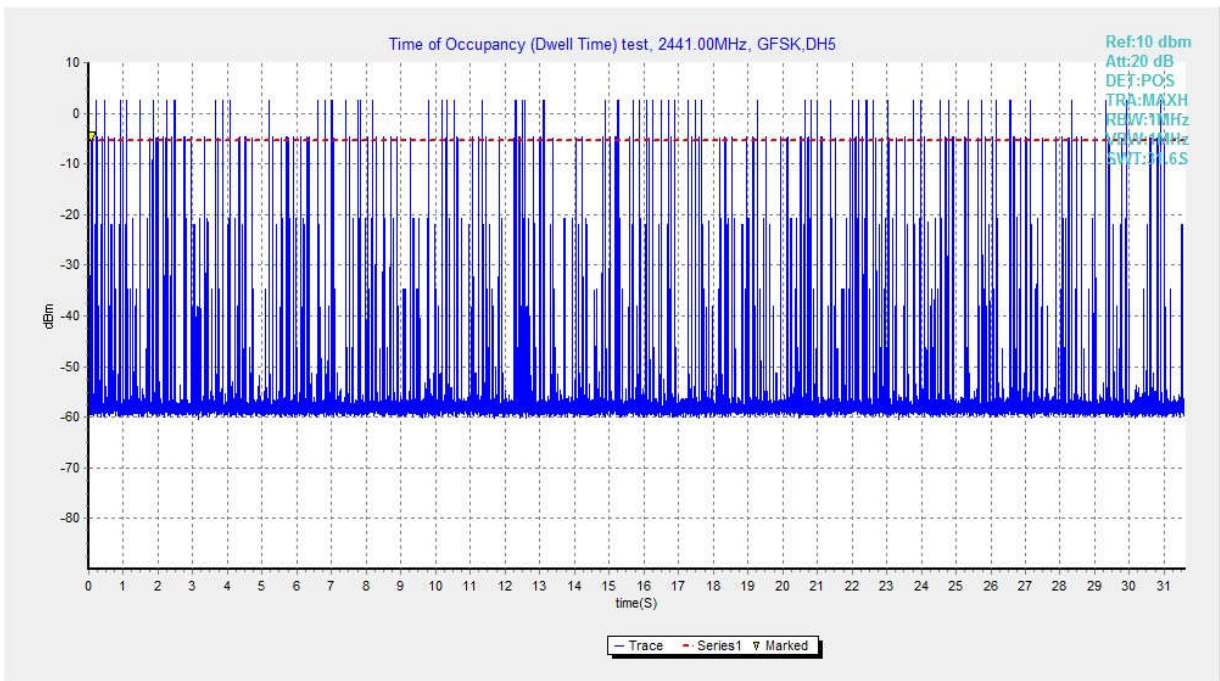


Fig. 70 Time of Occupancy (Dwell Time) (GFSK, CH39)



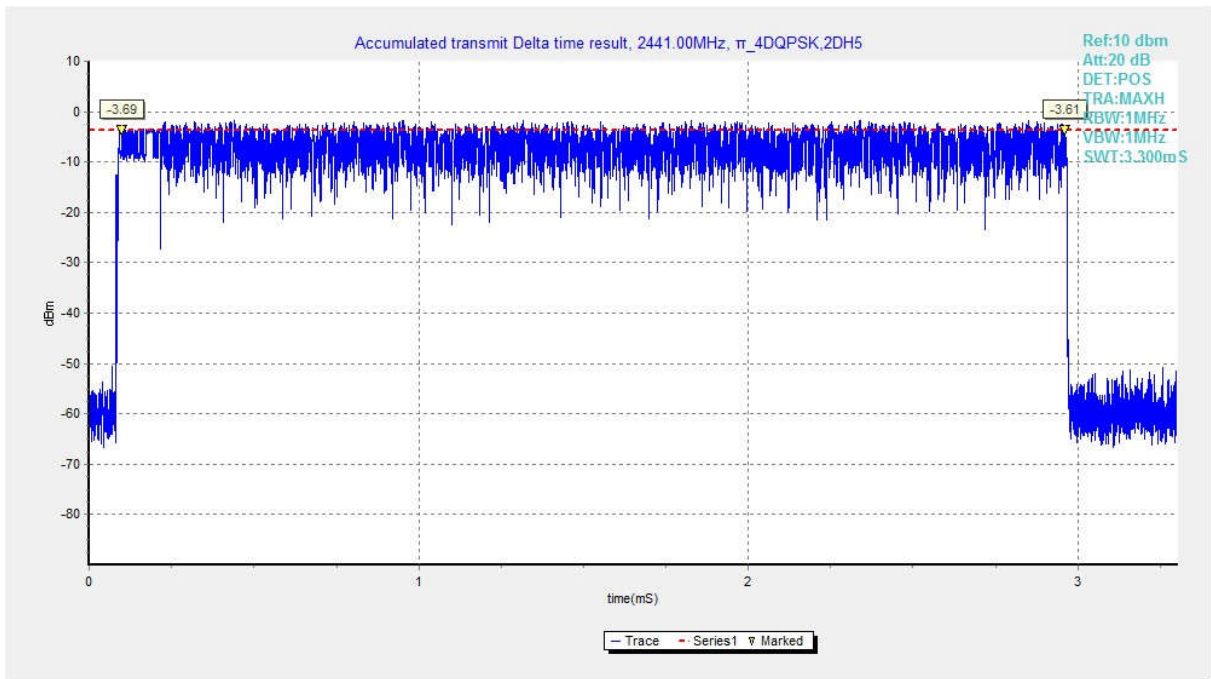


Fig. 71 Delta time ( $\pi/4$  DQPSK, CH39)

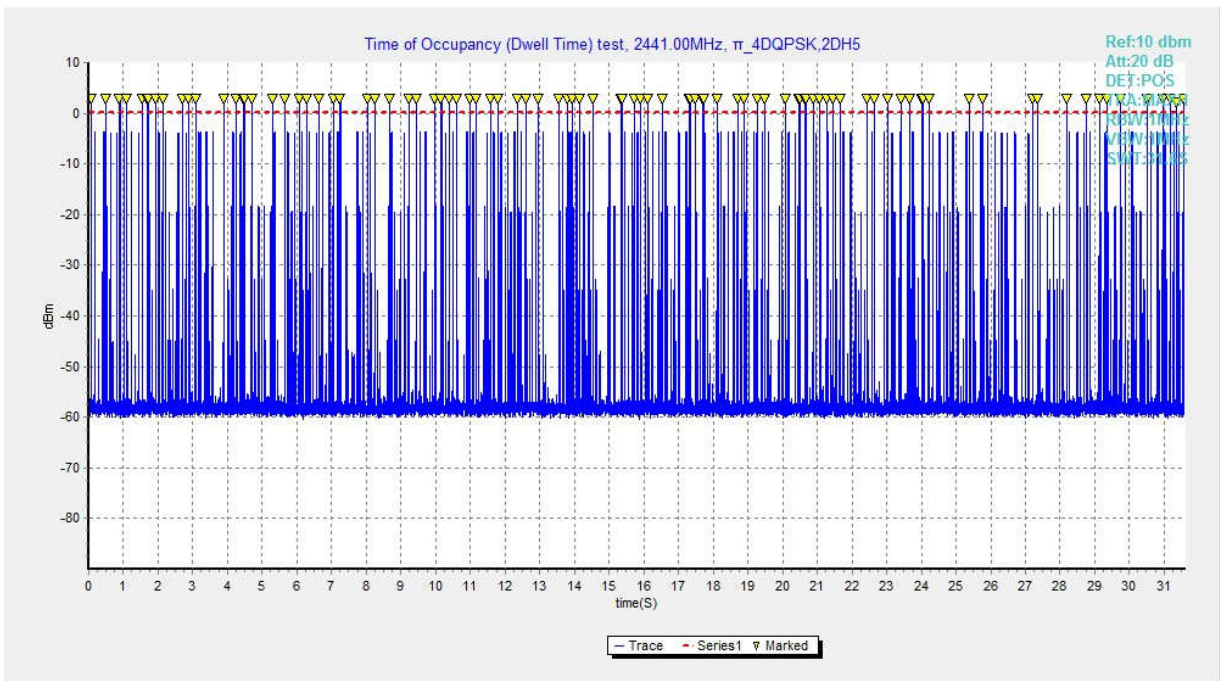


Fig. 72 Time of Occupancy (Dwell Time) ( $\pi/4$  DQPSK, CH39)



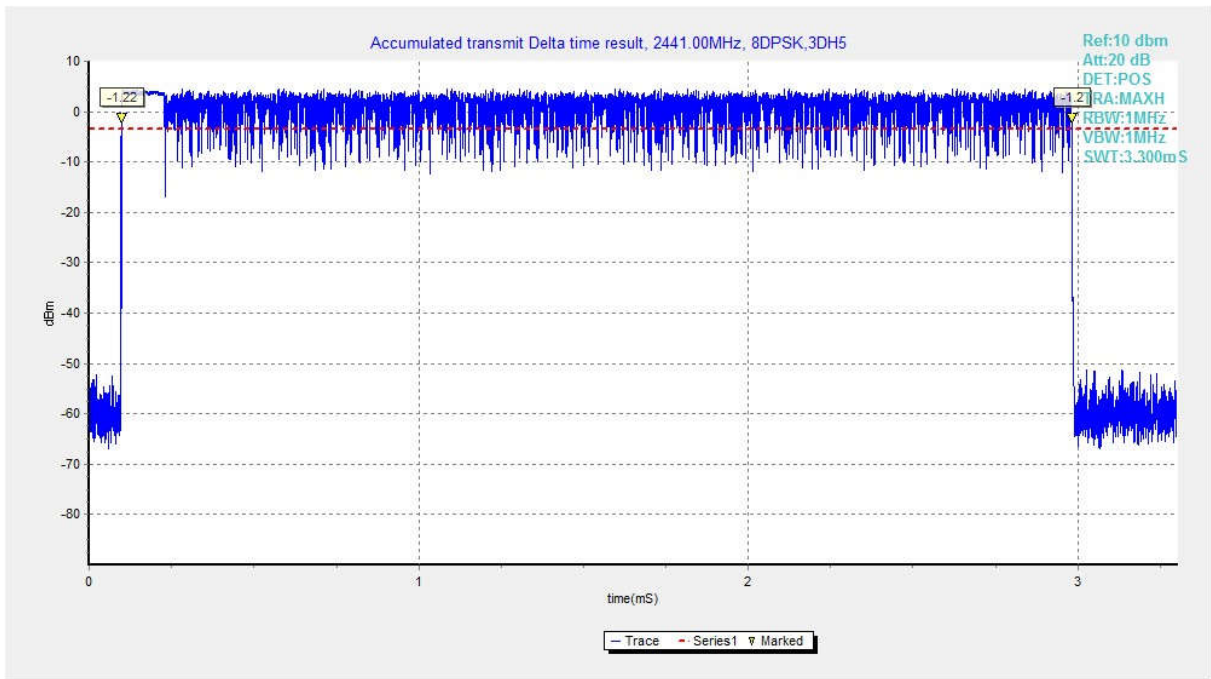


Fig. 73 Delta time (8DPSK, CH39)

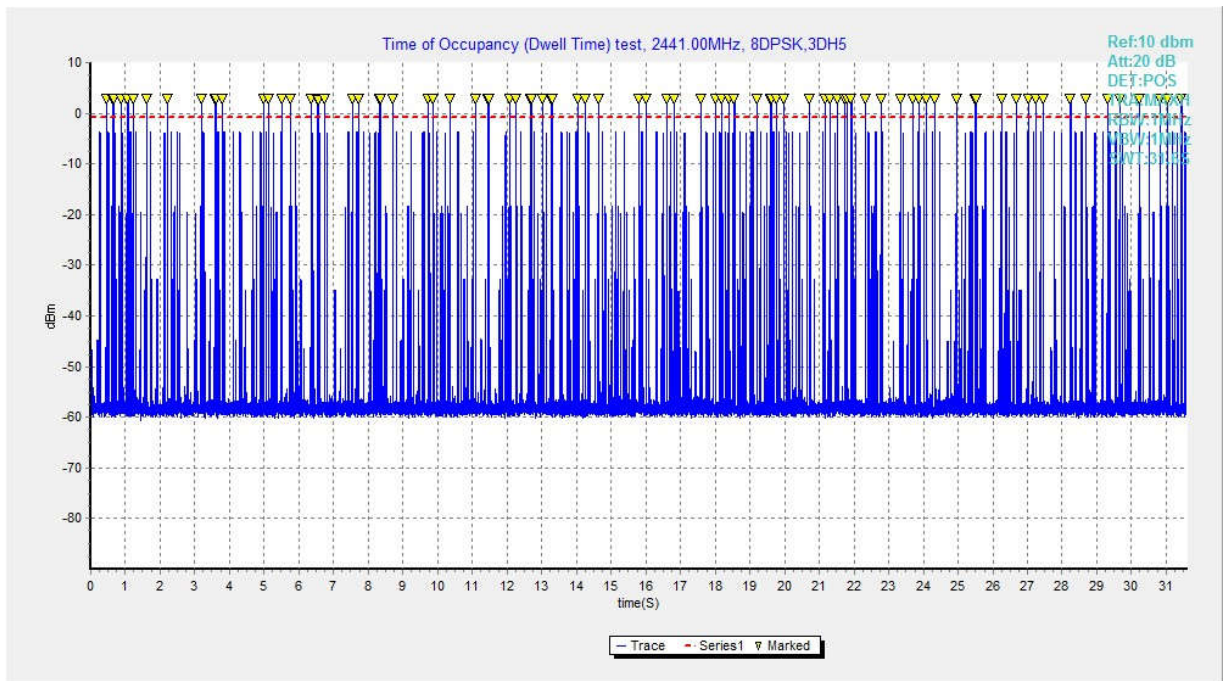


Fig. 74 Time of Occupancy (Dwell Time) (8DPSK, CH39)



### A.7 Number of Hopping Channels

**Method of Measurement:** See ANSI C63.10-clause 7.8.3.

**Measurement Limit:**

Standard	Limit (Num)
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

**Measurement Results:**

Mode	Packet	Number of hopping		Test result	Conclusion
GFSK	DH5	Fig.75	Fig.76	79	<b>P</b>
$\pi/4$ DQPSK	2-DH5	Fig.77	Fig.78	79	<b>P</b>
8DPSK	3-DH5	Fig.79	Fig.80	79	<b>P</b>

**See below for test graphs.**

**Conclusion: Pass**

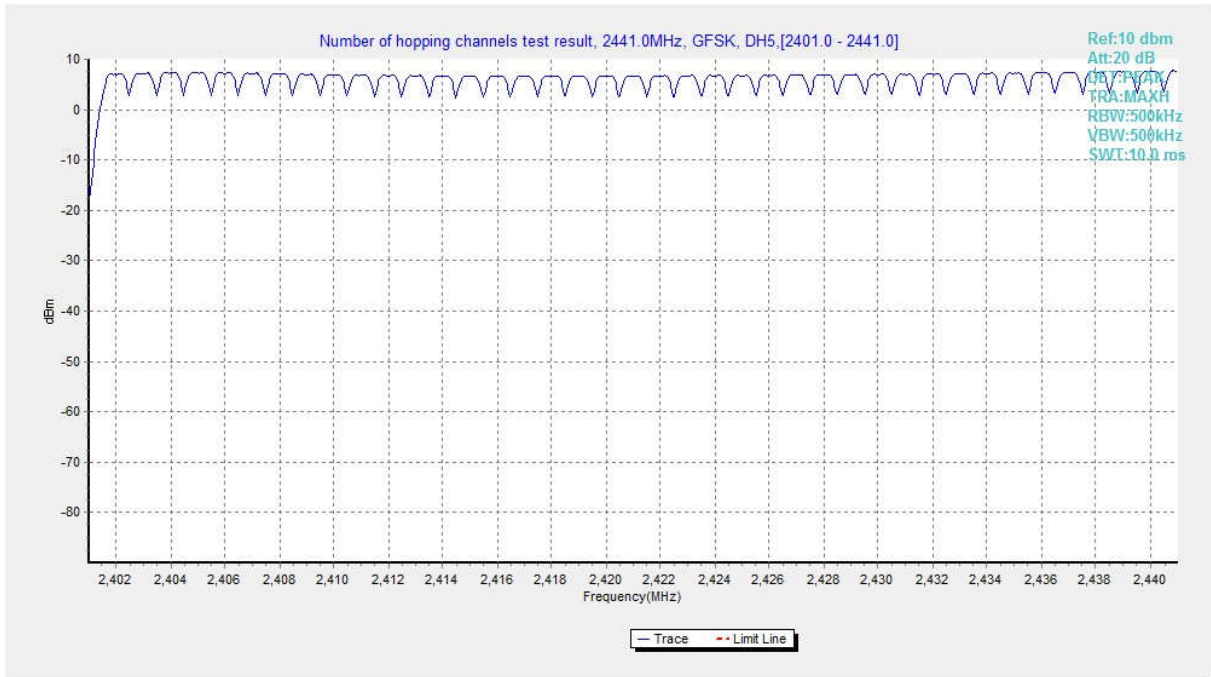


Fig. 75 Hopping channel ch0~39 (GFSK, Ch39)

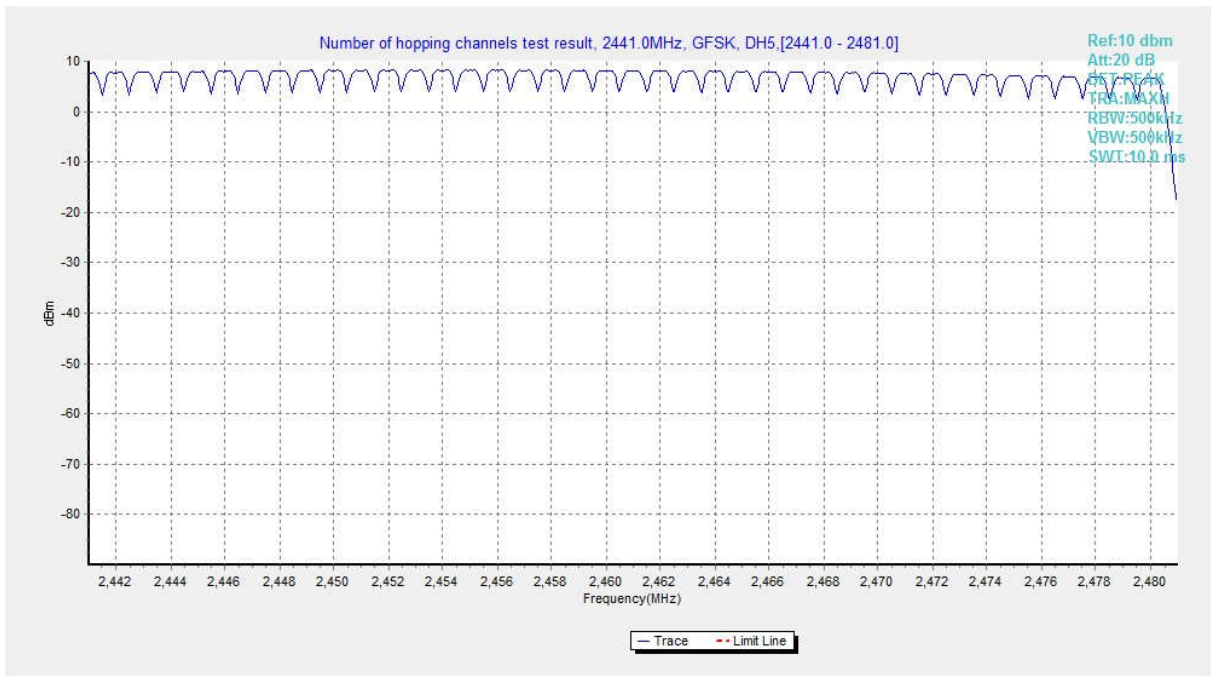


Fig. 76 Hopping channel ch39~78 (GFSK, Ch39)

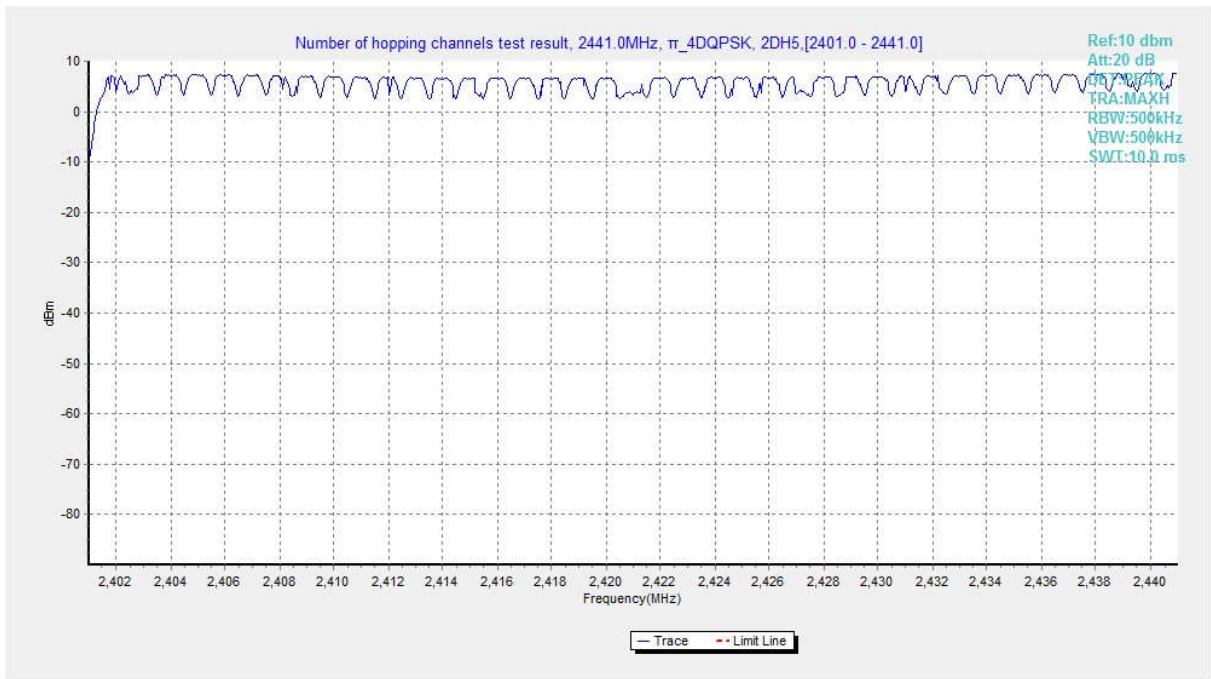


Fig. 77 Hopping channel ch0~39 ( $\pi$ /4 DQPSK, Ch39)

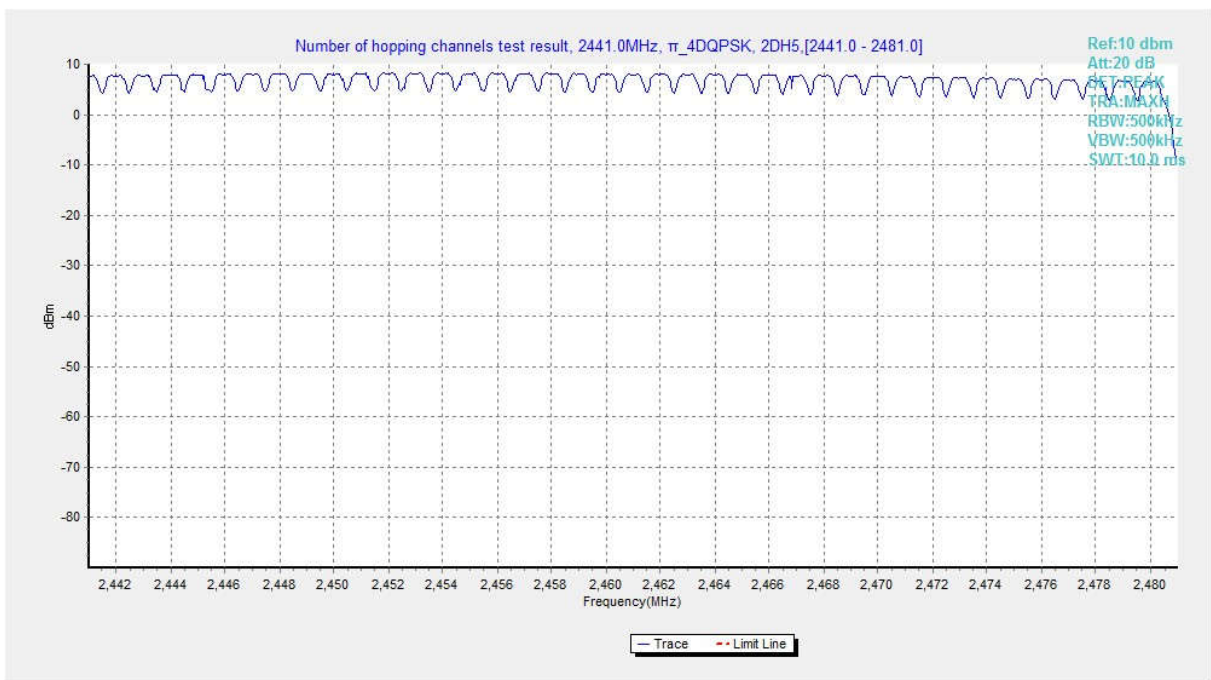


Fig. 78 Hopping channel ch39~78 ( $\pi$ /4 DQPSK, Ch39)



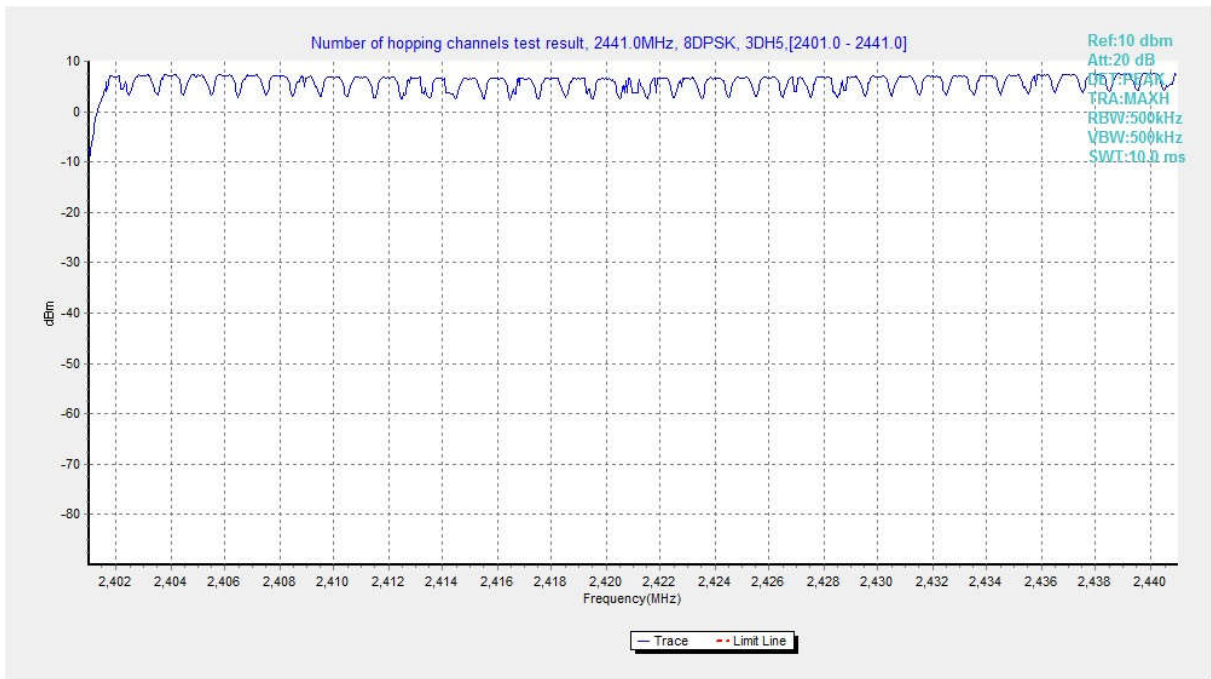


Fig. 79 Hopping channel ch0~39 (8DPSK, Ch39)

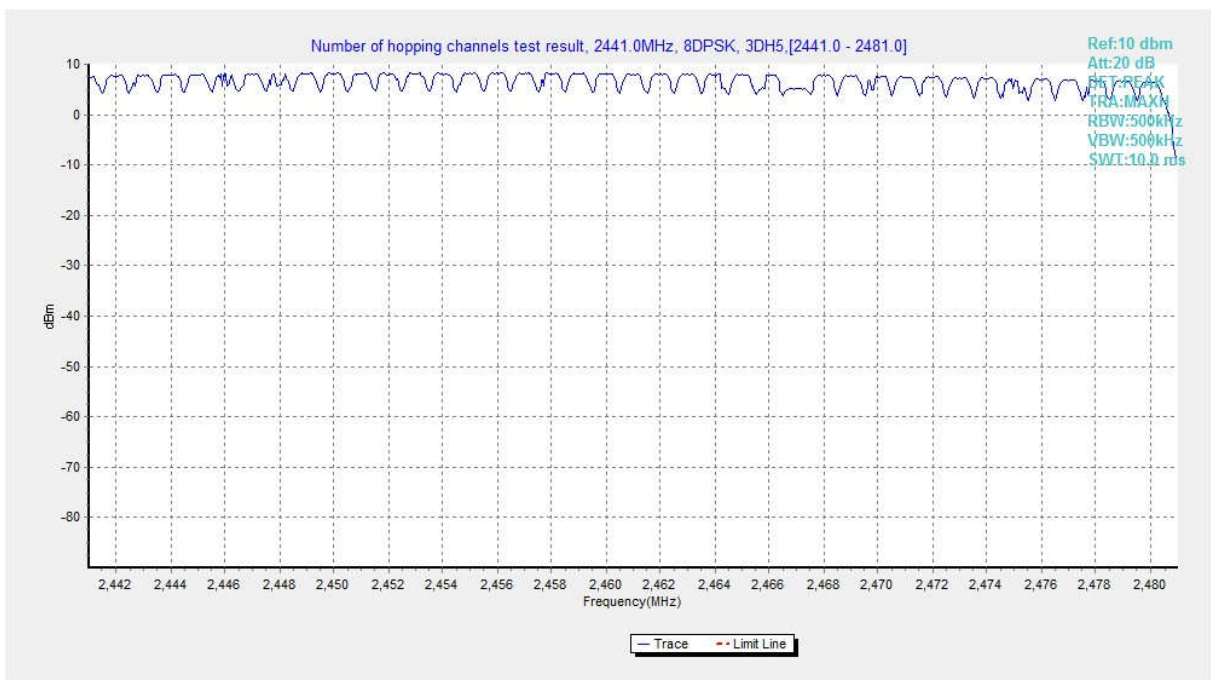


Fig. 80 Hopping channel ch39~78 (8DPSK, Ch39)

### A.8 Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (kHz)	Conclusion
GFSK	39	DH5	Fig.81	974.00	<b>P</b>
$\pi/4$ DQPSK	39	2-DH5	Fig.82	1009.00	<b>P</b>
8DPSK	39	3-DH5	Fig.83	1000.00	<b>P</b>

See below for test graphs.

Conclusion: Pass

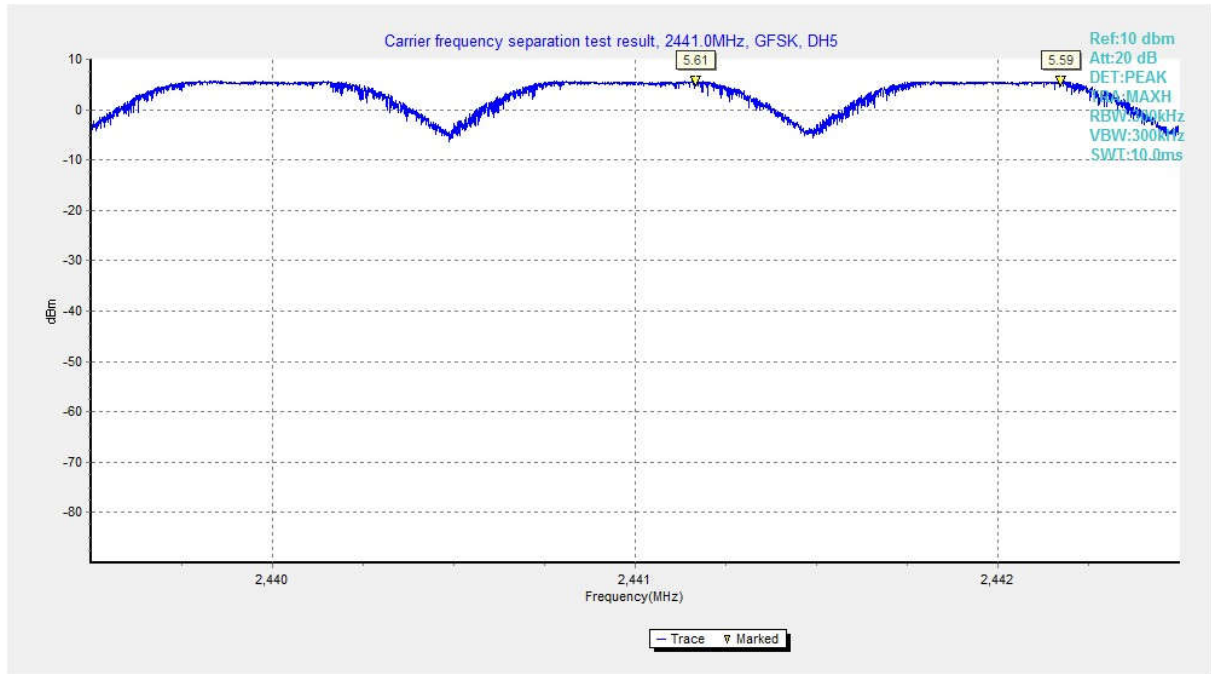


Fig. 81 Carrier Frequency Separation (GFSK, CH39)

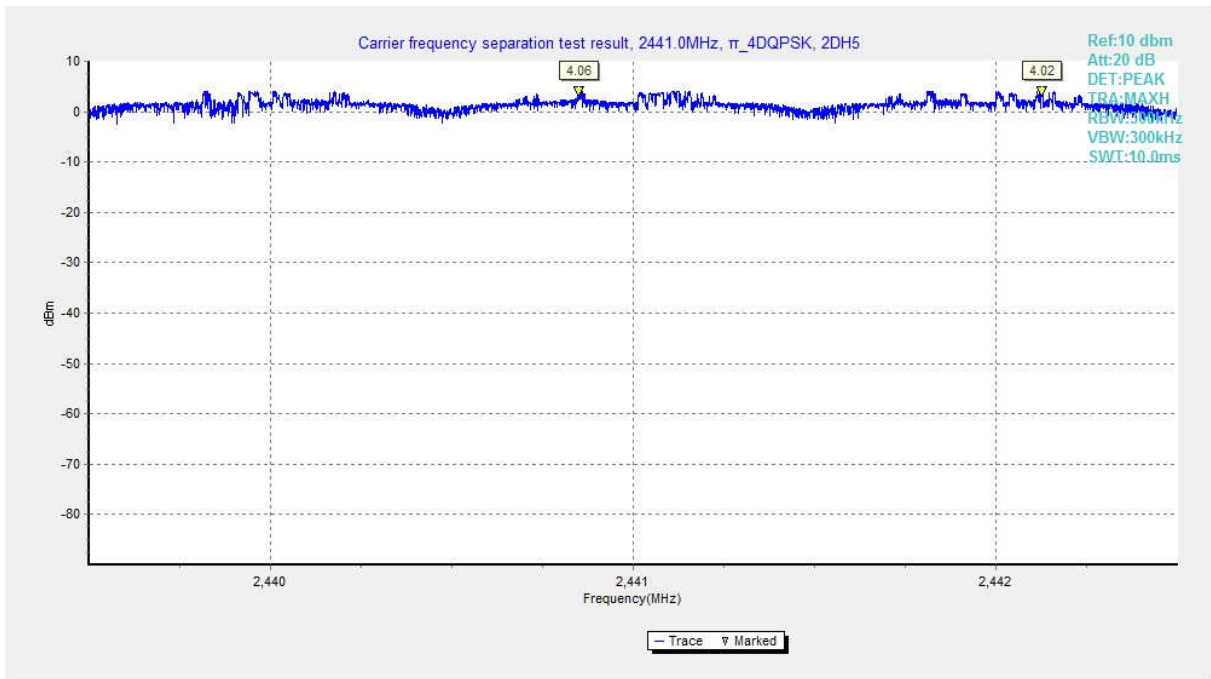


Fig. 82 Carrier Frequency Separation ( $\pi/4$  DQPSK, CH39)

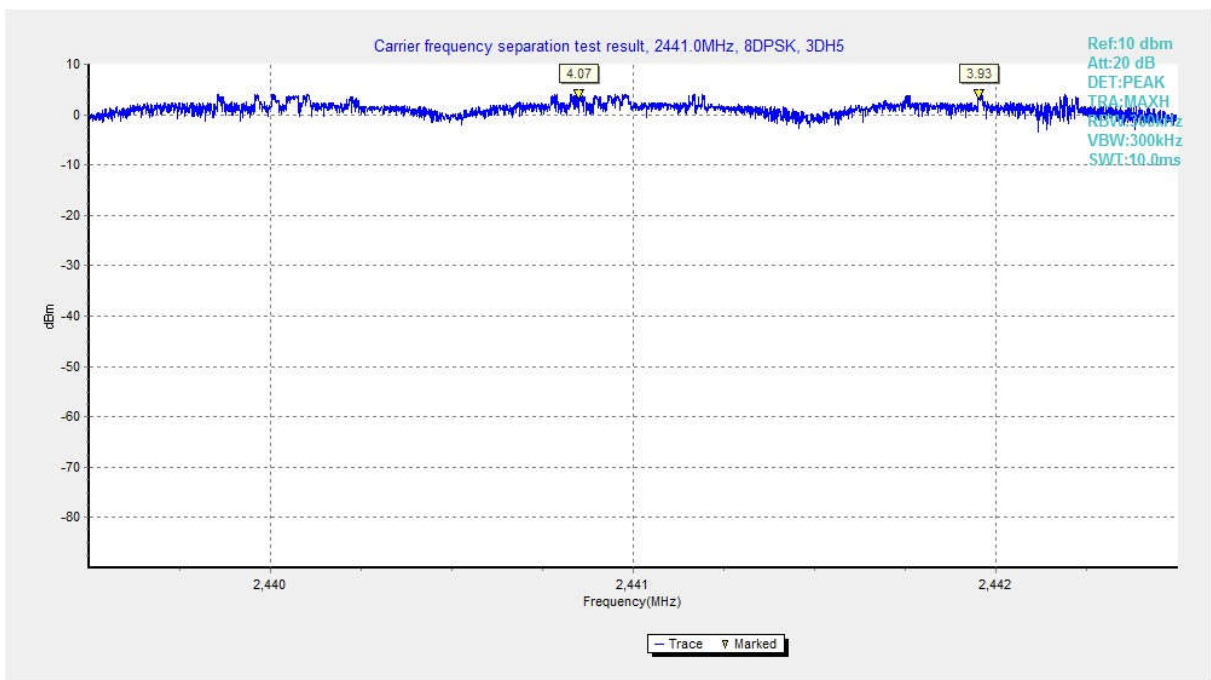


Fig. 83 Carrier Frequency Separation (8DPSK, CH39)





**A.9 AC Power line Conducted Emission**

**Method of Measurement: See ANSI C63.10-clause 6.2**

**Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

**BT- AE1, AE2, AE3**

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Average-peak Limit (dBµV)	Result (dBµV)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.84	Fig.85	<b>P</b>
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Note:** The measurement results include the L1 and N measurements.

**See below for test graphs.**

**Conclusion: Pass**

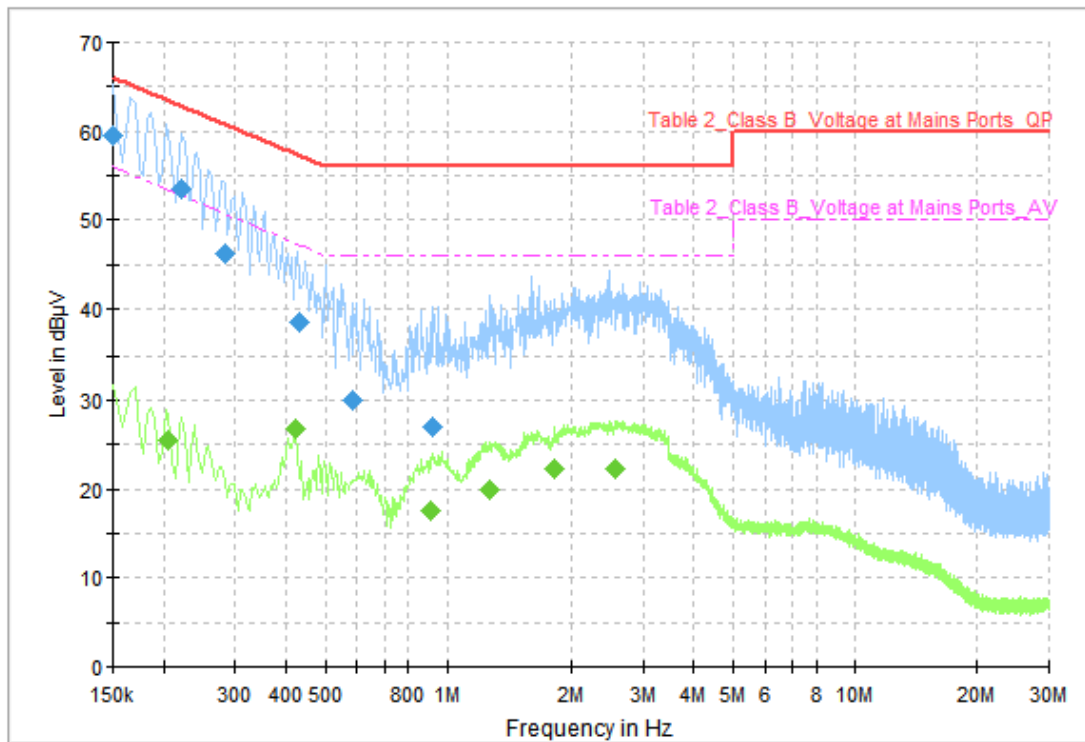


Fig. 84 AC Power line Conducted Emission (Traffic)

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	59.41	66.00	6.59	N	ON	10
0.222000	53.62	62.74	9.12	N	ON	10
0.282000	46.23	60.76	14.53	N	ON	10
0.430000	38.55	57.25	18.70	N	ON	10
0.586000	29.88	56.00	26.12	N	ON	10
0.922000	26.87	56.00	29.13	N	ON	10

**Measurement Results: Average**

Frequency (MHz)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.206000	25.37	53.37	28.00	N	ON	10
0.422000	26.73	47.41	20.68	N	ON	10
0.906000	17.64	46.00	28.36	N	ON	10
1.274000	19.89	46.00	26.11	N	ON	10
1.814000	22.25	46.00	23.75	N	ON	10
2.566000	22.29	46.00	23.71	N	ON	10

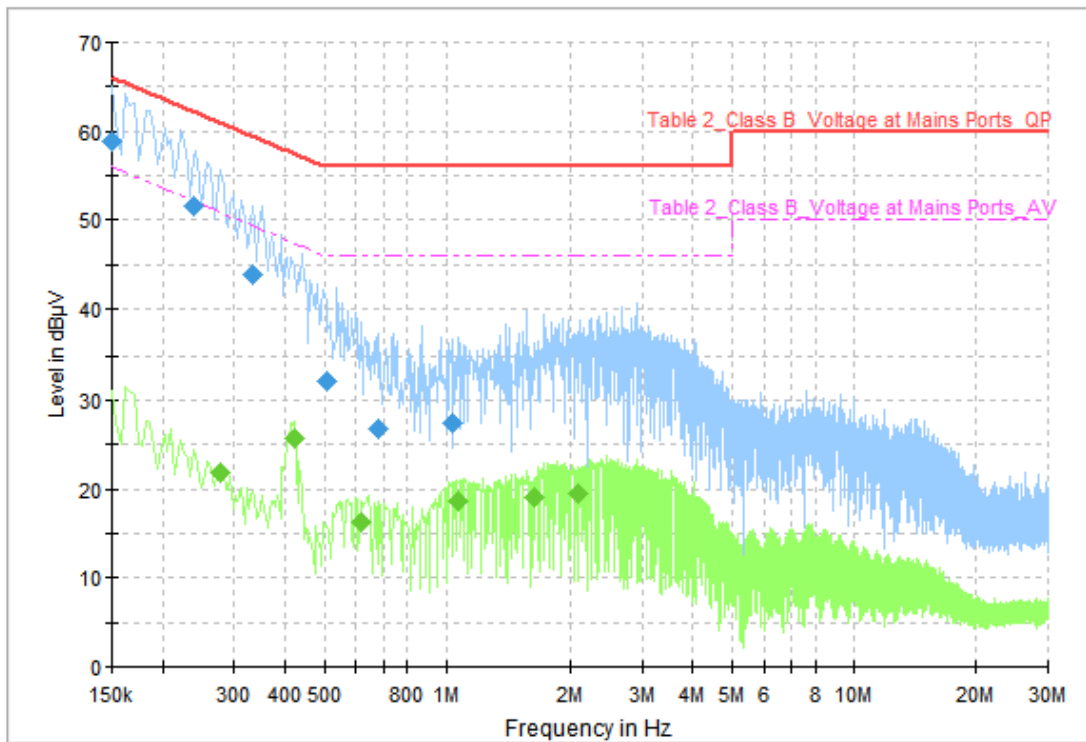


Fig. 85 AC Power line Conducted Emission (Idle)

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	58.90	66.00	7.10	N	ON	10
0.238000	51.52	62.17	10.64	N	ON	10
0.334000	43.96	59.35	15.39	N	ON	10
0.506000	32.13	56.00	23.87	N	ON	10
0.682000	26.84	56.00	29.16	N	ON	10
1.030000	27.41	56.00	28.59	N	ON	10

**Measurement Results: Average**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.278000	21.84	50.88	29.03	N	ON	10
0.422000	25.60	47.41	21.81	N	ON	10
0.618000	16.34	46.00	29.66	N	ON	10
1.074000	18.59	46.00	27.41	N	ON	10
1.634000	19.10	46.00	26.90	N	ON	10
2.082000	19.43	46.00	26.57	N	ON	10

\*\*\*END OF REPORT\*\*\*