



FCC PART 15C TEST REPORT No.I22Z61294-IOT05

for

TCL Communication Ltd.

Tablet PC

9183G

With

FCC ID: 2ACCJB185

Hardware Version: 05

Software Version: 9H5D

Issued Date: 2022-08-22

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z61294-IOT05	Rev.0	1st edition	2022-08-22

CONTENTS

CONTENTS	3
1. TEST LATORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	6
1.4. PROJECT DATE	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
3.4. GENERAL DESCRIPTION.....	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS	10
7. TEST EQUIPMENTS UTILIZED	11
8. MEASUREMENT UNCERTAINTY	12
8.1. TRANSMITTER OUTPUT POWER	12
8.2. PEAK POWER SPECTRAL DENSITY	12
8.3. OCCUPIED 6DB BANDWIDTH.....	12
8.4. BAND EDGES COMPLIANCE	12
8.5. SPURIOUS EMISSIONS	12
8.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: MEASUREMENT RESULTS.....	13
A.1. MEASUREMENT METHOD	13
A.2. MAXIMUM PEAK OUTPUT POWER	14
A.2.1 ANTENNA GAIN	14
A.2.2. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	14



A.3. PEAK POWER SPECTRAL DENSITY 16

A.4. OCCUPIED 6DB BANDWIDTH 17

A.5. TRANSMITTER SPURIOUS EMISSION 22

A.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED 22

A.6. BAND EDGES COMPLIANCE 34

A6.1 BAND EDGES - RADIATED 34

A.7. AC POWERLINE CONDUCTED EMISSION 39

ANNEX B: EUT PARAMETERS..... 42

ANNEX C: ACCREDITATION CERTIFICATE 42



1. TEST LABORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2022-07-05


Testing End Date: 2022-08-15

1.5. Signature




Xie Xiuzhen

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Pang Shuai

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Peter yang
Email: peter.yang@tcl.com
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3664 5759
Fax: +86 755 3661 2000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Peter yang
Email: peter.yang@tcl.com
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3664 5759
Fax: +86 755 3661 2000-81722

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	Tablet PC
Model name	9183G
FCC ID	2ACCJB185
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.8V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT05a	352506670201532	05	9H5D
UT01a	352506670201557	05	9H5D

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	/	/
AE2	USB Cable	/	/
AE3	Charger	/	/

AE1

Model	TLp078C1
Manufacturer	BYD
Capacity	8000mAh
Nominal Voltage	

AE2

Model	CDA0000128C2
Manufacturer	SHENGHUA
Length of cable	/

AE3

Model	QC13US
Manufacturer	BYD
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of Tablet PC with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	Test Receiver	ESCI	100344	R&S	1 year	2023-02-21
3	LISN	ENV216	101200	R&S	1 year	2023-06-29
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	R&S	1 year	2022-10-28
2	EMI Antenna	VULB 9163	302	SCHWARZBECK	1 year	2022-12-28
3	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2023-01-20

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.15
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

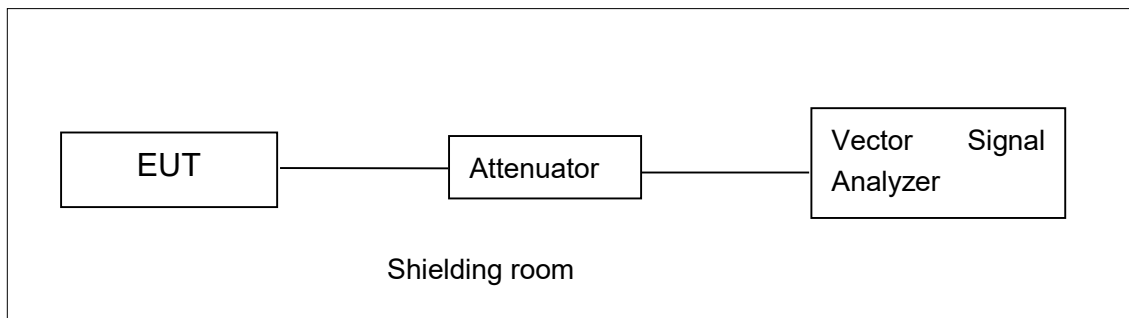


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

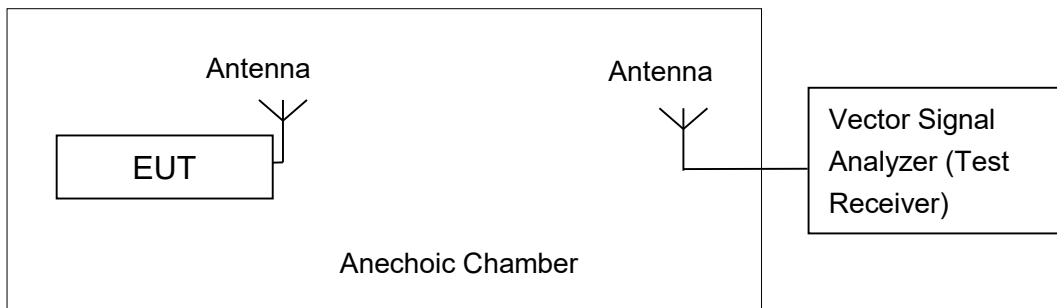

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1 Antenna Gain

Antenna gain is -0.5dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Peak Output Power-conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	11.35	11.42	11.27

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	11.45	11.52	11.32

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	10.45	10.55	10.43

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	10.51	10.37

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	9.49	9.53

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	7.25

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	-2.51	P
	157	-2.33	P
	165	-2.38	P
802.11n HT20	149	-1.76	P
	157	-1.67	P
	165	-1.82	P
802.11n HT40	151	-5.59	P
	159	-5.69	P
802.11ac HT80	155	-11.97	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11a	149	Fig.1	16.35	P
	157	Fig.2	16.35	P
	165	Fig.3	16.30	P
802.11n HT20	149	Fig.4	17.55	P
	157	Fig.5	17.55	P
	165	Fig.6	17.55	P
802.11n HT40	151	Fig.7	36.32	P
	159	Fig.8	36.08	P
802.11ac HT80	155	Fig.9	76.16	P

Conclusion: PASS

Test graphs as below:

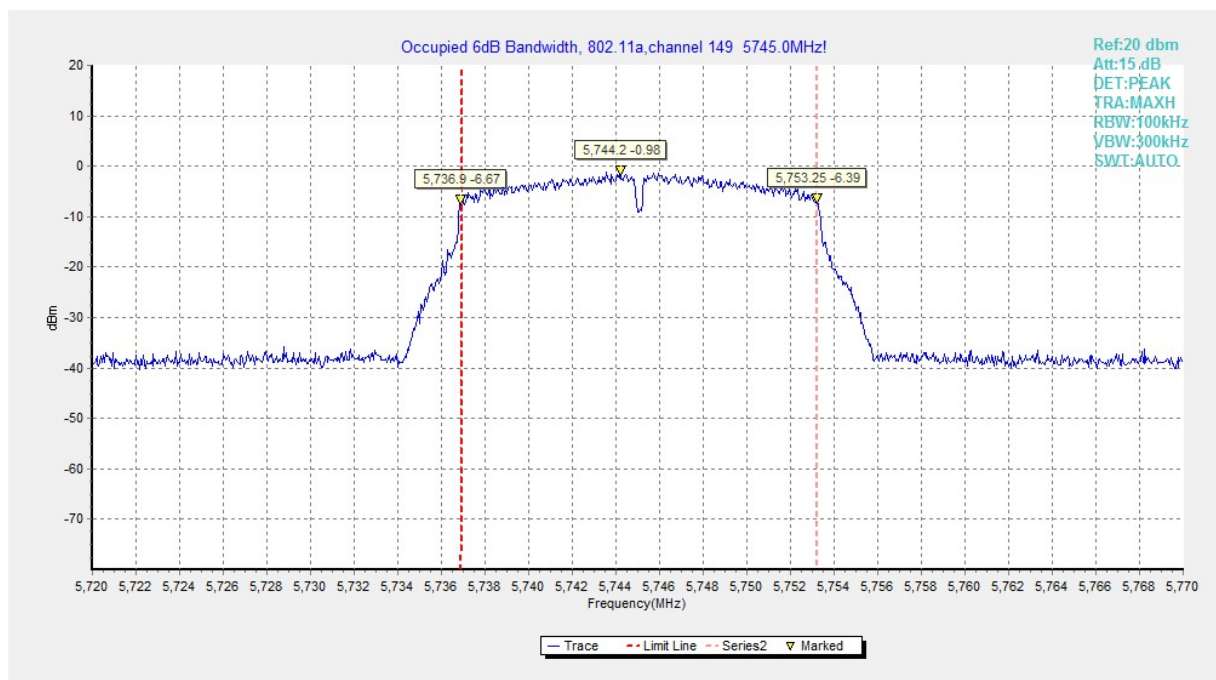


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

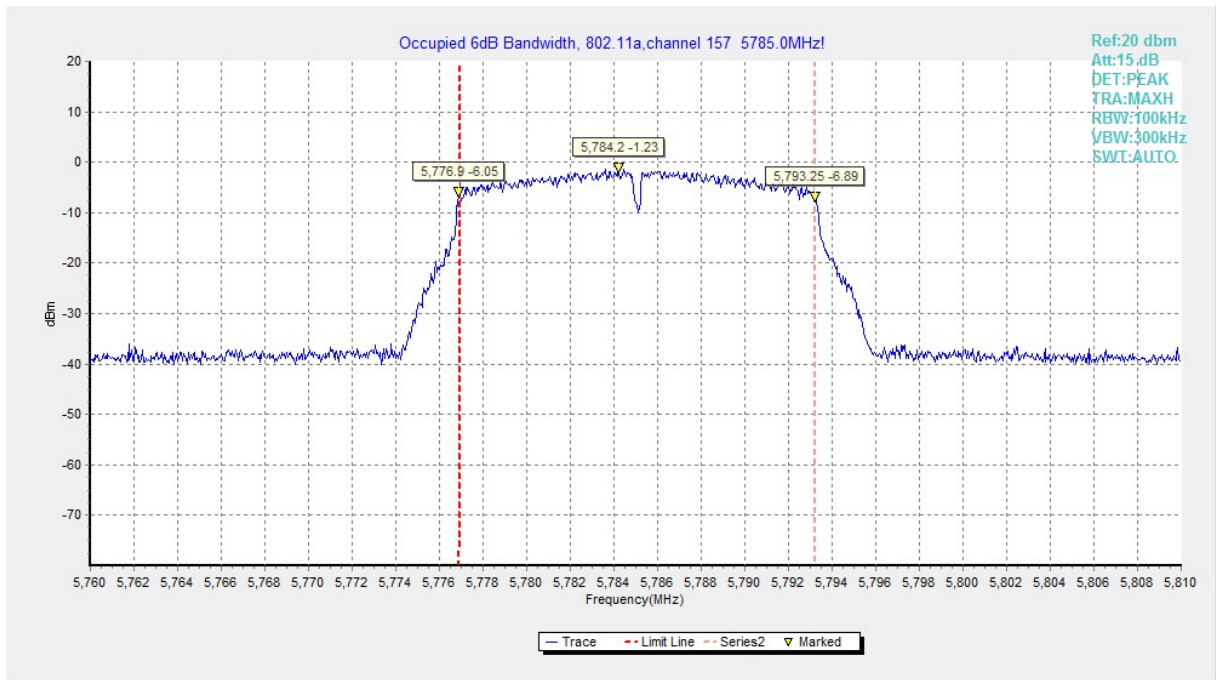


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

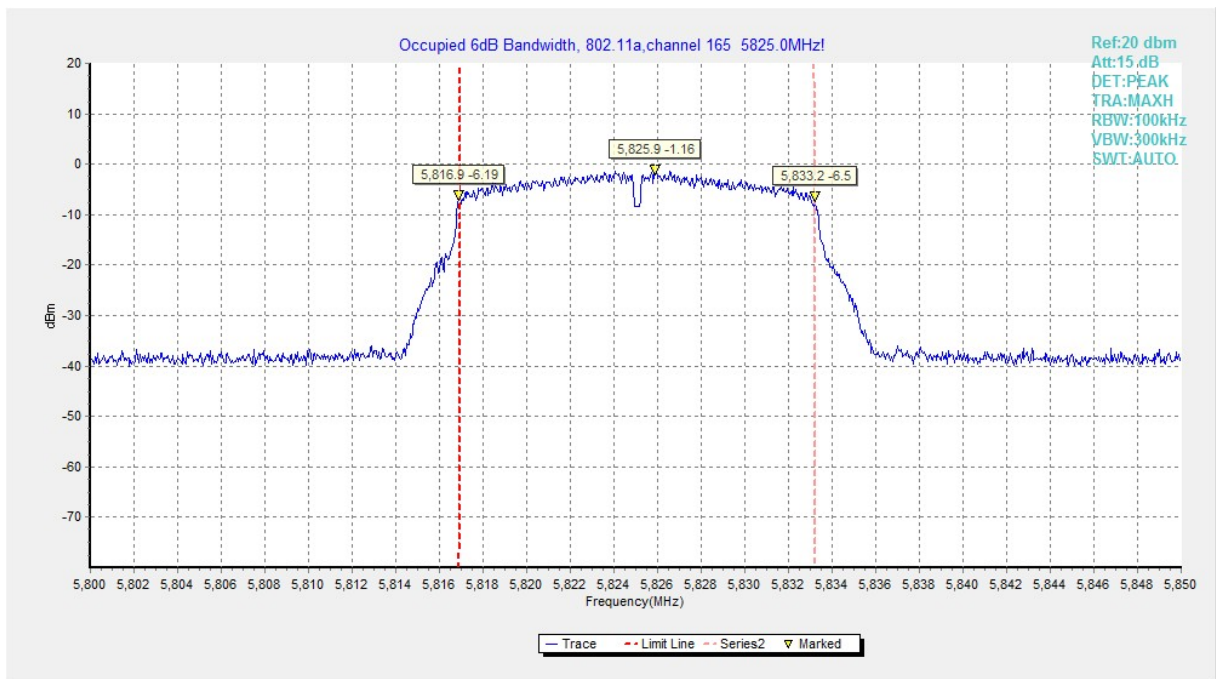


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

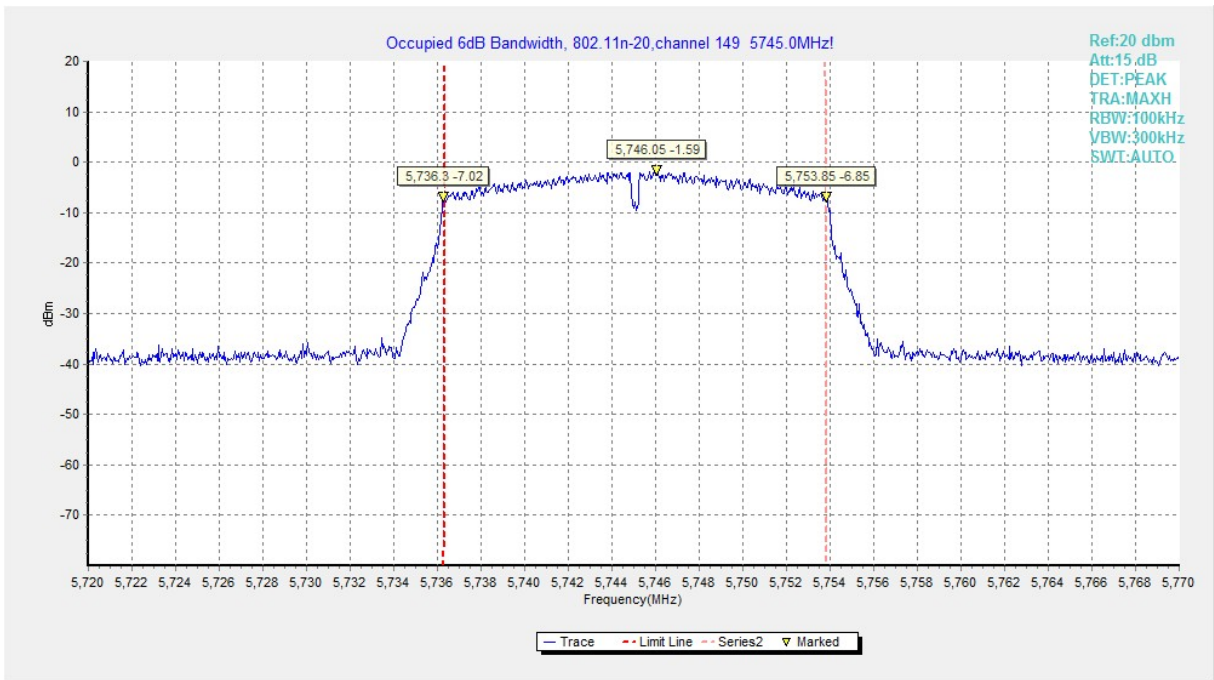


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

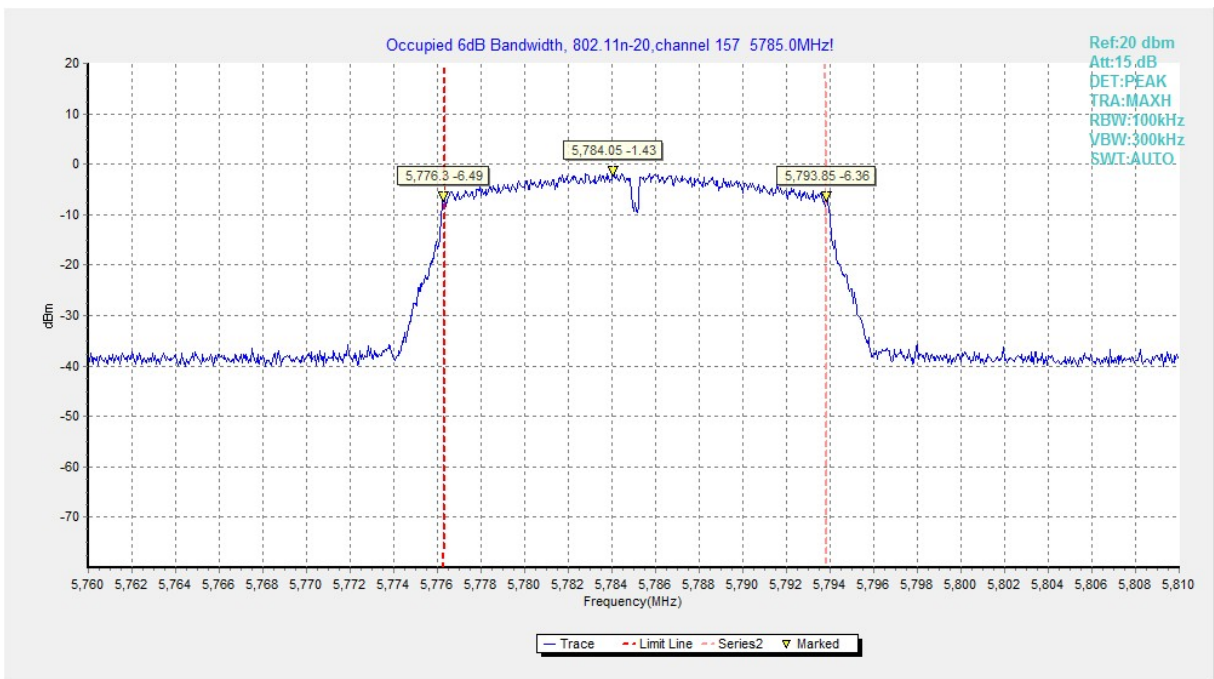


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

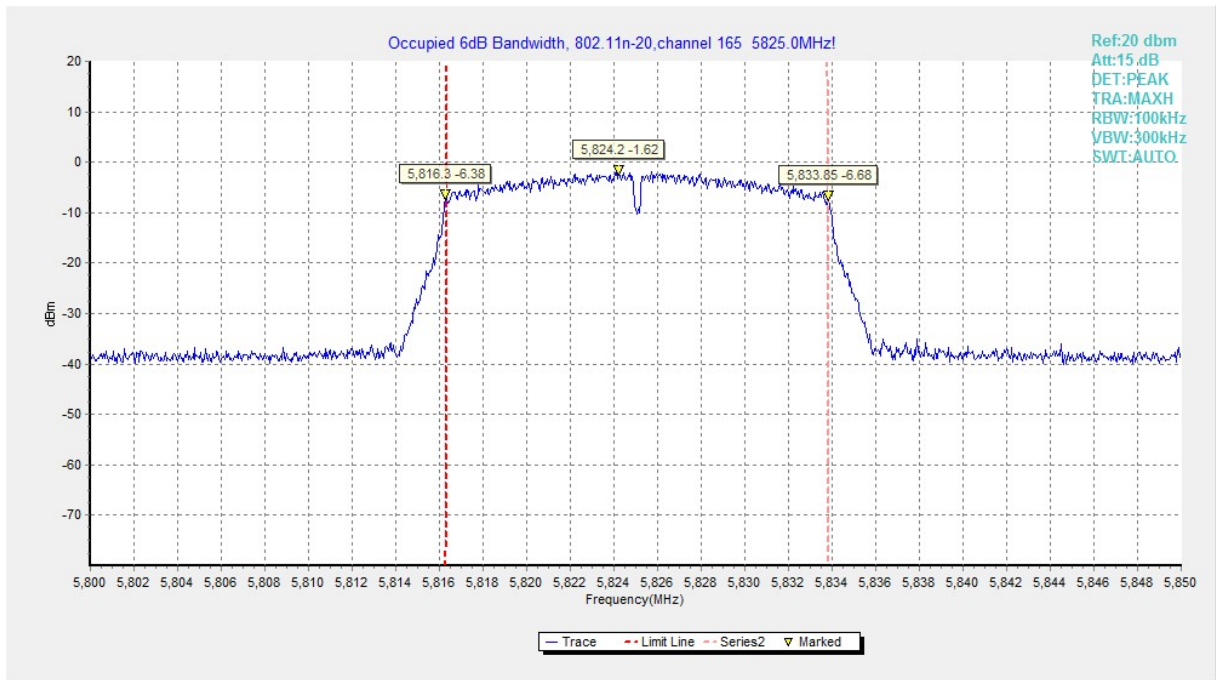


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

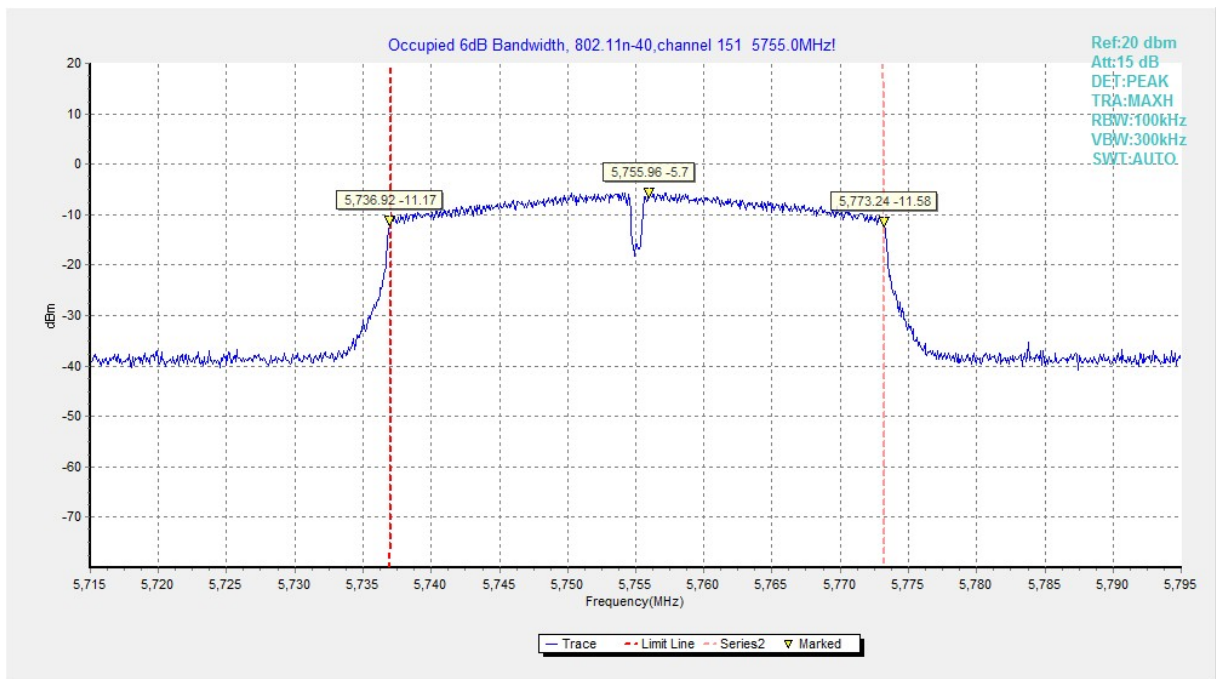


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

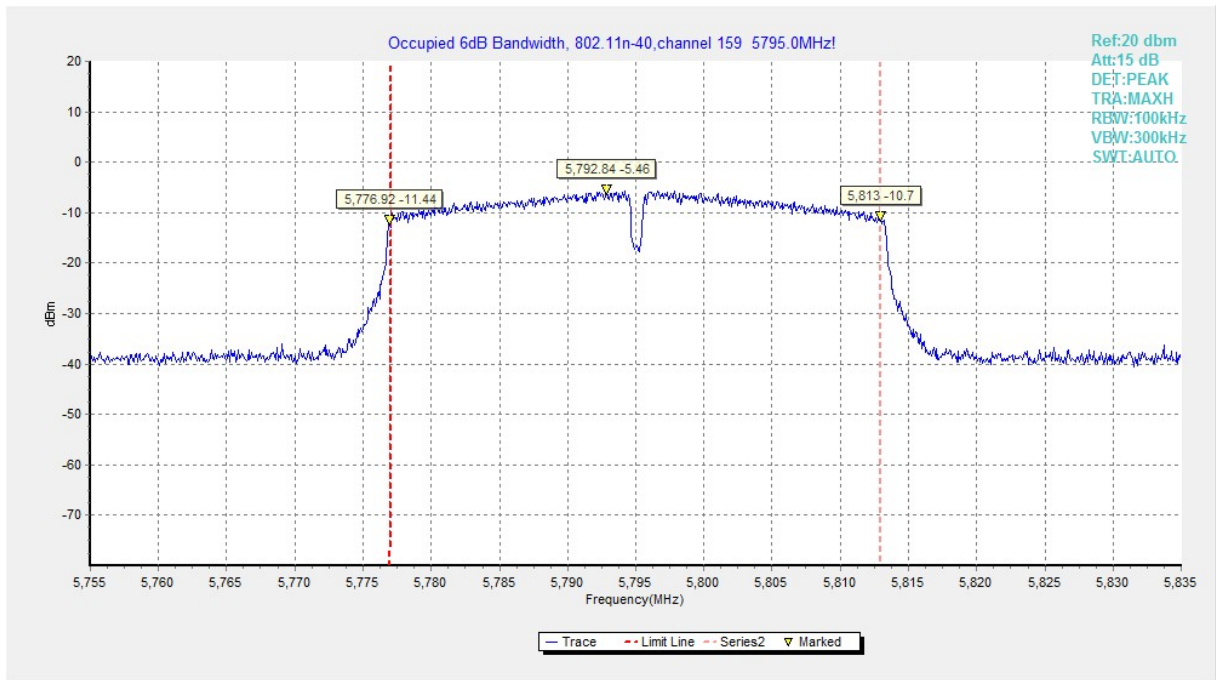


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

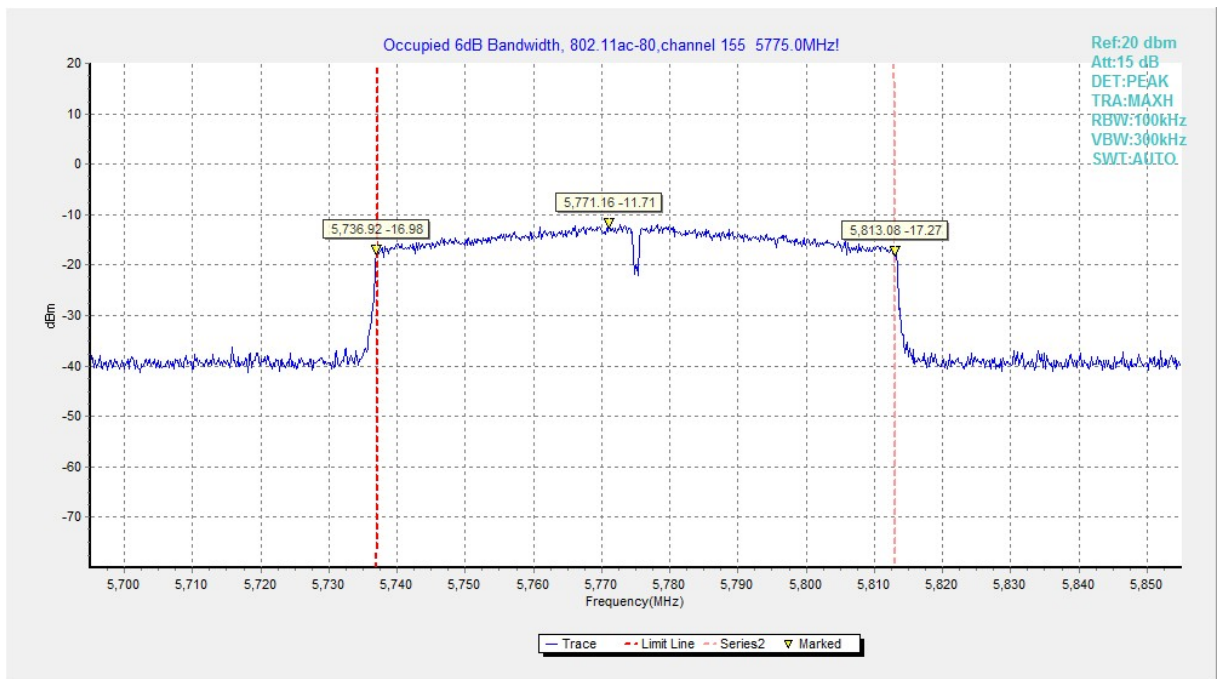


Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

A.5. Transmitter Spurious Emission

A.5.1 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: Increasing linearly from point to point.	

The measurement is made according to KDB 789033

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion	
802.11ac (HT20)	149	1 GHz ~ 3 GHz	---	P	
		3 GHz ~ 7 GHz	---	P	
		7 GHz ~ 18 GHz	---	P	
	157	30 MHz ~1 GHz	---	P	
		1 GHz ~ 3 GHz	---	P	
		3 GHz ~ 7 GHz	---	P	
		7 GHz ~ 18 GHz	---	P	
		18 GHz ~ 26.5 GHz	---	P	
		26.5 GHz~ 40 GHz	---	P	
		165	1 GHz ~ 3 GHz	---	P
			3 GHz ~ 7 GHz	---	P
	7 GHz ~ 18 GHz		---	P	

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT80 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT80)	155	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

Average Results:

802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.300	41.59	-25.50	46.66	20.43	54.00	12.41	V
17967.000	41.57	-25.50	46.66	20.41	54.00	12.43	H
13309.050	38.53	-29.49	39.71	28.31	54.00	15.47	H
15980.950	38.28	-27.35	38.54	27.09	54.00	15.72	V
11897.750	37.02	-31.85	39.05	29.82	54.00	16.98	H
11784.450	36.98	-31.99	38.98	29.99	54.00	17.02	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17942.250	41.67	-25.50	46.66	20.51	54.00	12.33	H
17982.950	41.47	-25.50	46.66	20.31	54.00	12.53	H
15971.050	38.98	-27.35	38.54	27.79	54.00	15.02	H
13295.850	38.62	-29.49	39.71	28.40	54.00	15.38	V
11783.900	37.01	-31.99	38.98	30.02	54.00	16.99	V
11886.750	36.77	-31.85	39.05	29.57	54.00	17.23	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
-----------------	-----------------------------	-----------------	-----------------------	-------------------------	----------------	-------------	--------------------

17971.950	41.65	-25.50	46.66	20.49	54.00	12.35	H
17951.050	41.64	-25.50	46.66	20.48	54.00	12.36	H
15986.450	38.47	-27.35	38.54	27.28	54.00	15.53	V
13307.400	38.42	-29.49	39.71	28.20	54.00	15.58	V
11800.950	36.99	-31.85	39.05	29.79	54.00	17.01	V
11784.450	36.95	-31.99	38.98	29.96	54.00	17.05	H

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17932.900	41.20	-25.50	46.66	20.04	54.00	12.80	V
17978.550	41.19	-25.50	46.66	20.03	54.00	12.81	H
13324.450	38.54	-29.49	39.71	28.32	54.00	15.46	H
14490.450	38.17	-28.59	42.46	24.30	54.00	15.83	V
10822.500	36.90	-32.33	38.59	30.64	54.00	17.10	V
11787.750	36.81	-31.99	38.98	29.82	54.00	17.19	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17944.450	41.77	-25.50	46.66	20.61	54.00	12.23	V
17925.750	41.37	-25.50	46.66	20.21	54.00	12.63	H
14497.600	38.33	-28.59	42.46	24.46	54.00	15.67	V
14497.050	38.24	-28.59	42.46	24.37	54.00	15.76	H
11891.700	36.79	-31.85	39.05	29.59	54.00	17.21	V
11786.650	36.78	-31.99	38.98	29.79	54.00	17.22	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.950	41.50	-25.50	46.66	20.34	54.00	12.50	H
17967.550	41.17	-25.50	46.66	20.01	54.00	12.83	V
16075.550	38.20	-26.77	38.93	26.04	54.00	15.80	H
15982.050	38.19	-27.35	38.54	27.00	54.00	15.81	V
11782.250	36.93	-31.99	38.98	29.94	54.00	17.07	V
11895.550	36.93	-31.85	39.05	29.73	54.00	17.07	V

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17932.350	41.50	-25.50	46.66	20.34	54.00	12.50	V
17980.200	41.30	-25.50	46.66	20.14	54.00	12.70	H
13290.350	38.23	-29.67	39.55	28.35	54.00	15.77	V
14496.500	38.22	-28.59	42.46	24.35	54.00	15.78	H
11782.800	37.10	-31.99	38.98	30.11	54.00	16.90	V
11894.450	36.75	-31.85	39.05	29.55	54.00	17.25	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.850	41.51	-25.50	46.66	20.35	54.00	12.49	H
17996.700	41.43	-25.50	46.66	20.27	54.00	12.57	V
14499.800	38.33	-28.59	42.46	24.46	54.00	15.67	V
13293.100	38.19	-29.49	39.71	27.97	54.00	15.81	H
11785.000	37.40	-31.99	38.98	30.41	54.00	16.60	V
11789.950	37.04	-31.99	38.98	30.05	54.00	16.96	H

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17901.550	41.64	-25.50	46.66	20.48	54.00	12.36	V
17923.550	41.36	-25.50	46.66	20.20	54.00	12.64	H
14494.850	38.59	-28.59	42.46	24.72	54.00	15.41	H
14489.350	38.25	-28.59	42.46	24.38	54.00	15.75	V
11892.800	36.91	-31.85	39.05	29.71	54.00	17.09	V
11783.350	36.85	-31.99	38.98	29.86	54.00	17.15	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17925.200	41.48	-25.50	46.66	20.32	54.00	12.52	H
17951.600	41.40	-25.50	46.66	20.24	54.00	12.60	V
13325.550	38.38	-29.49	39.71	28.16	54.00	15.62	H
13313.450	38.25	-29.49	39.71	28.03	54.00	15.75	V
11785.550	36.90	-31.99	38.98	29.91	54.00	17.10	V
11892.250	36.83	-31.85	39.05	29.63	54.00	17.17	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.450	41.41	-25.50	46.66	20.25	54.00	12.59	H
17978.000	41.41	-25.50	46.66	20.25	54.00	12.59	V
14484.400	38.47	-28.59	42.46	24.60	54.00	15.53	H
14480.550	38.18	-28.59	42.46	24.31	54.00	15.82	H
11790.500	37.12	-31.99	38.98	30.13	54.00	16.88	V
11783.350	36.95	-31.99	38.98	29.96	54.00	17.05	H

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17949.400	41.47	-25.50	46.66	20.31	54.00	12.53	V
17945.550	41.45	-25.50	46.66	20.29	54.00	12.55	H
14492.650	38.53	-28.59	42.46	24.66	54.00	15.47	V
15978.200	38.28	-27.35	38.54	27.09	54.00	15.72	V
11244.900	36.86	-32.36	38.77	30.46	54.00	17.14	V
11886.750	36.71	-31.85	39.05	29.51	54.00	17.29	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17924.100	41.35	-25.50	46.66	20.19	54.00	12.65	V
17936.200	41.30	-25.50	46.66	20.14	54.00	12.70	V
14493.750	38.19	-28.59	42.46	24.32	54.00	15.81	H
13313.450	38.17	-29.49	39.71	27.95	54.00	15.83	V
11880.150	36.97	-31.85	39.05	29.77	54.00	17.03	H
11784.450	36.82	-31.99	38.98	29.83	54.00	17.18	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17959.300	41.35	-25.50	46.66	20.19	54.00	12.65	V
17919.700	41.31	-25.50	46.66	20.15	54.00	12.69	H
15966.100	38.27	-27.35	38.54	27.08	54.00	15.73	V
13292.550	38.22	-29.49	39.71	28.00	54.00	15.78	H
11876.300	37.00	-31.85	39.05	29.80	54.00	17.00	H
11885.650	36.78	-31.85	39.05	29.58	54.00	17.22	V

Peak Results:
802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.400	52.75	-25.50	46.66	31.59	74.00	21.25	V
17891.650	52.31	-25.50	46.66	31.15	74.00	21.69	H
16437.450	52.03	-26.96	39.82	39.17	68.20	16.17	V
16858.200	51.33	-26.62	41.49	36.46	68.20	16.87	H
11358.750	47.72	-32.42	38.79	41.35	74.00	26.28	H
11147.550	47.45	-32.60	38.75	41.31	74.00	26.55	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17915.300	52.55	-25.50	46.66	31.39	74.00	21.45	V
17446.150	52.38	-26.85	45.25	33.98	68.20	15.82	V
16879.650	51.41	-26.32	42.36	35.36	68.20	16.79	V
16737.750	51.18	-26.62	41.49	36.31	68.20	17.02	V
10504.600	47.93	-32.99	38.27	42.64	68.20	20.27	V
11352.700	47.41	-32.42	38.79	41.04	74.00	26.59	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17283.350	52.35	-25.95	44.35	33.94	68.20	15.85	H
17443.950	52.19	-26.85	45.25	33.79	68.20	16.01	V
16860.400	52.04	-26.62	41.49	37.17	68.20	16.16	H
16474.850	51.34	-26.96	39.82	38.48	68.20	16.86	V
11783.350	47.82	-31.99	38.98	40.83	74.00	26.18	H
11774.000	47.68	-31.99	38.98	40.69	74.00	26.32	H

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17931.800	52.37	-25.50	46.66	31.21	74.00	21.63	V
17243.200	52.17	-25.95	44.35	33.76	68.20	16.03	V
16417.650	51.89	-26.96	39.82	39.03	68.20	16.31	V
16846.100	51.89	-26.62	41.49	37.02	68.20	16.31	H
10865.400	47.63	-32.33	38.59	41.37	74.00	26.37	V
11786.100	47.57	-31.99	38.98	40.58	74.00	26.43	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17723.900	52.53	-25.74	45.95	32.32	74.00	21.47	V
17930.700	52.11	-25.50	46.66	30.95	74.00	21.89	H
16961.600	51.16	-26.32	42.36	35.11	68.20	17.04	V
16754.800	50.68	-26.62	41.49	35.81	68.20	17.52	H
10470.500	47.63	-32.99	38.27	42.34	68.20	20.57	H
10489.750	47.19	-32.99	38.27	41.90	68.20	21.01	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17441.750	52.49	-26.85	45.25	34.09	68.20	15.71	V
17326.800	52.29	-25.95	44.35	33.88	68.20	15.91	V
16860.950	51.49	-26.62	41.49	36.62	68.20	16.71	V
16469.900	51.14	-26.96	39.82	38.28	68.20	17.06	H
11788.300	47.36	-31.99	38.98	40.37	74.00	26.64	H
11911.500	47.03	-31.85	39.05	39.83	74.00	26.97	V

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17901.000	52.44	-25.50	46.66	31.28	74.00	21.56	H
17992.850	52.05	-25.50	46.66	30.89	74.00	21.95	V
16961.050	51.89	-26.32	42.36	35.84	68.20	16.31	H
16843.900	51.17	-26.62	41.49	36.30	68.20	17.03	H
10867.600	47.83	-32.33	38.59	41.57	74.00	26.17	H
11892.800	47.55	-31.85	39.05	40.35	74.00	26.45	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16945.100	52.60	-26.32	42.36	36.55	68.20	15.60	H
17548.450	52.15	-26.85	45.25	33.75	68.20	16.05	V
17945.550	51.75	-25.50	46.66	30.59	74.00	22.25	H
16429.200	51.65	-26.96	39.82	38.79	68.20	16.55	V
10823.600	47.91	-32.33	38.59	41.65	74.00	26.09	H
11878.500	47.72	-31.85	39.05	40.52	74.00	26.28	V

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17241.550	52.02	-25.95	44.35	33.61	68.20	16.18	H
17952.150	51.89	-25.50	46.66	30.73	74.00	22.11	H
16966.550	51.50	-26.32	42.36	35.45	68.20	16.70	V
16488.600	51.09	-26.96	39.82	38.23	68.20	17.11	V
11843.300	48.51	-31.85	39.05	41.31	74.00	25.49	V
11779.500	48.20	-31.99	38.98	41.21	74.00	25.80	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17431.300	52.57	-26.85	45.25	34.17	68.20	15.63	H
17561.650	52.19	-25.74	45.95	31.98	68.20	16.01	H
16759.750	51.18	-26.62	41.49	36.31	68.20	17.02	H
16968.750	51.13	-26.32	42.36	35.08	68.20	17.07	V
11684.900	48.27	-31.99	38.98	41.28	74.00	25.73	V
10017.850	47.23	-33.63	38.11	42.75	68.20	20.97	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17281.150	52.36	-25.95	44.35	33.95	68.20	15.84	V
17352.650	52.12	-25.95	44.35	33.71	68.20	16.08	H
16952.250	51.50	-26.32	42.36	35.45	68.20	16.70	H
16944.550	51.14	-26.32	42.36	35.09	68.20	17.06	H
11770.150	47.48	-31.99	38.98	40.49	74.00	26.52	V
11279.550	47.33	-32.36	38.77	40.93	74.00	26.67	V

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.050	51.92	-25.50	46.66	30.76	74.00	22.08	V
17900.450	51.90	-25.50	46.66	30.74	74.00	22.10	H
16846.650	51.40	-26.62	41.49	36.53	68.20	16.80	V
16963.250	51.10	-26.32	42.36	35.05	68.20	17.10	V
11887.300	48.16	-31.85	39.05	40.96	74.00	25.84	H
11132.700	47.46	-32.60	38.75	41.32	74.00	26.54	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17353.750	52.02	-25.95	44.35	33.61	68.20	16.18	V
17346.600	51.97	-25.95	44.35	33.56	68.20	16.23	V
16405.550	51.16	-26.96	39.82	38.30	68.20	17.04	H
16841.700	51.16	-26.62	41.49	36.29	68.20	17.04	V
11877.400	48.51	-31.85	39.05	41.31	74.00	25.49	V
11368.100	47.58	-32.42	38.79	41.21	74.00	26.42	H

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17382.900	52.40	-25.95	44.35	33.99	68.20	15.80	H
17984.600	51.98	-25.50	46.66	30.82	74.00	22.02	H
16856.000	51.41	-26.62	41.49	36.54	68.20	16.79	V
16470.450	51.14	-26.96	39.82	38.28	68.20	17.06	V
11783.350	47.63	-31.99	38.98	40.64	74.00	26.37	V
11753.650	47.43	-31.99	38.98	40.44	74.00	26.57	V

Conclusion: PASS

A.6. Band Edges Compliance

A6.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
	FCC 47 CFR Part 15.407	at the band edge
at 5 MHz above or below the band edge		15.6
at 25 MHz above or below the band edge		10
at 75 MHz or more above or below the band edge		-27
Note: increasing linearly from point to point.		

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.10	P
	5825 MHz	Fig.11	P
802.11n HT20	5745 MHz	Fig.12	P
	5825 MHz	Fig.13	P
802.11n HT40	5755 MHz	Fig.14	P
	5795 MHz	Fig.15	P
802.11ac HT20	5745 MHz	Fig.16	P
	5825 MHz	Fig.17	P
802.11ac HT40	5755 MHz	Fig.18	P
	5795 MHz	Fig.19	P
802.11ac HT80	5775 MHz	Fig.20 Fig.21	P

Conclusion: PASS

Test graphs as below:

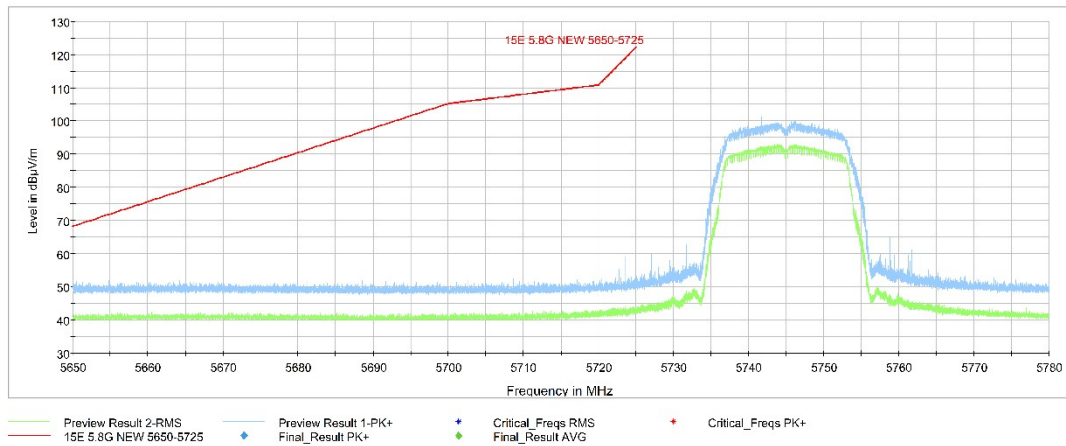


Fig. 10 Band Edges (802.11a Ch149,5745MHz)

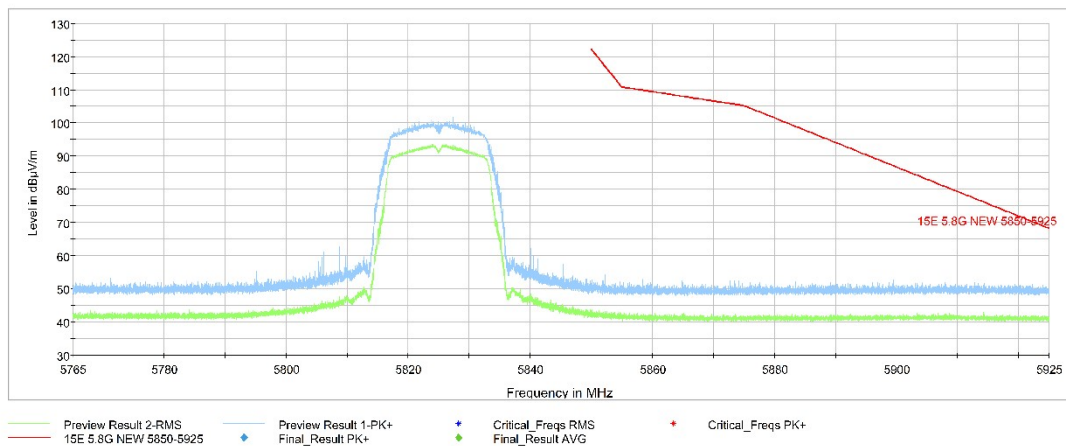


Fig. 11 Band Edges (802.11a Ch165, 5825MHz)

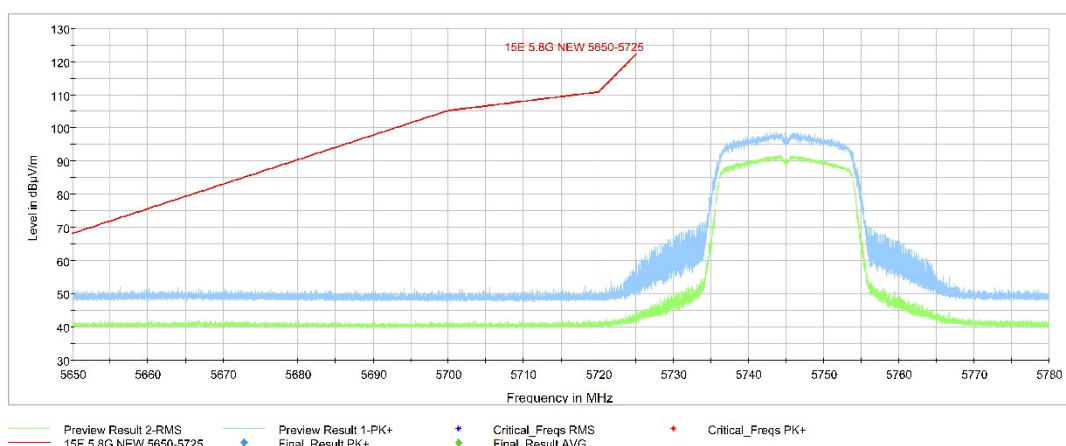


Fig. 12 Band Edges (802.11n-HT20 Ch149, 5745MHz)

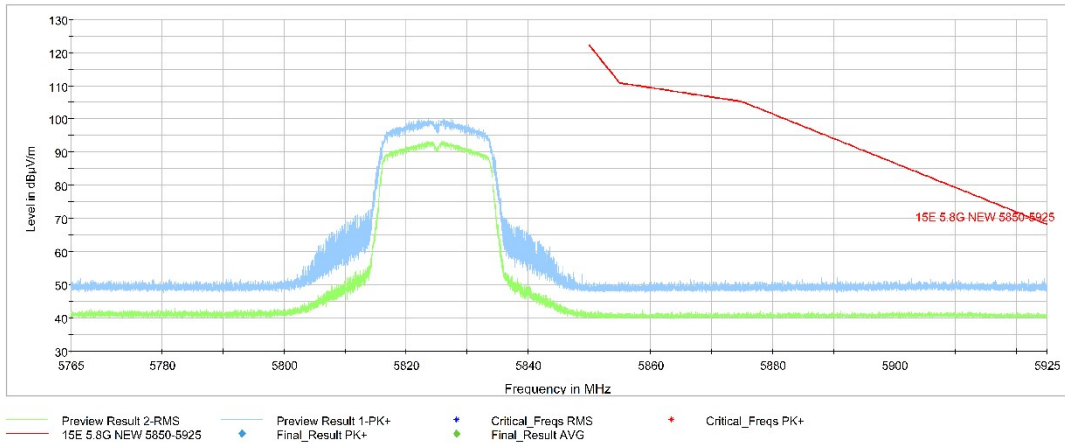


Fig. 13 Band Edges (802.11n-HT20 Ch165, 5825MHz)

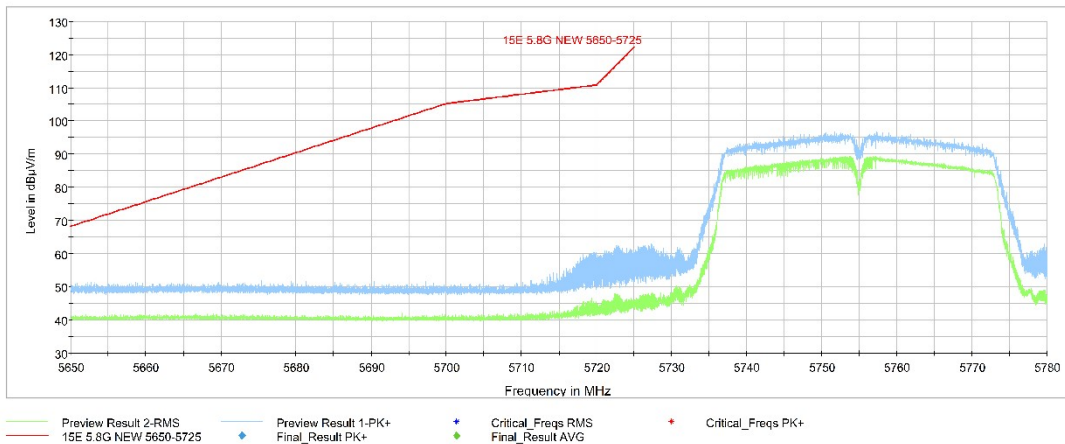


Fig. 14 Band Edges (802.11n-HT40 Ch151, 5755MHz)

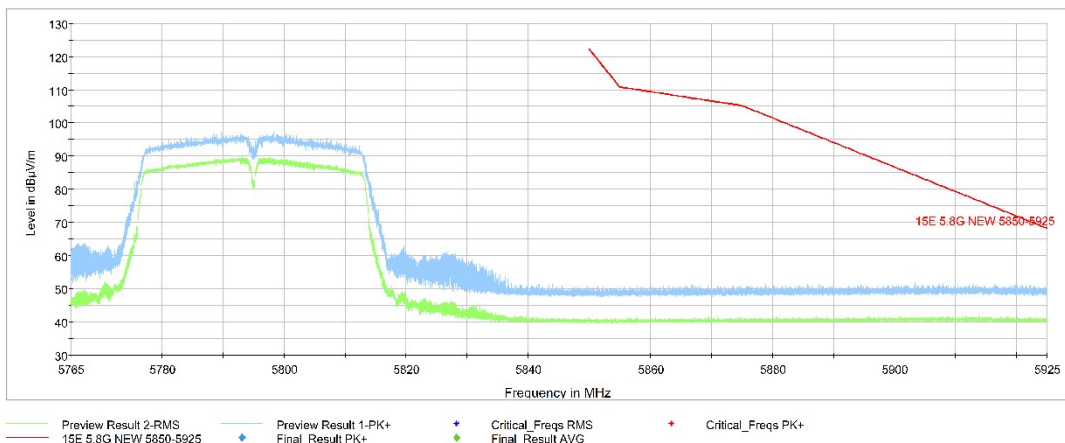


Fig. 15 Band Edges (802.11n-HT40 Ch159, 5795MHz)

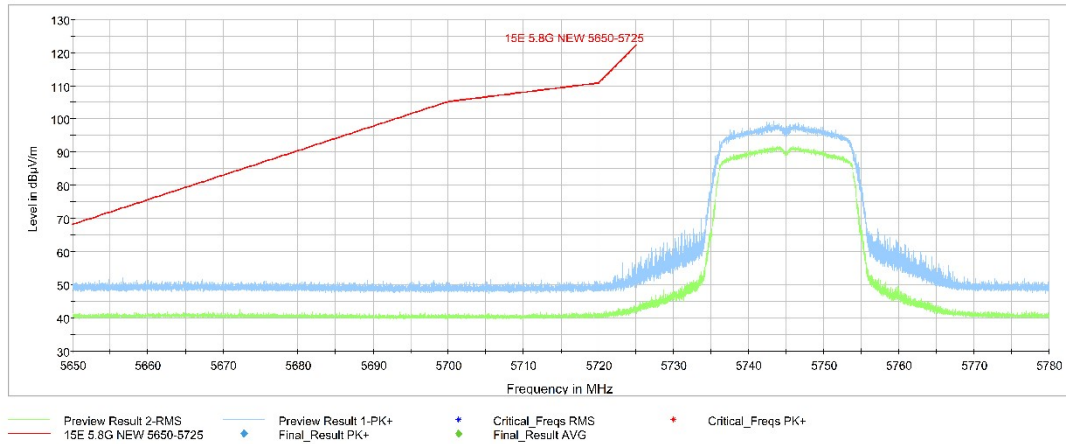


Fig. 16 Band Edges (802.11ac-HT20 Ch149, 5745MHz)

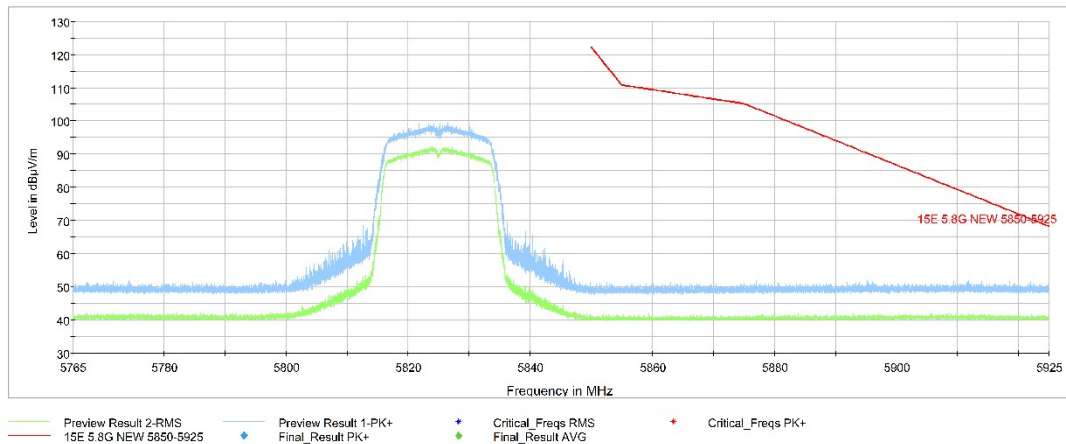


Fig. 17 Band Edges (802.11ac-HT20 Ch165, 5825MHz)

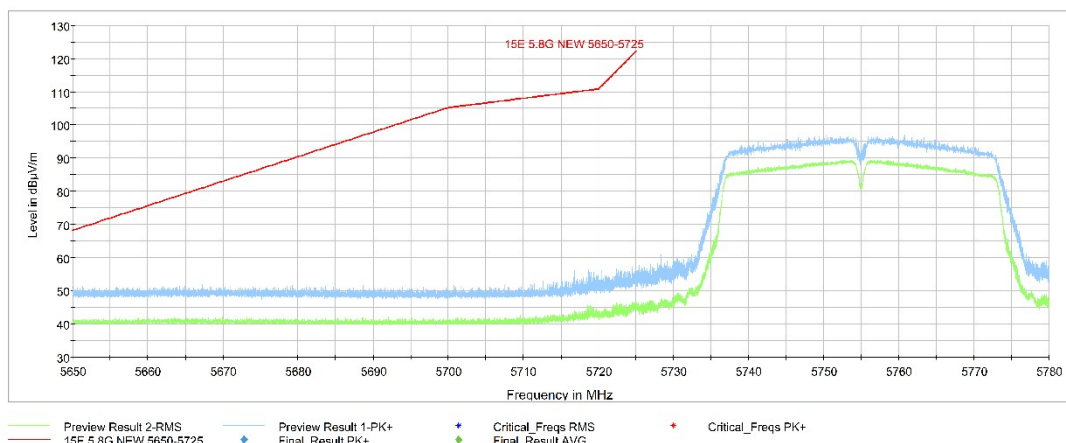


Fig. 18 Band Edges (802.11ac-HT40 Ch151, 5755MHz)

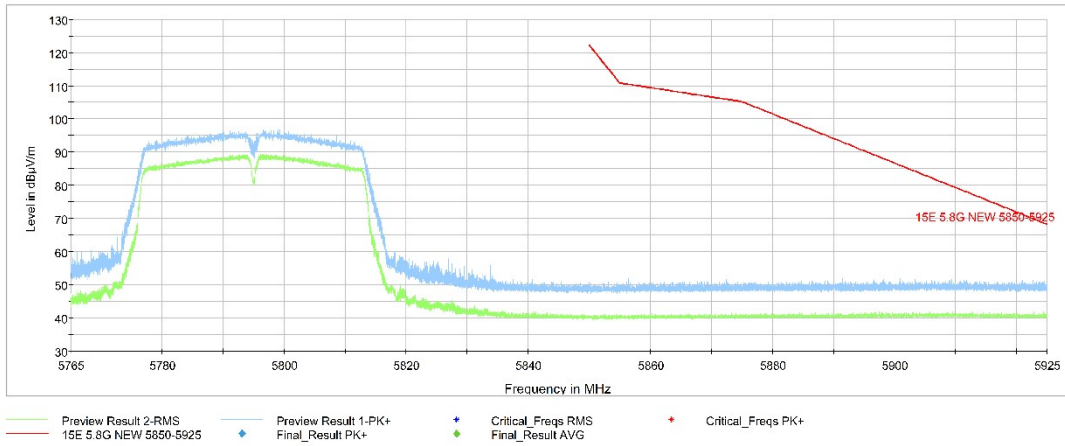


Fig. 19 Band Edges (802.11ac-HT40 Ch159, 5795MHz)

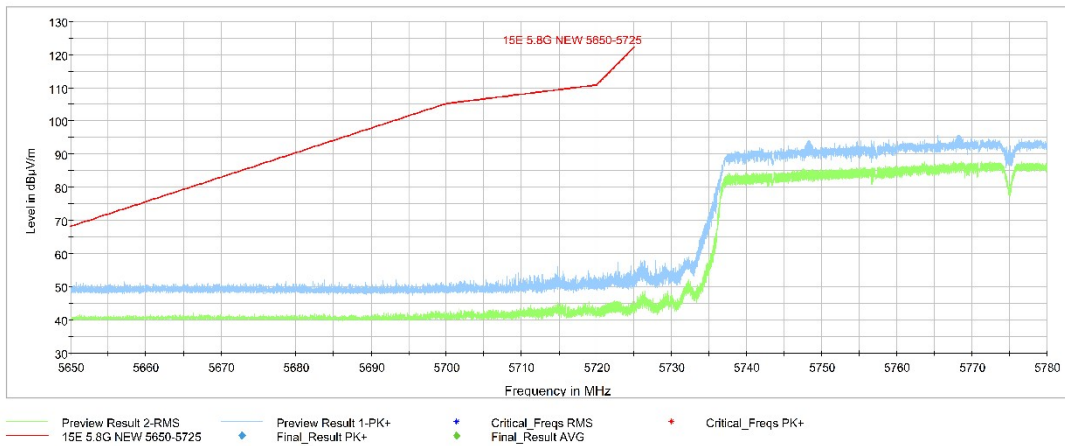


Fig. 20 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

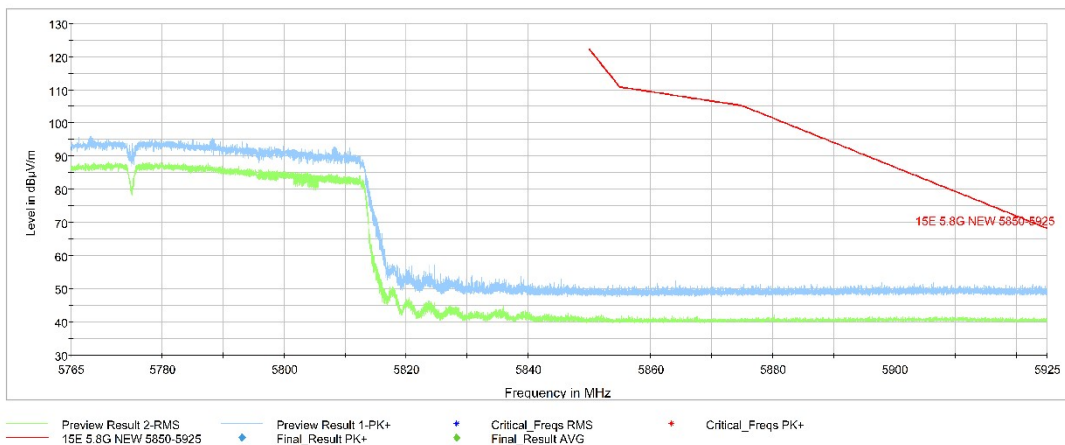


Fig. 21 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.08\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.22	Fig.23	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.22	Fig.23	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS

Test graphs as below:

Traffic:

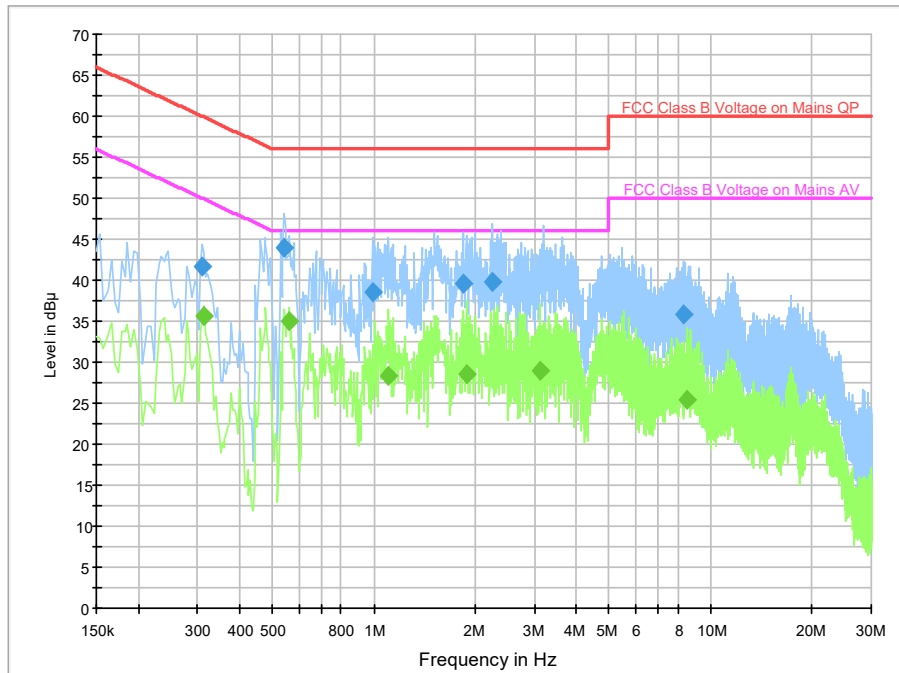


Fig. 22 AC Power line Conducted Emission-802.11a

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.310000	41.7	5000.	9.000	On	L1	19.8	18.2	60.0	
0.542000	44.0	5000.	9.000	On	L1	19.7	12.0	56.0	
0.990000	38.6	5000.	9.000	On	L1	19.8	17.4	56.0	
1.846000	39.6	5000.	9.000	On	L1	19.6	16.4	56.0	
2.254000	39.8	5000.	9.000	On	L1	19.6	16.2	56.0	
8.334000	35.9	5000.	9.000	On	L1	19.7	24.1	60.0	

Final Result 2

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.314000	35.6	5000.	9.000	On	N	19.8	14.2	49.9	
0.562000	34.9	5000.	9.000	On	N	19.8	11.1	46.0	
1.106000	28.4	5000.	9.000	On	L1	19.7	17.6	46.0	
1.894000	28.6	5000.	9.000	On	L1	19.6	17.4	46.0	
3.130000	29.0	5000.	9.000	On	L1	19.6	17.0	46.0	
8.530000	25.4	5000.	9.000	On	L1	19.7	24.6	50.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

Idle:

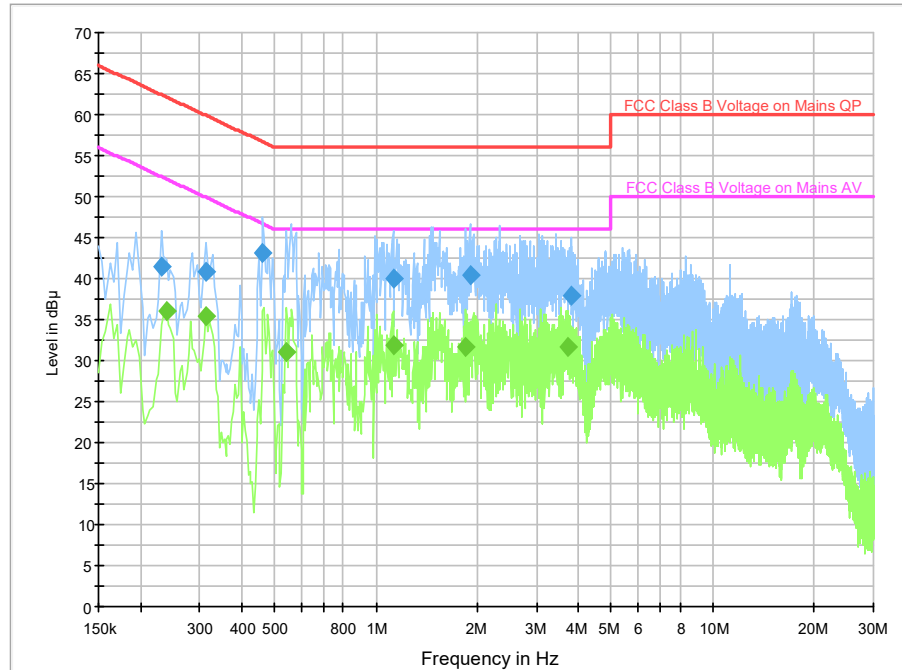


Fig. 23 AC Power line Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.230000	41.5	5000.	9.000	On	L1	19.8	20.9	62.4	
0.314000	40.9	5000.	9.000	On	N	19.8	19.0	59.9	
0.462000	43.2	5000.	9.000	On	L1	19.8	13.5	56.7	
1.126000	39.9	5000.	9.000	On	N	19.6	16.1	56.0	
1.902000	40.4	5000.	9.000	On	N	19.6	15.6	56.0	
3.814000	37.8	5000.	9.000	On	L1	19.5	18.2	56.0	

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.238000	36.1	5000.0	9.000	On	N	19.7	16.1	52.2	
0.314000	35.5	5000.0	9.000	On	N	19.8	14.4	49.9	
0.542000	31.0	5000.0	9.000	On	L1	19.7	15.0	46.0	
1.126000	31.9	5000.0	9.000	On	N	19.6	14.1	46.0	
1.854000	31.6	5000.0	9.000	On	N	19.6	14.4	46.0	
3.726000	31.7	5000.0	9.000	On	N	19.6	14.3	46.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology	
	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2021-09-29 through 2022-09-30 <i>Effective Dates</i>	 For the National Voluntary Laboratory Accreditation Program

*** END OF REPORT BODY ***