

B.1.01.Y.1016 Specification

1. Explanation of part number :

B.1 : 01 : Y : 1016
(1) (2) (3) (4)

(1) Product Type : Wireless Antenna

(2) Material : FPC

(3) State : DVT

(4) Serial number:1016

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
GPS,WIFI	1575.42Mhz , 2400-2500Mhz,5150-5850Mhz

2-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : _____ Specification

DOCUMENT
NO.

PAGE REV.
A0

2-3. S11 ,Efficiency , and Active Data :


2-3.1 S11:

Frequency Band	1575.42	2400	2500	5200	5800
2-3-1. Typical Value:	-8.4	-12.7	-9.2	-7.1	-15.2

2-3-2 Measuring Method

1. A 50Ω coaxial cable is connected to the pcb antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm.

2-3-3 Picture

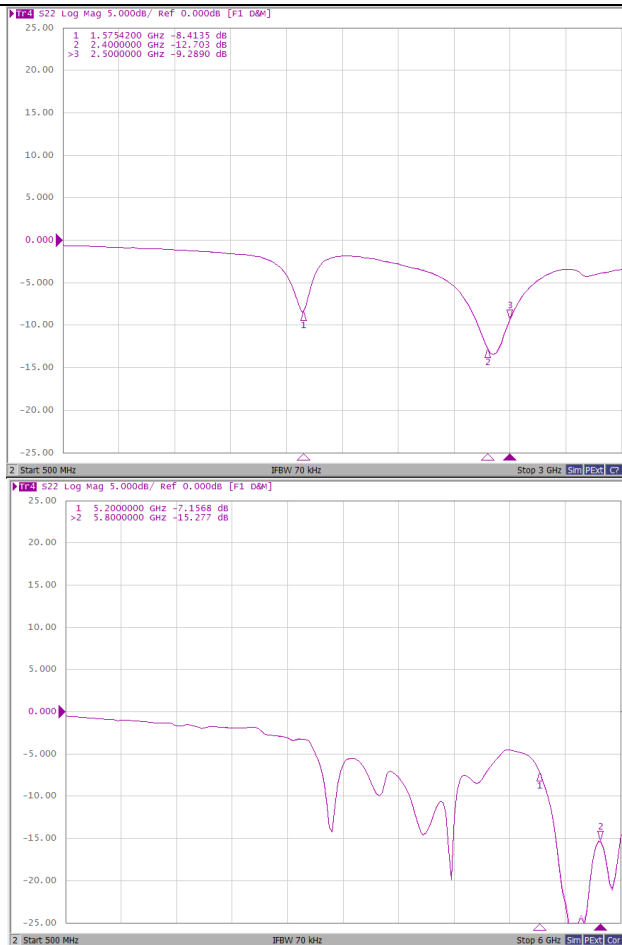

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : _____ Specification

DOCUMENT NO.


PAGE REV.
A0

2-4. Measure and Chamber

2-4-1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

2-4-2 Chamber definition

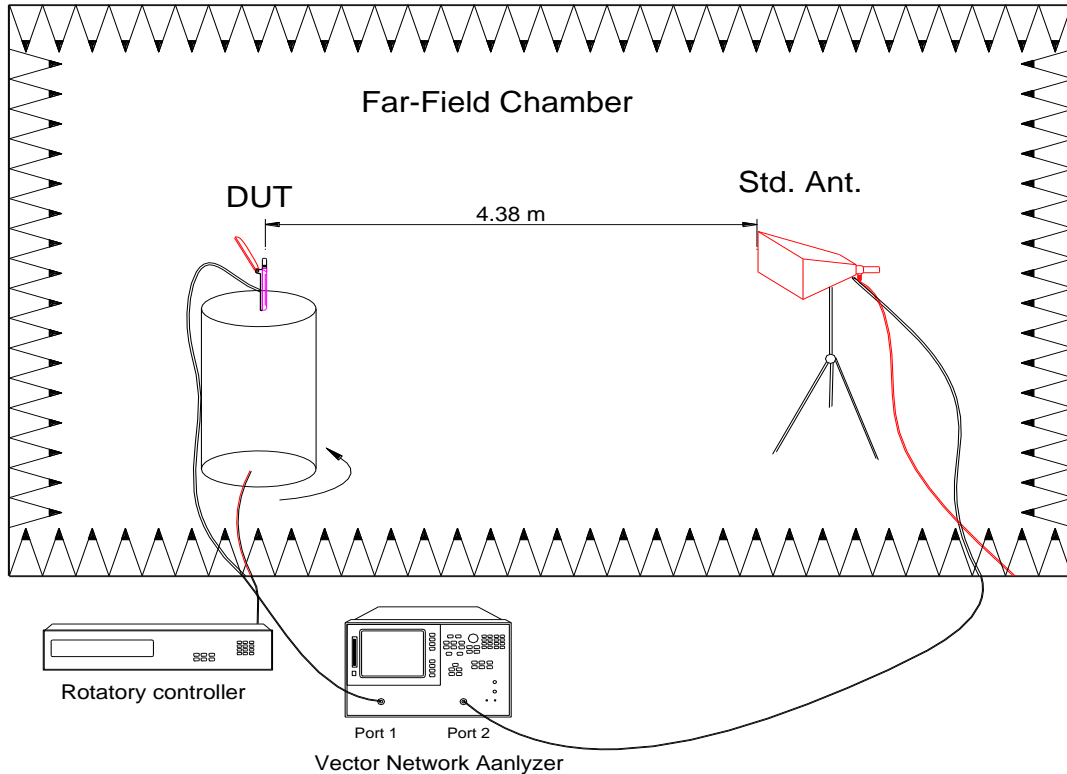

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

TITLE : _____ Specification

NHAI 浙江海通通讯电子股份有限公司
海通通讯

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

2-4-3 Antenna Efficiency

Frequency	Efficiency	Efficiency (dB)	Gain (dBi)
1550	22%	-6.6	-2.1
1555	23%	-6.4	-1.8
1560	24%	-6.2	-1.6
1565	25%	-6.0	-1.4
1570	26%	-5.9	-1.1
1575	26%	-5.8	-1.0
1580	27%	-5.7	-0.9
1585	27%	-5.6	-0.9
1590	27%	-5.6	-0.8
1595	28%	-5.6	-0.8
1600	28%	-5.6	-0.7
2400	30%	-5.2	-1.5
2410	32%	-5.0	-1.5
2420	33%	-4.8	-1.5
2430	33%	-4.8	-1.6
2440	33%	-4.8	-1.6
2450	33%	-4.8	-1.6
2460	32%	-4.9	-1.7
2470	31%	-5.1	-1.7
2480	30%	-5.2	-1.7
2490	30%	-5.3	-1.8
2500	29%	-5.4	-2.0

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : _____ Specification

DOCUMENT NO.

PAGE REV.
A0

Frequency	Efficiency	Efficiency (dB)	Gain (dBi)
5100	16%	-8.1	-0.4
5120	18%	-7.4	0.3
5140	19%	-7.2	0.9
5160	21%	-6.7	0.1
5180	24%	-6.1	0.9
5200	25%	-6.0	0.2
5220	26%	-5.8	0.7
5240	28%	-5.6	0.7
5260	28%	-5.5	0.7
5280	28%	-5.5	0.3
5300	29%	-5.4	0.5
5320	30%	-5.2	1.0
5340	31%	-5.1	1.2
5360	30%	-5.2	1.2
5380	30%	-5.2	1.5
5400	29%	-5.3	1.4
5420	28%	-5.5	1.4
5440	27%	-5.7	1.3
5460	26%	-5.8	1.4
5480	25%	-6.0	1.3
5500	25%	-6.1	1.5
5520	25%	-6.1	1.3
5540	26%	-5.8	1.2
5560	27%	-5.7	1.0
5580	27%	-5.6	1.0
5600	27%	-5.7	1.0
5620	28%	-5.5	1.1
5640	27%	-5.7	1.1
5660	28%	-5.6	1.1
5680	27%	-5.7	1.2
5700	28%	-5.5	1.0
5720	26%	-5.8	1.2
5740	25%	-6.0	0.9
5760	25%	-5.9	0.9
5780	24%	-6.2	0.8
5800	23%	-6.4	0.8

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : _____ Specification

DOCUMENT NO.

PAGE REV.


A0

3. Antenna Dimensions:

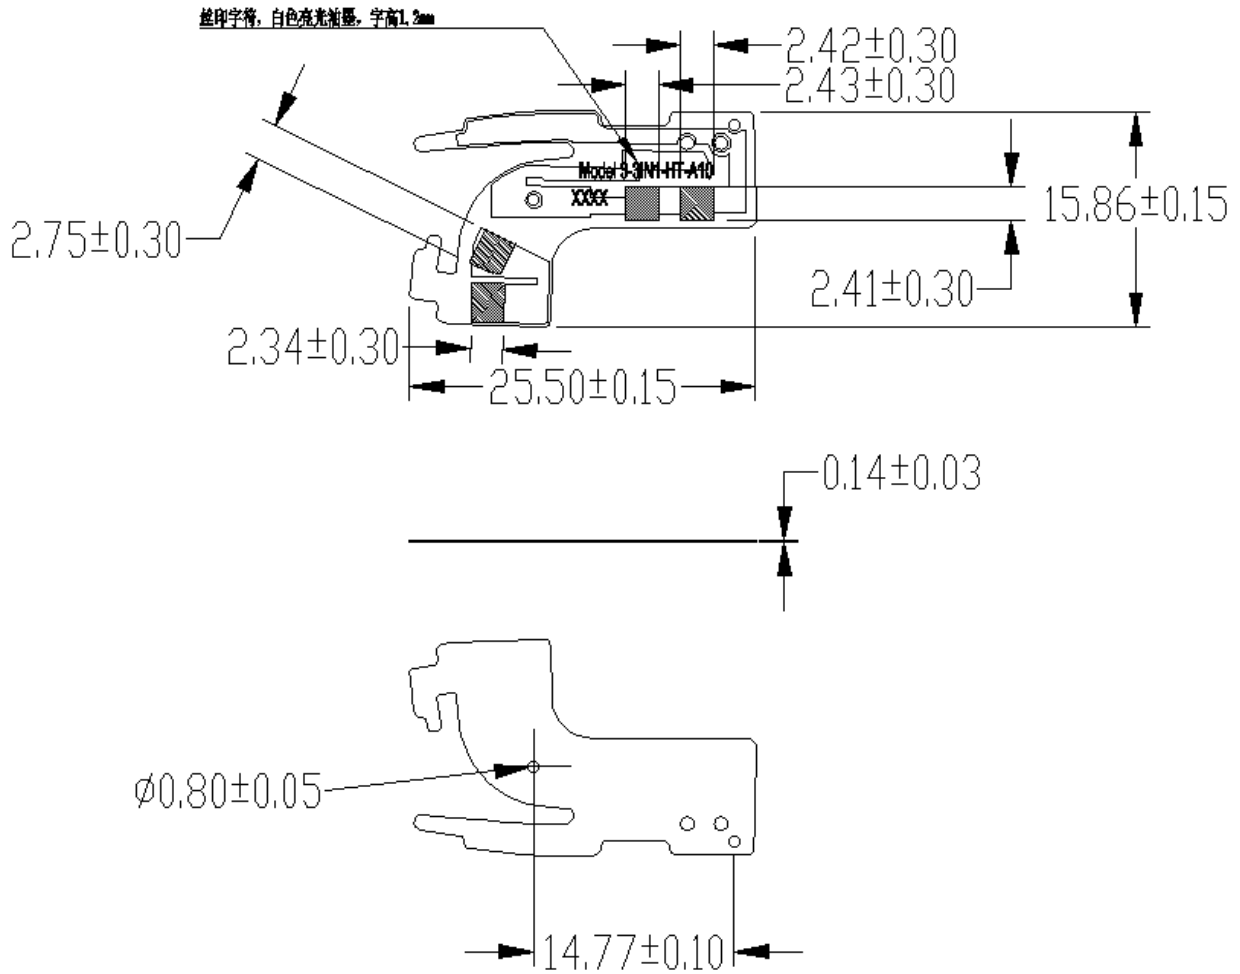

4. Testing Environment

Passive Test

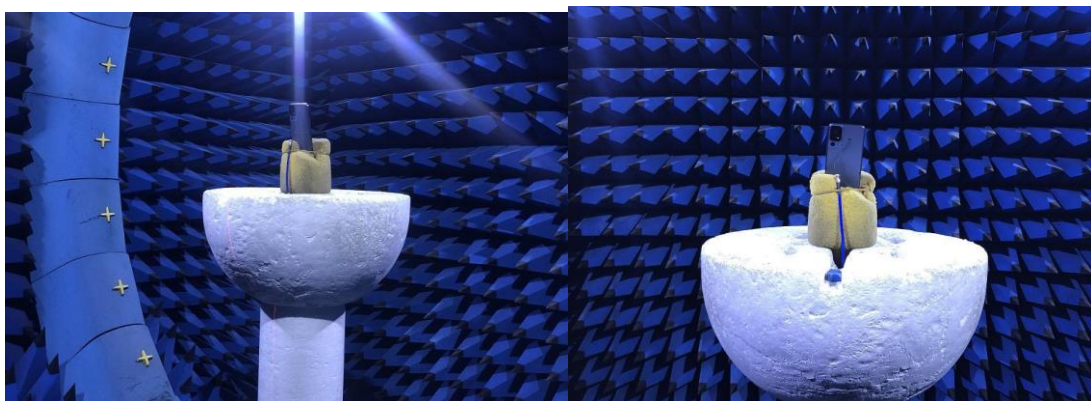

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

TITLE : _____ Specification


NHAIT 浙江海通通讯电子股份有限公司
海通通讯

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.


PAGE REV.
A0

Active Test

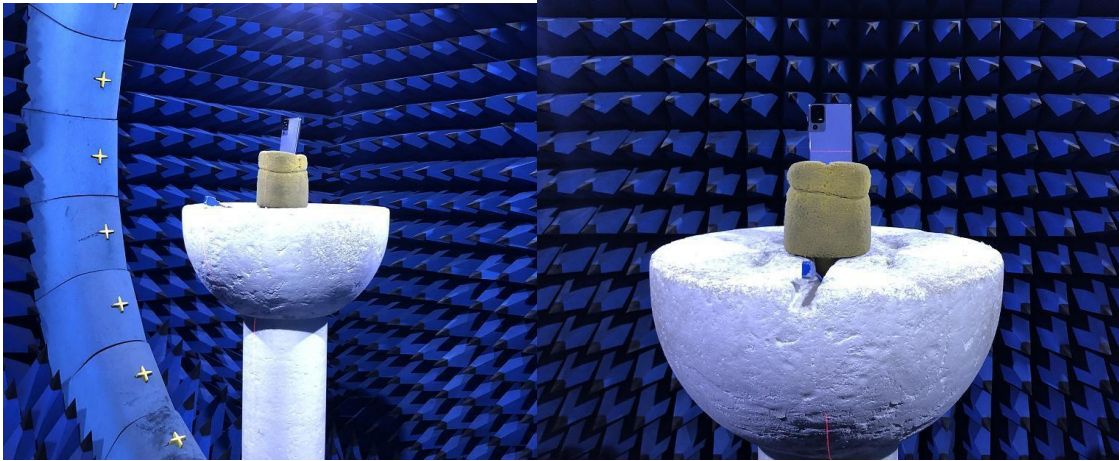

5. 3D Radiation Pattern

GPS [1575MHz]

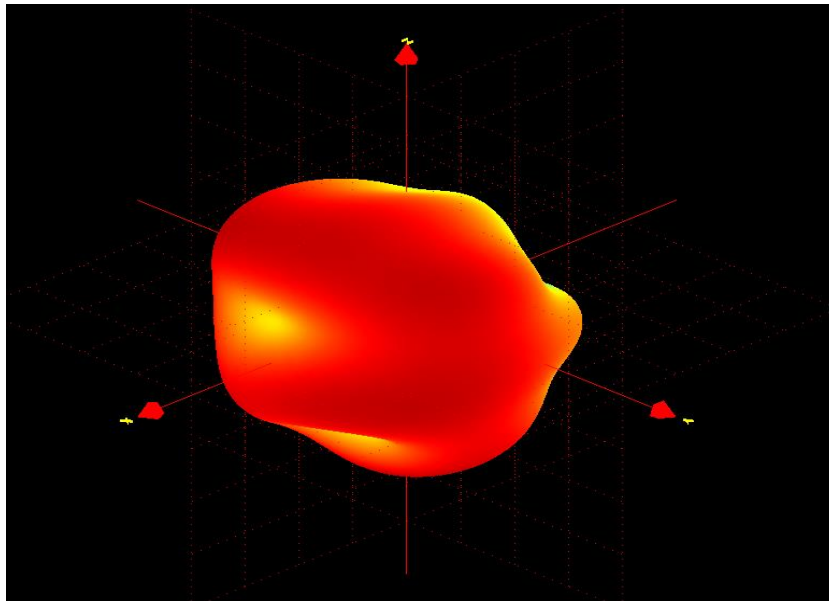

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE :

UNIT : mm

DRAWN BY : 曾传新

CHECKED BY : 郑由强

DESIGNED BY : 谢广权

APPROVED BY : 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : _____ Specification

DOCUMENT NO.


PAGE REV.


A0

BT/WiFi 2.4GHz C0 [2400MHz]

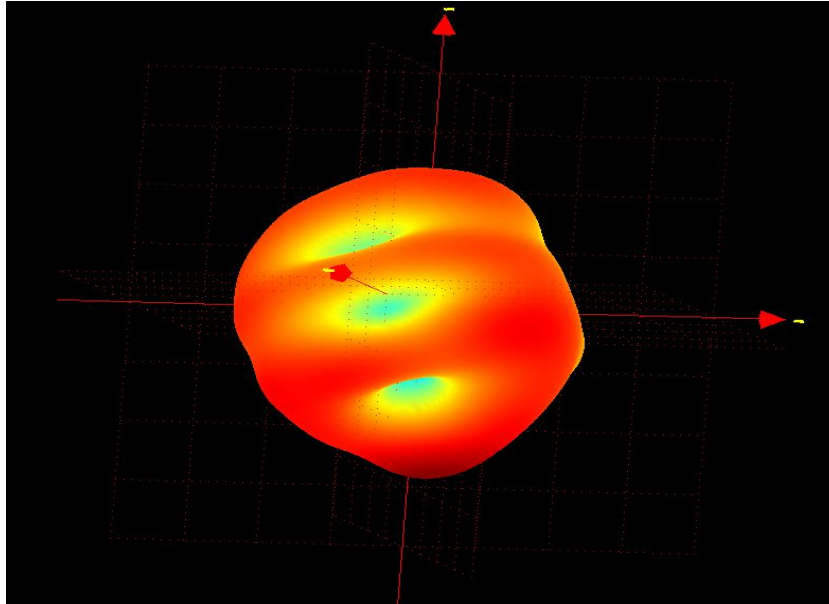


BT/WiFi 2.4GHz C0 [2483MHz]

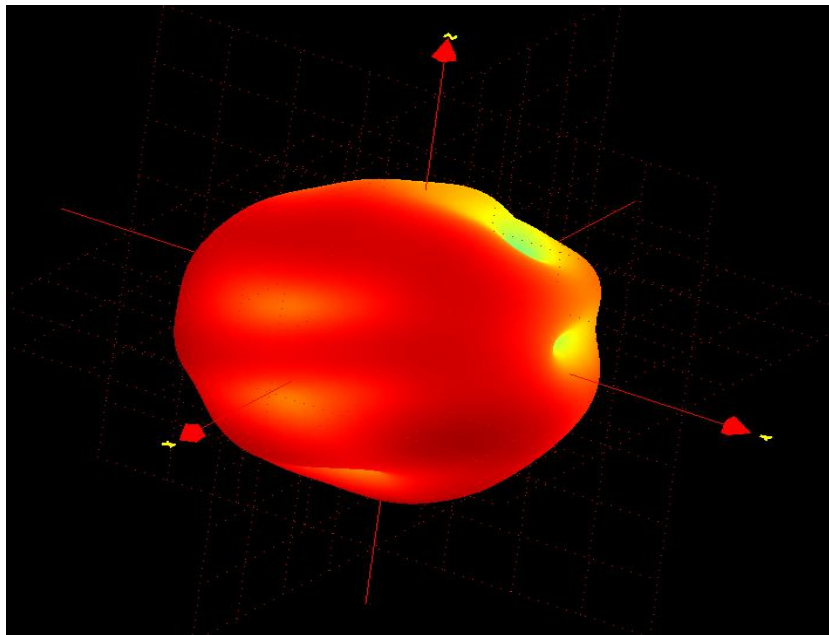



UNLESS OTHER SPECIFIED TOLERANCES ON :		 浙江海通通讯电子股份有限公司 海通通讯
X=±2	X.X=±0.1 X.XX=±0.05	
ANGLES=±	HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY : 曾传新	CHECKED BY : 郑由强	
DESIGNED BY : 谢广权	APPROVED BY : 周振邦	
TITLE : _____ Specification	DOCUMENT NO.	PAGE REV. A0

WiFi 5GHz [5150MHz]

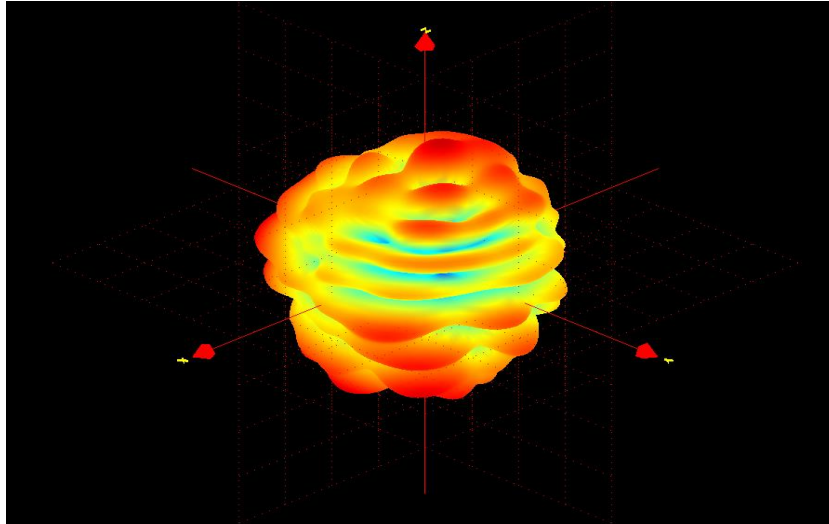

WiFi 5GHz [5825MHz]

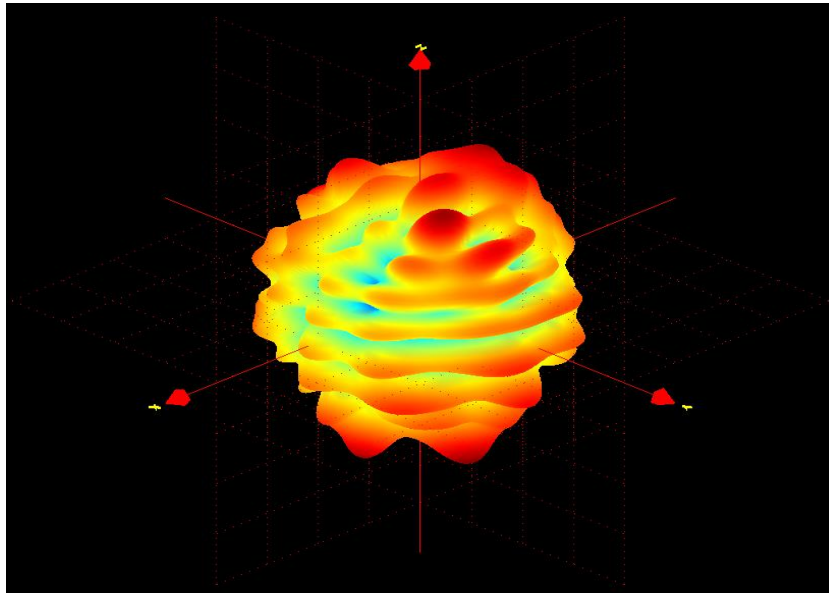

UNLESS OTHER SPECIFIED TOLERANCES ON :		 浙江海通通讯电子股份有限公司 海通通讯
X=±2	X.X=±0.1 X.XX=±0.05	
ANGLES=±	HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY : 曾传新	CHECKED BY : 郑由强	
DESIGNED BY : 谢广权	APPROVED BY : 周振邦	
TITLE : _____ Specification	DOCUMENT NO.	PAGE REV. A0