



TEST REPORT

No. I23N01648-BT

for

TCL Communication Ltd.

LTE/WCDMA/GSM mobile phone

Model Name: T311E

with

Hardware Version: V00

Software Version: T311E_OFCO_2SIM_V1.0_20230922_UNLOCK

FCC ID: 2ACCJB196

Issued Date: 2023-10-19

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,
Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.saict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23N01648-BT	Rev.0	1st edition	2023-10-19

Note: the latest revision of the test report supersedes all previous versions.



CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. TEST RESULTS	9
5.1. TESTING ENVIRONMENT	9
5.2. TEST RESULTS	9
5.3. STATEMENTS	9
6. TEST EQUIPMENTS UTILIZED	10
7. LABORATORY ENVIRONMENT	11
8. MEASUREMENT UNCERTAINTY	12
ANNEX A: DETAILED TEST RESULTS	13
TEST CONFIGURATION	13
A.0 ANTENNA REQUIREMENT	16
A.1 MAXIMUM PEAK OUTPUT POWER	17
A.2 BAND EDGES COMPLIANCE	18
A.3 CONDUCTED EMISSION	25
A.4 RADIATED EMISSION	36
A.5 20dB BANDWIDTH	48
A.6 TIME OF OCCUPANCY (DWELL TIME)	53
A.7 NUMBER OF HOPPING CHANNELS	57
A.8 CARRIER FREQUENCY SEPARATION	61
A.9 AC POWER LINE CONDUCTED EMISSION	63



1. Summary of Test Report

1.1. Test Items

Description	LTE/WCDMA/GSM mobile phone
Model Name	T311E
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

1.2. Test Standards

FCC Part15-2021; ANSI C63.10-2013.

1.3. Test Result

Pass

Please refer to "5.2.Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project data

Testing Start Date:	2022-12-13
Testing End Date:	2022-12-26

1.6. Signature

Lin Zechuang

(Prepared this test report)

An Ran

(Reviewed this test report)

Zhang Bojun

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Annie Jiang
E-Mail: nianxiang.jiang@tcl.com
Telephone: +86 755 3661 1621
FAX: /

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person: Annie Jiang
E-Mail: nianxiang.jiang@tcl.com
Telephone: +86 755 3661 1621
FAX: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE/WCDMA/GSM mobile phone
Model Name	T311E
Frequency Band	ISM 2400MHz~2483.5MHz
Equipment type	Bluetooth® BR/EDR
Type of Modulation	GFSK/ π /4 DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated antenna
Antenna Gain	-1.01dBi
Power Supply	3.7V DC by Battery
FCC ID	2ACCJB196
Condition of EUT as received	No abnormality in appearance

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
UT08aa	353167580000578	V00	T311E_OFCO_2SIM_V1.0 _20230922_UNLOCK	2022-12-12
UT04aa	353167580000636	V00	T311E_OFCO_2SIM_V1.0 _20230922_UNLOCK	2022-12-12

*EUT ID: is used to identify the test sample in the lab internally.

UT08aa is used for Conduction test; UT04aa is used for Radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE used during the test

AE No.	Description	AE ID*
AE1	Battery	/
AE2	Charger	/
AE3	Headset	/

AE1

Model	TLi010CA
Manufacturer	ZhongShan Tianmao Battery Co., Ltd.
Capacity	1030mAh
Nominal Voltage	3.7 V

AE2



Model	XT-252A-5055
Manufacturer	ShenZhen BaiJunDa Electronics Co., Ltd.
AE3	
Model	JWEP1259-M01R
Manufacturer	Huizhou Juwei Electronics Co., Ltd.

*AE ID and AE Label: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of LTE/WCDMA/GSM mobile phone with integrated antenna and battery.

It consists of normal options: Lithium Battery, Charger and Headset.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

According to the customer's description, T311E is a variant product of T311A.

All conduction results were from the initial model. The initial model report number is I22N02497-BT.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Band Edges Compliance	15.247 (d)	P
3	Conducted Spurious Emission	15.247 (d)	P
4	Radiated Spurious Emission	15.247, 15.205, 15.209	P
5	Occupied 20dB bandwidth	15.247 (a)	/
6	Time of Occupancy (Dwell Time)	15.247 (a)	P
7	Number of Hopping Channel	15.247 (a)	P
8	Carrier Frequency Separation	15.247 (a)	P
9	AC Power line Conducted Emission	15.107, 15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/matrix manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.

6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2022-12-29	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2022-12-29	1 year
3	Data Acquisition	U2531A	TW55443507	Keysight	/	/
4	Bluetooth Tester	CBT32	100584	Rohde & Schwarz	2022-12-29	1 year
5	Shielding Room	S81	CT000986-1344	ETS-Lindgren	2026-09-12	5 years

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Test Receiver	ESR7	101676	Rohde & Schwarz	2023-11-23	1 year
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2025-04-17	3 years
4	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years
5	Spectrum Analyzer	FSV40	101192	Rohde & Schwarz	2023-01-12	1 year
6	Loop Antenna	HLA6120	35779	TESEQ	2025-05-10	3 years
7	Horn Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2023-01-06	3 years
8	Test Receiver	ESCI	100702	Rohde & Schwarz	2023-01-12	1 year
9	LISN	ENV216	102067	Rohde & Schwarz	2023-07-14	1 year

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

7. Laboratory Environment

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

Anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	<±4 dB, 3 m distance, from 30 to 1000 MHz
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. Maximum Peak Output Power	1.32dB	
2. Band Edges Compliance	1.92dB	
3. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
4.. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.79dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.86dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.82dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	2.90dB
5. 20dB Bandwidth	4.56kHz	
6. Time of Occupancy (Dwell Time) & Number of Hopping Channels	0.58ms	
7. Carrier Frequency Separation	4.56kHz	
8. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	2.62dB


ANNEX A: Detailed Test Results

Test Configuration

The measurement is made according to ANSI C63.10.

1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the EUT hopping mode (hopping on or hopping off).
5. Set the spectrum analyzer to start measurement.
6. Record the values.

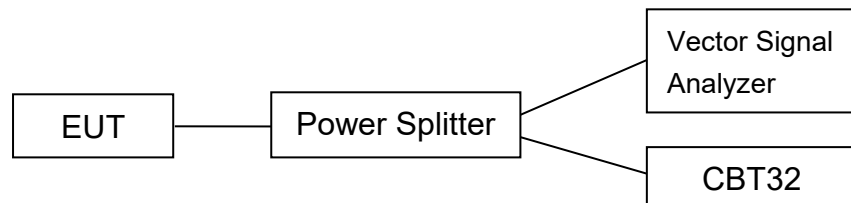


2) Radiated Measurements

Test setup:

9kHz-30MHz:

The EUT are measured in a anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The test setup refers to figure below.


Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

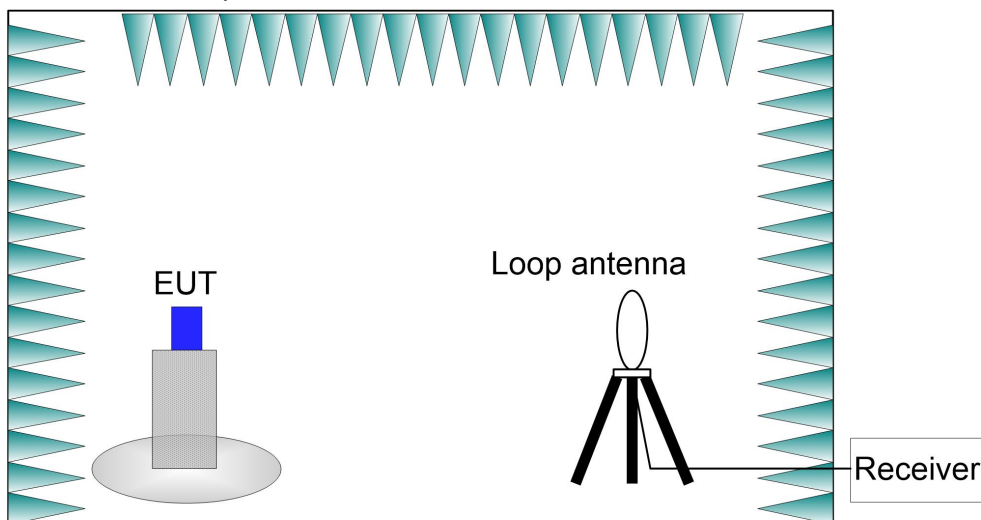


30MHz-26.5GHz:

The EUT are measured in a anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1.0 meter to 4.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.


30MHz-1GHz:

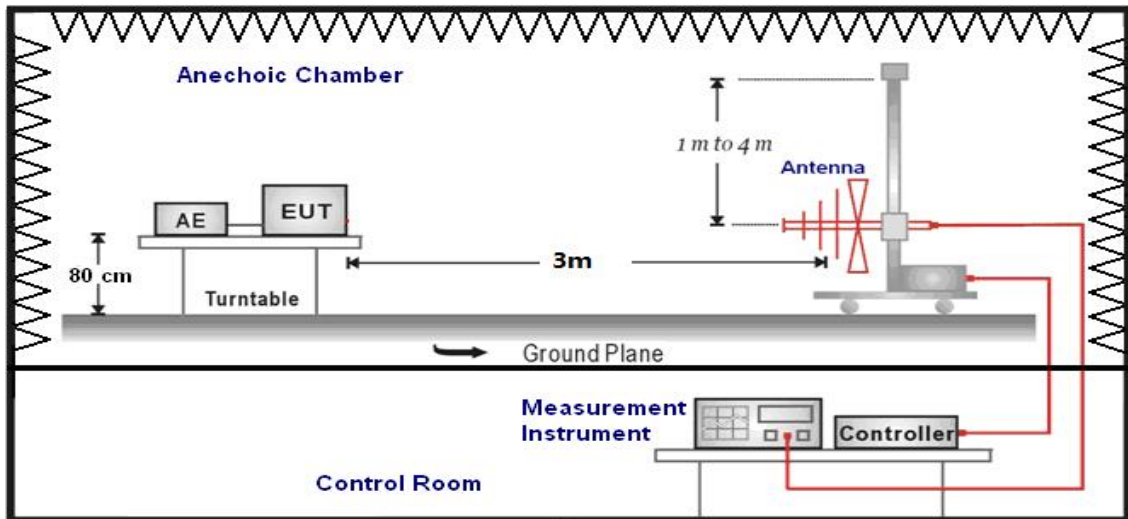

1GHz-3GHz:

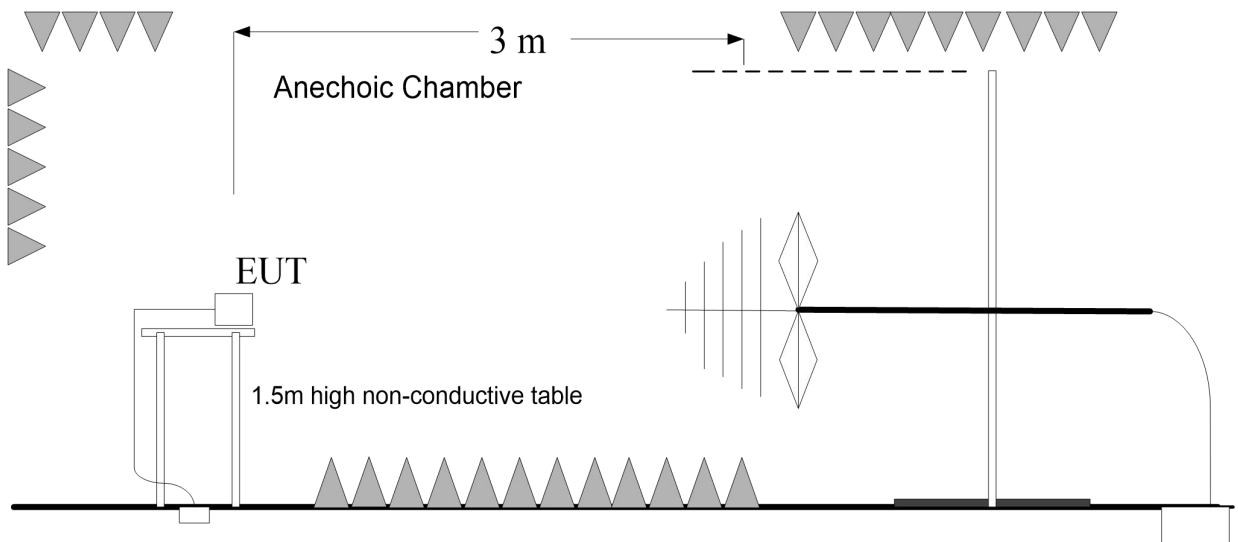


3GHz-26.5GHz:

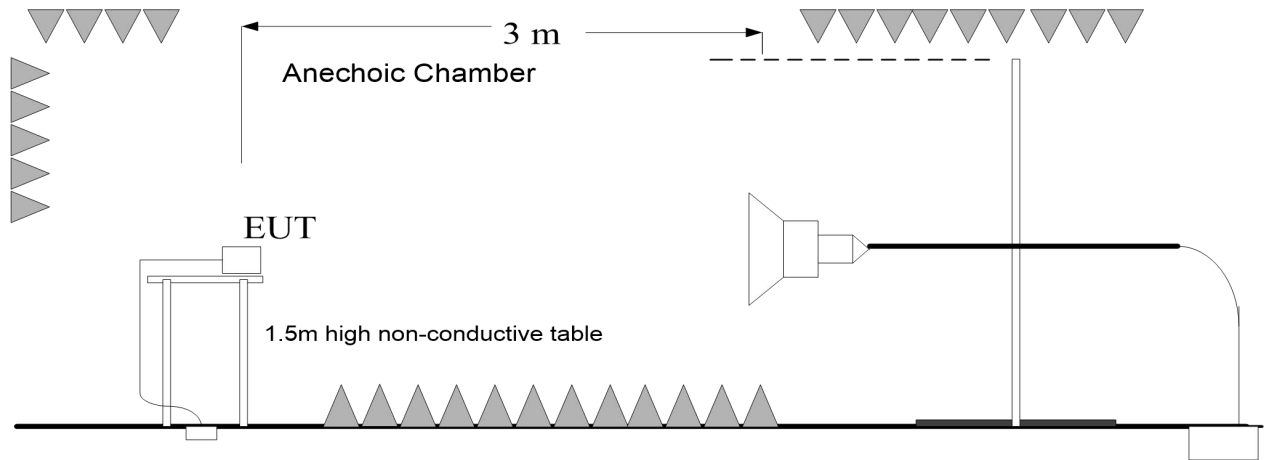

3) AC Power line Conducted Emission Measurement

The EUT is working as Bluetooth terminal. A communication link of Bluetooth is set up with a System Simulator (SS). The EUT is commanded to operate at maximum transmitting power.

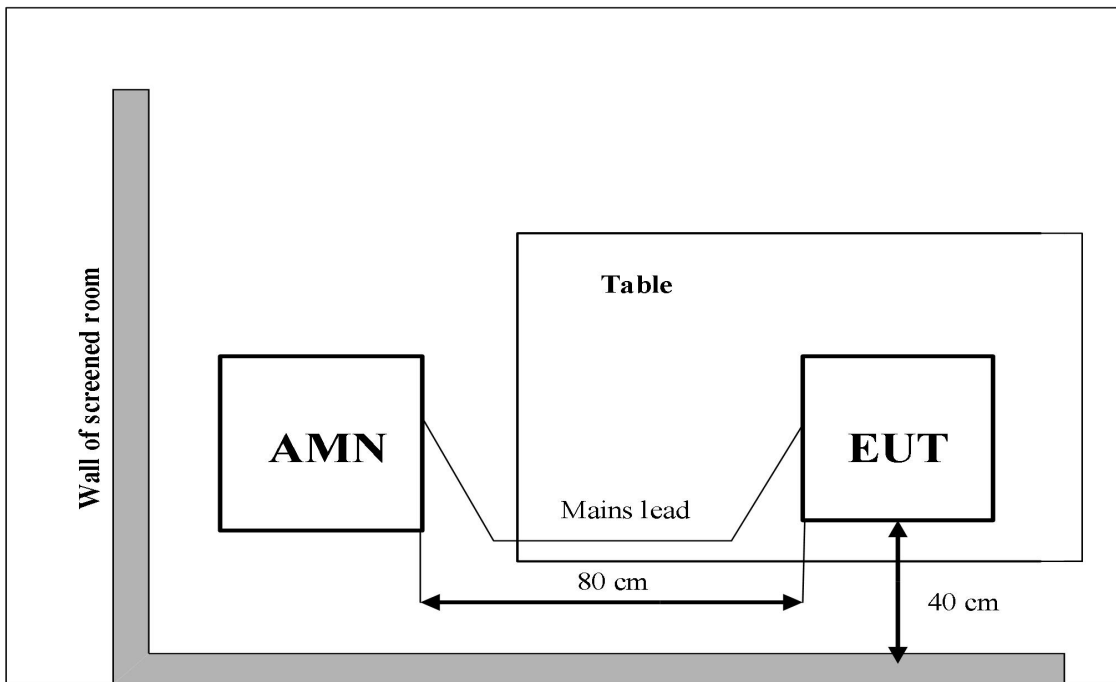



A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -1.01dBi.
The RF transmitter uses an integrate antenna without connector.**



A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 7.8.5.

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

Measurement Results:

Mode	Peak Conducted Output Power (dBm)			Conclusion
	2402MHz (CH0)	2441MHz (CH39)	2480MHz (CH78)	
GFSK	10.12	9.74	9.67	P
$\pi/4$ DQPSK	10.87	10.83	10.77	P
8DPSK	10.94	10.92	10.85	P

Conclusion: Pass

**A.2 Band Edges Compliance****Method of Measurement: See ANSI C63.10-clause 7.8.6.****Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Frequency (MHz)	Hopping	Test Results	Conclusion
GFSK	2402(CH0)	ON	Fig.1	P
	2480(CH78)	ON	Fig.2	P
$\pi/4$ DQPSK	2402(CH0)	ON	Fig.3	P
	2480(CH78)	ON	Fig.4	P
8DPSK	2402(CH0)	ON	Fig.5	P
	2480(CH78)	ON	Fig.6	P

Mode	Frequency (MHz)	Hopping	Test Results	Conclusion
GFSK	2402(CH0)	OFF	Fig.7	P
	2480(CH78)	OFF	Fig.8	P
$\pi/4$ DQPSK	2402(CH0)	OFF	Fig.9	P
	2480(CH78)	OFF	Fig.10	P
8DPSK	2402(CH0)	OFF	Fig.11	P
	2480(CH78)	OFF	Fig.12	P

See below for test graphs.**Conclusion: Pass**

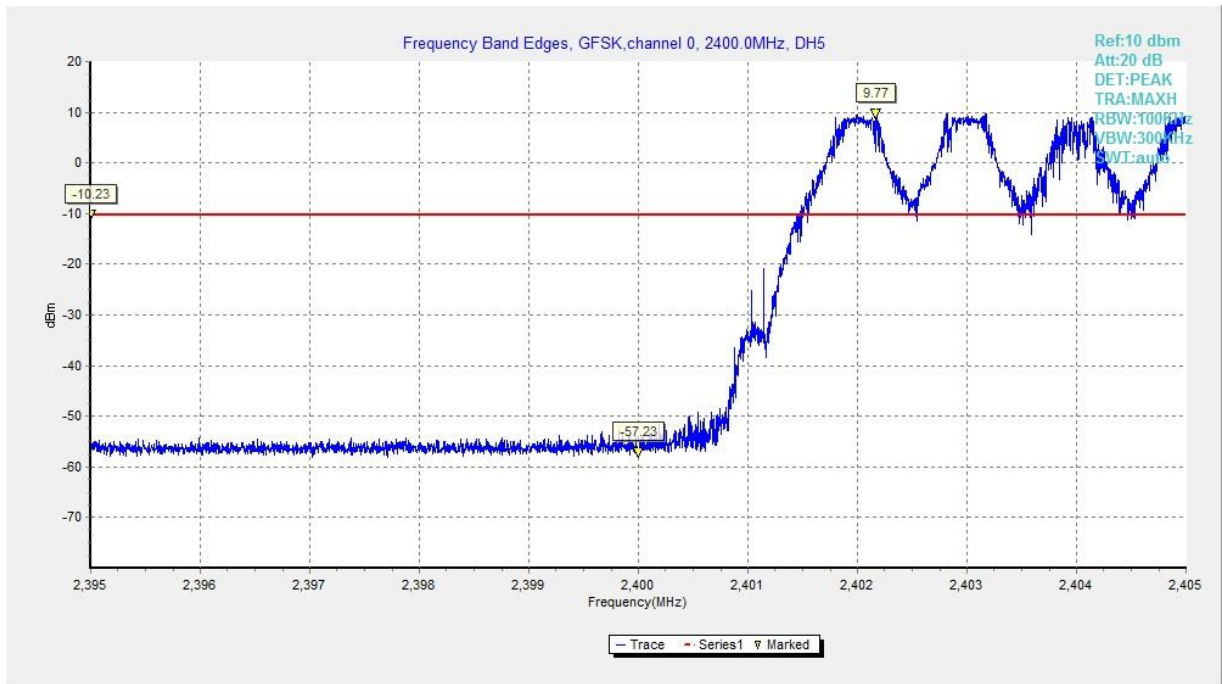


Fig. 1 Band Edges (GFSK, CH0, Hopping ON)

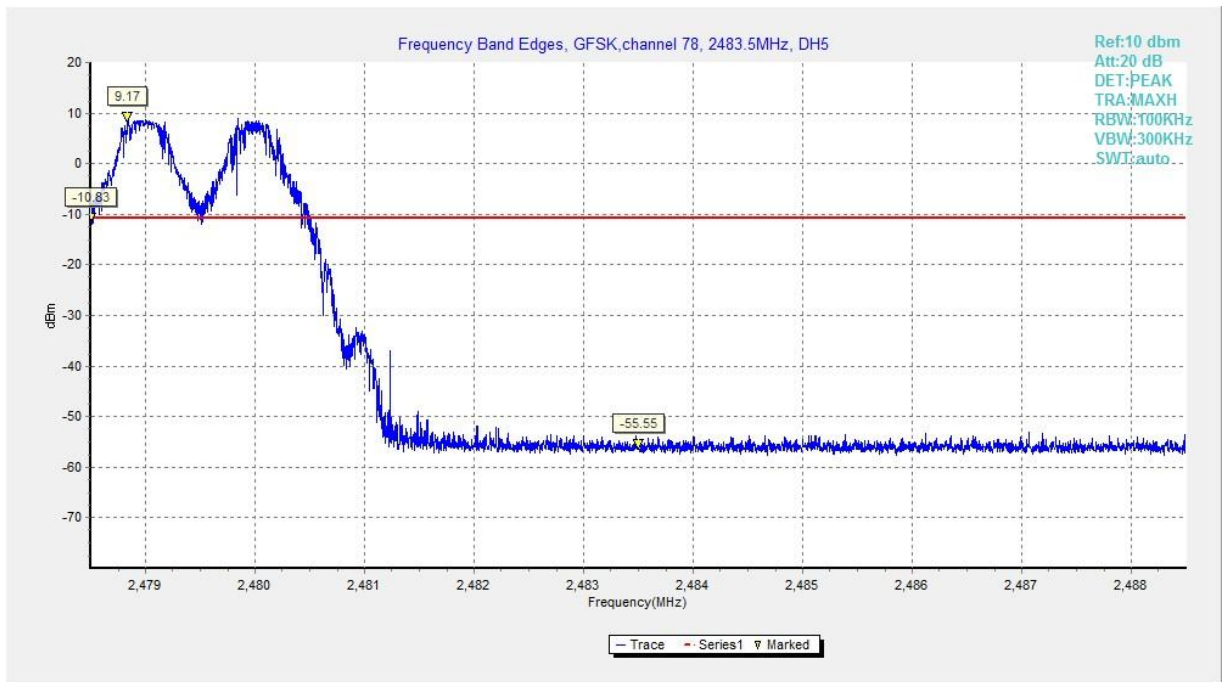


Fig. 2 Band Edges (GFSK, CH78, Hopping ON)

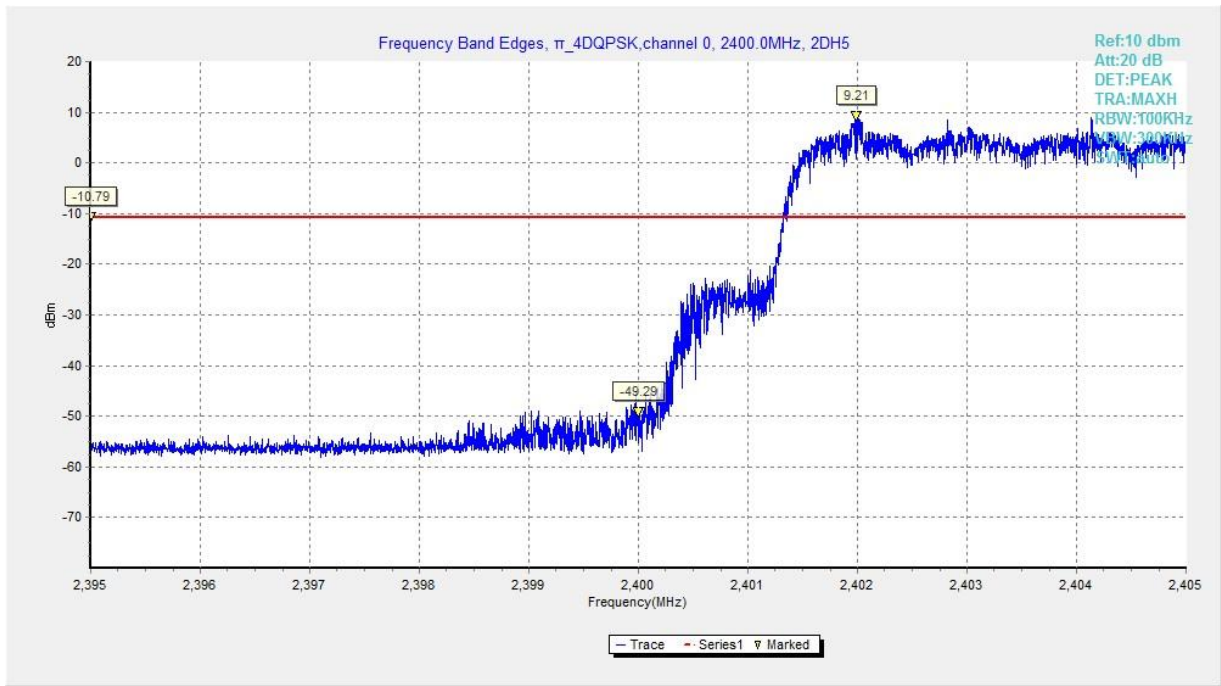


Fig. 3 Band Edges ($\pi/4$ DQPSK, CH0, Hopping ON)

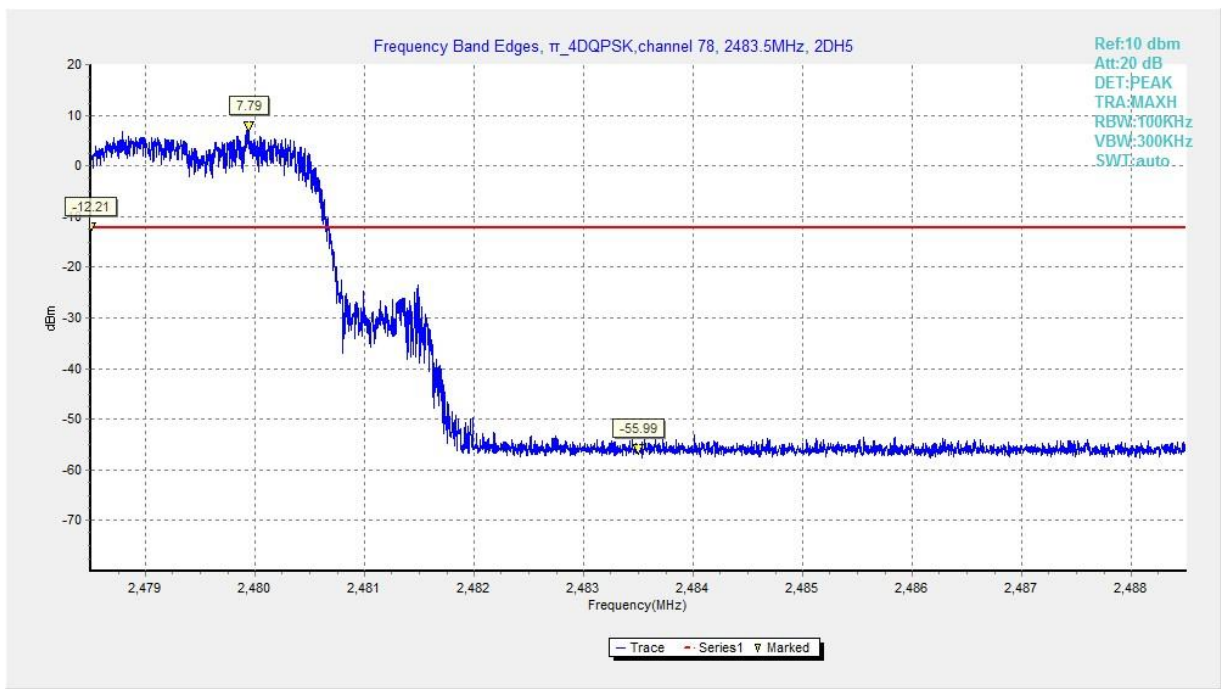


Fig. 4 Band Edges ($\pi/4$ DQPSK, CH78, Hopping ON)

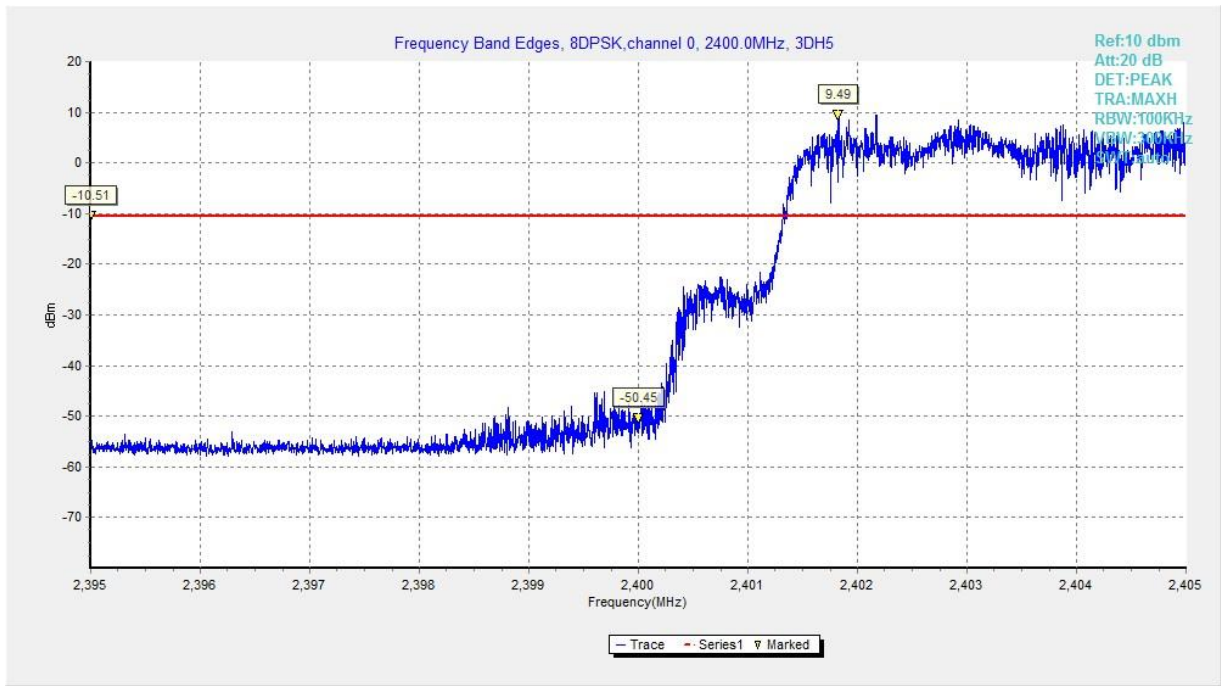


Fig. 5 Band Edges (8DPSK, CH0, Hopping ON)

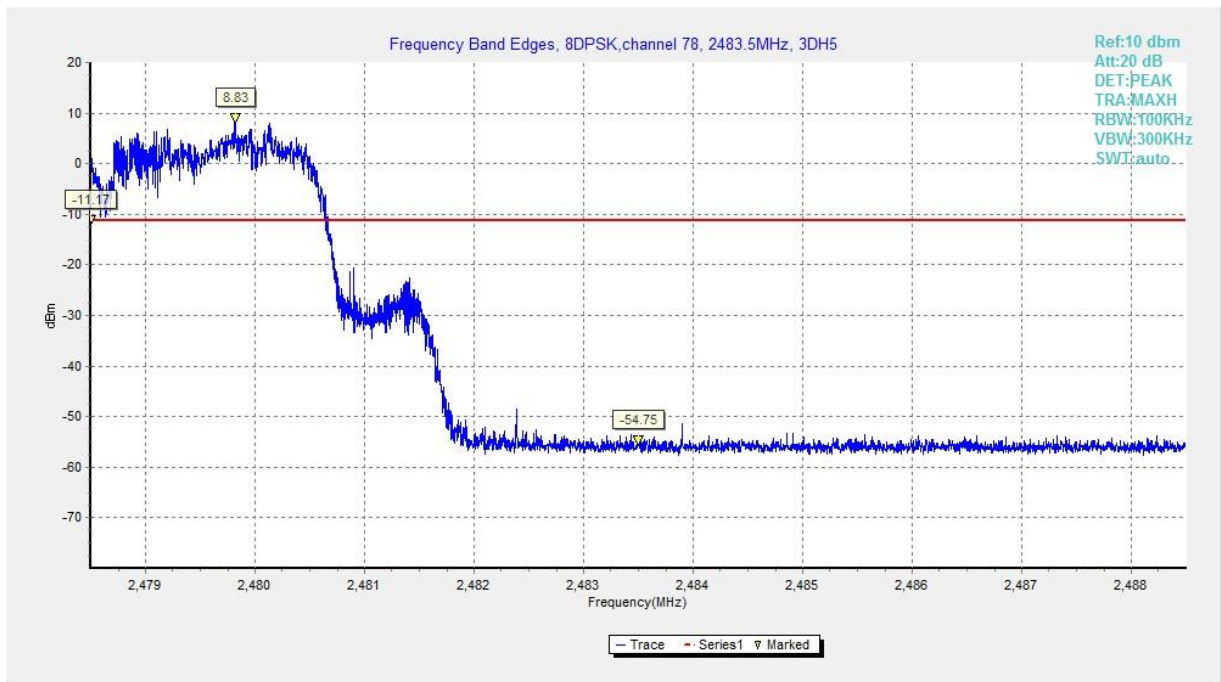


Fig. 6 Band Edges (8DPSK, CH78, Hopping ON)

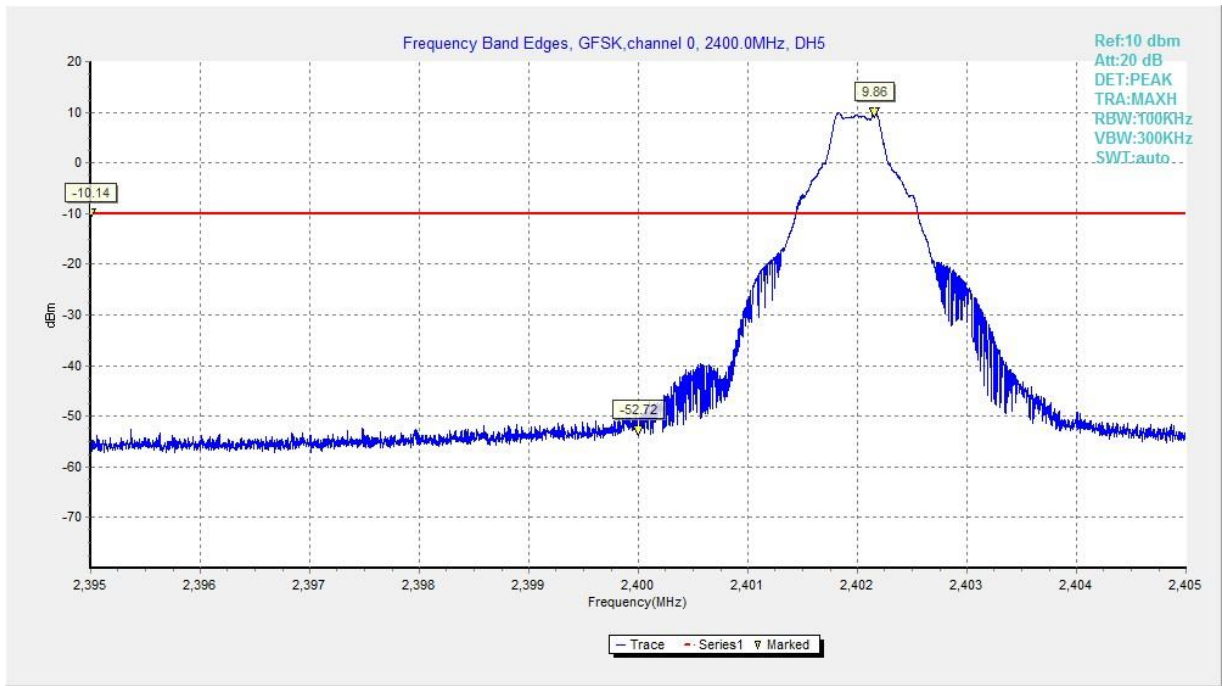


Fig. 7 Band Edges (GFSK, CH0, Hopping OFF)

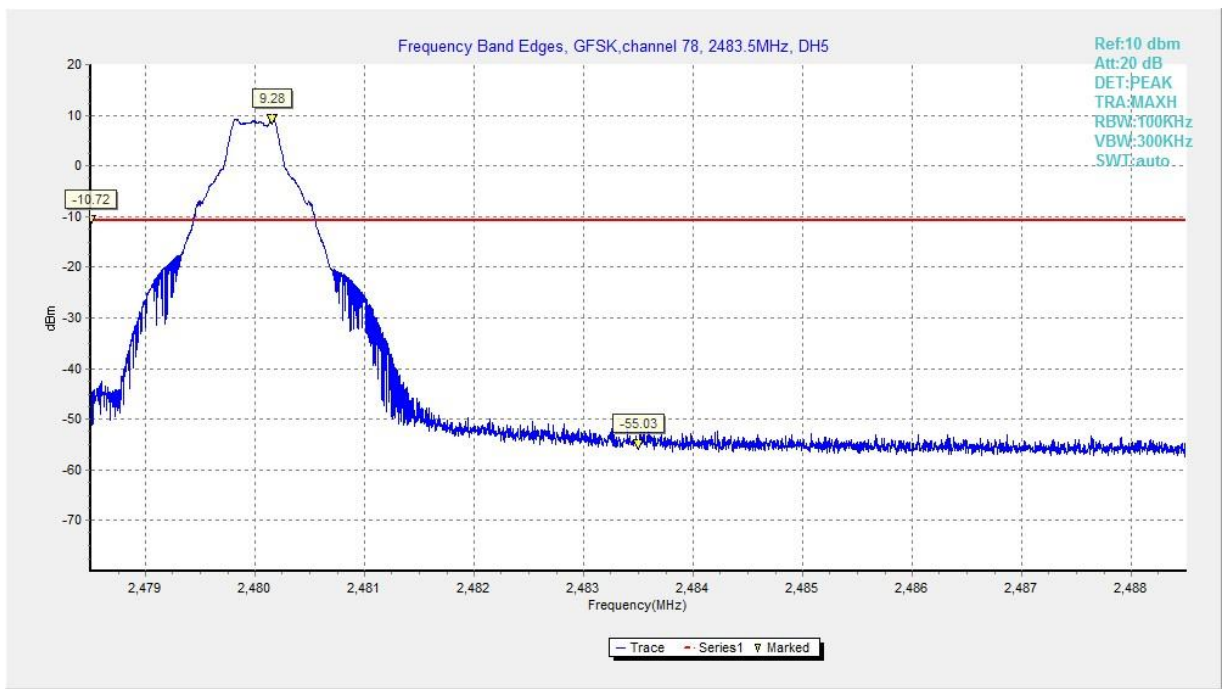


Fig. 8 Band Edges (GFSK, CH78, Hopping OFF)

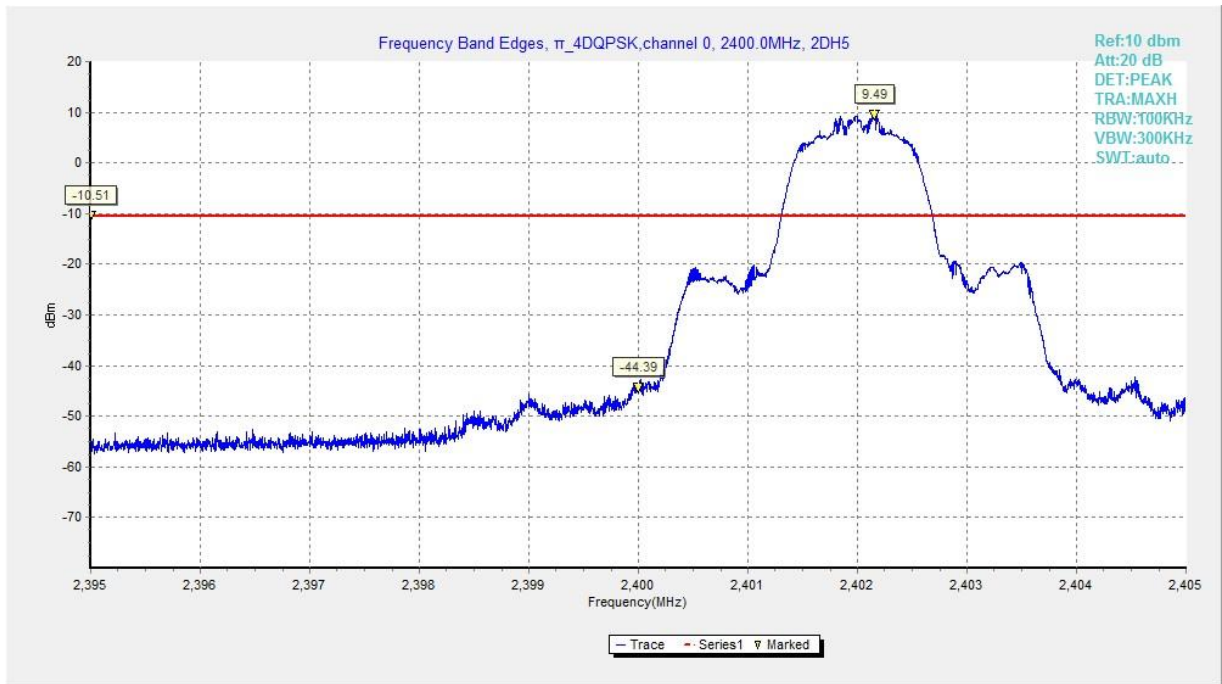


Fig. 9 Band Edges ($\pi/4$ DQPSK, CH0, Hopping OFF)

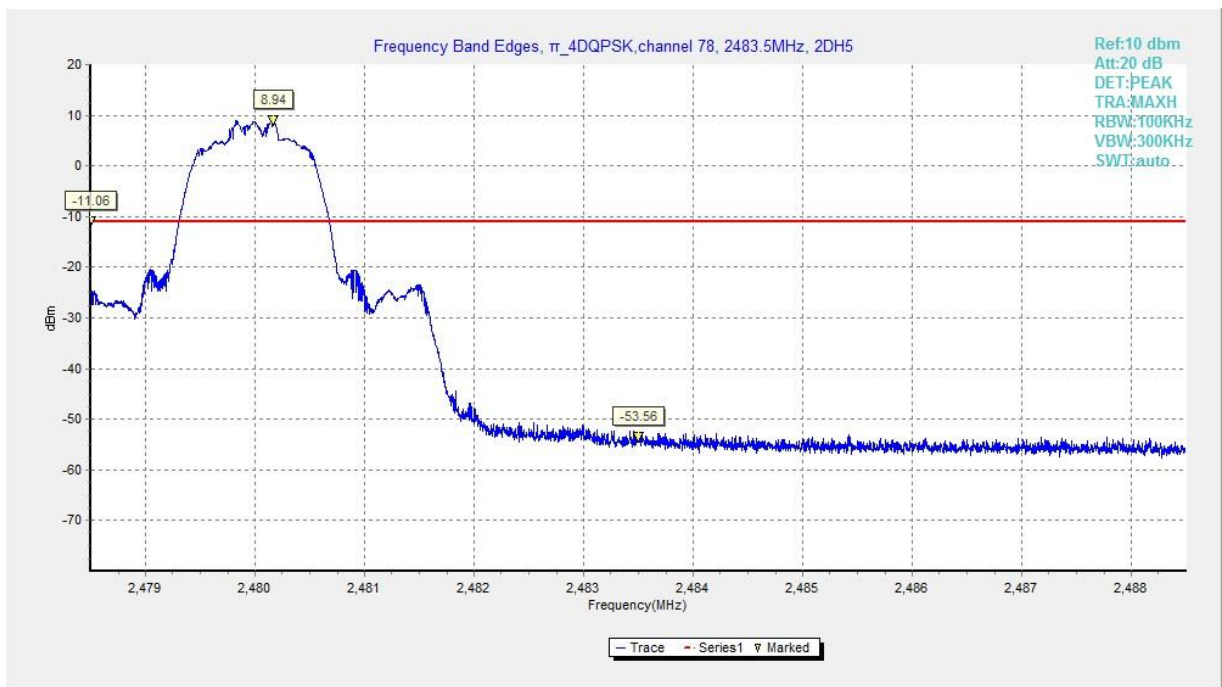


Fig. 10 Band Edges ($\pi/4$ DQPSK, CH78, Hopping OFF)

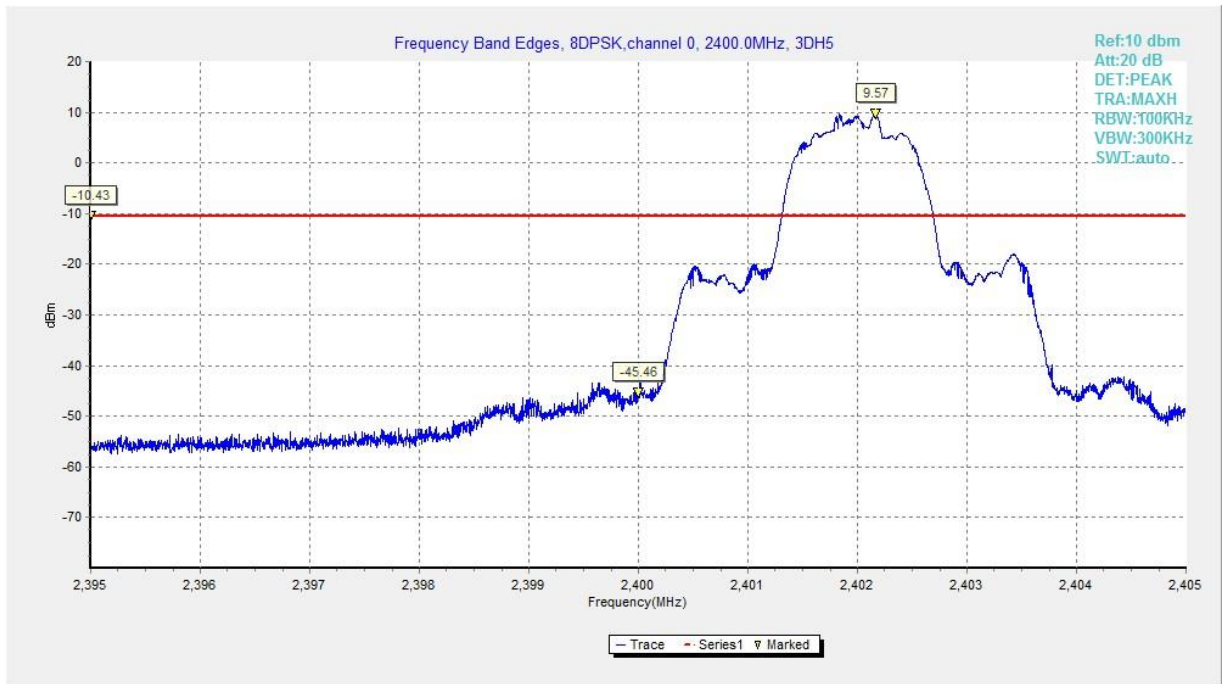


Fig. 11 Band Edges (8DPSK, CH0, Hopping OFF)

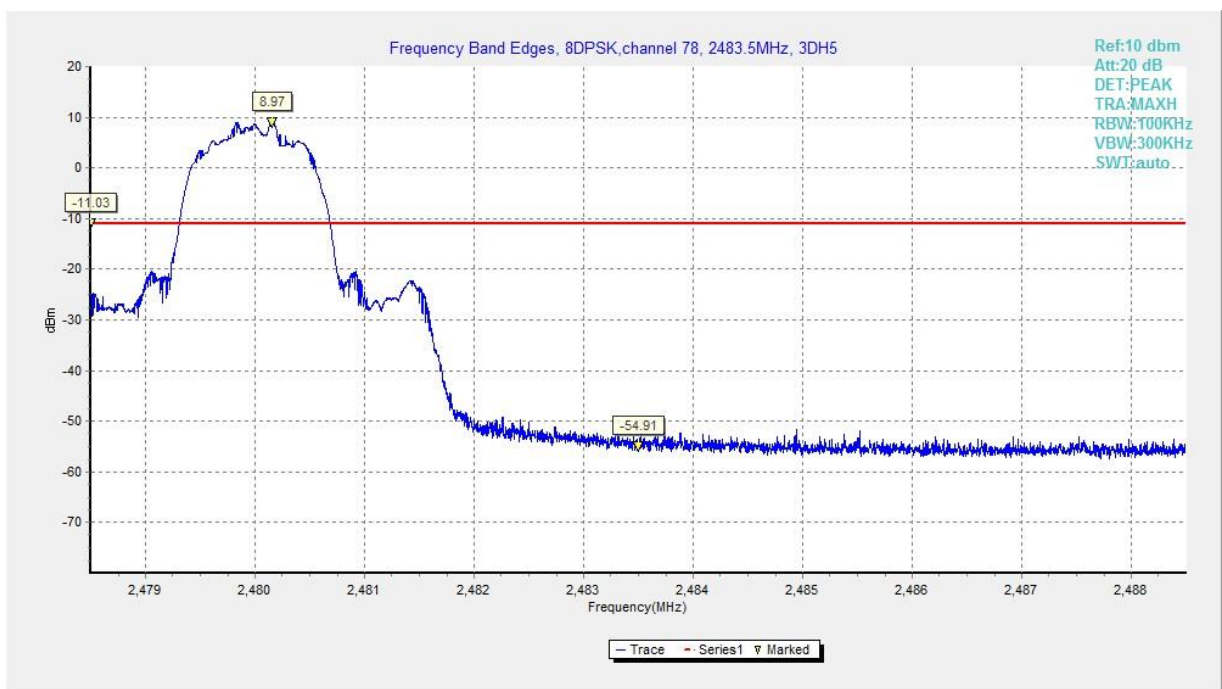


Fig. 12 Band Edges (8DPSK, CH78, Hopping OFF)



A.3 Conducted Emission

Method of Measurement: See ANSI C63.10-clause 7.8.8.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
GFSK	2402(CH0)	1GHz-3GHz	Fig.13	P
		3GHz-10GHz	Fig.14	P
	2441(CH39)	1GHz-3GHz	Fig.15	P
		3GHz-10GHz	Fig.16	P
	2480(CH78)	1GHz-3GHz	Fig.17	P
		3GHz-10GHz	Fig.18	P
$\pi/4$ DQPSK	2402(CH0)	1GHz-3GHz	Fig.19	P
		3GHz-10GHz	Fig.20	P
	2441(CH39)	1GHz-3GHz	Fig.21	P
		3GHz-10GHz	Fig.22	P
	2480(CH78)	1GHz-3GHz	Fig.23	P
		3GHz-10GHz	Fig.24	P
8DPSK	2402(CH0)	1GHz-3GHz	Fig.25	P
		3GHz-10GHz	Fig.26	P
	2441(CH39)	1GHz-3GHz	Fig.27	P
		3GHz-10GHz	Fig.28	P
	2480(CH78)	1GHz-3GHz	Fig.29	P
		3GHz-10GHz	Fig.30	P
/	All channels	30 MHz-1GHz	Fig.31	P
		10GHz-26GHz	Fig.32	P

See below for test graphs.

Conclusion: Pass

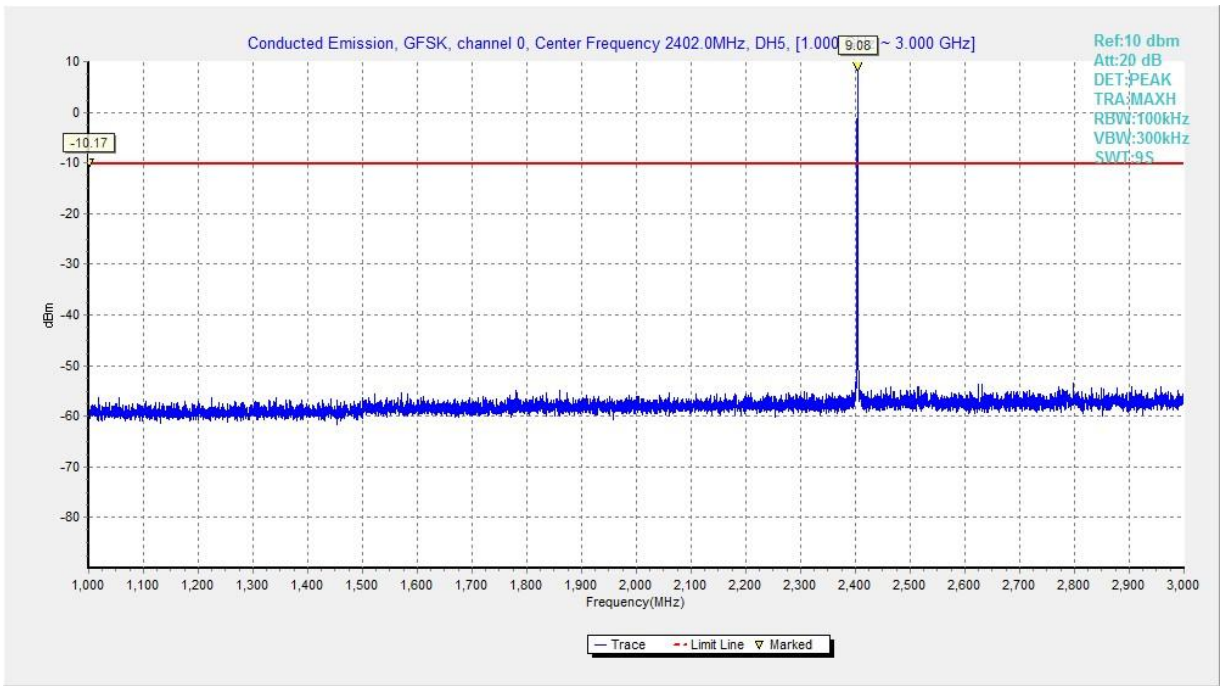


Fig. 13 Conducted Spurious Emission (GFSK, CH0, 1GHz-3GHz)

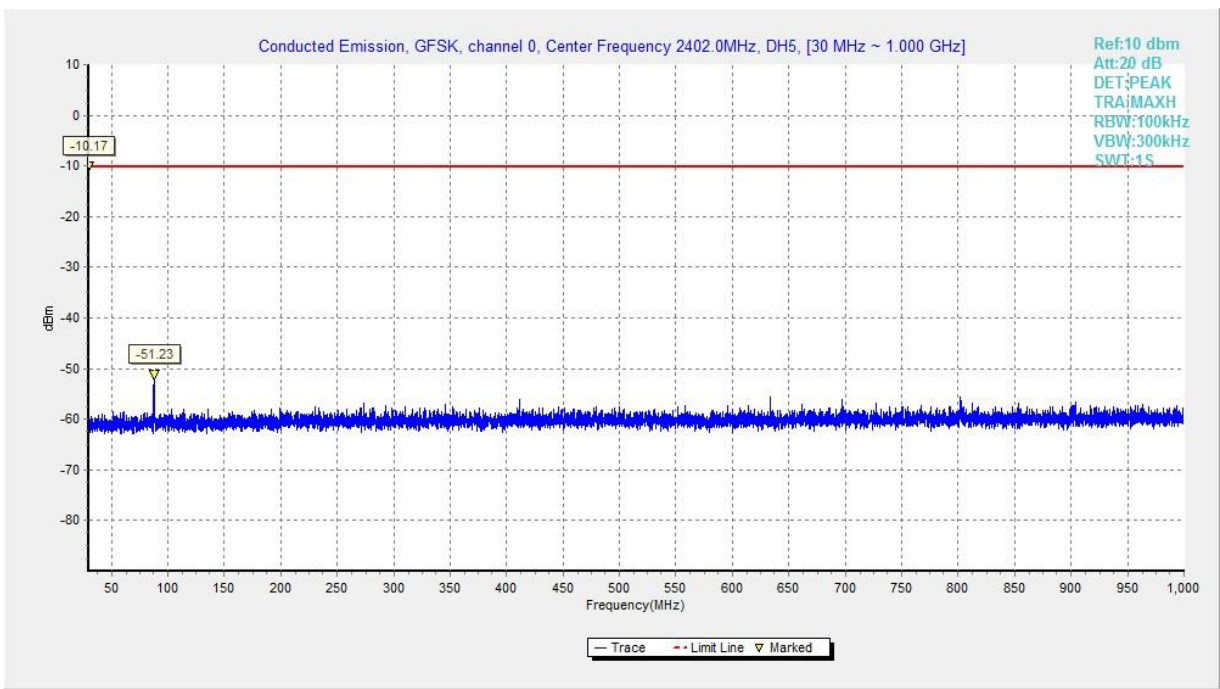


Fig. 14 Conducted Spurious Emission (GFSK, CH0, 3GHz-10GHz)

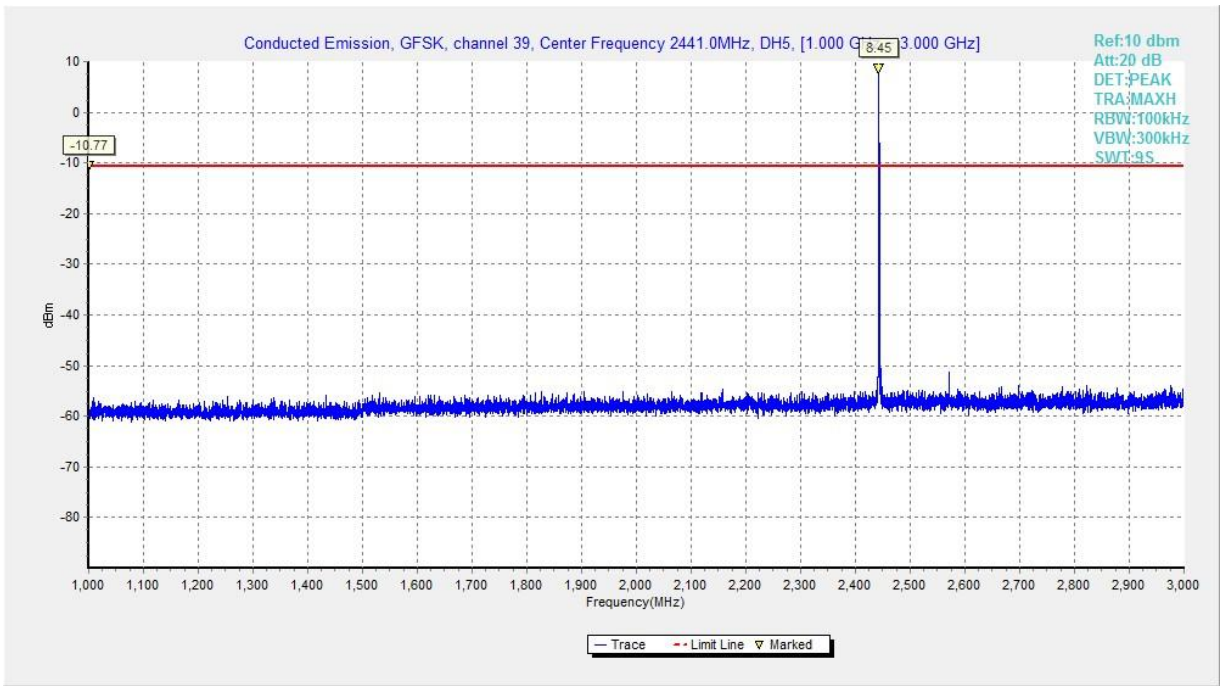


Fig. 15 Conducted Spurious Emission (GFSK, CH39, 1GHz-3GHz)

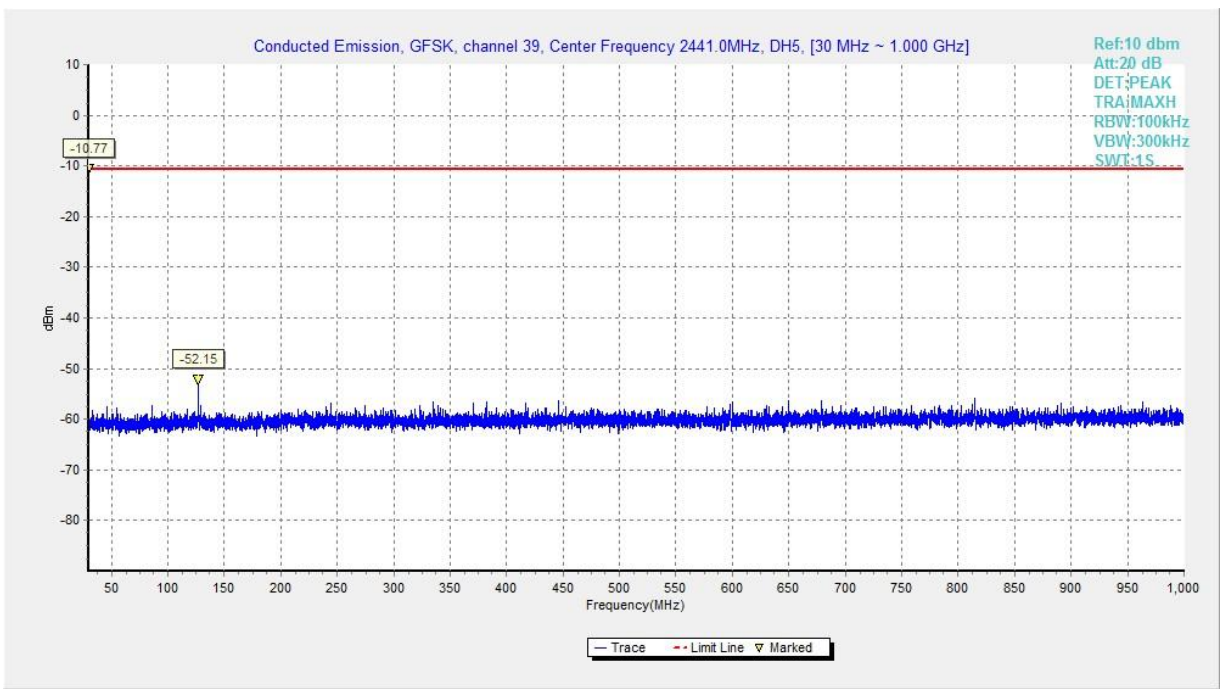


Fig. 16 Conducted Spurious Emission (GFSK, CH39, 3GHz-10GHz)

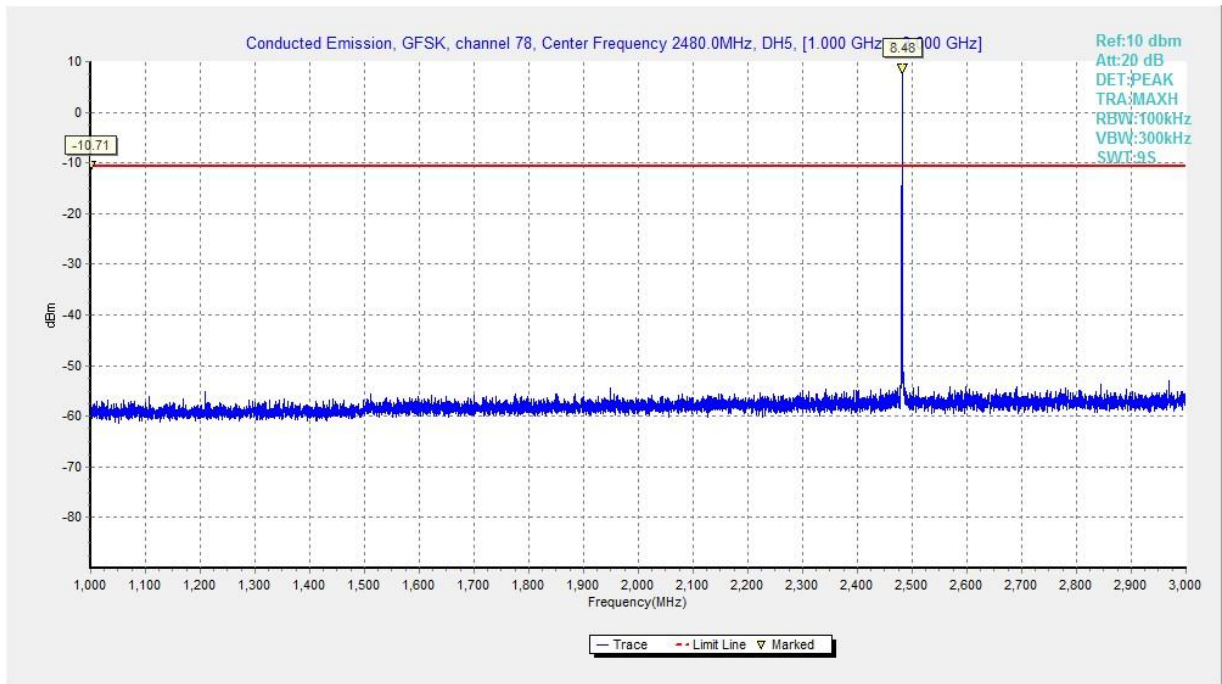


Fig. 17 Conducted Spurious Emission (GFSK, CH78, 1GHz-3GHz)

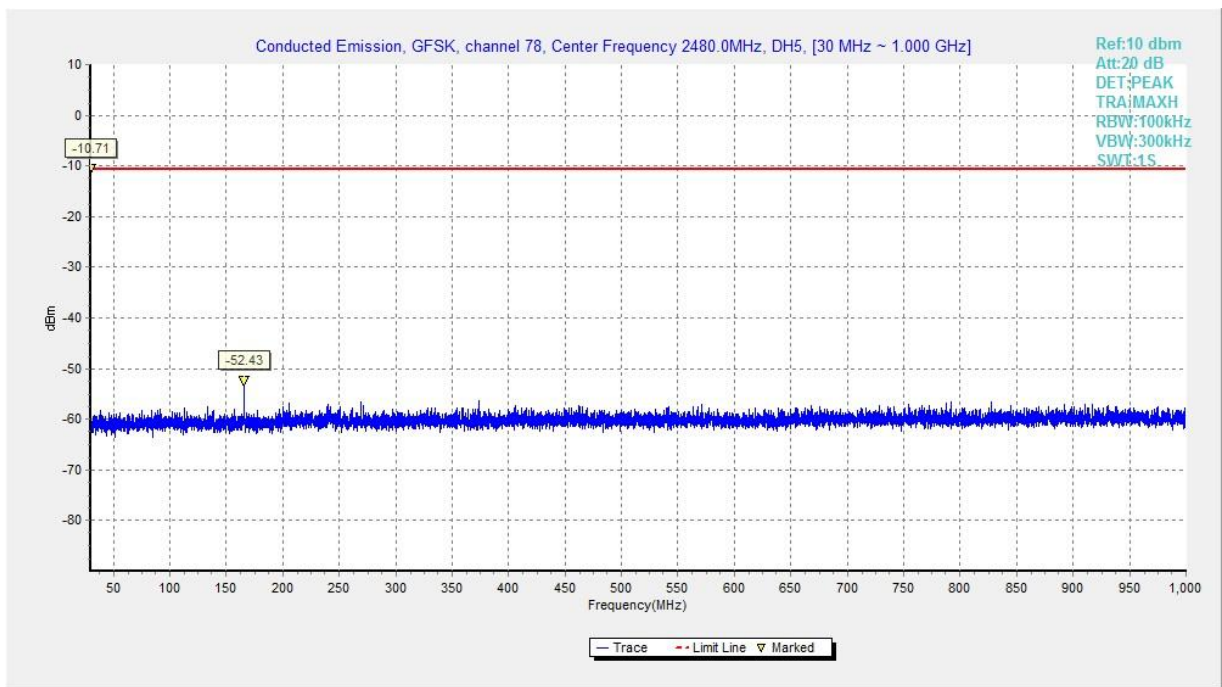


Fig. 18 Conducted Spurious Emission (GFSK, CH78, 3GHz-10GHz)

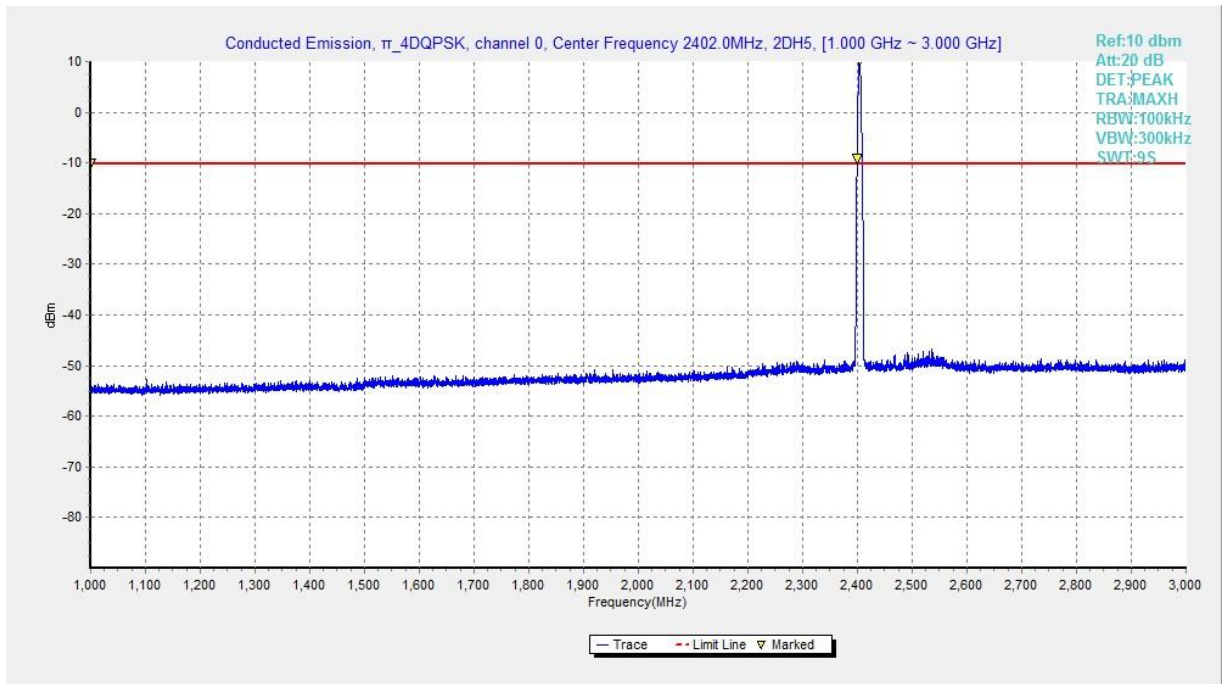


Fig. 19 Conducted Spurious Emission ($\pi/4$ DQPSK, CH0, 1GHz-3GHz)

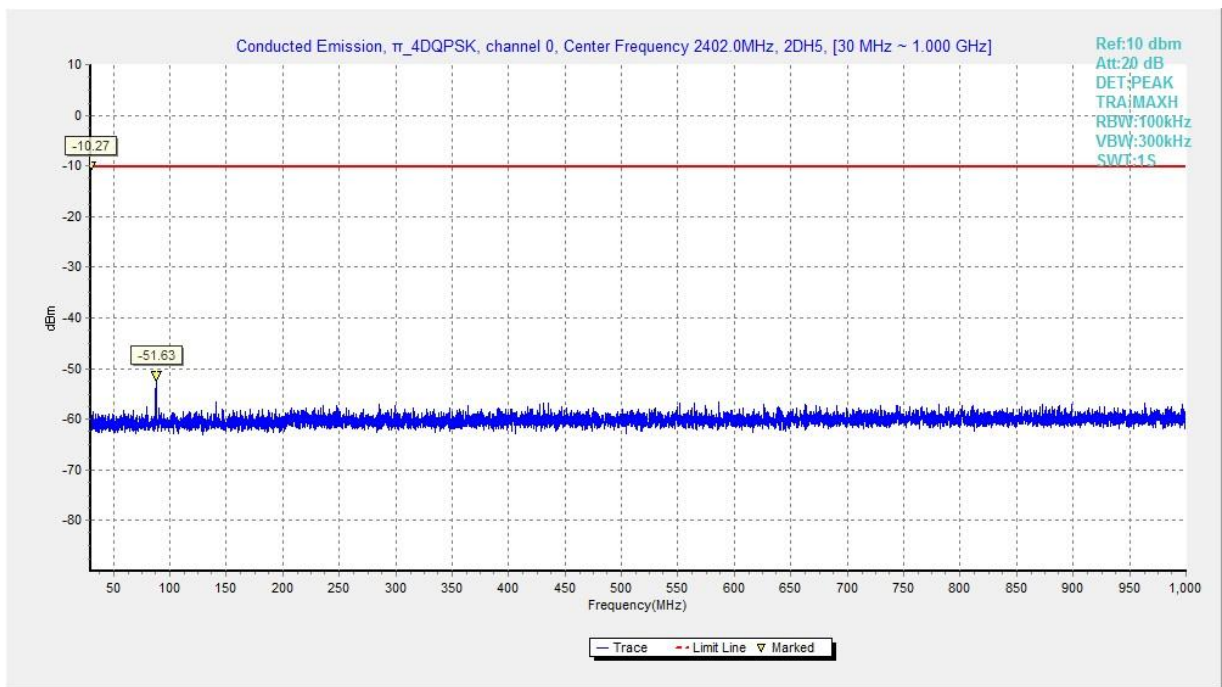


Fig. 20 Conducted Spurious Emission ($\pi/4$ DQPSK, CH0, 3GHz-10GHz)

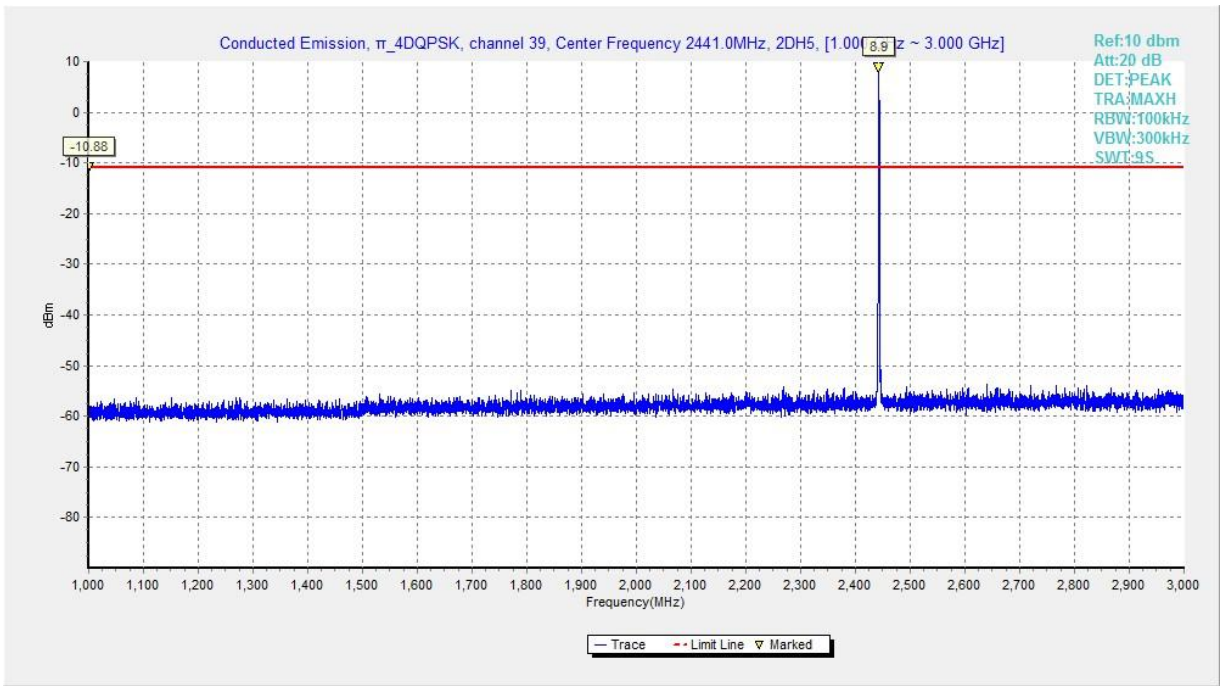


Fig. 21 Conducted Spurious Emission ($\pi/4$ DQPSK, CH39, 1GHz-3GHz)

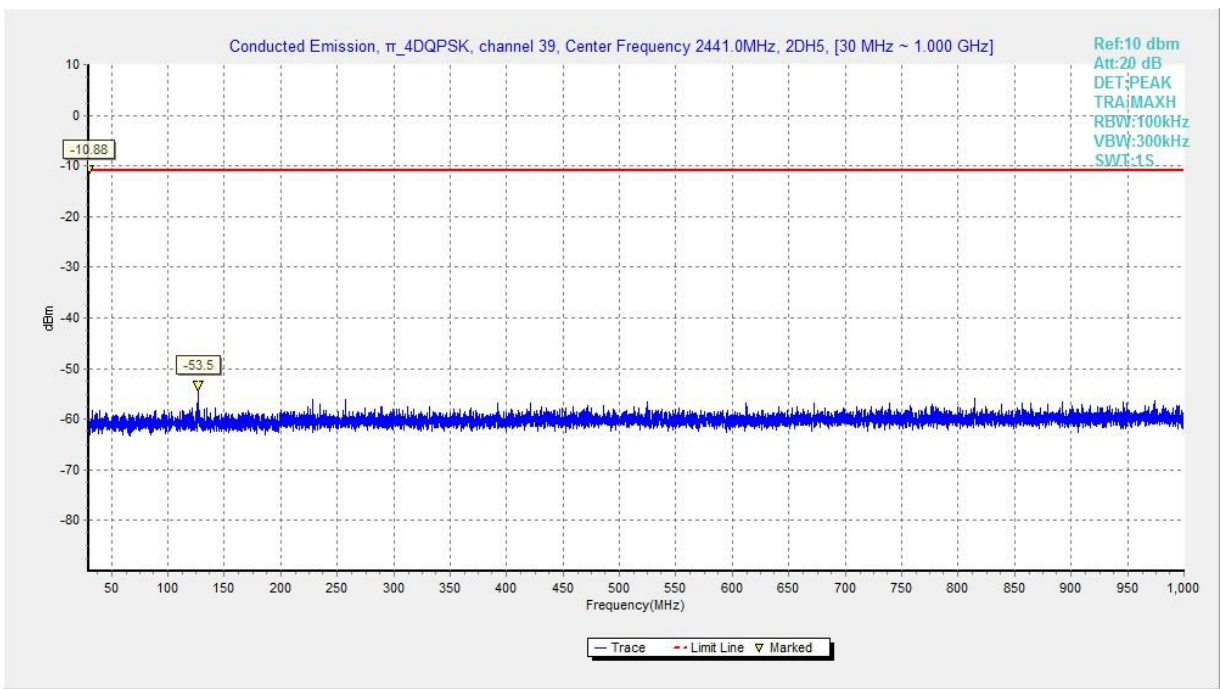


Fig. 22 Conducted Spurious Emission ($\pi/4$ DQPSK, CH39, 3GHz-10GHz)

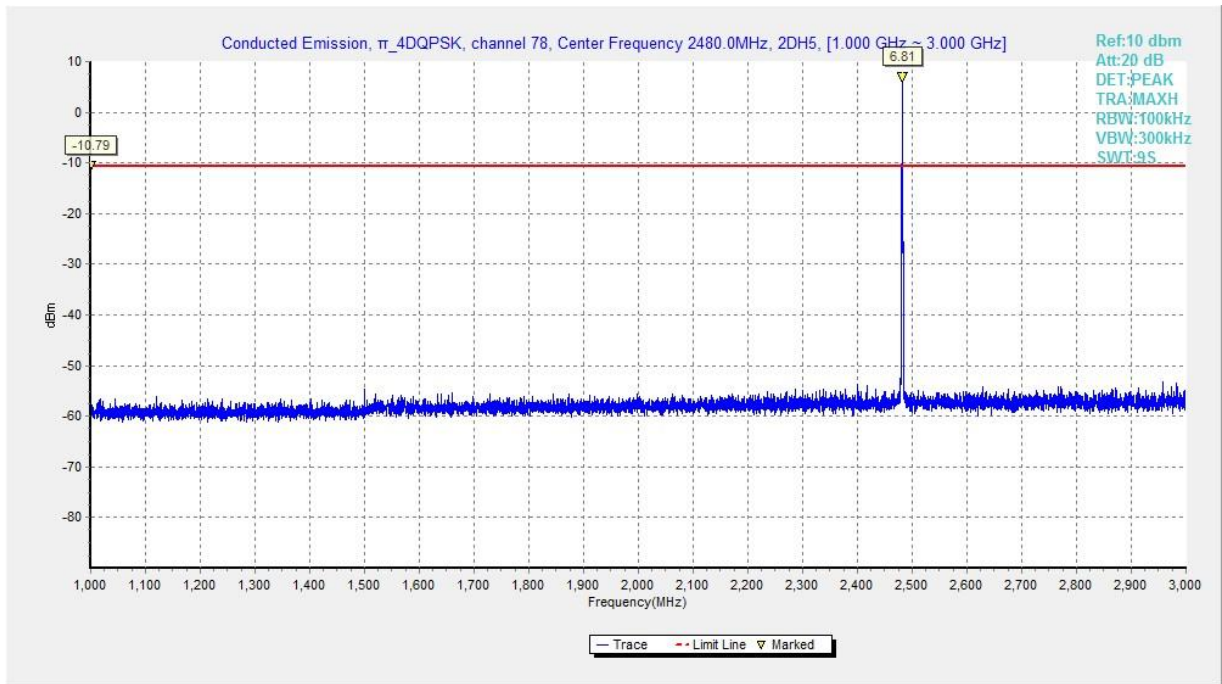


Fig. 23 Conducted Spurious Emission ($\pi/4$ DQPSK, CH78, 1GHz-3GHz)

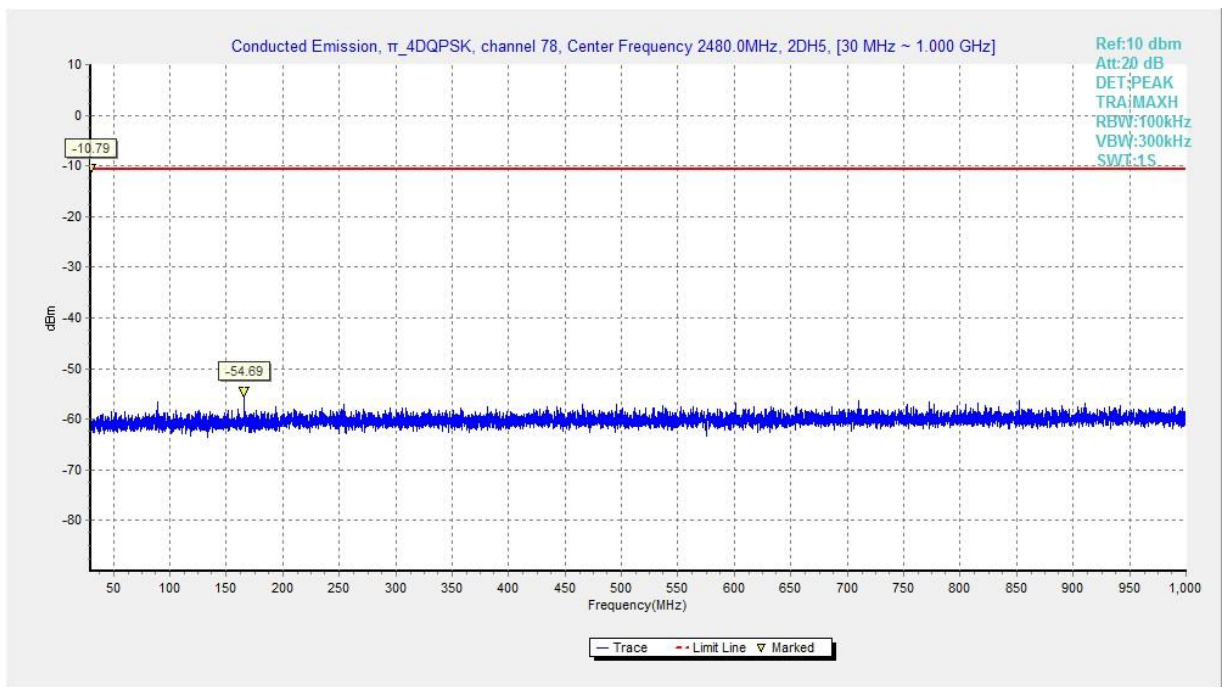


Fig. 24 Conducted Spurious Emission ($\pi/4$ DQPSK, CH78, 3GHz-10GHz)

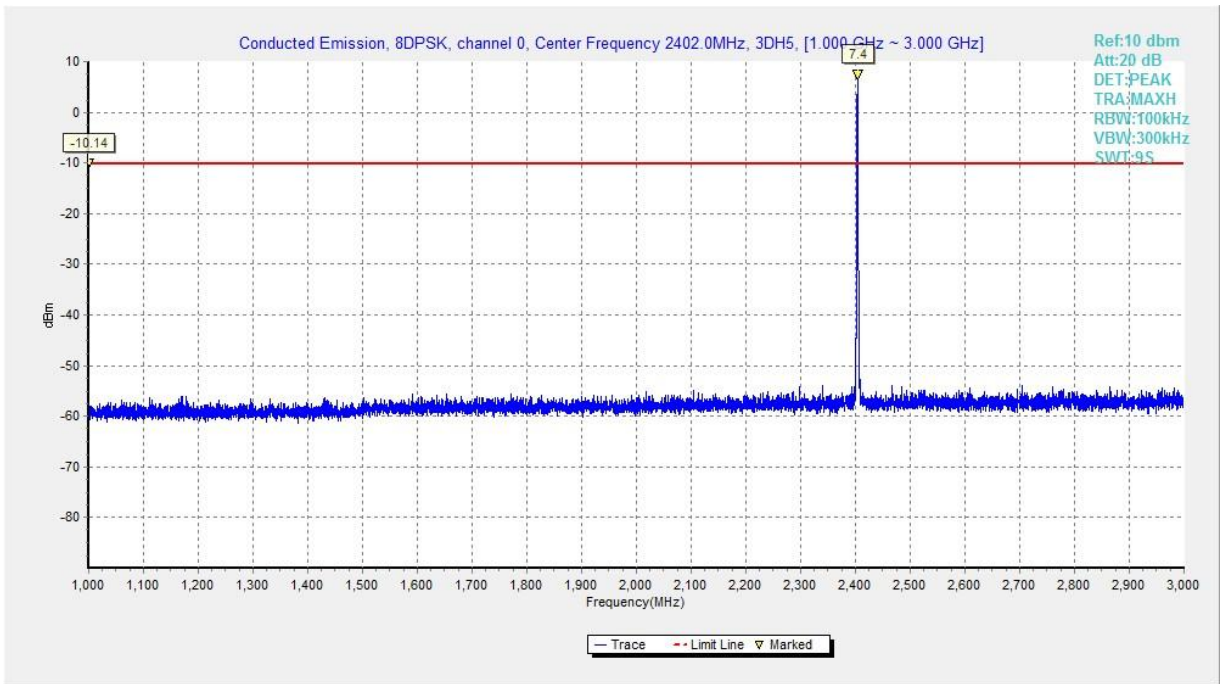


Fig. 25 Conducted Spurious Emission (8DPSK, CH0, 1GHz-3GHz)

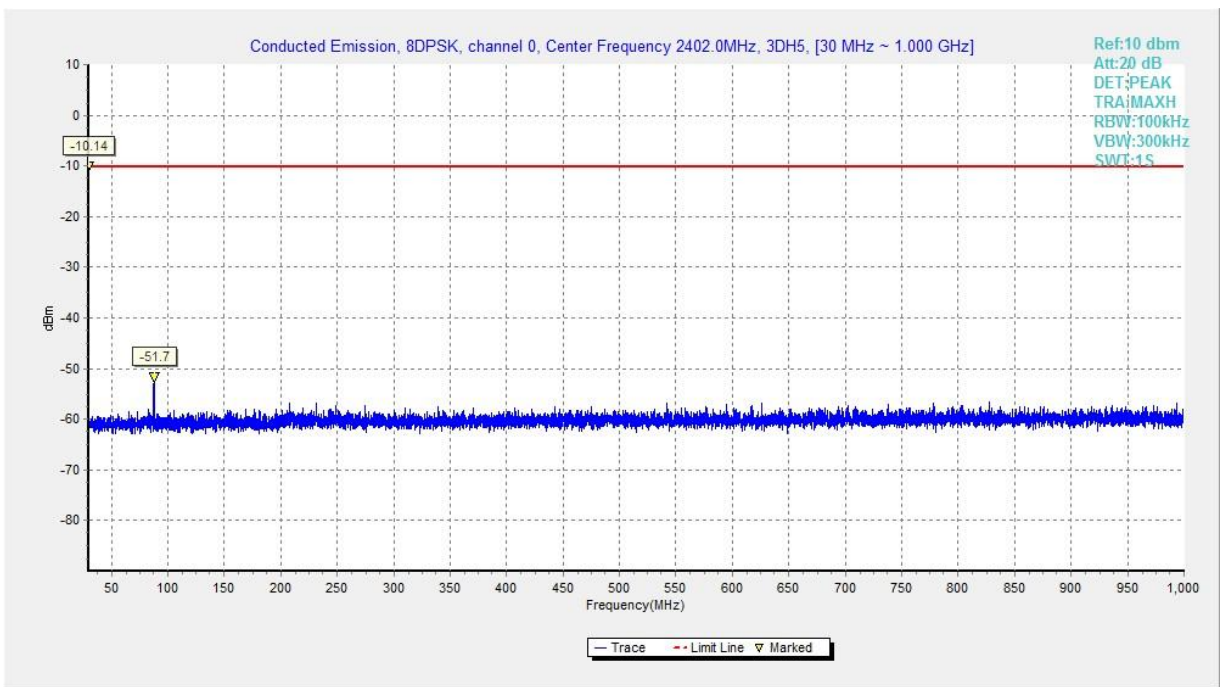


Fig. 26 Conducted Spurious Emission (8DPSK, CH0, 3GHz-10GHz)

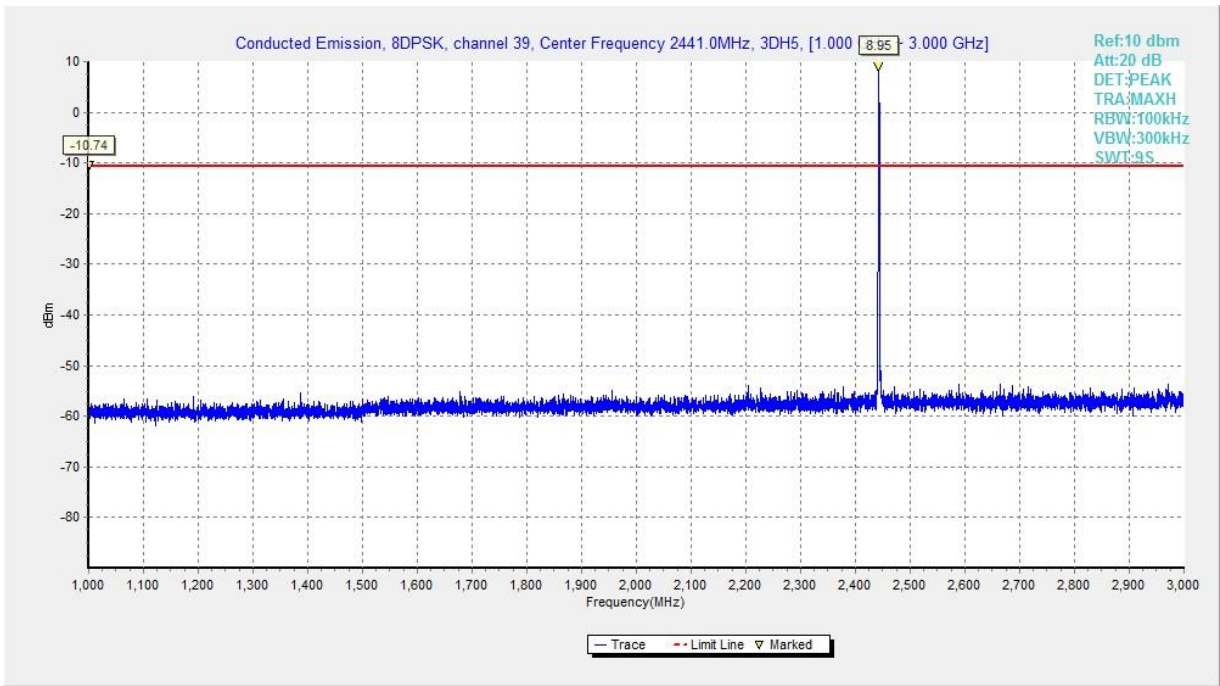


Fig. 27 Conducted Spurious Emission (8DPSK, CH39, 1GHz-3GHz)

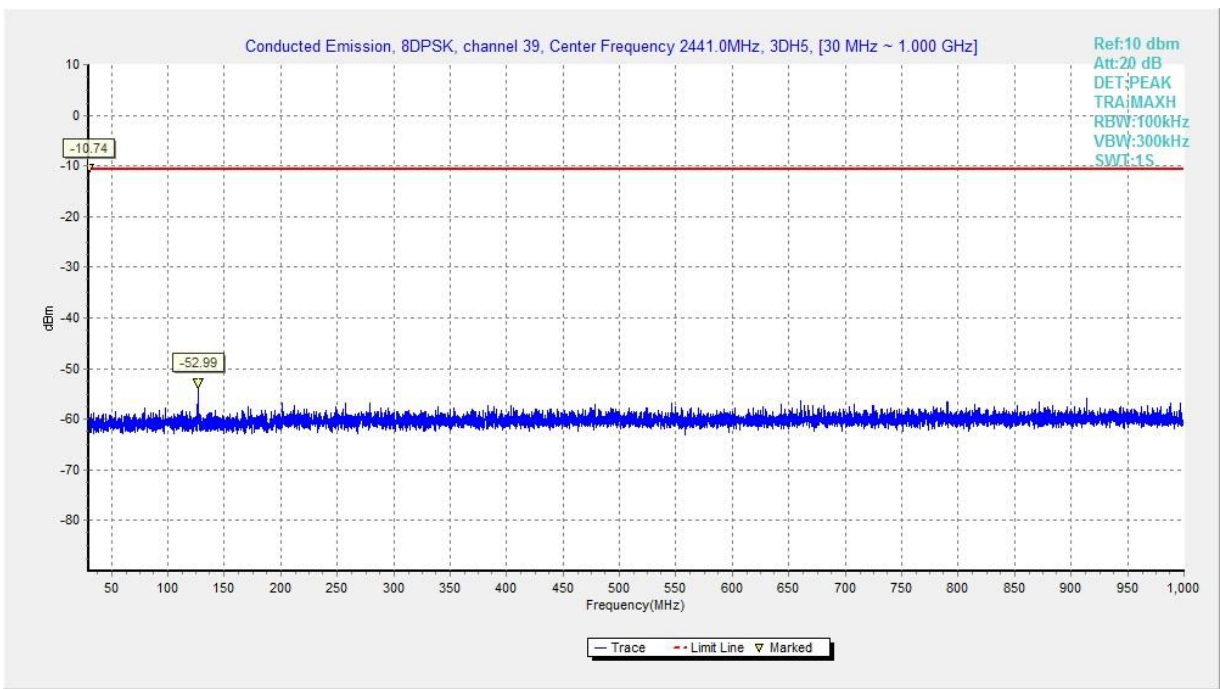


Fig. 28 Conducted Spurious Emission (8DPSK, CH39, 3GHz-10GHz)

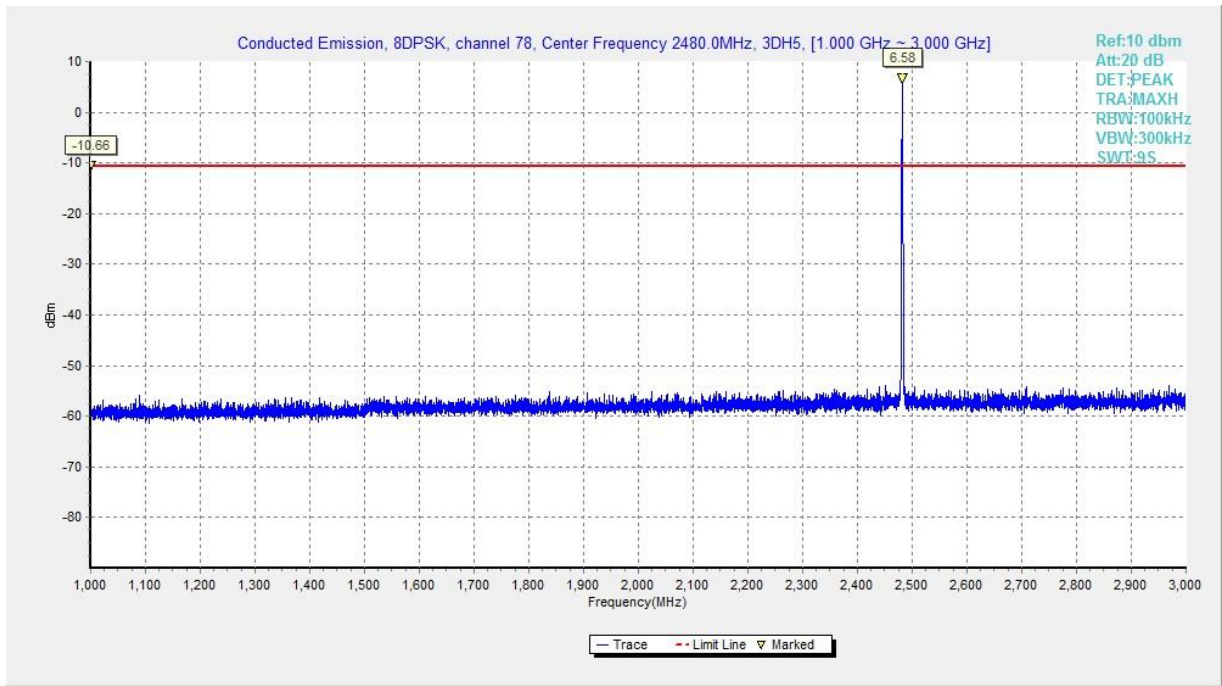


Fig. 29 Conducted Spurious Emission (8DPSK, CH78, 1GHz-3GHz)

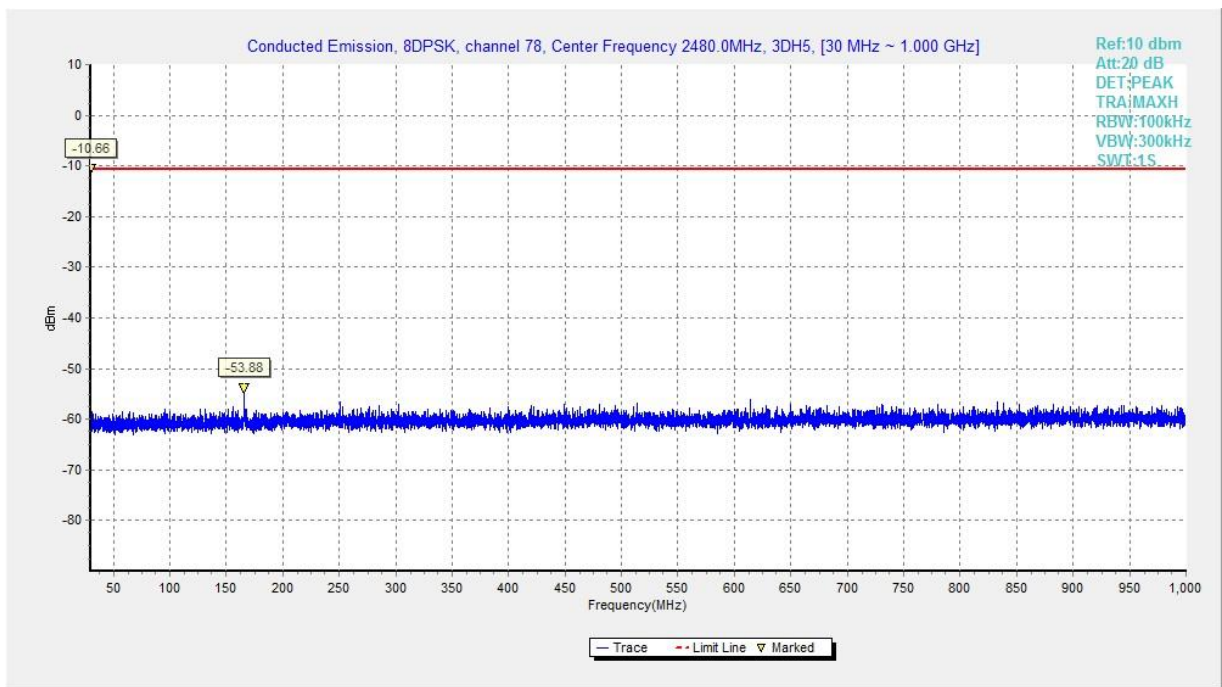


Fig. 30 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-10GHz)

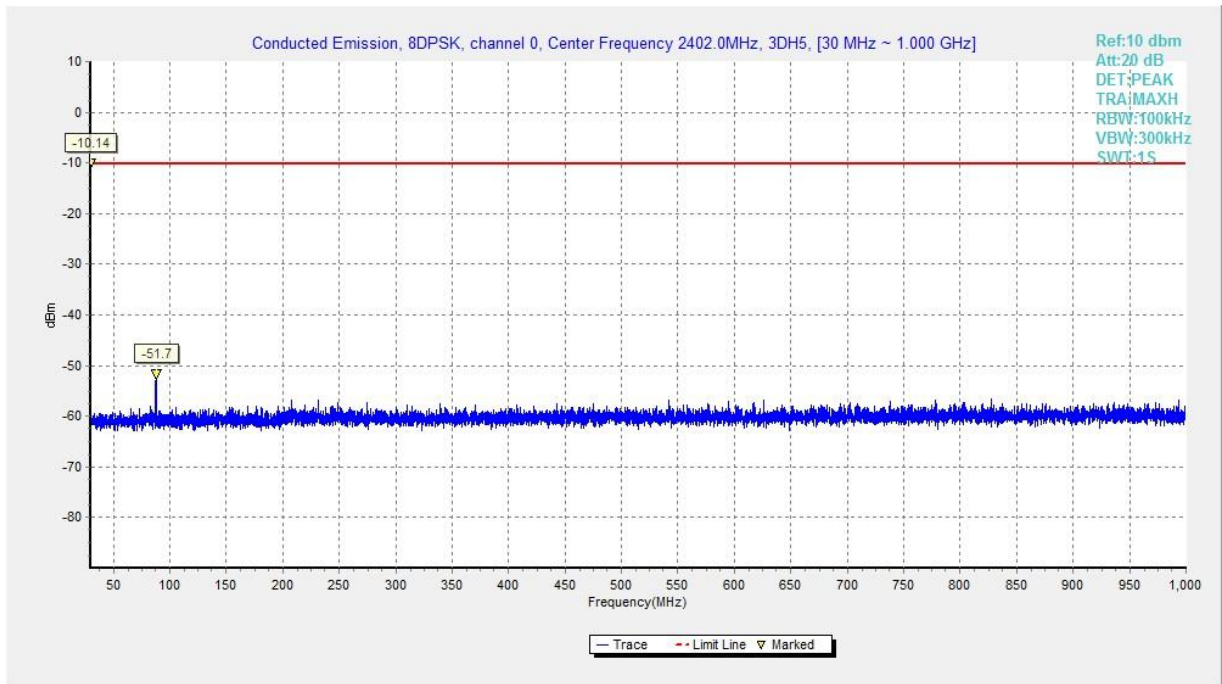


Fig. 31 Conducted Spurious Emission (All channel, 30MHz-1GHz)

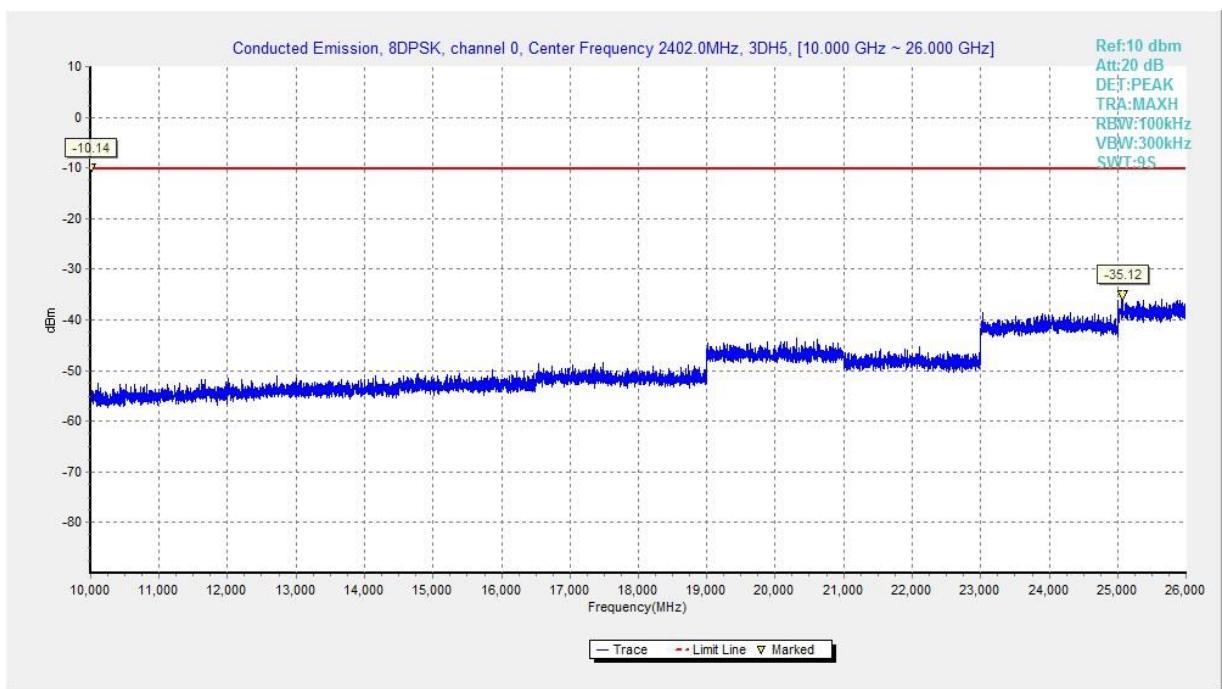


Fig. 32 Conducted Spurious Emission (All channel, 10GHz-26GHz)

A.4 Radiated Emission

Method of Measurement: See ANSI C63.10-clause 6.3&6.4&6.5&6.6.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μV/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Measurement Results:

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
GFSK	2402(CH0)	1 GHz ~18 GHz	Fig.33	P
	2441(CH39)	1 GHz ~18 GHz	Fig.34	P
	2480(CH78)	1 GHz ~18 GHz	Fig.35	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.36	P
	Restricted Band (CH78)	2.45 GHz ~ 2.50GHz	Fig.37	P
$\pi/4$ DQPSK	2402(CH0)	1 GHz ~18 GHz	Fig.38	P
	2441(CH39)	1 GHz ~18 GHz	Fig.39	P
	2480(CH78)	1 GHz ~18 GHz	Fig.40	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.41	P
	Restricted Band (CH78)	2.45 GHz ~ 2.50 GHz	Fig.42	P
8DPSK	2402(CH0)	1 GHz ~18 GHz	Fig.43	P
	2441(CH39)	1 GHz ~18 GHz	Fig.44	P
	2480(CH78)	1 GHz ~18 GHz	Fig.45	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.46	P
	Restricted Band (CH78)	2.45 GHz ~ 2.50 GHz	Fig.47	P
/	All channels	9 kHz ~30 MHz	Fig.48	P
		30 MHz ~1 GHz	Fig.49	P
		18 GHz ~26.5 GHz	Fig.50	P

Worst Case Result
GFSK CH0 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
4255.500000	45.80	74.00	28.20	V	2.6
7014.000000	44.75	74.00	29.25	H	5.0
9509.571429	45.81	74.00	28.19	H	7.1
11638.285714	48.40	74.00	25.60	V	9.9
14823.000000	49.77	74.00	24.23	H	12.9
17109.000000	54.50	74.00	19.50	V	18.4

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
4255.500000	35.55	54.00	18.45	V	2.6
7014.000000	34.43	54.00	19.57	H	5.0
9509.571429	35.39	54.00	18.61	H	7.1
11638.285714	37.67	54.00	16.33	V	9.9
14823.000000	39.58	54.00	14.42	H	12.9
17109.000000	44.08	54.00	9.92	V	18.4



π/4 DQPSK CH0 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
4534.500000	46.77	74.00	27.23	V	4.1
7056.000000	44.67	74.00	29.33	H	5.2
9505.714286	46.51	74.00	27.49	V	7.0
12269.142857	47.96	74.00	26.04	H	11.0
14877.857143	50.39	74.00	23.61	H	13.0
17045.571429	54.12	74.00	19.88	V	18.5

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
4534.500000	35.56	54.00	18.44	V	4.1
7056.000000	34.13	54.00	19.87	H	5.2
9505.714286	35.27	54.00	18.73	V	7.0
12269.142857	37.82	54.00	16.18	H	11.0
14877.857143	40.04	54.00	13.96	H	13.0
17045.571429	44.04	54.00	9.96	V	18.5

8DPSK CH0 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
4575.900000	47.16	74.00	26.84	H	4.6
7037.571429	44.95	74.00	29.05	V	5.1
9492.857143	45.79	74.00	28.21	H	7.0
12357.000000	47.99	74.00	26.01	H	11.2
14847.428572	50.28	74.00	23.72	H	13.0
16917.000000	55.30	74.00	18.70	V	18.1

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
4575.900000	36.94	54.00	17.06	H	4.6
7037.571429	34.38	54.00	19.62	V	5.1
9492.857143	35.27	54.00	18.73	H	7.0
12357.000000	37.73	54.00	16.27	H	11.2
14847.428572	39.77	54.00	14.23	H	13.0
16917.000000	43.95	54.00	10.05	V	18.1

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument. The measurement results are obtained as described below:

Result= P_{Mea} +Cable Loss +Antenna Factor-Gain of the preamplifier.

See below for test graphs.

Conclusion: Pass

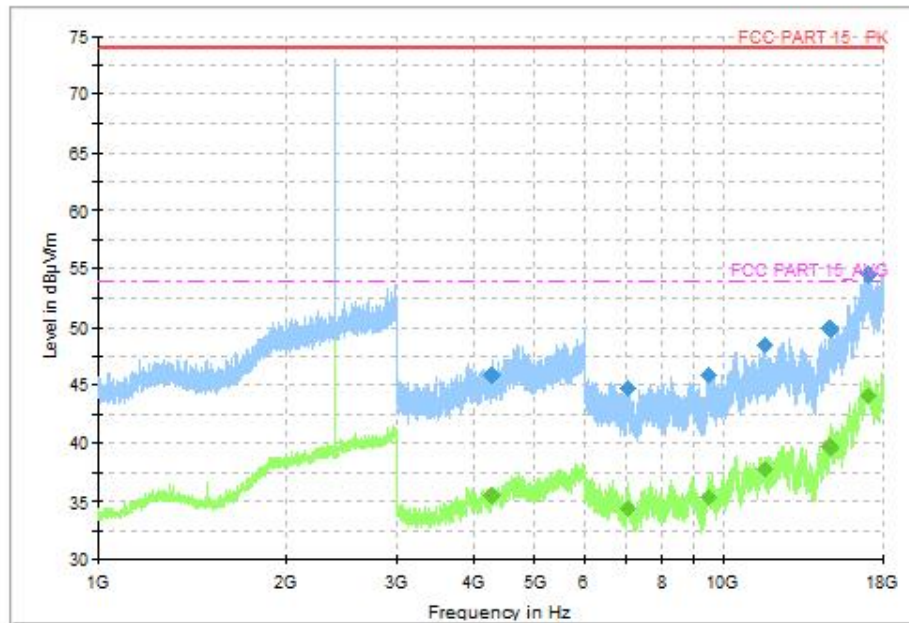


Fig. 33 Radiated Spurious Emission (GFSK, CH0, 1GHz ~18GHz)

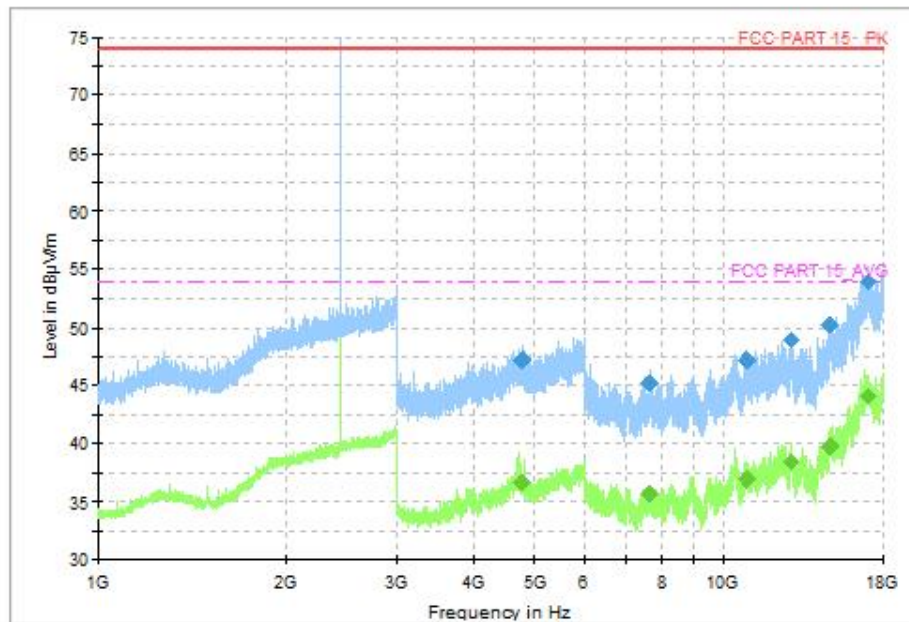


Fig. 34 Radiated Spurious Emission (GFSK, CH39, 1GHz ~18GHz)

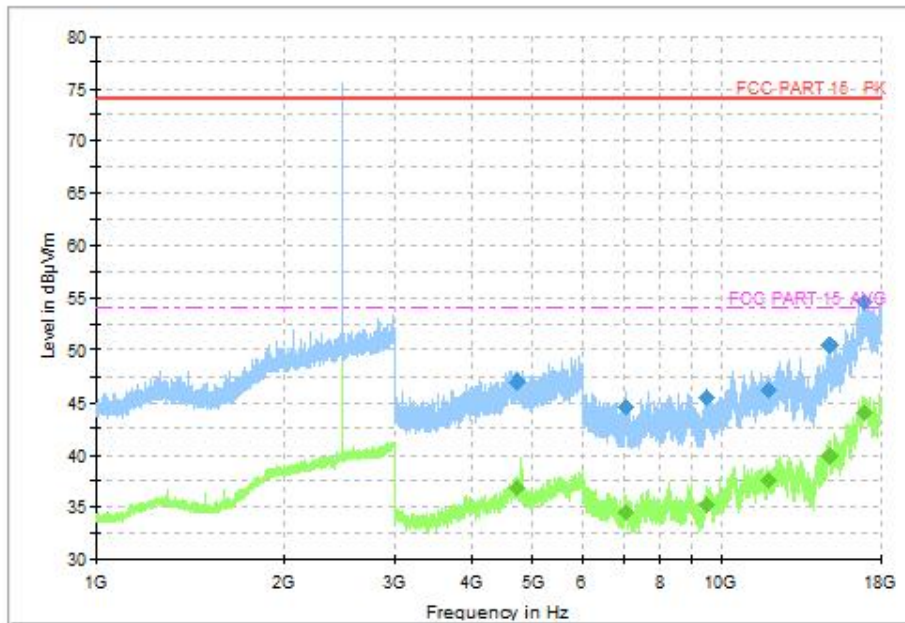


Fig. 35 Radiated Spurious Emission (GFSK, CH78, 1GHz ~18GHz)

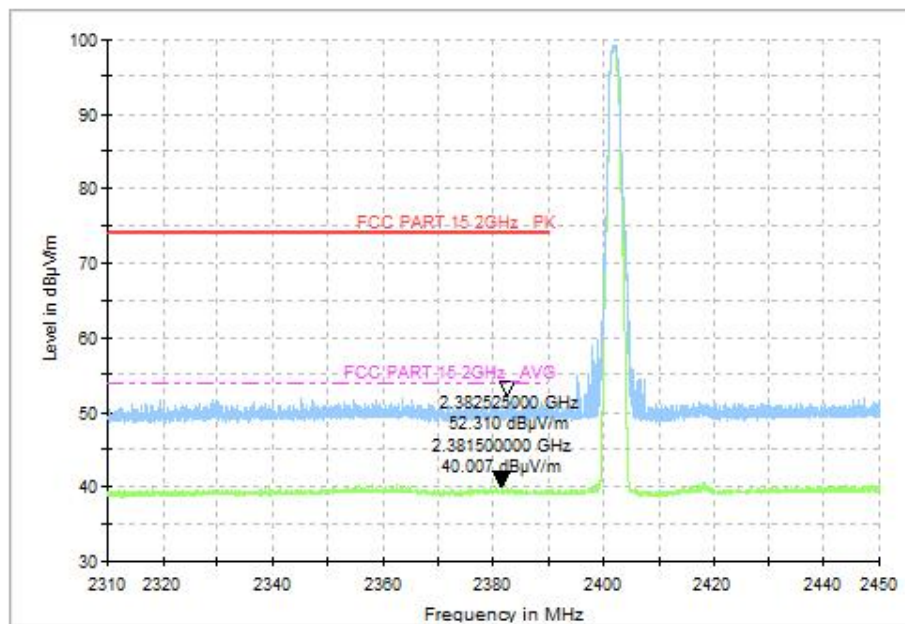


Fig. 36 Radiated Band Edges (GFSK, CH0, 2.38GHz~2.45GHz)

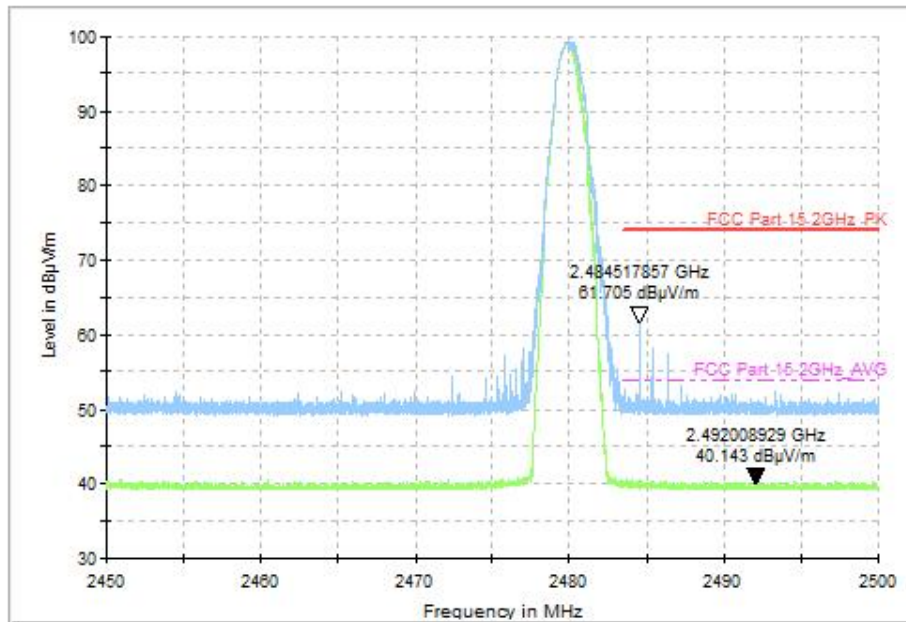


Fig. 37 Radiated Band Edges (GFSK, CH78, 2.45GHz~2.50GHz)

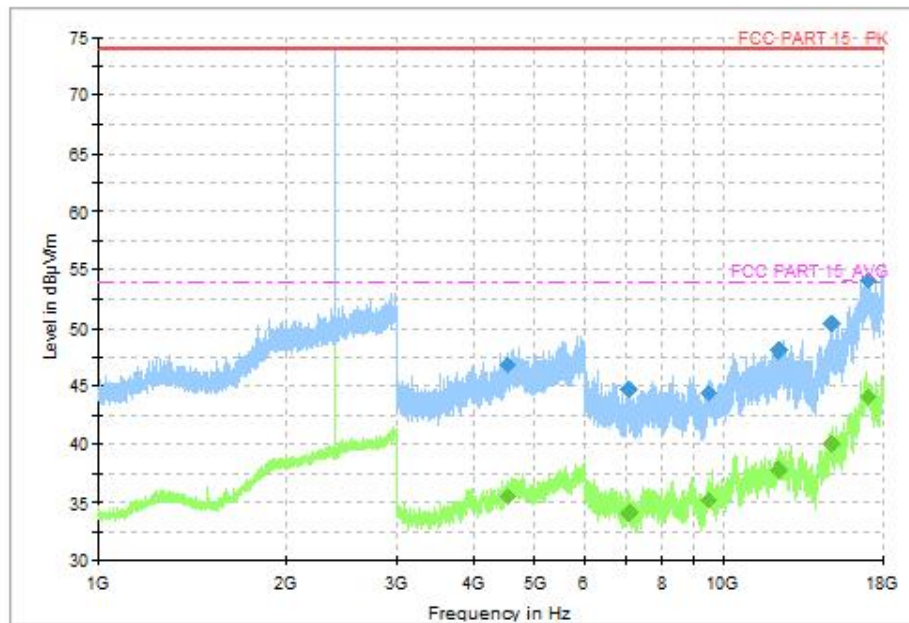


Fig. 38 Radiated Spurious Emission ($\pi/4$ DQPSK, CH0, 1GHz ~18GHz)

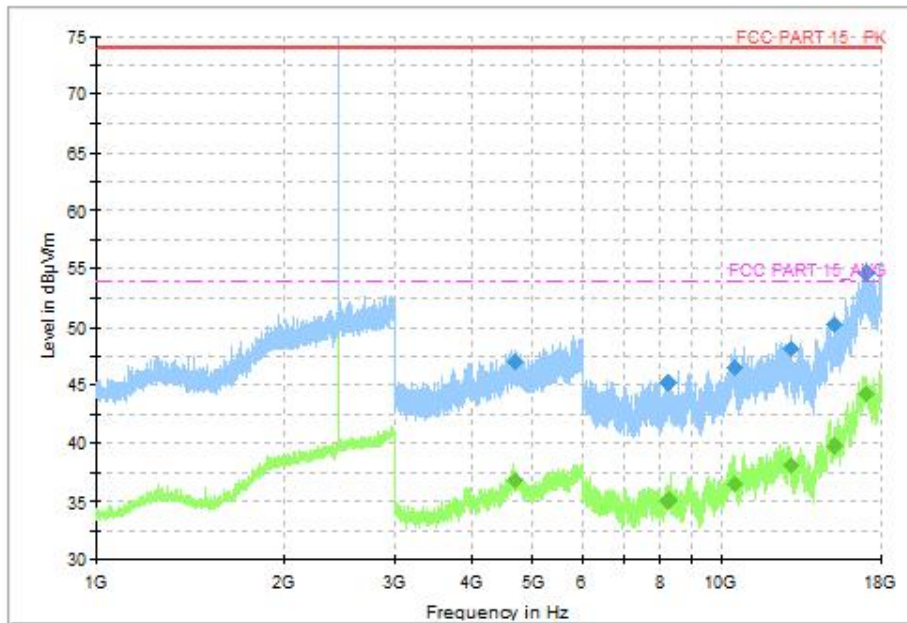


Fig. 39 Radiated Spurious Emission ($\pi/4$ DQPSK, CH39, 1GHz ~18GHz)

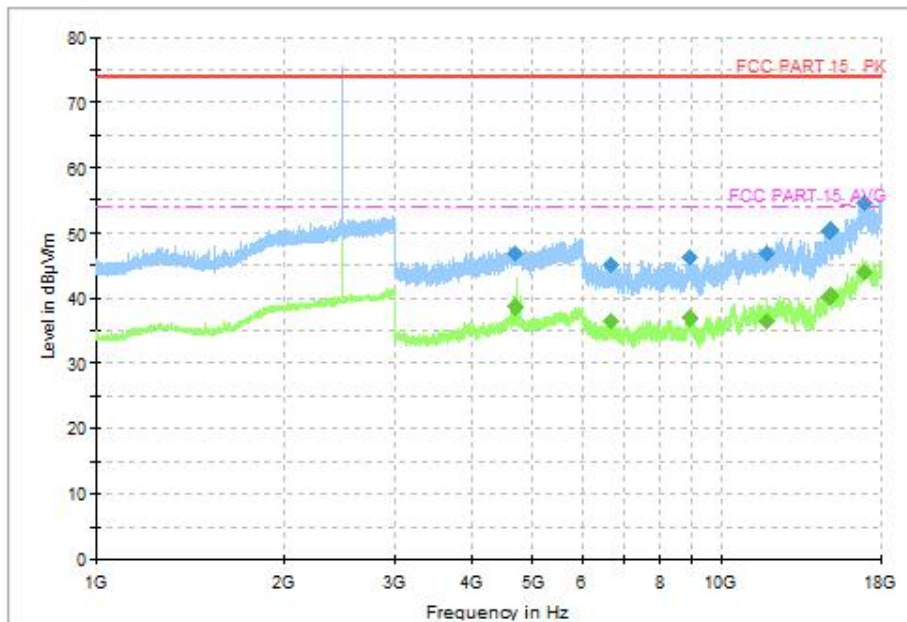


Fig. 40 Radiated Spurious Emission ($\pi/4$ DQPSK, CH78, 1GHz ~18GHz)

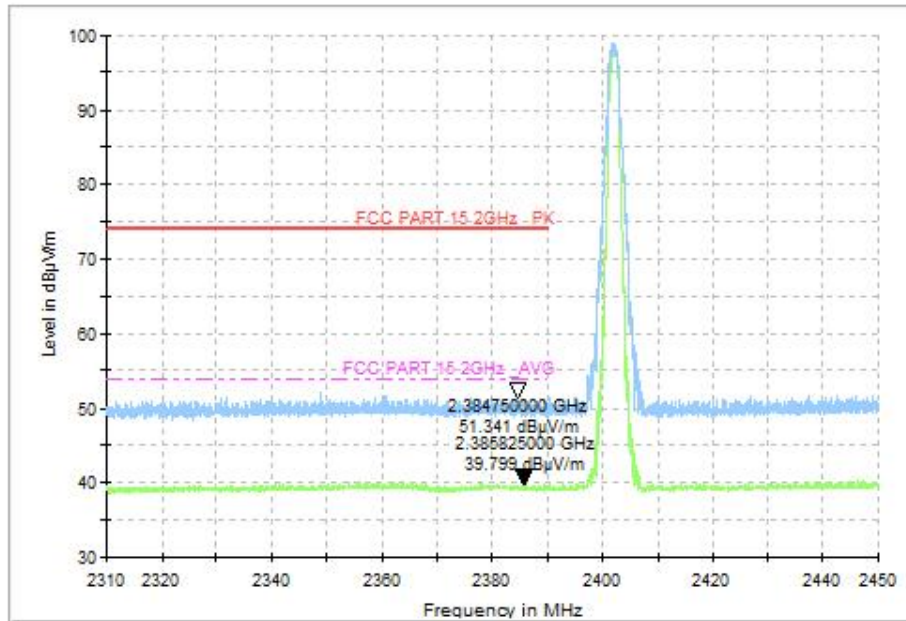


Fig. 41 Radiated Band Edges ($\pi/4$ DQPSK, CH0, 2.38GHz~2.45GHz)

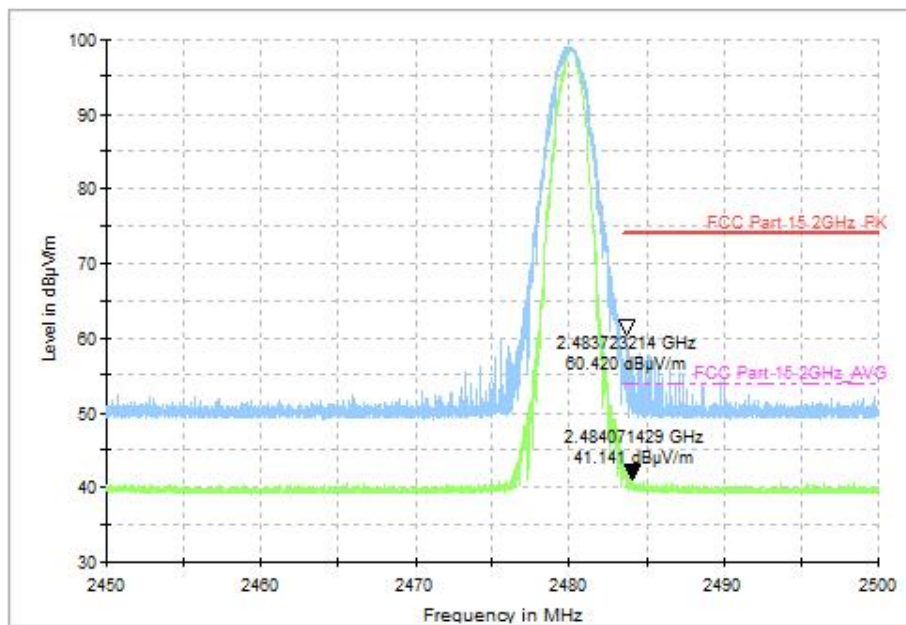


Fig. 42 Radiated Band Edges ($\pi/4$ DQPSK, CH78, 2.45GHz~2.50GHz)

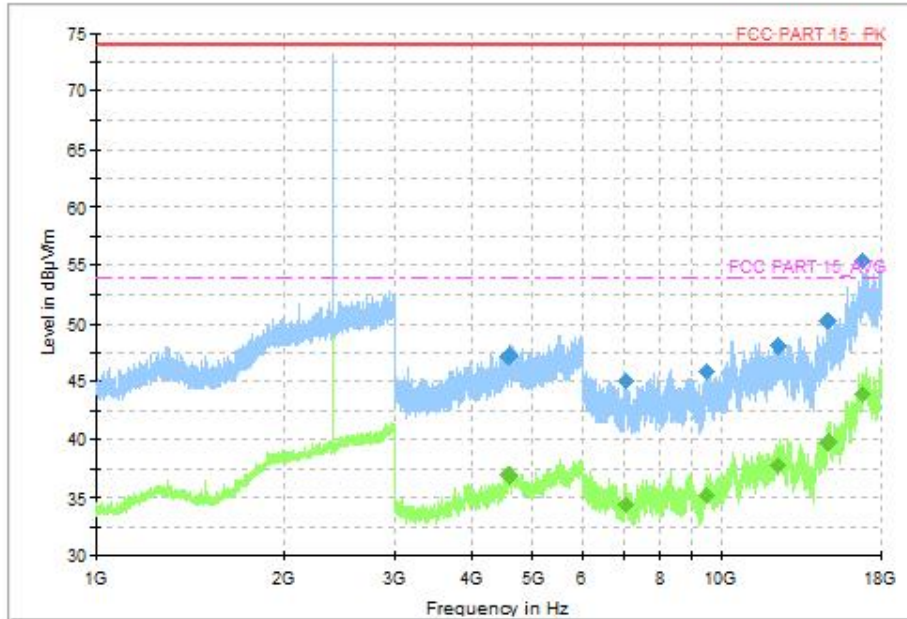


Fig. 43 Radiated Spurious Emission (8DPSK, CH0, 1GHz ~18GHz)

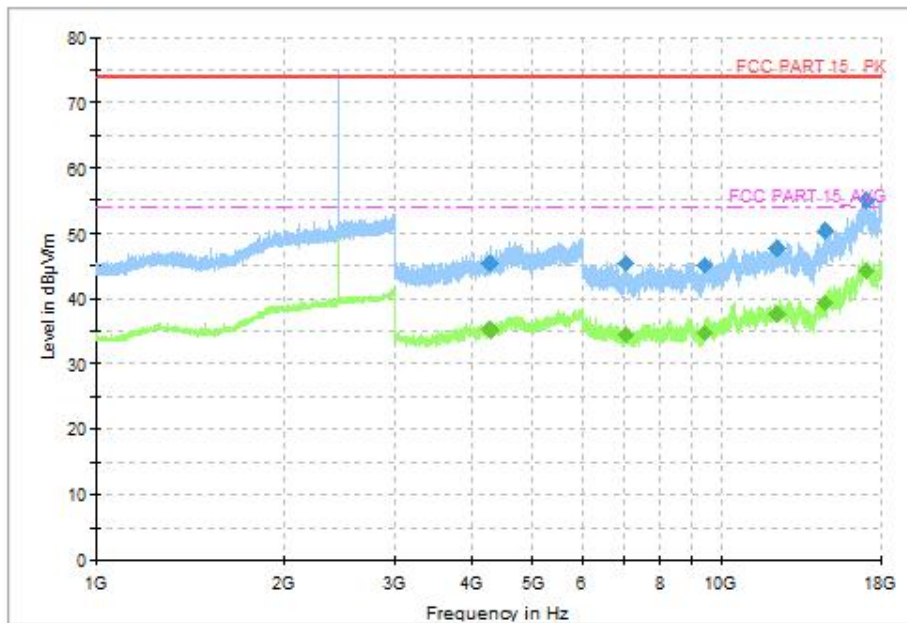


Fig. 44 Radiated Spurious Emission (8DPSK, CH39, 1GHz ~18GHz)

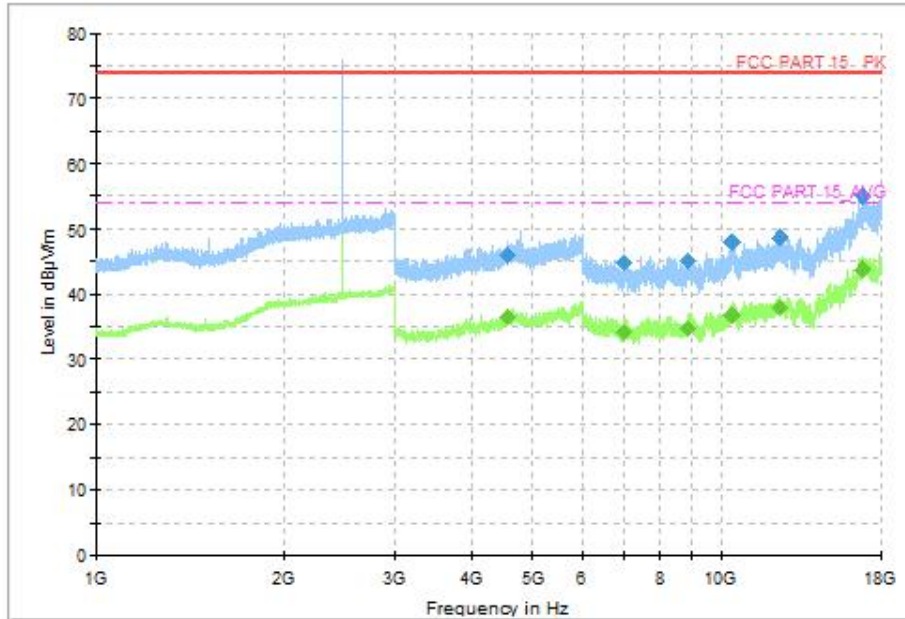


Fig. 45 Radiated Spurious Emission (8DPSK, CH78, 1GHz ~18GHz)

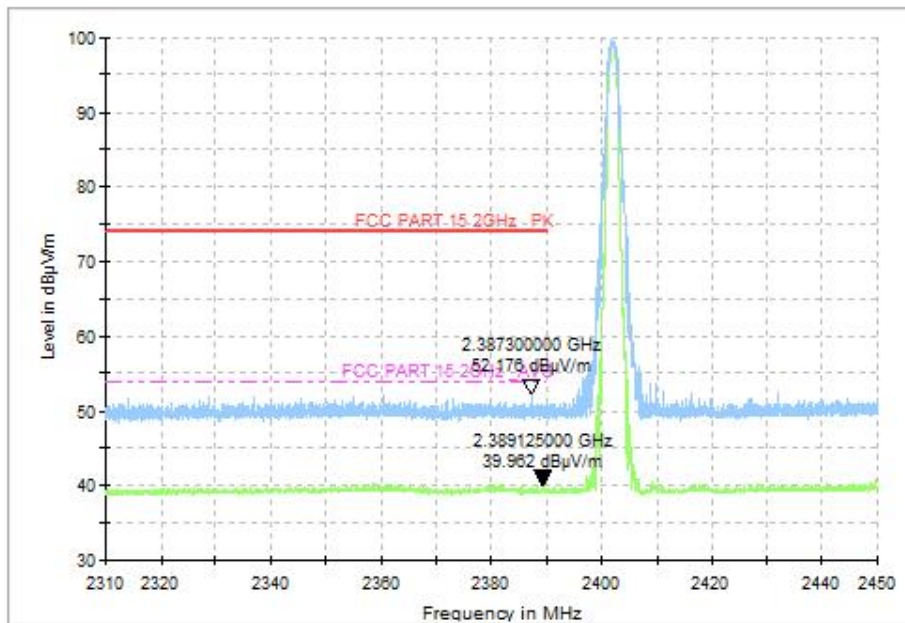


Fig. 46 Radiated Band Edges (8DPSK, CH0, 2.38GHz~2.45GHz)

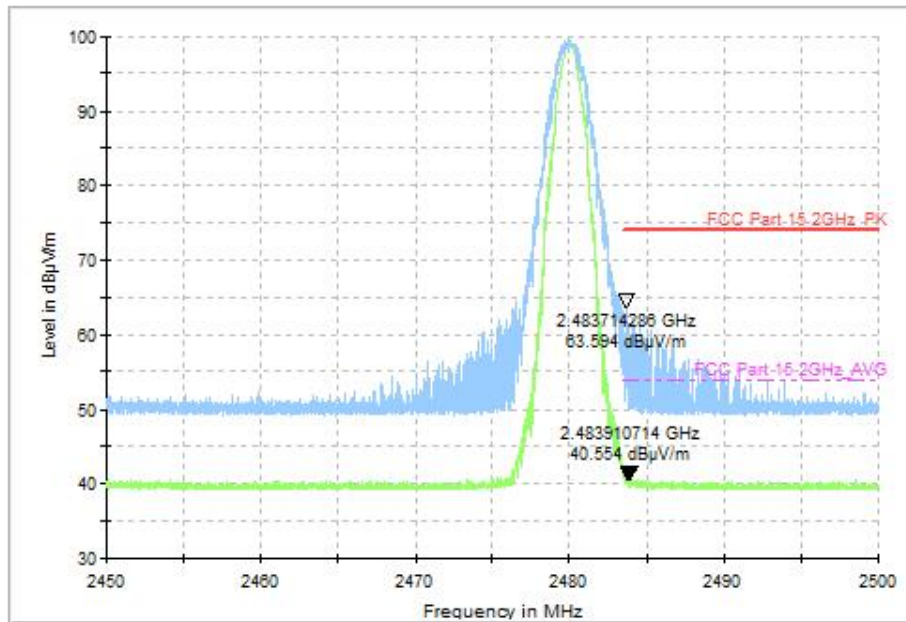


Fig. 47 Radiated Band Edges (8DPSK, CH78, 2.45GHz~2.50GHz)

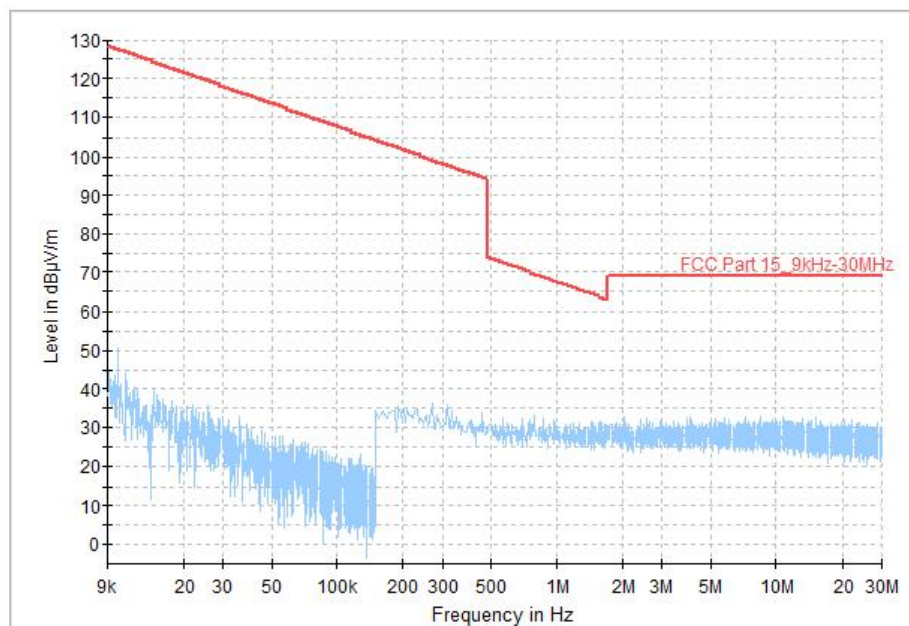


Fig. 48 Radiated Spurious Emission (All Channels, 9kHz ~30MHz)

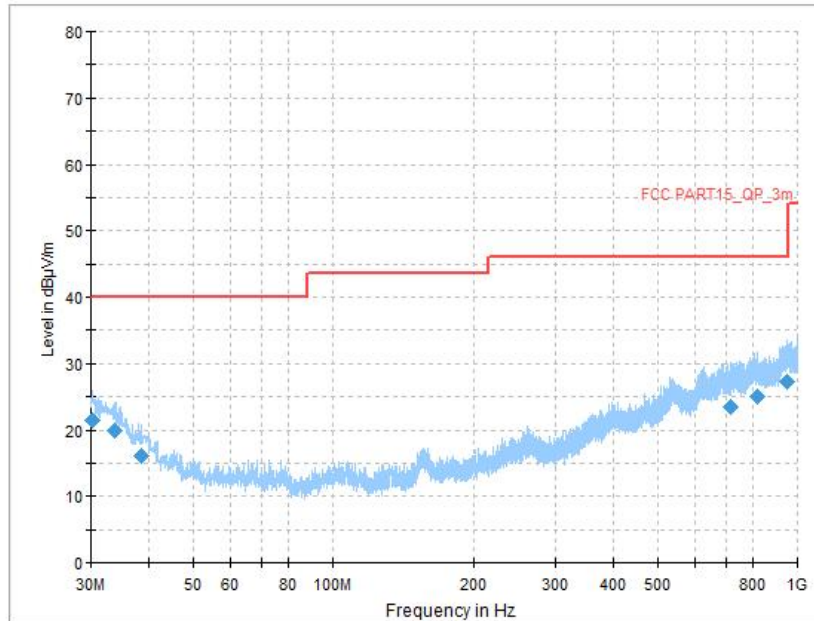


Fig. 49 Radiated Spurious Emission (All Channels, 30MHz ~1GHz)

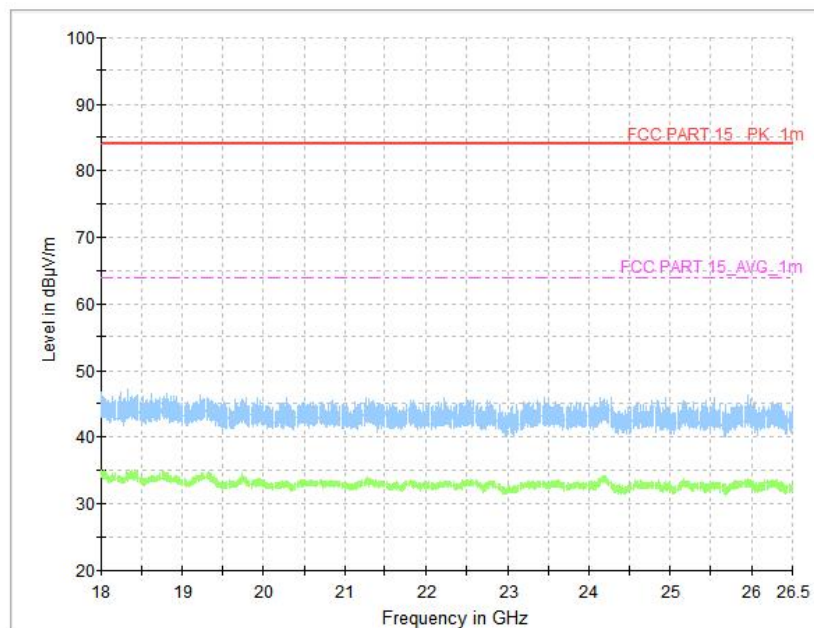


Fig. 50 Radiated Spurious Emission (All Channels, 18GHz ~26.5GHz)

A.5 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 7.8.7.

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

Measurement Result:

Mode	Frequency (MHz)	20dB Bandwidth (kHz)		Conclusion
		Fig.	Value	
GFSK	2402(CH0)	Fig.51	937.50	P
	2441(CH39)	Fig.52	937.50	
	2480(CH78)	Fig.53	936.00	
$\pi/4$ DQPSK	2402(CH0)	Fig.54	1286.25	P
	2441(CH39)	Fig.55	1283.25	
	2480(CH78)	Fig.56	1283.25	
8DPSK	2402(CH0)	Fig.57	1284.00	P
	2441(CH39)	Fig.58	1287.75	
	2480(CH78)	Fig.59	1281.00	

See below for test graphs.

Conclusion: PASS

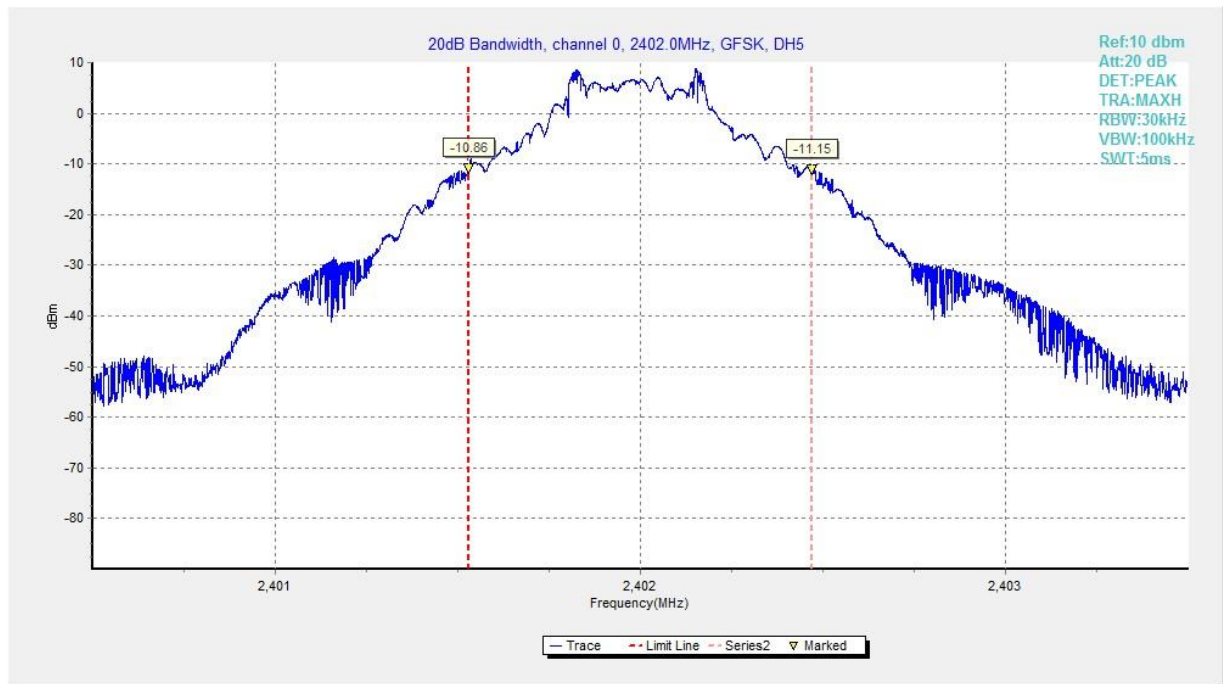


Fig. 51 20dB Bandwidth (GFSK, CH0)

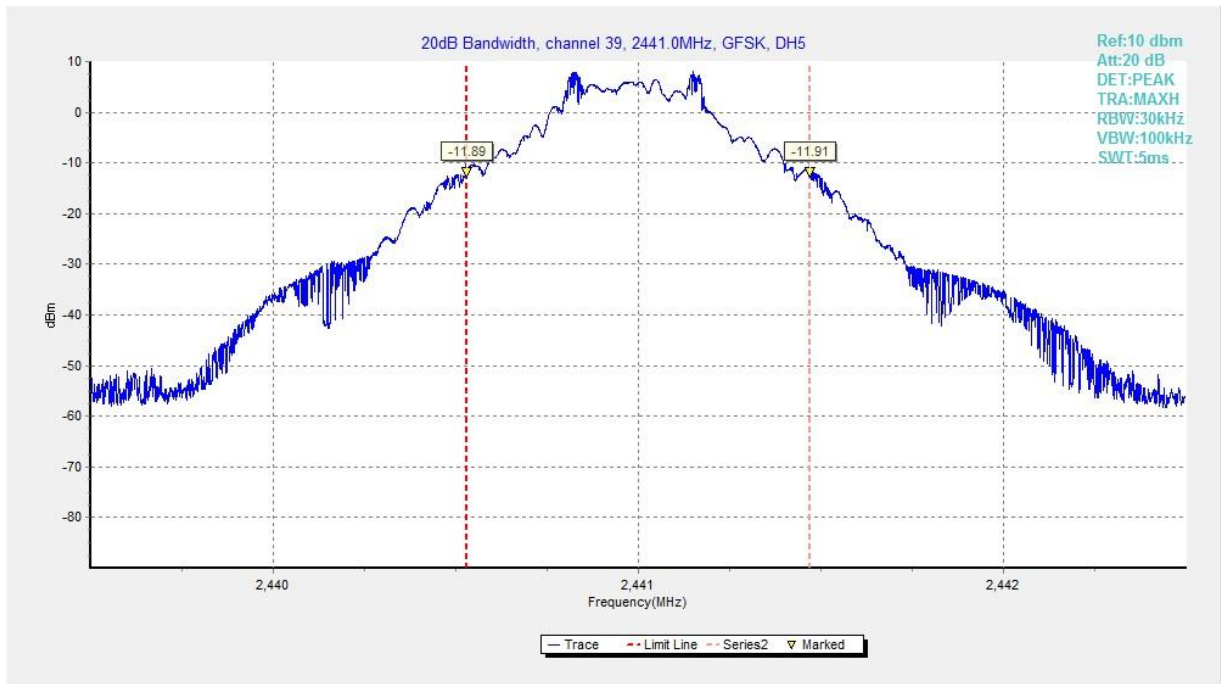


Fig. 52 20dB Bandwidth (GFSK, CH39)

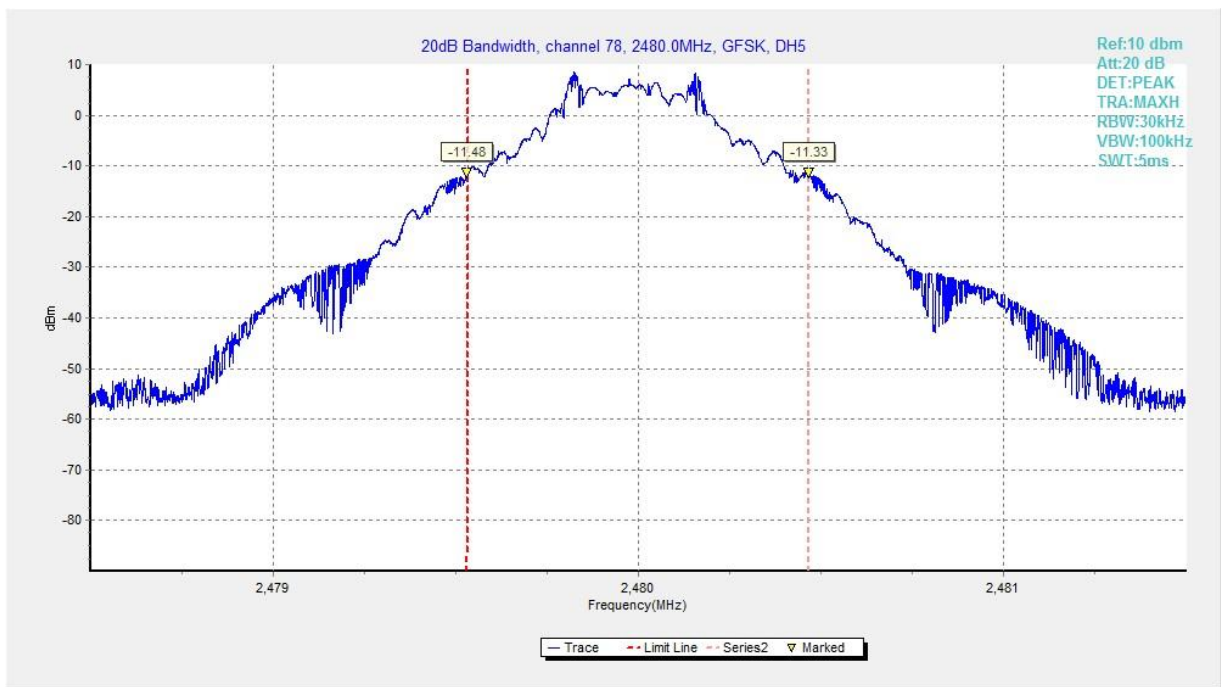


Fig. 53 20dB Bandwidth (GFSK, CH78)

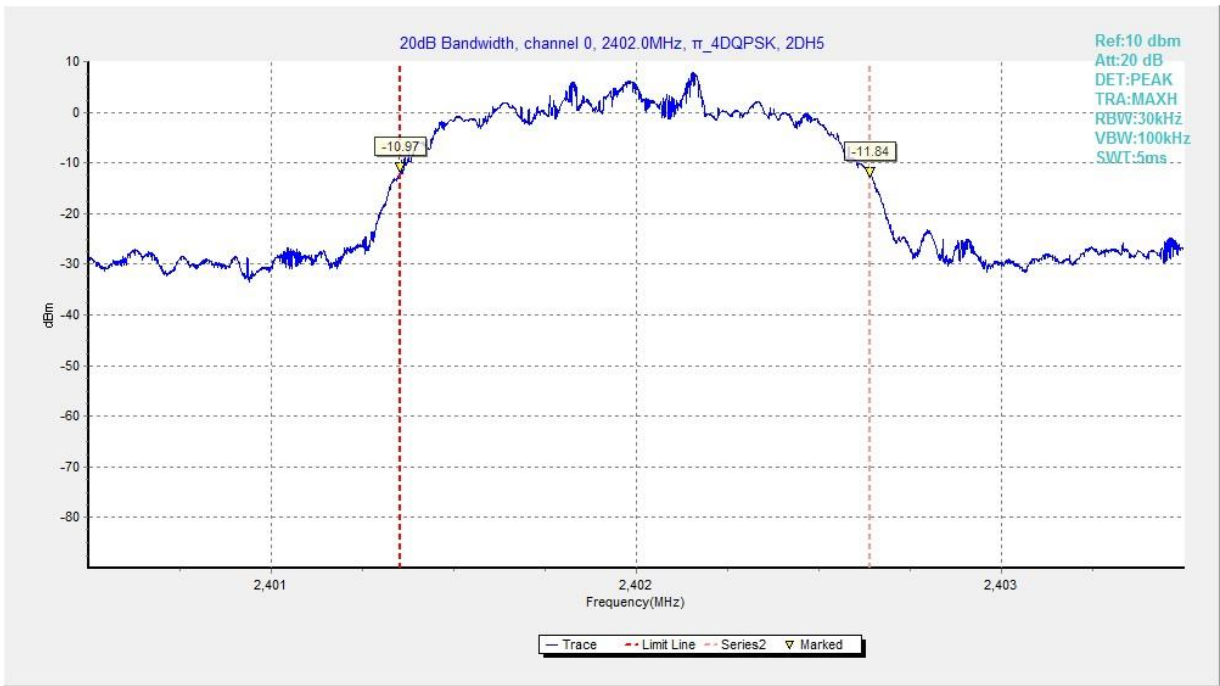


Fig. 54 20dB Bandwidth ($\pi/4$ DQPSK, CH0)

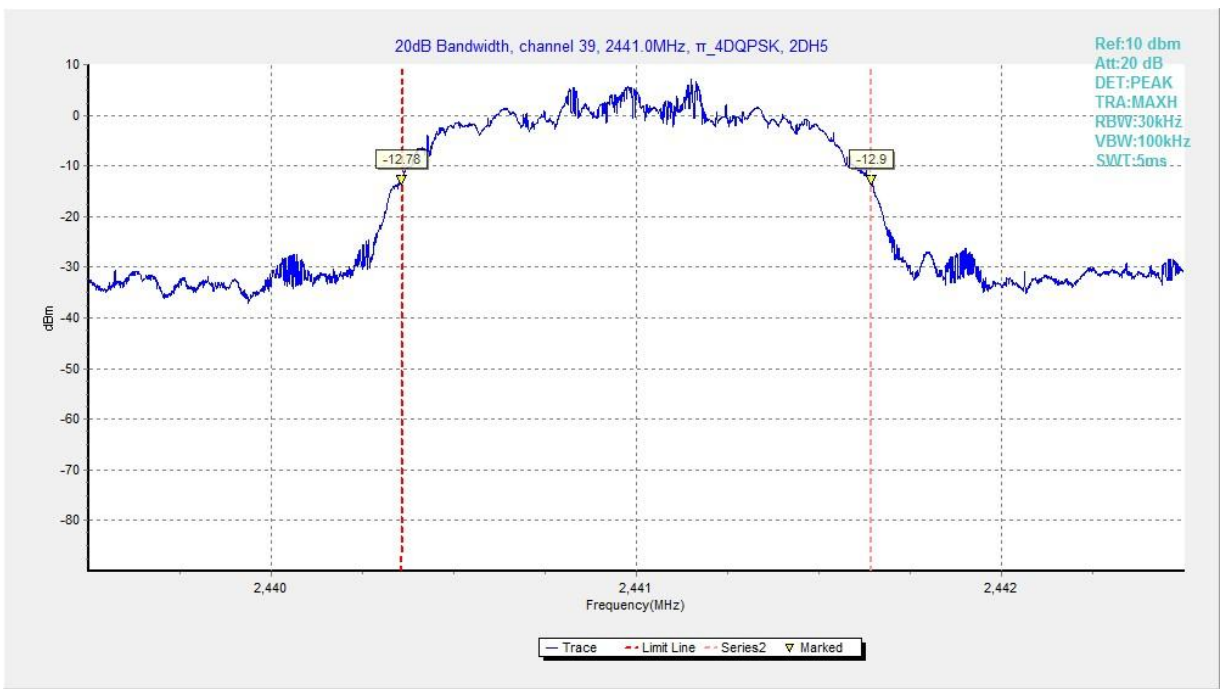


Fig. 55 20dB Bandwidth ($\pi/4$ DQPSK, CH39)

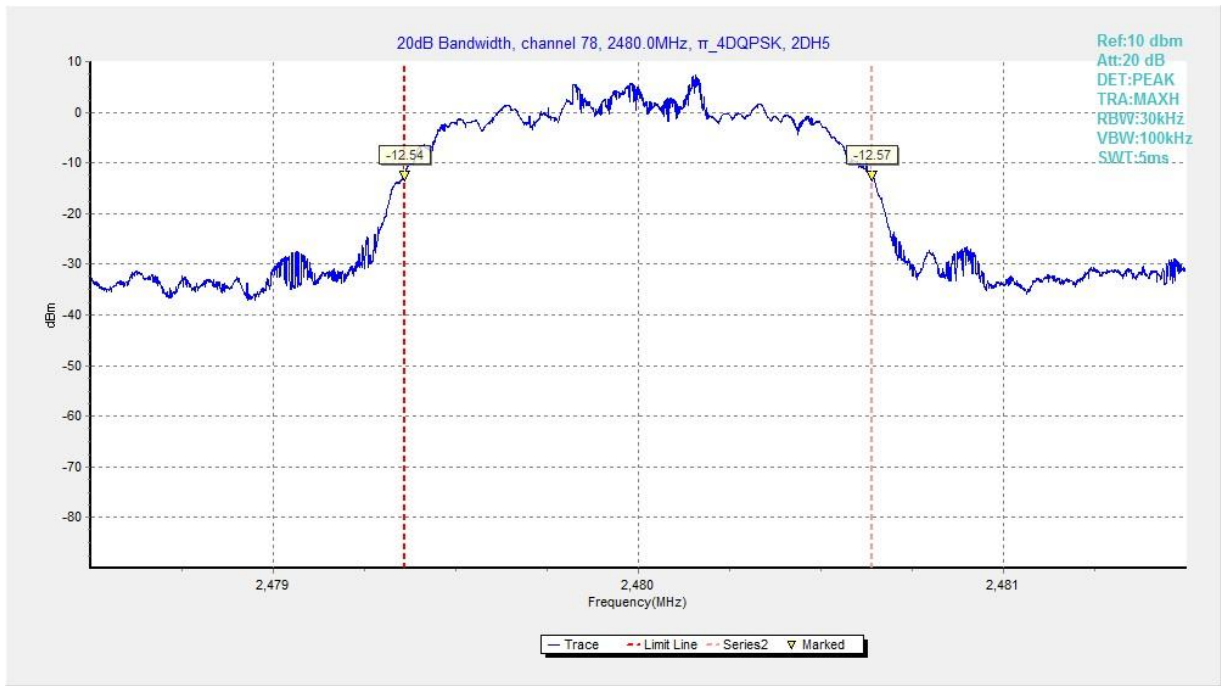


Fig. 56 20dB Bandwidth ($\pi/4$ DQPSK, CH78)

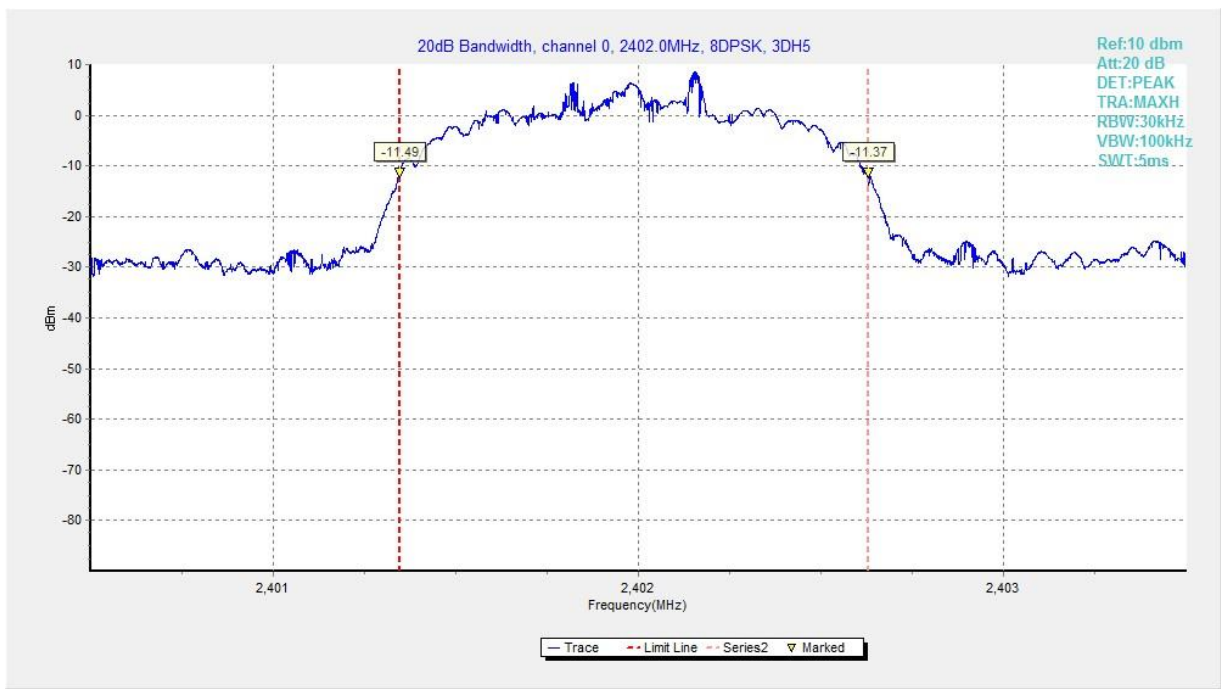


Fig. 57 20dB Bandwidth (8DPSK, CH0)

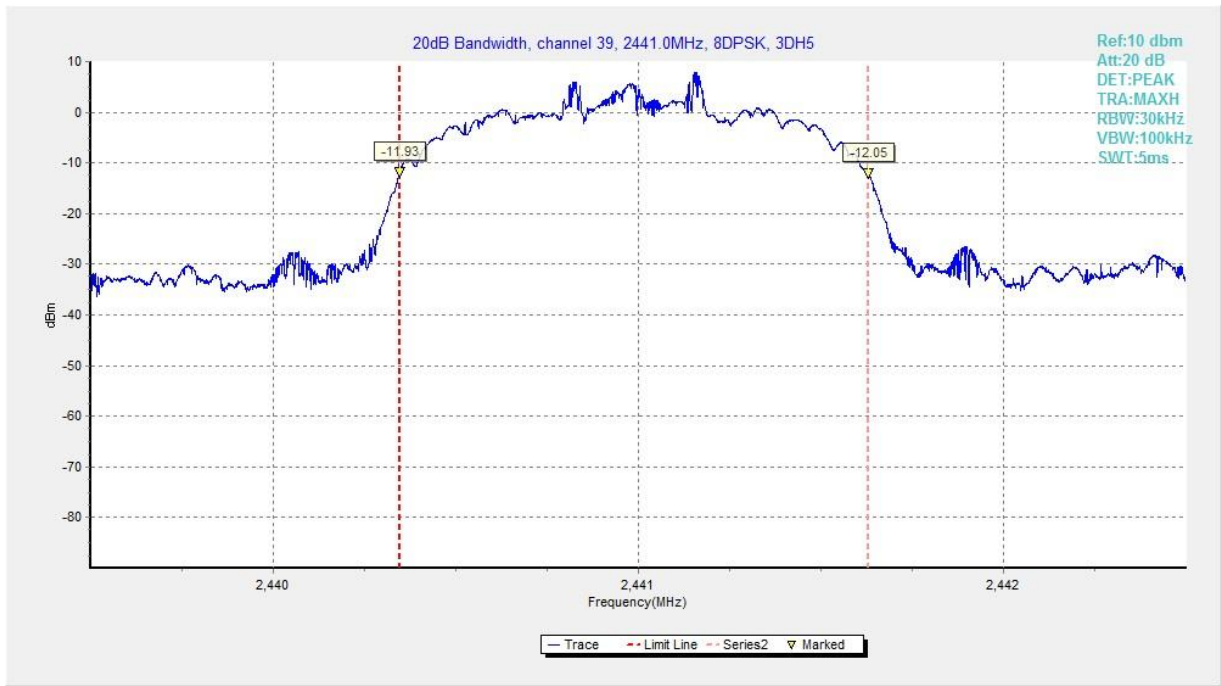


Fig. 58 20dB Bandwidth (8DPSK, CH39)

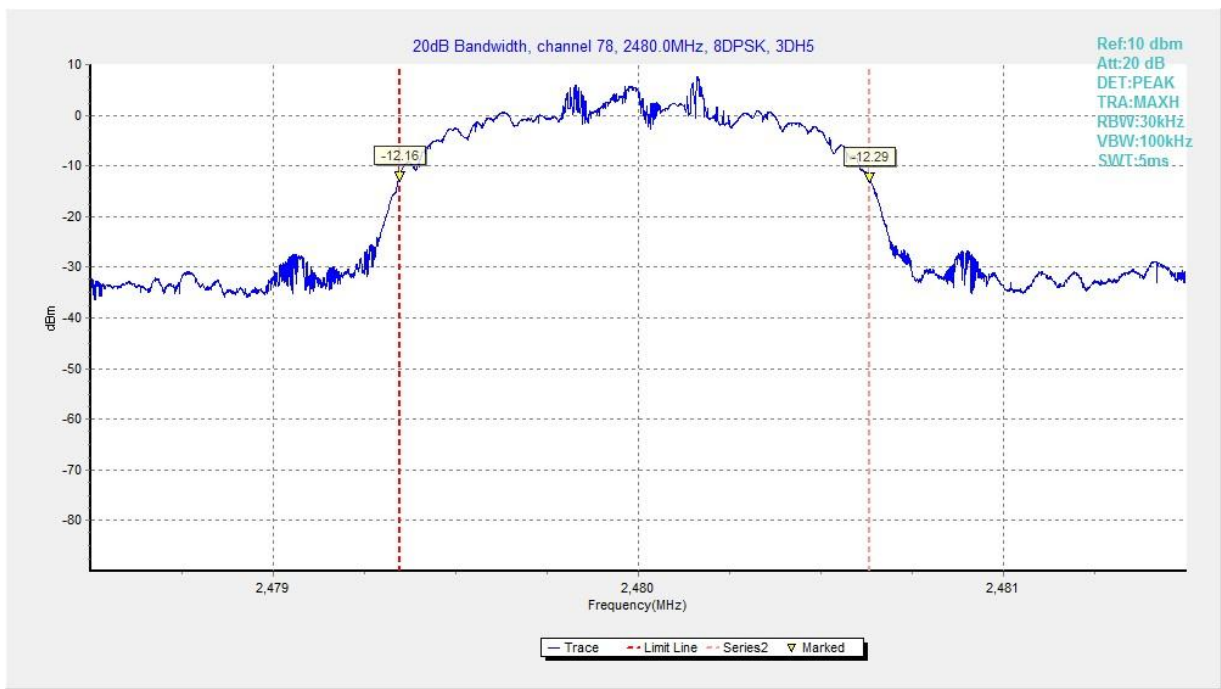


Fig. 59 20dB Bandwidth (8DPSK, CH78)



A.6 Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)	< 400 ms

Measurement Results:

Mode	Frequency (MHz)	Packet	Dwell Time(ms)	Conclusion	
GFSK	2441(CH39)	DH5	Fig.60	167.95	P
			Fig.61		
$\pi/4$ DQPSK	2441(CH39)	2-DH5	Fig.62	210.53	P
			Fig.63		
8DPSK	2441(CH39)	3-DH5	Fig.64	172.99	P
			Fig.65		

See below for test graphs.

Conclusion: Pass

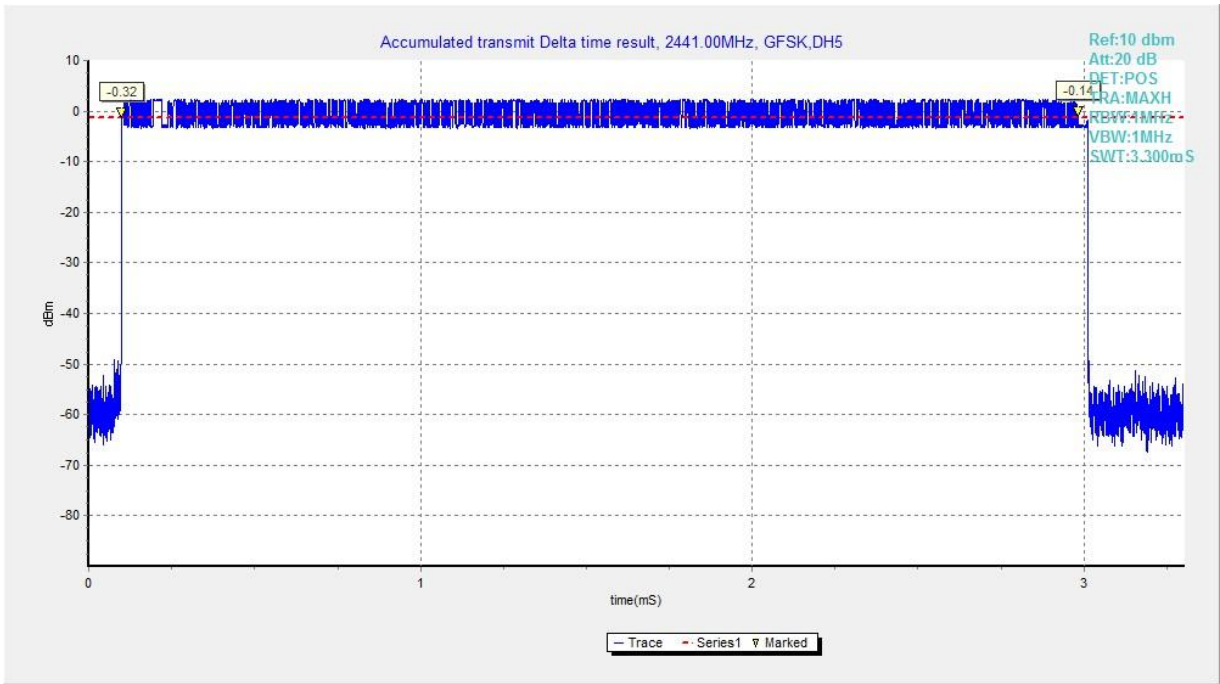


Fig. 60 Time of Occupancy (Dwell Time) (GFSK, CH39)

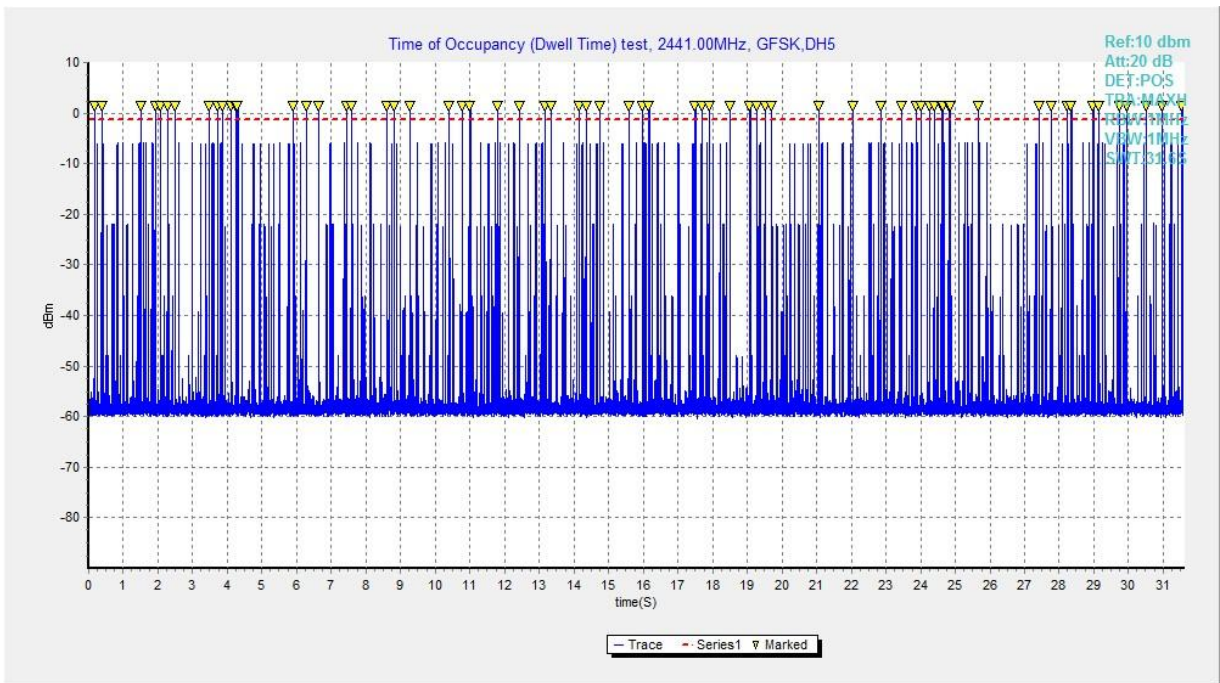


Fig. 61 Time of Occupancy (Dwell Time) (GFSK, CH39)

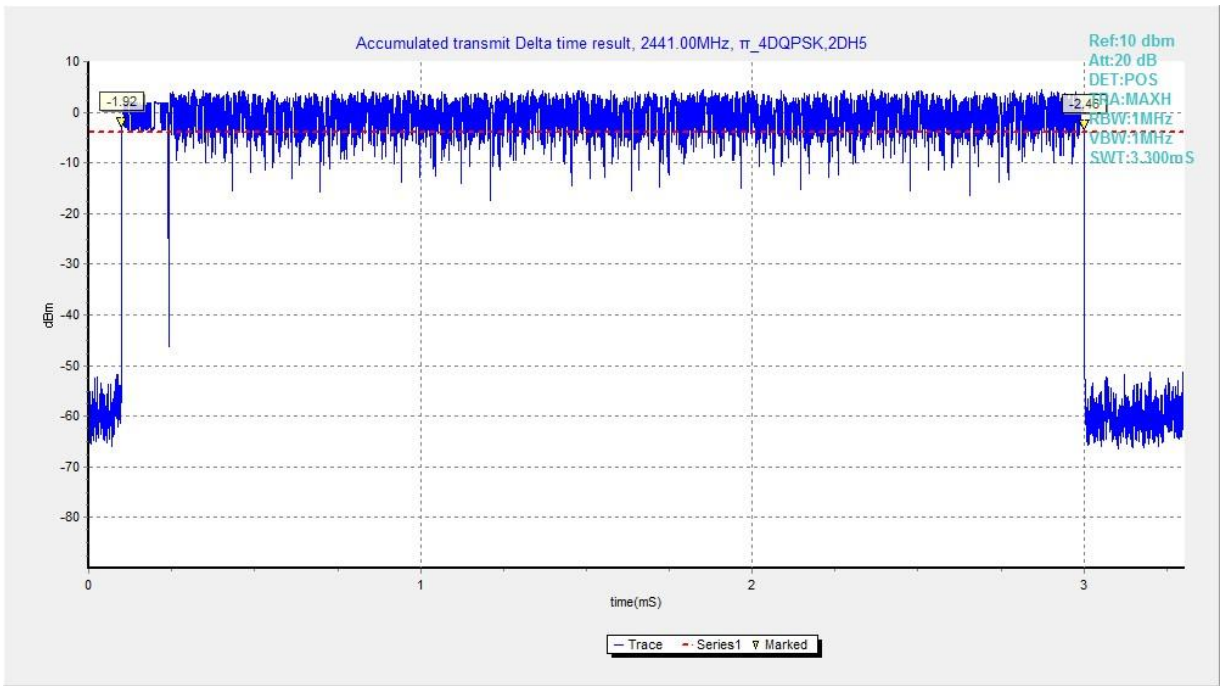


Fig. 62 Time of Occupancy (Dwell Time) ($\pi/4$ DQPSK, CH39)

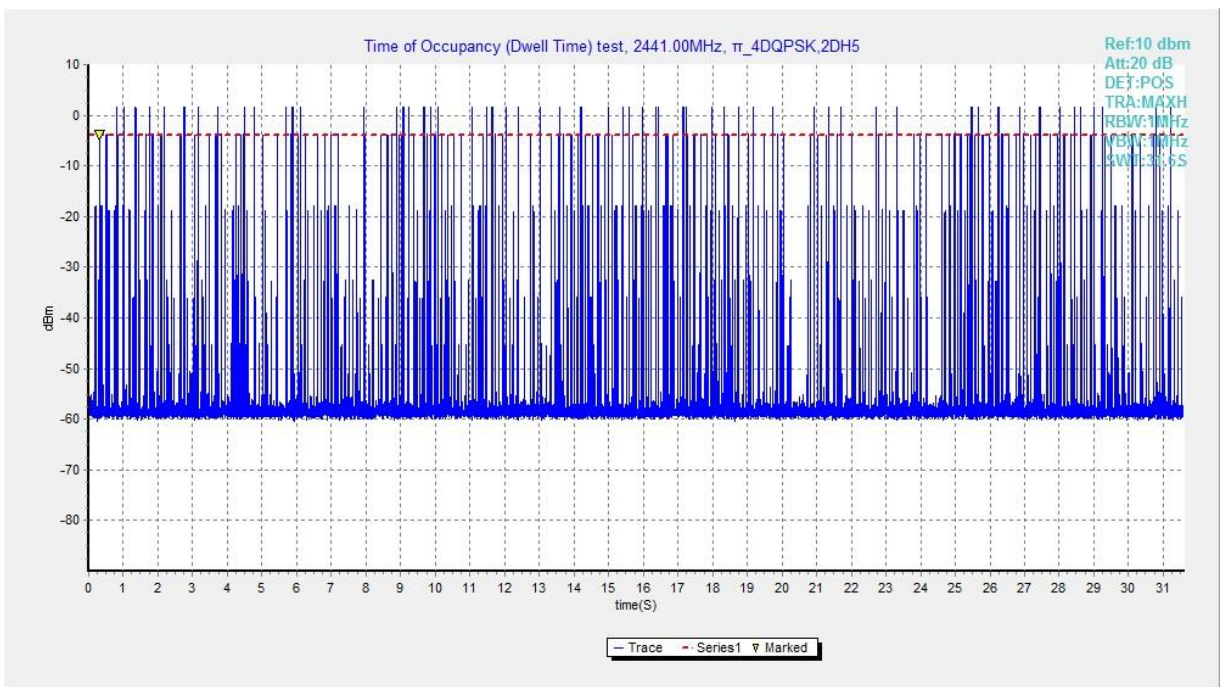


Fig. 63 Time of Occupancy (Dwell Time) ($\pi/4$ DQPSK, CH39)

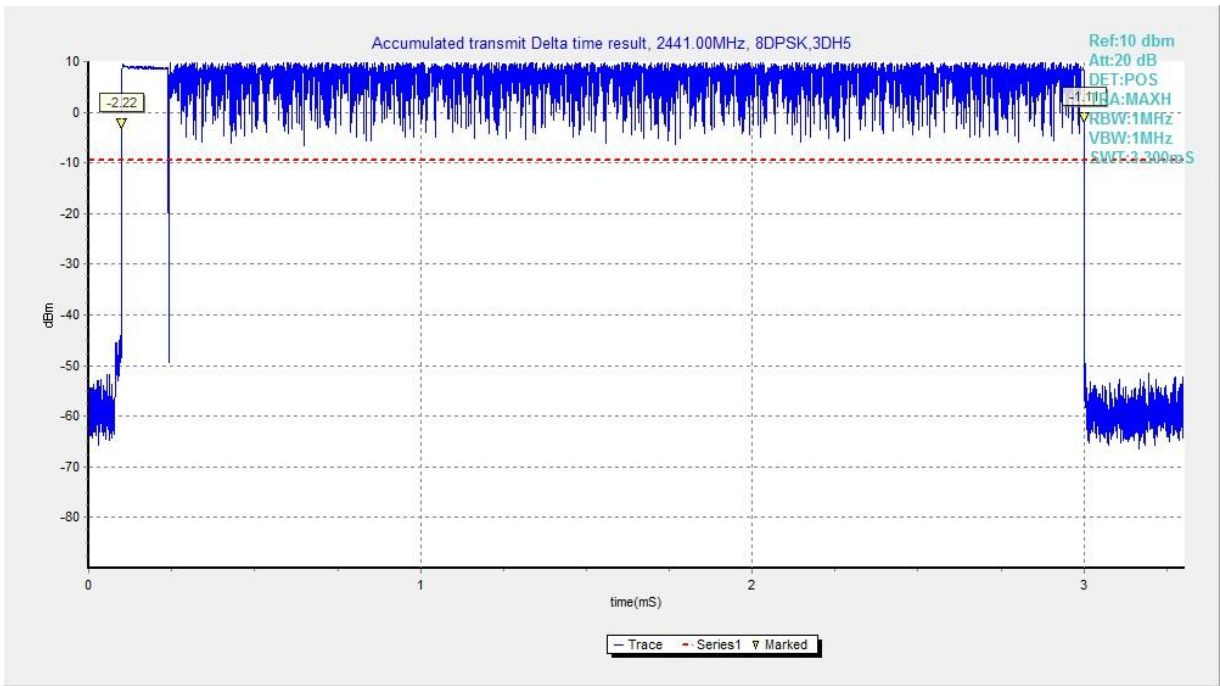


Fig. 64 Time of Occupancy (Dwell Time) (8DPSK, CH39)

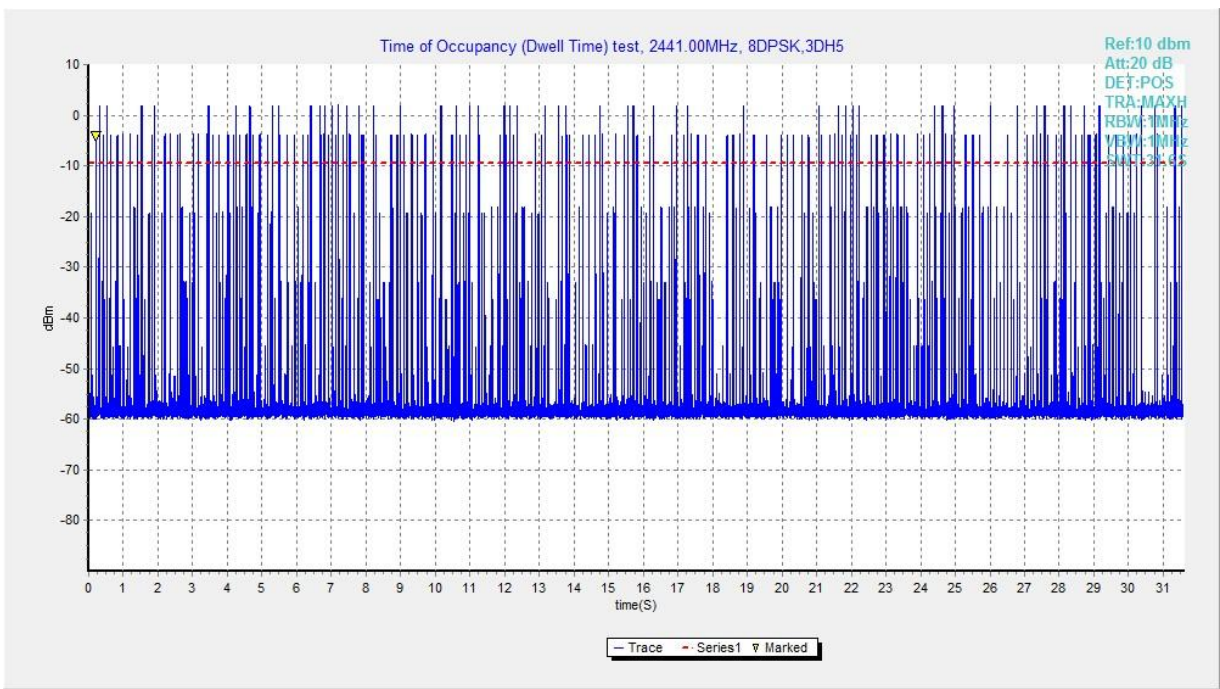


Fig. 65 Time of Occupancy (Dwell Time) (8DPSK, CH39)



A.7 Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

Measurement Results:

Mode	Packet	Number of hopping channels		Test result	Conclusion
GFSK	DH5	Fig.66	Fig.67	79	P
$\pi/4$ DQPSK	2-DH5	Fig.68	Fig.69	79	P
8DPSK	3-DH5	Fig.70	Fig.71	79	P

See below for test graphs.

Conclusion: Pass



Fig. 66 Hopping channel CH0~39 (GFSK)

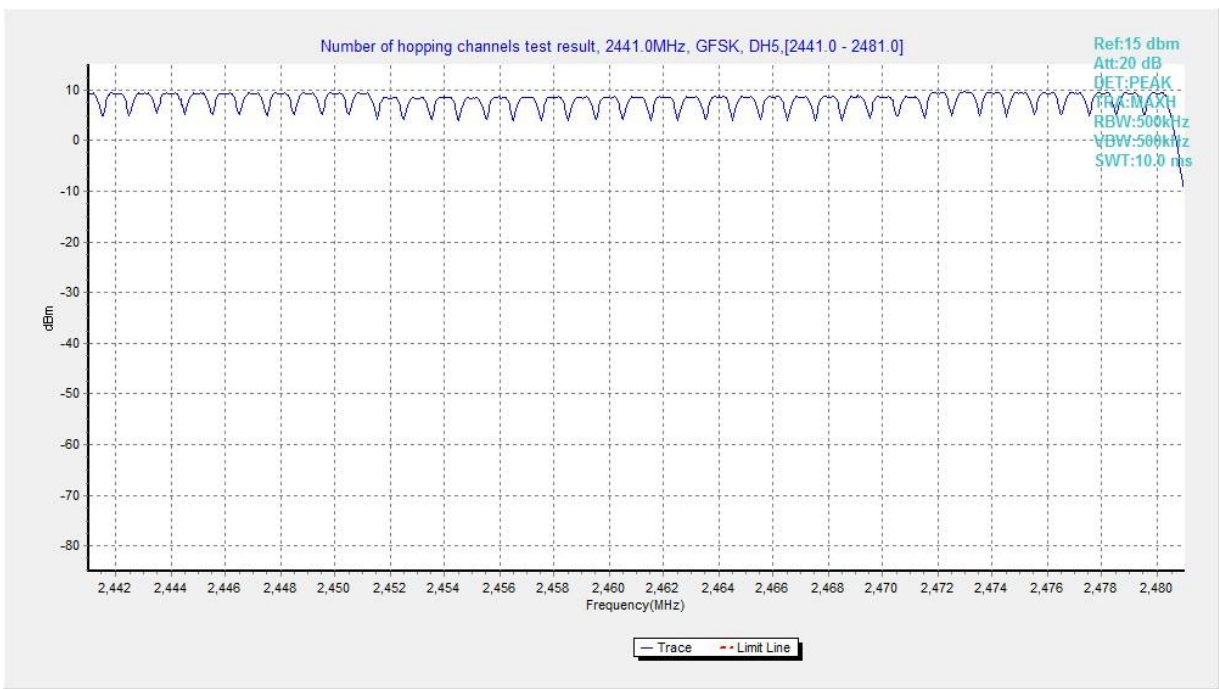


Fig. 67 Hopping channel CH40~78 (GFSK)

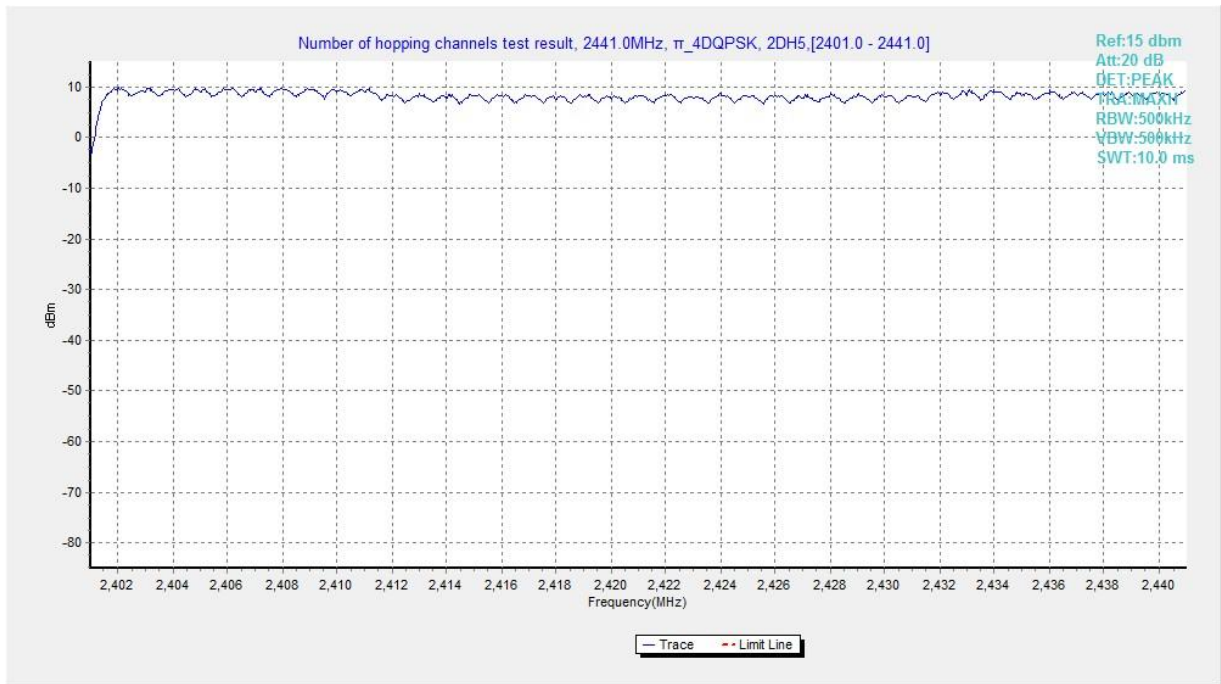


Fig. 68 Hopping channel CH0~39 ($\pi/4$ DQPSK)

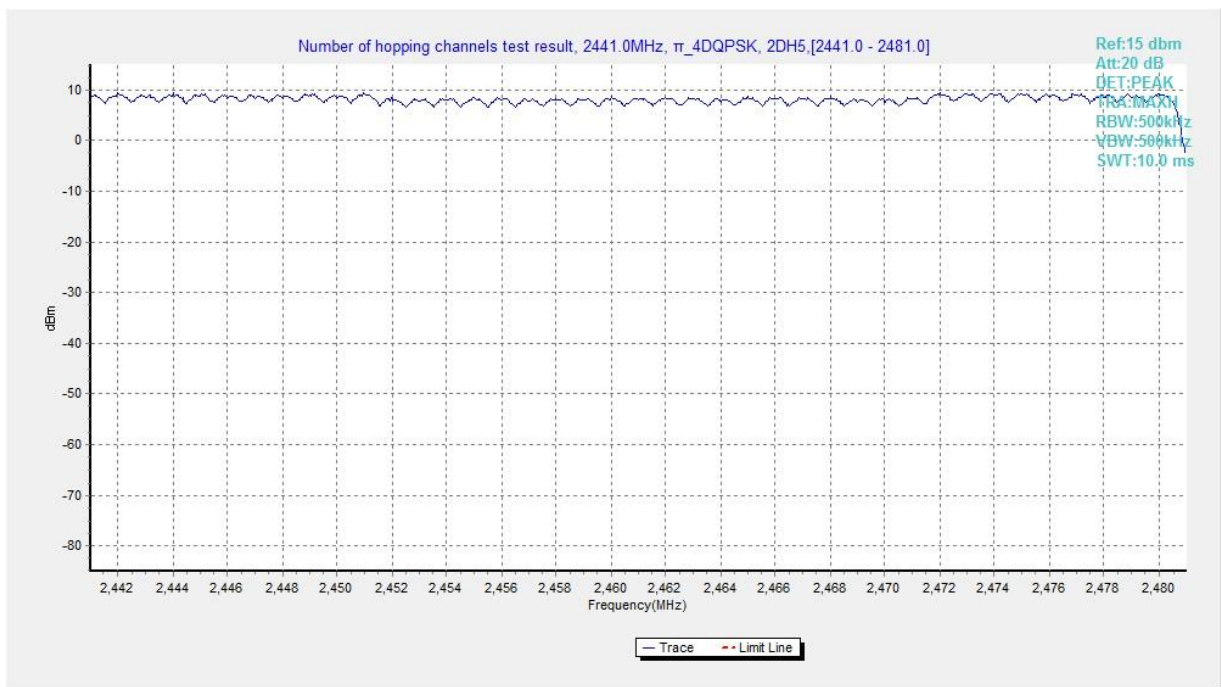


Fig. 69 Hopping channel CH40~78 ($\pi/4$ DQPSK)

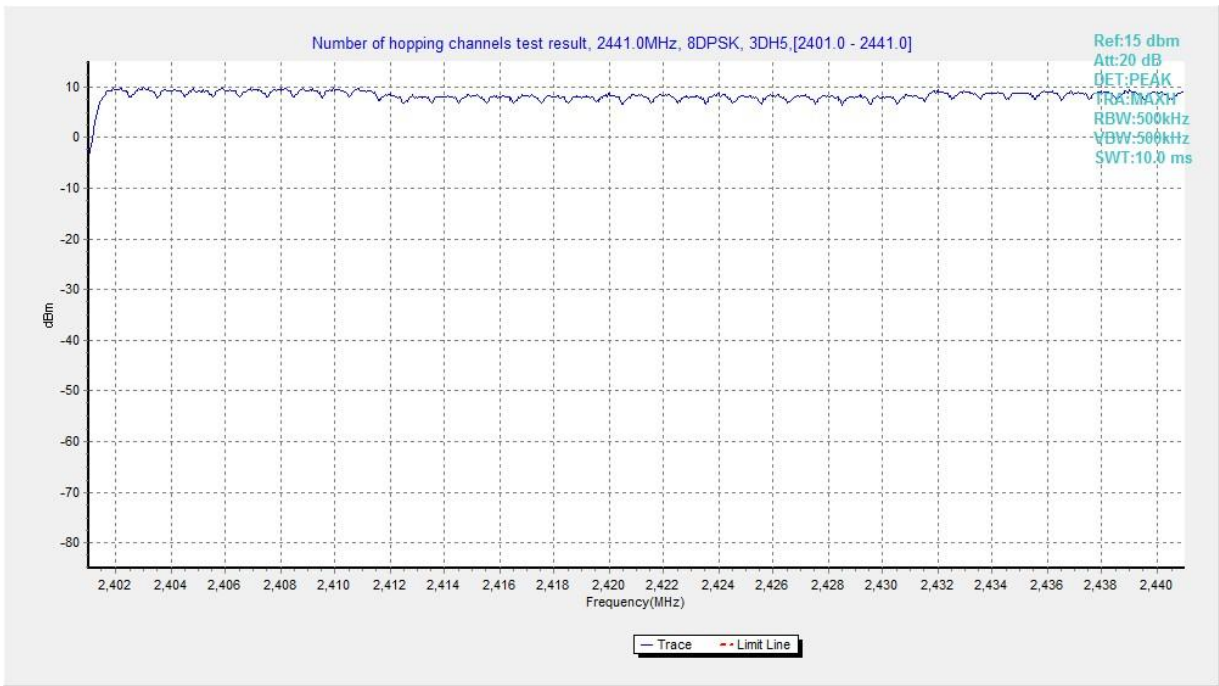


Fig. 70 Hopping channel CH0~39 (8DPSK)

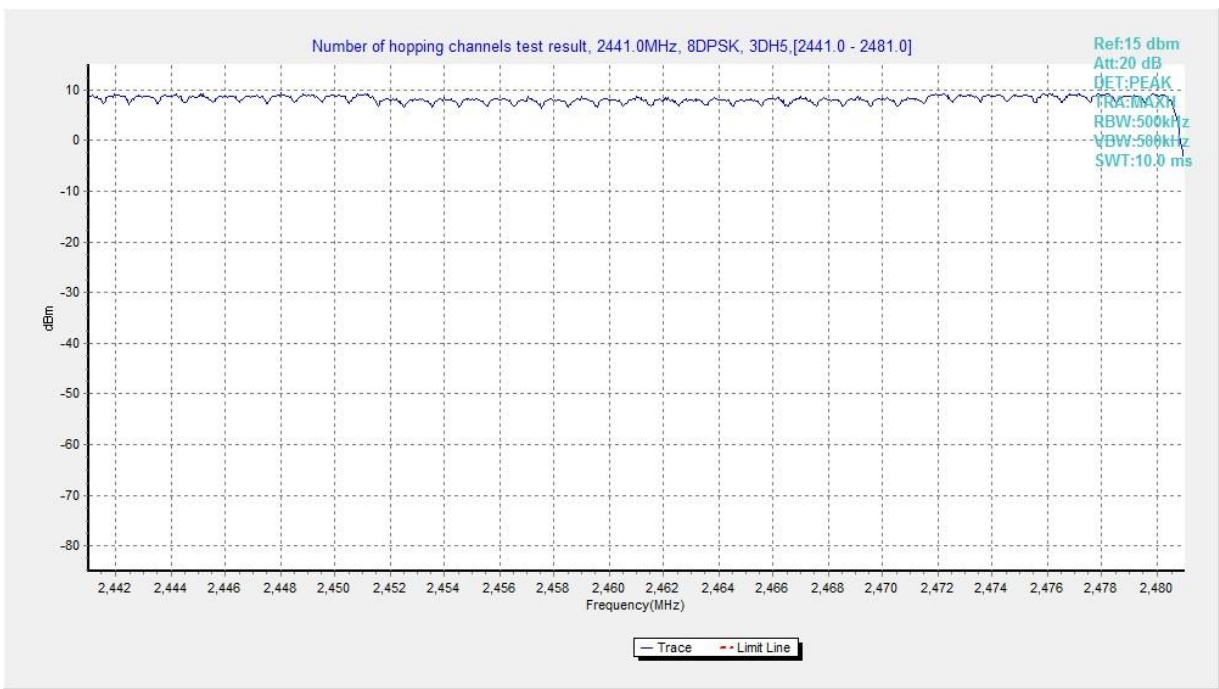


Fig. 71 Hopping channel CH40~78 (8DPSK)

A.8 Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

Measurement Results:

Mode	Frequency (MHz)	Packet	Separation of hopping channels	Test result (MHz)	Conclusion
GFSK	2441(CH39)	DH5	Fig.72	1.00	P
$\pi/4$ DQPSK	2441(CH39)	2-DH5	Fig.73	1.00	P
8DPSK	2441(CH39)	3-DH5	Fig.74	1.00	P

See below for test graphs.

Conclusion: Pass

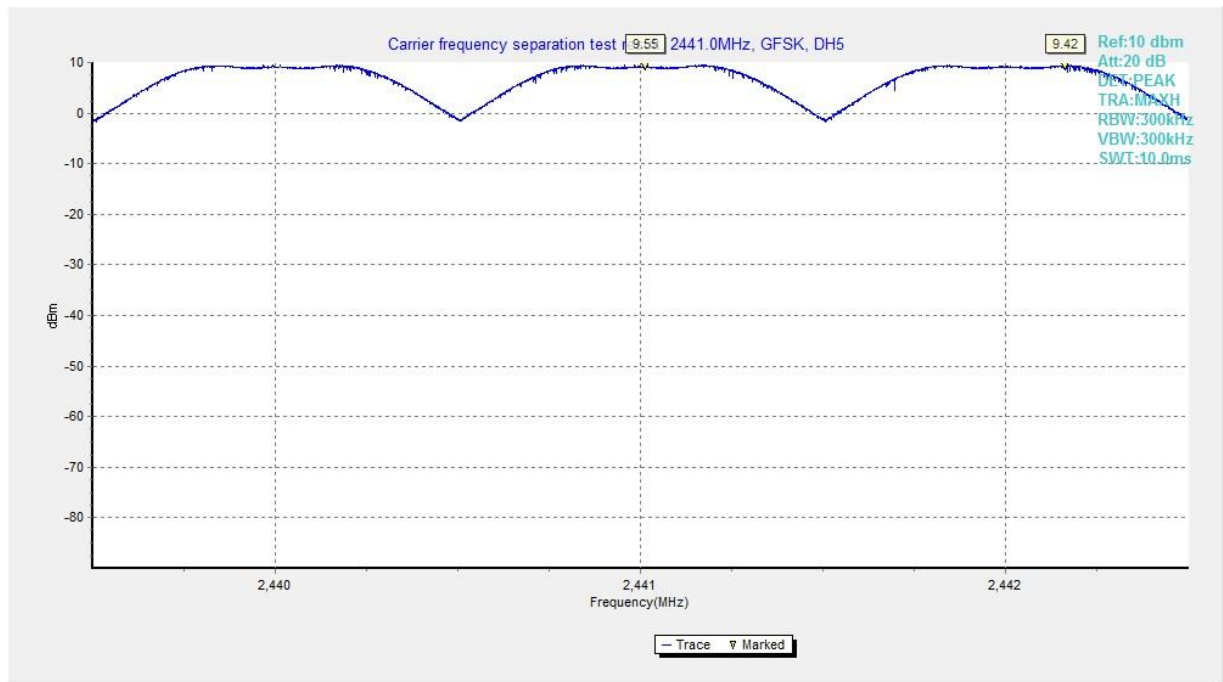


Fig. 72 Carrier Frequency Separation (GFSK, CH39)

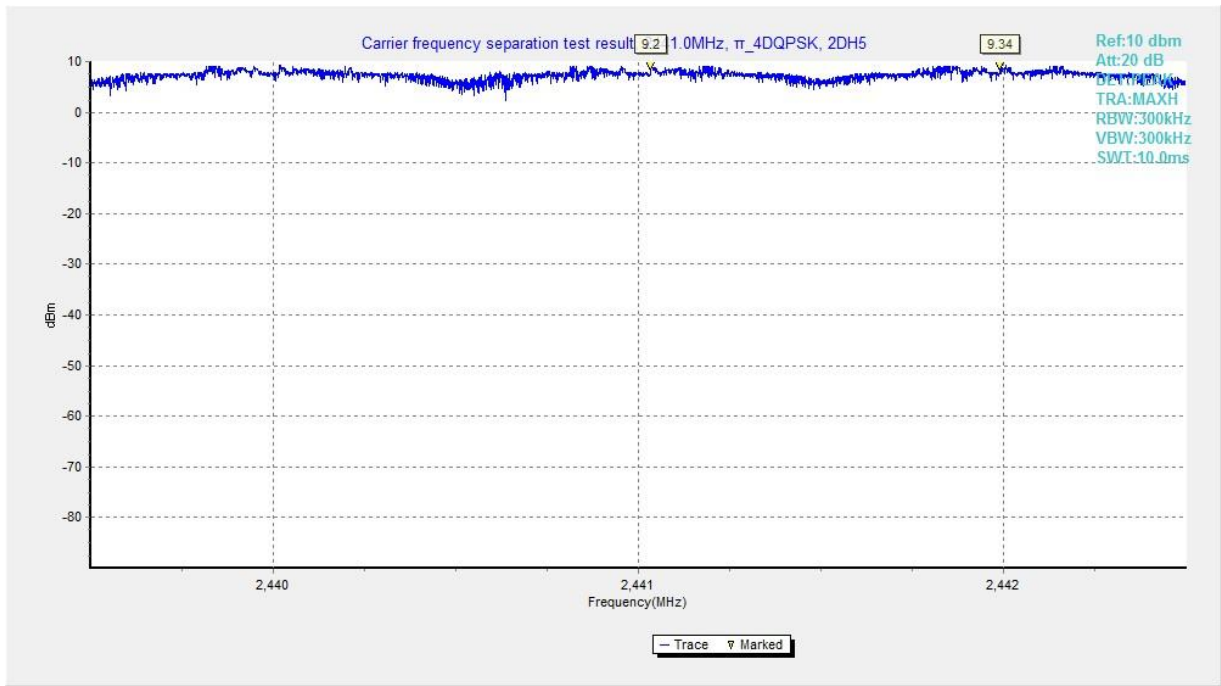


Fig. 73 Carrier Frequency Separation ($\pi/4$ DQPSK, CH39)

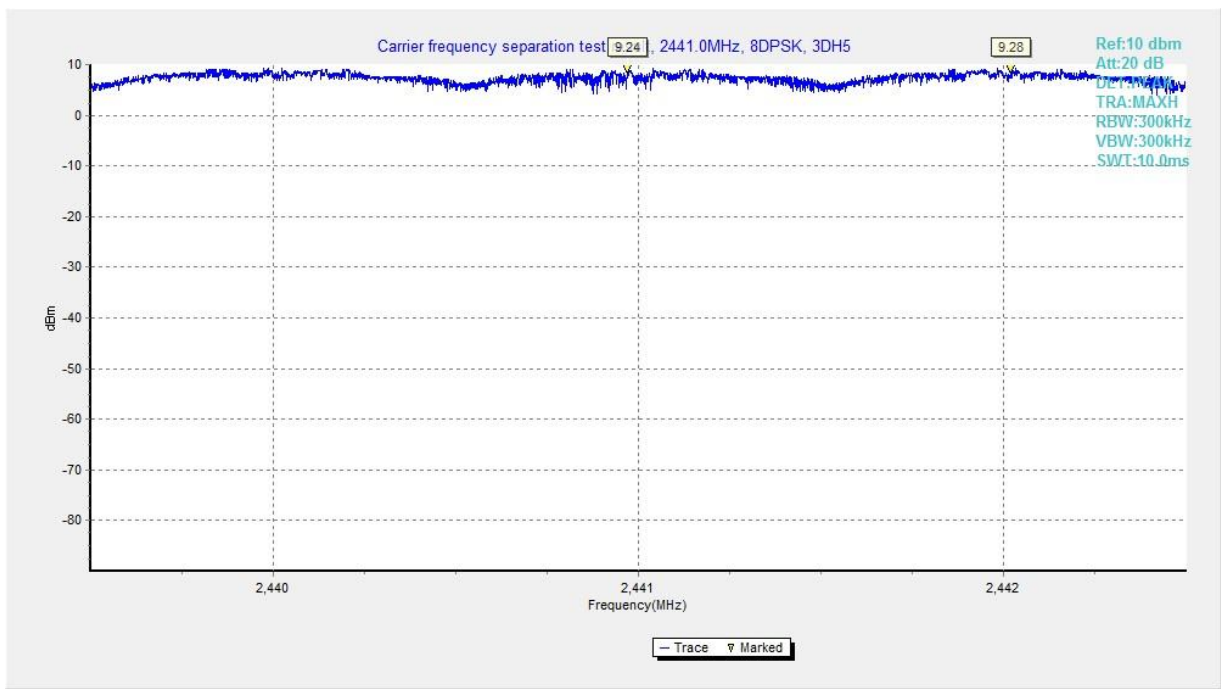


Fig. 74 Carrier Frequency Separation (8DPSK, CH39)



A.9 AC Power line Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Average-peak Limit (dBµV)	Result (dBµV)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.75	Fig.76	P
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: Pass

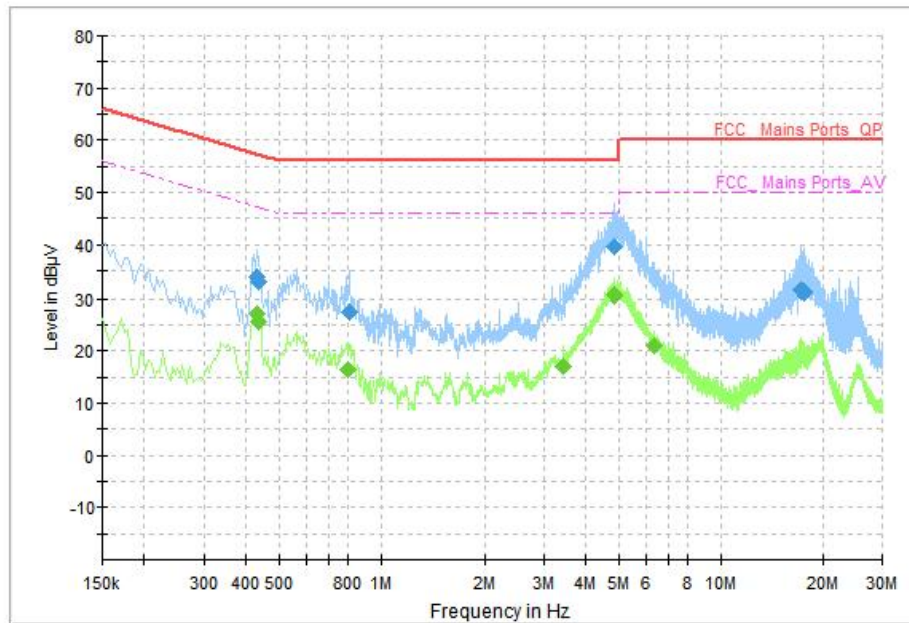


Fig. 75 AC Powerline Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	33.96	57.25	23.29	L1	ON	10
0.434000	32.96	57.18	24.22	L1	ON	10
0.806000	27.34	56.00	28.66	L1	ON	10
4.842000	39.54	56.00	16.46	L1	ON	10
17.218000	31.26	60.00	28.74	L1	ON	10
17.666000	31.13	60.00	28.87	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	27.16	47.25	20.09	N	ON	10
0.434000	25.45	47.18	21.73	N	ON	10
0.802000	16.50	46.00	29.50	N	ON	10
3.414000	17.03	46.00	28.97	L1	ON	10
4.842000	30.41	46.00	15.59	L1	ON	10
6.342000	21.03	50.00	28.97	L1	ON	10

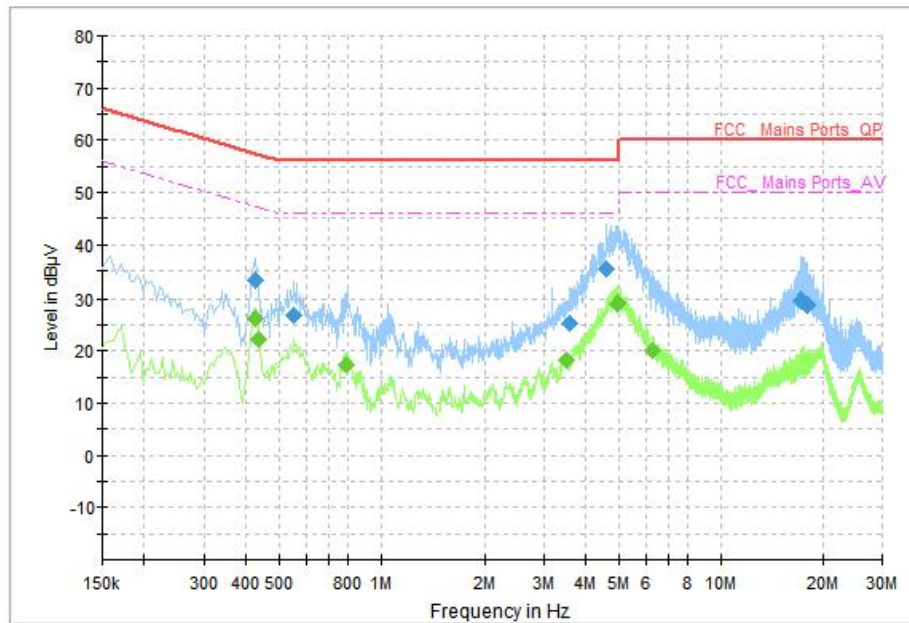


Fig. 76 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.426000	33.26	57.33	24.07	L1	ON	10
0.554000	26.74	56.00	29.26	L1	ON	10
3.570000	25.14	56.00	30.86	L1	ON	10
4.598000	35.22	56.00	20.78	L1	ON	10
17.226000	29.58	60.00	30.42	L1	ON	10
18.058000	28.61	60.00	31.39	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.426000	26.17	47.33	21.16	L1	ON	10
0.434000	22.05	47.18	25.13	N	ON	10
0.794000	17.41	46.00	28.59	L1	ON	10
3.478000	18.26	46.00	27.74	N	ON	10
4.962000	28.83	46.00	17.17	L1	ON	10
6.262000	19.93	50.00	30.07	L1	ON	10

END OF REPORT