



No. I23Z60662-SEM03

For

TCL Communication Ltd.

Tablet PC

Model name: 8196G

With

Hardware Version: PIO

Software Version: v3SSC

FCC ID: 2ACCJB201

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:


CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

Transmit Antenna Separation Distances

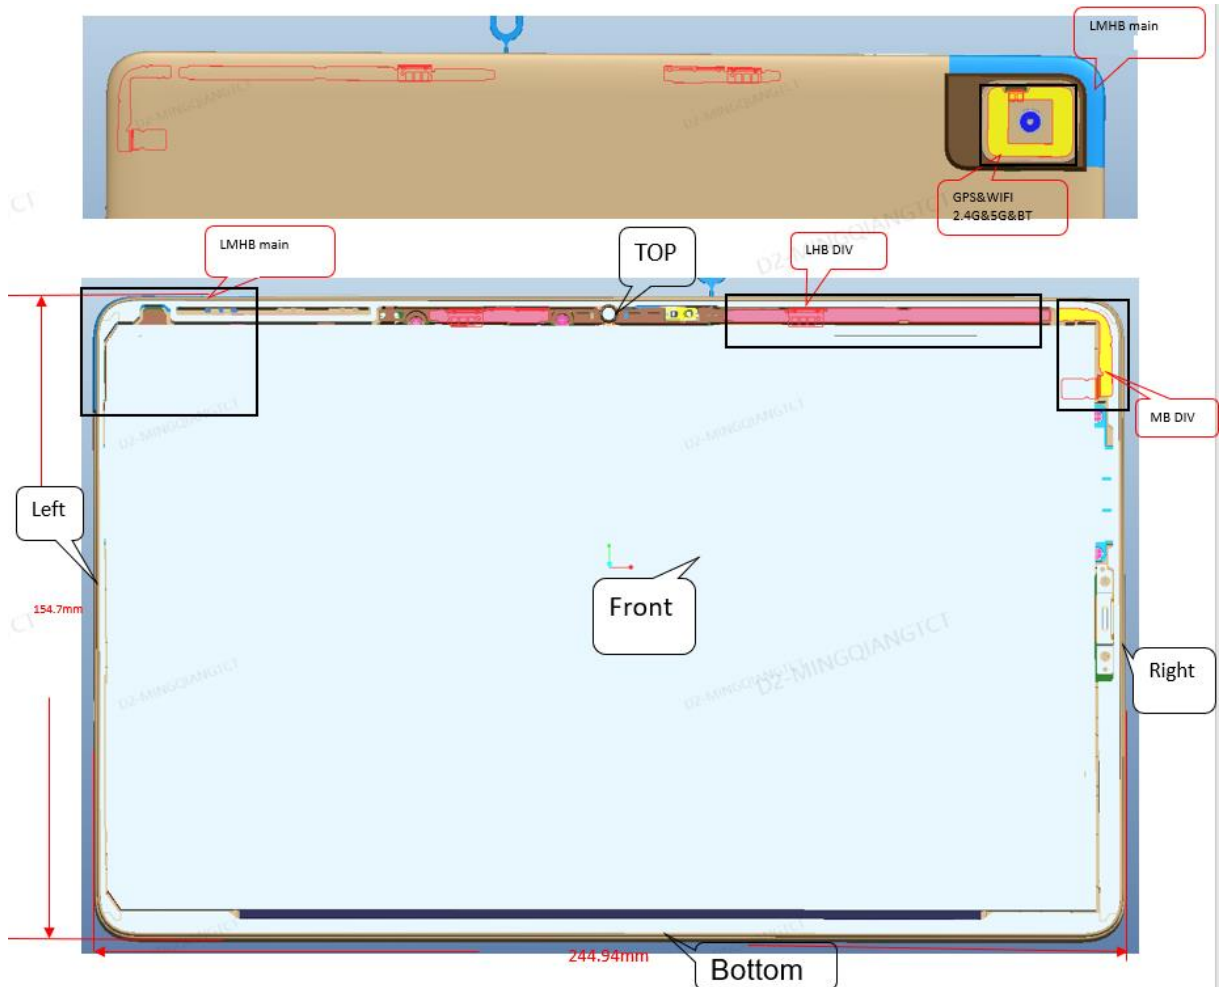

Antenna Locations

Measurement Positions

According to the KDB941225 D06 Hot Spot SAR, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
WWAN-Main	Yes	Yes	Yes	No	Yes	No
WIFI ANT	Yes	Yes	Yes	No	Yes	No



Picture 1: Constituents of the sample



Picture 2: Front 0mm



Picture 3: Rear 0mm_




Picture 4:Top 0mm




Picture 5: Left 0mm



Picture 6: rear 14mm

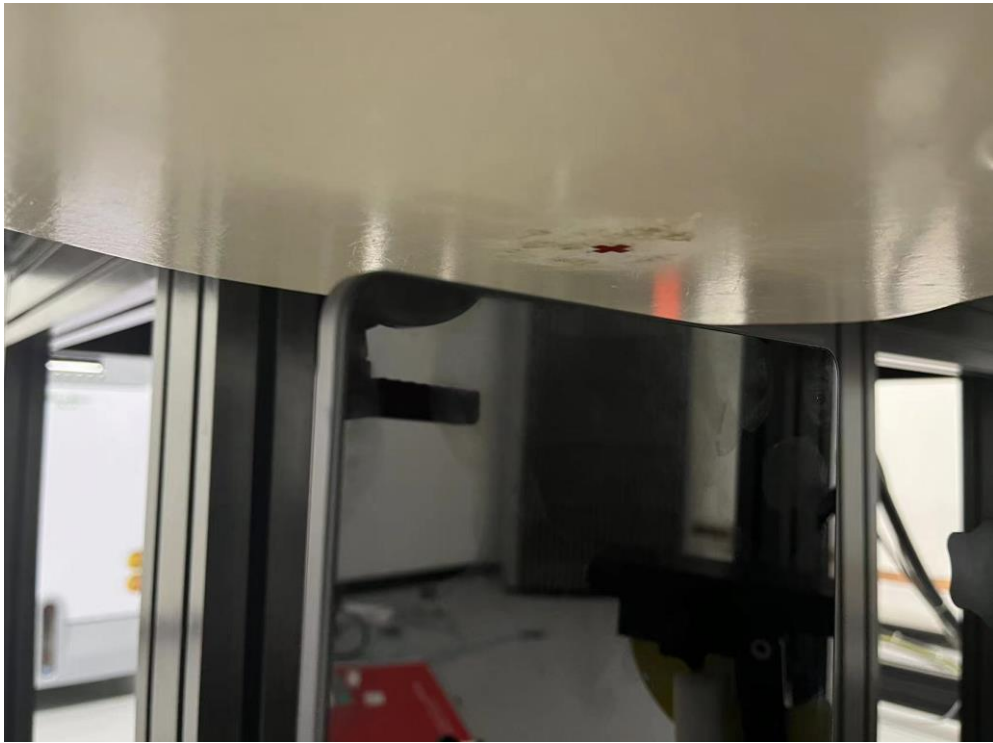

Picture 7: Left 14mm

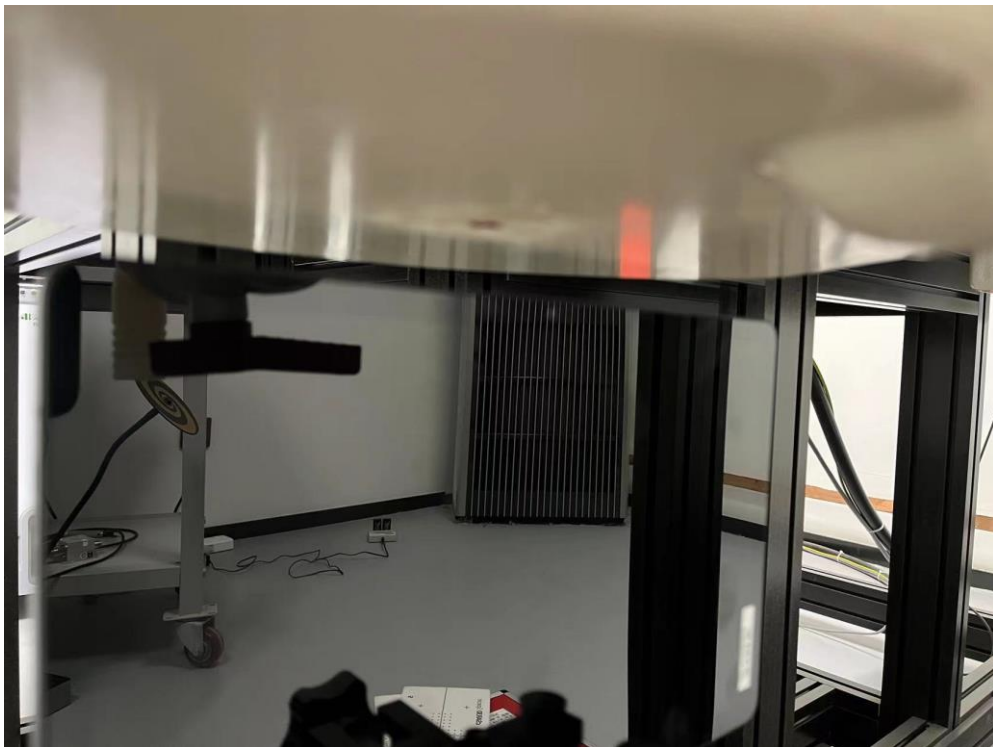

Picture 8: Top 14mm



Picture 9: Front 12mm