



# FCC PART 15B TEST REPORT

No. 24T04Z100346-002

for

**TCL Communication Ltd.**

**Tablet PC**

**Model name: 8493A**

**FCC ID: 2ACCJB207**

with

**Hardware Version: 05**

**Software Version: AWW2**

**Issued Date: 2024-03-07**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
24T04Z100346-002	Rev.0	1 <sup>st</sup> edition	2024-03-07

Note: the latest revision of the test report supersedes all previous version.



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>

## 1. Test Laboratory

### 1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2024-03-02

Testing End Date: 2024-03-06

### 1.4. Signature




---

Wang Xue  
(Prepared this test report)



---

Zhang Ying  
(Reviewed this test report)



---

Zhang Xia  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Annie Jiang  
Email: nianxiang.jiang@tcl.com  
Tel: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Annie Jiang  
Email: nianxiang.jiang@tcl.com  
Tel: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Tablet PC
Model Name	8493A
FCC ID:	2ACCJB207

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	B4695F93811846B	05	AWW2

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	Model	Manufacture	Remark
AE1	Battery	2853B7PL-2P	HUNAN GAOYUAN BATTERY COMPANY LIMITED	/
AE2	Charger	CG10A0502000UU	Huizhou Juwei Electronics Co.,LTD.	/
AE3	USB Cable	JWUB1591-J51R	Huizhou Juwei Electronics Co.,LTD.	/
AE4	USB Cable	XB.003.1071.0001	Huizhou Juwei Electronics Co.,LTD.	/
AE5	Headset	/	Huizhou Besiter Power Technology	Provided by laboratory

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1 + AE2 + AE3/4	Charger+MP3+F Camera
Set.2	EUT1 + AE1 + AE2 + AE3/4	Charger+MP4+R Camera
Set.3	EUT1 + AE1 + AE2 + AE4 + AE5	USB(new cable)+FM

Note:

Equipment Under Test (EUT) is a model of Tablet PC.

It has MP3, Camera, USB memory, Bluetooth 5.0, Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth) function.

Only the worst-case emissions are reported.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M $\Omega$
Ground system resistance	< 4 $\Omega$
Normalised site attenuation (NSA)	< $\pm 4$ dB, 3m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 M $\Omega$
Ground system resistance	< 4 $\Omega$



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

Note: The 8493A is a variant model based on 8492A. According to the declaration of changes, following items are tested, other test results please refer to I23Z60957-EMC04.

Test Item	Mode or Feature	EUT Set-up
Radiated Continues Emission	Charging mode/USB mode	Set.1/2/3
Conducted Emission	Charging mode/USB mode	Set.1/2/3

Only the worst-case emissions are reported.

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2024-07-08	1 Year
2	LISN	ENV216	101200	R&S	2024-07-04	1 Year
3	Test Receiver	ESCI 7	100344	R&S	2024-03-20	1 Year
4	EMI Antenna	VULB 9163	01223	SCHWARZBECK	2024-08-18	1 Year
3	EMI Antenna	3115	6914	ETS-Lindgren	2024-06-07	1 Year
4	Signal Generator	SMBV100A	260613	R&S	2024-03-14	1 Year

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V11.50.00
Conducted Emission	EMC32	V8.53.00

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 4.84 \text{ dB}$ ,  $k=2$ .

#### Measurement results for Set.1:

##### Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17737.520	41.70	-29.67	45.95	25.41	54.00	12.30	H
17759.280	41.60	-29.61	45.95	25.26	54.00	12.40	V
17746.360	41.60	-29.61	45.95	25.26	54.00	12.40	V
17769.820	41.40	-29.63	45.95	25.07	54.00	12.60	V
17748.400	41.40	-29.61	45.95	25.06	54.00	12.60	H
17758.600	41.40	-29.61	45.95	25.06	54.00	12.60	H

##### Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17704.540	52.20	-29.73	45.25	36.69	74.00	21.80	H
17660.000	51.70	-29.90	45.25	36.35	74.00	22.30	H
17737.520	51.60	-29.67	45.95	35.31	74.00	22.40	V
17696.040	51.60	-29.98	45.25	36.33	74.00	22.40	H
17702.160	51.50	-29.73	45.25	35.99	74.00	22.50	V
17529.100	51.50	-29.32	44.35	36.47	74.00	22.50	H

**Measurement results for Set.2:**
**Charing Mode/Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17727.660	41.20	-29.67	45.25	25.62	54.00	12.80	H
17735.480	41.20	-29.67	45.25	25.62	54.00	12.80	V
17697.060	41.20	-29.98	45.25	25.93	54.00	12.80	V
17738.200	41.20	-29.67	45.95	24.91	54.00	12.80	V
17704.540	41.20	-29.73	45.25	25.69	54.00	12.80	V
17766.080	41.20	-29.63	45.95	24.87	54.00	12.80	V

**Charging Mode/Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17229.900	51.60	-29.57	43.36	37.81	74.00	22.40	V
17668.500	51.40	-29.90	45.25	36.05	74.00	22.60	V
17735.820	51.10	-29.67	45.25	35.52	74.00	22.90	H
17583.500	51.10	-29.70	45.25	35.55	74.00	22.90	H
17594.380	51.10	-29.70	45.25	35.55	74.00	22.90	H
17998.640	50.90	-29.06	46.66	33.30	74.00	23.10	H

**Measurement results for Set.3:**
**USB Mode/Average detector**


Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17767.780	41.50	-29.63	45.95	25.17	54.00	12.50	H
17741.940	41.20	-29.61	45.95	24.86	54.00	12.80	H
17769.480	41.20	-29.63	45.95	24.87	54.00	12.80	V
17684.820	41.10	-29.98	45.25	25.83	54.00	12.90	V
17740.580	41.00	-29.61	45.95	24.66	54.00	13.00	H
17711.340	41.00	-29.73	45.25	25.49	54.00	13.00	H

**USB Mode/Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17772.200	51.80	-29.63	45.95	35.47	74.00	22.20	V
17674.280	51.60	-29.90	45.25	36.25	74.00	22.40	V
17988.440	51.60	-29.06	46.66	34.00	74.00	22.40	V
17685.840	51.40	-29.98	45.25	36.13	74.00	22.60	H
17693.660	51.20	-29.98	45.25	35.93	74.00	22.80	H
17611.720	51.10	-29.52	45.25	35.37	74.00	22.90	H

**Measurement results for Set.1:**

Full Spectrum

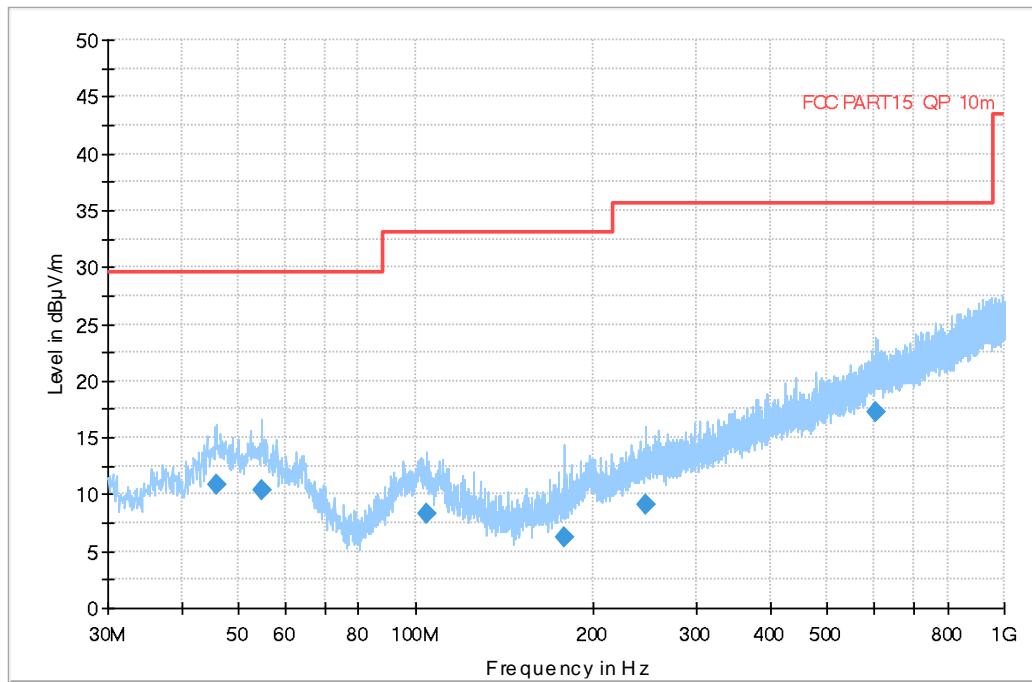


**Fig A.1 Radiated Emission from 30MHz to 1GHz**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)
45.908000	10.78	29.54	18.76	120.000	187.0	H	212.0
54.735000	10.32	29.54	19.22	120.000	275.0	H	45.0
104.302000	8.23	33.06	24.83	120.000	276.0	H	13.0
178.992000	6.27	33.06	26.79	120.000	100.0	V	-25.0
246.407000	9.09	35.56	26.47	120.000	322.0	V	193.0
605.404000	17.27	35.56	18.29	120.000	275.0	H	174.0

Full Spectrum

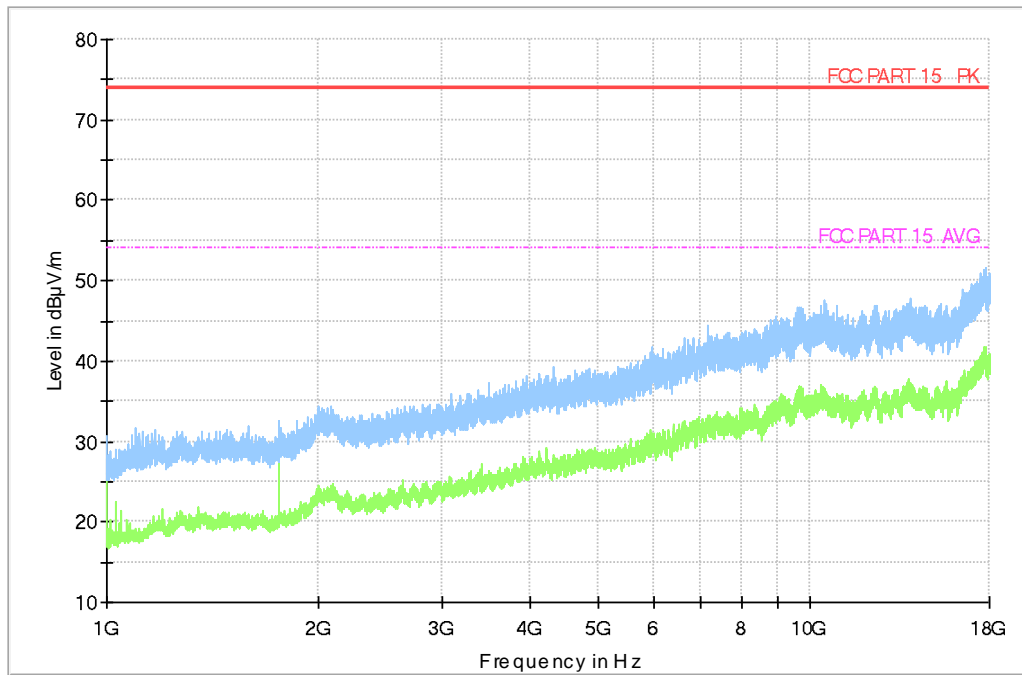


**Fig A.2 Radiated Emission from 1GHz to 18GHz**



**Measurement results for Set.2:**

Full Spectrum

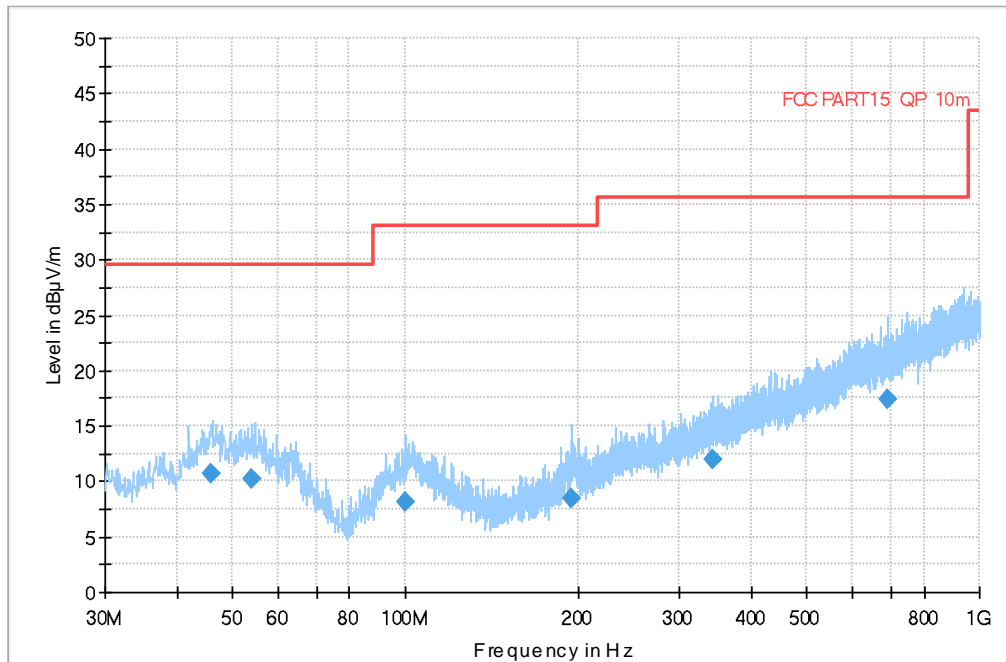


**Fig A.3 Radiated Emission from 30MHz to 1GHz**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)
45.908000	10.78	29.54	18.76	120.000	112.0	H	-44.0
54.056000	10.24	29.54	19.30	120.000	176.0	V	127.0
100.034000	8.16	33.06	24.90	120.000	225.0	V	225.0
195.288000	8.46	33.06	24.60	120.000	100.0	V	-43.0
344.280000	11.93	35.56	23.63	120.000	187.0	H	33.0
691.443000	17.44	35.56	18.12	120.000	125.0	V	212.0

Full Spectrum

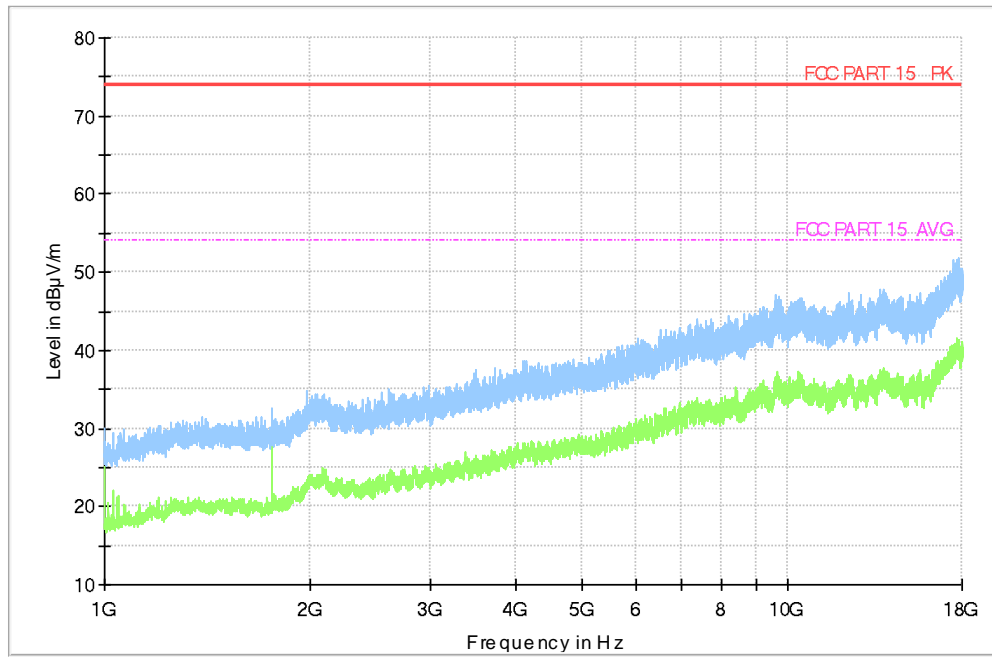

**Fig A.4 Radiated Emission from 1GHz to 18GHz**

Measurement results for Set.3:

Full Spectrum


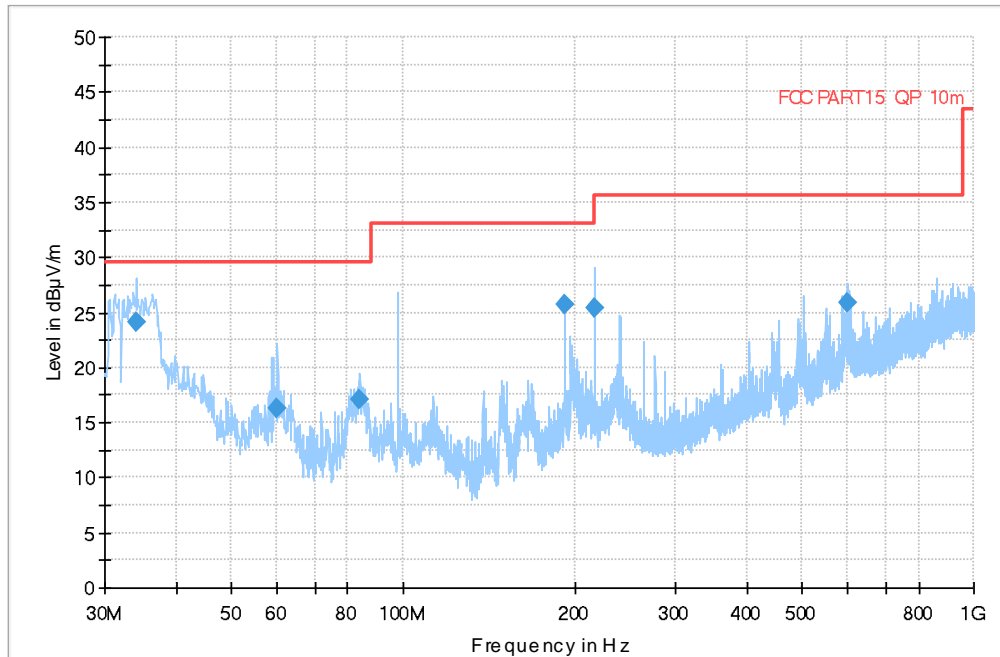


Fig A.5 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
34.074000	24.08	29.54	5.46	120.000	275.0	V	136.0
60.264000	16.25	29.54	13.29	120.000	101.0	V	193.0
84.029000	17.03	29.54	12.51	120.000	125.0	V	-45.0
191.990000	25.79	33.06	7.27	120.000	322.0	H	103.0
215.949000	25.47	33.06	7.59	120.000	322.0	H	103.0
600.651000	25.85	35.56	9.71	120.000	187.0	V	315.0

Full Spectrum

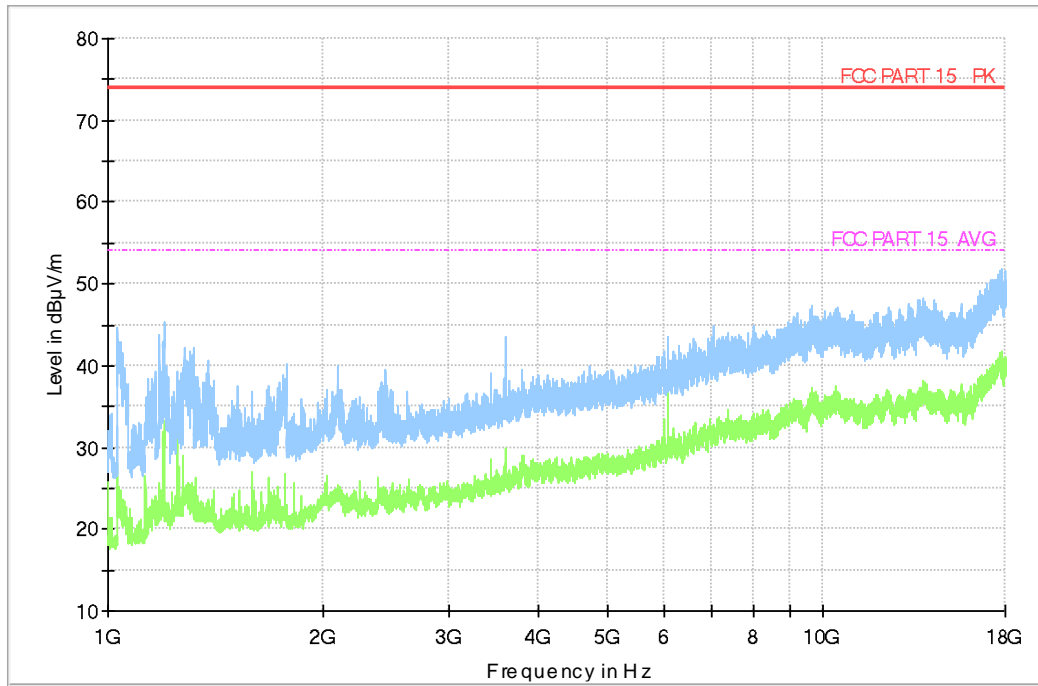

**Fig A.6 Radiated Emission from 1GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.08 \text{ dB}$ ,  $k=2$ .

Charging Mode, Set.1:

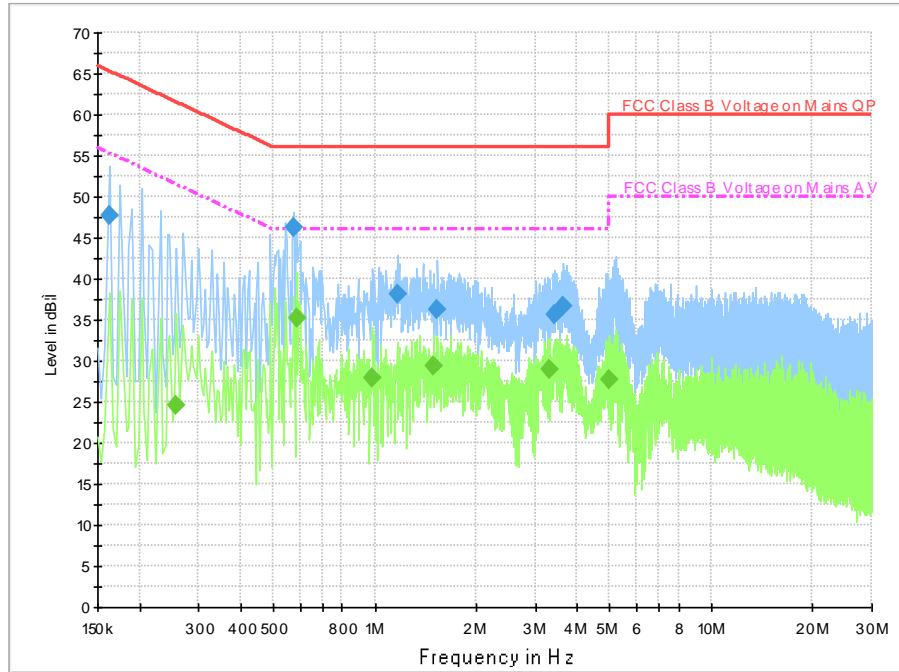


Fig A.7 Conducted Emission from 150kHz to 30MHz


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.162000	47.6	2000.0	9.000	On	L1	19.8	17.7	65.4	
0.574000	46.3	2000.0	9.000	On	L1	19.7	9.7	56.0	
1.166000	38.1	2000.0	9.000	On	L1	19.7	17.9	56.0	
1.538000	36.3	2000.0	9.000	On	L1	19.6	19.7	56.0	
3.406000	35.7	2000.0	9.000	On	L1	19.6	20.3	56.0	
3.642000	36.6	2000.0	9.000	On	L1	19.6	19.4	56.0	

#### Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.258000	24.5	2000.0	9.000	On	L1	19.7	27.0	51.5	
0.586000	35.2	2000.0	9.000	On	N	19.7	10.8	46.0	
0.986000	27.9	2000.0	9.000	On	N	19.6	18.1	46.0	
1.498000	29.4	2000.0	9.000	On	N	19.6	16.6	46.0	
3.294000	28.9	2000.0	9.000	On	N	19.6	17.1	46.0	
4.966000	27.7	2000.0	9.000	On	N	19.6	18.3	46.0	

**Charging Mode, Set.2:**

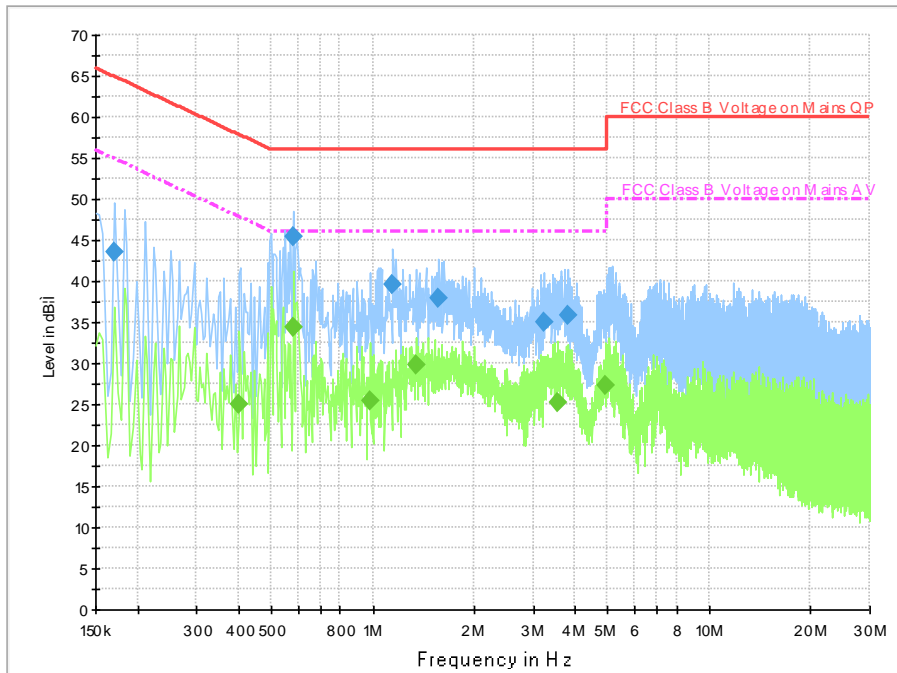

**Fig A.8 Conducted Emission from 150kHz to 30MHz**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.170000	43.5	2000.0	9.000	On	L1	19.7	21.5	65.0	
0.578000	45.4	2000.0	9.000	On	L1	19.7	10.6	56.0	
1.146000	39.5	2000.0	9.000	On	L1	19.7	16.5	56.0	
1.574000	37.8	2000.0	9.000	On	L1	19.6	18.2	56.0	
3.218000	34.9	2000.0	9.000	On	L1	19.6	21.1	56.0	
3.794000	35.7	2000.0	9.000	On	L1	19.6	20.3	56.0	

**Final Result 2**

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.402000	25.1	2000.0	9.000	On	L1	19.7	22.7	47.8	
0.582000	34.3	2000.0	9.000	On	N	19.7	11.7	46.0	
0.982000	25.5	2000.0	9.000	On	L1	19.7	20.5	46.0	
1.342000	29.8	2000.0	9.000	On	N	19.6	16.2	46.0	
3.558000	25.1	2000.0	9.000	On	L1	19.6	20.9	46.0	
4.910000	27.4	2000.0	9.000	On	N	19.6	18.6	46.0	

USB Mode, Set.3:

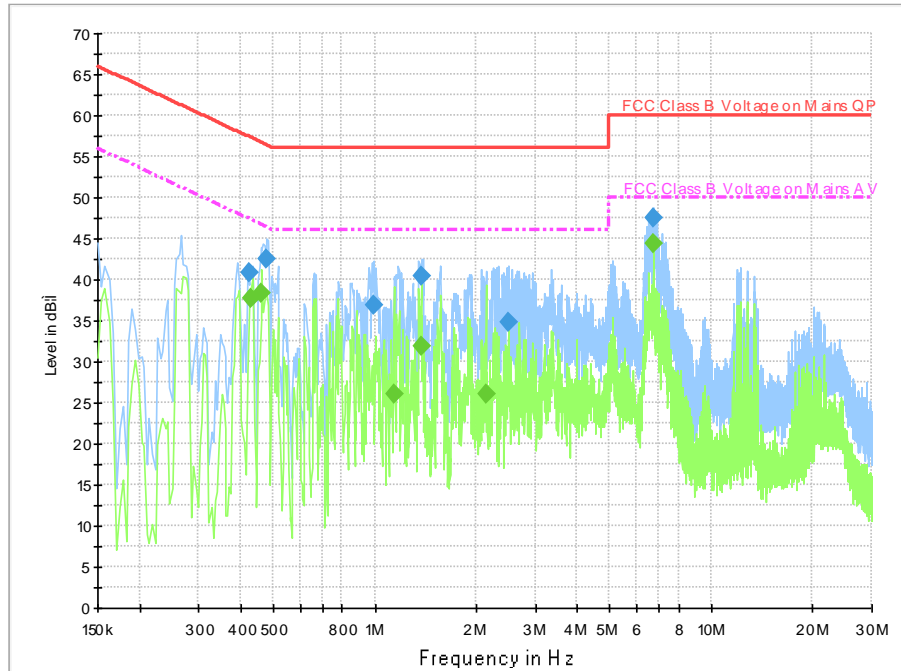


Fig A.9 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.426000	40.9	2000.0	9.000	On	L1	19.7	16.5	57.3	
0.478000	42.5	2000.0	9.000	On	N	19.7	13.9	56.4	
0.990000	36.8	2000.0	9.000	On	L1	19.7	19.2	56.0	
1.382000	40.4	2000.0	9.000	On	N	19.6	15.6	56.0	
2.498000	34.7	2000.0	9.000	On	L1	19.6	21.3	56.0	
6.702000	47.5	2000.0	9.000	On	N	19.6	12.5	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	37.6	2000.0	9.000	On	L1	19.7	9.6	47.3	
0.462000	38.3	2000.0	9.000	On	N	19.7	8.4	46.7	
1.138000	26.0	2000.0	9.000	On	N	19.6	20.0	46.0	
1.370000	31.9	2000.0	9.000	On	L1	19.6	14.1	46.0	
2.134000	26.1	2000.0	9.000	On	N	19.6	19.9	46.0	
6.702000	44.5	2000.0	9.000	On	N	19.6	5.5	50.0	

\*\*\*END OF REPORT\*\*\*