

Fig.100. Carrier frequency separation measurement: GFSK, Channel 39

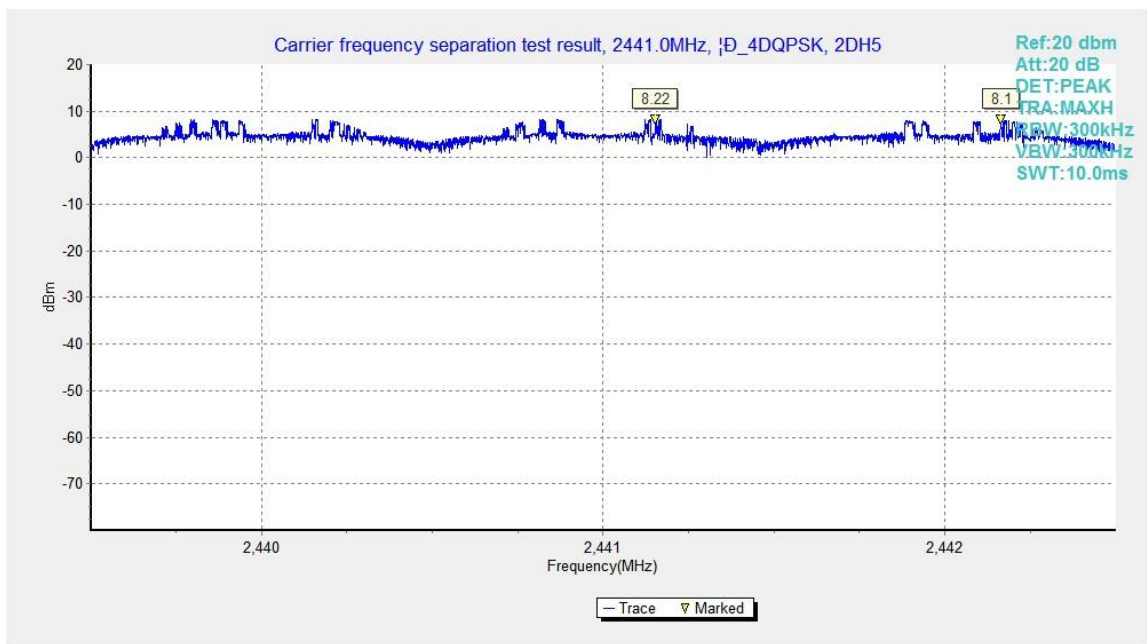


Fig.101. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

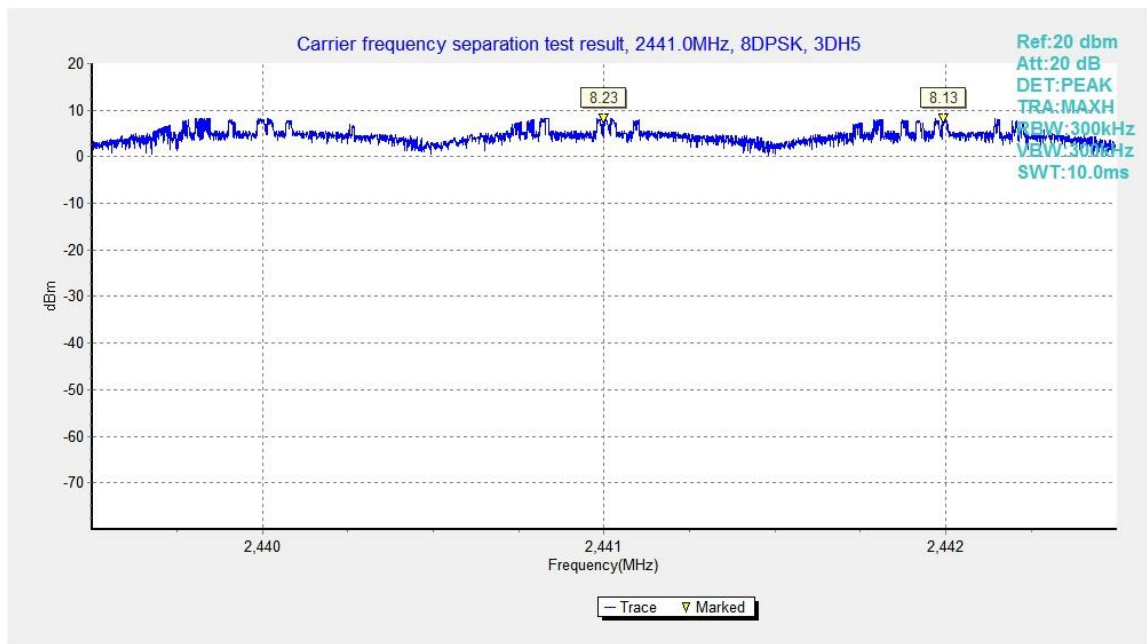


Fig.102. Carrier frequency separation measurement: 8DPSK, Channel 39

## B.9. Number of Hopping Channels

**Method of Measurement: See ANSI C63.10-clause 7.8.3**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.103	79	P
40~78	Fig.104		

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.105	79	P
40~78	Fig.106		

#### For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.107	79	P
40~78	Fig.108		

**Conclusion: PASS**

**Test graphs as below:**

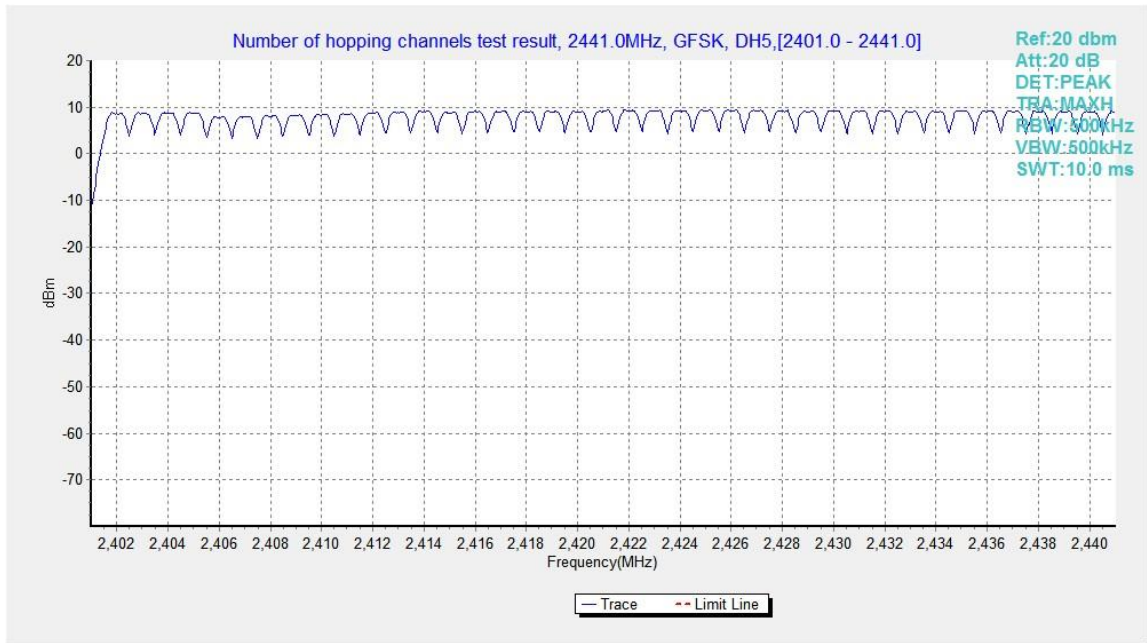


Fig.103. Number of hopping frequencies: GFSK, Channel 0 - 39

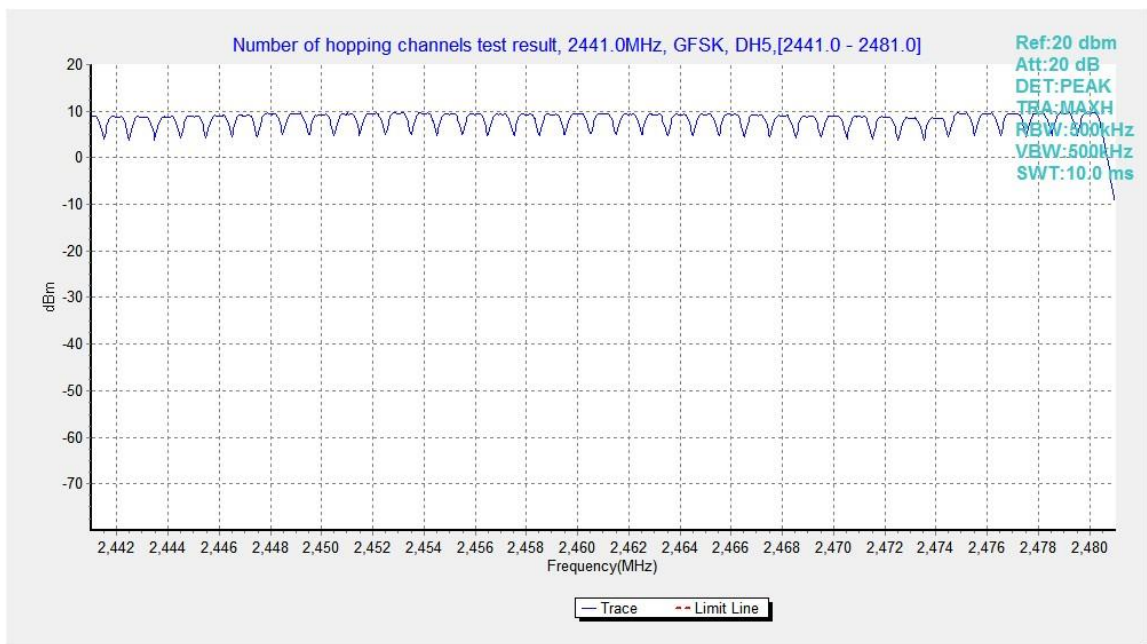


Fig.104. Number of hopping frequencies: GFSK, Channel 40 - 78

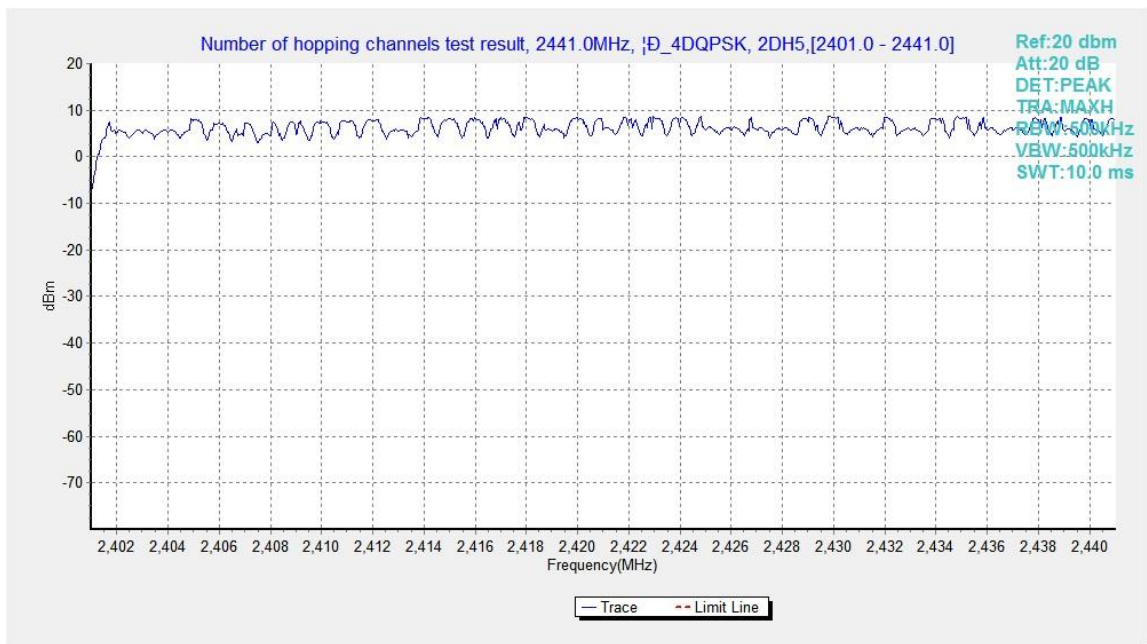


Fig.105. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

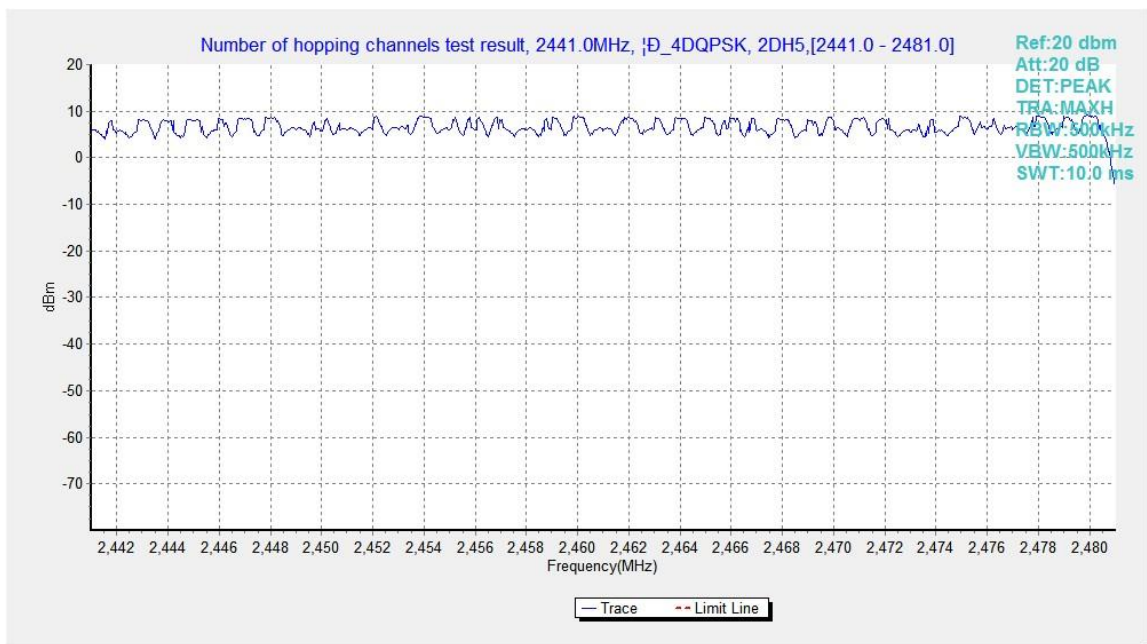


Fig.106. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

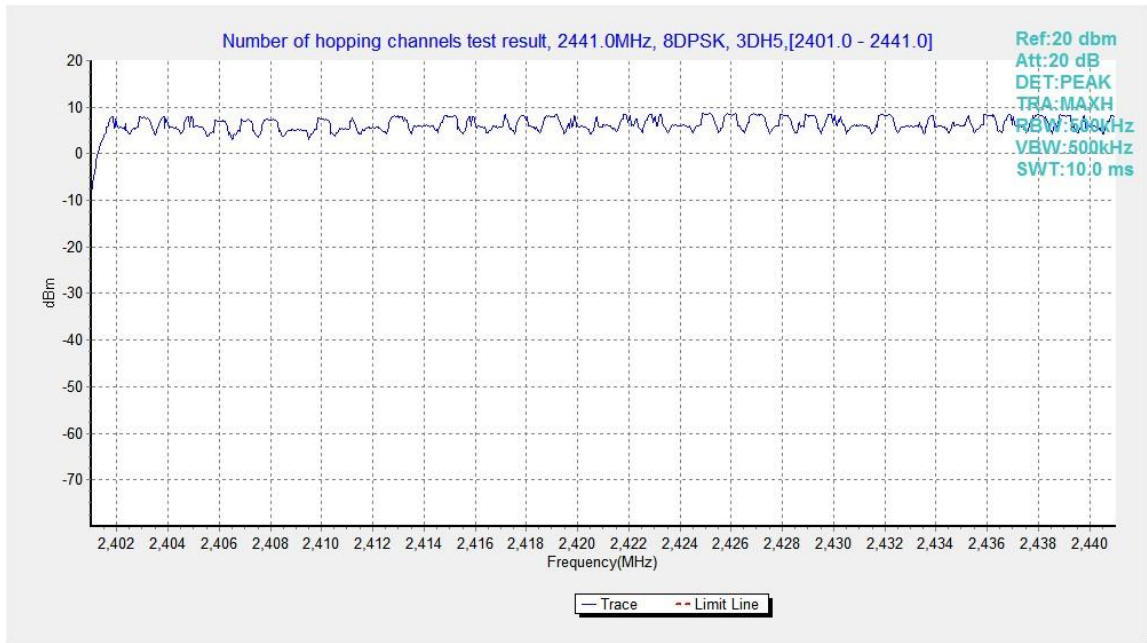


Fig.107. Number of hopping frequencies: 8DPSK, Channel 0 - 39

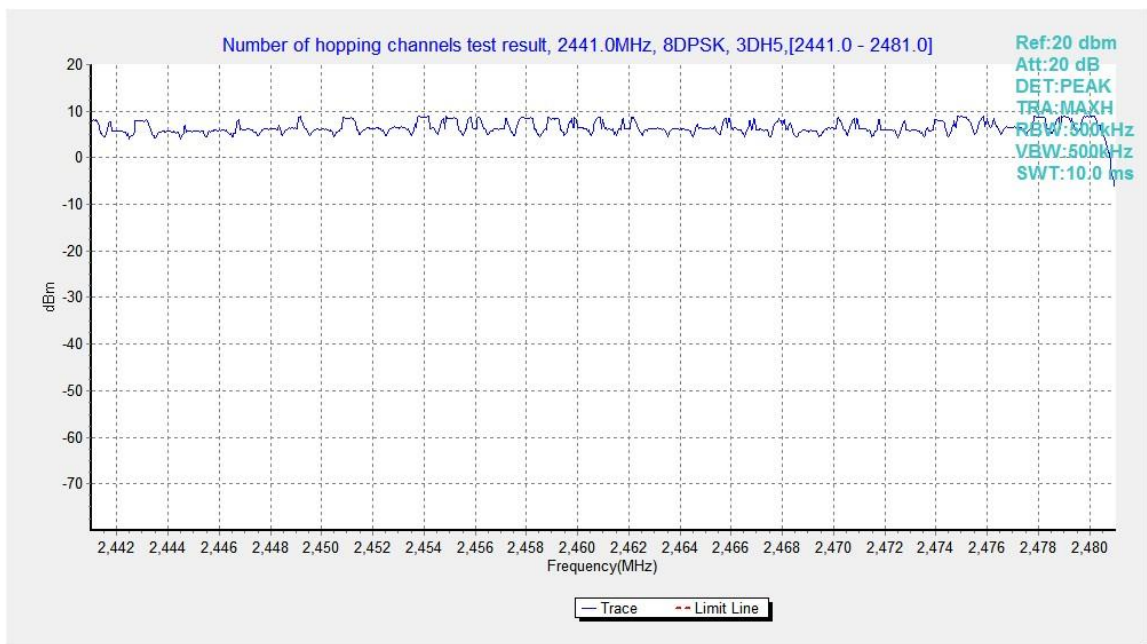


Fig.108. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.10. AC Powerline Conducted Emission

### Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Test setup

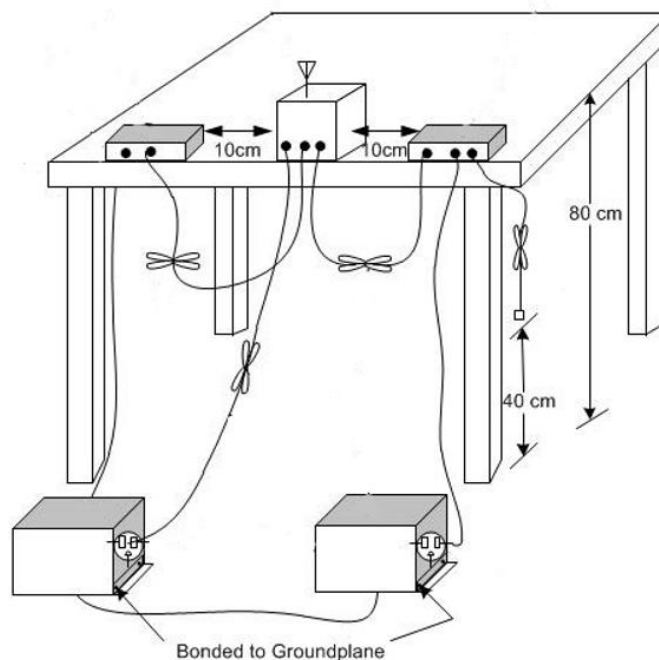

**Measurement Result and limit:**

## Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.10.1	Fig. B.10.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


## Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.10.1	Fig. B.10.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**
**Test graphs as below:**



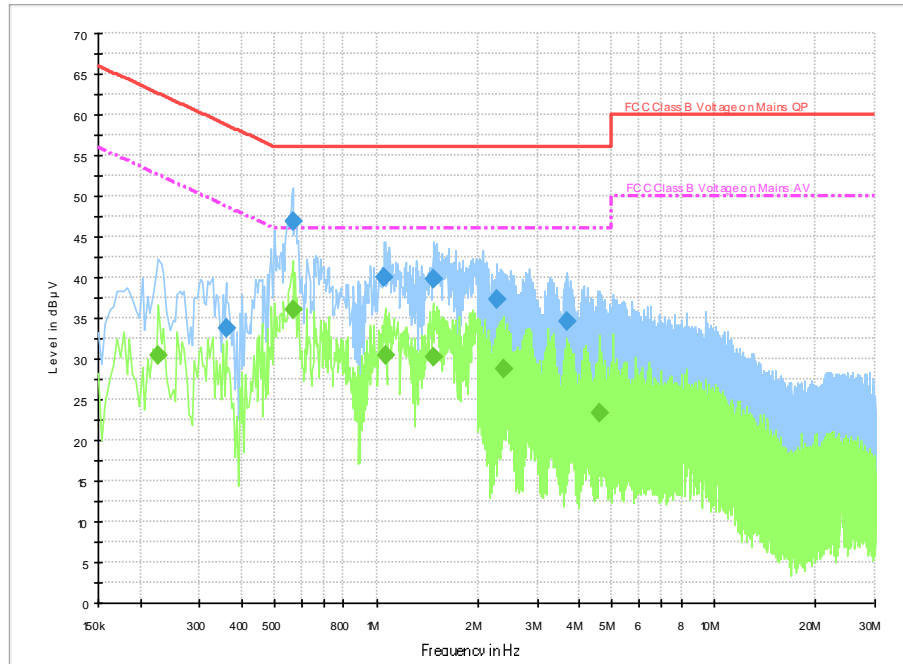

**Fig.B.10.1 AC Powerline Conducted Emission- bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.358000	33.8	2000.0	9.000	On	L1	19.7	25.0	58.8	
0.566000	46.9	2000.0	9.000	On	N	19.7	9.1	56.0	
1.058000	40.1	2000.0	9.000	On	N	19.6	15.9	56.0	
1.486000	39.7	2000.0	9.000	On	L1	19.7	16.3	56.0	
2.270000	37.3	2000.0	9.000	On	L1	19.6	18.7	56.0	
3.650000	34.5	2000.0	9.000	On	N	19.6	21.5	56.0	

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.226000	30.5	2000.0	9.000	On	L1	19.7	22.1	52.6	
0.566000	36.1	2000.0	9.000	On	N	19.7	9.9	46.0	
1.062000	30.5	2000.0	9.000	On	N	19.6	15.5	46.0	
1.470000	30.3	2000.0	9.000	On	L1	19.7	15.7	46.0	
2.386000	28.8	2000.0	9.000	On	L1	19.6	17.2	46.0	
4.566000	23.3	2000.0	9.000	On	L1	19.6	22.7	46.0	

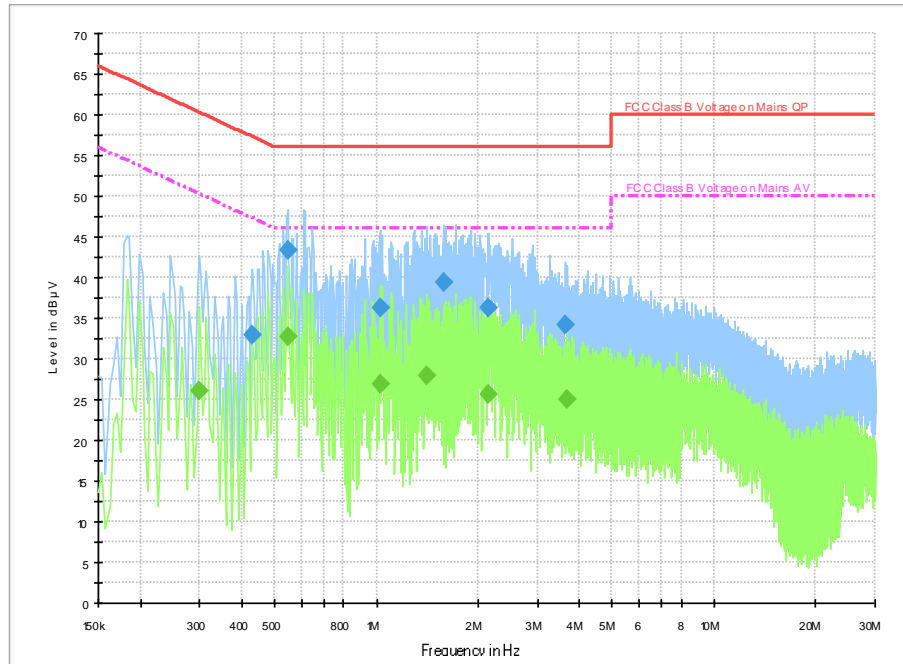

**Fig.B.10.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.430000	32.9	2000.0	9.000	On	L1	19.7	24.4	57.3	
0.546000	43.4	2000.0	9.000	On	L1	19.7	12.6	56.0	
1.026000	36.2	2000.0	9.000	On	N	19.6	19.8	56.0	
1.578000	39.3	2000.0	9.000	On	N	19.6	16.7	56.0	
2.146000	36.2	2000.0	9.000	On	L1	19.6	19.8	56.0	
3.626000	34.1	2000.0	9.000	On	L1	19.6	21.9	56.0	

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.298000	26.0	2000.0	9.000	On	N	19.7	24.3	50.3	
0.546000	32.7	2000.0	9.000	On	L1	19.7	13.3	46.0	
1.026000	26.9	2000.0	9.000	On	N	19.6	19.1	46.0	
1.414000	28.0	2000.0	9.000	On	N	19.6	18.0	46.0	
2.154000	25.7	2000.0	9.000	On	N	19.6	20.3	46.0	
3.674000	25.1	2000.0	9.000	On	N	19.6	20.9	46.0	



## **B.11. Antenna Requirement**

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## ANNEX C: Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

#### TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26<sup>th</sup> day of June 2023.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

\*\*\*END OF REPORT\*\*\*