



FCC PART 15C TEST REPORT No.23T04Z80940-07

for

TCL Communication Ltd.

Tablet PC

9199S

FCC ID:2ACCJB217

with

Hardware Version: 05

Software Version: 4DS9

Issued Date: 2024-02-26

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
23T04Z80940-07	Rev.0	1st edition	2024-02-26

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	6
1.4. PROJECT DATE	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE	8
3.4. GENERAL DESCRIPTION	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT	9
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT	10
6. TEST RESULTS	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. STATEMENTS	10
6.3. TEST CONDITIONS	10
7. TEST FACILITIES UTILIZED	11
8. MEASUREMENT UNCERTAINTY	12
8.1. MAXIMUM OUTPUT POWER	12
8.2. PEAK POWER SPECTRAL DENSITY	12
8.3. DTS 6-DB SIGNAL BANDWIDTH	12
8.4. BAND EDGES COMPLIANCE	12
8.5. TRANSMITTER SPURIOUS EMISSION	12
8.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: DETAILED TEST RESULTS	13
A.1. MEASUREMENT METHOD	13
A.2. MAXIMUM OUTPUT POWER	14



A.2.1 ANTENNA GAIN 14

A.2.2. PEAK OUTPUT POWER-CONDUCTED 14

A.3. PEAK POWER SPECTRAL DENSITY16

A.4. DTS 6-DB SIGNAL BANDWIDTH23

A.5. BAND EDGES COMPLIANCE 30

A.6. TRANSMITTER SPURIOUS EMISSION35

 A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED 35

 A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED55

A.7. AC POWER-LINE CONDUCTED EMISSION 69

ANNEX B: EUT PARAMETERS 73

ANNEX C: ACCREDITATION CERTIFICATE 73



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, 100176, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.4. Project date

Testing Start Date: 2023-12-26
Testing End Date: 2024-02-26

1.5. Signature



Yao Xingyu
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Tablet PC
Model name	9199S
FCC ID	2ACCJB217
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	25.43dBm
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.6V

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT33a	354709280001551	05	4DS9	2024-02-01
UT81a	354709280002070	05	4DS9	2024-01-08
UT85a	354709280002054	05	4DS9	2024-01-08

*EUT ID: is used to identify the test sample in the lab internally.

UT33a is used for Conduction test, UT81a and UT85a is used for Radiation test.

3.3. Internal Identification of AE

AE ID*	Description	SN
AE1	Battery	---
AE2	Battery	---

AE1

Commercial name

Type

Manufacturer

Length of cable

AE2

Commercial name

Type

Manufacturer

Length of cable

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Tablet PC with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division	2013
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Radiated Unwanted Emission	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2024-07-04
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2024-03-06
3	Test Receiver	ESCI	100766	R&S	1 year	2024-03-30
4	LISN	ENV216	101459	R&S	1 year	2024-03-29
5	Attenuator	10dB/2W	/	Rosenberger	/	/
6	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2025-01-18
2	EMI Antenna	VULB9163	9163-235	Schwarzbeck	1 year	2024-02-28
3	EMI Antenna	3117	00139065	ETS	1 year	2024-04-25

Test Item	Software	Manufacturer
Conducted emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V10.60.20	R&S

8. Measurement Uncertainty

8.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.29
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.62
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.52

8.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.10dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

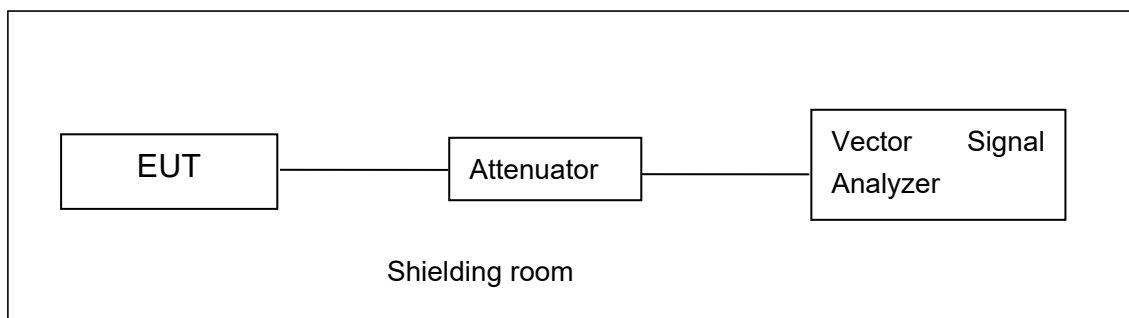


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

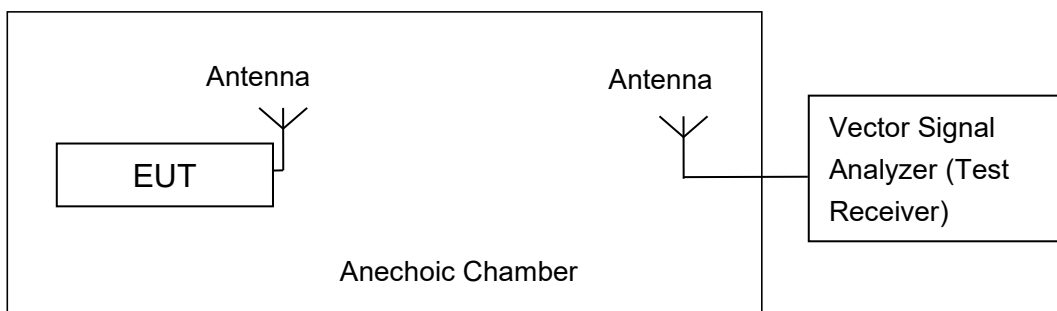


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

A.2.1 Antenna Gain

Antenna gain is -0.8dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Peak Output Power-conducted

EUT ID: UT33a

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	22.76	23.29	22.95
802.11g	6	24.82	25.04	24.76

The data rate 1Mbps and 6Mbps are selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	24.69	25.05	24.22

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	25.11	25.43	24.47

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

EUT ID: UT33a

Measurement Results:

802.11b/g mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.A.3.1	-2.09	P
	6	Fig.A.3.2	-1.68	P
	11	Fig.A.3.3	-2.11	P
802.11g	1	Fig.A.3.4	-6.94	P
	6	Fig.A.3.5	-7.51	P
	11	Fig.A.3.6	-7.75	P


802.11n-HT20 mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-7.86	P
	6	Fig.A.3.8	-8.50	P
	11	Fig.A.3.9	-8.72	P

802.11n-HT40 mode


Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT40)	3	Fig.A.3.10	-11.25	P
	6	Fig.A.3.11	-11.50	P
	9	Fig.A.3.12	-12.39	P

Test graphs as below:

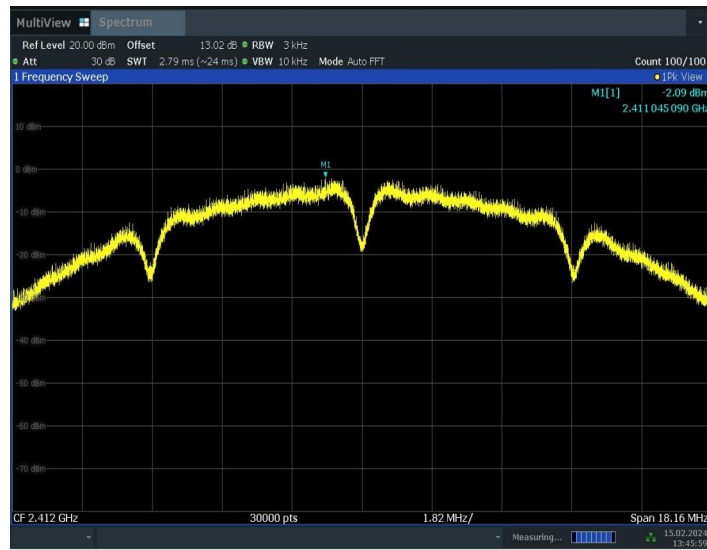

13:46:00 15.02.2024

Fig.A.3.1 Power Spectral Density(802.11b,Ch1)

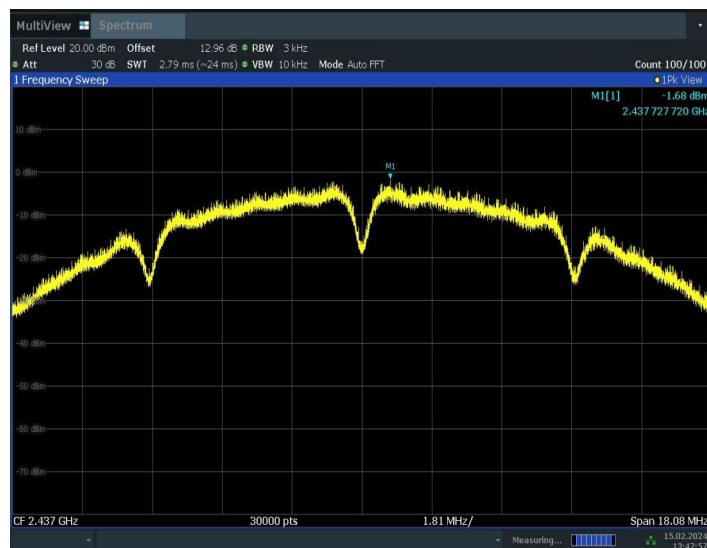

13:47:58 15.02.2024

Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)



Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)

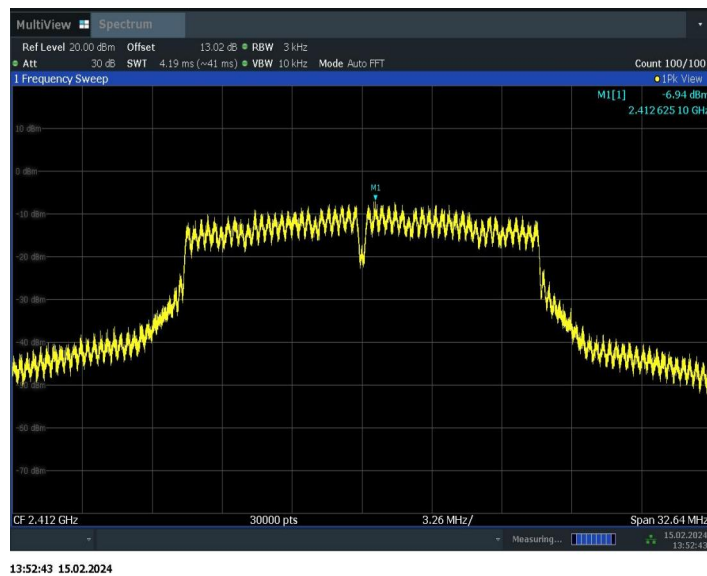


Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)



Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)

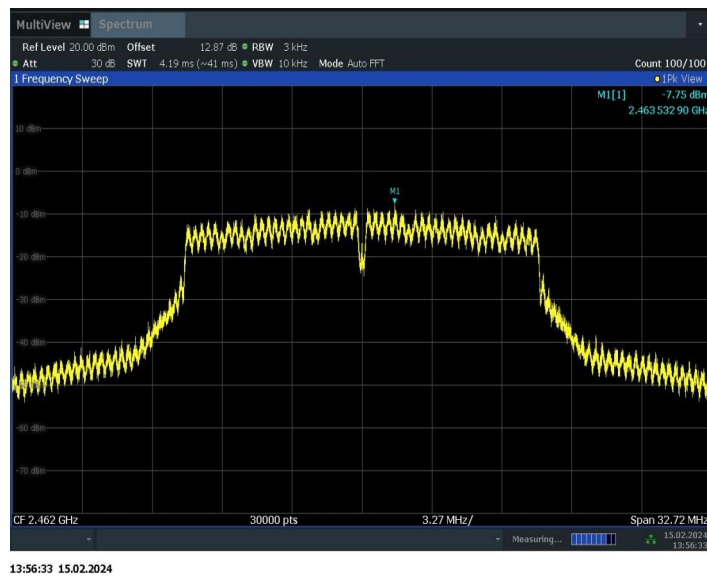


Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)



Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)



Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)



Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)

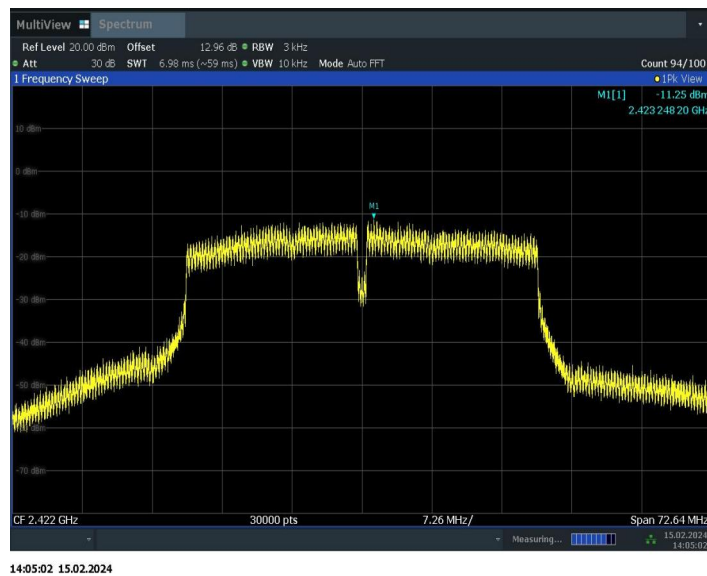


Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)

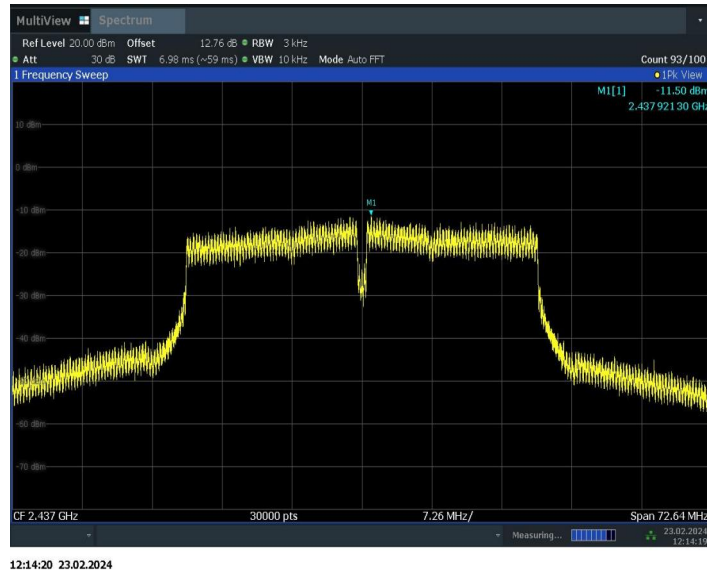


Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)

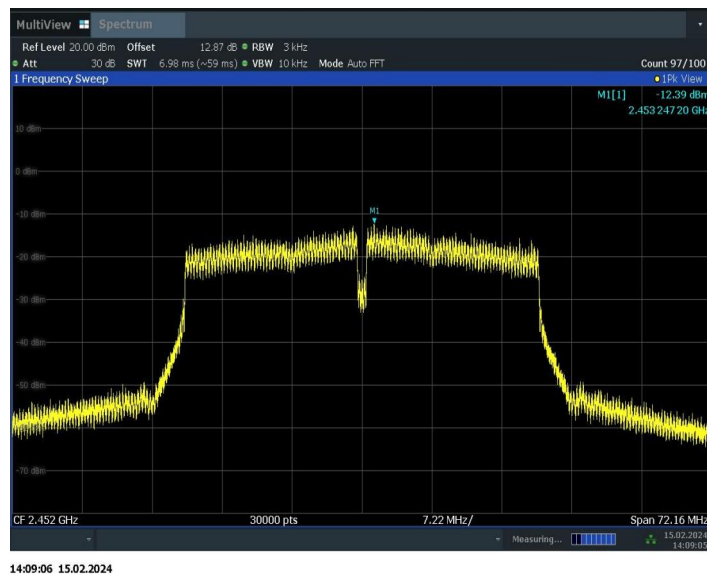


Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)

Conclusion: Pass

A.4. DTS 6-dB Signal Bandwidth

Method of Measurement: See ANSI C63.10-2013 section 11.8.1.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

EUT ID: UT33a

Measurement Result:

802.11b/g mode

Mode	Channel	DTS Bandwidth (MHz)		conclusion
		Fig.A.4.1	9.08	
802.11b	1	Fig.A.4.1	9.08	P
	6	Fig.A.4.2	9.04	P
	11	Fig.A.4.3	9.08	P
802.11g	1	Fig.A.4.4	16.32	P
	6	Fig.A.4.5	16.32	P
	11	Fig.A.4.6	16.36	P

802.11n-HT20 mode

Mode	Channel	DTS Bandwidth (MHz)		conclusion
		Fig.A.4.7	17.60	
802.11n (HT20)	1	Fig.A.4.7	17.60	P
	6	Fig.A.4.8	17.60	P
	11	Fig.A.4.9	17.56	P

802.11n-HT40 mode

Mode	Channel	DTS Bandwidth (MHz)		conclusion
		Fig.A.4.10	36.32	
802.11n (HT40)	3	Fig.A.4.10	36.32	P
	6	Fig.A.4.11	36.32	P
	9	Fig.A.4.12	36.08	P

Test graphs as below:



13:45:38 15.02.2024

Fig.A.4.1 DTS Bandwidth(802.11b,Ch 1)




13:47:39 15.02.2024

Fig.A.4.2 DTS Bandwidth (802.11b, Ch 6)




13:50:08 15.02.2024

Fig.A.4.3 DTS Bandwidth (802.11b, Ch 11)

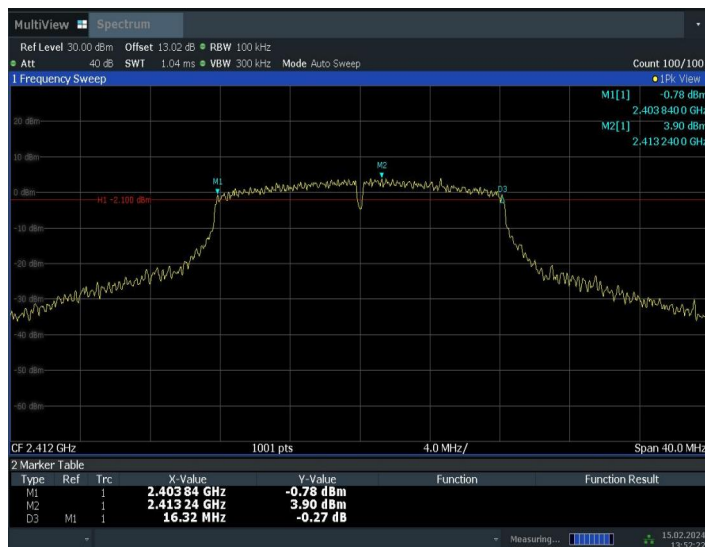


13:52:23 15.02.2024

Fig.A.4.4 DTS Bandwidth (802.11g, Ch 11)

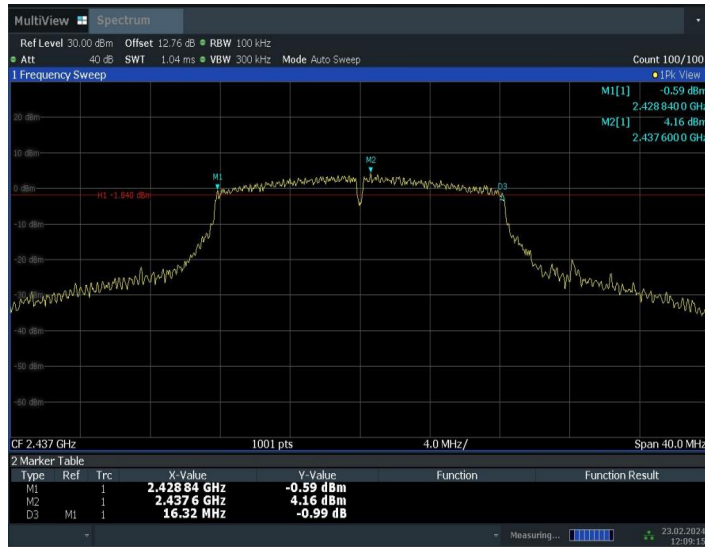


12:09:15 23.02.2024

Fig.A.4.5 DTS Bandwidth (802.11g, Ch 6)

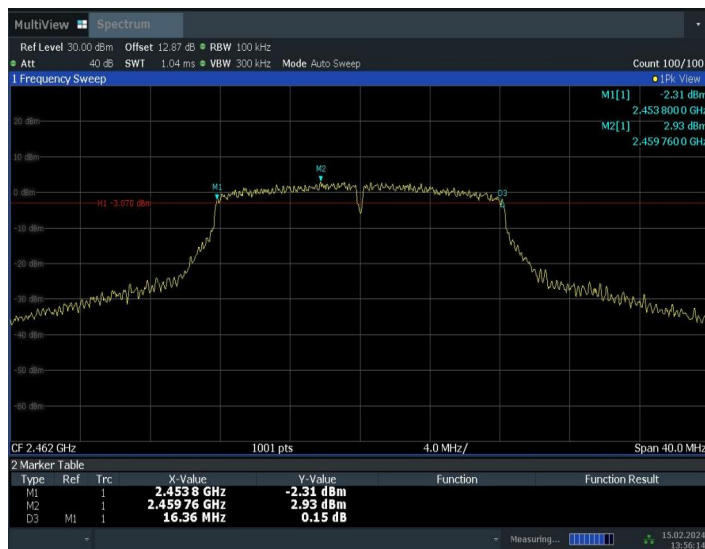


13:56:14 15.02.2024

Fig.A.4.6 DTS Bandwidth (802.11g, Ch 11)

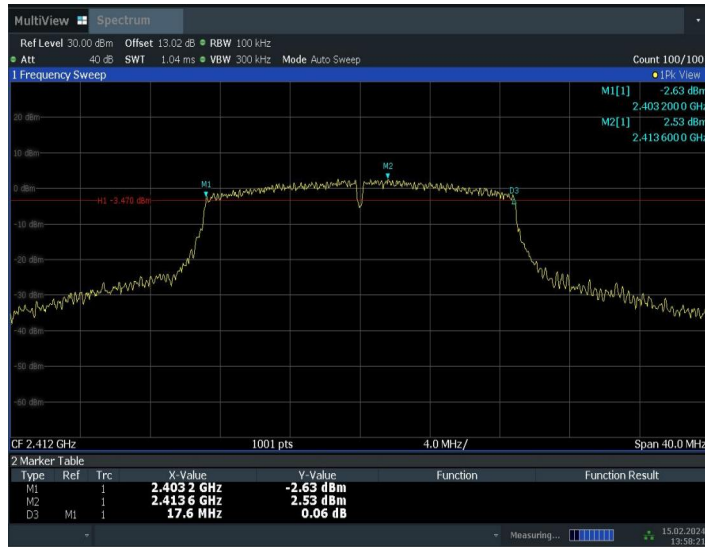


13:58:22 15.02.2024

Fig.A.4.7 DTS Bandwidth (802.11n-20MHz, Ch 1)

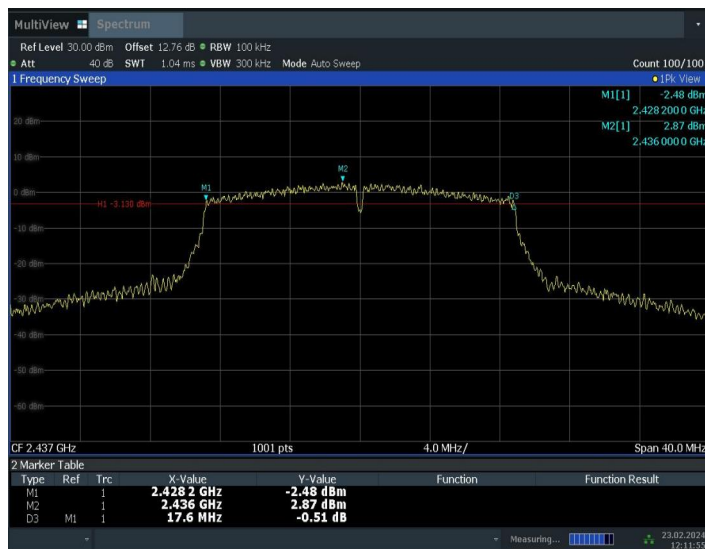

12:11:55 23.02.2024

Fig.A.4.8 DTS Bandwidth (802.11n-HT20, Ch 6)

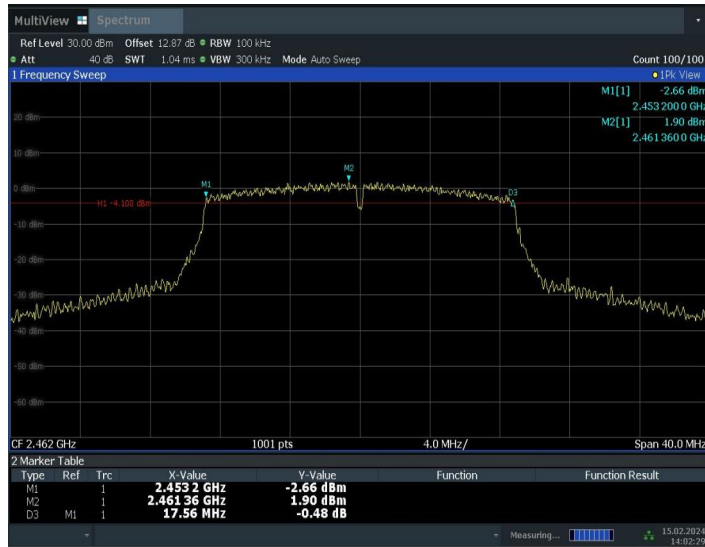


14:02:29 15.02.2024

Fig.A.4.9 DTS Bandwidth (802.11n-HT20, Ch 11)




14:04:43 15.02.2024

Fig.A.4.10 DTS Bandwidth (802.11n-40MHz, Ch 3)

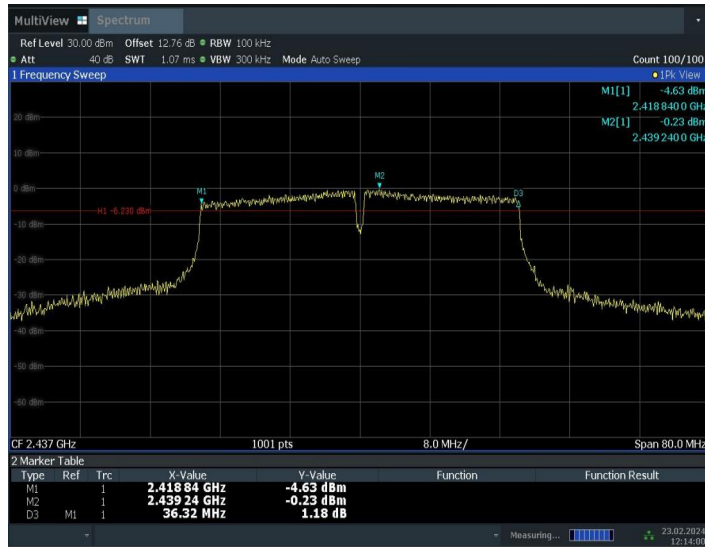

12:14:01 23.02.2024

Fig.A.4.11 DTS Bandwidth (802.11n-HT40, Ch 6)

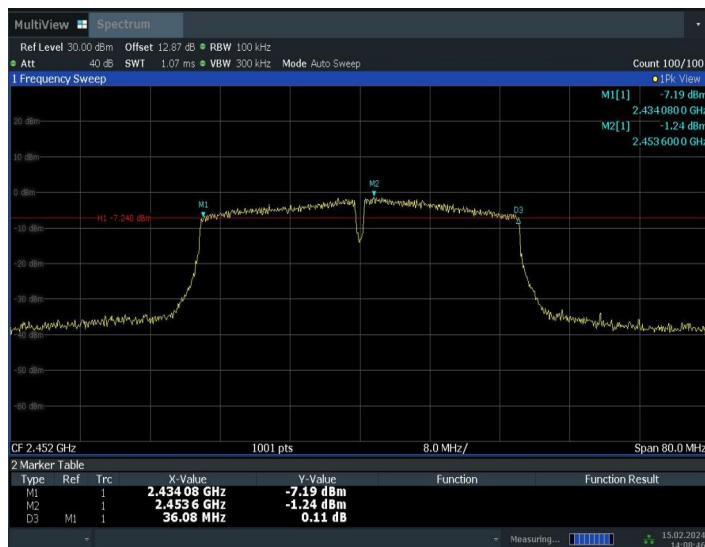

14:08:47 15.02.2024

Fig.A.4.12 DTS Bandwidth (802.11n-HT40, Ch 9)

Conclusion: Pass

A.5. Band Edges Compliance

Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

EUT ID: UT33a

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	P
	11	Fig.A.5.2	P
802.11g	1	Fig.A.5.3	P
	11	Fig.A.5.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	P
	11	Fig.A.5.6	P

802.11n-HT40 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.5.7	P
	9	Fig.A.5.8	P

Test graphs as below:



13:46:10 15.02.2024

Fig.A.5.1 Band Edges (802.11b, Ch 1)



13:50:36 15.02.2024

Fig.A.5.2 Band Edges (802.11b, Ch 11)




13:52:52 15.02.2024

Fig.A.5.3 Band Edges (802.11g, Ch 1)



13:56:43 15.02.2024

Fig.A.5.4 Band Edges (802.11g, Ch 11)

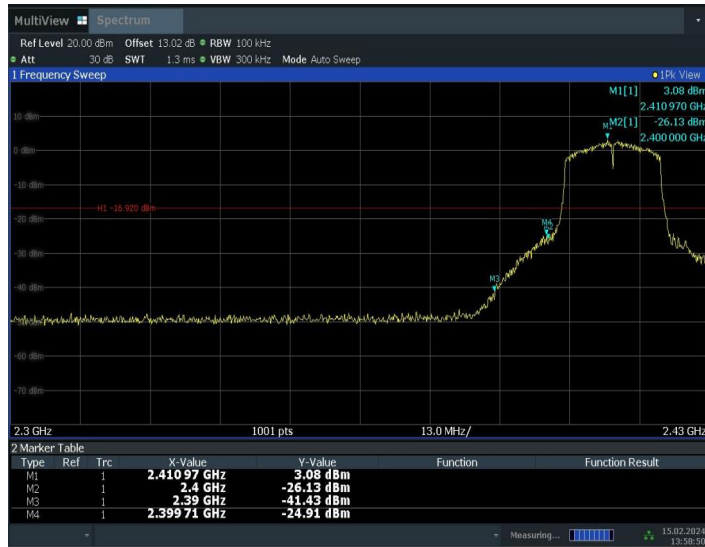

13:58:51 15.02.2024

Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)



14:02:58 15.02.2024

Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)



14:05:11 15.02.2024

Fig.A.5.7 Band Edges (802.11n-HT40, Ch 3)



14:09:15 15.02.2024

Fig.A.5.8 Band Edges (802.11n-HT40, Ch 9)

Conclusion: Pass

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission – Conducted

Method of Measurement: See ANSI C63.10-2013-clause 11.11

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth


EUT ID: UT33a

Measurement Results:

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	12.16	12.16	---	PASS
		30~1000	12.16	-56.68	≤-7.84	PASS
		1000~26500	12.16	-42.93	≤-7.84	PASS
	2437	Reference	12.17	12.17	---	PASS
		30~1000	12.17	-57.03	≤-7.83	PASS
		1000~26500	12.17	-39.35	≤-7.83	PASS
	2462	Reference	11.97	11.97	---	PASS
		30~1000	11.97	-56.69	≤-8.03	PASS
		1000~26500	11.97	-39.71	≤-8.03	PASS
11G	2412	Reference	4.84	4.84	---	PASS
		30~1000	4.84	-56.73	≤-15.16	PASS
		1000~26500	4.84	-44.16	≤-15.16	PASS
	2437	Reference	4.66	4.66	---	PASS
		30~1000	4.66	-56.41	≤-15.34	PASS
		1000~26500	4.66	-42.83	≤-15.34	PASS
	2462	Reference	3.43	3.43	---	PASS
		30~1000	3.43	-56.7	≤-16.57	PASS
		1000~26500	3.43	-43.58	≤-16.57	PASS
11N20SISO	2412	Reference	3.41	3.41	---	PASS
		30~1000	3.41	-55.77	≤-16.59	PASS
		1000~26500	3.41	-44.03	≤-16.59	PASS
	2437	Reference	2.91	2.91	---	PASS
		30~1000	2.91	-56.94	≤-17.09	PASS
		1000~26500	2.91	-44.14	≤-17.09	PASS
	2462	Reference	2.22	2.22	---	PASS
		30~1000	2.22	-57.01	≤-17.78	PASS
		1000~26500	2.22	-43.81	≤-17.78	PASS
11N40SISO	2422	Reference	-0.07	-0.07	---	PASS
		30~1000	-0.07	-56.92	≤-20.07	PASS
		1000~26500	-0.07	-44.27	≤-20.07	PASS
	2437	Reference	0.27	0.27	---	PASS
		30~1000	0.27	-56.99	≤-19.73	PASS
		1000~26500	0.27	-43.95	≤-19.73	PASS
	2452	Reference	-0.94	-0.94	---	PASS
		30~1000	-0.94	-55.82	≤-20.94	PASS
		1000~26500	-0.94	-43.75	≤-20.94	PASS


Test graphs as below:

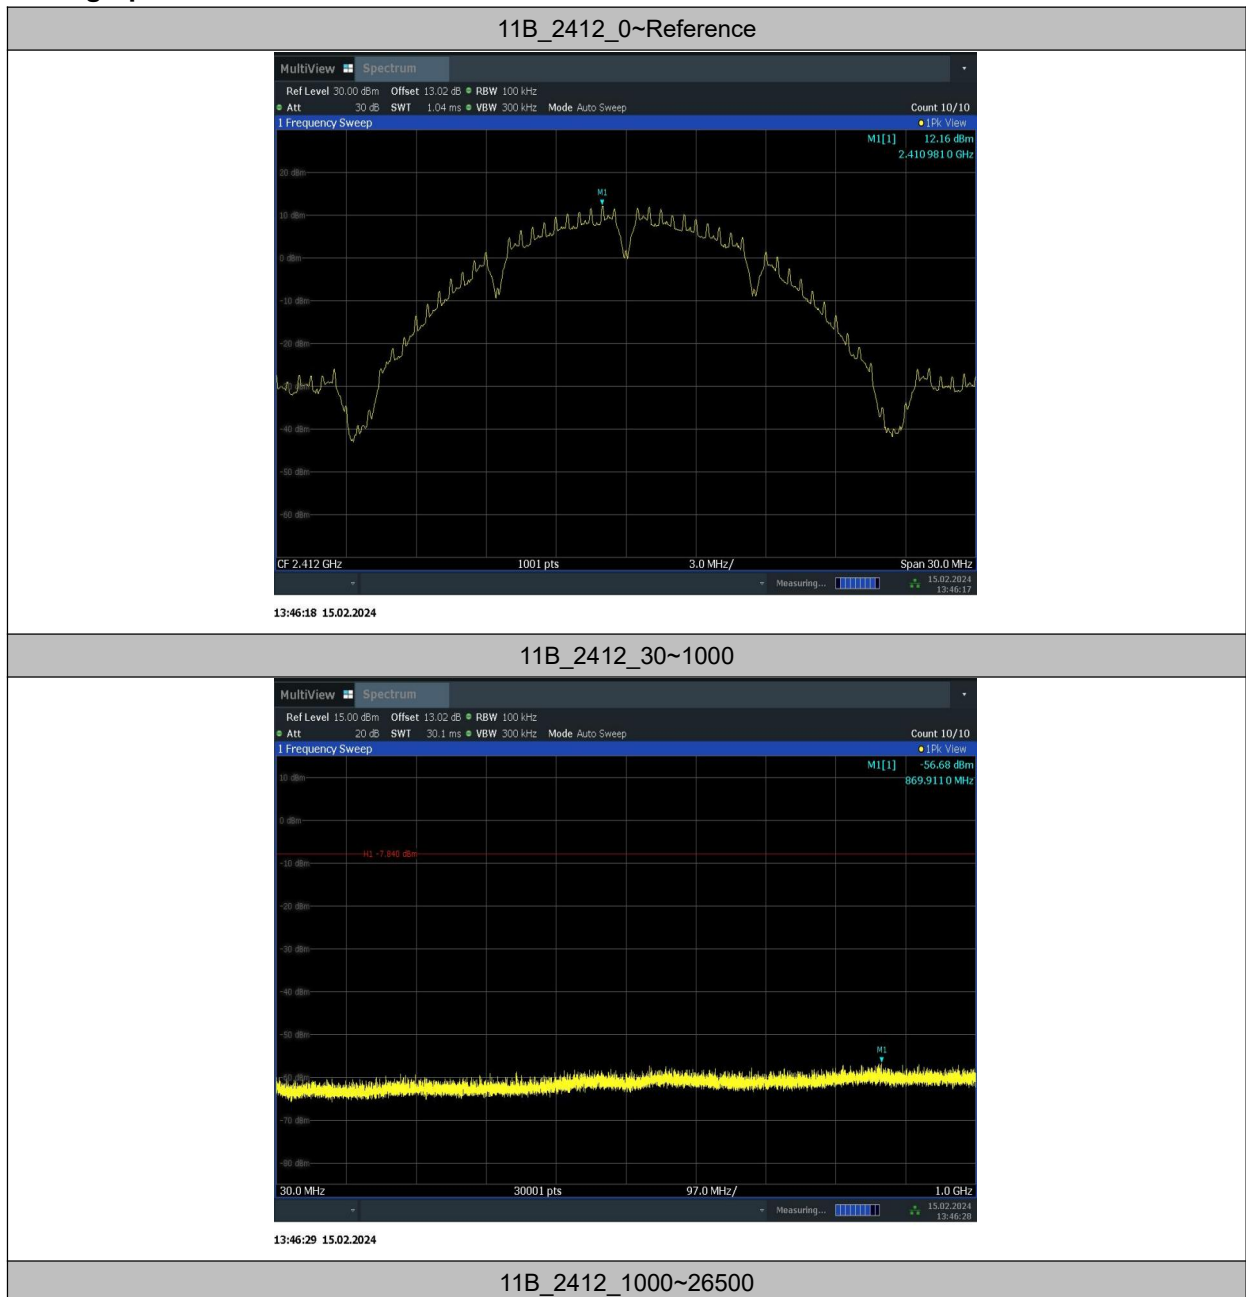

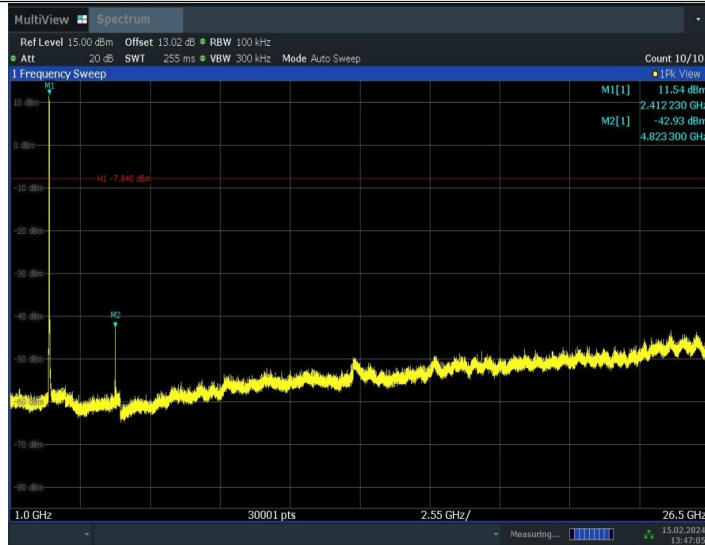


13:47:05 15.02.2024

11B_2437_0~Reference

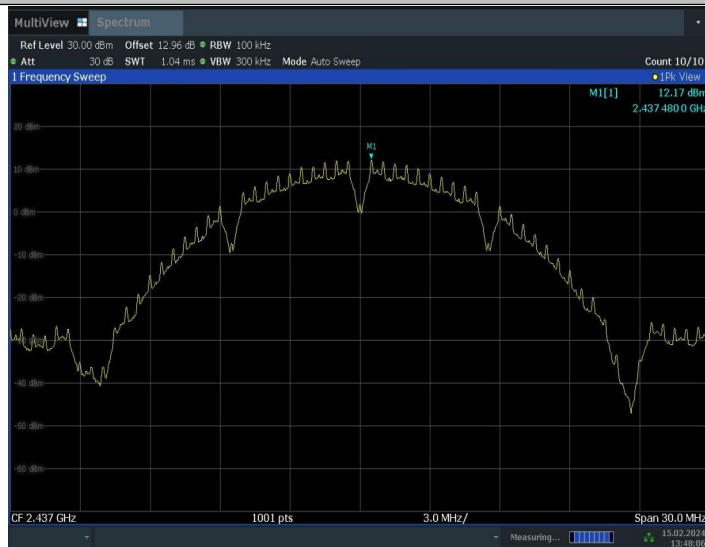


13:48:06 15.02.2024

11B_2437_30~1000

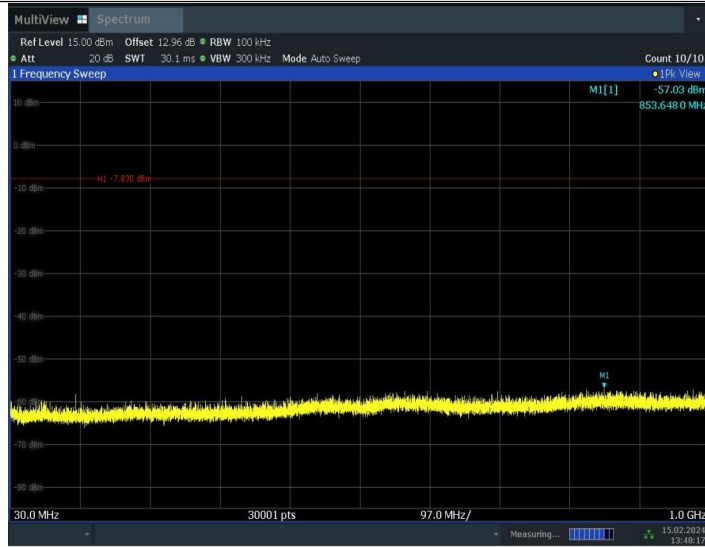


13:48:17 15.02.2024

11B_2437_1000~26500

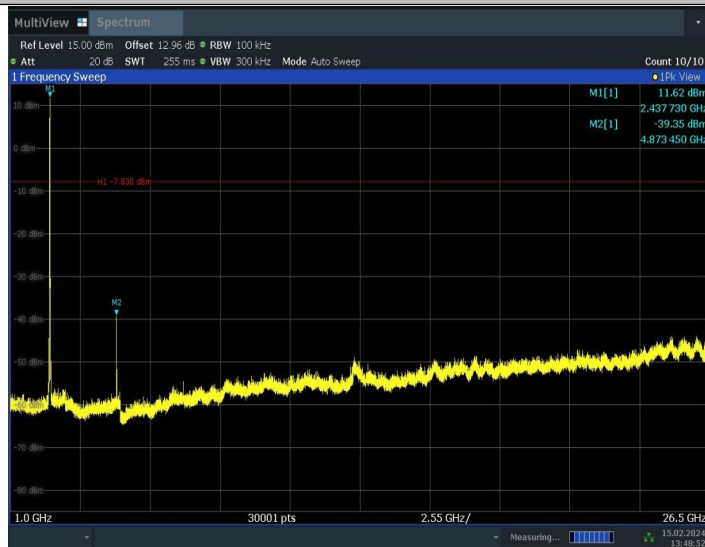


13:48:53 15.02.2024


11B_2462_0~Reference

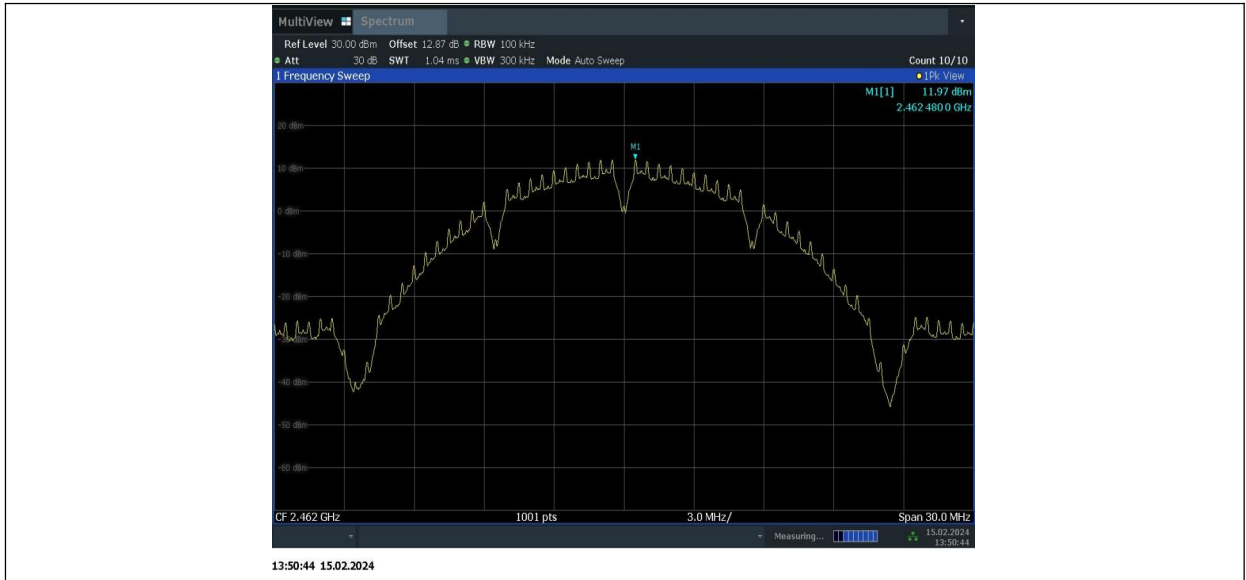


11B_2462_30~1000

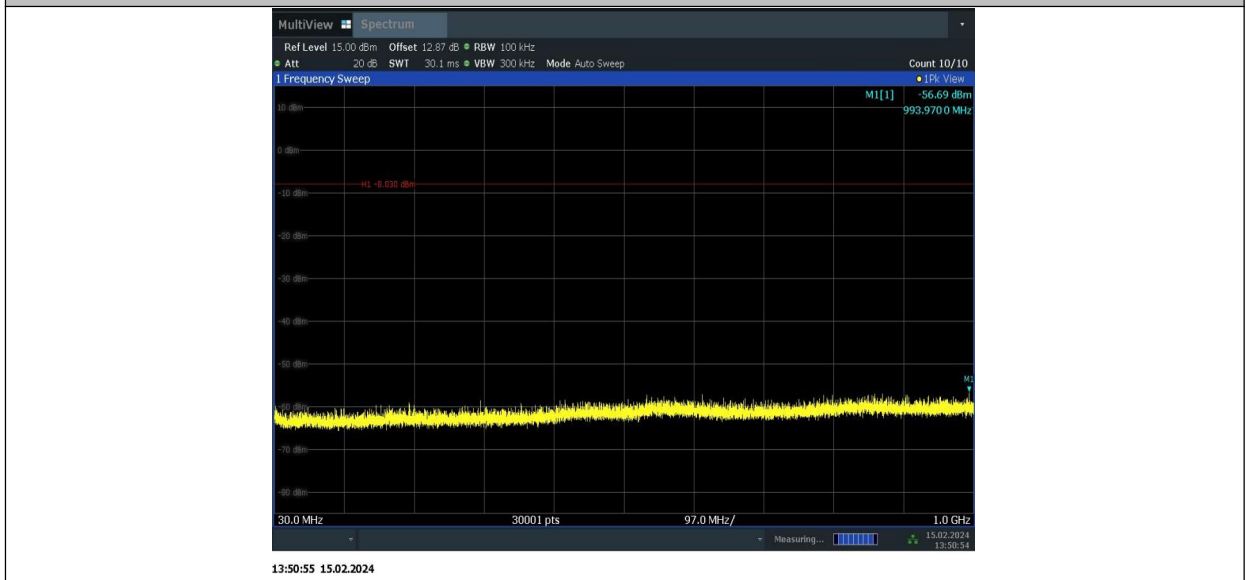


11B_2462_1000~26500

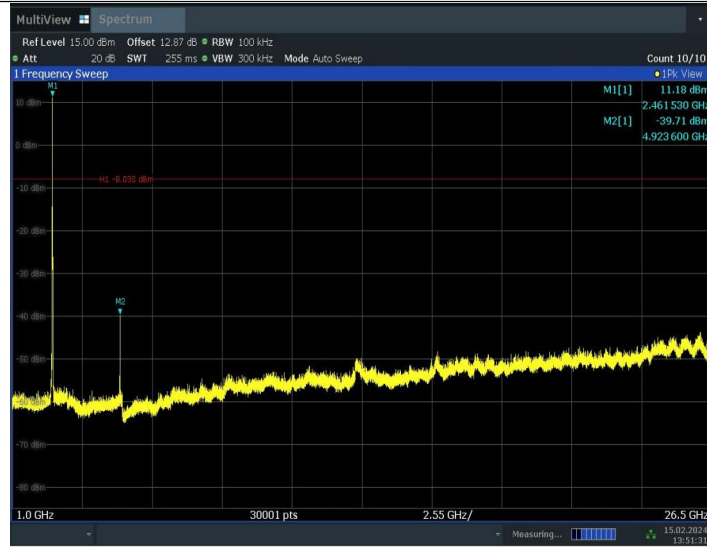

11G_2412_0~Reference

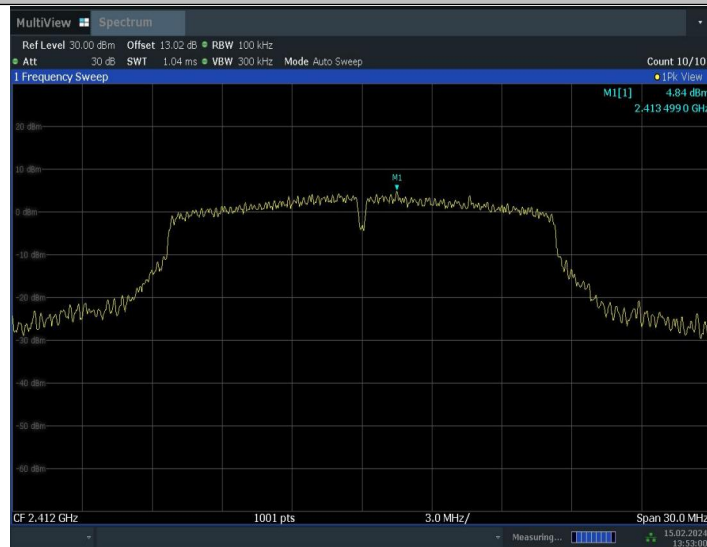


11G_2412_30~1000

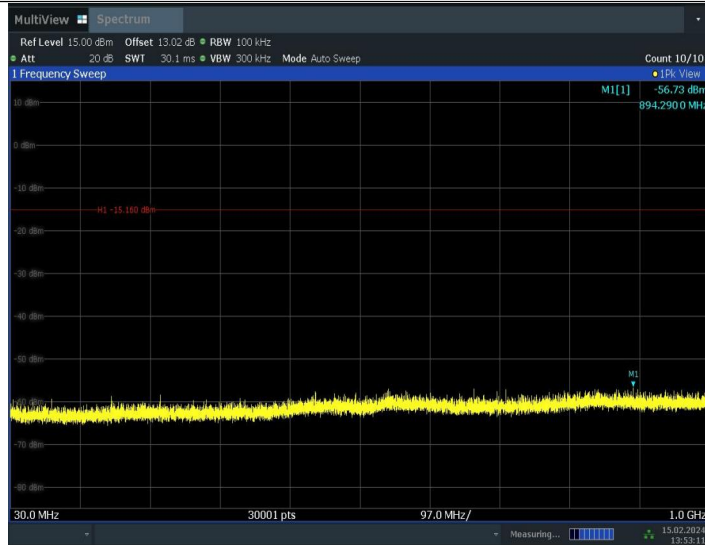


13:53:11 15.02.2024

11G_2412_1000~26500

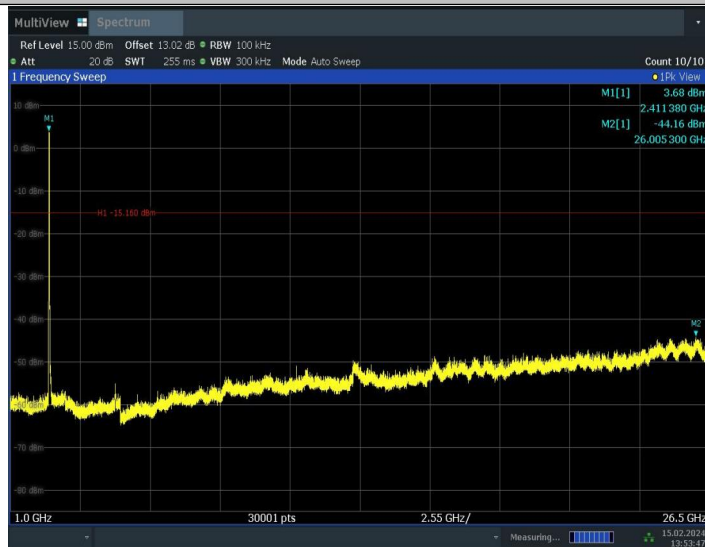


13:53:47 15.02.2024

11G_2437_0~Reference

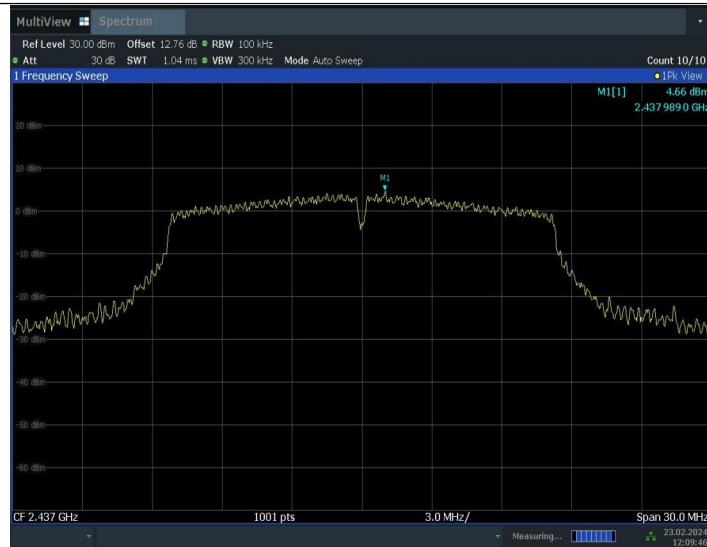

12:09:47 23.02.2024

11G_2437_30~1000

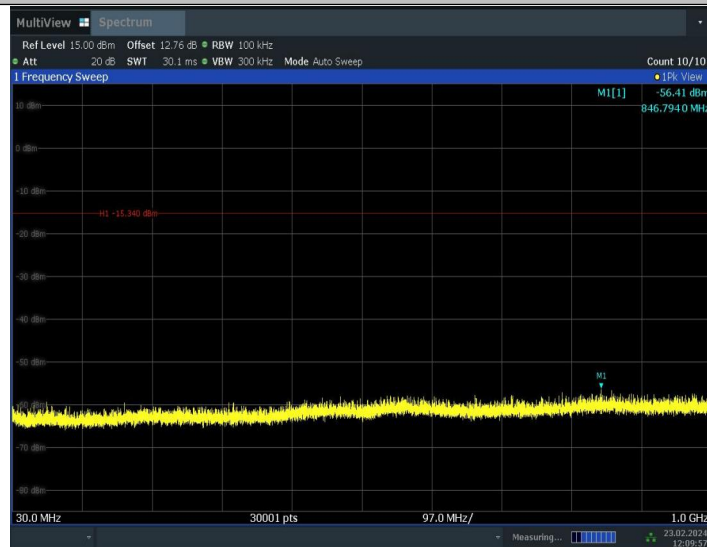


12:09:57 23.02.2024

11G_2437_1000~26500




12:10:33 23.02.2024

11G_2462_0~Reference

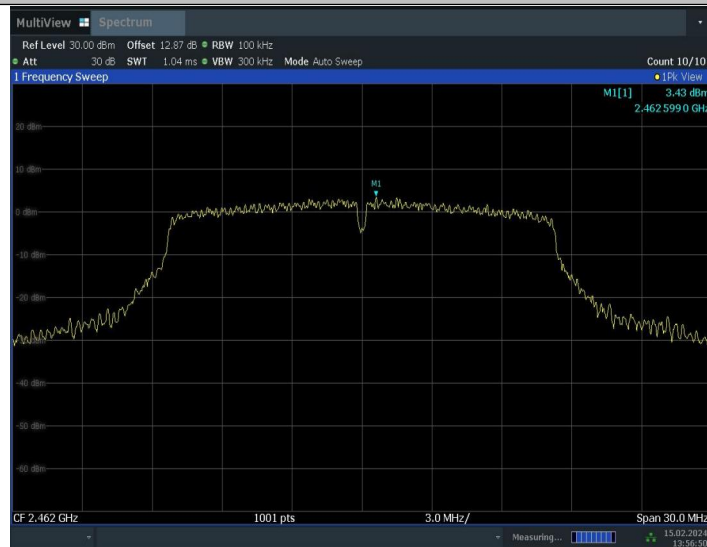


13:56:51 15.02.2024

11G_2462_30~1000

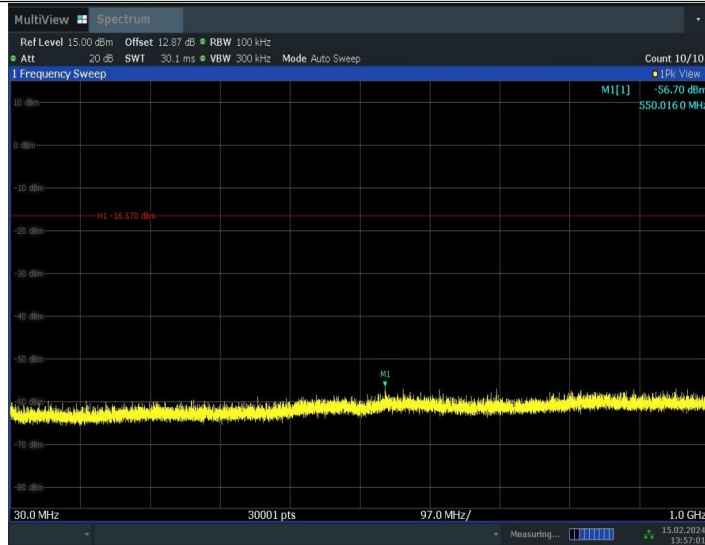


13:57:02 15.02.2024

11G_2462_1000~26500

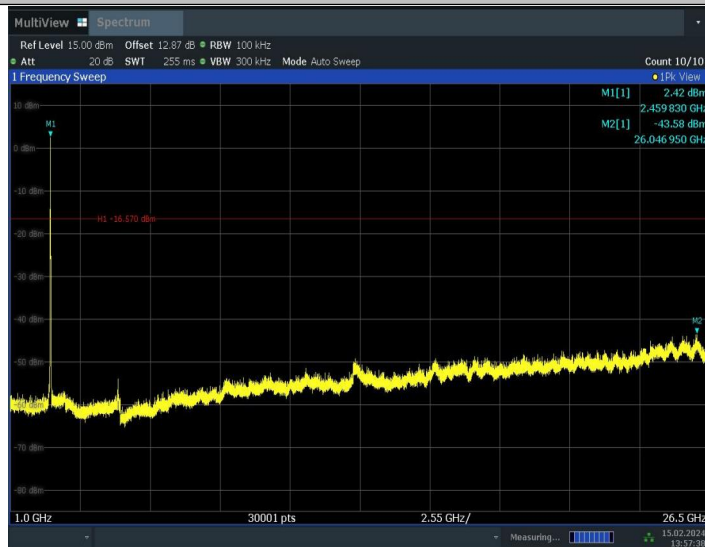


13:57:38 15.02.2024


11N20SISO_2412_0~Reference

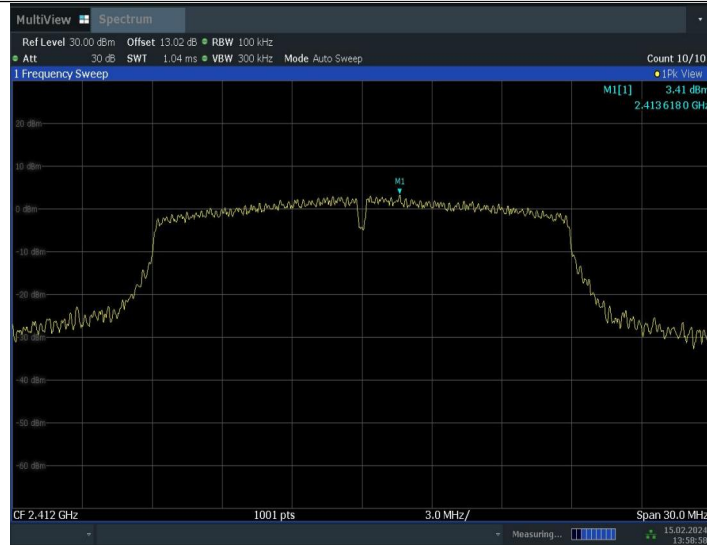


11N20SISO_2412_30~1000

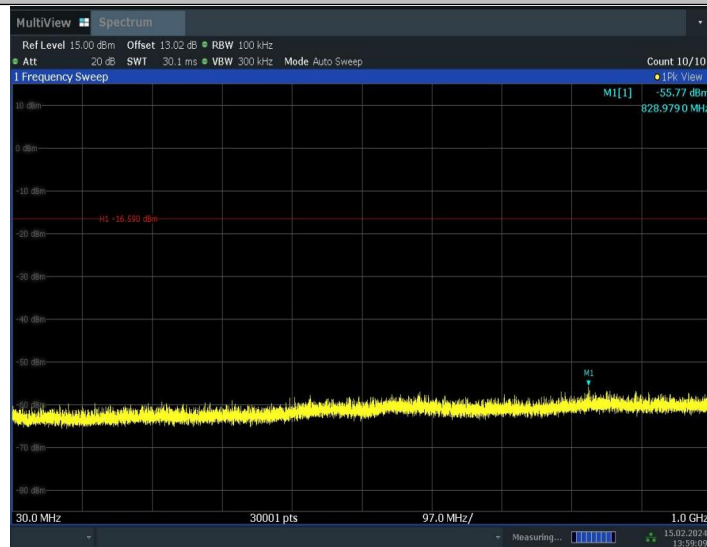


11N20SISO_2412_1000~26500

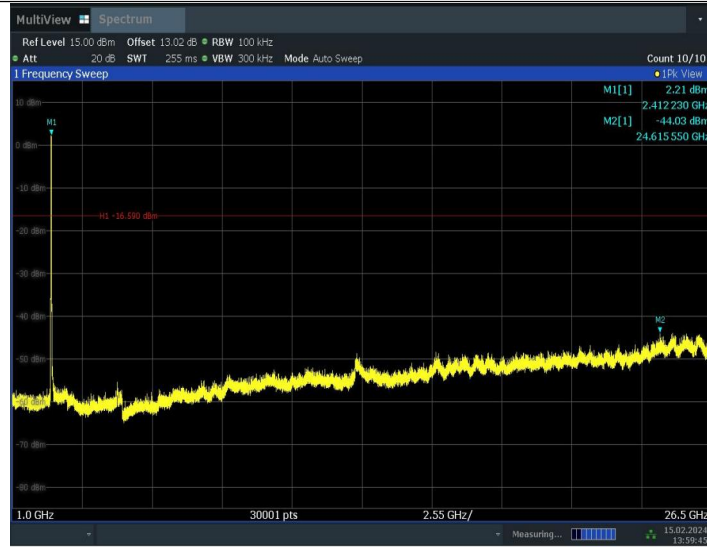

11N20SISO_2437_0~Reference

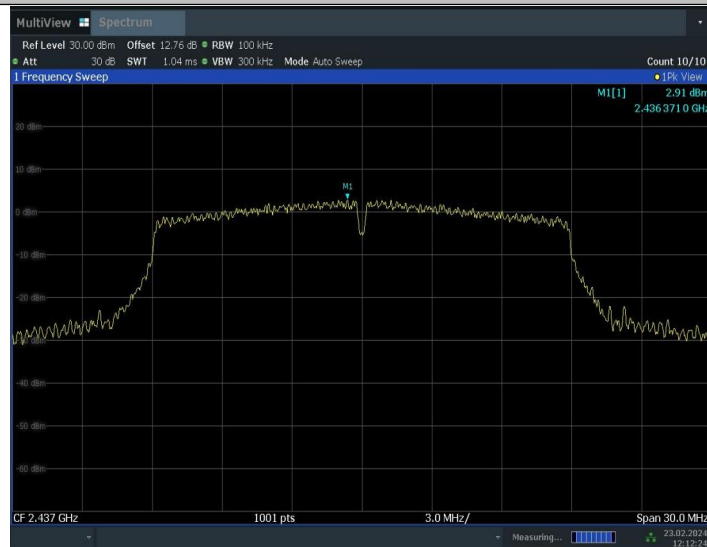

11N20SISO_2437_30~1000

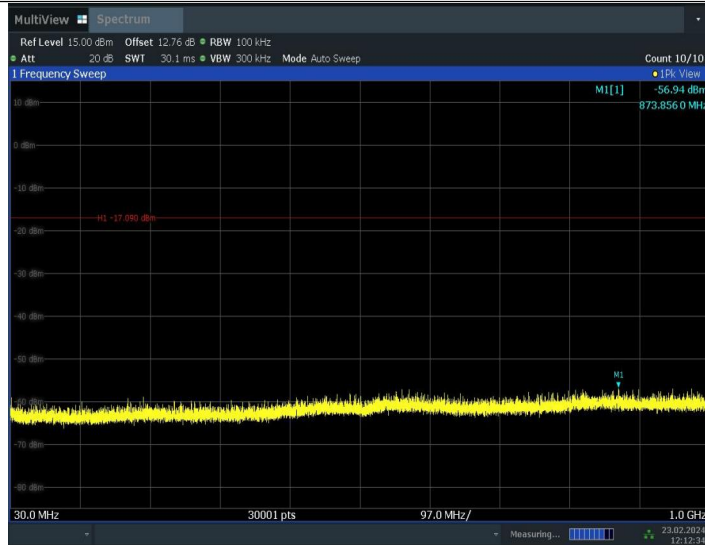


12:12:35 23.02.2024

11N20SISO_2437_1000~26500



12:13:11 23.02.2024


11N20SISO_2462_0~Reference

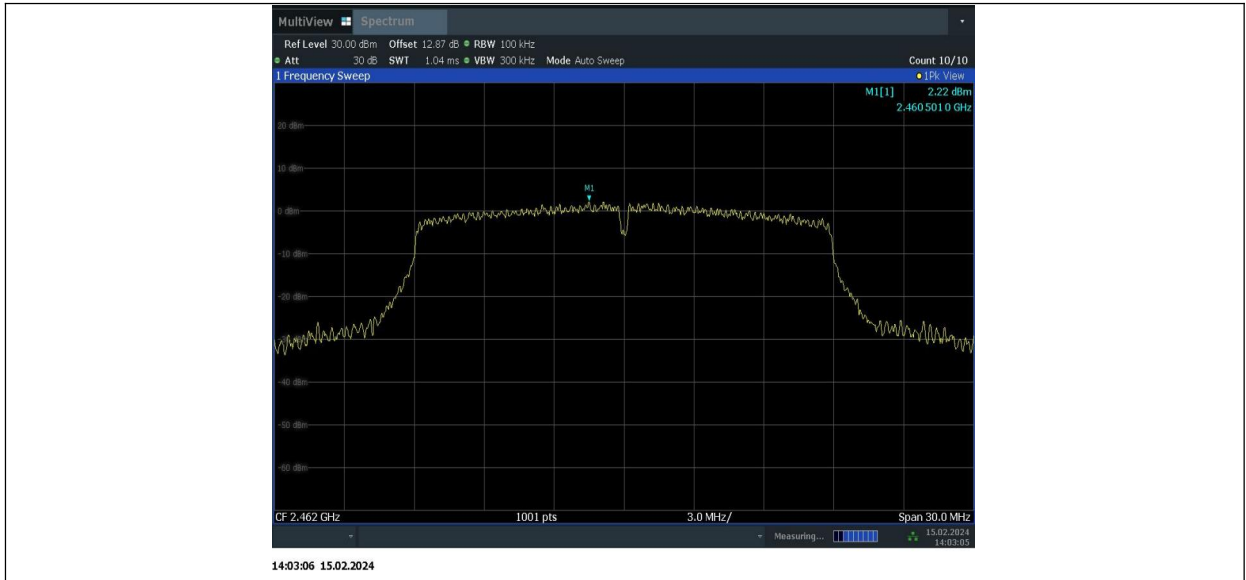


11N20SISO_2462_30~1000




11N20SISO_2462_1000~26500

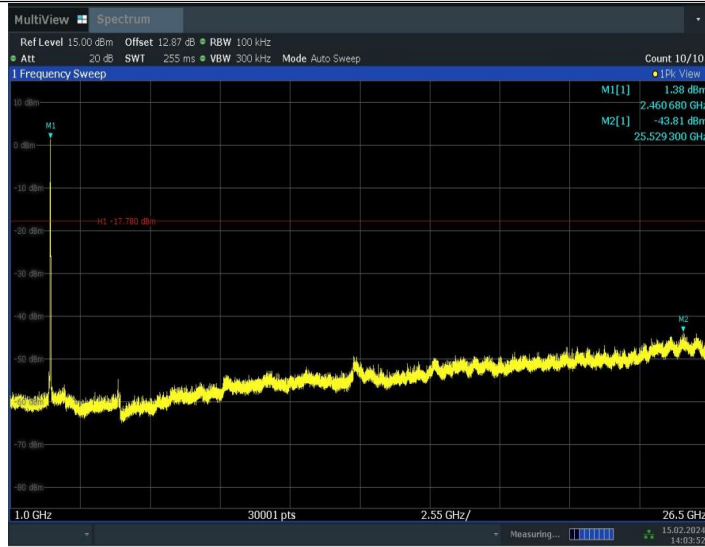

11N40SISO_2422_0~Reference

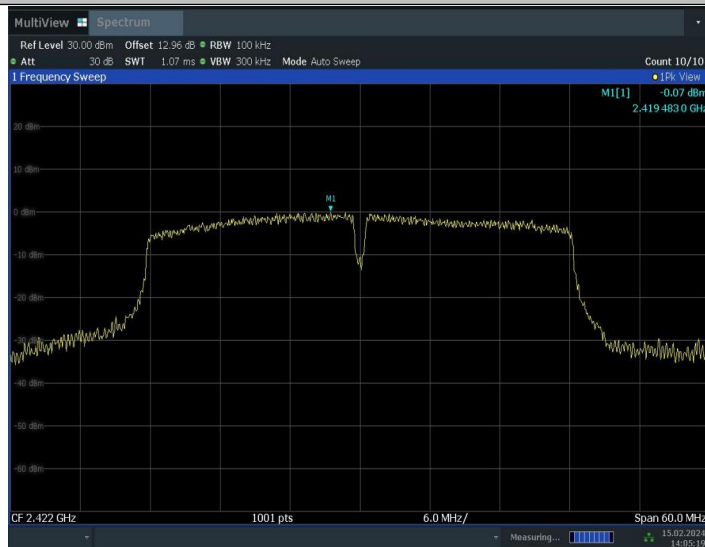


11N40SISO_2422_30~1000

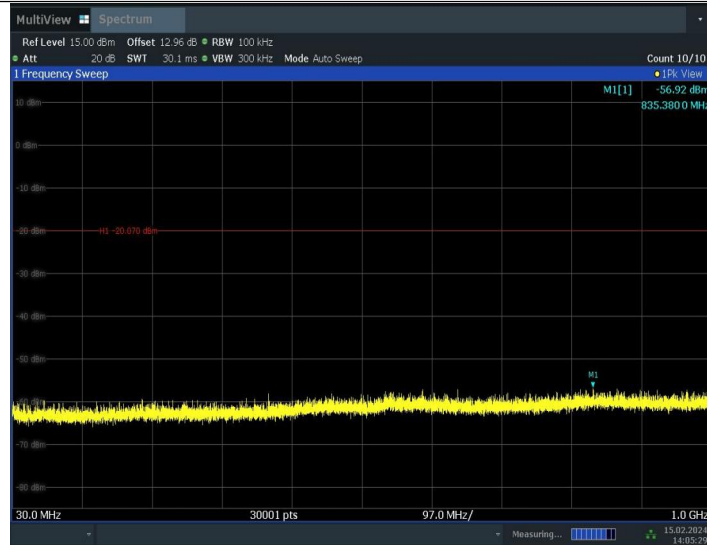


14:05:30 15.02.2024

11N40SISO_2422_1000~26500

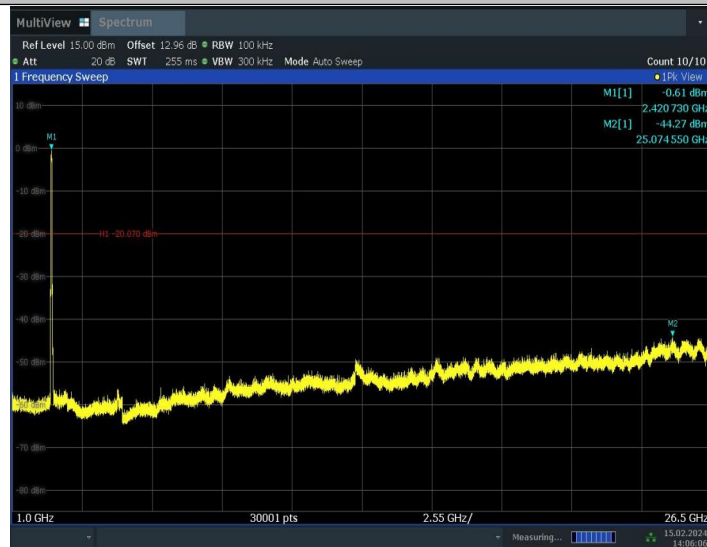


14:06:06 15.02.2024

11N40SISO_2437_0~Reference

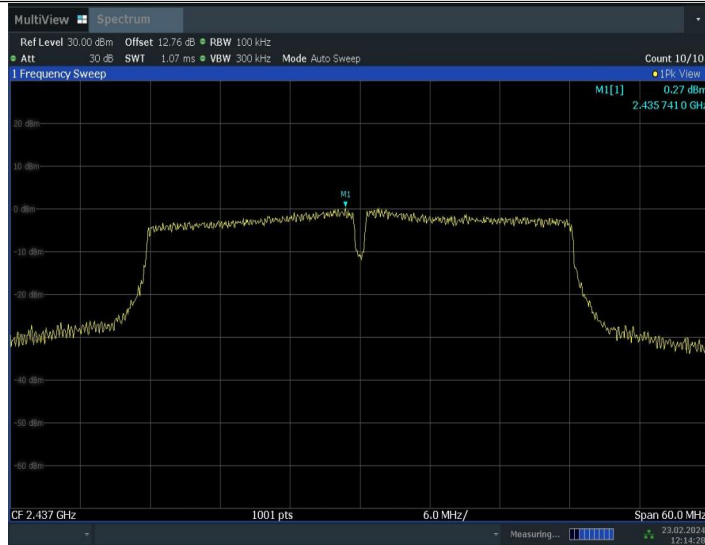


12:14:28 23.02.2024

11N40SISO_2437_30~1000

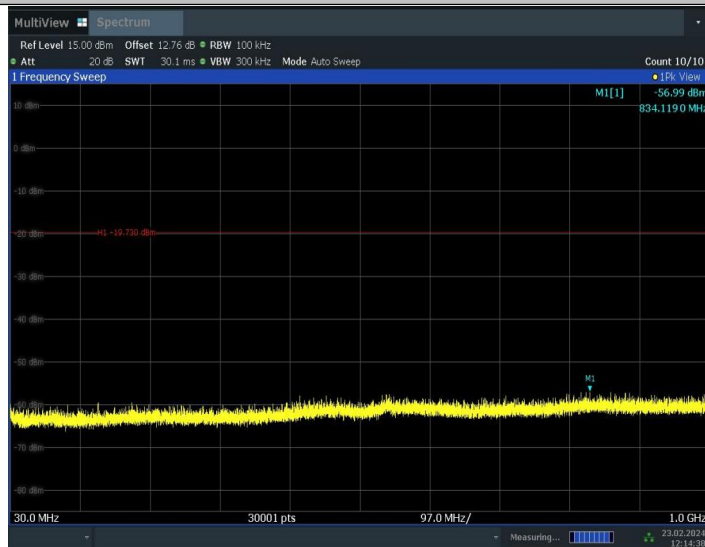


12:14:39 23.02.2024

11N40SISO_2437_1000~26500

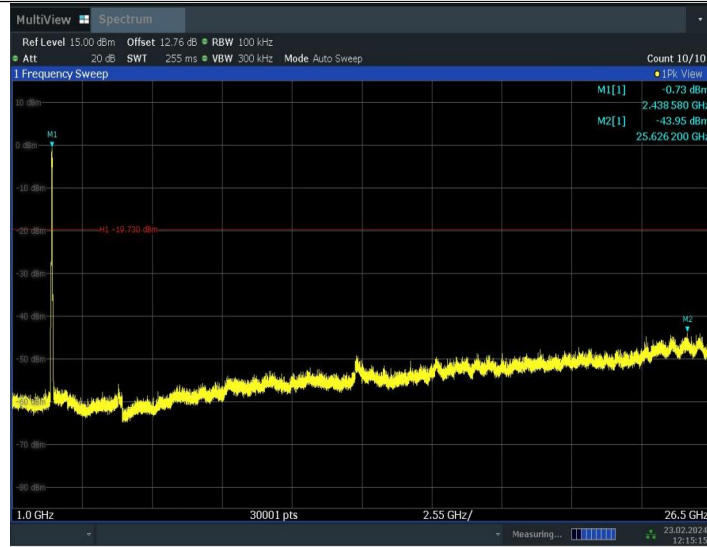


12:15:15 23.02.2024

11N40SISO_2452_0~Reference

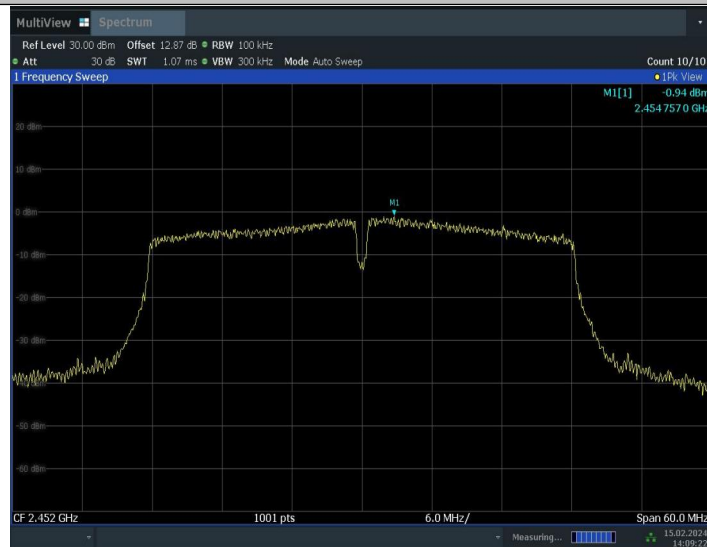

14:09:23 15.02.2024

11N40SISO_2452_30~1000

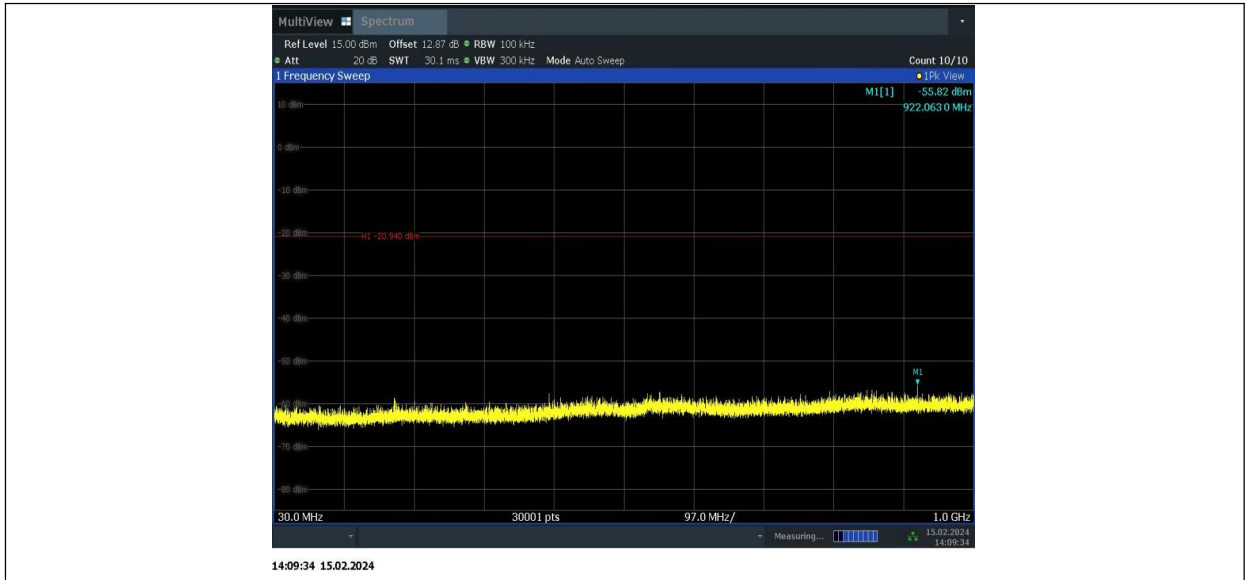

11N40SISO_2452_1000~26500



Conclusion: Pass

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: UT81a

Measurement Results:

802.11b mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.6.2.1	P
	11	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Test Results	Conclusion
802.11g	1	Fig.A.6.2.3	P
	11	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.6.2.5	P
	11	Fig.A.6.2.6	P

802.11n-HT40 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.6.2.7	P
	9	Fig.A.6.2.8	P

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.670	57.49	5.66	27.67	24.15	74.00	16.51	V
2387.140	57.29	5.67	27.67	23.95	74.00	16.71	H
4823.906	54.90	-33.75	32.95	55.71	74.00	19.10	H
7234.219	46.79	-32.24	37.50	41.53	74.00	27.21	V
9647.812	46.53	-30.50	38.00	39.03	74.00	27.47	V
12060.000	46.00	-30.17	38.64	37.53	74.00	28.00	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2398.800	59.28	5.68	27.70	25.91	74.00	14.72	H
2473.200	59.02	5.67	27.69	25.66	74.00	14.98	H
4873.500	52.89	-33.55	33.00	53.44	74.00	21.11	H
7311.000	44.49	-32.15	37.60	39.05	74.00	29.51	V
9748.000	46.13	-31.02	38.10	39.05	74.00	27.87	V
12185.000	46.04	-30.66	38.69	38.02	74.00	27.96	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2486.825	60.16	5.72	27.75	26.69	74.00	13.84	V
2487.475	60.69	5.73	27.75	27.21	74.00	13.31	H
4923.750	54.20	-33.17	32.95	54.42	74.00	19.80	H
7387.500	47.01	-32.37	37.52	41.86	74.00	26.99	V
9847.969	44.05	-31.39	38.20	37.24	74.00	29.95	H
12309.844	44.98	-30.54	38.60	36.92	74.00	29.02	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.240	68.14	5.67	27.68	34.79	74.00	5.86	V
2389.940	70.08	5.67	27.68	36.72	74.00	3.92	V
4822.500	49.36	-33.74	32.95	50.16	74.00	24.64	V
7236.000	44.69	-32.22	37.50	39.41	74.00	29.31	H
9647.812	45.95	-30.50	38.00	38.45	74.00	28.05	V
12060.000	46.10	-30.17	38.64	37.63	74.00	27.90	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2391.200	60.31	5.68	27.68	26.95	74.00	13.69	H
2488.400	59.54	5.73	27.75	26.05	74.00	14.46	V
4882.000	52.82	-33.82	33.00	53.65	74.00	21.18	V
7311.000	44.85	-32.15	37.60	39.40	74.00	29.15	V
9748.000	45.32	-31.02	38.10	38.24	74.00	28.68	H
12185.000	46.05	-30.66	38.69	38.02	74.00	27.95	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.725	70.78	5.71	27.74	37.33	74.00	3.22	V
2484.000	70.15	5.71	27.74	36.71	74.00	3.85	H
4920.500	50.67	-33.04	32.96	50.75	74.00	23.33	V
7386.000	44.34	-32.40	37.53	39.22	74.00	29.66	V
9848.000	44.53	-31.39	38.20	37.73	74.00	29.47	H
12310.000	45.61	-30.54	38.60	37.55	74.00	28.39	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.520	68.98	5.67	27.68	35.63	74.00	5.02	H
2389.940	70.12	5.67	27.68	36.76	74.00	3.88	H
4820.500	47.51	-33.72	32.94	48.29	74.00	26.49	V
7236.000	45.13	-32.22	37.50	39.85	74.00	28.87	V
9648.000	45.92	-30.50	38.00	38.41	74.00	28.08	H
12060.000	46.00	-30.17	38.64	37.53	74.00	28.00	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2393.600	63.12	5.69	27.69	29.75	74.00	10.88	V
2482.400	61.48	5.70	27.73	28.05	74.00	12.52	V
4880.000	51.37	-33.76	33.00	52.13	74.00	22.63	V
7311.000	45.16	-32.15	37.60	39.72	74.00	28.84	V
9748.000	44.84	-31.02	38.10	37.75	74.00	29.16	V
12185.000	45.73	-30.66	38.69	37.71	74.00	28.27	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.575	71.60	5.71	27.73	38.16	74.00	2.40	V
2483.925	71.06	5.71	27.74	37.62	74.00	2.94	H
4923.000	49.28	-33.14	32.95	49.46	74.00	24.72	H
7386.000	44.85	-32.40	37.53	39.72	74.00	29.15	V
9848.000	44.19	-31.39	38.20	37.38	74.00	29.81	V
12310.000	44.34	-30.54	38.60	36.28	74.00	29.66	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2388.470	68.71	5.67	27.68	35.37	74.00	5.29	V
2389.940	68.15	5.67	27.68	34.79	74.00	5.85	V
4852.500	46.37	-33.85	33.00	47.22	74.00	27.63	H
7266.000	44.96	-32.01	37.53	39.44	74.00	29.04	H
9688.000	45.59	-30.72	38.08	38.24	74.00	28.41	H
121110.000	44.92	0.00	0.00	44.92	74.00	29.08	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2383.600	57.35	5.65	27.67	24.03	74.00	16.65	V
2492.400	59.41	5.74	27.77	25.90	74.00	14.59	H
4876.000	49.02	-33.63	33.00	49.65	74.00	24.98	V
7311.000	45.18	-32.15	37.60	39.73	74.00	28.82	H
9748.000	45.19	-31.02	38.10	38.10	74.00	28.81	V
12185.000	46.43	-30.66	38.69	38.40	74.00	27.57	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.075	70.36	5.72	27.75	36.89	74.00	3.64	V
2488.525	68.72	5.73	27.75	35.23	74.00	5.28	H
4903.500	47.94	-33.69	32.99	48.64	74.00	26.06	H
7356.000	44.30	-32.17	37.59	38.88	74.00	29.70	H
9808.000	44.49	-31.43	38.20	37.72	74.00	29.51	V
12260.000	45.59	-30.51	38.64	37.46	74.00	28.41	H

Average
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.800	46.15	5.66	27.67	12.82	54.00	7.85	V
2387.000	46.58	5.66	27.67	13.24	54.00	7.42	V
4824.000	53.16	-33.75	32.95	53.96	54.00	0.84	H
7235.000	37.31	-32.23	37.50	32.05	54.00	16.69	V
9648.000	34.44	-30.50	38.00	26.94	54.00	19.56	V
12060.000	34.21	-30.17	38.64	25.73	54.00	19.79	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2397.400	49.11	5.68	27.69	15.74	54.00	4.89	V
2473.200	49.97	5.67	27.69	16.60	54.00	4.03	V
4874.000	50.91	-33.57	33.00	51.47	54.00	3.09	V
7311.000	33.76	-32.15	37.60	28.31	54.00	20.24	H
9748.000	33.79	-31.02	38.10	26.71	54.00	20.21	H
12185.000	33.88	-30.66	38.69	25.86	54.00	20.12	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2486.800	52.43	5.72	27.75	18.96	54.00	1.57	V
2487.200	52.53	5.73	27.75	19.06	54.00	1.47	V
4924.000	52.83	-33.18	32.95	53.05	54.00	1.17	V
7385.000	35.61	-32.42	37.53	30.50	54.00	18.39	V
9848.000	32.50	-31.39	38.20	25.69	54.00	21.50	V
12310.000	33.75	-30.54	38.60	25.69	54.00	20.25	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.800	47.61	5.67	27.68	14.26	54.00	6.39	V
2390.000	48.09	5.67	27.68	14.74	54.00	5.91	V
4825.000	38.17	-33.76	32.95	38.98	54.00	15.83	H
7236.000	34.03	-32.22	37.50	28.75	54.00	19.97	H
9648.000	34.29	-30.50	38.00	26.79	54.00	19.71	H
12060.000	33.98	-30.17	38.64	25.50	54.00	20.02	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2395.400	46.23	5.68	27.69	12.86	54.00	7.77	V
2476.800	47.10	5.68	27.71	13.71	54.00	6.90	V
4876.500	42.03	-33.65	33.00	42.68	54.00	11.97	H
7311.000	33.66	-32.15	37.60	28.21	54.00	20.34	V
9748.000	33.58	-31.02	38.10	26.50	54.00	20.42	V
12185.000	33.79	-30.66	38.69	25.77	54.00	20.21	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.600	50.18	5.71	27.73	16.74	54.00	3.82	V
2483.800	49.89	5.71	27.74	16.45	54.00	4.11	V
4919.000	39.36	-33.05	32.96	39.45	54.00	14.64	H
7386.000	33.03	-32.40	37.53	27.90	54.00	20.97	V
9848.000	32.49	-31.39	38.20	25.69	54.00	21.51	H
12310.000	33.92	-30.54	38.60	25.86	54.00	20.08	V

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.800	46.86	5.67	27.68	13.51	54.00	7.14	V
2390.000	47.38	5.67	27.68	14.02	54.00	6.62	V
4825.000	37.08	-33.76	32.95	37.90	54.00	16.92	V
7236.000	33.18	-32.22	37.50	27.90	54.00	20.82	V
9648.000	34.25	-30.50	38.00	26.75	54.00	19.75	V
12060.000	33.92	-30.17	38.64	25.45	54.00	20.08	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2398.400	45.22	5.68	27.70	11.85	54.00	8.78	V
2475.200	46.01	5.68	27.70	12.63	54.00	7.99	V
4876.500	41.31	-33.65	33.00	41.95	54.00	12.69	H
7311.000	33.45	-32.15	37.60	28.01	54.00	20.55	H
9748.000	33.61	-31.02	38.10	26.52	54.00	20.39	H
12185.000	33.66	-30.66	38.69	25.64	54.00	20.34	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.600	49.21	5.71	27.73	15.77	54.00	4.79	V
2483.800	49.12	5.71	27.74	15.67	54.00	4.88	V
4918.500	38.00	-33.07	32.96	38.10	54.00	16.00	V
7386.000	32.81	-32.40	37.53	27.68	54.00	21.19	V
9848.000	32.28	-31.39	38.20	25.48	54.00	21.72	H
12310.000	33.47	-30.54	38.60	25.41	54.00	20.53	V

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.600	50.43	5.67	27.68	17.08	54.00	3.57	V
2390.000	50.99	5.67	27.68	17.63	54.00	3.01	V
4857.500	34.06	-33.70	33.00	34.76	54.00	19.94	V
7266.000	33.31	-32.01	37.53	27.79	54.00	20.69	H
9688.000	34.15	-30.72	38.08	26.79	54.00	19.85	V
12110.000	33.03	-30.79	38.61	25.22	54.00	20.97	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2390.000	51.08	5.67	27.68	17.72	54.00	2.92	V
2483.800	52.34	5.71	27.74	18.90	54.00	1.66	V
4880.000	36.95	-33.76	33.00	37.71	54.00	17.05	V
7311.000	33.50	-32.15	37.60	28.06	54.00	20.50	H
9748.000	33.49	-31.02	38.10	26.40	54.00	20.51	V
12185.000	33.66	-30.66	38.69	25.63	54.00	20.34	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.800	50.09	5.71	27.74	16.65	54.00	3.91	V
2484.400	50.11	5.71	27.74	16.66	54.00	3.89	V
4904.000	35.81	-33.67	32.99	36.49	54.00	18.19	V
7356.000	32.89	-32.17	37.59	27.47	54.00	21.11	V
9808.000	32.91	-31.43	38.20	26.14	54.00	21.09	H
12260.000	34.12	-30.51	38.64	25.99	54.00	19.88	H

Test graphs as below:

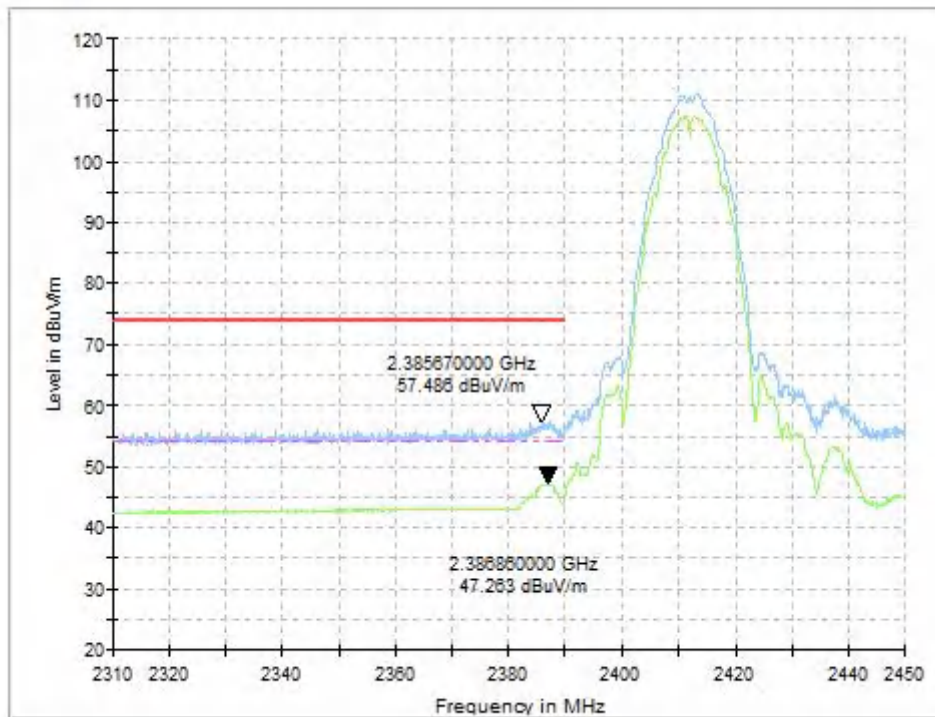


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

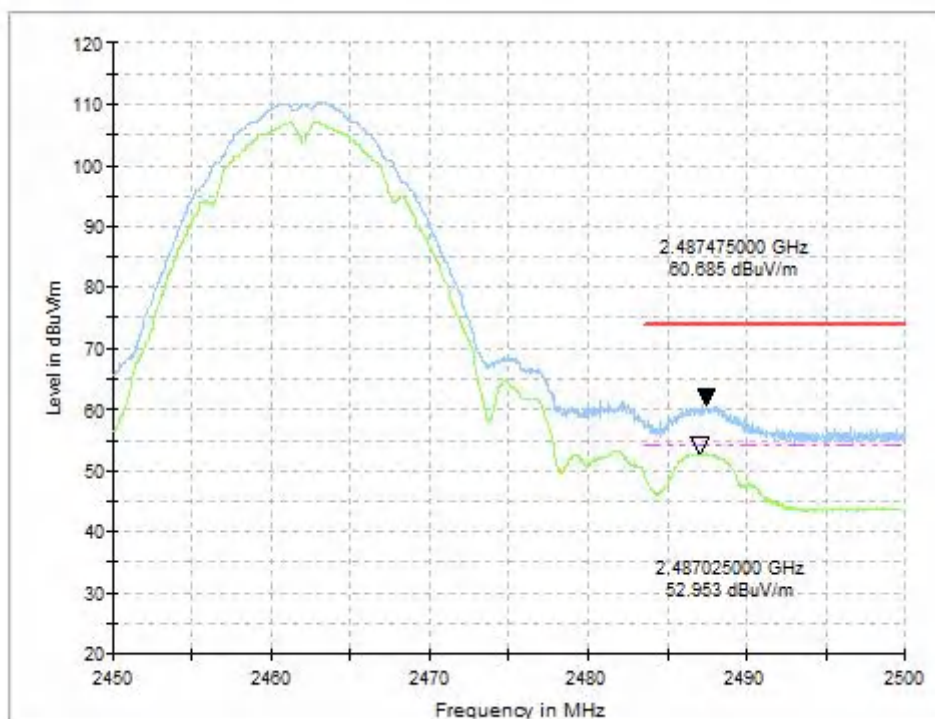


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

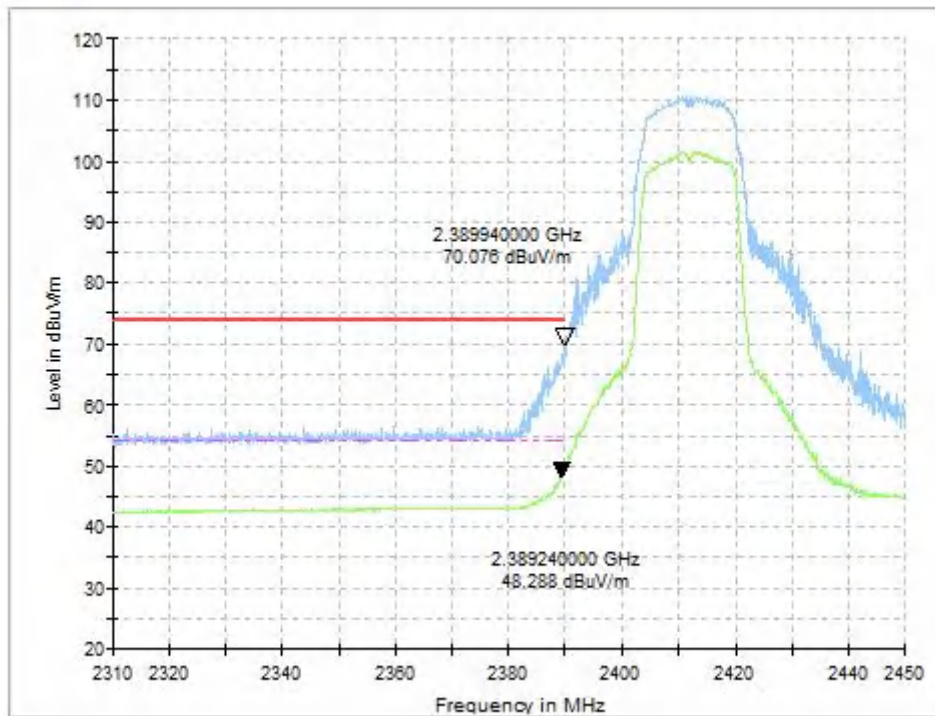


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

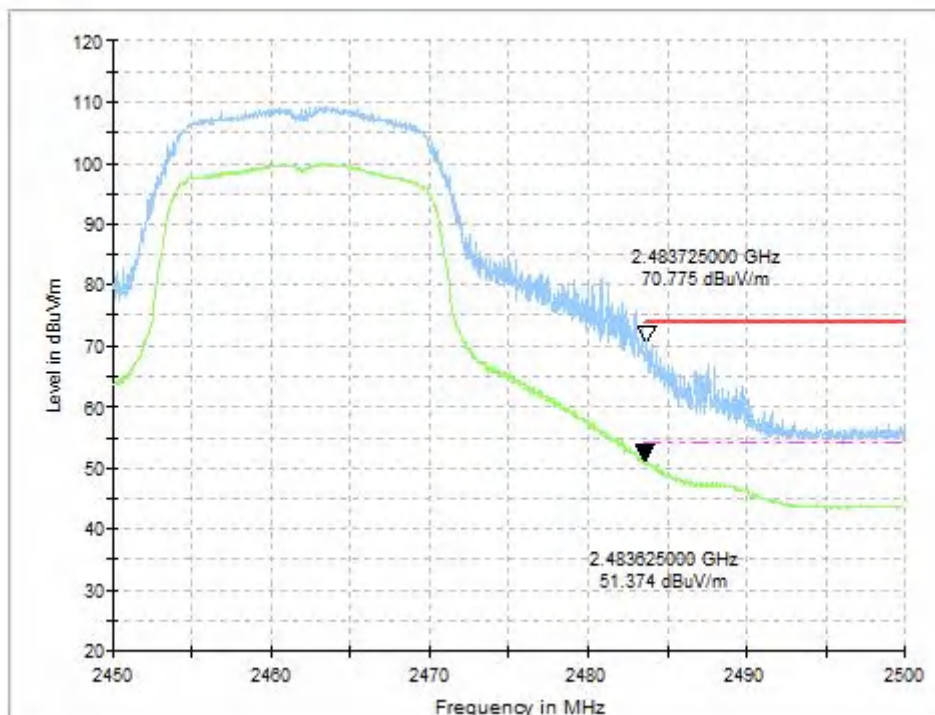


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

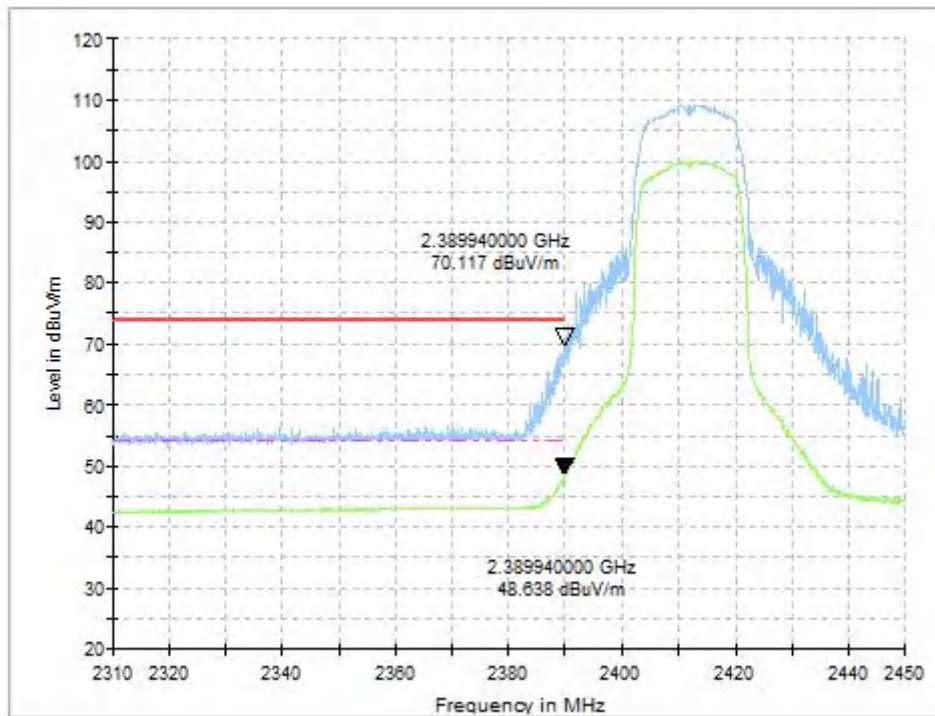


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

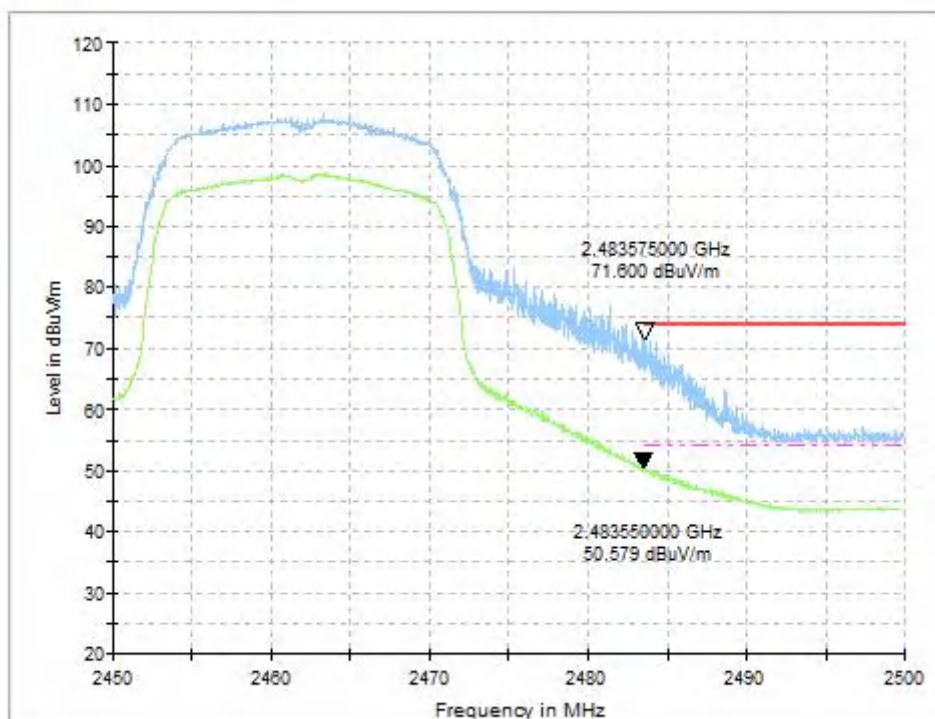


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

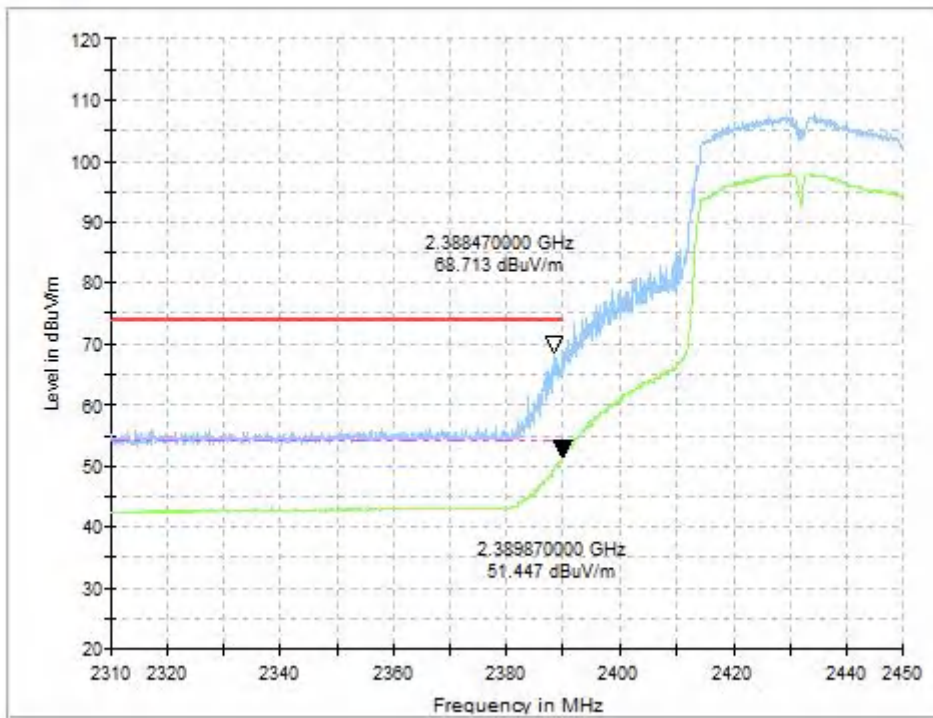


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.43GHz

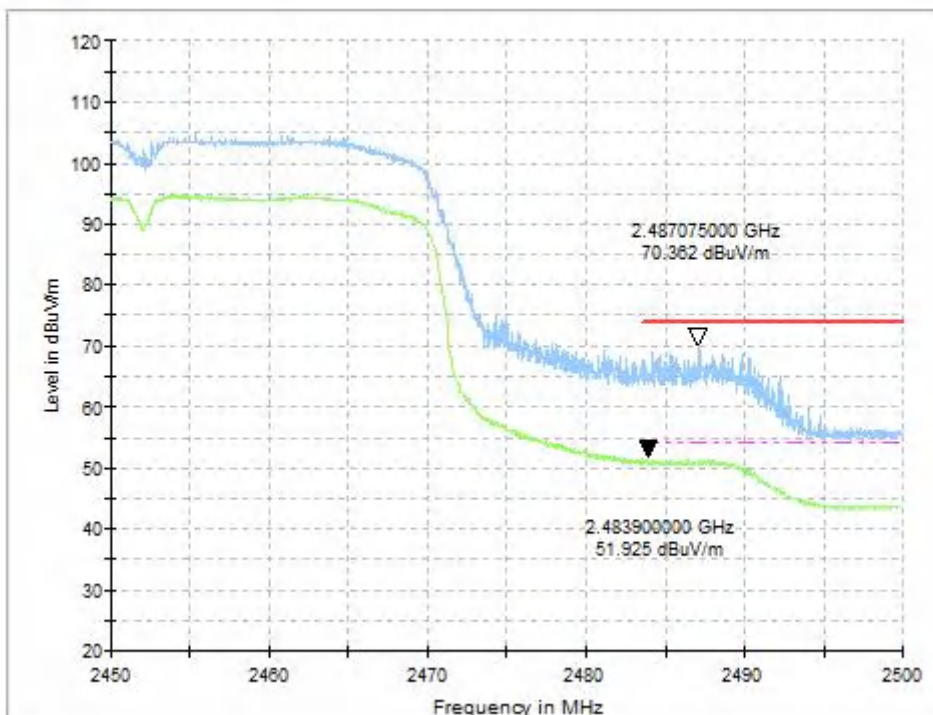


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.

The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

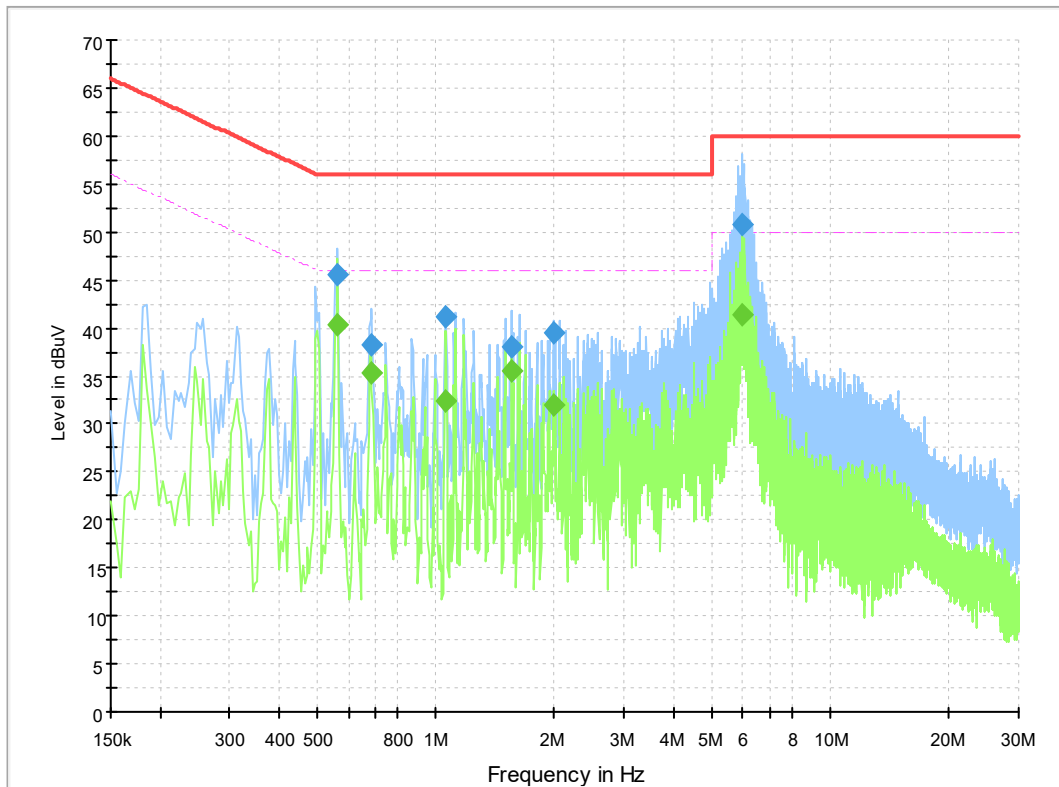


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.564000	45.6	2000.0	9.000	Off	L1	19.6	10.4	56.0
0.690000	38.3	2000.0	9.000	Off	L1	19.6	17.7	56.0
1.059000	41.1	2000.0	9.000	Off	L1	19.7	14.9	56.0
1.558500	38.1	2000.0	9.000	Off	N	19.7	17.9	56.0
1.995000	39.5	2000.0	9.000	Off	L1	19.7	16.5	56.0
5.977500	50.7	2000.0	9.000	Off	L1	19.8	9.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.564000	40.4	2000.0	9.000	Off	L1	19.6	5.6	46.0
0.685500	35.3	2000.0	9.000	Off	L1	19.6	10.7	46.0
1.063500	32.3	2000.0	9.000	Off	L1	19.7	13.7	46.0
1.558500	35.4	2000.0	9.000	Off	L1	19.7	10.6	46.0
1.995000	32.1	2000.0	9.000	Off	L1	19.7	13.9	46.0
5.977500	41.3	2000.0	9.000	Off	N	19.8	8.7	50.0

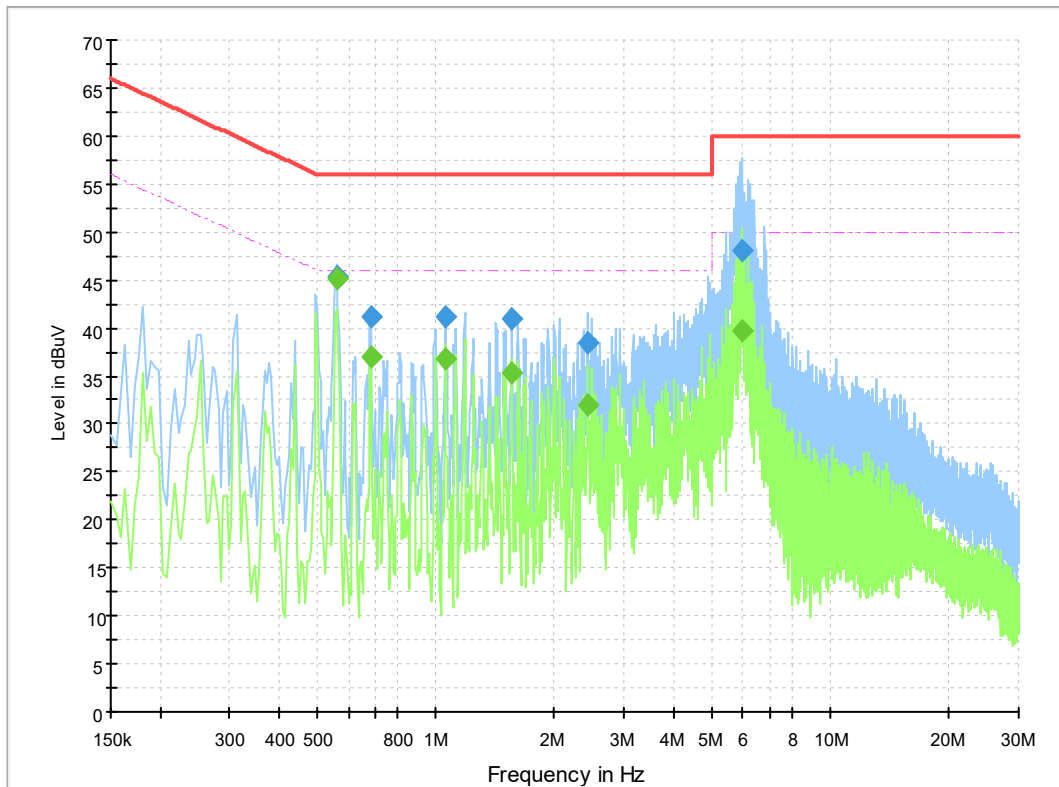


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.559500	45.3	2000.0	9.000	Off	N	19.6	10.7	56.0
0.685500	41.2	2000.0	9.000	Off	L1	19.6	14.8	56.0
1.059000	41.2	2000.0	9.000	Off	L1	19.7	14.8	56.0
1.558500	40.9	2000.0	9.000	Off	L1	19.7	15.1	56.0
2.427000	38.5	2000.0	9.000	Off	L1	19.7	17.5	56.0
5.946000	48.1	2000.0	9.000	Off	N	19.8	11.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.559500	45.1	2000.0	9.000	Off	L1	19.6	0.9	46.0
0.685500	37.1	2000.0	9.000	Off	L1	19.6	8.9	46.0
1.059000	36.8	2000.0	9.000	Off	L1	19.7	9.2	46.0
1.558500	35.4	2000.0	9.000	Off	L1	19.7	10.6	46.0
2.427000	31.9	2000.0	9.000	Off	L1	19.7	14.1	46.0
5.946000	39.7	2000.0	9.000	Off	N	19.8	10.3	50.0

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT
Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26th day of June 2023.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT