



TEST REPORT

No. 24T04Z100077-001

for

TCL Communication Ltd.

GSM/UMTS/LTE Mobile phone

Model Name: T433E

FCC ID: 2ACCJB218

with

Hardware Version: 05

Software Version: BM35

Issued Date: 2024-03-11

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z100077-001	Rev.0	1 st edition	2024-03-05
24T04Z100077-001	Rev.1	Adding the equipment "Broadcast Test Center" for FM test in P9.	2024-03-11

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION.....	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. TEST RESULTS	8
6. TEST FACILITIES UTILIZED	9
7. MEASUREMENT UNCERTAINTY	10
ANNEX A: EUT PARAMETERS.....	11
ANNEX B: DETAILED TEST RESULTS.....	12
ANNEX C: PERSONS INVOLVED IN THIS TESTING	23

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(Huayuan North Road)

Address: No. 52 Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35° C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2024-02-03

Testing End Date: 2024-02-28

1.5. Signature




Zhang Ying

(Prepared this test report)



An Hui

(Reviewed this test report)



Zhang Xia

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Annie Jiang
Email: nianxiang.jiang@tcl.com
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Annie Jiang
Email: nianxiang.jiang@tcl.com
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE Mobile phone
Model Name	T433E
FCC ID	2ACCJB218

Note: The EUT functions are described in Annex A of this test report. Specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client. Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT13a	355518370201933/ 355518370201941	05	BM35	2024-01-31

*EUT ID: is used to identify the test sample in the lab internally. The HW and SW version information were provided by the applicant.

3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer	Note
AE1-1	Battery	TLi028C9	Fenhua New EnergyCo.,Ltd	---
AE1-2	Battery	TLi028CB	Shenzhen Aerospace Electronic Co., Ltd.	---
AE2-5	Charger	UT-681E-5100UY	Shenzhen Baijunda Electronic Co.,Ltd	---
AE2-6	Charger	UT-681A-5100UY	Shenzhen Baijunda Electronic Co.,Ltd	---
AE2-7	Charger	UT-681B-5100UY	Shenzhen Baijunda Electronic Co.,Ltd	---
AE2-8	Charger	UT-580S-5100UY	Shenzhen Baijunda Electronic Co.,Ltd	---
AE3	USB cable	HE1501-000354-0 00	Shenzhen Xinchengyuteng Co.,Ltd	---
AE4	Headset	HE0501-000316-0 00	Shenzhen Xinchengyuteng Co.,Ltd	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.3	UT13a + AE1-1 + AE2-2 + AE3	Charger UT-681A-5100UY
Set.4	UT13a + AE1 +AE3+ PC	PC
Set.5	UT13a + AE4	FM

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, were supplied by the client or manufacturer, which is the basis of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. Test Results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	BR	Re-use test data from basic model report.
	NA	Not applicable
	NM	Not measured

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(Huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(Huayuan North Road)

6. Test Facilities Utilized

Test instruments list:

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101200	R&S	1 Year	2024-06-04
2	Test Receiver	ESCI	100344	R&S	2 years	2025-02-20
3	Test Receiver	ESW44	103144	R&S	1 year	2024-11-26
5	EMI Antenna	VULB 9163	01222	SCHWARZBE CK	2 years	2025-01-28
6	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2024-05-07
7	Universal Radio Communication Tester	CMW500	150344	R&S	1 Year	2025-02-03
8	Broadcast Test Center	BTC	101024	R&S	1 Year	2024-04-01
9	PC	OPTIPLEX X 380	2X1YV2X	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L5212 2	HP	N/A	N/A
11	Keyboard	L100	CN0RH6596 58907ATOI4 0	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220Z RC	Lenovo	N/A	N/A

Test software list:

Test Item	Test Software	Software Vendor
Conducted emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V11.50.00	R&S

Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz

Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.15dB(k=2)
	1GHz-18GHz	5.54dB(k=2)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB(k=2)

ANNEX A: EUT parameters

Cellular Bands operate between 30MHz-960MHz	<input checked="" type="checkbox"/> GSM	Band 850/900/1800/1900MHz
	<input type="checkbox"/> CDMA	Band
	<input checked="" type="checkbox"/> WCDMA	Band 1/2/4/5/8
	<input checked="" type="checkbox"/> LTE	Band 1/2/3/4/5/7/8/12/13/17/26/28/38/40/41/66
	<input type="checkbox"/> 5G NR SA	Band
Other FCC Part 15B related features	<input checked="" type="checkbox"/> FM <input checked="" type="checkbox"/> MP3 <input checked="" type="checkbox"/> MP4 <input checked="" type="checkbox"/> Camera <input checked="" type="checkbox"/> USB data <input type="checkbox"/> NFC	

ANNEX B: Detailed Test Results

B.1. Radiated Emission

Reference: FCC Part 15.109(a).

Method of measurement: The field strength of radiated emissions from the unintentional radiator at distances of 3/10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) were tested. The test was in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at the specified distance from the EUT. During the test, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

EUT operating mode: The EUT was operating in the USB data and/or charging mode. During the test, the EUT was connected to a charger in the case of charging mode. The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Annex A, were investigated. Only the worst case emissions are reported. All equipment was placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Measurement limit:

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. The limits for 10 meters distance is got by converting: $\text{Limit}(10\text{m}) = \text{Limit}(3\text{m}) + 20[\log(3/10)]$, which is according to FCC 15.109(g)(2)

Test settings:

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

Measurement results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Note: The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

Charger+MP4 + RX LTE band 13 mode, Set.3

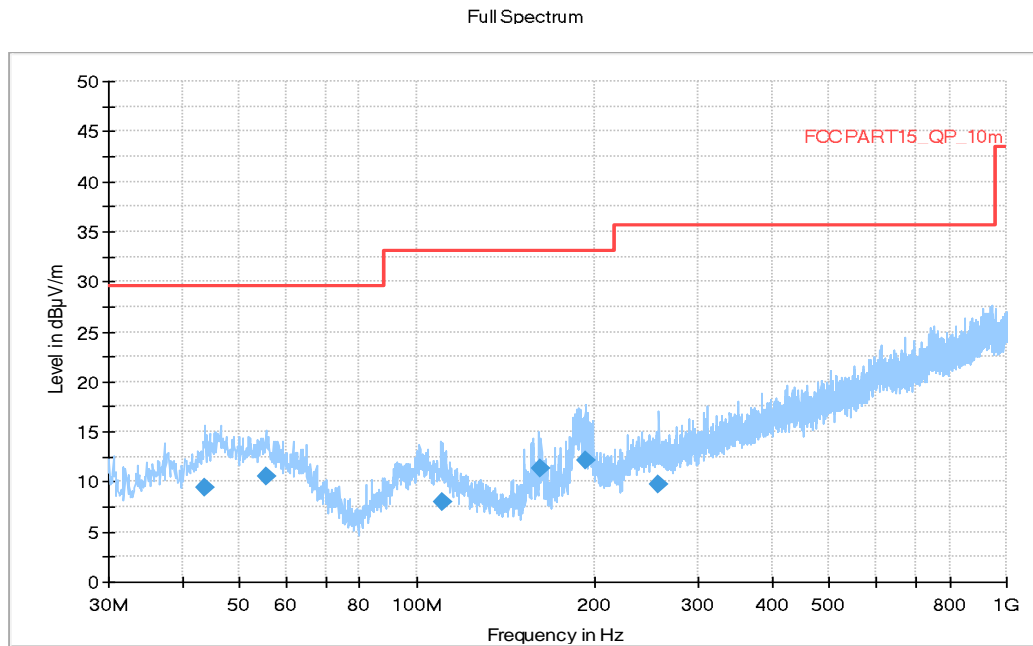


Figure A.1 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
43.677000	9.49	29.54	20.05	100.0	H	137.0
55.414000	10.55	29.54	18.99	225.0	V	225.0
110.510000	8.02	33.06	25.04	175.0	V	302.0
162.502000	11.41	33.06	21.65	175.0	V	136.0
193.736000	12.13	33.06	20.93	175.0	V	65.0
257.465000	9.69	35.56	25.87	176.0	V	156.0

Full Spectrum

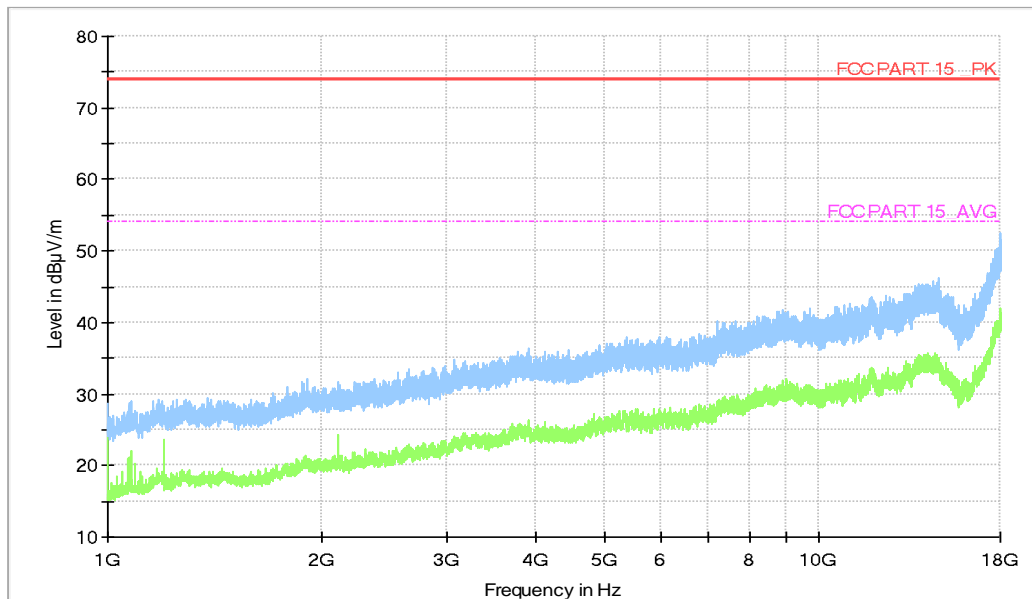


Figure A.2 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.500	41.3	-29.1	46.7	23.7	54.0	12.7	V
18000.000	41.0	-29.2	47.0	23.2	54.0	13.0	H
17997.960	41.0	-29.1	46.7	23.4	54.0	13.0	V
17970.080	41.0	-29.1	46.7	23.4	54.0	13.0	V
17993.540	40.8	-29.1	46.7	23.2	54.0	13.2	V
17998.640	40.8	-29.1	46.7	23.2	54.0	13.2	V

Peak detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.180	52.4	-29.1	46.7	34.8	74.0	21.6	H
17960.220	51.6	-29.1	46.7	34.0	74.0	22.4	V
17989.800	51.1	-29.1	46.7	33.5	74.0	22.9	H
17998.640	50.7	-29.1	46.7	33.1	74.0	23.3	V
17991.160	50.6	-29.1	46.7	33.0	74.0	23.4	V
17997.960	50.6	-29.1	46.7	33.0	74.0	23.4	H

USB connected to PC mode, Set.4

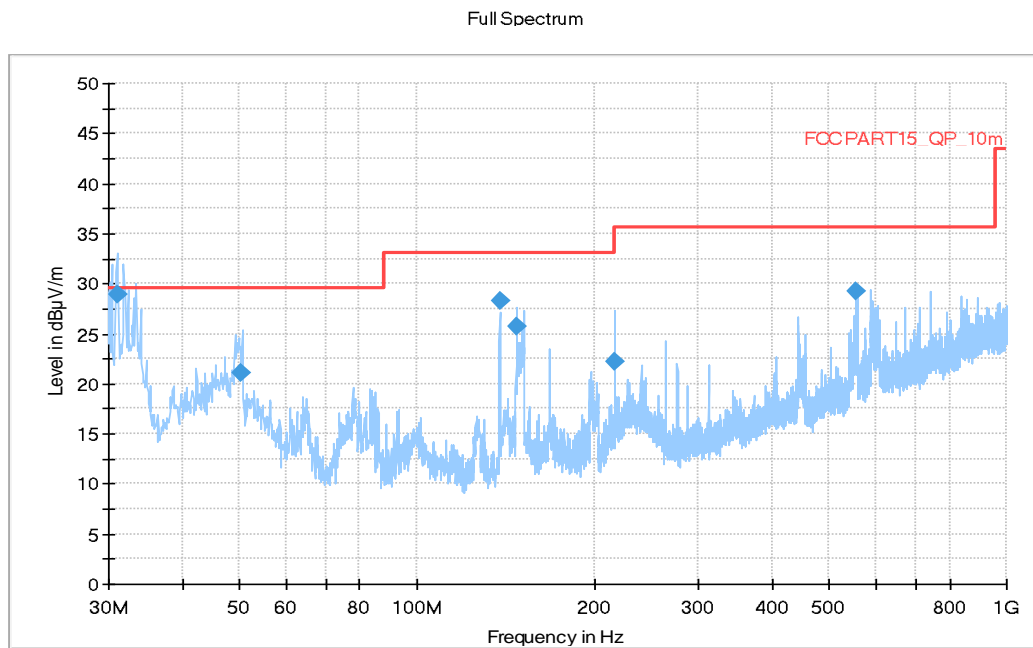


Figure A.5 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
31.091823	28.86	29.54	0.68	175.0	V	31.0
50.338535	21.15	29.54	8.39	187.0	V	83.0
138.226035	28.28	33.06	4.78	325.0	H	-25.0
147.769676	25.79	33.06	7.27	100.0	V	308.0
216.008157	22.21	33.06	10.85	223.0	H	161.0
556.800974	29.28	35.56	6.28	225.0	V	-45.0

Full Spectrum

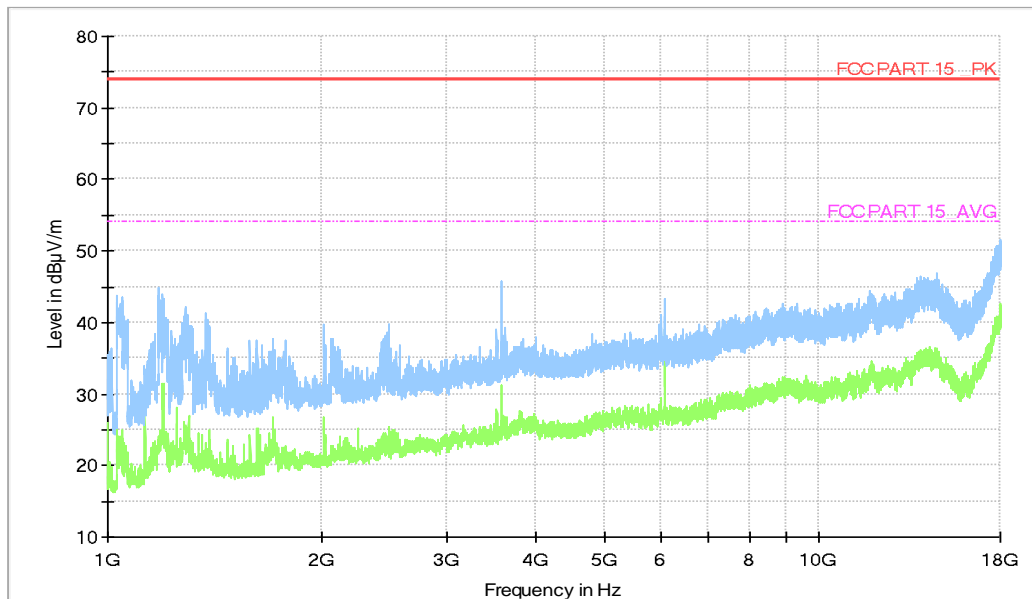


Figure A.6 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.800	41.6	-29.1	46.7	24.0	54.0	12.4	V
17989.460	41.5	-29.1	46.7	23.9	54.0	12.5	V
17995.240	41.5	-29.1	46.7	23.9	54.0	12.5	V
17990.480	41.4	-29.1	46.7	23.8	54.0	12.6	V
18000.000	41.4	-29.2	47.0	23.6	54.0	12.6	H
17990.820	41.3	-29.1	46.7	23.7	54.0	12.7	V

Peak detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.860	51.5	-29.1	46.7	33.9	74.0	22.5	V
17991.840	51.4	-29.1	46.7	33.8	74.0	22.6	V
17961.920	51.3	-29.1	46.7	33.7	74.0	22.7	V
17963.280	51.2	-29.1	46.7	33.6	74.0	22.8	H
17977.560	51.1	-29.1	46.7	33.5	74.0	22.9	V
17990.480	51.1	-29.1	46.7	33.5	74.0	22.9	H

FM mode, Set.5

Full Spectrum

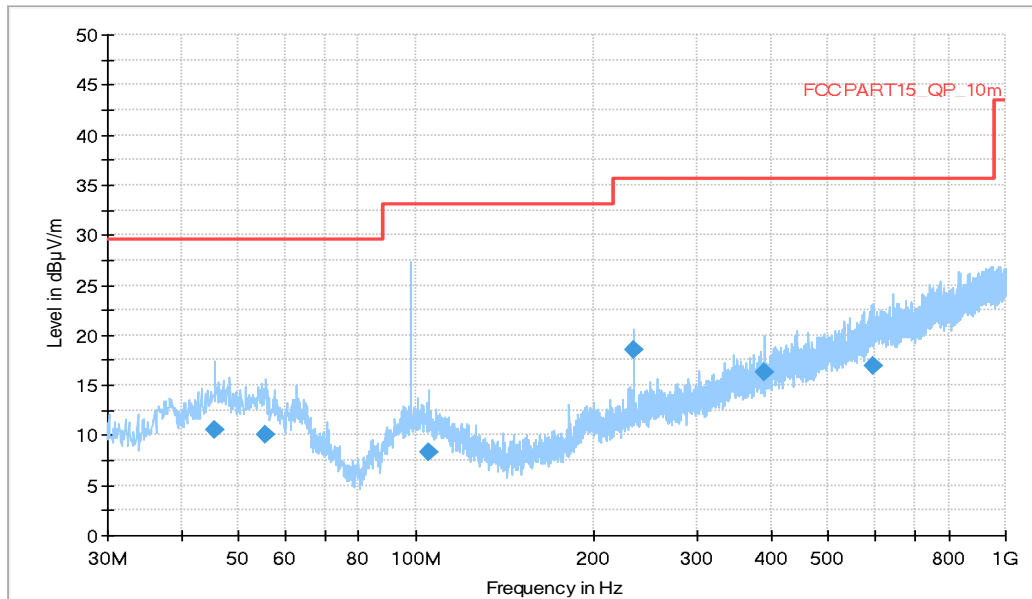


Figure A.5 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
45.617000	10.61	29.54	18.93	112.0	V	123.0
55.705000	10.11	29.54	19.43	308.0	V	193.0
105.175000	8.30	33.06	24.76	209.0	V	245.0
233.991000	18.49	35.56	17.07	322.0	H	65.0
389.967000	16.32	35.56	19.24	100.0	V	-43.0
594.637000	16.93	35.56	18.63	112.0	H	-25.0

Full Spectrum

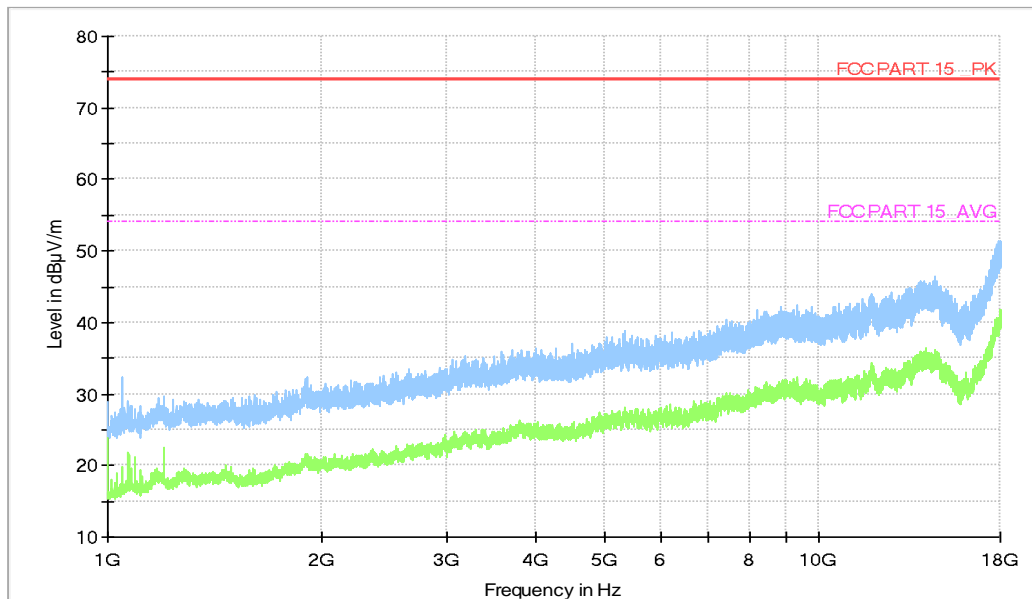


Figure A.6 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.300	41.7	-29.1	46.7	24.1	54.0	12.3	H
17997.960	41.4	-29.1	46.7	23.8	54.0	12.6	V
17993.200	41.4	-29.1	46.7	23.8	54.0	12.6	V
17992.520	41.4	-29.1	46.7	23.8	54.0	12.6	V
17991.160	41.4	-29.1	46.7	23.8	54.0	12.6	H
17991.500	41.2	-29.1	46.7	23.6	54.0	12.8	H

Peak detector

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.220	51.5	-29.1	46.7	33.9	74.0	22.5	H
17898.680	51.4	-29.5	46.0	35.0	74.0	22.6	V
17977.220	51.3	-29.1	46.7	33.7	74.0	22.7	V
17984.360	51.1	-29.1	46.7	33.5	74.0	22.9	H
17992.520	51.0	-29.1	46.7	33.4	74.0	23.0	H
17993.200	51.0	-29.1	46.7	33.4	74.0	23.0	H

B.2. Conducted Emission

Reference: FCC: Part 15.107(a).

Method of measurement: For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

EUT operating mode: The EUT is operating in the charging mode and USB data mode if applicable.

Measurement limit:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

Test Settings:

Voltage(V)	Frequency(Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

Measurement results:

The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

Charger and Camera mode, Set.3

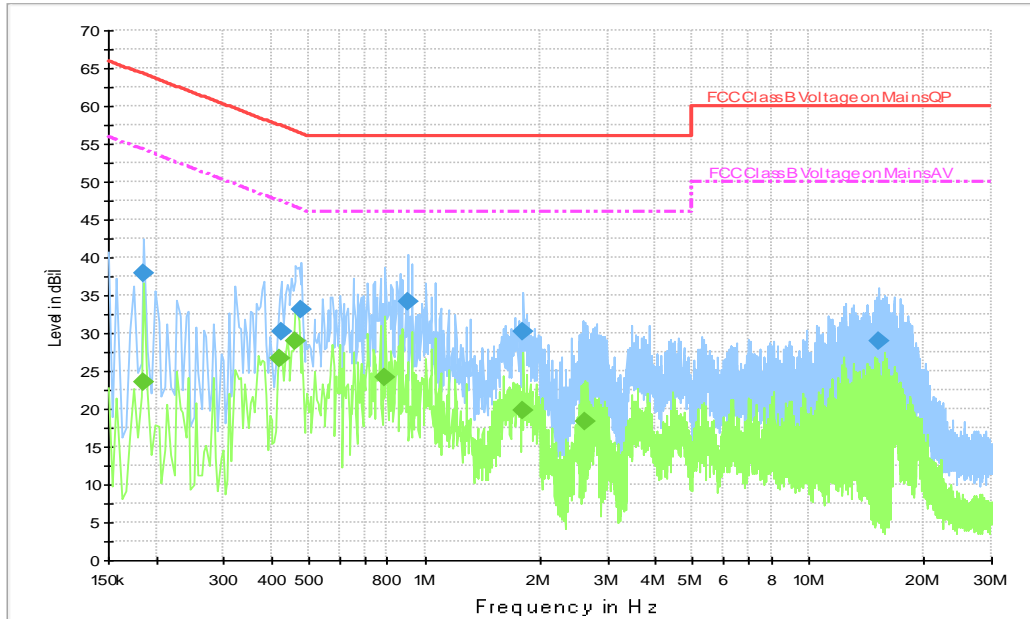


Figure A.9 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	37.9	2000.0	9.000	On	N	19.7	26.4	64.2
0.422000	30.2	2000.0	9.000	On	N	19.7	27.2	57.4
0.478000	33.1	2000.0	9.000	On	N	19.7	23.3	56.4
0.906000	34.2	2000.0	9.000	On	N	19.6	21.8	56.0
1.810000	30.2	2000.0	9.000	On	N	19.6	25.8	56.0
15.334000	28.9	2000.0	9.000	On	L1	19.7	31.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	23.5	2000.0	9.000	On	N	19.7	30.8	54.2
0.418000	26.6	2000.0	9.000	On	L1	19.7	20.9	47.5
0.458000	29.0	2000.0	9.000	On	L1	19.7	17.8	46.7
0.790000	24.2	2000.0	9.000	On	L1	19.7	21.8	46.0
1.810000	19.9	2000.0	9.000	On	N	19.6	26.1	46.0
2.614000	18.3	2000.0	9.000	On	N	19.6	27.7	46.0

USB connected to PC mode, Set.4

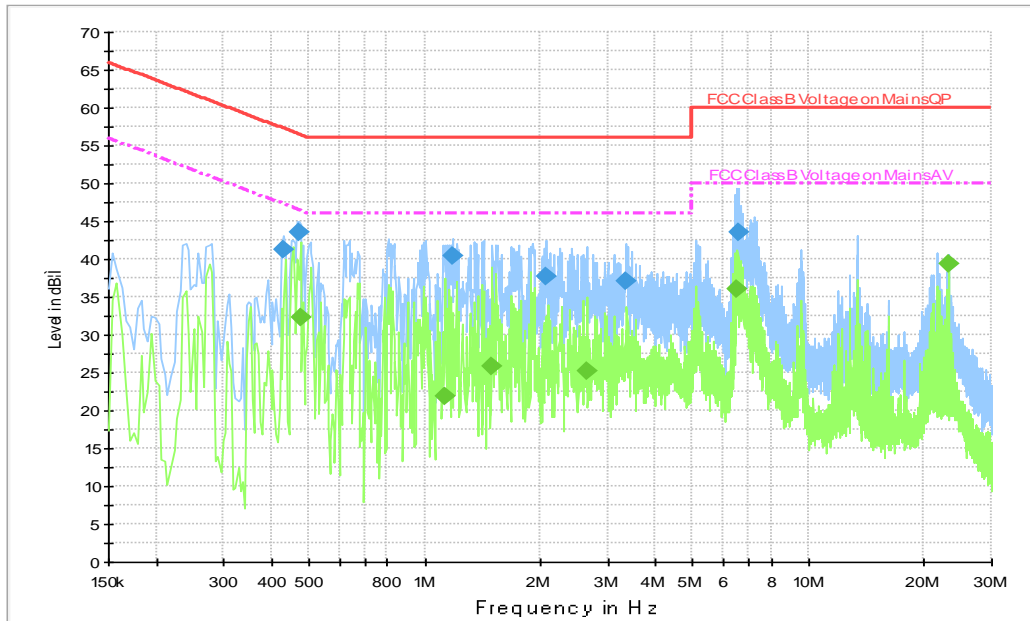


Figure A.11 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.430000	41.2	2000.0	9.000	On	L1	19.7	16.1	57.3
0.470000	43.6	2000.0	9.000	On	L1	19.7	12.9	56.5
1.182000	40.4	2000.0	9.000	On	L1	19.7	15.6	56.0
2.078000	37.7	2000.0	9.000	On	N	19.6	18.3	56.0
3.362000	37.2	2000.0	9.000	On	N	19.6	18.8	56.0
6.542000	43.5	2000.0	9.000	On	L1	19.7	16.5	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.474000	32.4	2000.0	9.000	On	N	19.7	14.1	46.4
1.130000	21.8	2000.0	9.000	On	L1	19.7	24.2	46.0
1.498000	25.9	2000.0	9.000	On	L1	19.6	20.1	46.0
2.650000	25.1	2000.0	9.000	On	N	19.6	20.9	46.0
6.538000	36.1	2000.0	9.000	On	N	19.6	13.9	50.0
23.126000	39.3	2000.0	9.000	On	N	19.8	10.7	50.0

FM mode, Set.5

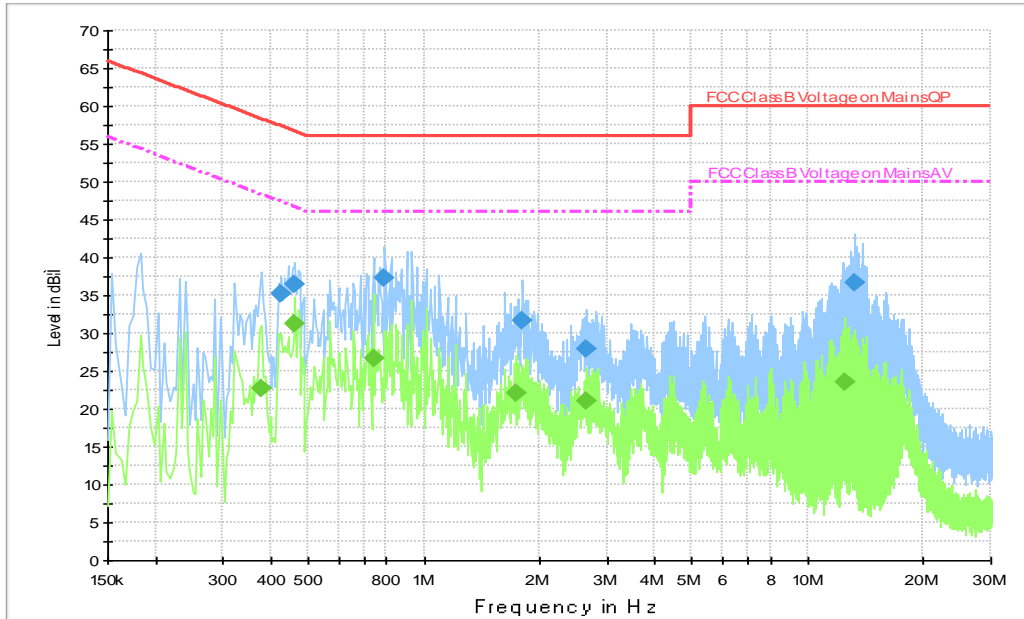


Figure A.11 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.426000	35.1	2000.0	9.000	On	L1	19.7	22.2	57.3
0.462000	36.5	2000.0	9.000	On	L1	19.7	20.1	56.7
0.790000	37.3	2000.0	9.000	On	L1	19.7	18.7	56.0
1.810000	31.8	2000.0	9.000	On	N	19.6	24.2	56.0
2.638000	28.0	2000.0	9.000	On	L1	19.6	28.0	56.0
13.306000	36.6	2000.0	9.000	On	N	19.7	23.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.378000	22.7	2000.0	9.000	On	N	19.7	25.6	48.3
0.462000	31.2	2000.0	9.000	On	L1	19.7	15.5	46.7
0.738000	26.6	2000.0	9.000	On	L1	19.7	19.4	46.0
1.742000	22.1	2000.0	9.000	On	L1	19.6	23.9	46.0
2.638000	21.0	2000.0	9.000	On	L1	19.6	25.0	46.0
12.570000	23.6	2000.0	9.000	On	L1	19.8	26.4	50.0

ANNEX C: Persons involved in this testing

Test Item	Tester
Radiated Emission	Li Pengfei, Zhang Tianli
Conducted Emission	Yan Hanchen

*****END OF REPORT*****