

# FCC TEST REPORT

For

**Mobile Phone**

**Model Number: 7071A**

**FCC ID: 2ACCJBT06**

**Report Number : WT178004535**

Test Laboratory : Shenzhen Academy of Metrology and Quality  
Inspection  
National Digital Electronic Product Testing Center  
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,  
Shenzhen, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
E-mail : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## TEST REPORT DECLARATION

Applicant : TCL Communication Ltd  
Address : 5F, C-Tower, No.232, Liangjing Road, Zhangjiang High-tech Park, Pudong, Shanghai, China  
Manufacturer : TCL Communication Ltd  
Address : 5F, C-Tower, No.232, Liangjing Road, Zhangjiang High-tech Park, Pudong, Shanghai, China  
EUT Description : Mobile Phone  
Model No : 7071A  
Trade mark : alcatel  
Serial Number : /  
FCC ID : 2ACCJBT06

Test Standards:

### FCC Part 15 Subpart B 15.107, 15.109 (2016)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer: 陈司林 Date: Aug.30, 2017  
(Chen Silin 陈司林)  
Checked by: 林奕翔 Date: Aug.30, 2017  
(Lin Yixiang 林奕翔)  
Approved by: 林斌 Date: Aug.30, 2017  
(Lin Bin 林斌)

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION</b> .....	<b>2</b>
<b>1. TEST RESULTS SUMMARY</b> .....	<b>4</b>
<b>2. GENERAL INFORMATION</b> .....	<b>5</b>
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer .....	5
2.3. Measurement Uncertainty .....	5
<b>3. PRODUCT DESCRIPTION</b> .....	<b>6</b>
3.1. EUT Description .....	6
3.2. Block Diagram of EUT Configuration .....	7
3.3. Operating Condition of EUT .....	7
3.4. Support Equipment List.....	7
3.5. Test Conditions .....	7
3.6. Modifications .....	7
<b>4. TEST EQUIPMENT USED</b> .....	<b>8</b>
4.1. Test Equipment Used to Measure Conducted Disturbance .....	8
4.2. Test Equipment Used to Measure Radiated Disturbance .....	8
<b>5. CONDUCTED DISTURBANCE TEST</b> .....	<b>9</b>
5.1. Test Standard and Limit .....	9
5.2. Test Procedure.....	9
5.3. Test Arrangement .....	9
5.4. Test Data.....	9
<b>6. RADIATION DISTURBANCE TEST</b> .....	<b>15</b>
6.1. Test Standard and Limit .....	15
6.2. Test Procedure.....	15
6.3. Test Arrangement .....	15
6.4. Test Data.....	15

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Disturbance	15.107	Pass
Radiation Emission	15.109	Pass

Remark: "N/A" means "Not applicable."

## 2. GENERAL INFORMATION

### 2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

### 2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is accredited by the United States of American Federal Communications Commission (FCC), and the registration number is 582918.

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A-1 11177A-2.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

### 2.3. Measurement Uncertainty

Conducted Emission  
9kHz~30MHz 3.5dB

Radiated Emission  
30MHz~1000MHz 4.5dB  
1GHz~26.5GHz 4.6dB

### 3. PRODUCT DESCRIPTION


#### 3.1.EUT Description

Table 2 Specification of the Equipment under Test

Product Type:	Mobile Phone
Hardware Version:	V03
Software Version :	vG2J
FCC-ID:	2ACCJBT06
Frequency:	GSM850:TX 824MHz~849MHz RX 869MHz~894MHz PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz WCDMA 850: TX 824MHz~849MHz RX 869MHz~894MHz WCDMA 1700:TX: 1710MHz~1755MHz RX 2110MHz~2155MHz WCDMA 1900:TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 2: TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 4:TX: 1710MHz~1755MHz RX 2110MHz~2155MHz LTE Band 5:TX 824MHz~849MHz RX 869MHz~894MHz LTE Band 7:TX 2500MHz~2570MHz RX 2620MHz~2690MHz LTE Band 12:TX 698 ~ 716MHz RX728 ~ 746MHz LTE Band 13:TX 777~ 787MHz RX746~ 756MHz LTE Band 17:TX 704~716MHz RX 734~ 746MHz LTE Band 66TX: 1710MHz~1780MHz RX 2110MHz~2200MHz WiFi:2412MHz~2462MHz BT/BLE:2402MHz~2480MHz
Type(s) of Modulation:	GSM850/PCS1900:GMSK 8PSK WCDMA:QPSK LTE:QPSK, 16QAM DSSS (DBPSK, DQPSK, CCK) for 802.11b OFDM (BPSK, QPSK, 16QAM, 64QAM) for 802.11a/g/n BT: GFSK, pi/4-DQPSK, 8DPSK
Antenna Type:	GSM/WCDMA/LTE: Aux Antenna 698MHz~800MHz: 0.5dBi 824MHz~849MHz: 0.5dBi 1710MHz~1755MHz: 1.0dBi 1850MHz~1910MHz: 1.0dBi 2500MHz~2570MHz: 1.5dBi WiFi/BT: DIPOLE ANTENNA 1.5dBi
Operating voltage:	Internal battery 3.5V (Low)/3.8V (Nominal)/ 4.35V (Max)

- Remark: 1.Two models of batteries provided, TLp038B1 and TLp038B7 respectively, Full tests were performed on model TLp038B1, and the worst case results are recorded in this report.
2. Two models of Earphones provided, 1# (Superb) and 2# (JUWEI) respectively, Full tests were performed on model 1# (Superb), and the worst case results are recorded in this report.

### 3.2. Block Diagram of EUT Configuration

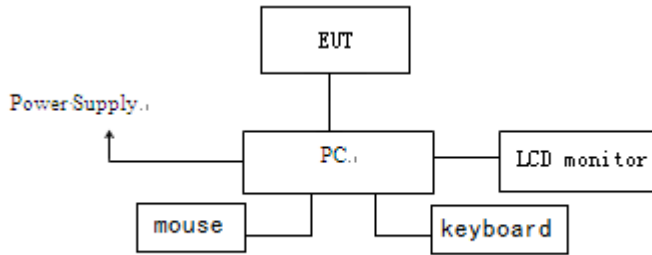

Test mode 1

### 3.3. Operating Condition of EUT

Test mode 1: connected to a pc and data transmission.

The test mode mentioned above is identified as worst case for this EUT and the test results for this mode are recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

### 3.4. Support Equipment List

Table 3 Support Equipment List

Name	Model No	S/N	Manufacturer
USB 1# for EUT	--	--	PUAN
USB 2# for EUT	--	--	JUWEI
Battery 1# for EUT	TLp038B1	--	Shenzhen BYD Lithium Battery Company Limited
Battery 2# for EUT	TLp038B7	--	Ningbo Veken Battery Co.,Ltd.
Earphone 1# for EUT	--	--	Dong Guan Superb electronic Co.,Ltd.
Earphone 2# for EUT	--	--	HUIZHOU JUWEI ELECTRONICS CO.,LTD

Table 4 Support Equipment List

Name	Model No	S/N	Manufacturer	FCC
Notebook	ThinkPadE460	--	Lenovo	DOC
Keyboard (USB)	Y-U0009	1651MG00L068	Logitech	DOC
Mouse (USB)	M-U0026	--	Logitech	DOC

### 3.5. Test Conditions

Date of test : Aug.07, 2017-Aug.16, 2017

Date of EUT Receive : Aug.01, 2017

Temperature: 18-24 °C

Relative Humidity: 39-61%

### 3.6. Modifications

No modification was made.

## 4. TEST EQUIPMENT USED

### 4.1. Test Equipment Used to Measure Conducted Disturbance

Table 3 Conducted Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB2603	EMI Test Receiver	R&S	ESCS30	Mar.22,2017	1 Year
SB2604	AMN	R&S	ESH3-Z5	Mar.22,2017	1 Year

### 4.2. Test Equipment Used to Measure Radiated Disturbance

Table 4 Radiated Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB3436	EMI Test Receiver	R&S	ESI26	Nov.29,2016	1 Year
SB3955	Trilog Broadband Antenna (30M-3GHz)	Schwarzbeck	VULB9163	Mar.22,2017	1 Year
SB9422/16	Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	Mar.19,2017	1 Year
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	Mar.06, 2017	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	Mar.06, 2017	1 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	Sep.21,2016	1 Year
SB8501/11	Horn Antenna	ETS-Lindgren	3160-09	Mar.21,2017	3 Year
SB8501/12	Horn Antenna	ETS-Lindgren	3160-10	Mar.21,2017	3 Year



## 5. CONDUCTED DISTURBANCE TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 15: Section 15.107

#### 5.1.2. Test Limit

Table 5 Conducted Disturbance Test Limit (Class B)

Frequency	Power Port limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15MHz ~ 0.5MHz	66~56*	56~46*
0.5MHz ~ 5 MHz	56	46
5 MHz ~ 30MHz	60	50

\* Decreasing linearly with logarithm of the frequency

### 5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.


**Table 6 Conducted Disturbance Test Data at mains Port**

Model No.: 7071A								
Test mode: Test Mode 1								
USB:1#								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)
Line	0.150	41.0	41.0	50.7	66	26.6	36.3	56
	0.162	39.5	39.5	49.2	65.4	22.4	32.1	55.4
	0.194	36.7	36.7	46.4	63.9	22.1	31.8	53.9
	0.286	29.5	29.5	39.2	60.6	17.0	26.7	50.6
	0.526	36.3	36.3	46.1	56	30.1	39.9	46
	0.586	19.6	19.6	29.4	56	10.5	20.3	46
Neutral	0.150	43.2	43.2	52.9	66	28.2	37.9	56
	0.178	38.6	38.6	48.3	64.6	22.0	31.7	54.6
	0.190	38.1	38.1	47.8	64.0	22.8	32.5	54.0
	0.382	29.1	29.1	38.8	58.2	21.2	30.9	48.2
	0.518	36.1	36.1	45.9	56	29.5	39.3	46
	0.582	25.1	25.1	34.9	56	15.6	25.4	46


Model No.: 7071A								
Test mode: Test Mode 1								
USB:1#								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)
Line	0.154	9.7	40.8	50.5	65.8	24.2	33.9	55.8
	0.166	9.7	39.3	49.0	65.2	23.3	33.0	55.2
	0.182	9.7	36.0	45.7	64.4	21.8	31.5	54.4
	0.530	9.8	36.1	45.9	56	30.1	39.9	46
	2.362	9.9	22.5	32.4	56	17.3	27.2	46
	2.986	9.9	19.7	29.6	56	13.3	23.2	46
Neutral	0.150	9.7	42.4	52.1	66	27.6	37.3	56
	0.186	9.7	36.0	45.7	64.2	20.9	30.6	54.2
	0.378	9.7	25.7	35.4	58.3	17.2	26.9	48.3
	0.522	9.8	36.6	46.4	56	27.8	37.6	46
	0.610	9.8	23.4	33.2	56	16.7	26.5	46
	2.534	9.9	21.4	31.3	56	16.5	26.4	46

- REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)  
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)  
 3. The other emission levels were are more than 20dB below the limits.


EUT: 7071A  
Operating Condition: Test mode 1  
Test Specification: L  
Comment: AC 120V/60Hz  
Comment: USB: 1#

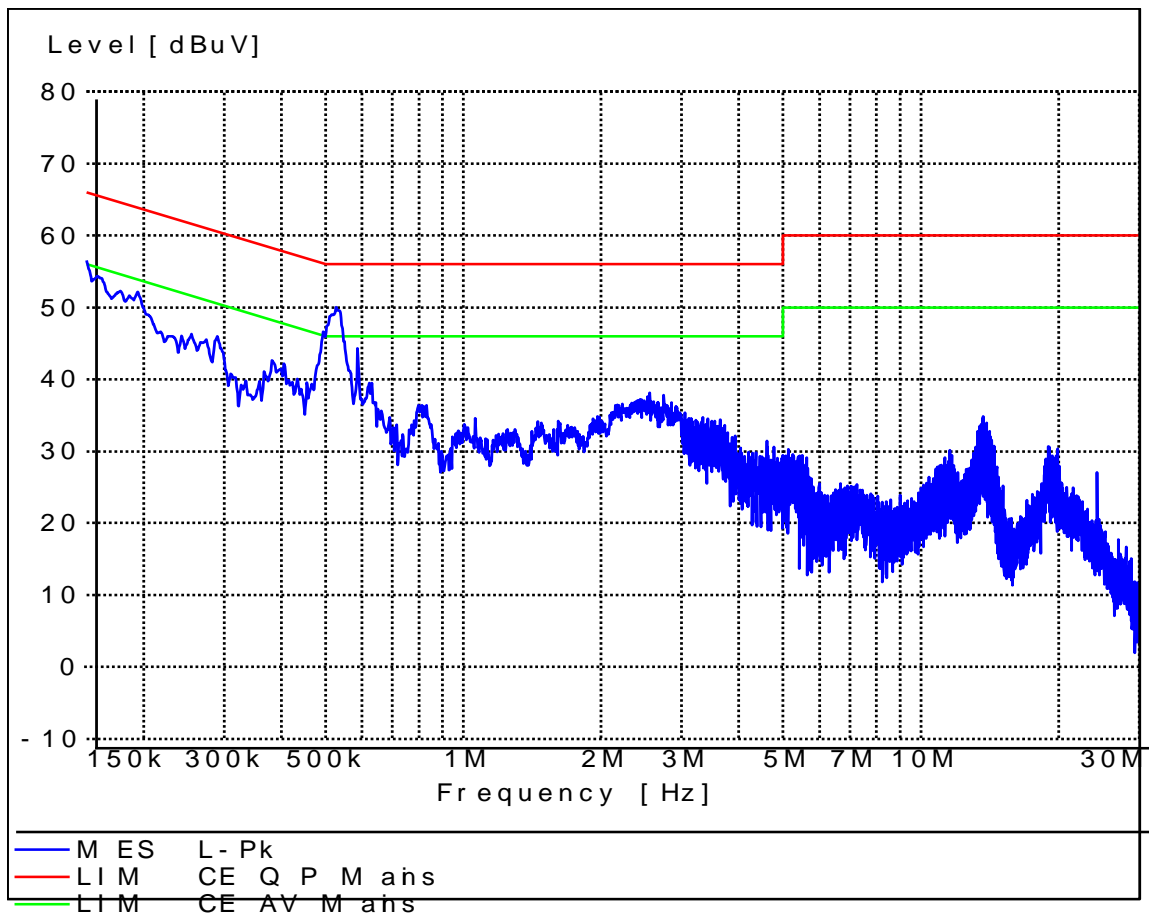


EUT: 7071A  
Operating Condition: Test mode 1  
Test Specification: N  
Comment: AC 120V/60Hz  
Comment: USB: 1#

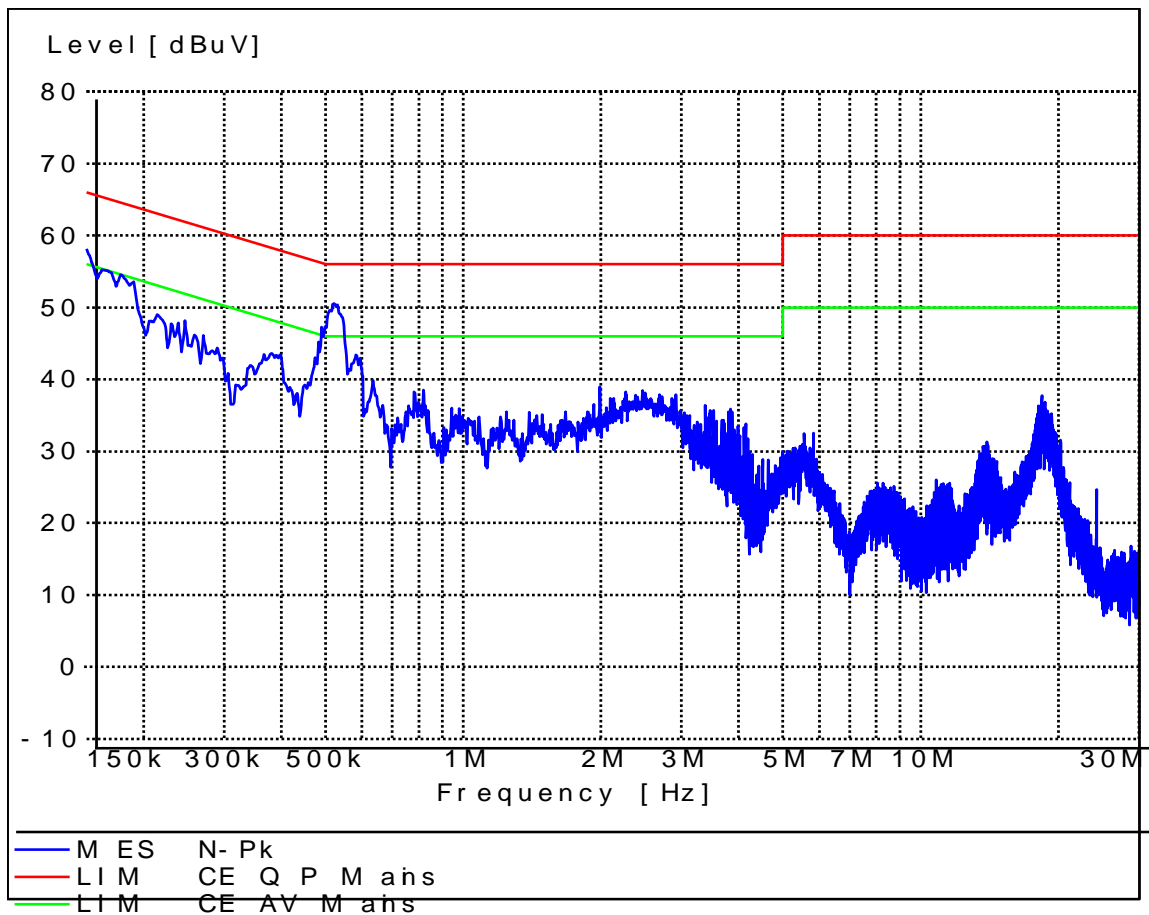

EUT: 7071A  
Operating Condition: Test mode 1  
Test Specification: L  
Comment: AC 120V/60Hz  
Comment: USB: 2#

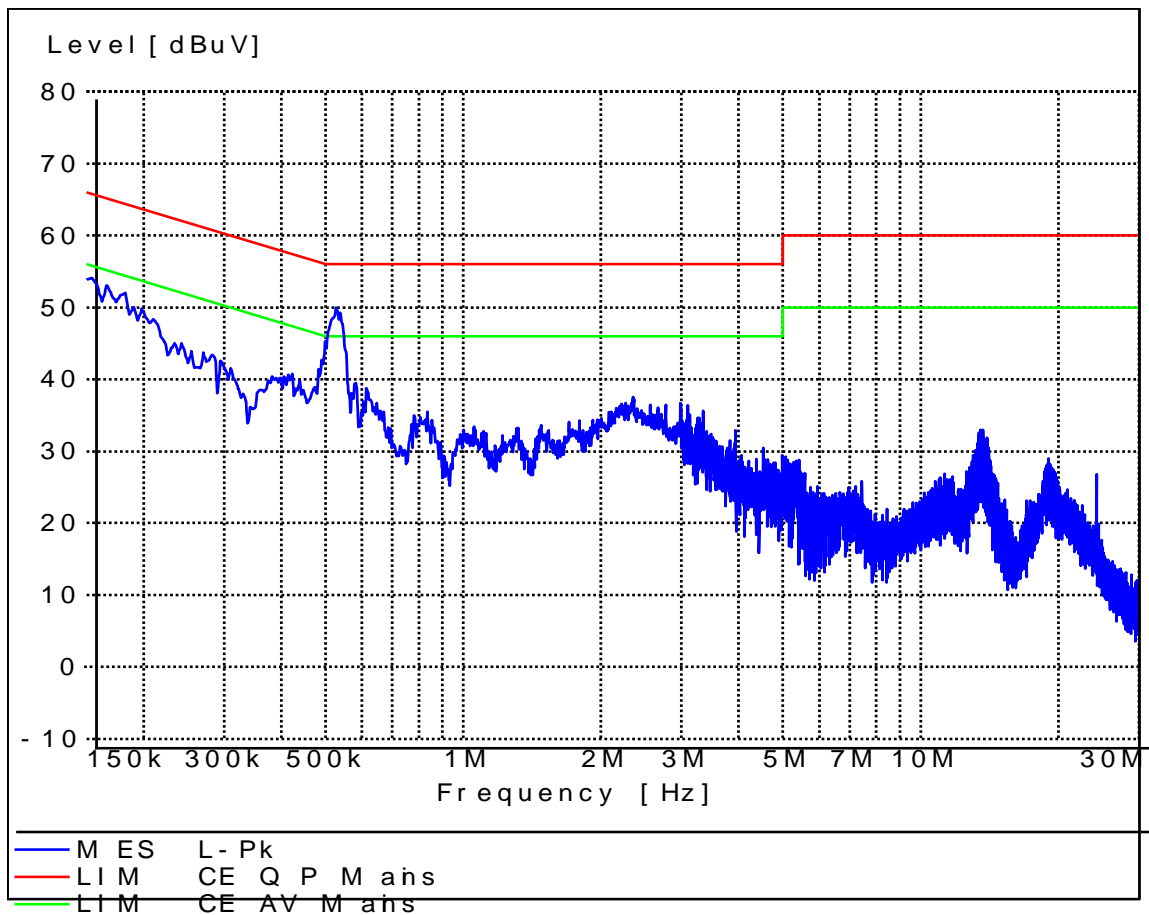

EUT: 7071A  
Operating Condition: Test mode 1  
Test Specification: N  
Comment: AC 120V/60Hz  
Comment: USB: 2#

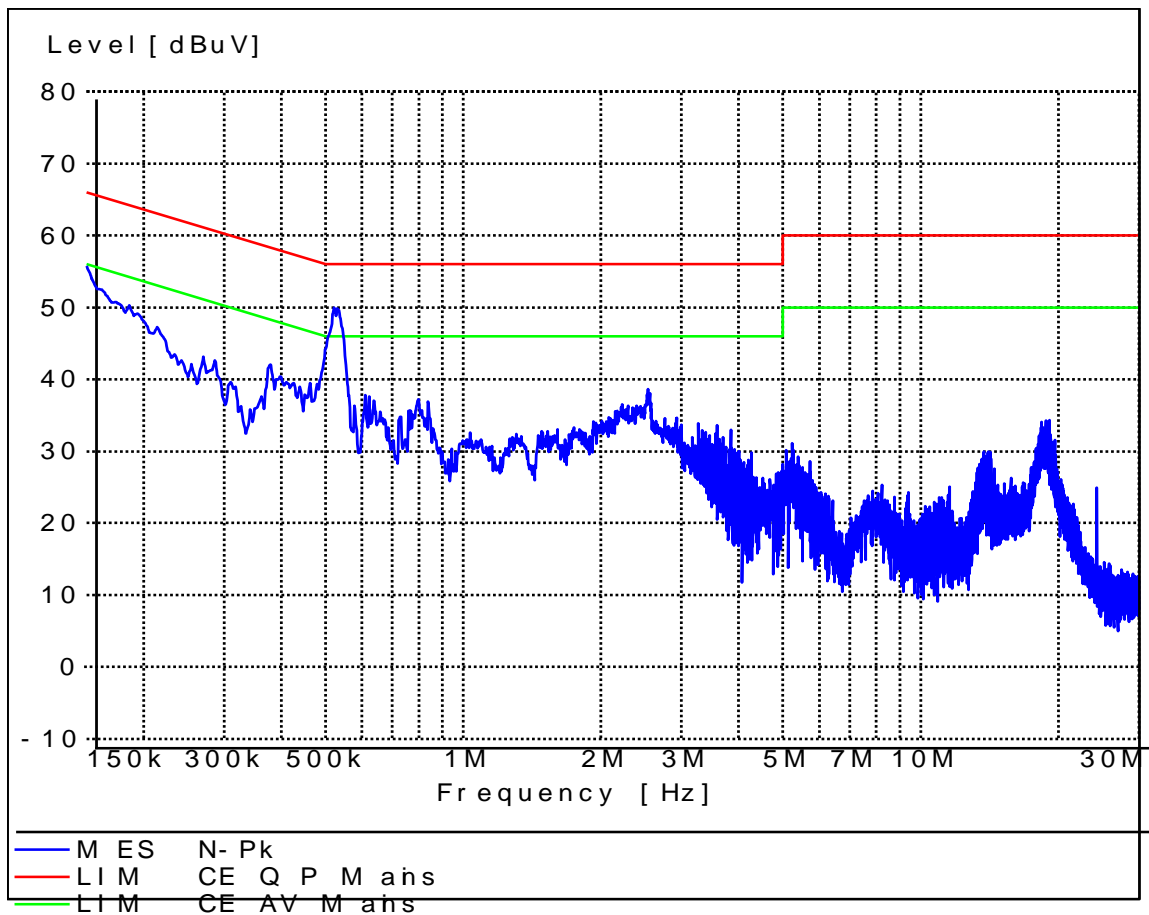

## 6. RADIATION DISTURBANCE TEST

### 6.1. Test Standard and Limit

#### 6.1.1. Test Standard

FCC Part 15: Section 15.109

#### 6.1.2. Test Limit

Table 7 Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 8 Radiation Disturbance Test Limit for FCC (Class B)(Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

\* The lower limit shall apply at the transition frequency.

\* The test distance is 3m.

### 6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Detector function = peak; Set RBW = 1 MHz, VBW= 3MHz for  $f > 1$  GHz for peak measurement.

### 6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 9 Radiated Disturbance Test Data

Model No.: 7071A									
Test mode: Test Mode 1									
USB:1#									
Frequency (MHz)	Cable Loss +preamp(dB)	Antenna Factor (dB)	Readings (dBµV/m)	Level (dBµV/m)	Polarity (H/V)	Turntable Angle(deg)	Antenna Height (cm)	Limits (dBµV/m)	Margin (dB)
32.188	0.7	12.3	11.6	24.6	V	171	100	40	15.4
54.046	0.8	13.3	10.7	24.8	V	346	100	40	15.2
168.822	1.5	8.7	12.9	23.1	V	283	100	43.5	20.4
299.198	2.1	12.7	12.4	27.2	V	305	100	46	18.8
638.329	3.1	18.5	12.5	34.1	V	214	100	46	11.9
786.421	3.5	18.8	14.6	36.9	V	141	100	46	9.1
98.604	1.0	12.8	10.7	24.5	H	77	200	43.5	19.0
164.342	1.5	8.7	16.4	26.6	H	96	200	43.5	16.9
261.472	1.9	12.1	12.2	26.2	H	153	200	46	19.8
375.474	2.3	14.3	11.6	28.2	H	276	200	46	17.8
532.073	2.8	16.6	12.5	31.9	H	340	200	46	14.1
790.272	3.5	18.8	14.5	36.8	H	66	200	46	9.2
PK									
1107.695	-41.1	24.4	75.4	58.7	H	301	100	74	15.3
1398.918	-40.8	24.3	71.2	54.7	H	64	100	74	19.3
1999.919	-40.4	26.9	65.4	51.9	H	341	100	74	22.1
2407.936	-40.3	28.6	61.8	50.1	H	182	100	74	23.9
3197.916	-39.0	30.4	59.4	50.8	H	354	100	74	23.2
5670.641	-38.4	34.4	61.1	57.1	H	193	100	74	16.9
1394.709	-40.8	24.3	66.9	50.4	V	324	100	74	23.6
1599.319	-40.6	25.1	69.3	53.8	V	169	100	74	20.2
2192.625	-40.3	28.6	62.3	50.6	V	186	100	74	23.4
2399.719	-40.2	28.3	66.0	54.1	V	304	100	74	19.9
2577.675	-40.0	28.6	70.0	58.6	V	146	100	74	15.4
3198.517	-39.0	30.4	64.8	56.2	V	46	100	74	17.8
AV									
1107.695	-41.1	24.4	42.0	25.3	H	301	100	54	28.7
1398.918	-40.8	24.3	43.5	27.0	H	64	100	54	27.0
1999.919	-40.4	26.9	40.1	26.6	H	341	100	54	27.4
2407.936	-40.3	28.6	40.3	28.6	H	182	100	54	25.4
3197.916	-39.0	30.4	38.6	30.0	H	354	100	54	24.0
5670.641	-38.4	34.4	38.3	34.3	H	193	100	54	19.7
1394.709	-40.8	24.3	41.4	24.9	V	324	100	54	29.1
1599.319	-40.6	25.1	43.4	27.9	V	169	100	54	26.1
2192.625	-40.3	28.6	40.5	28.8	V	186	100	54	25.2
2399.719	-40.2	28.3	43.8	31.9	V	304	100	54	22.1
2577.675	-40.0	28.6	39.8	28.4	V	146	100	54	25.6
3198.517	-39.0	30.4	40.0	31.4	V	46	100	54	22.6



Model No.: 7071A


Test mode: Test Mode 1

USB:2#

Frequency (MHz)	Cable Loss +preamp(dB)	Antenna Factor (dB)	Readings (dBµV/m)	Level (dBµV/m)	Polarity (H/V)	Turntable Angle(deg)	Antenna Height (cm)	Limits(dBµV/m)	Margin (dB)
216.613	1.7	10.6	12.6	24.9	H	45	100	46	21.1
243.828	1.8	12.1	8.6	22.5	H	60	100	46	23.5
298.257	2.1	12.7	10.6	25.4	H	0	100	46	20.6
479.038	2.6	15.6	9.2	27.4	H	0	100	46	18.6
749.238	3.5	18.8	7.4	29.7	H	0	100	46	16.3
796.956	3.6	18.8	8.2	30.6	H	80	100	46	15.4
216.614	1.7	10.6	8.4	20.7	V	60	100	46	25.3
263.267	1.9	12.1	2.4	16.4	V	40	100	46	29.6
298.256	2.1	12.7	4.1	18.9	V	80	100	46	27.1
527.635	2.9	16.6	0.1	19.6	V	90	100	46	26.4
552.906	2.9	16.6	3.7	23.2	V	90	100	46	22.8
640.381	3.1	18.5	3.2	24.8	V	0	100	46	21.2
PK									
1601.342	-40.6	26.7	58.1	44.2	V	120	100	74	29.8
2072.151	-40.4	28.6	53.2	41.4	V	100	100	74	32.6
2182.245	-40.3	28.6	54.3	42.6	V	60	100	74	31.4
2393.164	-40.2	28.3	55.0	43.1	V	0	100	74	30.9
2713.341	-39.7	29.6	52.6	42.5	V	0	100	74	31.5
2874.231	-39.6	29.4	54.8	44.6	V	0	100	74	29.4
1391.411	-40.8	24.3	56.1	39.6	H	60	100	74	34.4
1591.212	-40.6	25.1	58.6	43.1	H	90	100	74	30.9
2082.114	-40.4	28.6	53.0	41.2	H	120	100	74	32.8
2391.322	-40.2	28.3	55.5	43.6	H	90	100	74	30.4
2513.246	-40.0	28.6	52.4	41.0	H	0	100	74	33.0
3556.298	-39.0	31.5	50.2	42.7	H	0	100	74	31.3
AV									
1601.342	-40.6	26.7	39.5	25.6	V	120	100	54	28.4
2072.151	-40.4	28.6	36.8	25.0	V	100	100	54	29.0
2182.245	-40.3	28.6	34.0	22.3	V	60	100	54	31.7
2393.164	-40.2	28.3	36.7	24.8	V	0	100	54	29.2
2713.341	-39.7	29.6	30.3	20.2	V	0	100	54	33.8
2874.231	-39.6	29.4	28.8	18.6	V	0	100	54	35.4
1391.411	-40.8	24.3	34.3	17.8	H	60	100	54	36.2
1591.212	-40.6	25.1	41.9	26.4	H	90	100	54	27.6
2082.114	-40.4	28.6	36.5	24.7	H	120	100	54	29.3
2391.322	-40.2	28.3	34.2	22.3	H	90	100	54	31.7
2513.246	-40.0	28.6	30.0	18.6	H	0	100	54	35.4
3556.298	-39.0	31.5	26.9	19.4	H	0	100	54	34.6


Emission level(dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

EUT Name: 7071A  
 Operating Condition: Test Mode 1  
 Test site: SMQ NETC EMC Lab.3m Chamber  
 Antenna Position: Horizontal & Vertical  
 Comment: AC 120V60Hz  
 Comment: USB: 1#

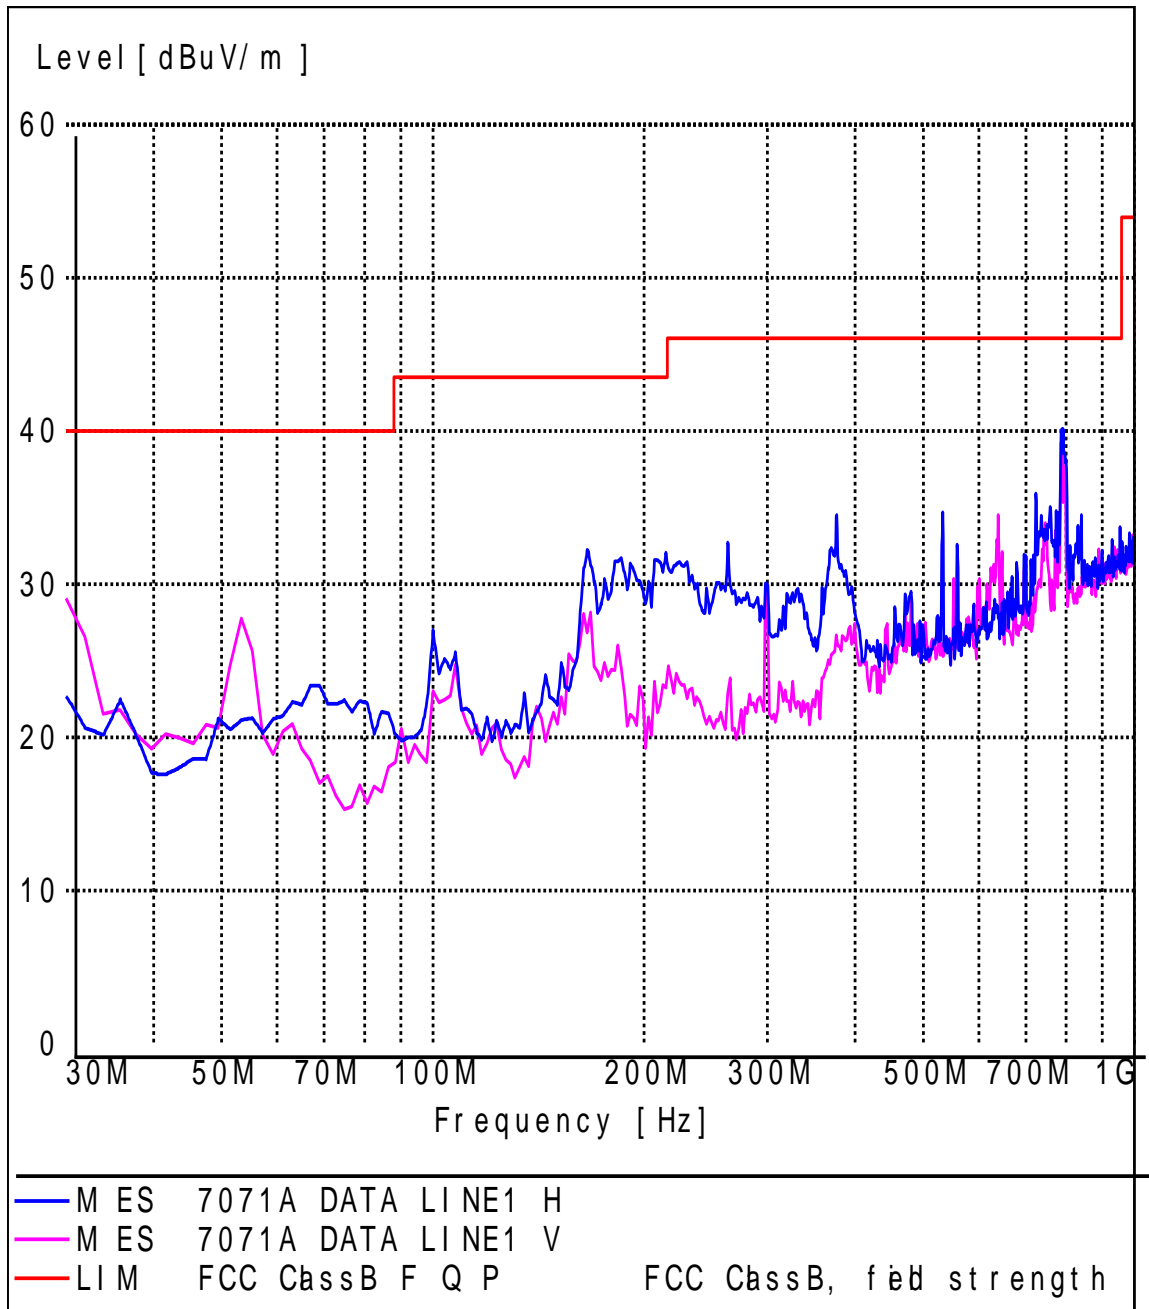


**Radiated Emission**

EUT Name: 7071A  
 Operating Condition: Test Mode 1  
 Test site: SMQ NETC EMC Lab.3m Chamber  
 Antenna Position: Vertical & Horizontal  
 Comment: AC 120V/60Hz  
 Comment: USB: 1#

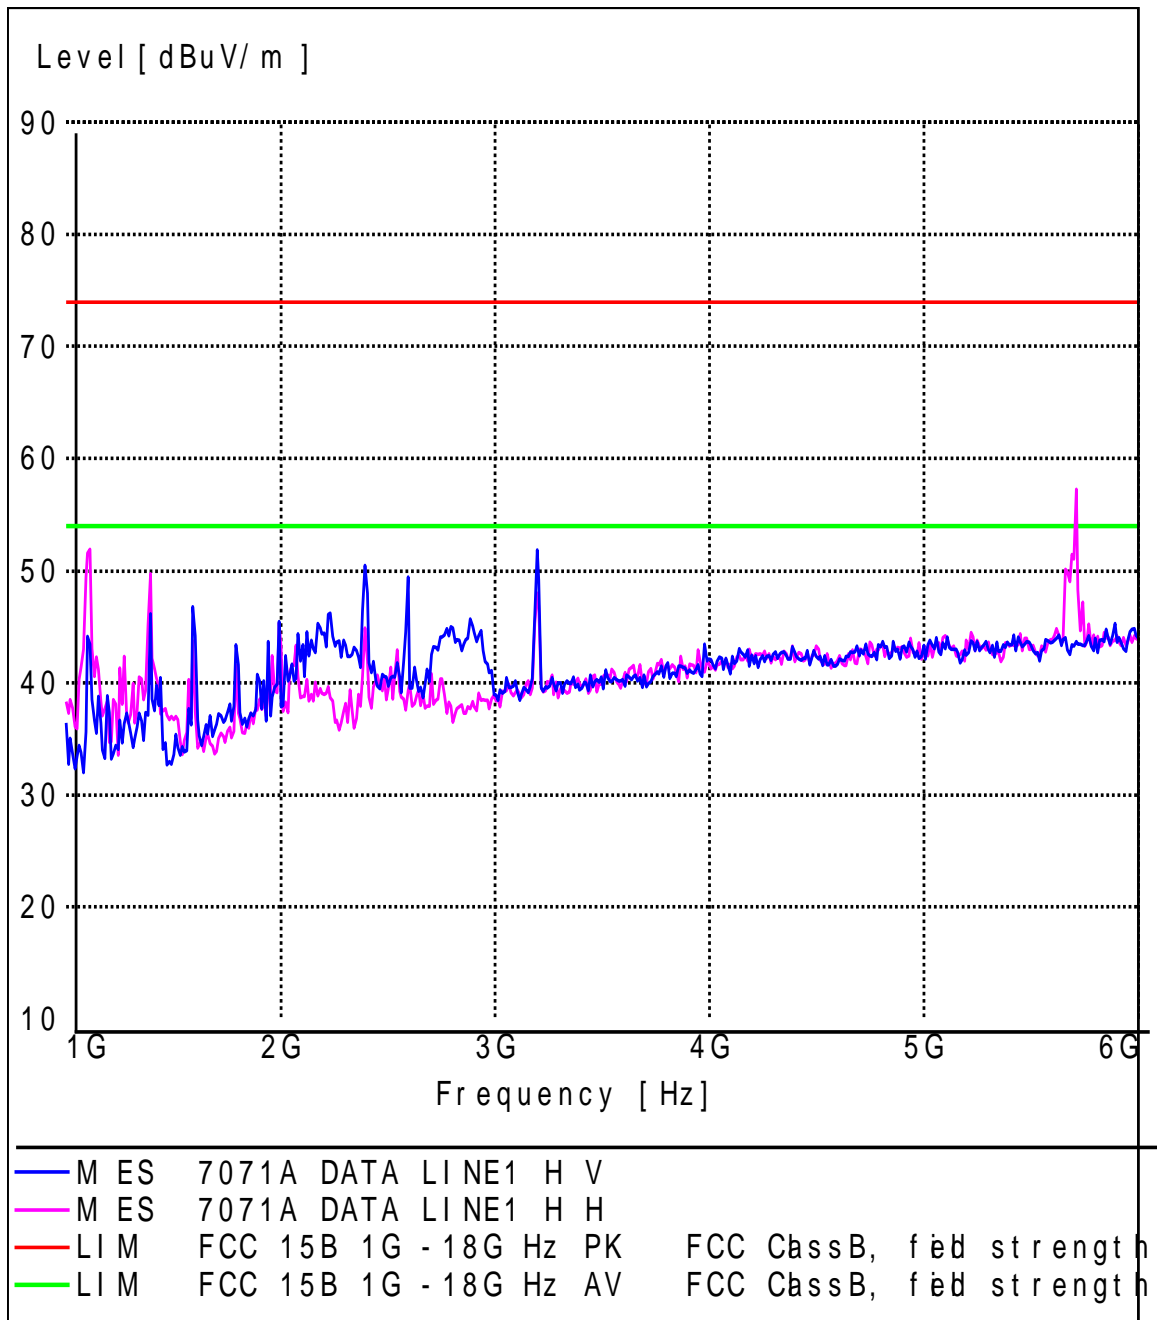


EUT Name: 7071A  
 Operating Condition: Test Mode 1  
 Test site: SMQ NETC EMC Lab.3m Chamber  
 Antenna Position: Horizontal & Vertical  
 Comment: AC 120V60Hz  
 Comment: USB 2#

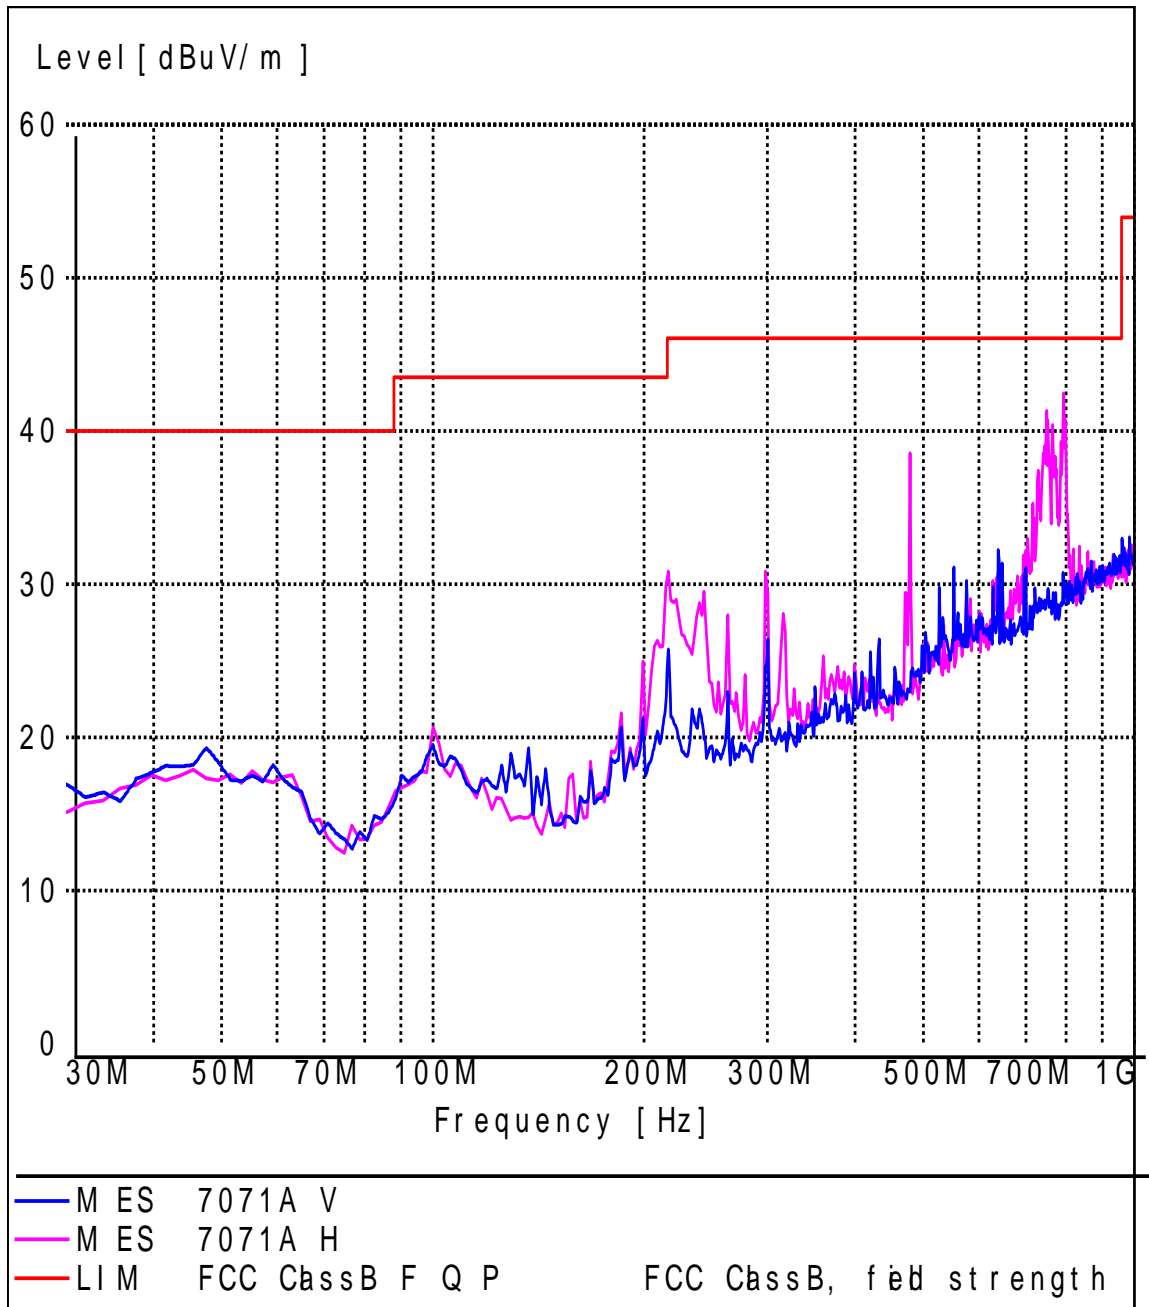

**Radiated Emission**

EUT Name: 7071A  
 Operating Condition: Test Mode 1  
 Test site: SMQ NETC EMC Lab.3m Chamber  
 Antenna Position: Vertical & Horizontal  
 Comment: AC 120V/60Hz  
 Comment: USB: 2#

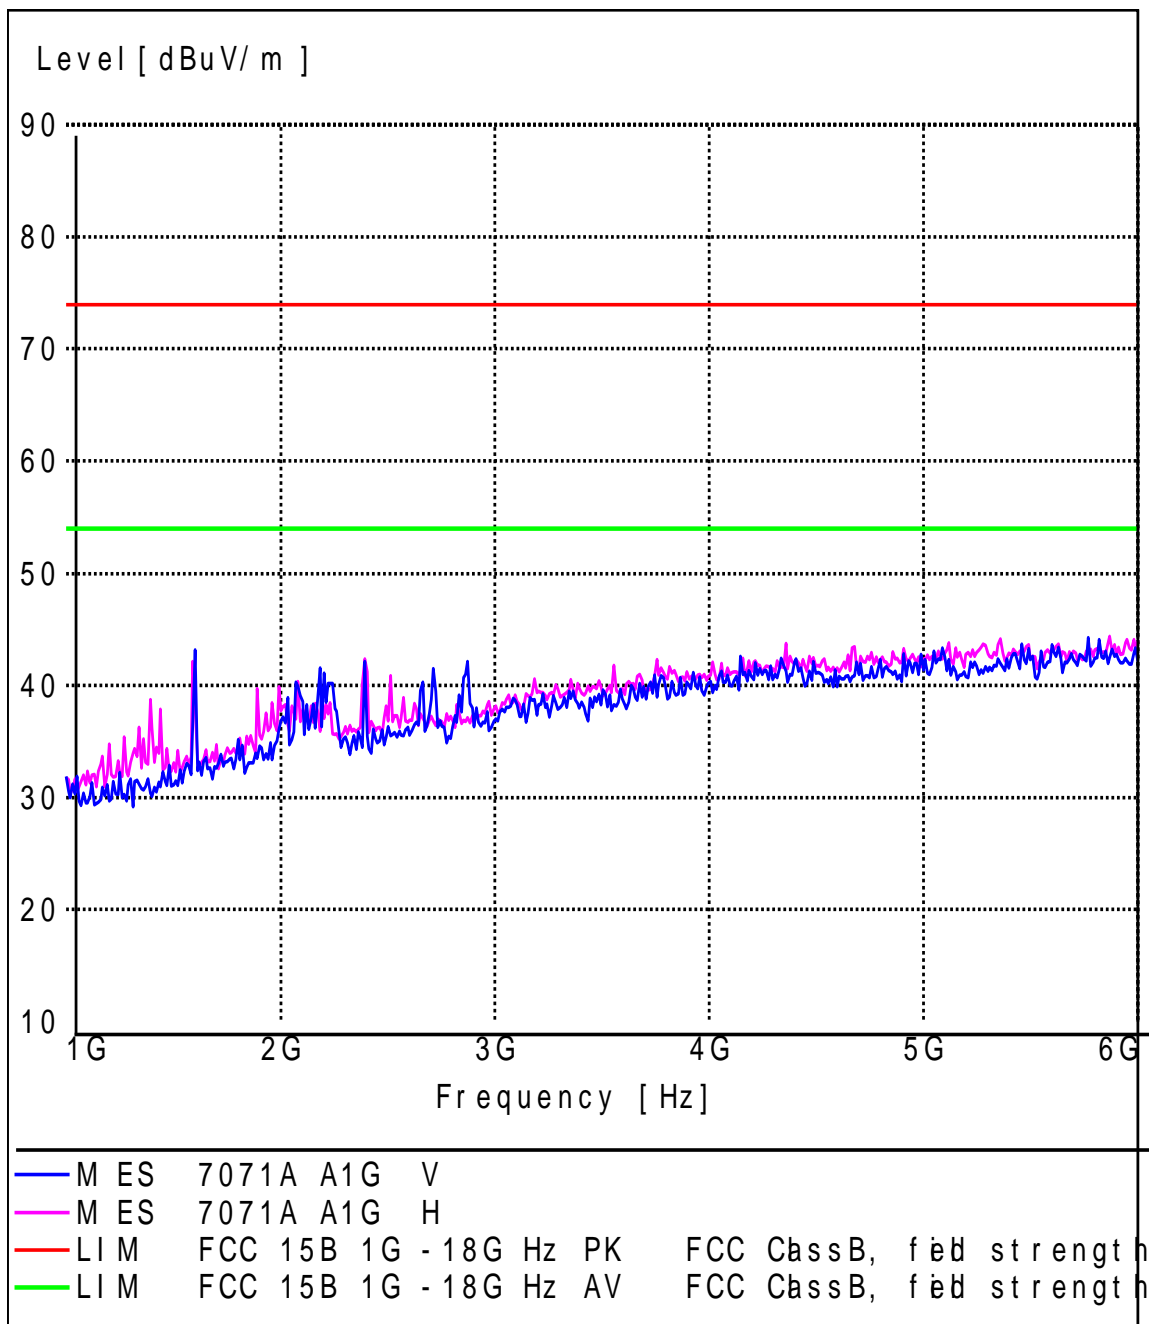

# Radiated Emission


## EUT Information

EUT Model name: 7071A  
Operator Mode: Test Mode 1  
Comment: USB: 1#

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Horizontal  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Copy (2) of FCC Electric Field Strength 1-18GHz operate on 2.4GHz

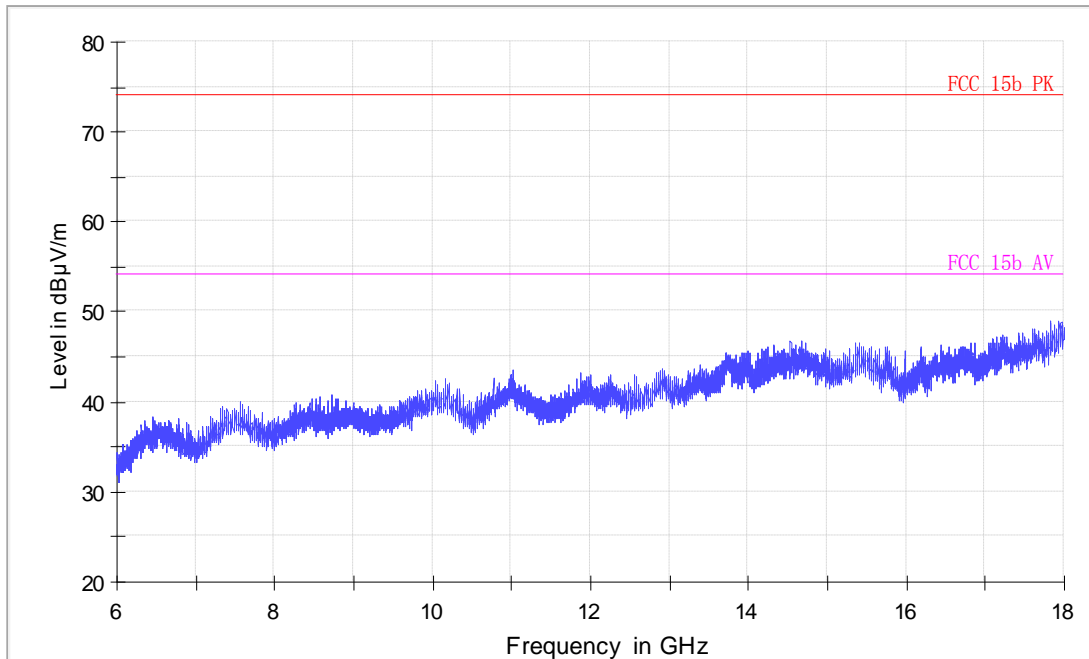

# Radiated Emission


## EUT Information

EUT Model name: 7071A  
Operator Mode: Test Mode 1  
Comment: USB: 1#

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Vertical  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Copy (2) of FCC Electric Field Strength 1-18GHz operate on 2.4GHz

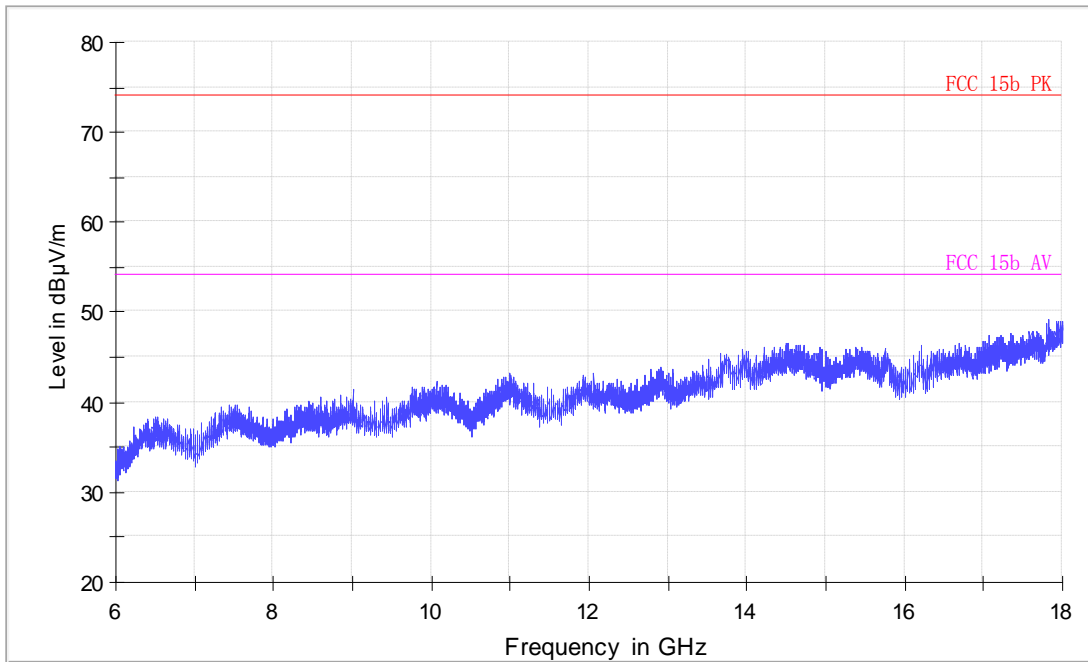

# Radiated Emission


## EUT Information

EUT Model name: 7071A  
Operator Mode: Test Mode 1  
Comment: USB: 2#

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Horizontal  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Copy (2) of FCC Electric Field Strength 1-18GHz operate on 2.4GHz

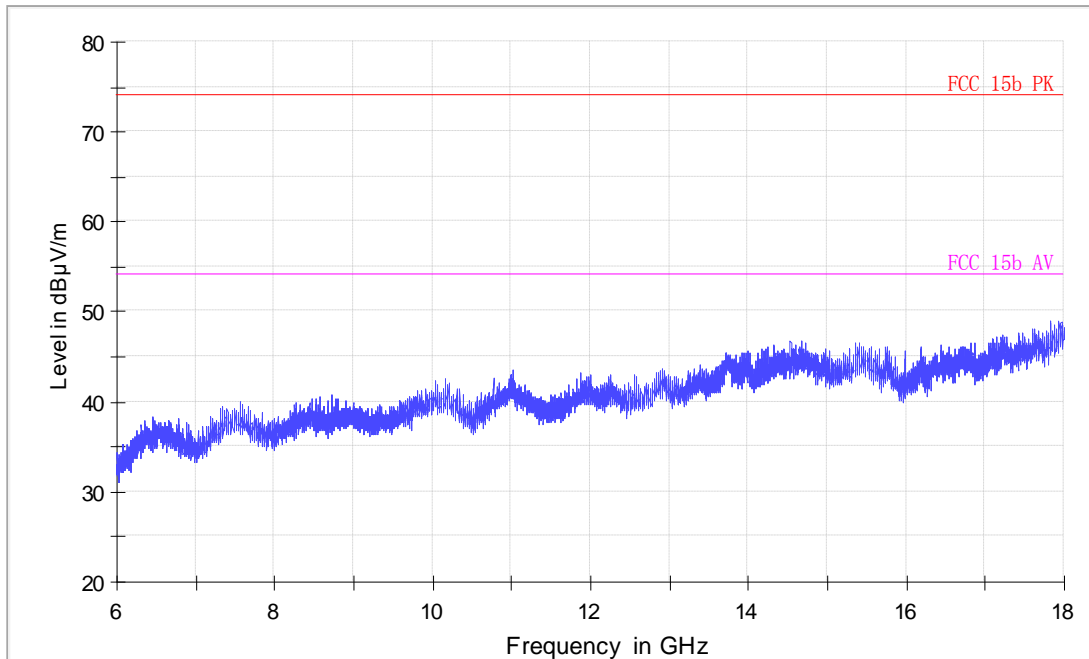



# Radiated Emission

## EUT Information

EUT Model name: 7071A  
Operator Mode: Test Mode 1  
Comment: USB: 2#

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Vertical  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Copy (2) of FCC Electric Field Strength 1-18GHz operate on 2.4GHz

