



FCC PART 15C TEST REPORT

BLUETOOTH LOW ENERGY (BLE) PART

No. I17Z61902-IOT03

for

TCL Communication Ltd.

Mobile Phone

Model Name: 5026J

FCC ID: 2ACCJBT10

with

Hardware Version: V03

Software Version: FD1

Issued Date: 2017-11-27



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:ctl_terminals@caict.ac.cn, website:www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z61902-IOT03	Rev.0	1st edition	2017-11-27

CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE	7
3.4. EUT SET-UPS	8
3.5. NORMAL ACCESSORY SETTING	8
3.6. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	10
6. TEST FACILITIES UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
7.1. PEAK OUTPUT POWER - CONDUCTED	12
7.2. FREQUENCY BAND EDGES	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	12
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED	12
7.5. 6dB BANDWIDTH	12
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL	12
7.7. AC POWERLINE CONDUCTED EMISSION	13
ANNEX A: DETAILED TEST RESULTS	14
A.1. MEASUREMENT METHOD	14
A.2. PEAK OUTPUT POWER - CONDUCTED	15
A.3. FREQUENCY BAND EDGES - CONDUCTED	16
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	18



A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED	27
A.6. 6dB BANDWIDTH.....	31
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL	34
A.8. AC POWERLINE CONDUCTED EMISSION	37
ANNEX E: ACCREDITATION CERTIFICATE.....	44

1. Test Laboratory

1.1. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-11-6

Testing End Date: 2017-11-27

1.4. Signature




Wu Le

(Prepared this test report)



Sun Zhenyu

(Reviewed this test report)



Lv Songdong

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park,
Pudong Area,Shanghai,201203,P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park,
Pudong Area,Shanghai,201203,P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model Name	5026J
FCC ID	2ACCJBT10
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	015088000200061	V03	FD1
EUT2	015088000200186	V03	FD1
EUT3	353441090200048	V03	FD1
EUT4	/	V03	FD1

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN	Remarks
AE1	Battery	/	inbuilt
AE3	Charger	/	17TCT-CH-0482
AE4	Charger	/	17TCT-CH-0736
AE5	USB Cable	/	16TCT-DC-0002
AE31	Charger	/	17TCT-CH-1145 NEW Charger
AE41	Charger	/	17TCT-CH-1155 NEW Charger

AE1

Model	TLp029C7
Manufacturer	VEKEN
Capacitance	2900mAh
Nominal voltage	3.85V

AE3

Model	CBA0058AGAC5
Manufacturer	PUAN
Length of cable	/



AE4

Model CBA0058AGAC2
Manufacturer TENPAO
Length of cable /

AE5

Model CDA3122005C1
Manufacturer JUWEI
Length of cable 100cm

AE31

Model CBA0058AMAC5
Manufacturer PUAN
Length of cable /

AE41

Model CBA0058AMAC2
Manufacturer TENPAO
Length of cable /

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.10	EUT1 + AE1+ AE3+ AE5	Charger
Set.11	EUT1 + AE1+ AE4+ AE5	Charger
Set.21	EUT3 + AE1+ AE31+ AE5	Charger
Set.22	EUT3 + AE1+ AE41+ AE5	Charger

3.5. Normal Accessory setting

Fully charged battery is used during the test.

3.6. General Description

The Equipment Under Test (EUT) is a model of Mobile Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2016
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

P Pass, The EUT complies with the essential requirements in the standard.

F Fail, The EUT does not comply with the essential requirements in the standard

NA Not Applicable, The test was not applicable

NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	P
Peak Output Power - Conducted	15.247 (b)(1)	P
Maximum Power Spectral Density Level	15.247(e)	P
Transmitter Spurious Emission - Conducted	15.247 (d)	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
Frequency Band Edges	15.247 (d)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

Note: Mobile phone manufactured by TCL Communication Ltd. added a charger. According to the declaration of changes, the following test items and test modes were performed:

Test Item	Mode or Feature
AC Powerline Conducted Emission	New Charger

Other results are cited from the initial model. The report number for initial model is I17Z61900-IOT04.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2018-09-30
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2018-08-03
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2018-03-05
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESCI 7	100948	Rohde & Schwarz	1 year	2018-07-25
2	Loop antenna	HFH2-Z2	829324/00 7	Rohde & Schwarz	3 years	2017-12-16
3	BiLog Antenna	VULB9163	235	Schwarzbeck	3 years	2019-05-10
4	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	3 years	2017-12-15
5	Vector Signal Analyzer	FSV	101047	Rohde & Schwarz	1 year	2018-07-22

7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------



7.7. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

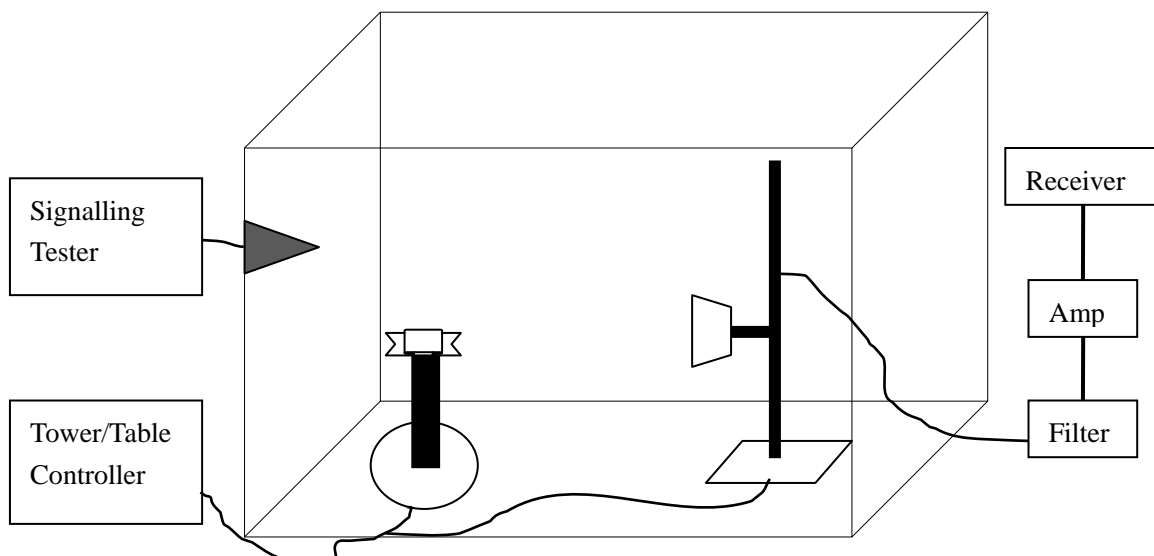



A.2. Peak Output Power - Conducted

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
0	2402	-5.41	P
19	2440	-5.30	P
39	2480	-5.87	P

Conclusion: PASS

A.3. Frequency Band Edges - Conducted

Method of Measurement: See ANSI C63.10-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel No.	Frequency (MHz)	Hopping	Band Edge Power (dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-45.53	P
39	2480	Hopping OFF	Fig.2	-48.16	P

Conclusion: PASS

Test graphs as below

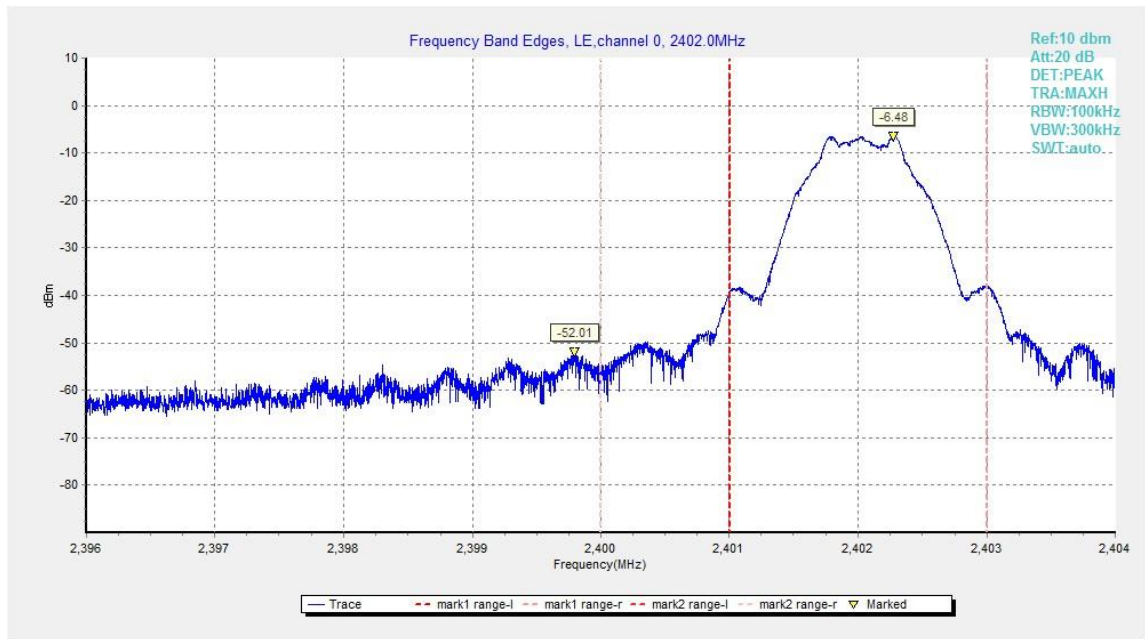


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

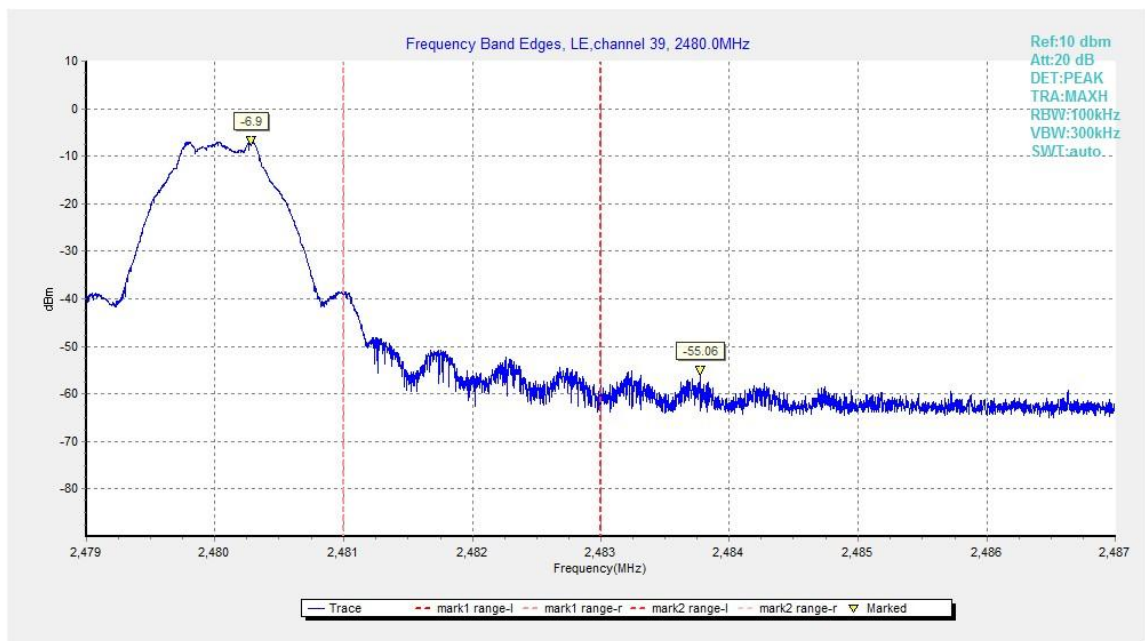


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off



A.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to ≥ 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
 2. Set VBW = 300 kHz.
 3. Set span to encompass the spectrum to be examined.
 4. Detector = peak.
 5. Trace Mode = max hold.
 6. Sweep = auto couple.
 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:
For GFSK

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

Conclusion: PASS

Test graphs as below

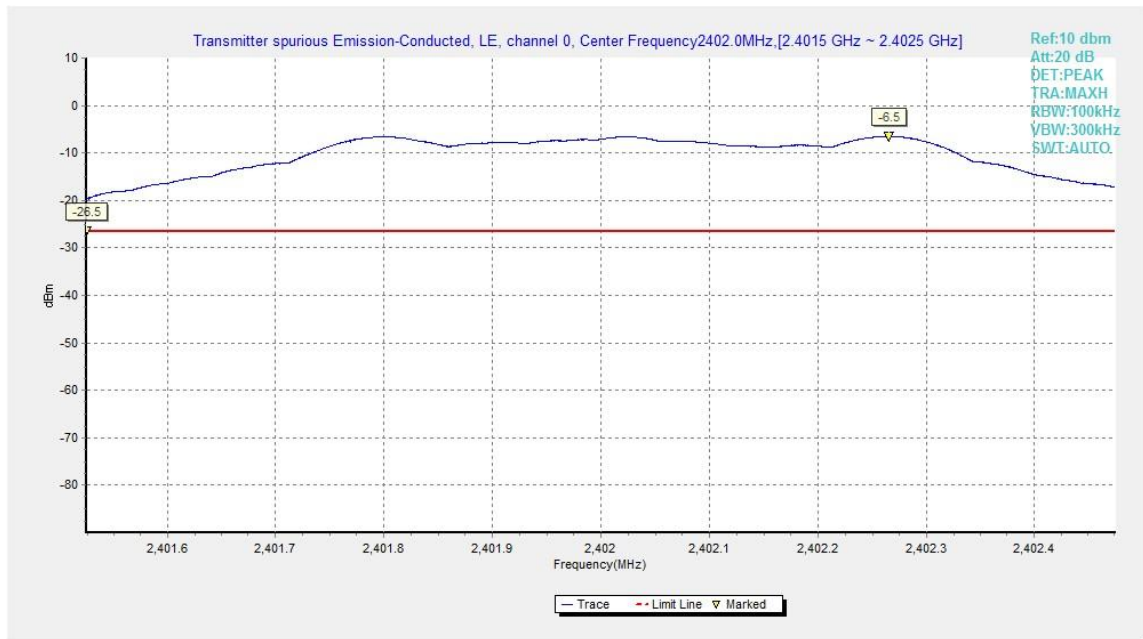


Fig.3. Transmitter Spurious Emission - Conducted: GFSK, 2402MHz

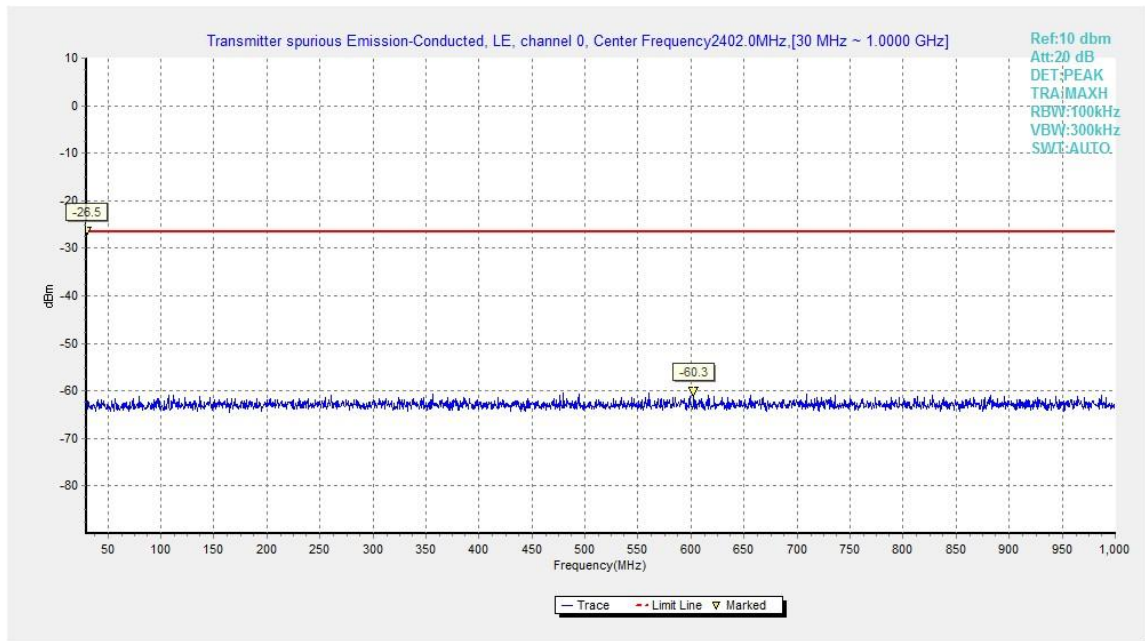


Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

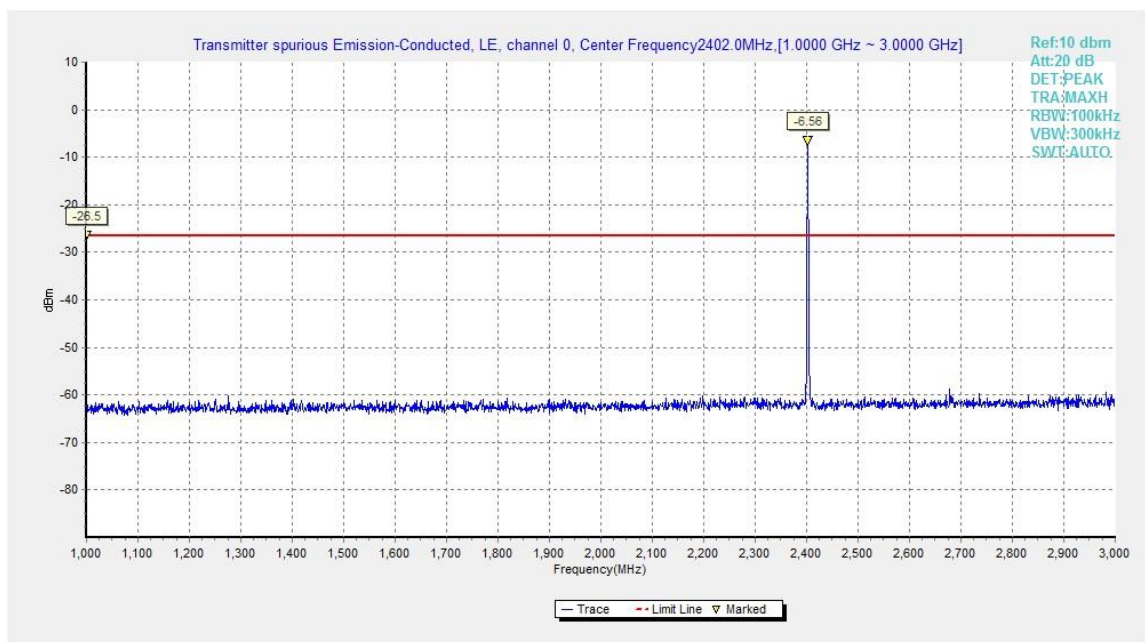


Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

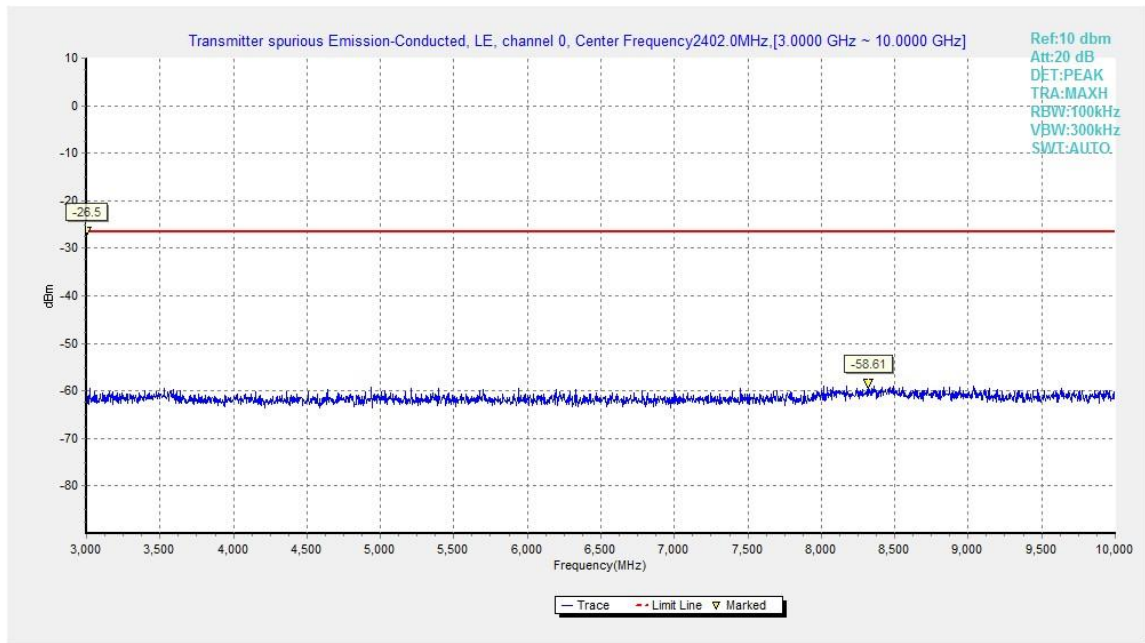


Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 3GHz - 10GHz

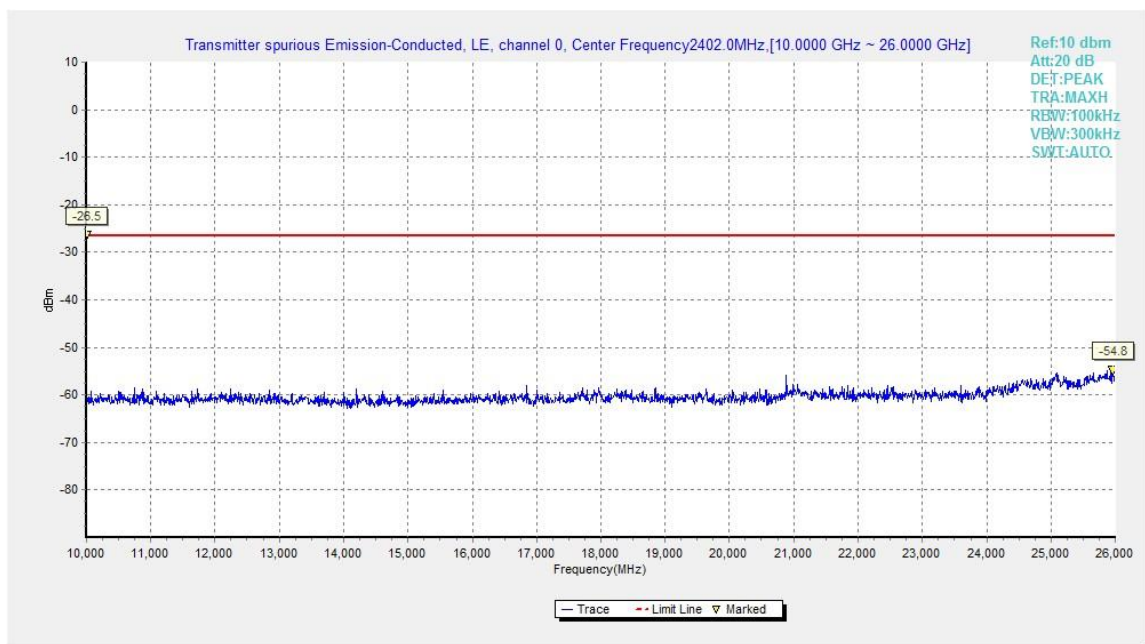


Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 10GHz - 26GHz

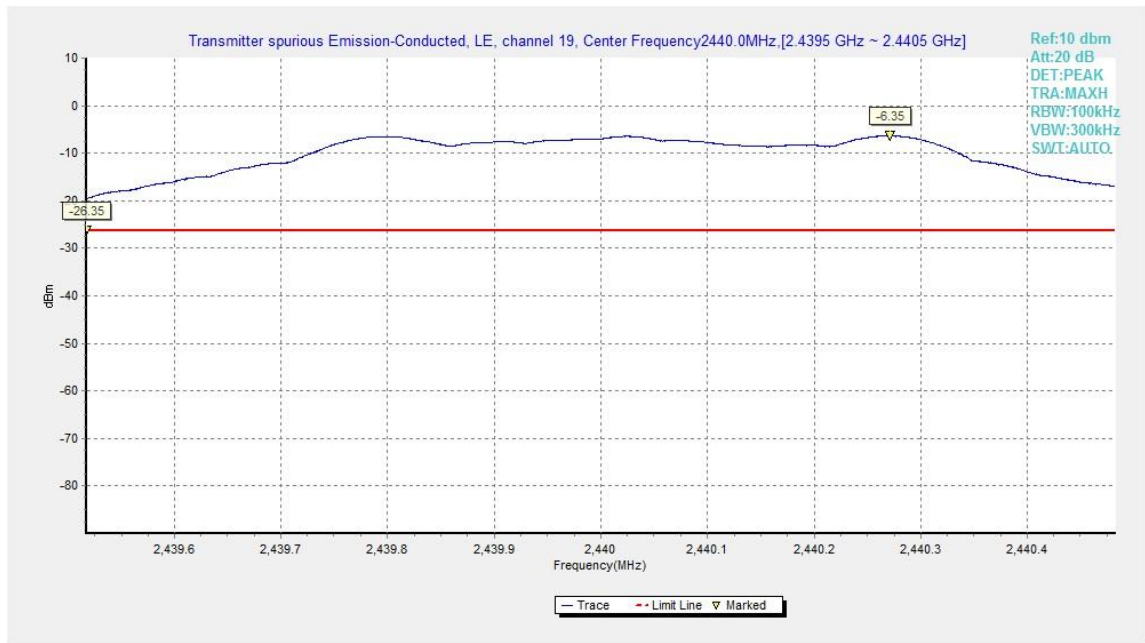


Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

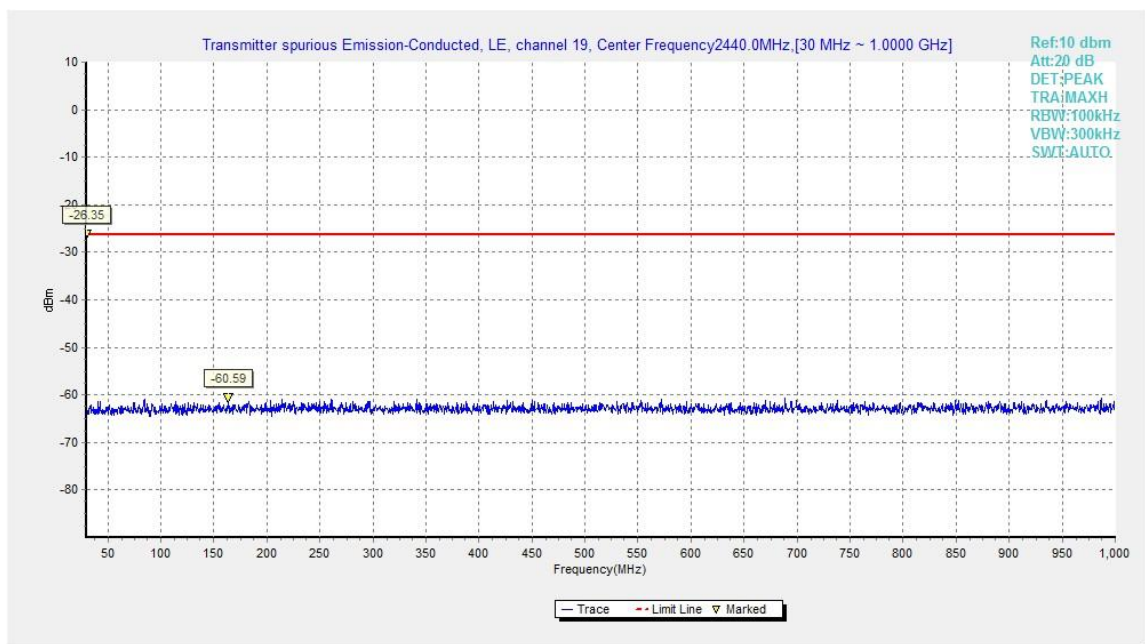


Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

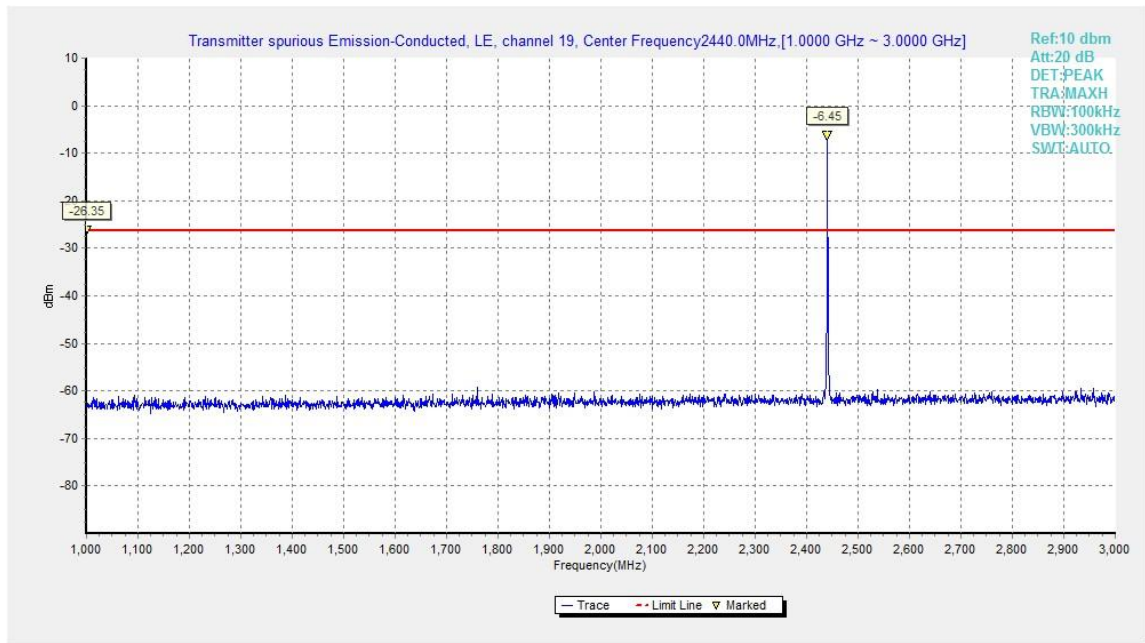


Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

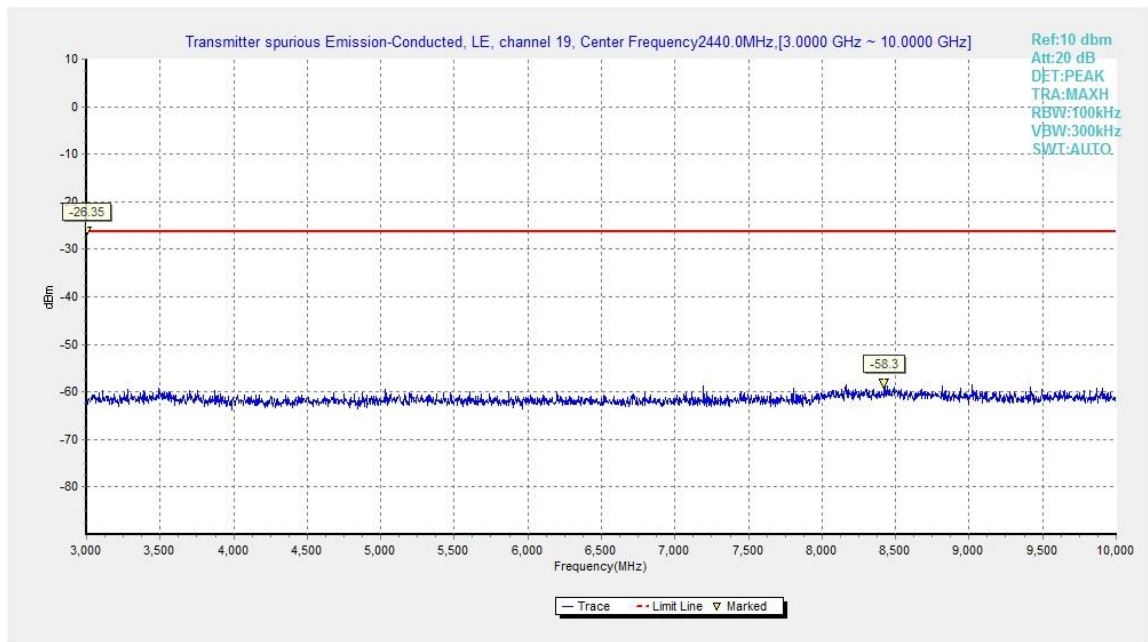


Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

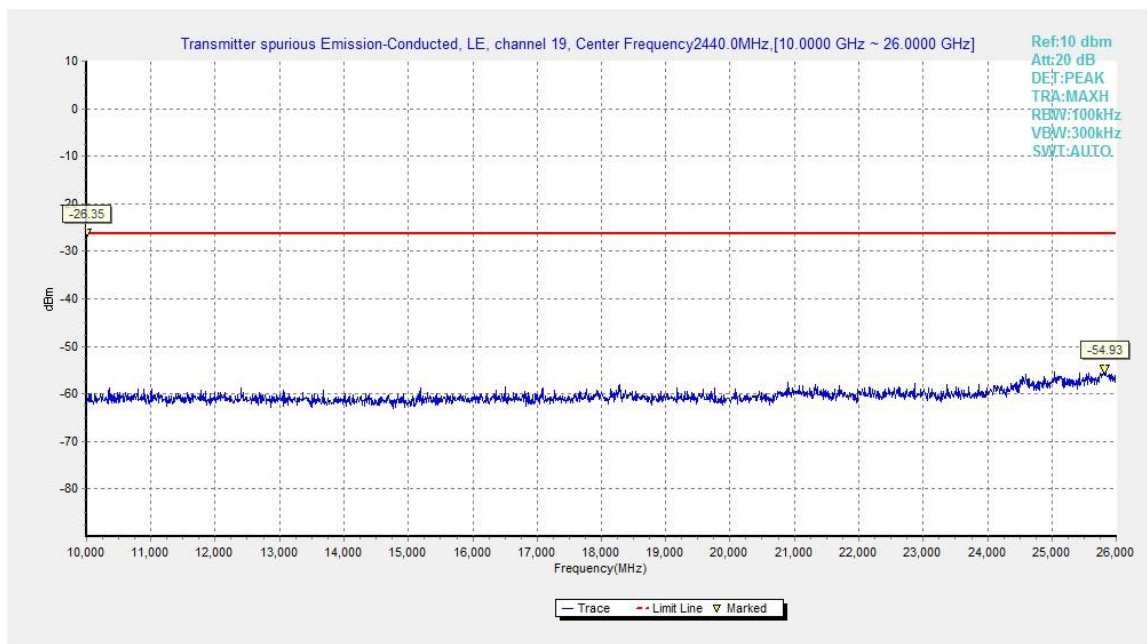


Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

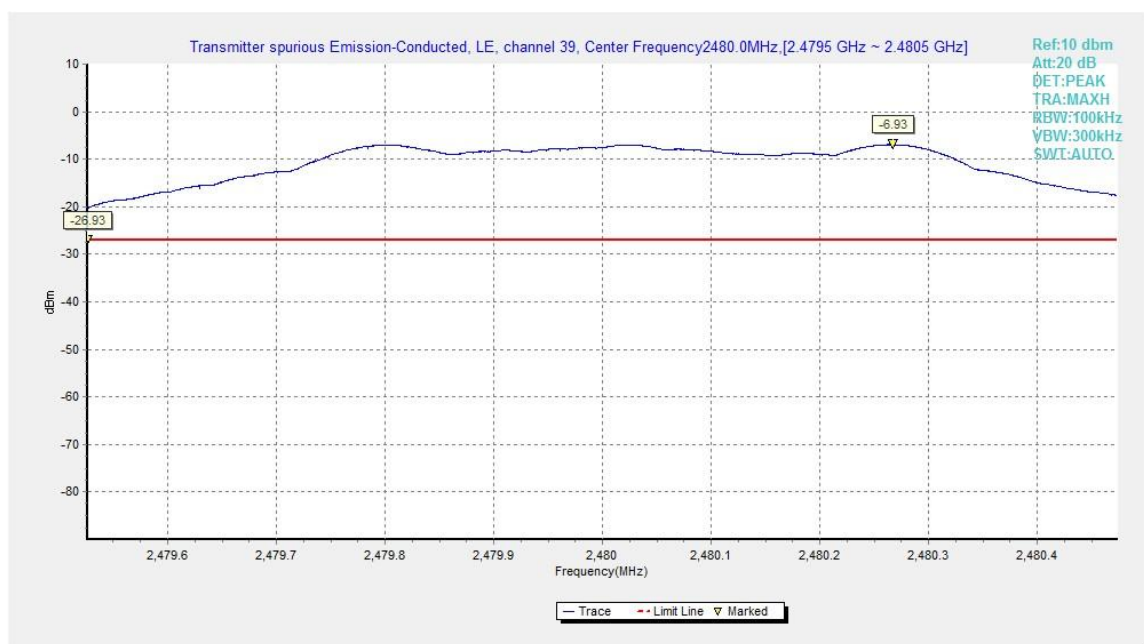


Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

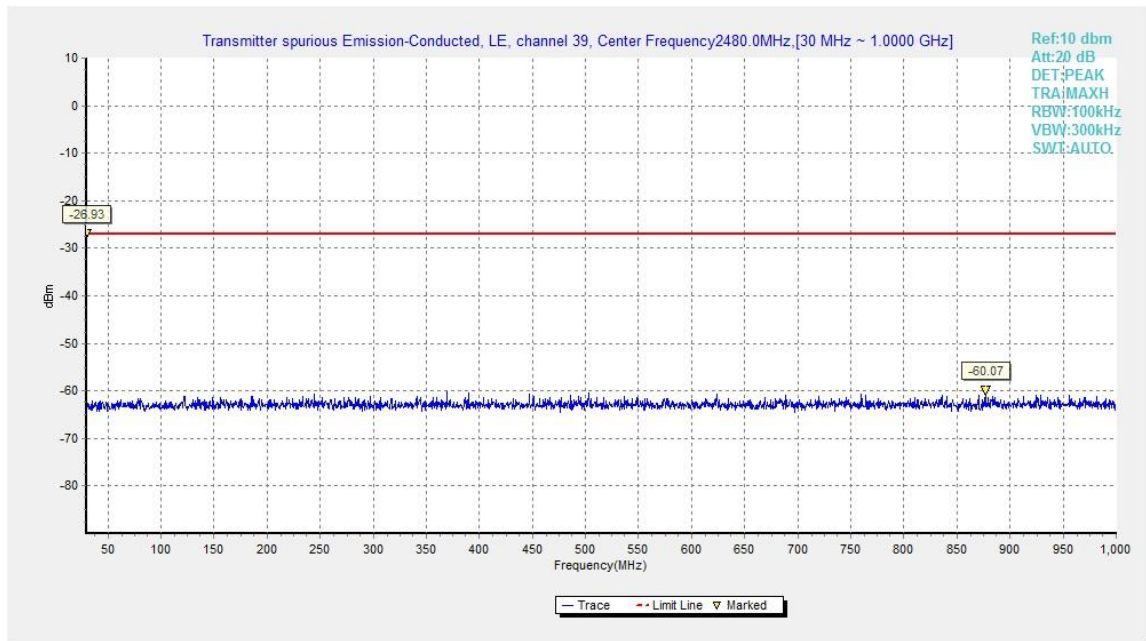


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

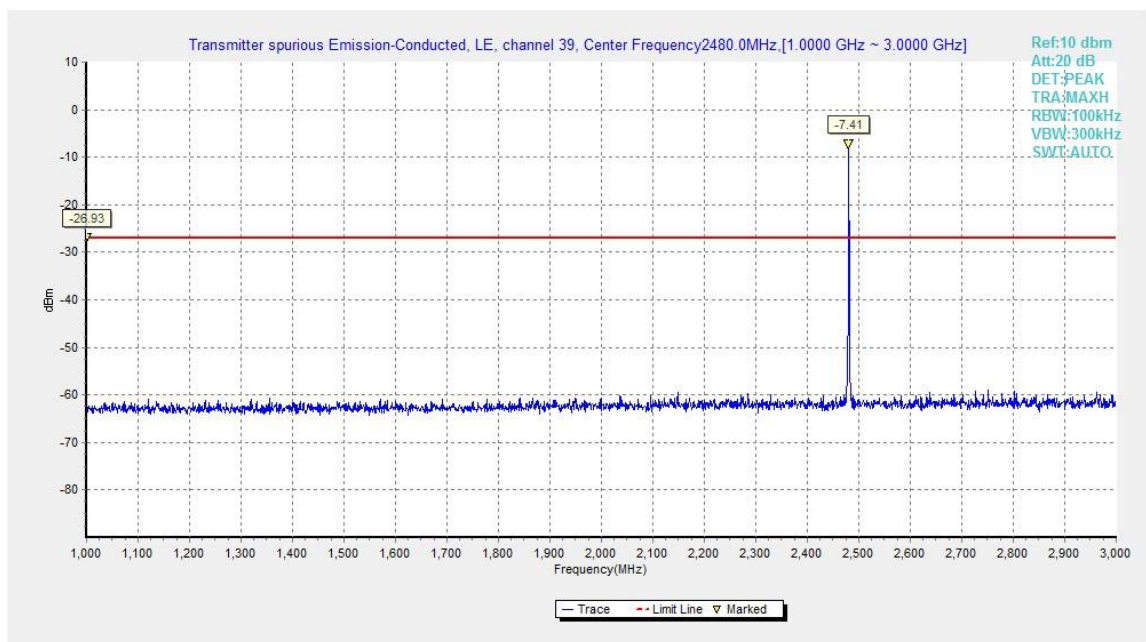


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

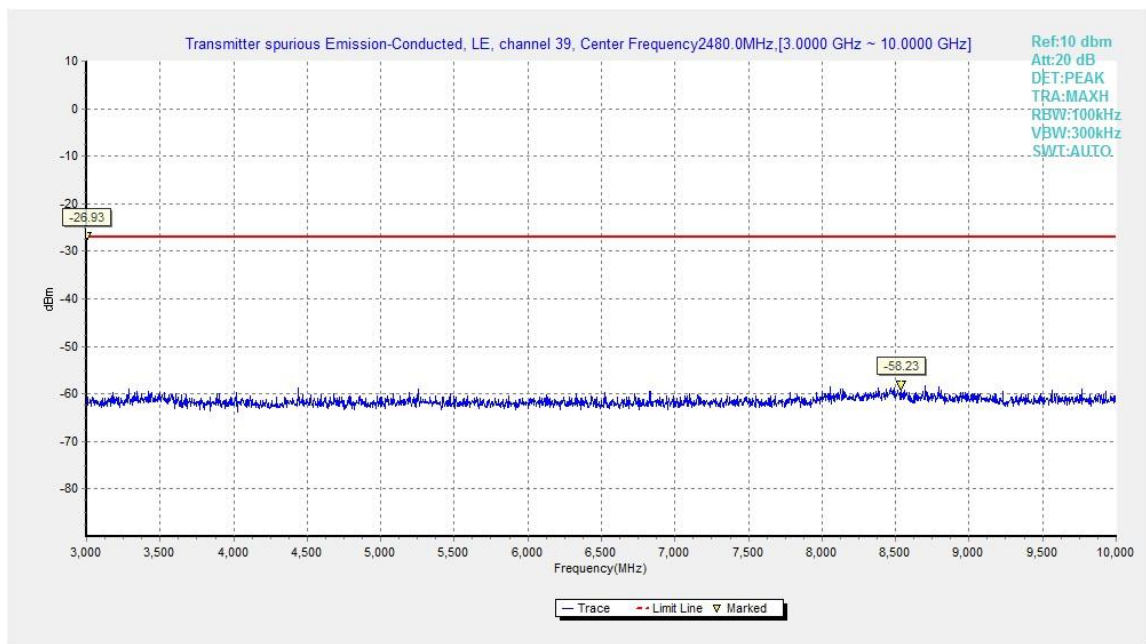


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

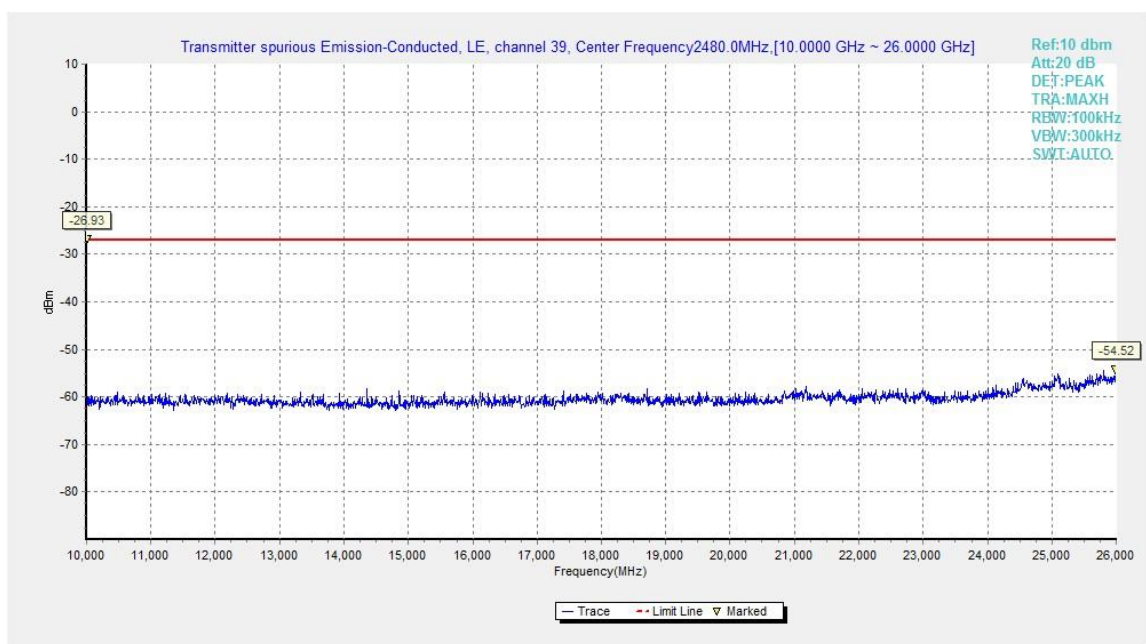


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
2440 MHz	9 kHz ~ 30 MHz	--	P
	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P



2480 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.18	P
Power	2.45GHz~2.5GHz---H	Fig.19	P
For all channels	18 GHz ~ 26.5 GHz	--	P

GFSK 2402MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2382.800	46.32	2.9	32.0	11.43	54.0	7.7	H	155	8
2389.700	46.32	2.9	32.0	11.47	54.0	7.7	H	155	28
4803.700	36.18	-32.9	34.5	34.53	54.0	17.8	H	155	246
7205.800	38.53	-31.6	36.1	34.06	54.0	15.5	H	155	249
9607.900	38.13	-30.0	37.0	31.18	54.0	15.9	H	155	186
12010.000	43.44	-29.8	39.3	33.97	54.0	10.6	H	155	128

GFSK 2440MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2386.900	46.33	2.9	32.0	11.46	54.0	7.7	H	155	92
2484.000	47.09	2.9	32.7	11.41	54.0	6.9	H	155	26
4882.000	36.04	-32.7	34.5	34.25	54.0	18.0	H	155	222
7322.800	38.35	-31.9	36.1	34.19	54.0	15.7	H	155	248
9763.600	38.74	-30.6	37.2	32.12	54.0	15.3	H	155	46
12205.300	43.97	-29.4	39.2	34.18	54.0	10.0	H	155	68

GFSK 2480MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.18	2.9	32.8	11.49	54.0	6.8	H	155	24
2488.800	46.91	2.9	32.6	11.36	54.0	7.1	H	155	336
4960.300	36.01	-33.4	34.5	34.88	54.0	18.0	H	155	248
7439.800	38.33	-31.8	36.0	34.07	54.0	15.7	H	155	268
9920.200	40.86	-29.9	37.4	33.39	54.0	13.1	H	155	290
12399.700	44.26	-29.5	39.1	34.63	54.0	9.7	H	155	300

GFSK 2402MHz–Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2386.468	59.39	2.9	32.0	24.52	74.0	14.6	H	155	248
2388.904	59.88	2.9	32.0	25.03	74.0	14.1	H	155	268
4803.700	41.72	-32.9	34.5	40.07	74.0	32.3	V	155	352
7205.800	43.67	-31.6	36.1	39.20	74.0	30.3	V	155	352
9607.900	45.84	-30.0	37.0	38.89	74.0	28.2	V	155	176
12010.000	48.53	-29.8	39.3	39.06	74.0	25.5	H	155	132

GFSK 2440MHz–Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2369.600	47.89	-32.8	32.0	48.71	74.0	26.1	H	155	88
2536.600	48.63	-32.7	32.9	48.43	74.0	25.4	H	155	22
4882.000	42.07	-32.7	34.5	40.28	74.0	31.9	V	155	220
7322.800	43.45	-31.9	36.1	39.29	74.0	30.6	V	155	242
9763.600	46.48	-30.6	37.2	39.85	74.0	27.5	V	155	44
12205.300	48.60	-29.4	39.2	38.81	74.0	25.4	V	155	66

GFSK 2480MHz–Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.780	59.95	2.9	32.8	24.26	74.0	14.1	H	155	110
2493.030	60.09	2.9	32.5	24.66	74.0	13.9	V	155	132
4960.300	42.10	-33.4	34.5	40.97	74.0	31.9	H	155	242
7439.800	43.45	-31.8	36.0	39.19	74.0	30.6	V	155	264
9920.200	46.87	-29.9	37.4	39.40	74.0	27.1	V	155	286
12399.700	48.60	-29.5	39.1	38.97	74.0	25.4	V	155	308

Conclusion: PASS

Test graphs as below for Set.10:

RE - Power-2.38GHz-2.45GHz

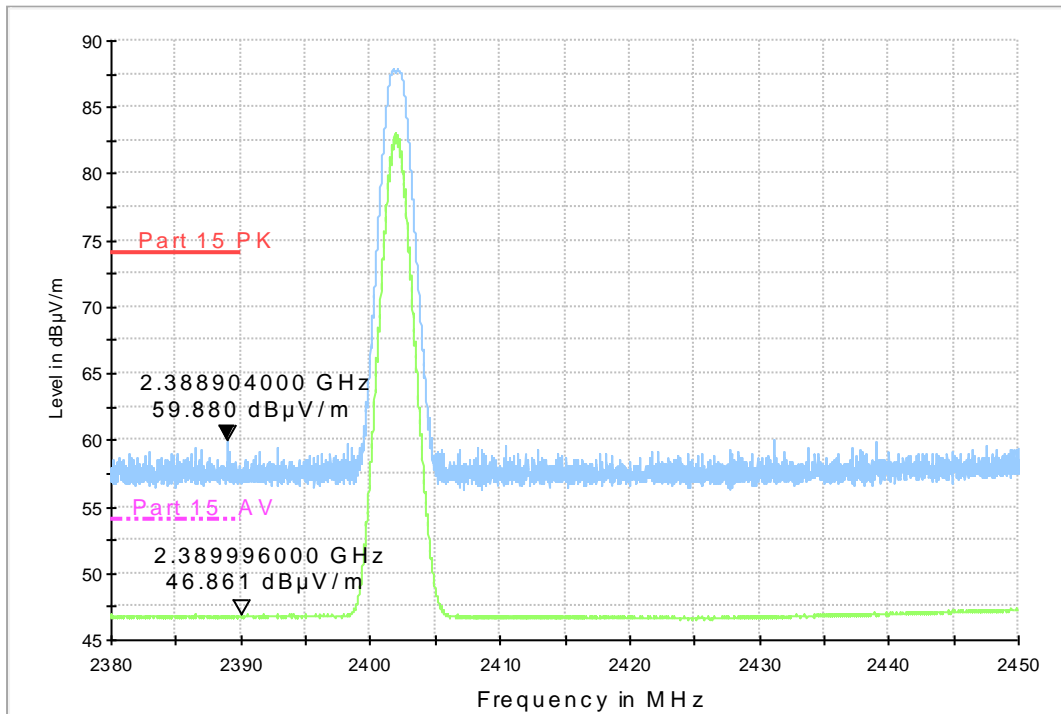


Fig.18. Transmitter Spurious Emission - Radiated (Power): GFSK low channel

RE - Power-2.45GHz-2.5GHz

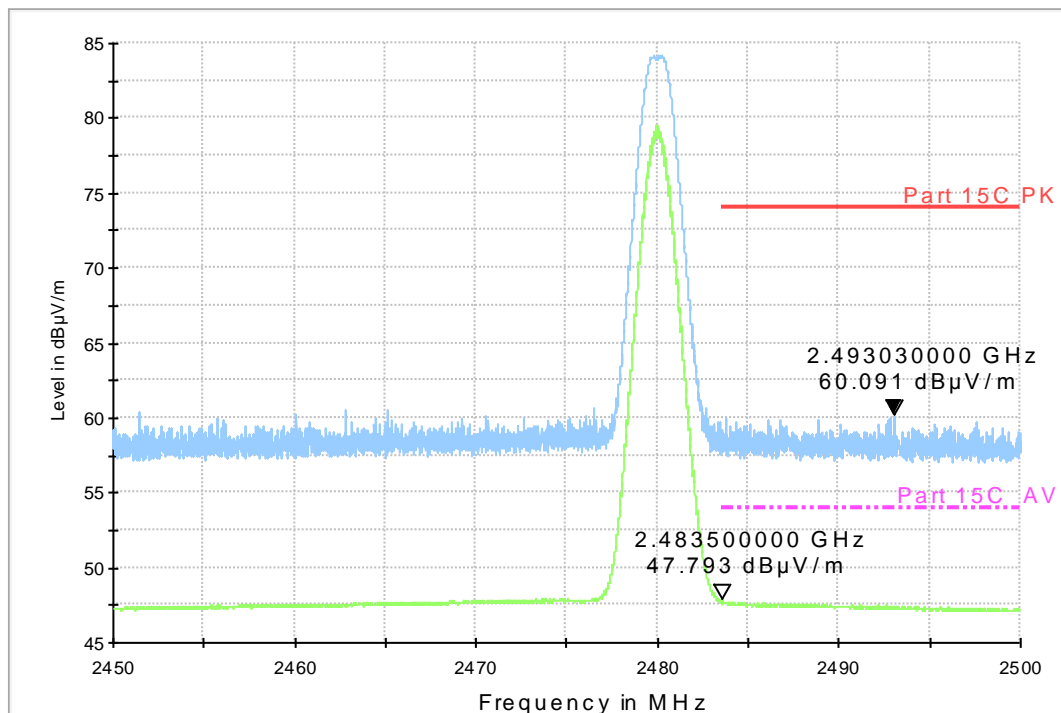


Fig.19. Transmitter Spurious Emission - Radiated (Power): GFSK high channel



A.6. 6dB Bandwidth

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.20	714.50	P
19	2440	Fig.21	712.50	P
39	2480	Fig.22	712.00	P

Conclusion: PASS

Test graphs as below:

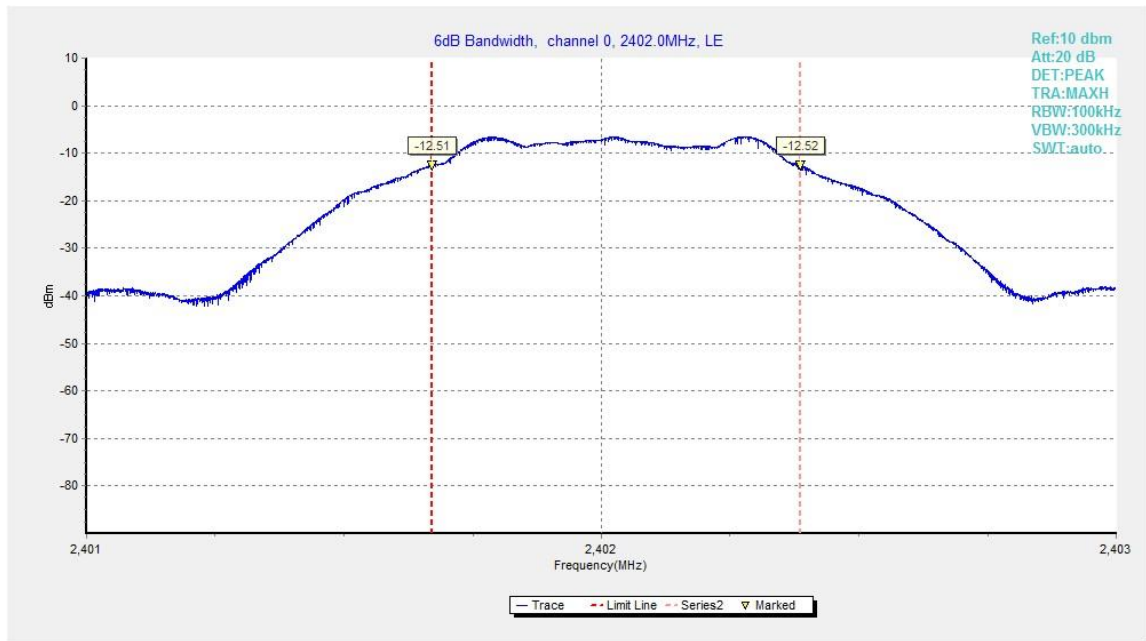


Fig.20. 6dB Bandwidth: GFSK, 2402 MHz

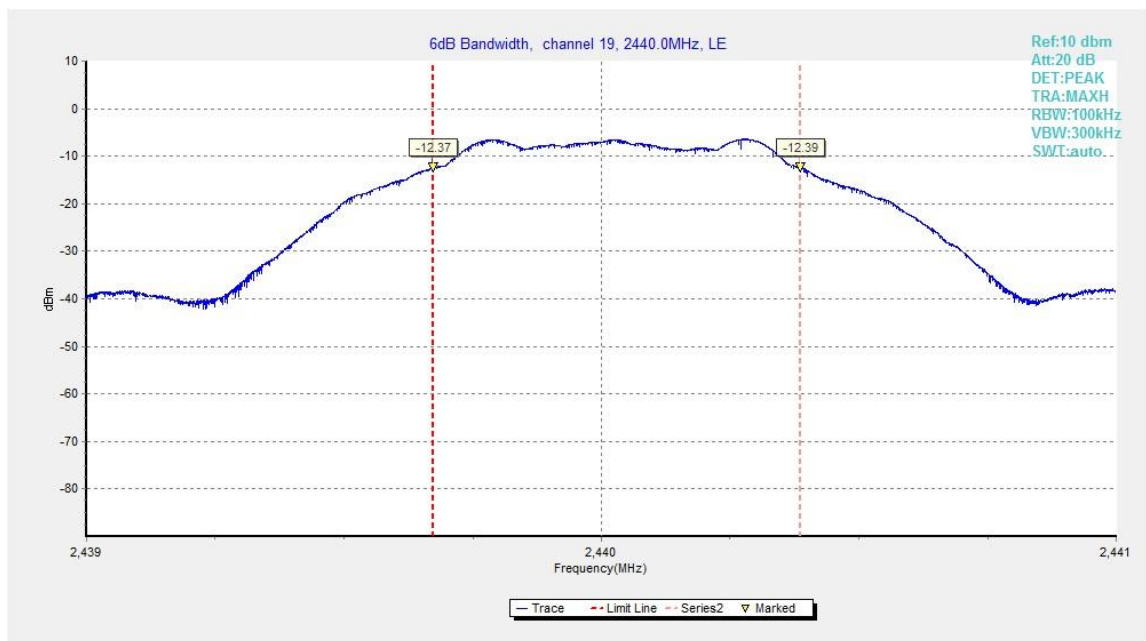


Fig.21. 6dB Bandwidth: GFSK, 2440 MHz

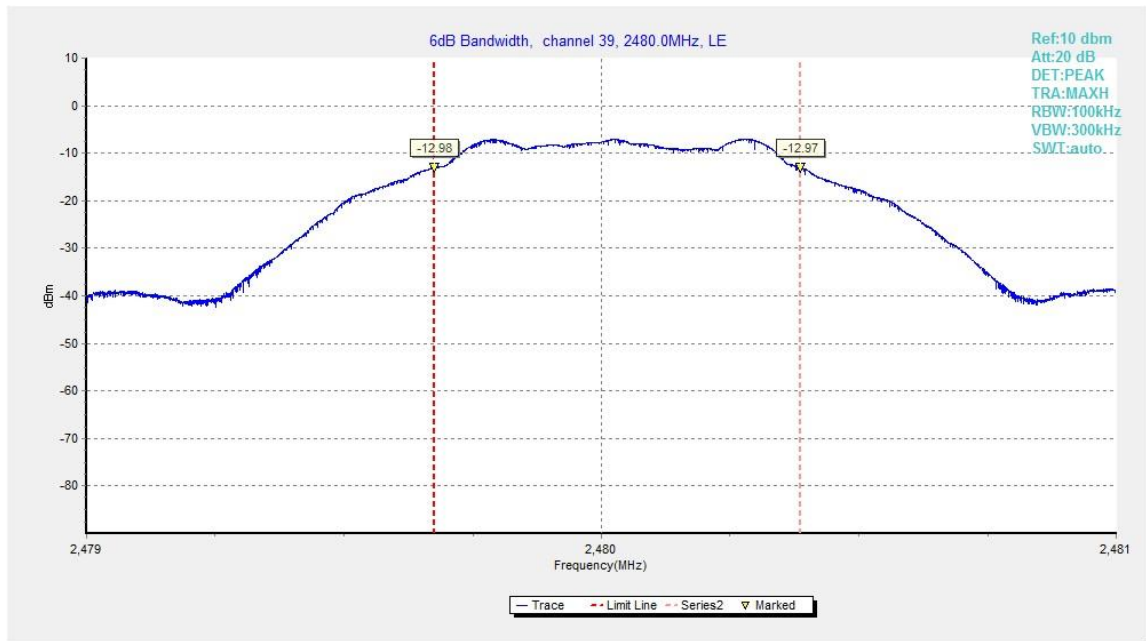


Fig.22. 6dB Bandwidth: GFSK, 2480 MHz



A.7. Maximum Power Spectral Density Level

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
0	2402	Fig.23	-21.37	P
19	2440	Fig.24	-21.19	P
39	2480	Fig.25	-21.78	P

Test graphs as below:

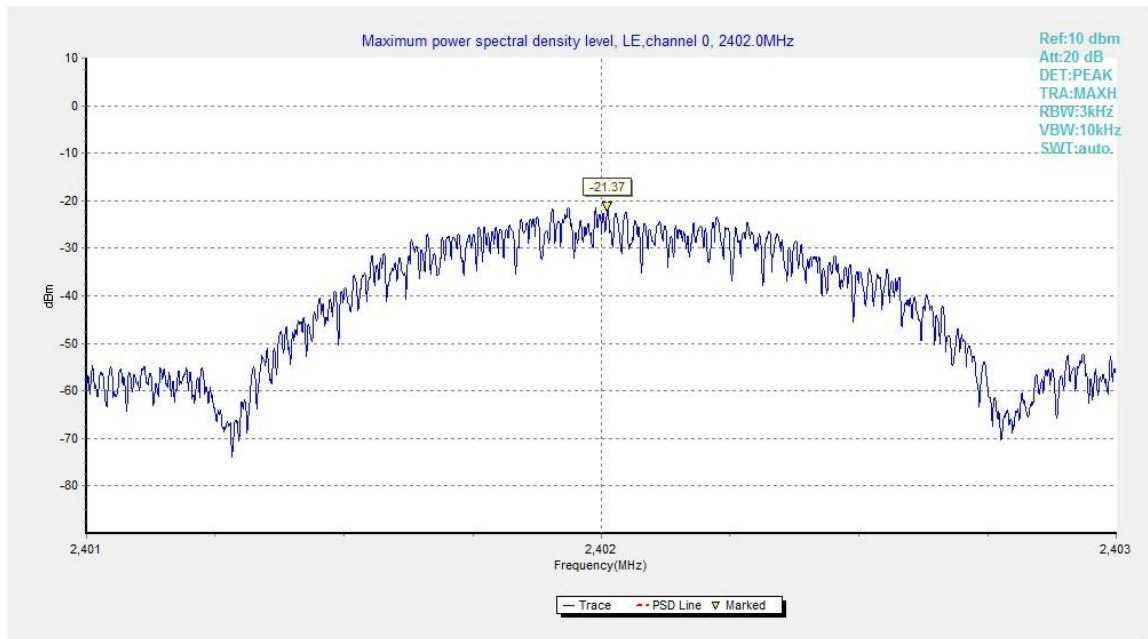


Fig.23. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

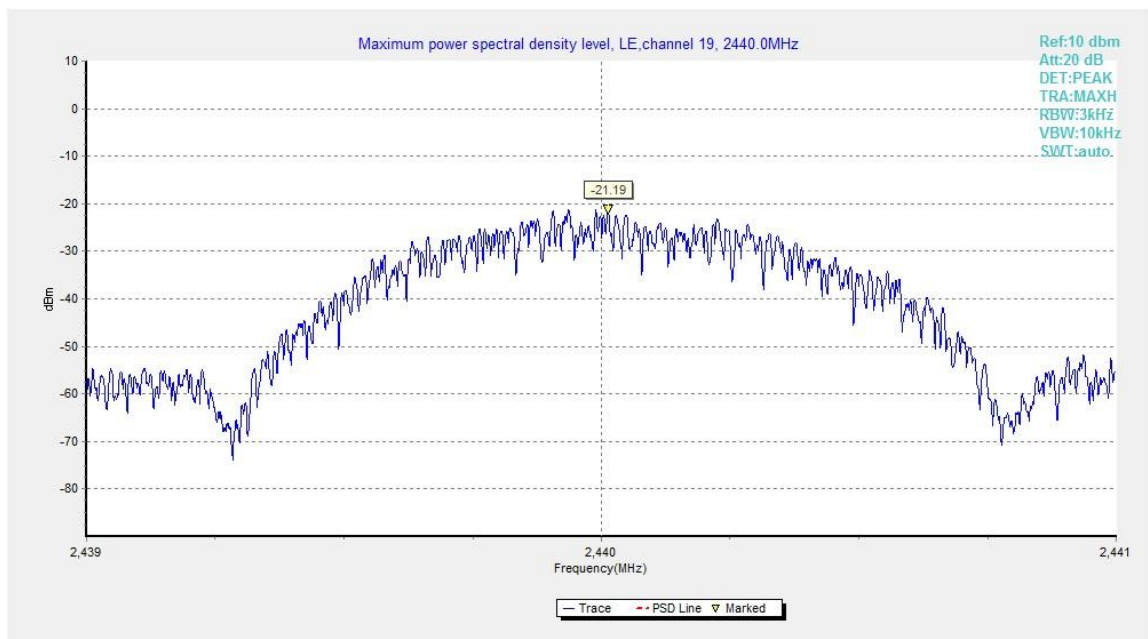


Fig.24. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

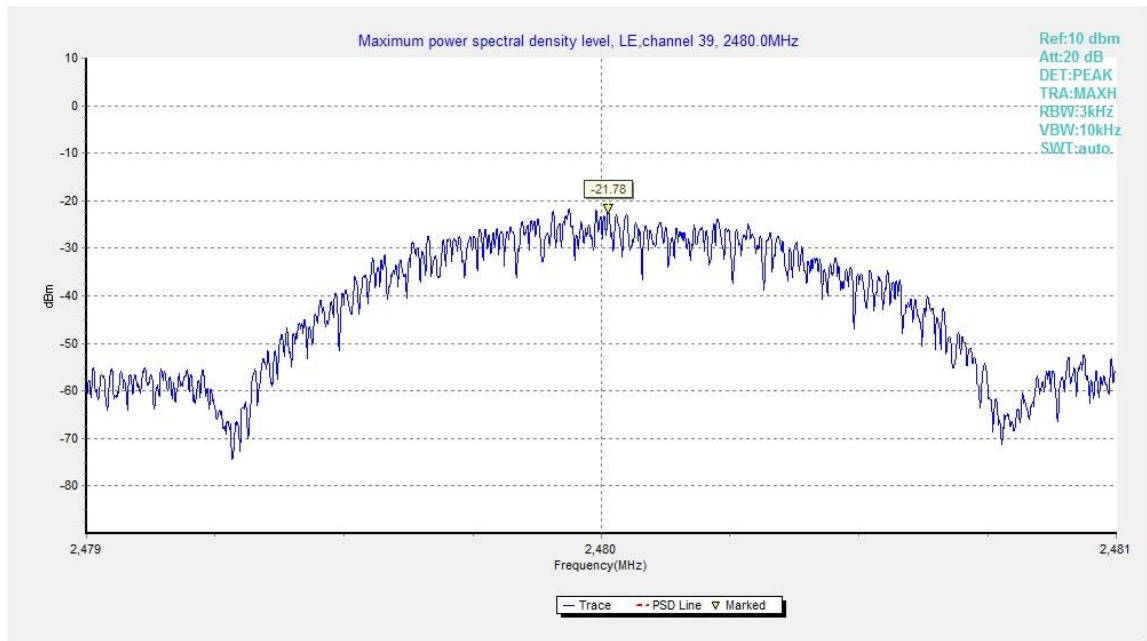


Fig.25. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

A.8. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic: Set.10

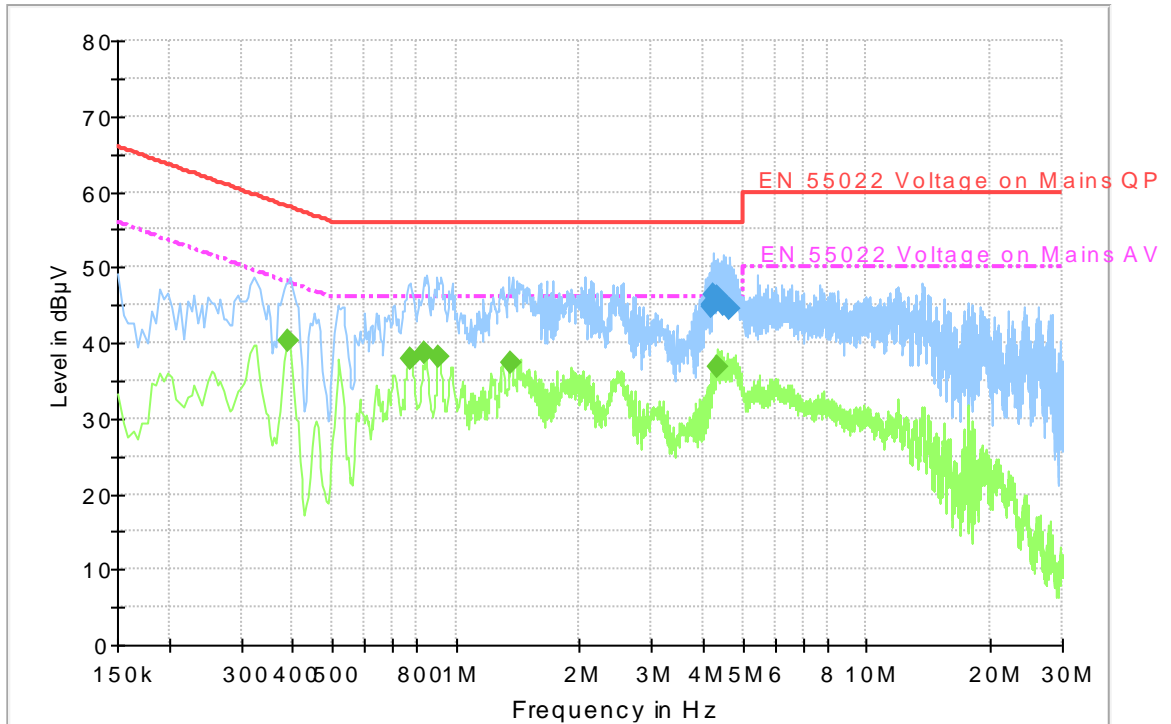


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.173000	45.0	2000.0	9.000	L1	10.3	11.0	56.0
4.191000	44.7	2000.0	9.000	L1	10.3	11.3	56.0
4.222500	46.2	2000.0	9.000	L1	10.3	9.8	56.0
4.348500	46.1	2000.0	9.000	L1	10.3	9.9	56.0
4.470000	45.1	2000.0	9.000	L1	10.3	10.9	56.0
4.659000	44.6	2000.0	9.000	L1	10.3	11.4	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.388500	40.3	2000.0	9.000	L1	10.2	7.8	48.1
0.771000	37.9	2000.0	9.000	L1	10.2	8.1	46.0
0.843000	38.6	2000.0	9.000	L1	10.2	7.4	46.0
0.910500	38.1	2000.0	9.000	L1	10.2	7.9	46.0
1.365000	37.4	2000.0	9.000	L1	10.2	8.6	46.0
4.326000	36.9	2000.0	9.000	L1	10.3	9.1	46.0

Idle: Set.10

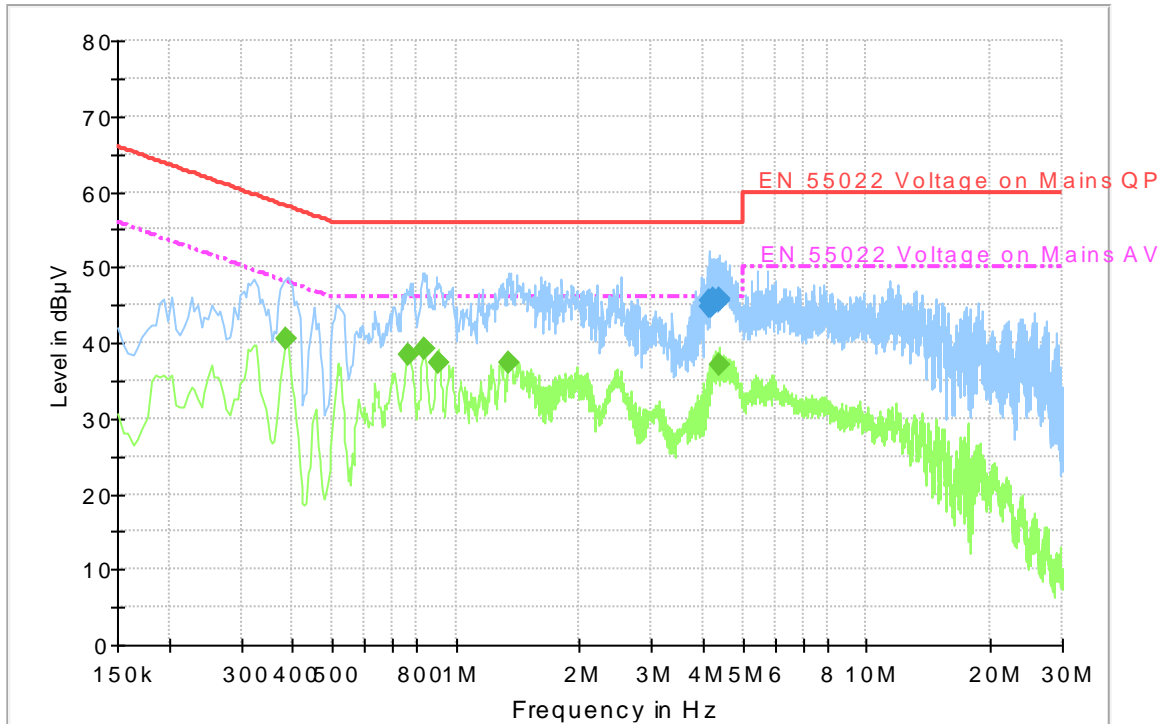


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.128000	44.6	2000.0	9.000	L1	10.3	11.4	56.0
4.146000	45.5	2000.0	9.000	L1	10.3	10.5	56.0
4.177500	44.8	2000.0	9.000	L1	10.3	11.2	56.0
4.222500	45.9	2000.0	9.000	L1	10.3	10.1	56.0
4.362000	45.5	2000.0	9.000	L1	10.3	10.5	56.0
4.402500	45.7	2000.0	9.000	L1	10.3	10.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.384000	40.6	2000.0	9.000	L1	10.2	7.6	48.2
0.766500	38.3	2000.0	9.000	L1	10.2	7.7	46.0
0.834000	39.1	2000.0	9.000	L1	10.2	6.9	46.0
0.910500	37.4	2000.0	9.000	L1	10.2	8.6	46.0
1.351500	37.4	2000.0	9.000	L1	10.2	8.6	46.0
4.362000	37.1	2000.0	9.000	L1	10.3	8.9	46.0

Traffic: Set.11

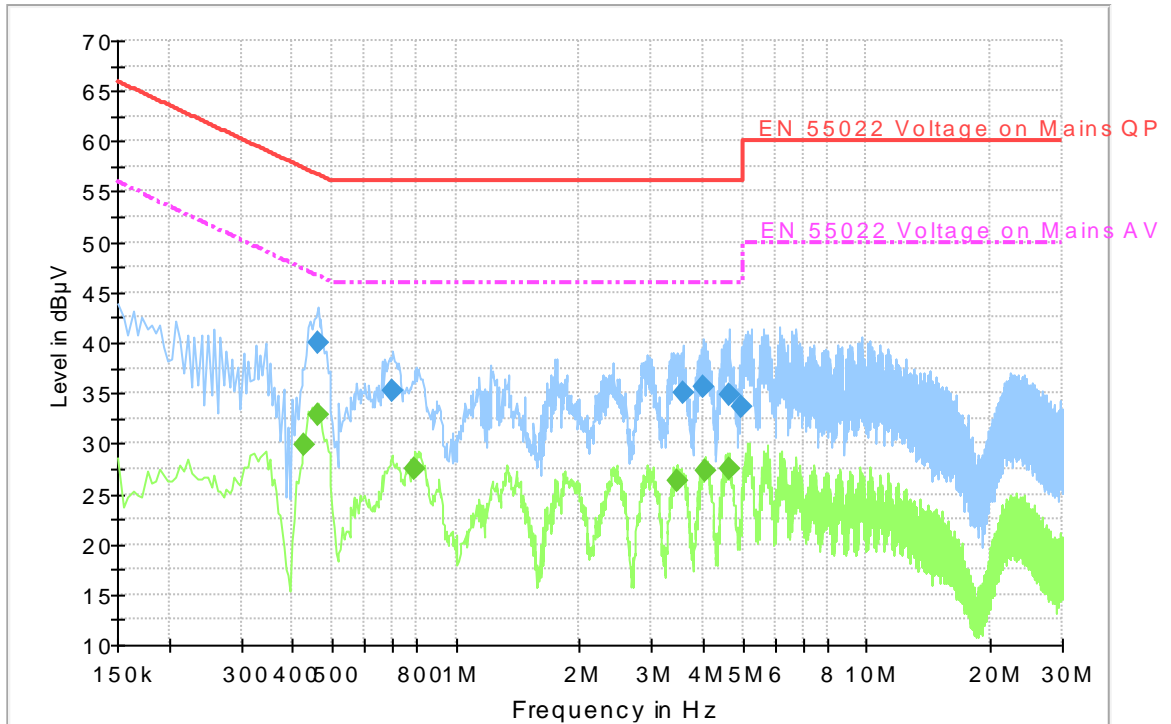


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.460500	40.1	2000.0	9.000	L1	10.2	16.6	56.7
0.703500	35.3	2000.0	9.000	L1	10.2	20.7	56.0
3.561000	35.0	2000.0	9.000	L1	10.3	21.0	56.0
4.015500	35.6	2000.0	9.000	L1	10.3	20.4	56.0
4.650000	34.9	2000.0	9.000	L1	10.3	21.1	56.0
4.978500	33.7	2000.0	9.000	L1	10.3	22.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	29.8	2000.0	9.000	N	10.2	17.5	47.3
0.460500	32.8	2000.0	9.000	N	10.2	13.8	46.7
0.793500	27.4	2000.0	9.000	N	10.2	18.6	46.0
3.462000	26.3	2000.0	9.000	L1	10.3	19.7	46.0
4.042500	27.3	2000.0	9.000	L1	10.3	18.7	46.0
4.627500	27.4	2000.0	9.000	L1	10.3	18.6	46.0

Traffic: Set.21

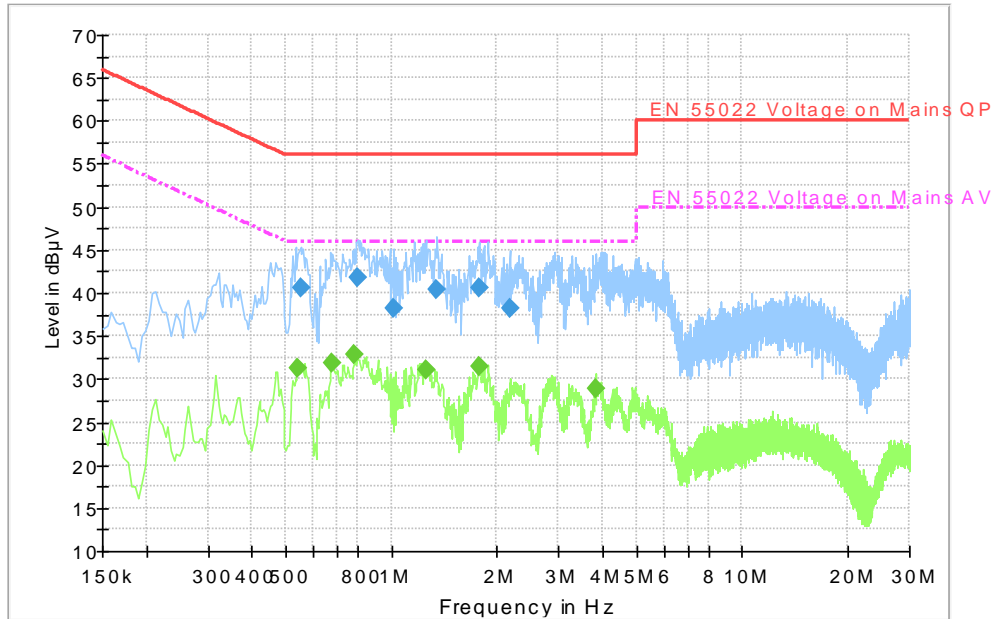


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.550500	40.7	2000.0	9.000	N	10.2	15.3	56.0
0.802500	41.7	2000.0	9.000	N	10.2	14.3	56.0
1.018500	38.2	2000.0	9.000	L1	10.2	17.8	56.0
1.347000	40.3	2000.0	9.000	N	10.2	15.7	56.0
1.774500	40.6	2000.0	9.000	L1	10.2	15.4	56.0
2.170500	38.3	2000.0	9.000	L1	10.2	17.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.541500	31.2	2000.0	9.000	L1	10.2	14.8	46.0
0.681000	31.8	2000.0	9.000	L1	10.2	14.2	46.0
0.784500	32.8	2000.0	9.000	L1	10.2	13.2	46.0
1.252500	31.0	2000.0	9.000	L1	10.2	15.0	46.0
1.774500	31.6	2000.0	9.000	L1	10.2	14.4	46.0
3.840000	28.9	2000.0	9.000	L1	10.3	17.1	46.0

Traffic: Set.22

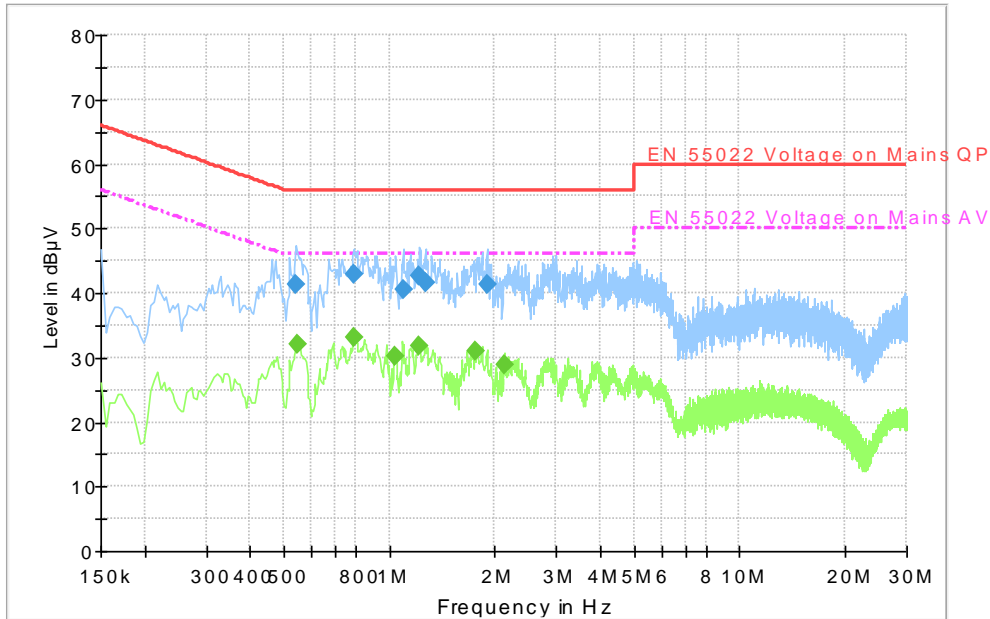

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.541500	41.3	2000.0	9.000	N	10.2	14.7	56.0
0.789000	42.8	2000.0	9.000	N	10.2	13.2	56.0
1.095000	40.7	2000.0	9.000	N	10.2	15.3	56.0
1.221000	42.5	2000.0	9.000	L1	10.2	13.5	56.0
1.266000	41.6	2000.0	9.000	N	10.2	14.4	56.0
1.896000	41.4	2000.0	9.000	N	10.3	14.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.546000	32.1	2000.0	9.000	L1	10.2	13.9	46.0
0.793500	33.1	2000.0	9.000	L1	10.2	12.9	46.0
1.036500	30.2	2000.0	9.000	L1	10.2	15.8	46.0
1.221000	31.9	2000.0	9.000	L1	10.2	14.1	46.0
1.770000	31.0	2000.0	9.000	L1	10.2	15.0	46.0
2.134500	28.8	2000.0	9.000	L1	10.2	17.2	46.0

ANNEX E: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p>Telecommunication Technology Labs, CAICT Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <table border="0" style="width: 100%;"><tr><td style="width: 40%;"><hr/><p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p></td><td style="width: 20%; text-align: center;"></td><td style="width: 40%; text-align: right;"><hr/><p><i>For the National Voluntary Laboratory Accreditation Program</i></p></td></tr></table>		<hr/> <p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>
<hr/> <p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>		

END OF REPORT