



**FCC PART 15C  
TEST REPORT  
No. I18Z61163-IOT06**

**for**

**TCL Communication Ltd.**

**Tablet PC**

**9027W**

**With**

**FCC ID: 2ACCJBT13**

**Hardware Version: 02**

**Software Version: AS2**

**Issued Date: 2018-08-07**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18Z61163-IOT06	Rev.0	1st edition	2018-08-07

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY .....</b>	<b>6</b>
1.1. TESTING LOCATION .....	6
<b>1.2. TESTINGENVIRONMENT .....</b>	<b>6</b>
1.3. PROJECT DATA .....	6
1.4. SIGNATURE .....	6
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
3.4. GENERAL DESCRIPTION.....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>10</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
6.1. SUMMARY OF TEST RESULTS .....	11
6.2. STATEMENTS.....	11
6.3. TEST CONDITIONS .....	11
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>12</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
8.1. TRANSMITTER OUTPUT POWER .....	13
8.2. PEAK POWER SPECTRAL DENSITY.....	13
8.3. OCCUPIED 6DB BANDWIDTH .....	13
8.4. BAND EDGES COMPLIANCE.....	13
8.5. SPURIOUS EMISSIONS .....	13
8.6. AC POWER-LINE CONDUCTED EMISSION .....	13
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>14</b>
A.1. MEASUREMENT METHOD .....	14
A.2. MAXIMUM PEAK OUTPUT POWER .....	15

A.2.1 ANTENNA GAIN .....	15
A.2.2. MAXIMUM PEAK OUTPUT POWER-CONDUCTED .....	15
A.2.3. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	17
A.3. PEAK POWER SPECTRAL DENSITY .....	18
A.4. OCCUPIED 6dB BANDWIDTH .....	18
FIG. 1 OCCUPIED 6dB BANDWIDTH (802.11A, CH 149).....	19
FIG. 2 OCCUPIED 6dB BANDWIDTH (802.11A, CH 157).....	19
FIG. 3 OCCUPIED 6dB BANDWIDTH (802.11A, CH 165).....	20
FIG. 4 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 149) .....	20
FIG. 5 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 157) .....	21
FIG. 6 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 165) .....	21
FIG. 7 OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 151) .....	22
FIG. 8 OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 159) .....	22
A.5. TRANSMITTER SPURIOUS EMISSION .....	23
A.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	23
FIG. 9 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 30 MHz-1 GHz).....	25
FIG. 10 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 1 GHz -12 GHz).....	25
FIG. 11 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 12 GHz-25 GHz) .....	26
FIG. 12 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 25 GHz-40 GHz) .....	26
FIG. 13 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 30 MHz-1 GHz).....	27
FIG. 14 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 1 GHz -12 GHz).....	27
FIG. 15 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 12 GHz-25 GHz) .....	28
FIG. 16 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 25 GHz-40 GHz) .....	28
FIG. 17 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 30 MHz-1 GHz).....	29
FIG. 18 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 1 GHz -12 GHz).....	29
FIG. 19 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 12 GHz-25 GHz) .....	30
FIG. 20 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 25 GHz-40 GHz) .....	30
FIG. 21 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 30 MHz-1 GHz) .....	31
FIG. 22 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 1 GHz -12 GHz).....	31
FIG. 23 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 12 GHz-25 GHz).....	32
FIG. 24 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 25 GHz-40 GHz).....	32
FIG. 25 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 30 MHz-1 GHz) .....	33
FIG. 26 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 1 GHz -12 GHz).....	33
FIG. 27 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 12 GHz-25 GHz).....	34
FIG. 28 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 25 GHz-40 GHz).....	34
FIG. 29 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 30 MHz-1 GHz) .....	35
FIG. 30 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 1 GHz -12 GHz).....	35
FIG. 31 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 12 GHz-25 GHz).....	36
FIG. 32 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 25 GHz-40 GHz).....	36
FIG. 33 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 30 MHz-1 GHz) .....	37
FIG. 34 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 1 GHz -12 GHz).....	37
FIG. 35 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 12 GHz-25 GHz).....	38
FIG. 36 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 25 GHz-40 GHz).....	38
FIG. 37 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 30 MHz-1 GHz) .....	39

FIG. 38	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 1 GHz -12 GHz).....	39
FIG. 39	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 12 GHz-25 GHz).....	40
FIG. 40	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 25 GHz-40 GHz).....	40
A.5.2	TRANSMITTER SPURIOUS EMISSION - RADIATED.....	41
A.6.	BAND EDGES COMPLIANCE.....	49
A6.1	BAND EDGES - CONDUCTED.....	49
FIG. 41	BAND EDGES (802.11A, 5745MHZ).....	50
FIG. 42	BAND EDGES (802.11A, 5825MHZ).....	50
FIG. 43	BAND EDGES (802.11N-HT20, 5745MHZ).....	51
FIG. 44	BAND EDGES (802.11N-HT20, 5825MHZ).....	51
FIG. 45	BAND EDGES (802.11N-HT40, 5755MHZ).....	52
FIG. 46	BAND EDGES (802.11N-HT40, 5795MHZ).....	52
A6.2	BAND EDGES - RADIATED.....	53
FIG. 47	BAND EDGES (802.11A, 5745MHZ).....	54
FIG. 48	BAND EDGES (802.11A, 5825MHZ).....	54
FIG. 49	BAND EDGES (802.11N-HT20, 5745MHZ).....	55
FIG. 50	BAND EDGES (802.11N-HT20, 5825MHZ).....	55
FIG. 51	BAND EDGES (802.11N-HT40, 5755MHZ).....	56
FIG. 52	BAND EDGES (802.11N-HT40, 5795MHZ).....	56
A.7.	AC POWERLINE CONDUCTED EMISSION.....	57
FIG. 53	AC POWERLINE CONDUCTED EMISSION-802.11A.....	58
FIG. 54	AC POWERLINE CONDUCTED EMISSION-802.11A.....	59
FIG. 55	AC POWERLINE CONDUCTED EMISSION-IDLE.....	60
<b>ANNEX B:</b>	<b>ACCREDITATION CERTIFICATE.....</b>	<b>61</b>

## 1. TEST LATORATORY

### 1.1. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### 1.2. TestingEnvironment

Normal Temperature: 15-35°C

Extreme Temperature: -20/+55°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2018-05-30

Testing End Date: 2018-08-06


### 1.4. Signature



---

Jiang Xue

( Prepared this test report )



---

Zheng Wei

(Reviewed this test report)



---

Gao Hong

(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
7/F, Block F4, TCL Communication Technology Building, TCL  
Address: International E City, Zhong Shan Yuan Road, Nanshan District,  
Shenzhen, Guangdong, P.R. China 518052  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Telephone: 0086-755-36611722  
Fax: /

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
7/F, Block F4, TCL Communication Technology Building, TCL  
Address: International E City, Zhong Shan Yuan Road, Nanshan District,  
Shenzhen, Guangdong, P.R. China 518052  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Telephone: 0086-755-36611722  
Fax: /

### 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

#### EQUIPMENT(AE)

##### 3.1. About EUT

Description	Tablet PC
Model name	9027W
FCC ID	2ACCJBT13
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.9V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

##### 3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	015263000000304	02	AS2
EUT2	015263000000890	02	AS2

\*EUT ID: is used to identify the test sample in the lab internally.

##### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	inbuilt
AE2	Charger	/	18TCT-CH-0515
AE3	Charger	/	18TCT-CH-0531
AE4	USB Cable	/	18TCT-DC-0209

###### AE1

Model	TLp040J1
Manufacturer	BYD
Capacitance	4000mAh
Nominal voltage	3.85V

###### AE2

Model	UC11US
Manufacturer	Chenyang
Length of cable	/

###### AE3

Model	UC11US
Manufacturer	PUAN
Length of cable	/

###### AE4





Model CDA0000024C8  
Manufacturer /  
Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

Equipment Under Test (EUT) is a Tablet PC with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.



## **4. REFERENCE DOCUMENTS**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C and E:	
FCC Part15	15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2016
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

## **5. LABORATORY ENVIRONMENT**

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
Transmitter Spurious Emission - Radiated < 30MHz	15.407, 15.209	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.9V
Humidity	44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2019-05-17
2	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2019-02-28
3	LISN	ENY216	101200	Rohde & Schwarz	1 year	2019-04-15
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2019-03-01
2	BiLog Antenna	VULB9163	302	Schwarzbeck	3 years	2019-03-27
3	EMI Antenna	3115	00167250	ETS-Lindgren	3 Years	2020-05-21
4	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2020-07-27

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.40
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.32
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

### 8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

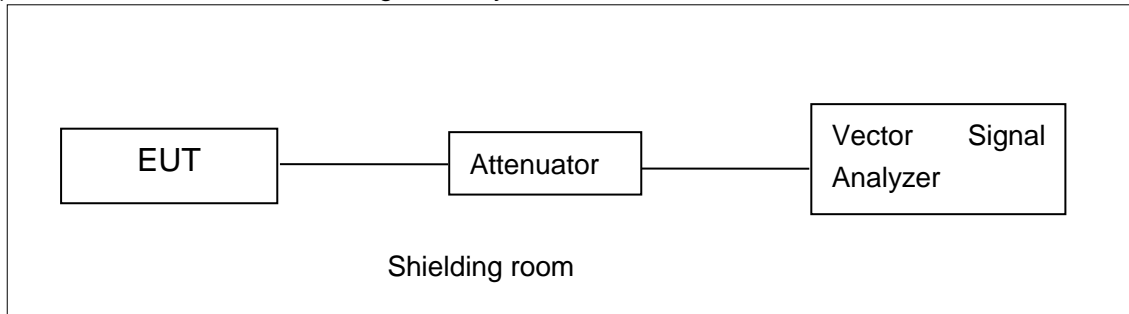


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

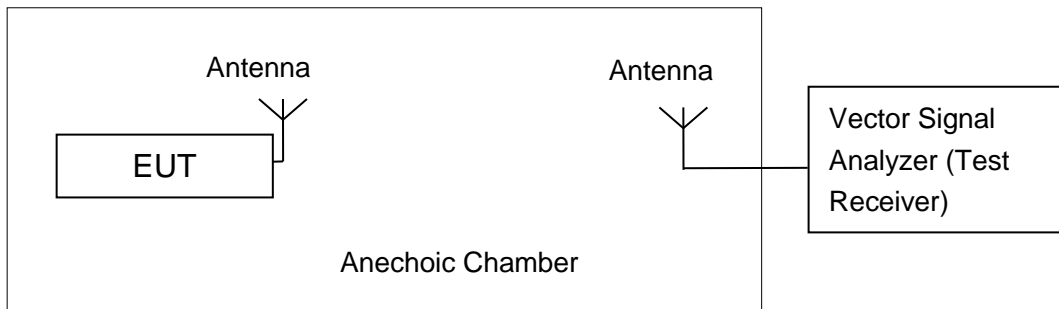

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## A.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

### A.2.1 Antenna Gain

Antenna gain is -1.3 dBi and the value is supplied by the applicant or manufacturer.

### A.2.2. Maximum Peak Output Power-conducted

#### Measurement Results:

#### 802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	24.55	/	/
	9	24.63	24.81	24.46
	12	22.93	/	/
	18	22.56	/	/
	24	23.29	/	/
	36	22.65	/	/
	48	21.16	/	/
	54	19.92	/	/

The data rate 9Mbps is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	24.78	24.87	24.56
	MCS1	23.49	/	/
	MCS2	23.58	/	/
	MCS3	22.61	/	/
	MCS4	22.59	/	/
	MCS5	20.74	/	/
	MCS6	19.88	/	/
	MCS7	19.73	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	25.16	24.48
	MCS1	23.84	/
	MCS2	23.87	/
	MCS3	24.09	/
	MCS4	23.25	/
	MCS5	21.61	/
	MCS6	20.09	/
	MCS7	19.54	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**Conclusion: PASS**



### A.2.3. Maximum Average Output Power-Conducted

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

#### 802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	17.55	18.81	18.02

#### 802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	16.55	16.59	16.00

#### 802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11n(40MHz)	16.85	16.07

Conclusion: PASS

### A.3. Peak Power Spectral Density

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

**Measurement Uncertainty:**

Measurement Uncertainty	0.75dB
-------------------------	--------

**Measurement Results:**

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	5.13	P
	157	5.56	P
	165	4.59	P
802.11n HT20	149	4.84	P
	157	5.15	P
	165	4.77	P
802.11n HT40	151	2.12	P
	159	1.26	P

**Conclusion: PASS**

### A.4. Occupied 6dB Bandwidth

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

**Measurement Uncertainty:**

Measurement Uncertainty	60.80Hz
-------------------------	---------


**Measurement Result:**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11a	149	Fig.1	16.35	P
	157	Fig.2	16.30	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	17.60	P
	157	Fig.5	17.60	P
	165	Fig.6	17.60	P
802.11n	151	Fig.7	36.32	P


HT40	159	Fig.8	36.32	P
------	-----	-------	-------	---

**Conclusion: PASS**


**Test graphs as below:**

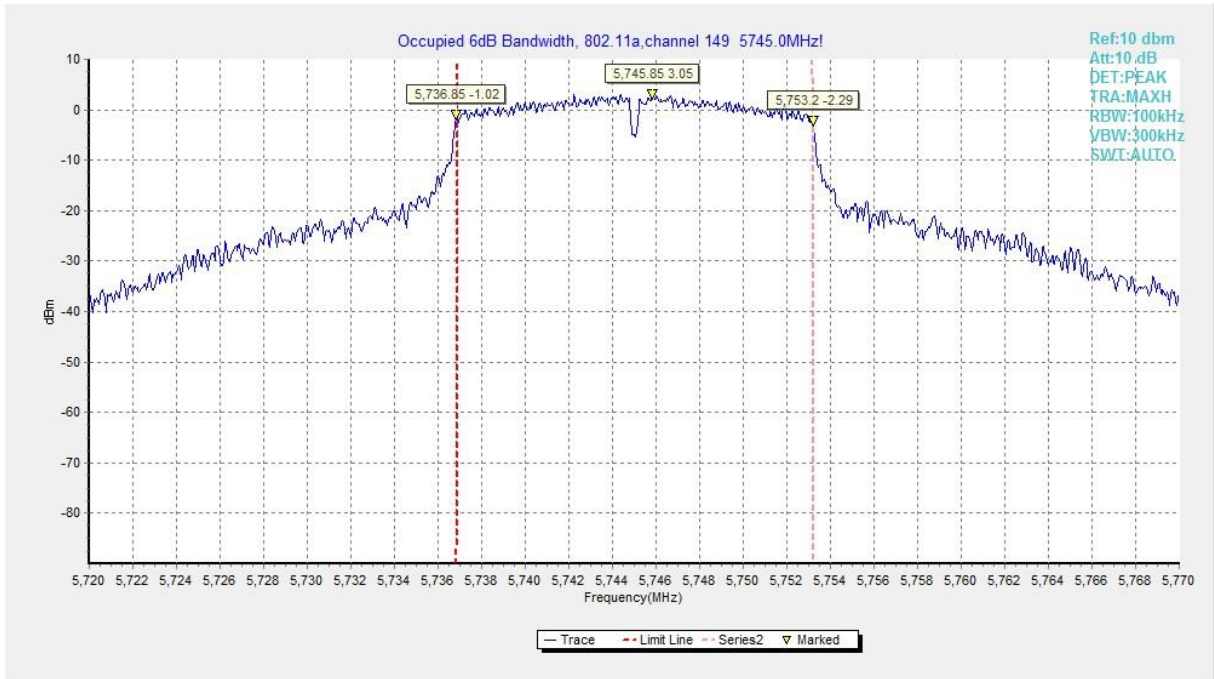


**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

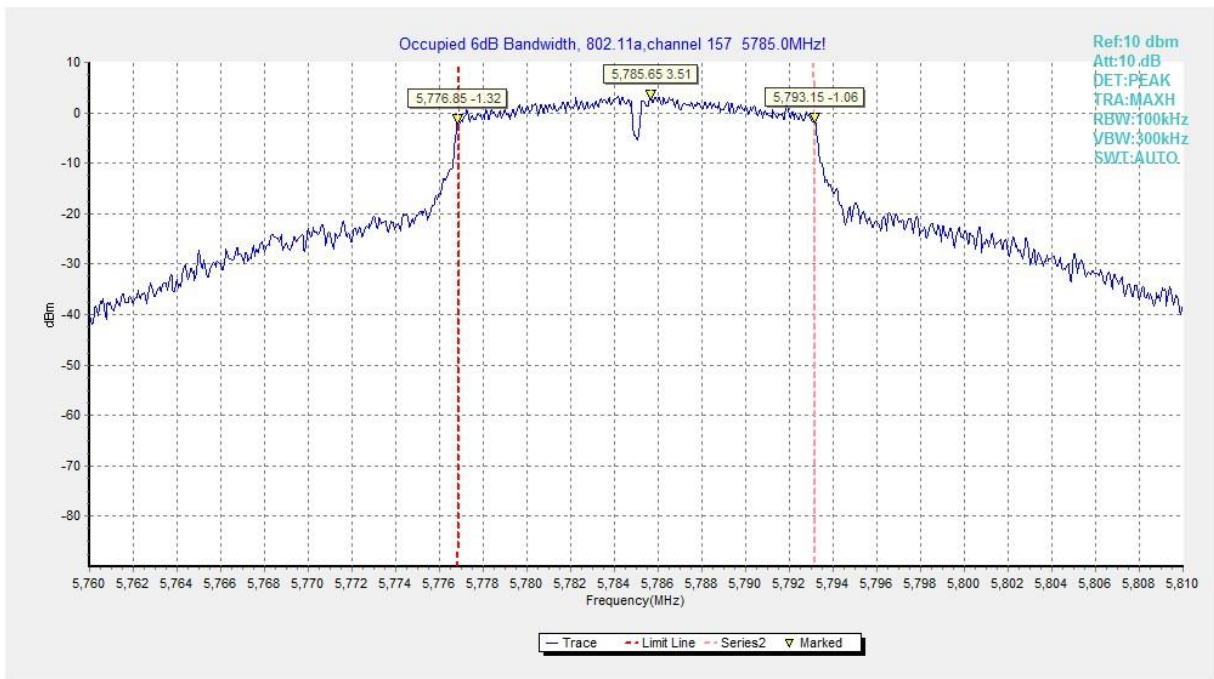

**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

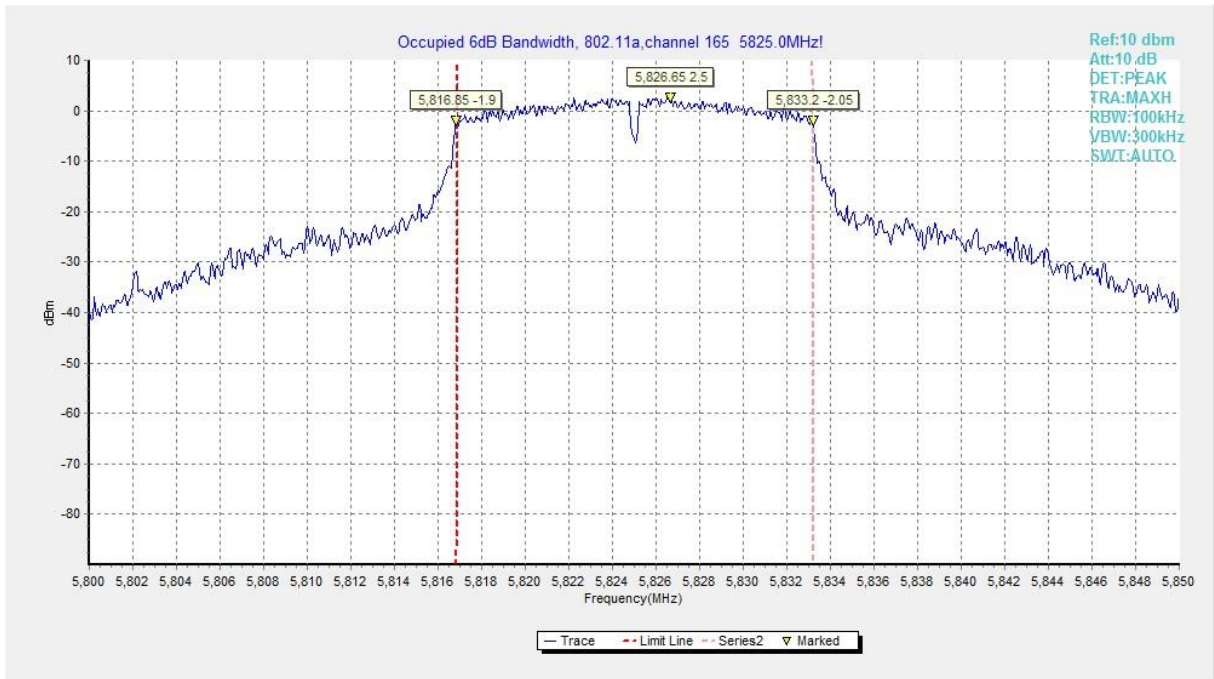

**Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)**

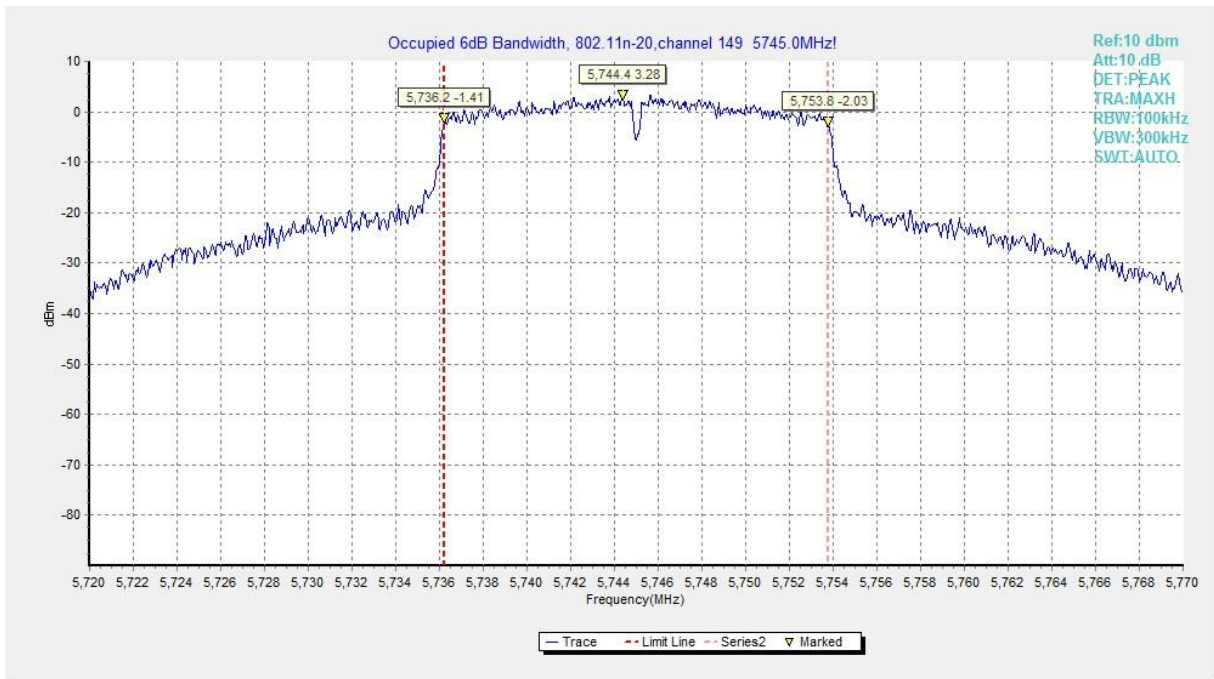

**Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)**

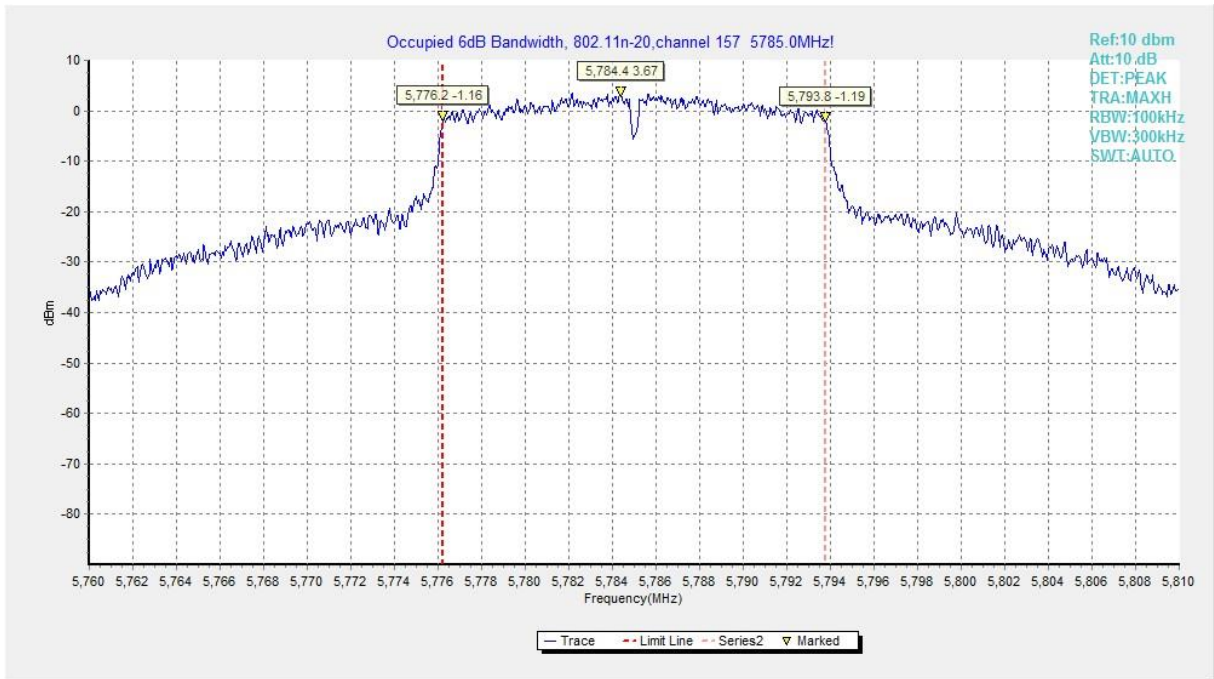


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)



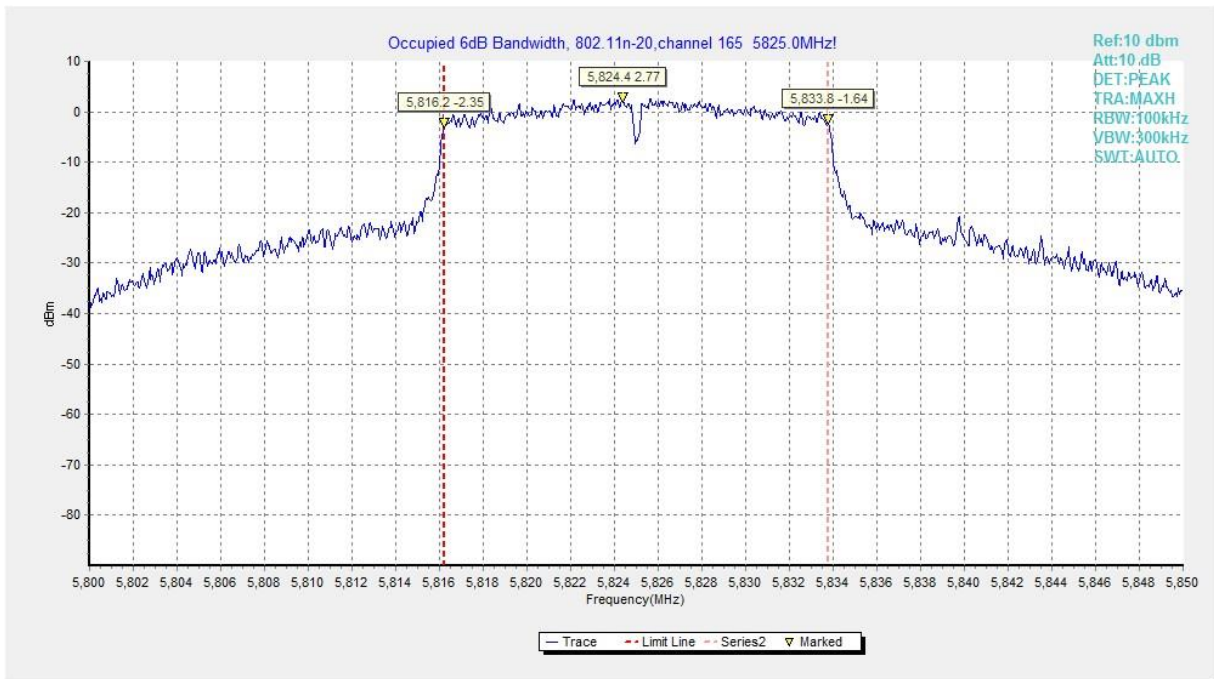


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

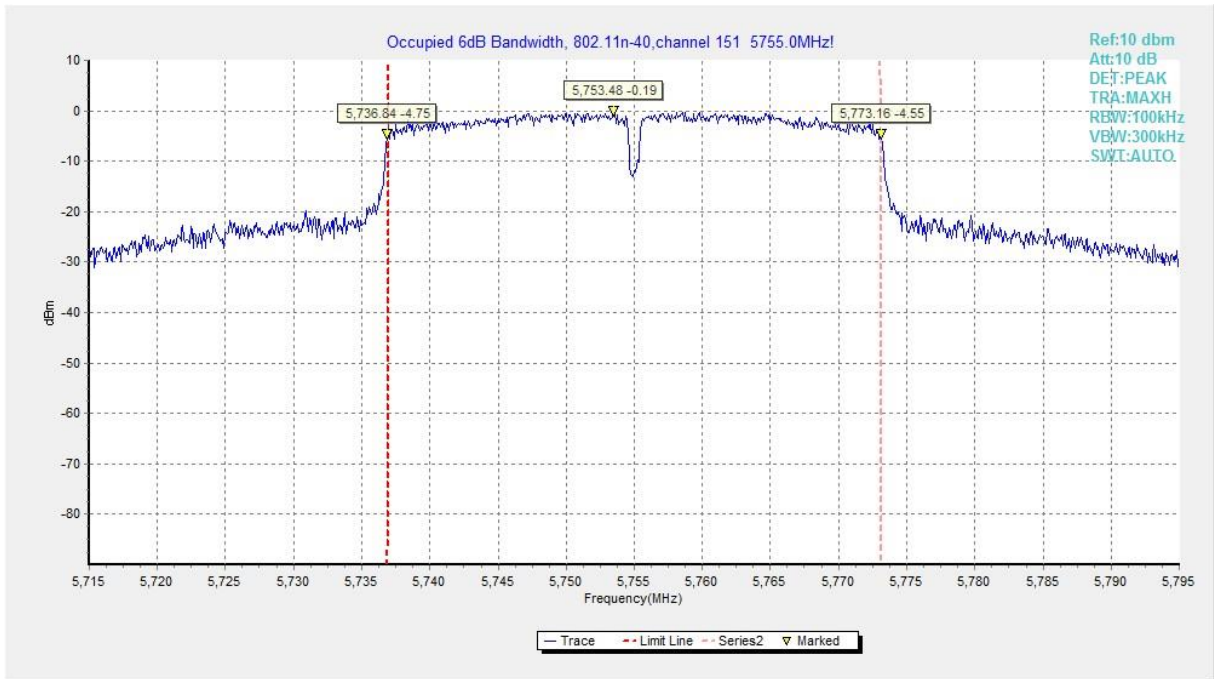

**Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**

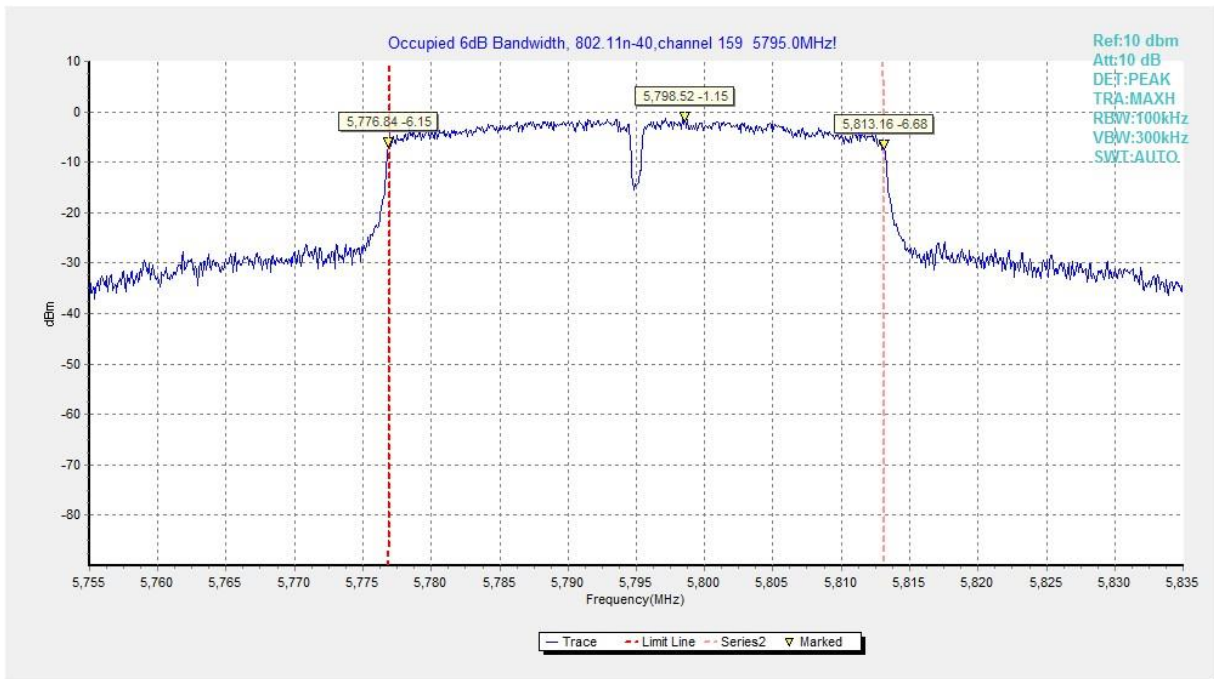

**Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**

### A.5. Transmitter Spurious Emission

**Measurement Limit:**

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Measurement Uncertainty:**

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤3.6GHz	0.82
3.6GHz ≤ f ≤8GHz	1.55
8GHz ≤ f ≤20GHz	1.86
20GHz ≤ f ≤22GHz	1.90
22GHz ≤ f ≤26GHz	2.20

#### A.5.1 Transmitter Spurious Emission - Conducted

**Measurement Results:**

**802.11a mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 12 GHz	Fig.10	P
		12 GHz ~ 25 GHz	Fig.11	P
		25 GHz ~ 40 GHz	Fig.12	P
	157	30 MHz ~ 1 GHz	Fig.13	P
		1 GHz ~ 12 GHz	Fig.14	P
		12 GHz ~ 25 GHz	Fig.15	P
		25 GHz ~ 40 GHz	Fig.16	P
	165	30 MHz ~ 1 GHz	Fig.17	P
		1 GHz ~ 12 GHz	Fig.18	P
		12 GHz ~ 25 GHz	Fig.19	P
		25 GHz ~ 40 GHz	Fig.20	P

**802.11n-HT20 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.21	P
		1 GHz ~ 12 GHz	Fig.22	P
		12 GHz ~ 25 GHz	Fig.23	P
		25 GHz ~ 40 GHz	Fig.24	P
	157	30 MHz ~ 1 GHz	Fig.25	P
		1 GHz ~ 12 GHz	Fig.26	P
		12 GHz ~ 25 GHz	Fig.27	P
		25 GHz ~ 40 GHz	Fig.28	P
	165	30 MHz ~ 1 GHz	Fig.29	P
		1 GHz ~ 12 GHz	Fig.30	P
		12 GHz ~ 25 GHz	Fig.31	P
		25 GHz ~ 40 GHz	Fig.32	P


**802.11n-HT40 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.33	P
		1 GHz ~ 12 GHz	Fig.34	P
		12 GHz ~ 25 GHz	Fig.35	P
		25 GHz ~ 40 GHz	Fig.36	P
	159	30 MHz ~ 1 GHz	Fig.37	P
		1 GHz ~ 12 GHz	Fig.38	P
		12 GHz ~ 25 GHz	Fig.39	P
		25 GHz ~ 40 GHz	Fig.40	P


**Conclusion: PASS**

**Test graphs as below:**




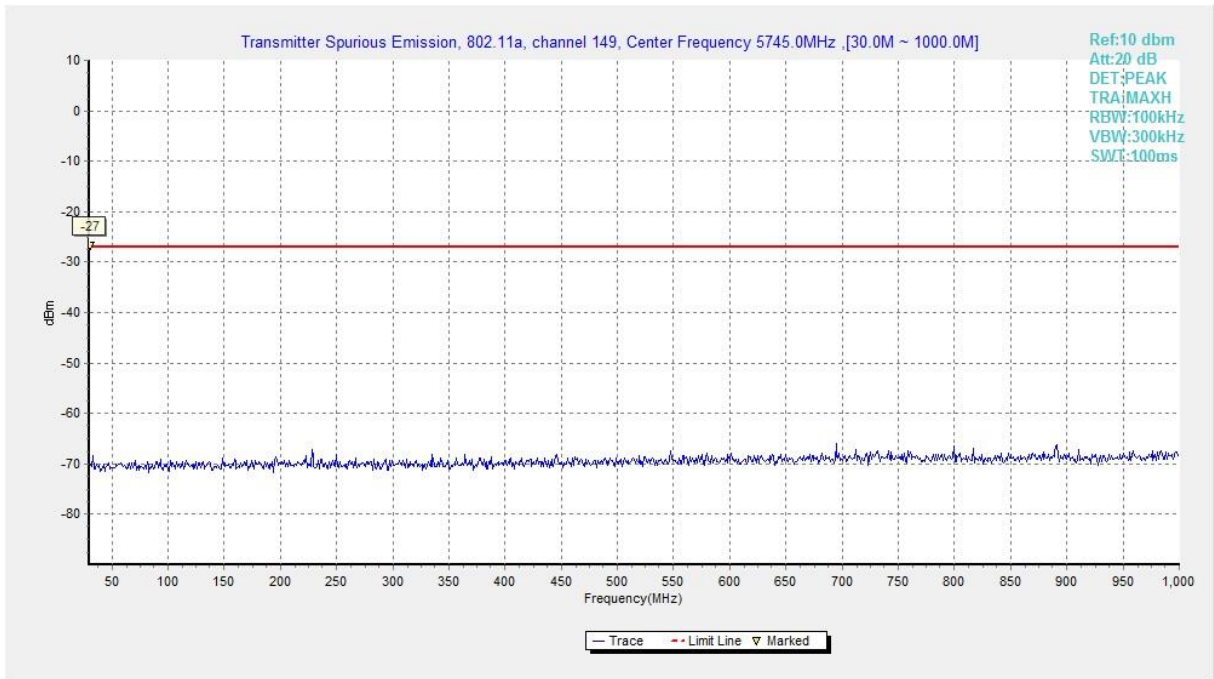


**Fig. 9 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)**

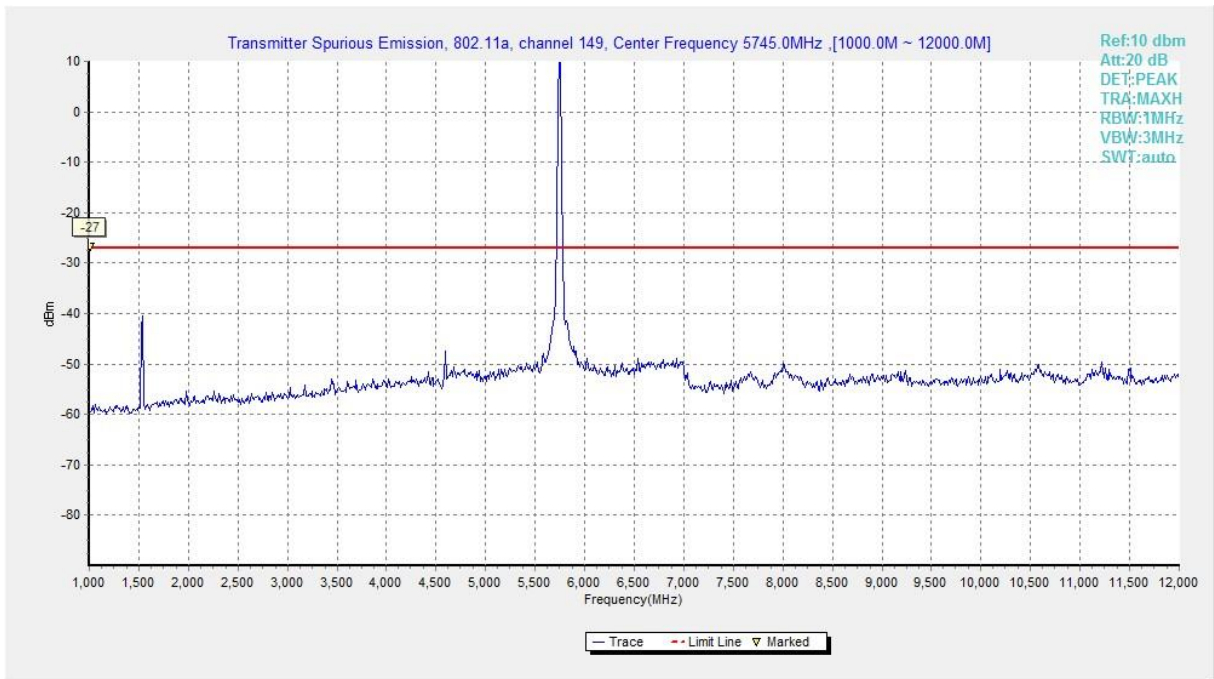


**Fig. 10 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -12 GHz)**

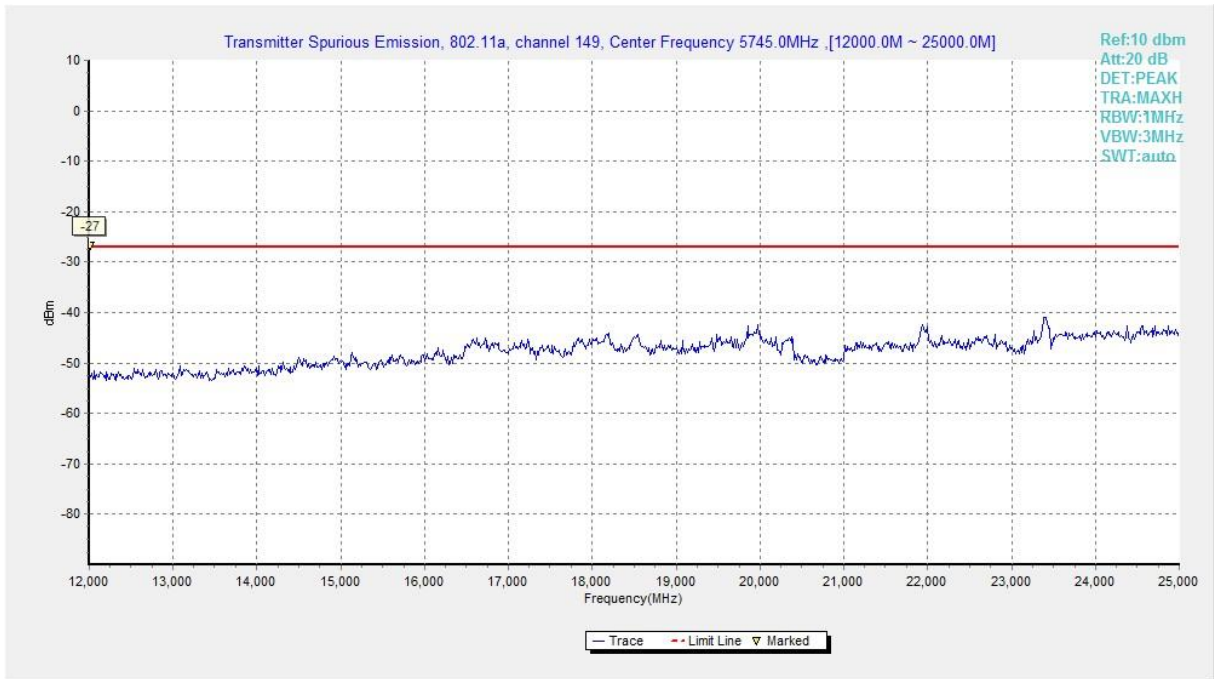


**Fig. 11 Conducted Spurious Emission (802.11a, Ch149, 12 GHz-25 GHz)**

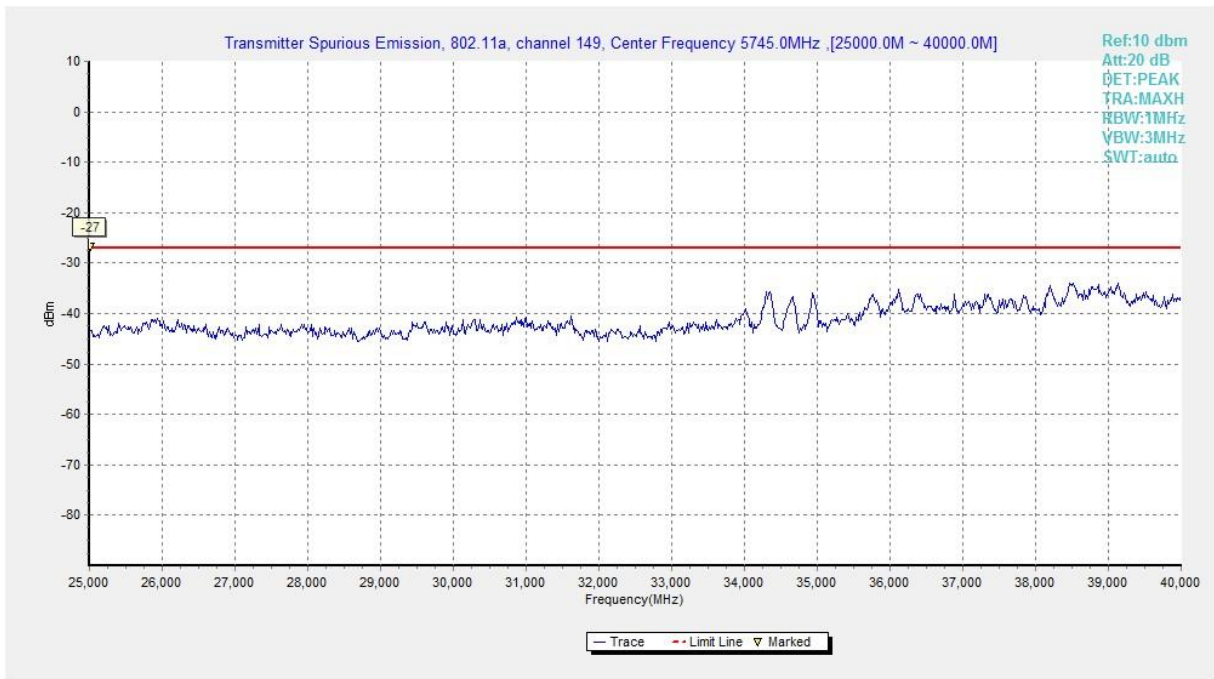


**Fig. 12 Conducted Spurious Emission (802.11a, Ch149, 25 GHz-40 GHz)**

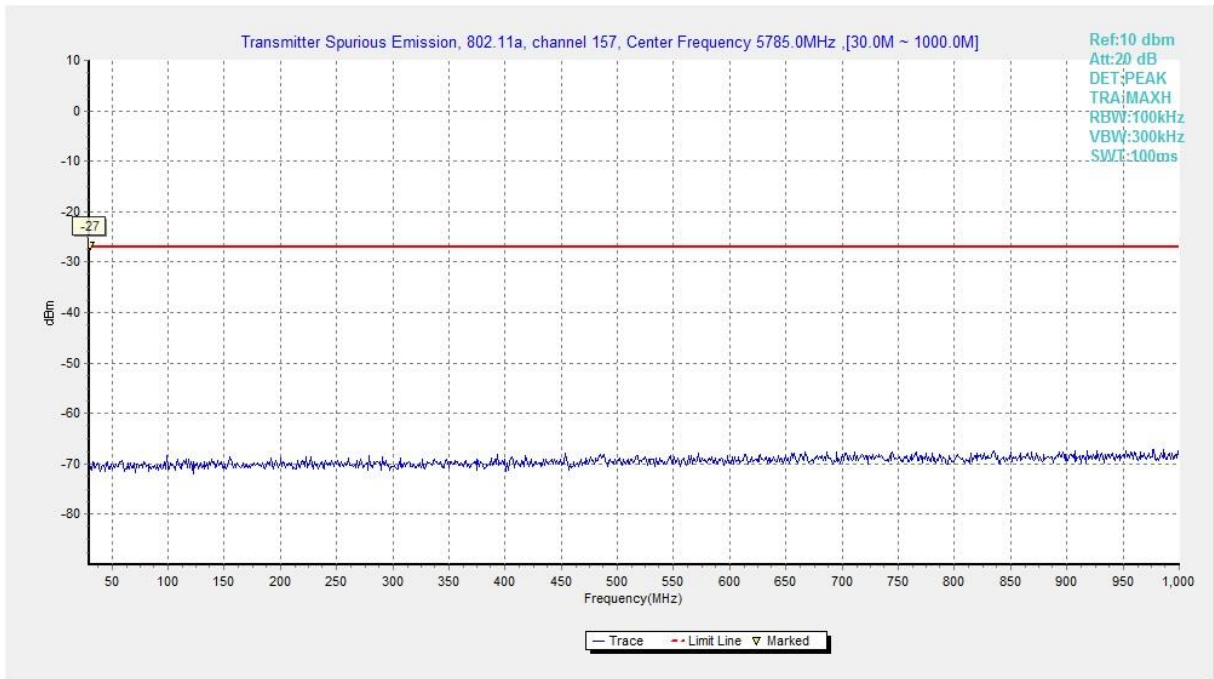


**Fig. 13 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)**

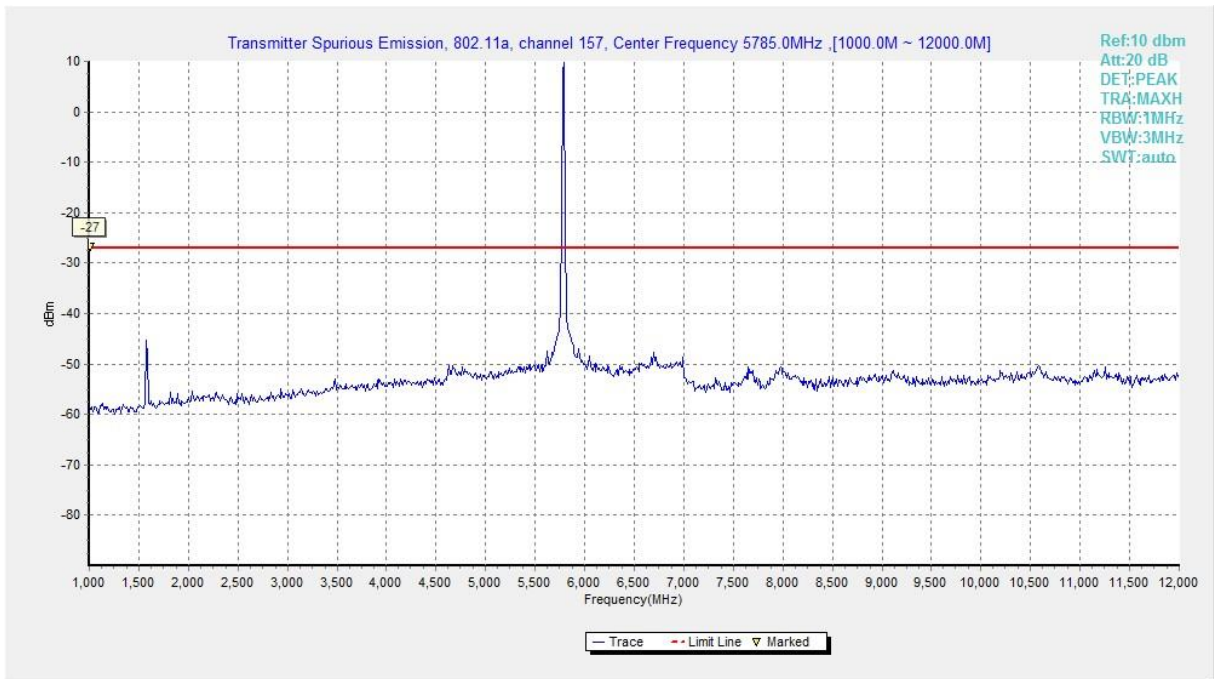


**Fig. 14 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -12 GHz)**

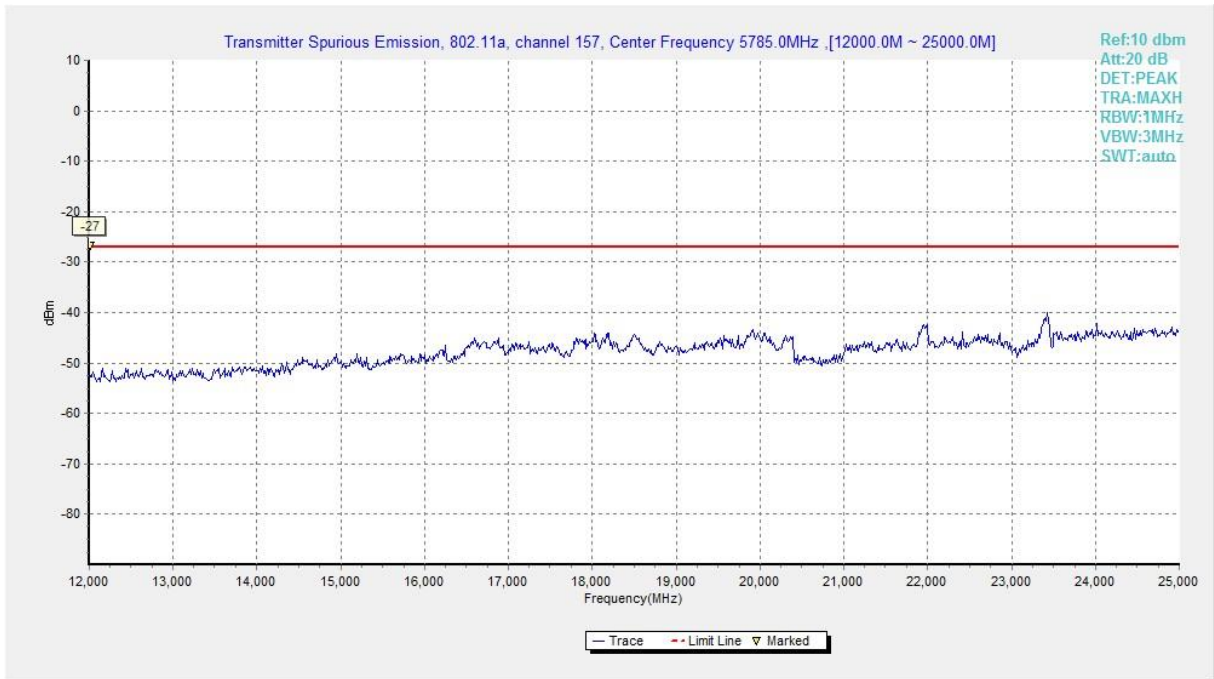


**Fig. 15 Conducted Spurious Emission (802.11a, Ch157, 12 GHz-25 GHz)**

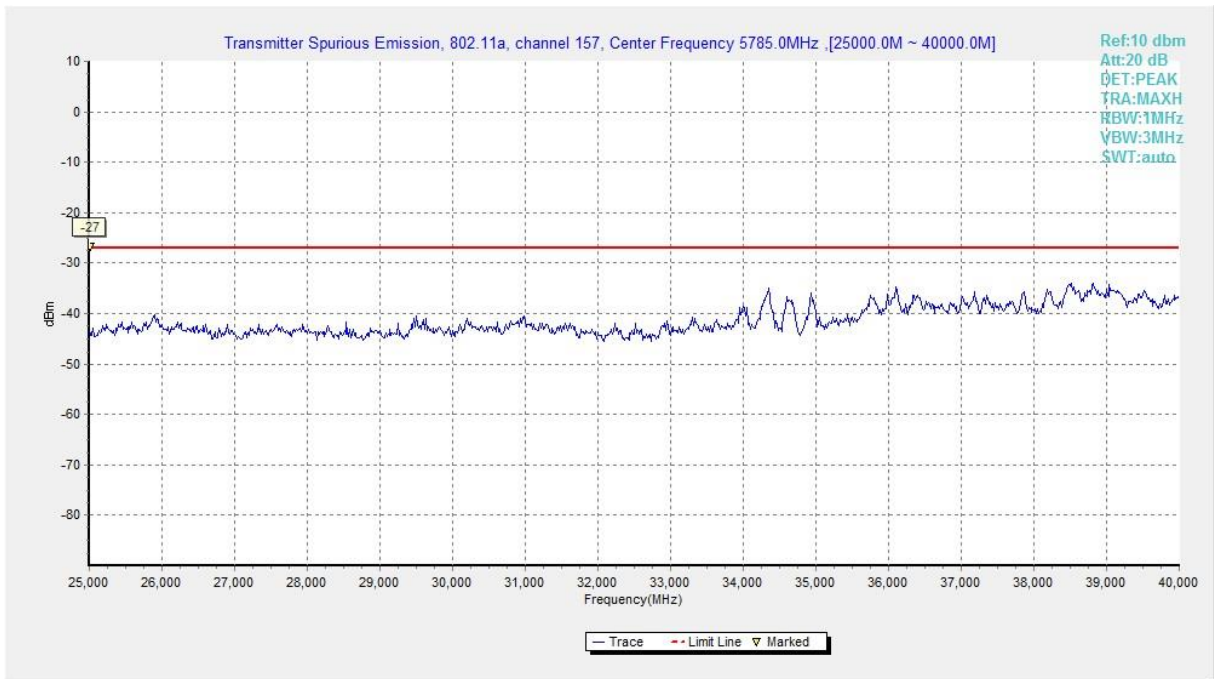


**Fig. 16 Conducted Spurious Emission (802.11a, Ch157, 25 GHz-40 GHz)**

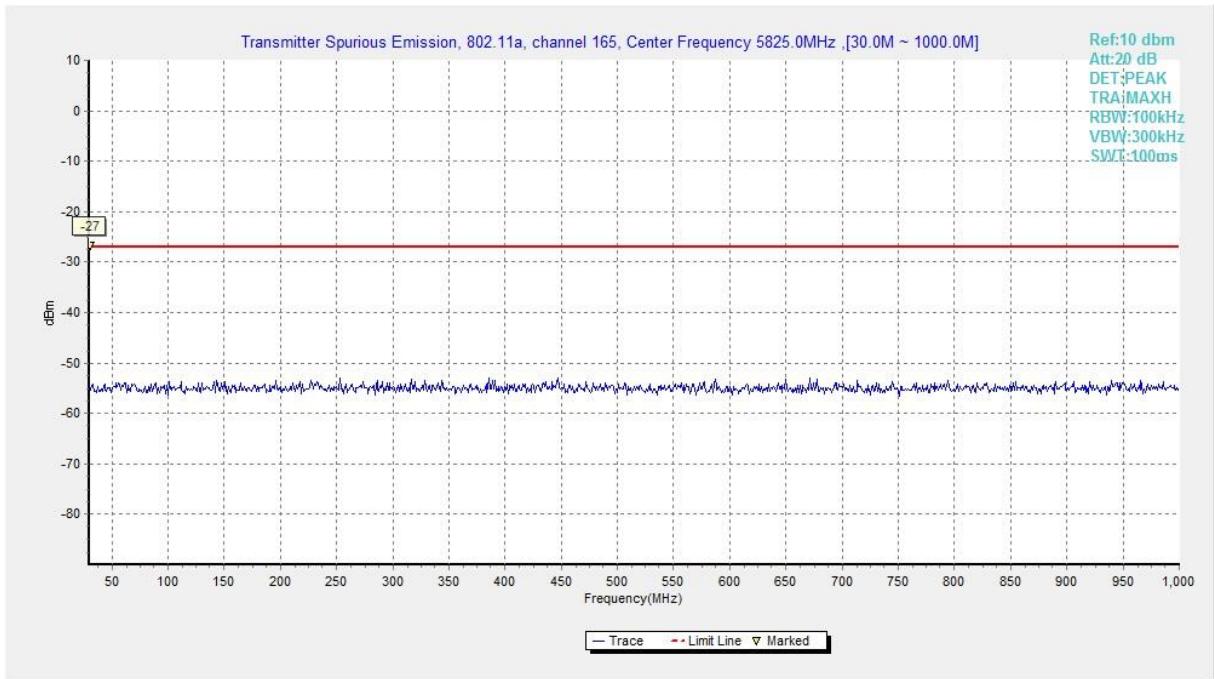


**Fig. 17 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)**

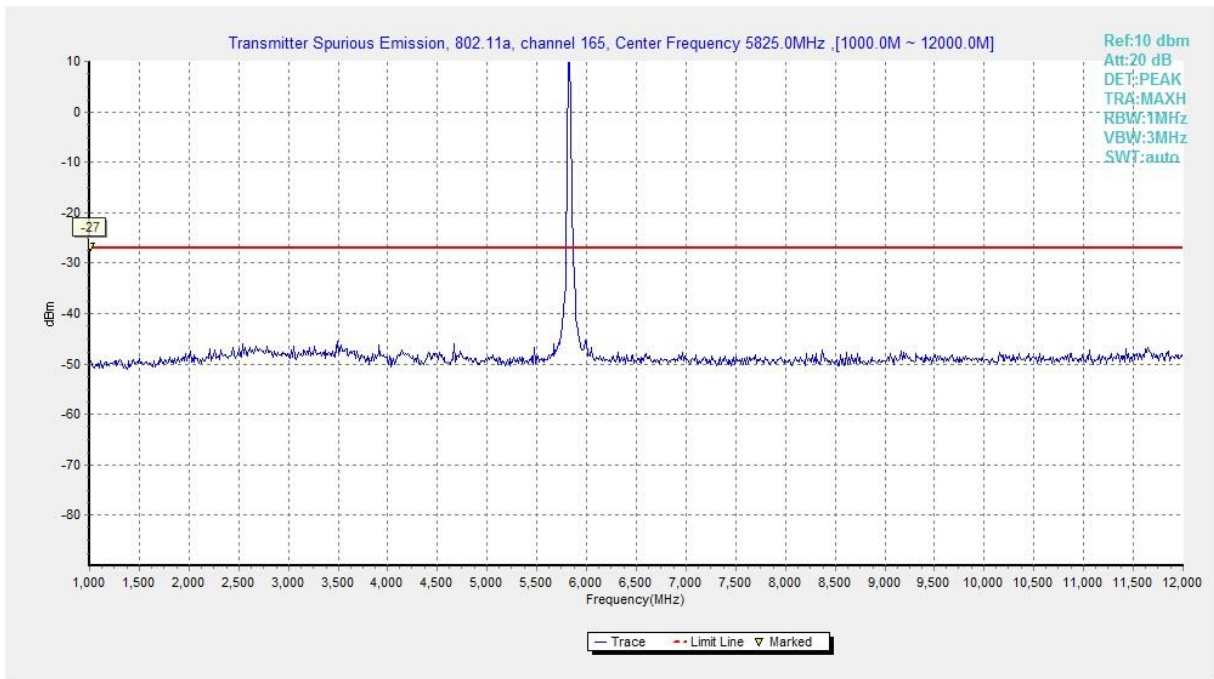


**Fig. 18 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -12 GHz)**

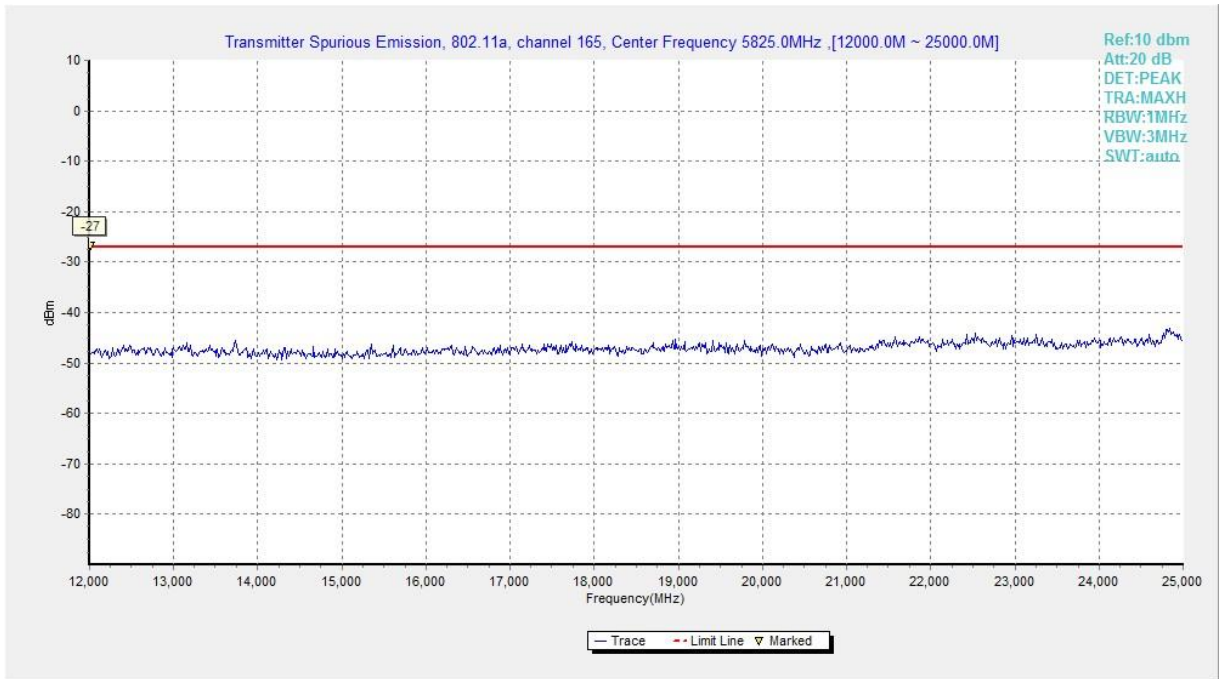


**Fig. 19 Conducted Spurious Emission (802.11a, Ch165, 12 GHz-25 GHz)**

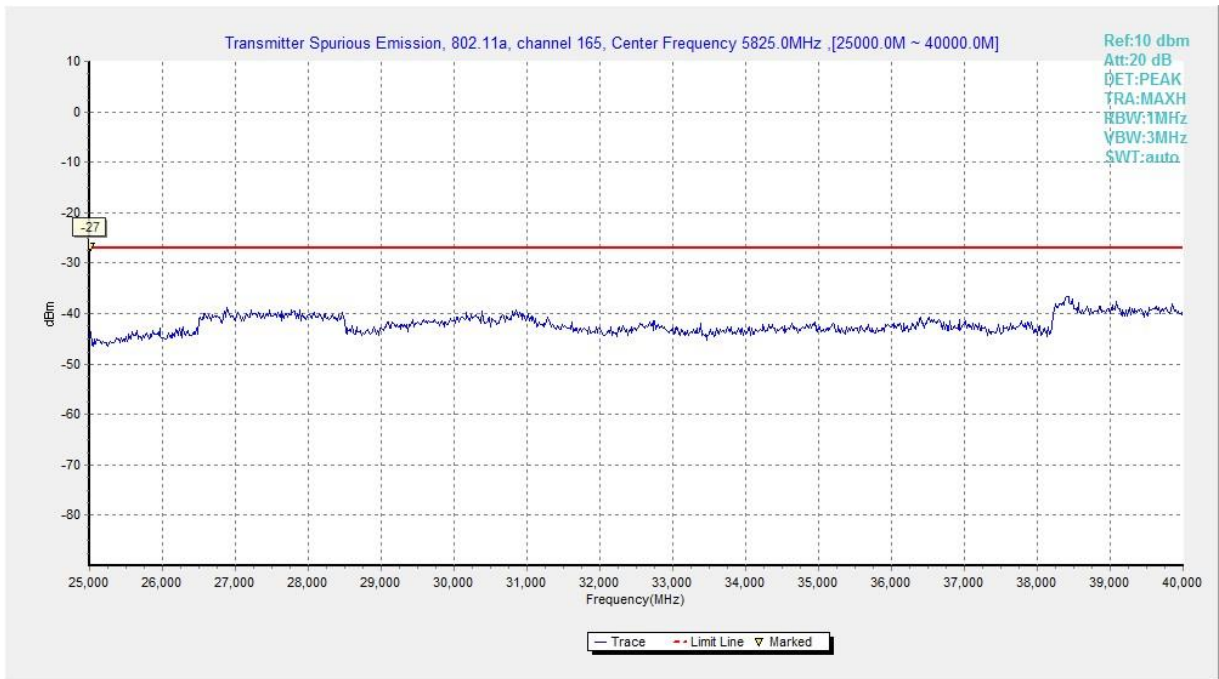


**Fig. 20 Conducted Spurious Emission (802.11a, Ch165, 25 GHz-40 GHz)**

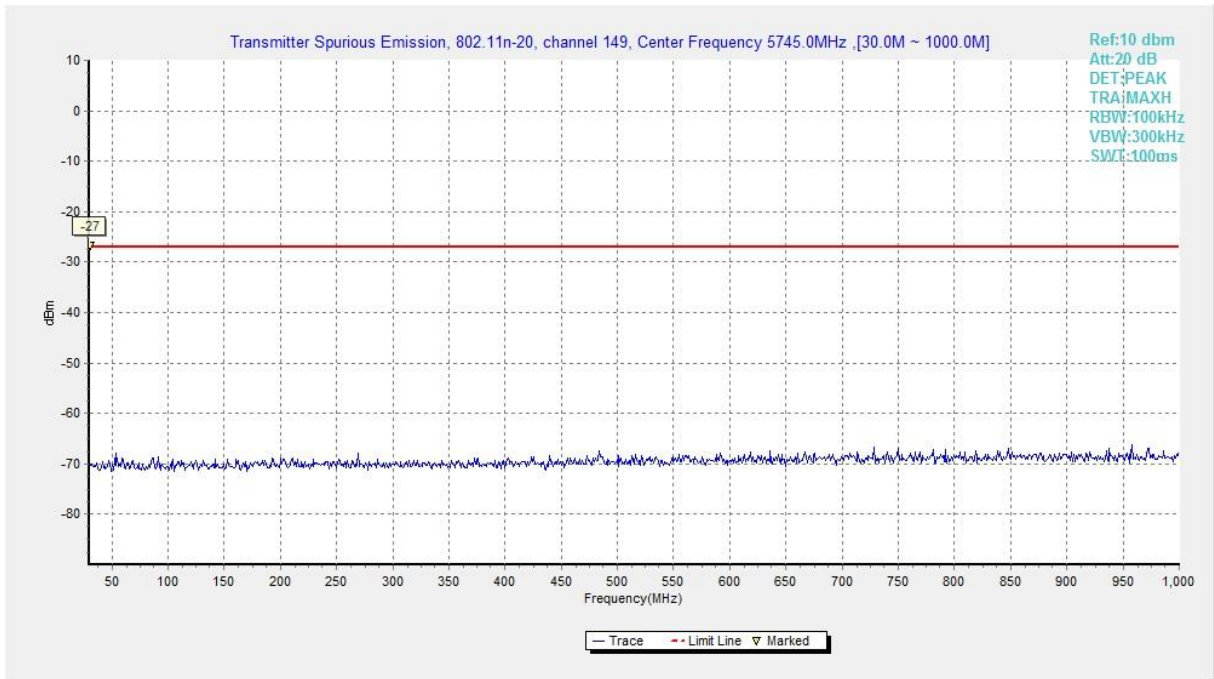


**Fig. 21 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)**

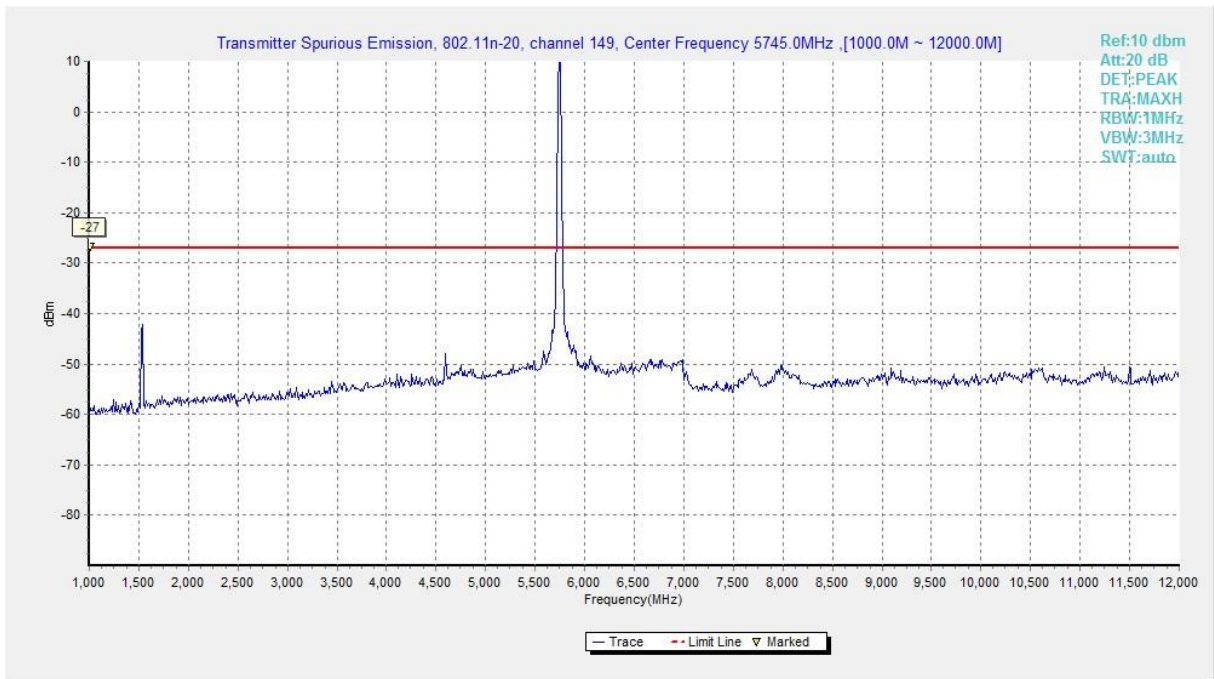

**Fig. 22 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -12 GHz)**

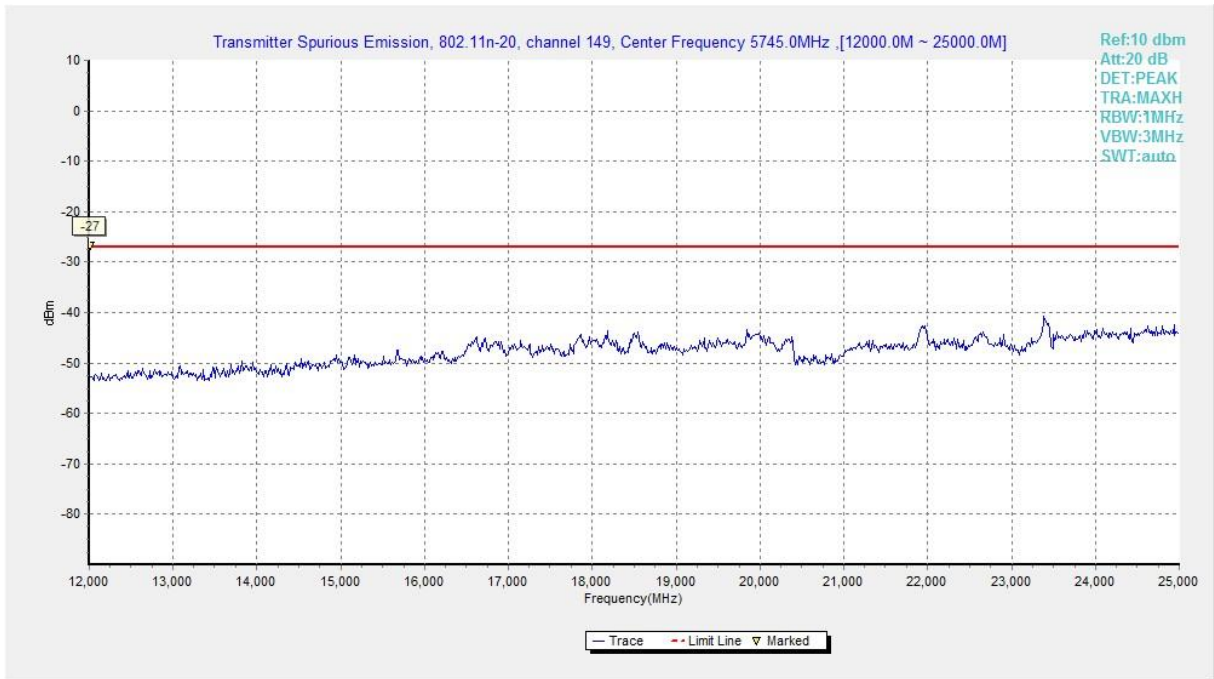


**Fig. 23 Conducted Spurious Emission (802.11n-HT20, Ch149, 12 GHz-25 GHz)**

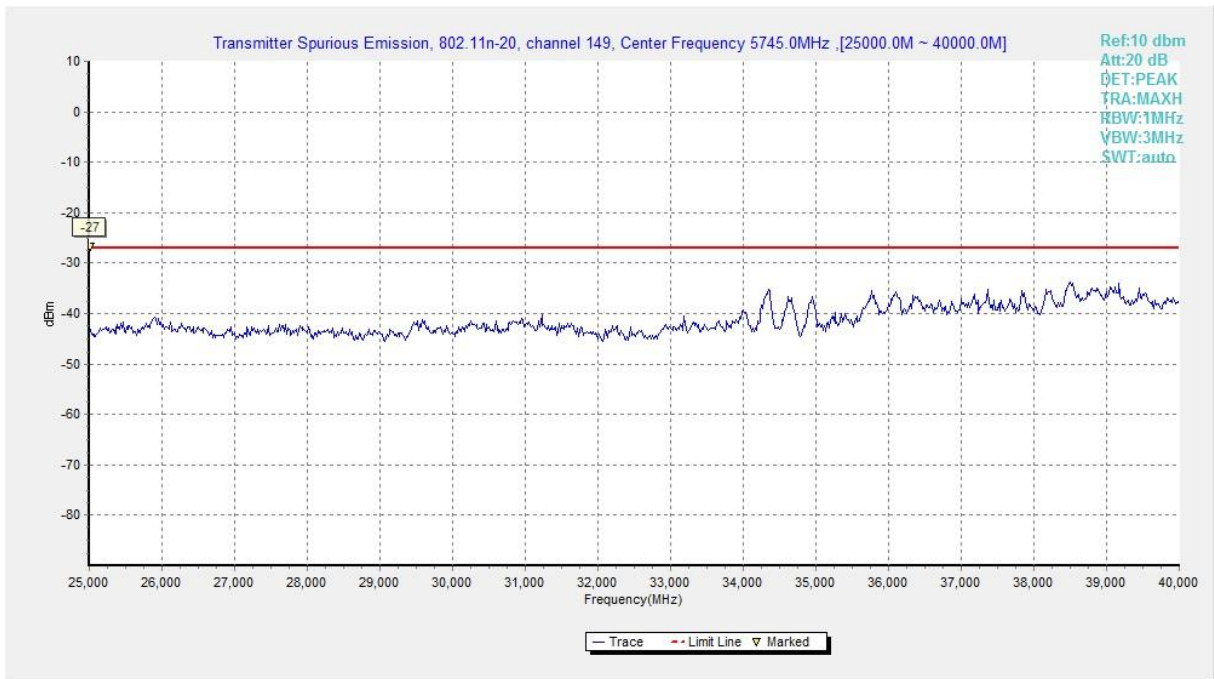


**Fig. 24 Conducted Spurious Emission (802.11n-HT20, Ch149, 25 GHz-40 GHz)**




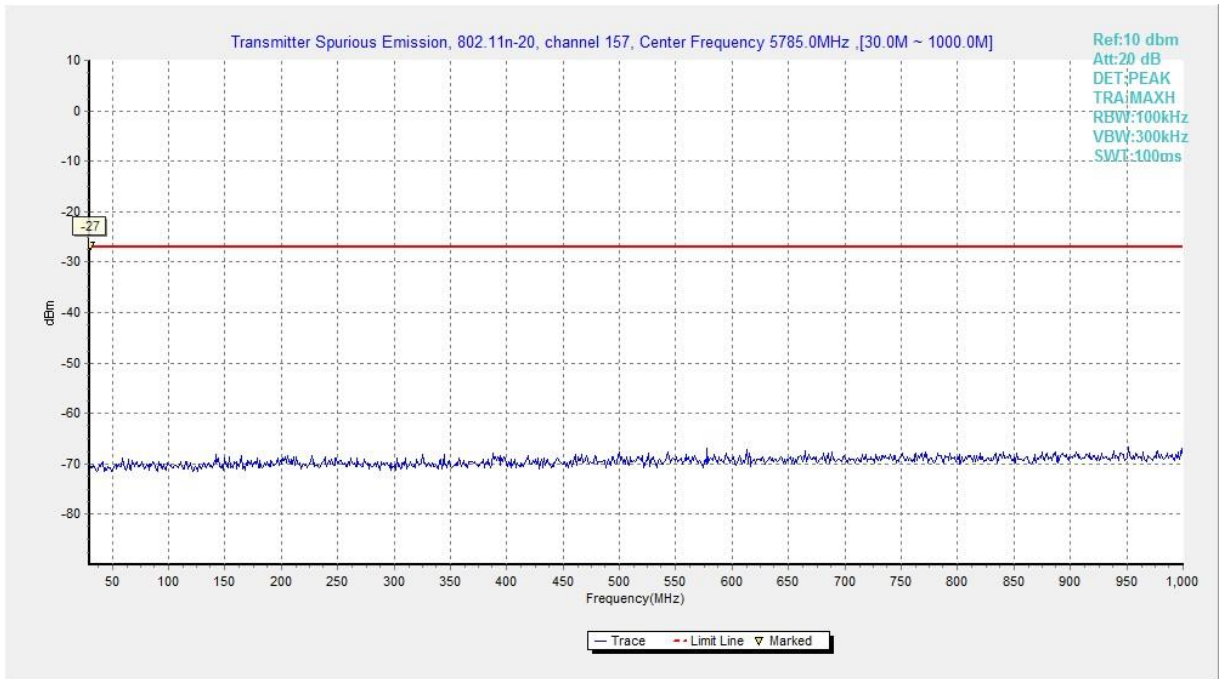


**Fig. 25 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)**

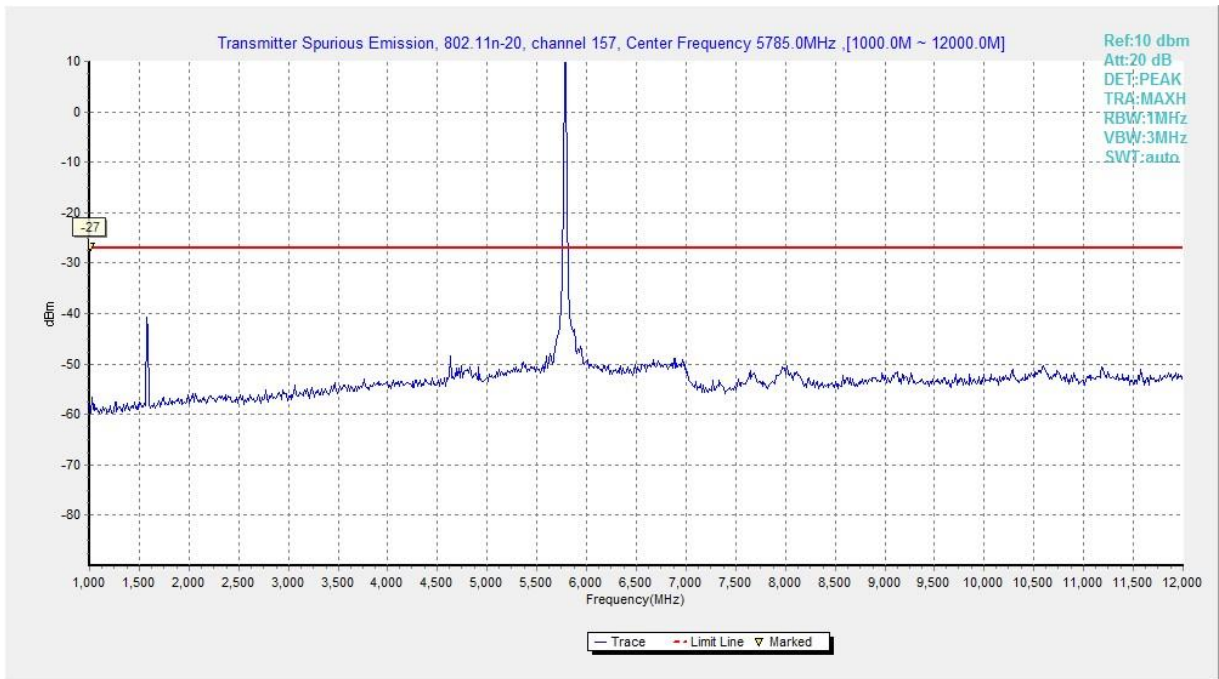


**Fig. 26 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -12 GHz)**

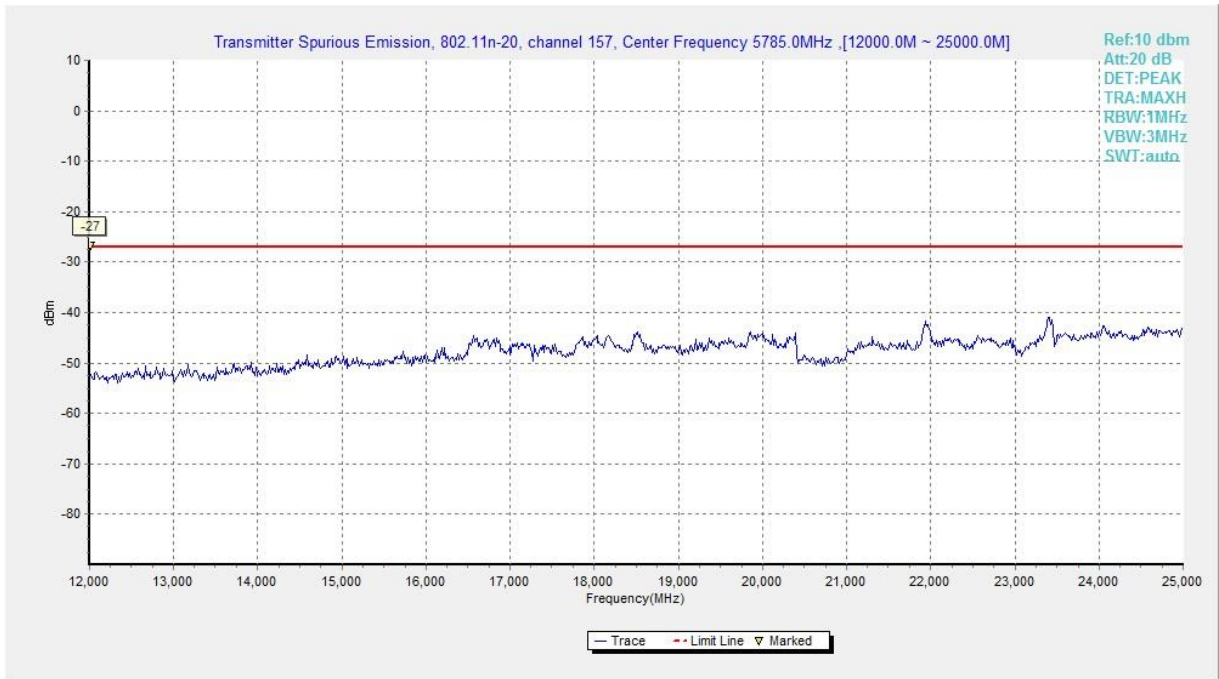


**Fig. 27 Conducted Spurious Emission (802.11n-HT20, Ch157, 12 GHz-25 GHz)**

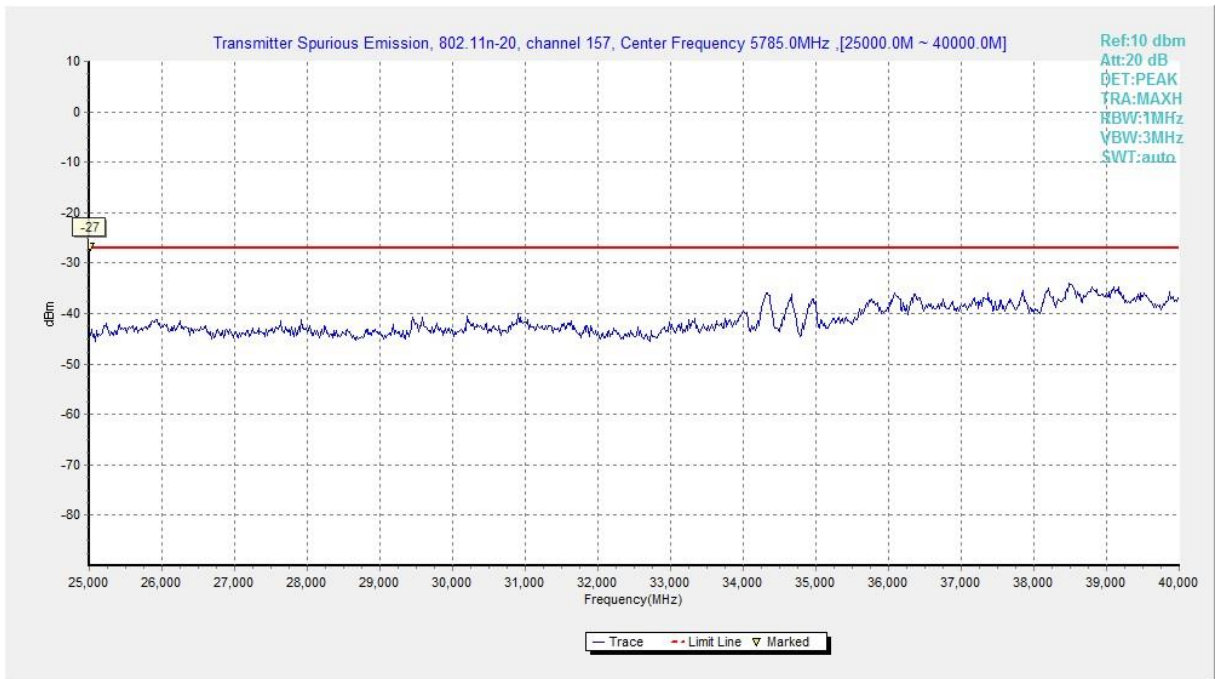


**Fig. 28 Conducted Spurious Emission (802.11n-HT20, Ch157, 25 GHz-40 GHz)**

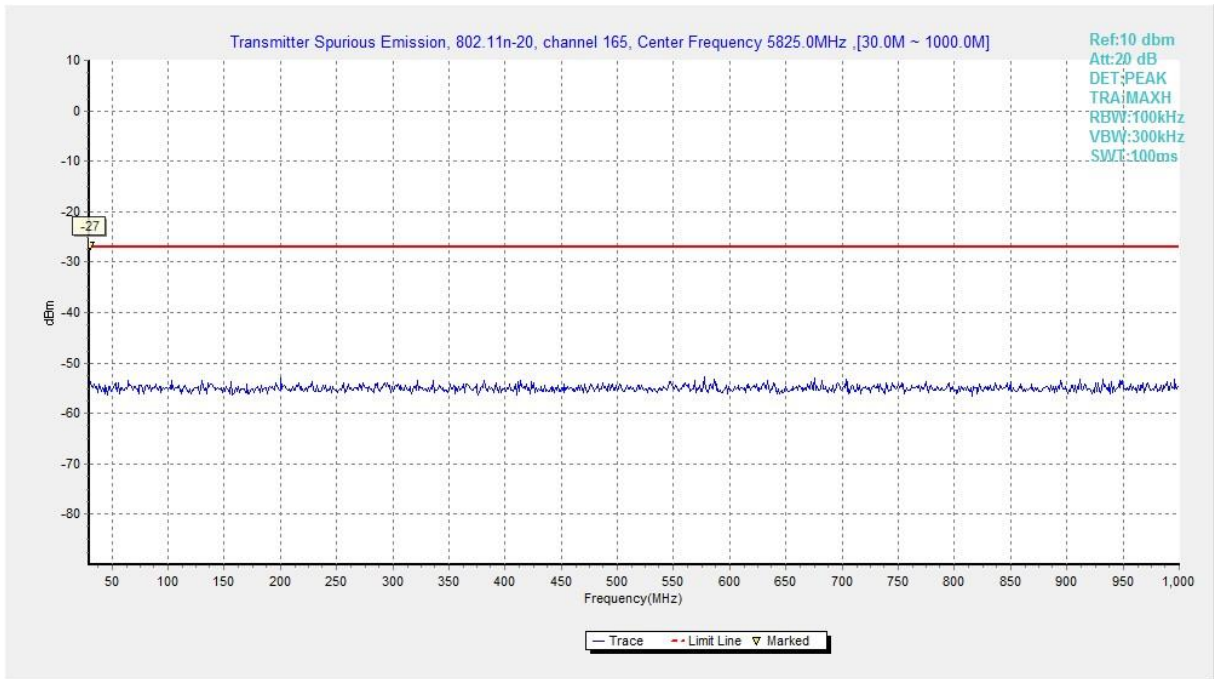


**Fig. 29 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)**

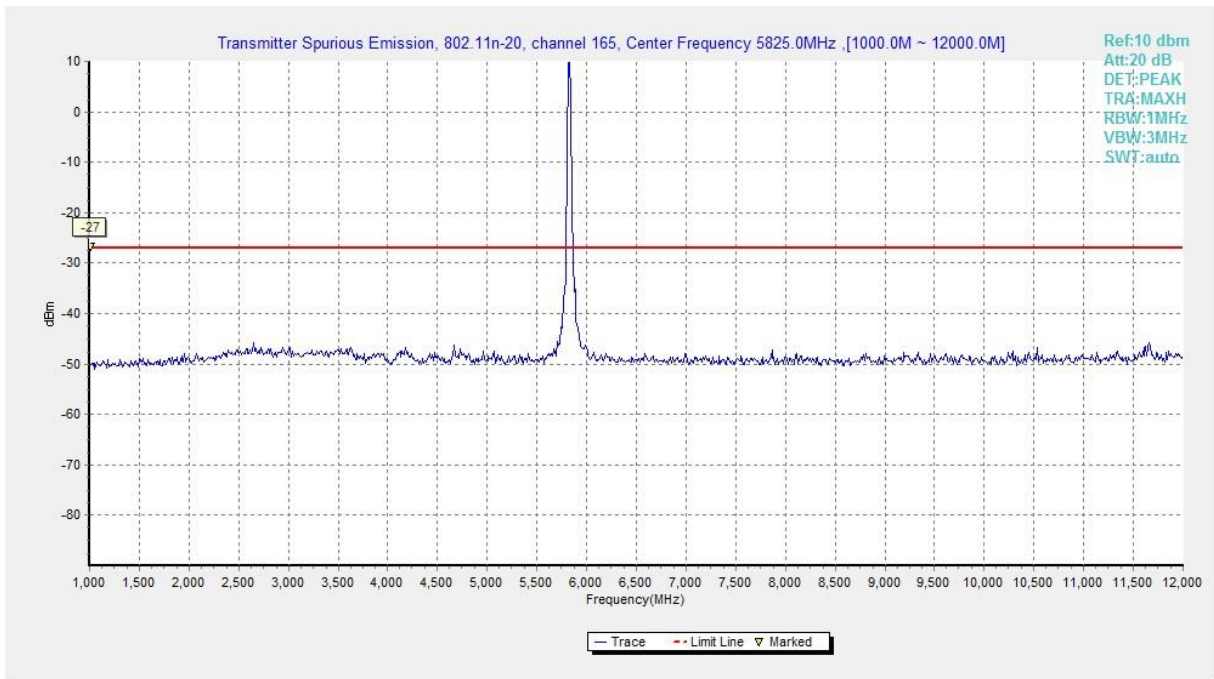


**Fig. 30 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -12 GHz)**

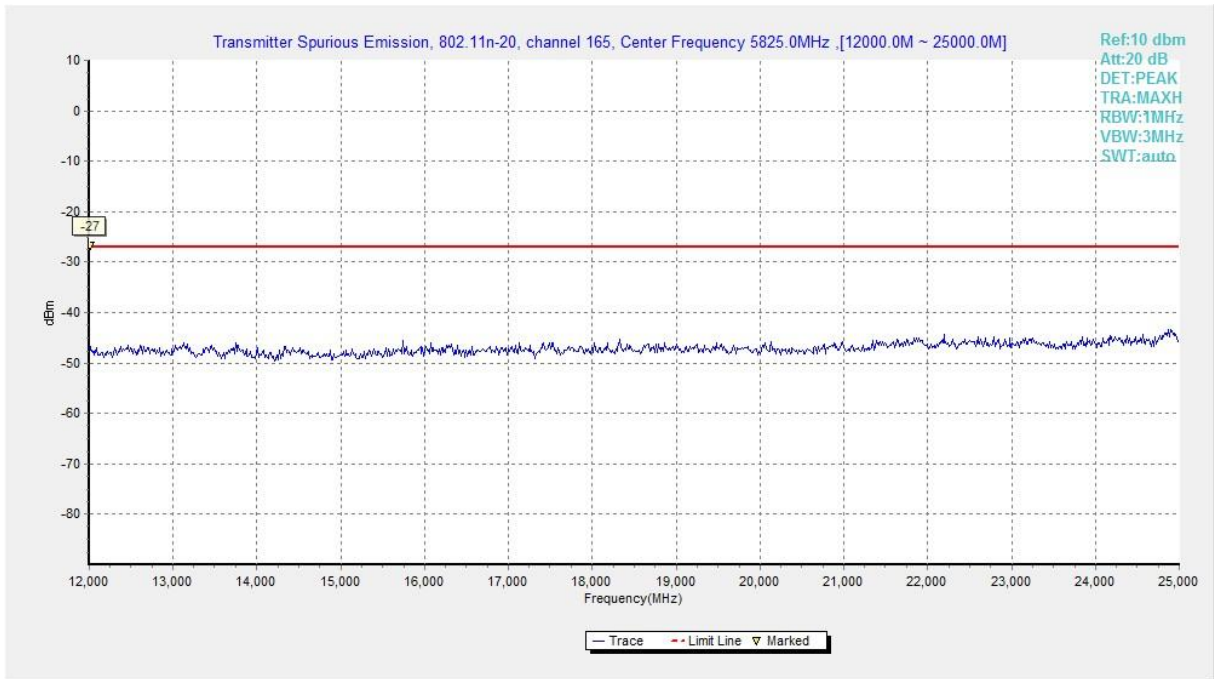


**Fig. 31 Conducted Spurious Emission (802.11n-HT20, Ch165, 12 GHz-25 GHz)**

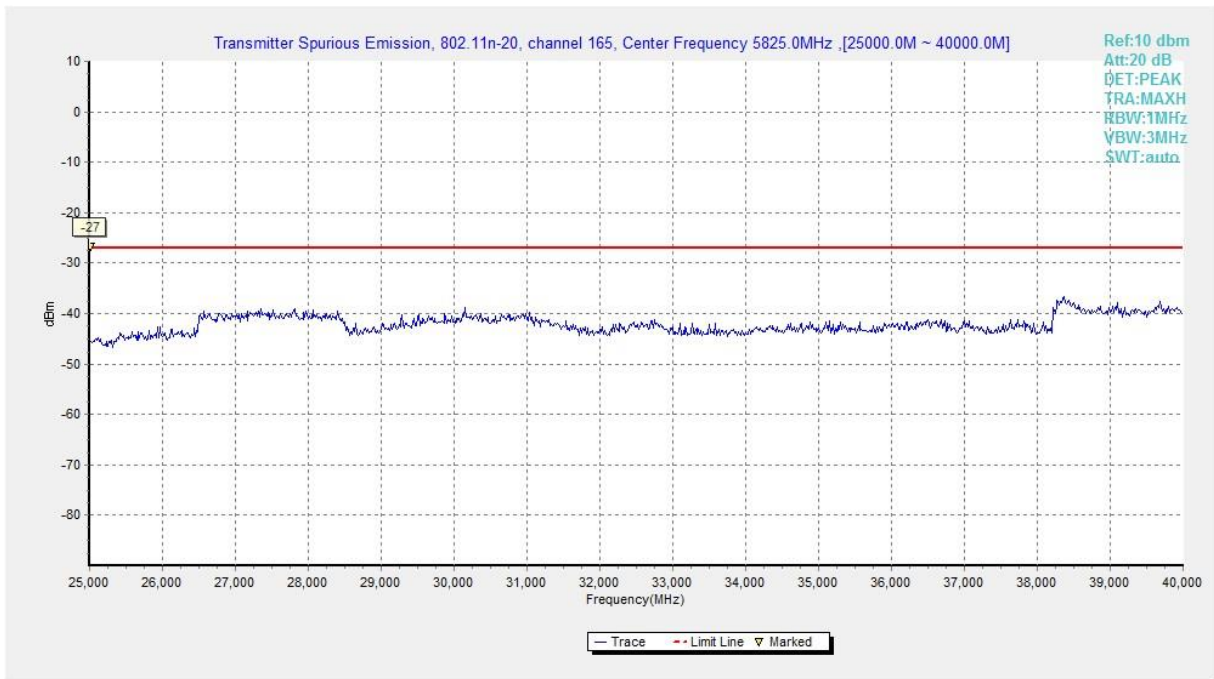


**Fig. 32 Conducted Spurious Emission (802.11n-HT20, Ch165, 25 GHz-40 GHz)**

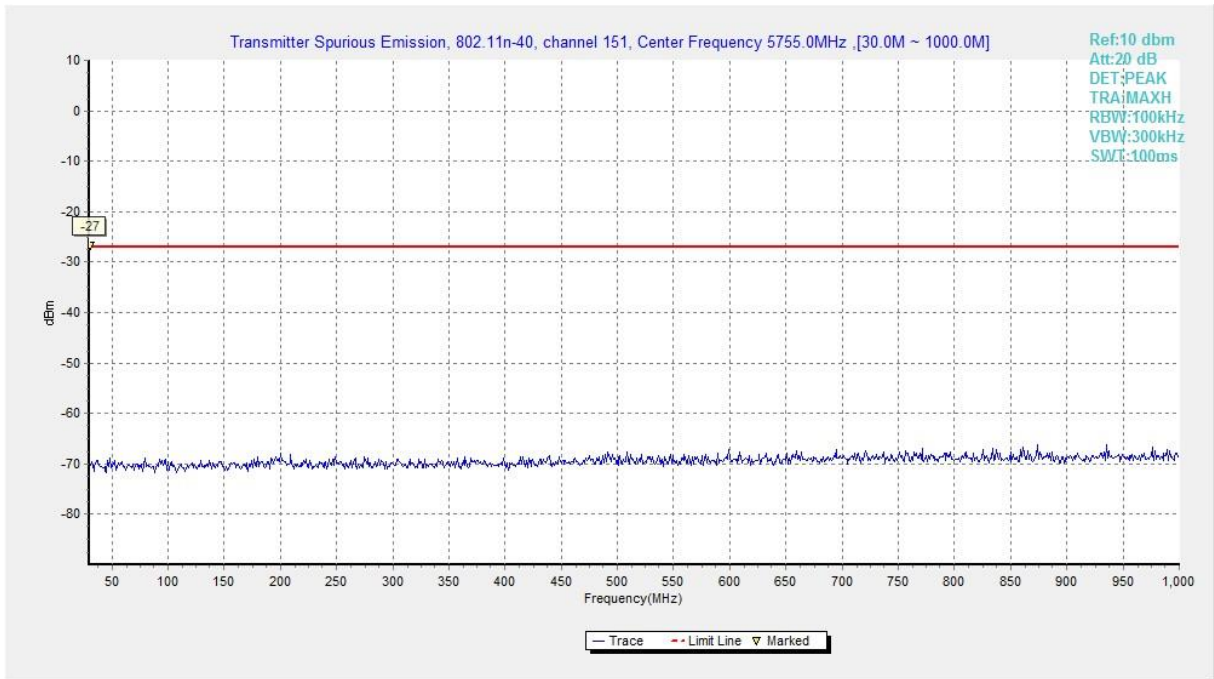


**Fig. 33 Conducted Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)**

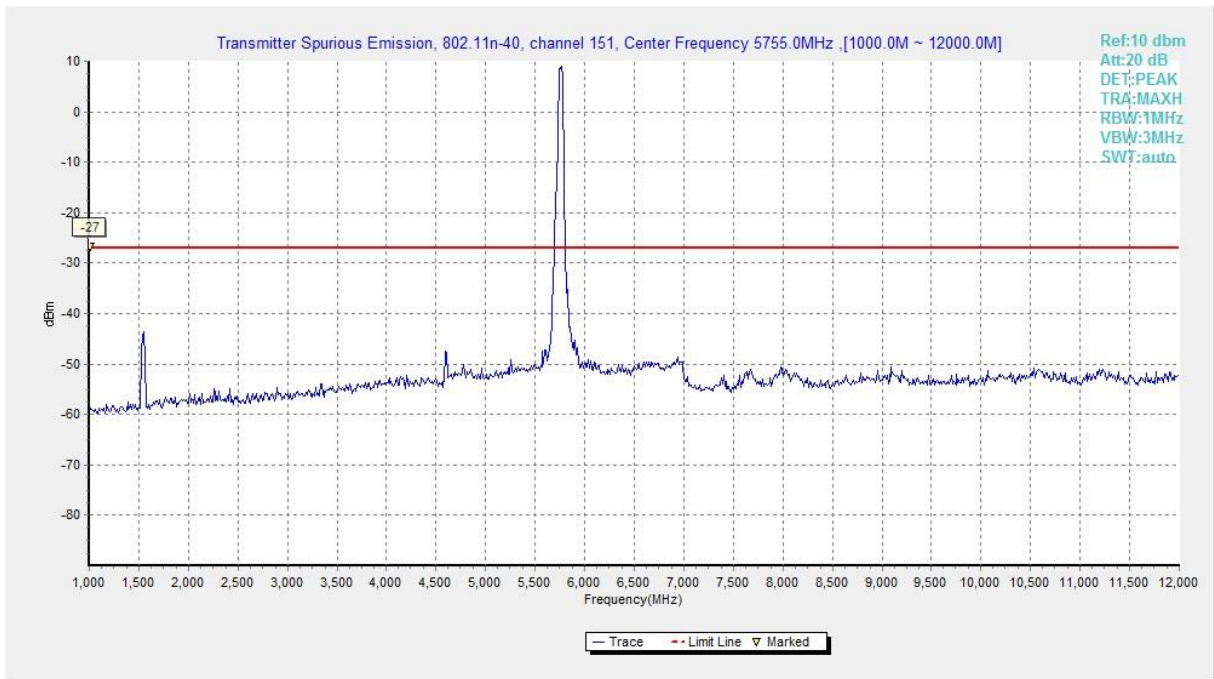


**Fig. 34 Conducted Spurious Emission (802.11n-HT40, Ch151, 1 GHz -12 GHz)**

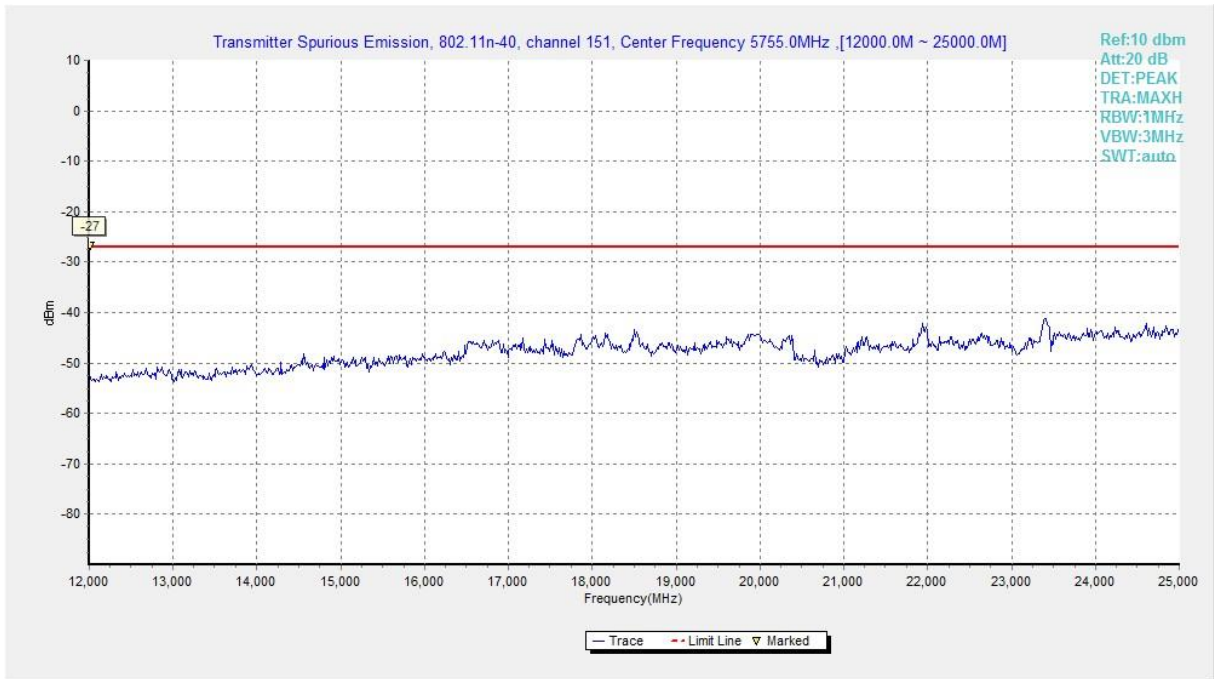


**Fig. 35 Conducted Spurious Emission (802.11n-HT40, Ch151, 12 GHz-25 GHz)**

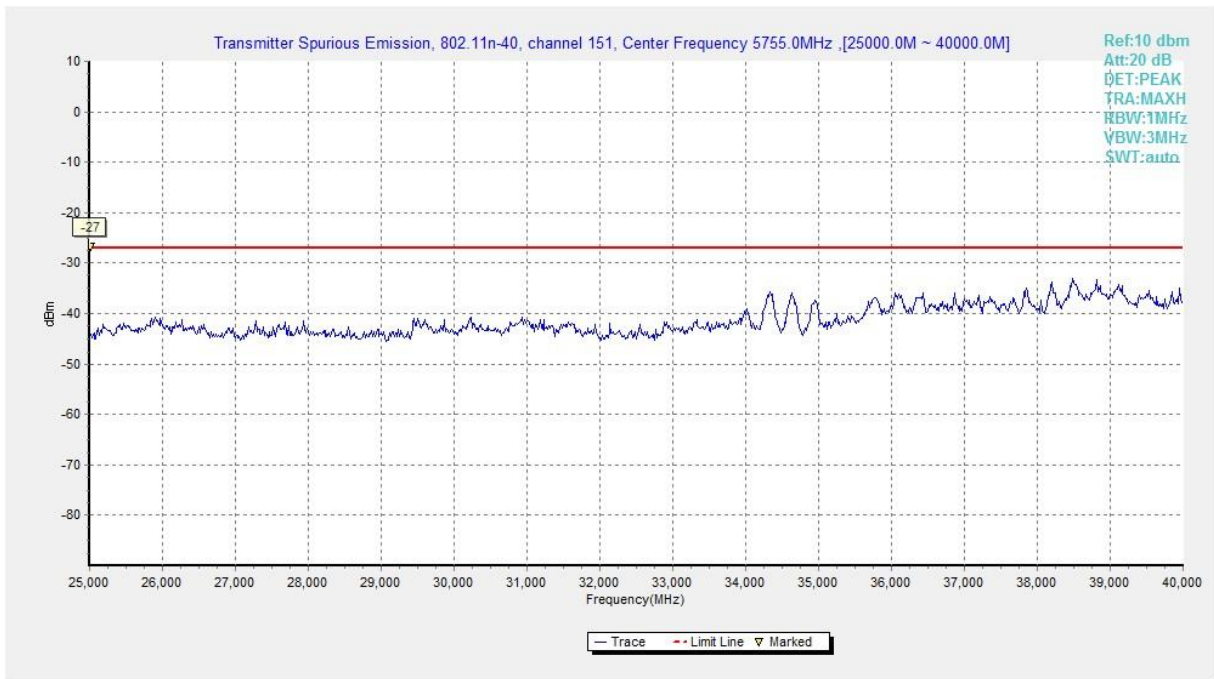


**Fig. 36 Conducted Spurious Emission (802.11n-HT40, Ch151, 25 GHz-40 GHz)**

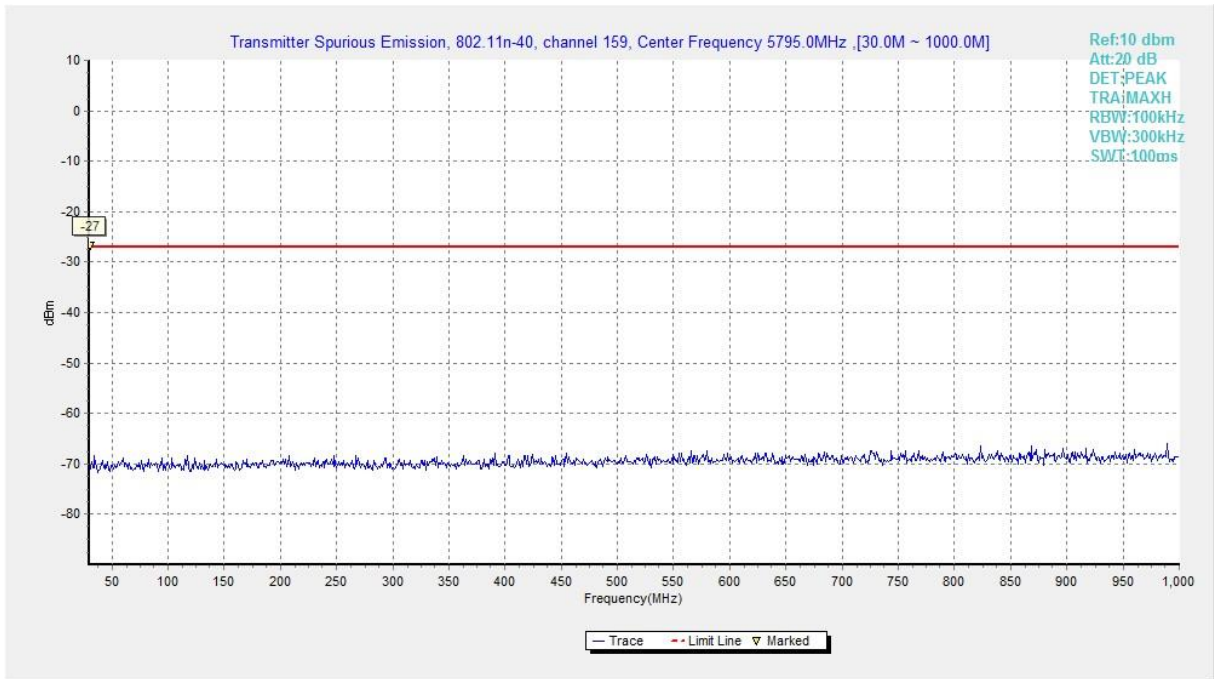


**Fig. 37 Conducted Spurious Emission (802.11n-HT40, Ch159, 30 MHz-1 GHz)**

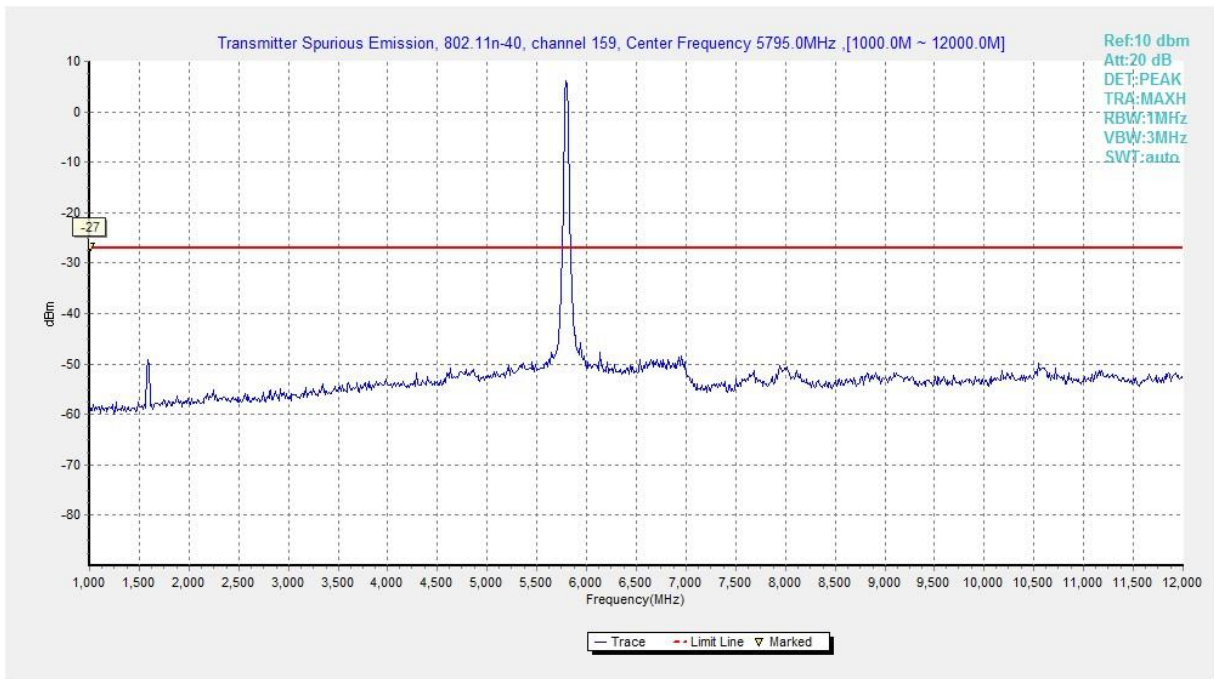

**Fig. 38 Conducted Spurious Emission (802.11n-HT40, Ch159, 1 GHz -12 GHz)**

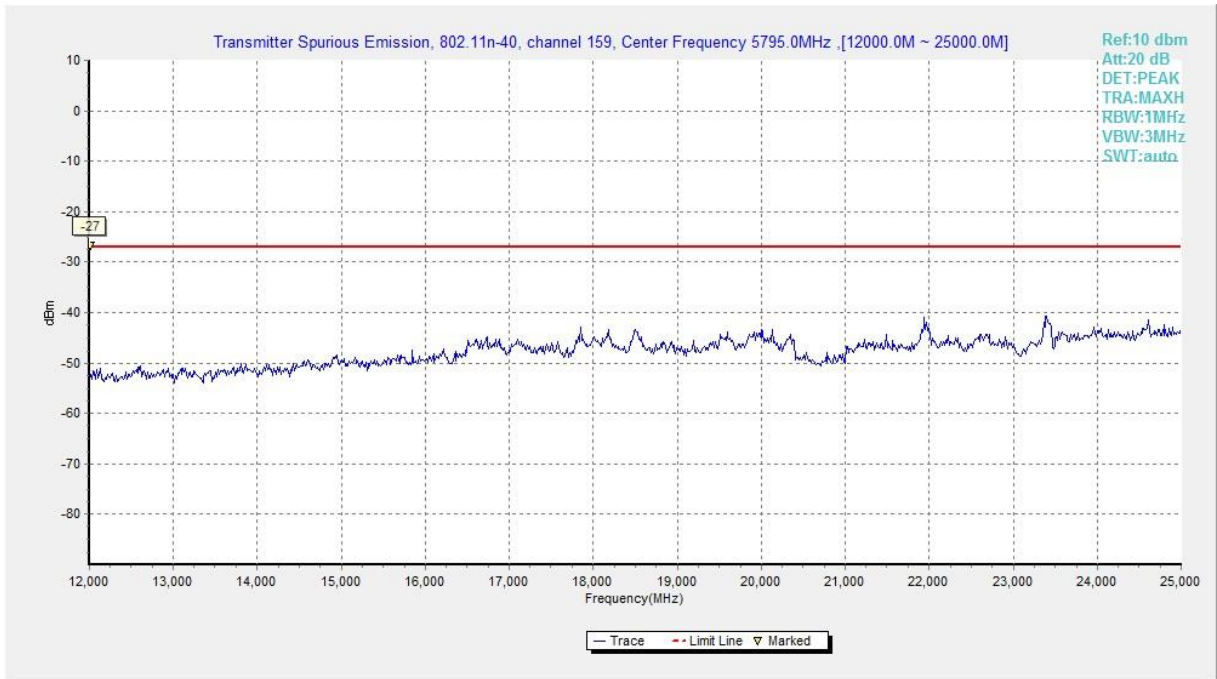

**Fig. 39 Conducted Spurious Emission (802.11n-HT40, Ch159, 12 GHz-25 GHz)**

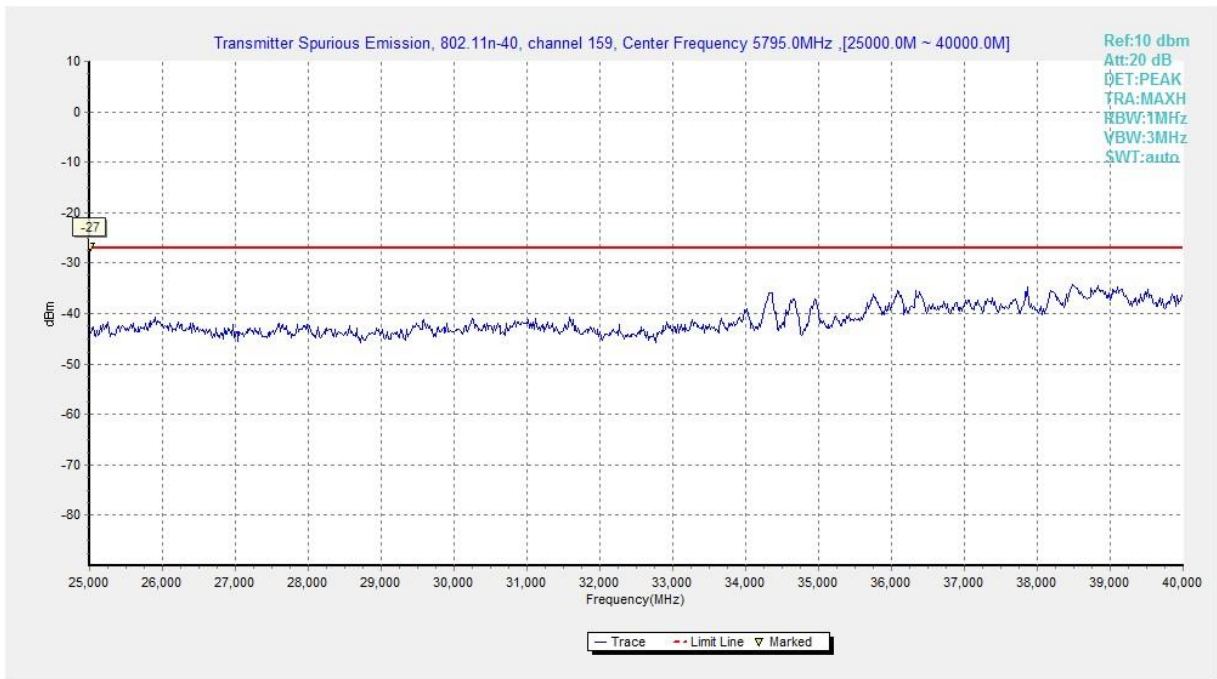

**Fig. 40 Conducted Spurious Emission (802.11n-HT40, Ch159, 25 GHz-40 GHz)**



### A.5.2 Transmitter Spurious Emission - Radiated

#### Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBµV/m)	Measurement distance(m)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

#### Measurement Results:

##### 802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
			7 GHz ~ 18 GHz	---

##### 802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P

	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

**Average Results:**

**802.11a**

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5723.566	54.7	-36.5	34.2	56.985	H
17991.200	41.0	-25.5	43.4	23.102	H
17996.700	40.9	-25.5	43.4	23.002	V
18000.000	40.8	-26.5	46.4	20.905	H
17992.300	40.8	-25.5	43.4	22.902	H
17975.800	40.8	-25.5	43.4	22.902	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17994.500	40.9	-25.5	43.4	23.002	H
17992.300	40.8	-25.5	43.4	22.902	H
18000.000	40.7	-26.5	46.4	20.805	V
17233.300	40.7	-26.6	40.1	27.201	H
17963.700	40.7	-25.5	43.4	22.802	H
17926.300	40.6	-25.5	43.4	22.702	H

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5850.100	48.2	-36.5	34.2	50.508	H
17993.400	41.0	-25.5	43.4	23.102	H
17998.900	41.0	-25.5	43.4	23.102	V
17981.300	40.8	-25.5	43.4	22.902	H
18000.000	40.8	-26.5	46.4	20.905	H
17235.500	40.7	-26.6	40.1	27.201	H

**802.11n-HT20**

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5723.474	54.8	-36.5	34.2	57.085	H
17234.400	43.5	-26.6	40.1	30.001	H
17233.300	43.1	-26.6	40.1	29.601	V
17232.200	43.0	-26.6	40.1	29.501	H
17238.800	42.9	-26.6	40.1	29.401	H
17231.100	42.8	-26.6	40.1	29.301	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
18000.000	40.9	-26.5	46.4	21.005	H
17996.700	40.9	-25.5	43.4	23.002	H
17356.500	40.9	-26.6	40.1	27.401	V
17986.800	40.8	-25.5	43.4	22.902	H
17997.800	40.7	-25.5	43.4	22.802	H
17991.200	40.7	-25.5	43.4	22.802	H

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5848.468	58.0	-36.5	34.2	60.308	H
17234.400	43.5	-26.6	40.1	30.001	H
17233.300	43.1	-26.6	40.1	29.601	V
17232.200	43.0	-26.6	40.1	29.501	H
17238.800	42.9	-26.6	40.1	29.401	H
17231.100	42.8	-26.6	40.1	29.301	H

**802.11n-HT40**

Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5721.622	53.5	-36.5	34.2	55.785	H
17982.400	41.0	-25.5	43.4	23.102	H
18000.000	41.0	-26.5	46.4	21.105	V
17992.300	40.9	-25.5	43.4	23.002	H
17998.900	40.8	-25.5	43.4	22.902	H
17994.500	40.8	-25.5	43.4	22.902	H

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5852.010	49.6	-36.5	34.2	51.908	H
17996.700	41.0	-25.5	43.4	23.102	H
18000.000	41.0	-26.5	46.4	21.105	V
17997.800	40.9	-25.5	43.4	23.002	H
17990.100	40.9	-25.5	43.4	23.002	H
17995.600	40.8	-25.5	43.4	22.902	H

**Peak Results:**

**802.11a**

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5724.290	68.6	-36.5	34.2	70.885	H
17235.500	52.9	-26.6	40.1	39.401	H
17906.500	52.0	-25.7	43.4	34.342	V
17905.400	52.0	-25.7	43.4	34.342	H
17998.900	52.0	-25.5	43.4	34.102	H
17960.400	51.9	-25.5	43.4	34.002	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17978.000	52.0	-25.5	43.4	34.102	H
17937.300	51.8	-25.5	43.4	33.902	H
17997.800	51.8	-25.5	43.4	33.902	V
17998.900	51.6	-25.5	43.4	33.702	H
17235.500	51.6	-26.6	40.1	38.101	H
17927.400	51.5	-25.5	43.4	33.602	H

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5850.354	61.4	-36.5	34.2	63.708	H
17236.600	52.4	-26.6	40.1	38.901	H
17917.500	52.3	-25.5	43.4	34.402	V
17997.800	52.2	-25.5	43.4	34.302	H
17949.400	52.2	-25.5	43.4	34.302	H
17968.100	51.9	-25.5	43.4	34.002	H

**802.11n-HT20**

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5723.497	71.8	-36.5	34.2	74.085	H
17233.300	55.0	-26.6	40.1	41.501	H
17236.600	55.0	-26.6	40.1	41.501	V
17237.700	54.7	-26.6	40.1	41.201	H
17242.100	53.8	-26.6	40.1	40.301	H
17241.000	53.8	-26.6	40.1	40.301	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17990.100	52.6	-25.5	43.4	34.702	H
17985.700	52.5	-25.5	43.4	34.602	H
17996.700	52.2	-25.5	43.4	34.302	V
17821.800	52.0	-25.7	43.4	34.342	H
17963.700	51.9	-25.5	43.4	34.002	H
17349.900	51.8	-26.6	40.1	38.301	H

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5848.950	61.0	-36.5	34.2	63.308	H
17233.300	55.0	-26.6	40.1	41.501	H
17236.600	55.0	-26.6	40.1	41.501	V
17237.700	54.7	-26.6	40.1	41.201	H
17242.100	53.8	-26.6	40.1	40.301	H
17241.000	53.8	-26.6	40.1	40.301	H

**802.11n-HT40**

Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5721.898	67.2	-36.5	34.2	69.485	H
17980.200	52.5	-25.5	43.4	34.602	H
17263.000	52.4	-26.6	40.1	38.901	V
17974.700	51.9	-25.5	43.4	34.002	H
17899.900	51.8	-25.7	43.4	34.142	H
17981.300	51.8	-25.5	43.4	33.902	H

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
5852.079	62.5	-36.5	34.2	64.808	H
17995.600	52.8	-25.5	43.4	34.902	H
17921.900	52.4	-25.5	43.4	34.502	V
17939.500	52.1	-25.5	43.4	34.202	H
17991.200	51.9	-25.5	43.4	34.002	H
17962.600	51.7	-25.5	43.4	33.802	H

**Conclusion: PASS**



## A.6. Band Edges Compliance

### A6.1 Band Edges - conducted

#### Measurement Limit:

Standard	Limit (dBm/MHz)
FCC 47 CFR Part 15.407(b)(4)	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The measurement is made according to KDB 789033 D02

#### Measurement Uncertainty:


Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Result:


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.41	P
	5825 MHz	Fig.42	P
802.11n HT20	5745 MHz	Fig.43	P
	5825 MHz	Fig.44	P
802.11n HT40	5755 MHz	Fig.45	P
	5795 MHz	Fig.46	P

**Conclusion: PASS**

Test graphs as below:

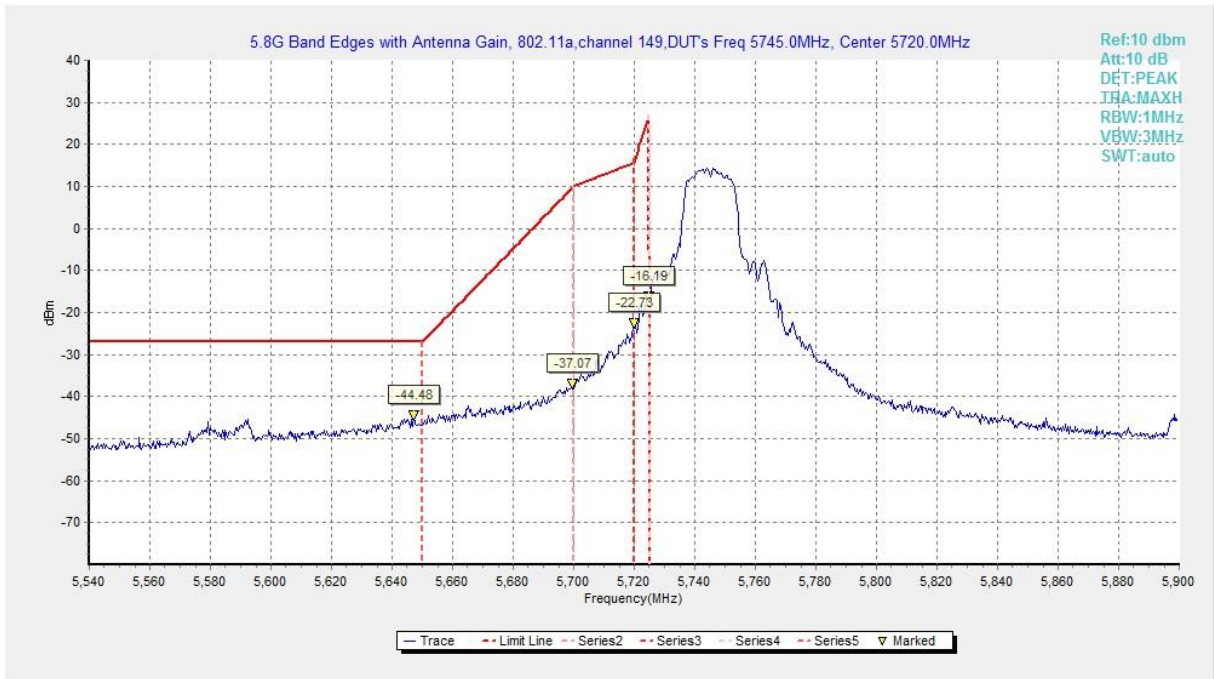

**Fig. 41 Band Edges (802.11a, 5745MHz)**

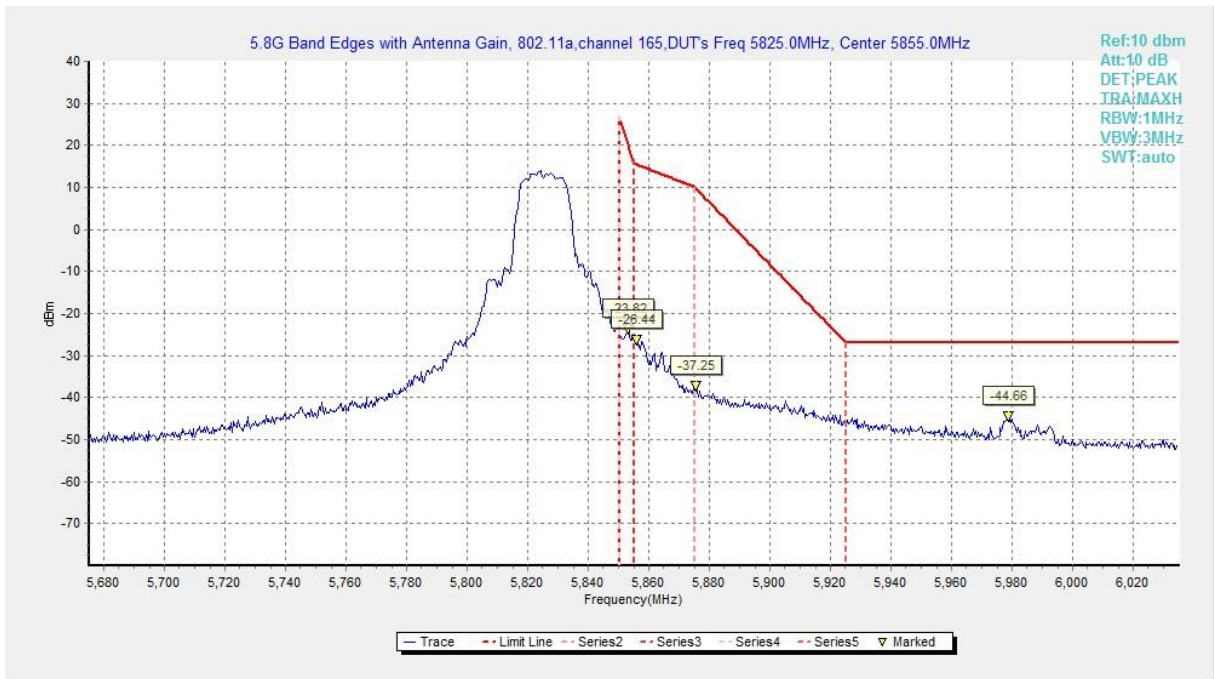

**Fig. 42 Band Edges (802.11a, 5825MHz)**

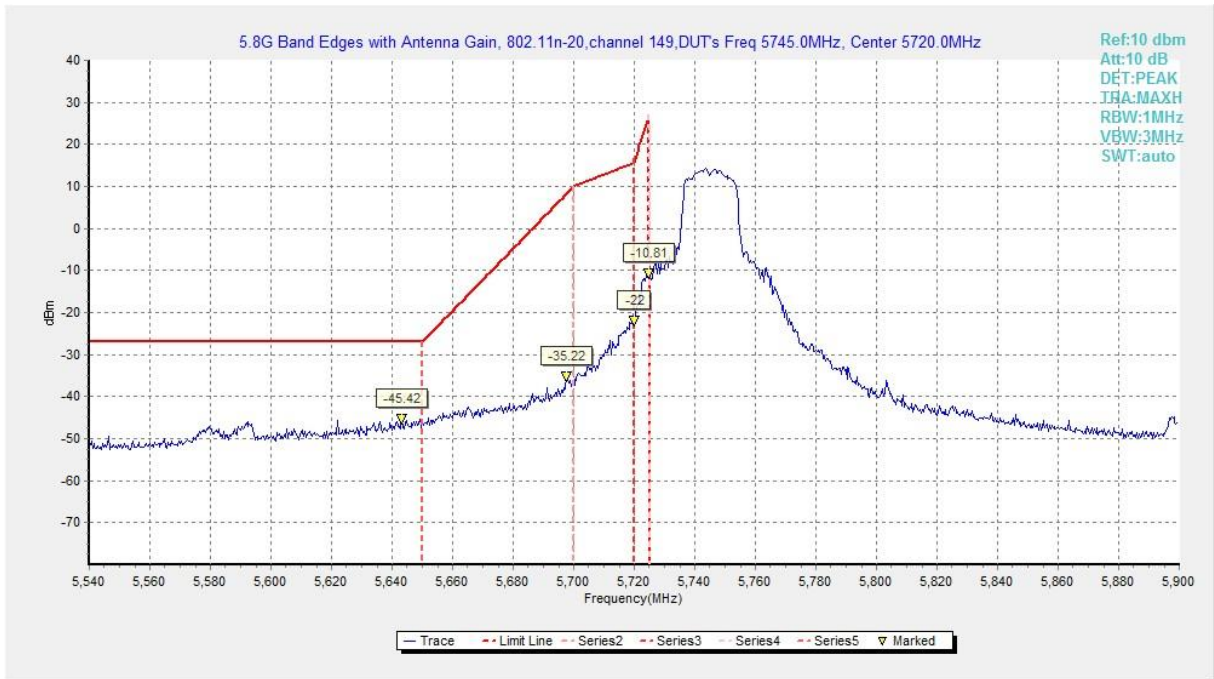


Fig. 43 Band Edges (802.11n-HT20, 5745MHz)



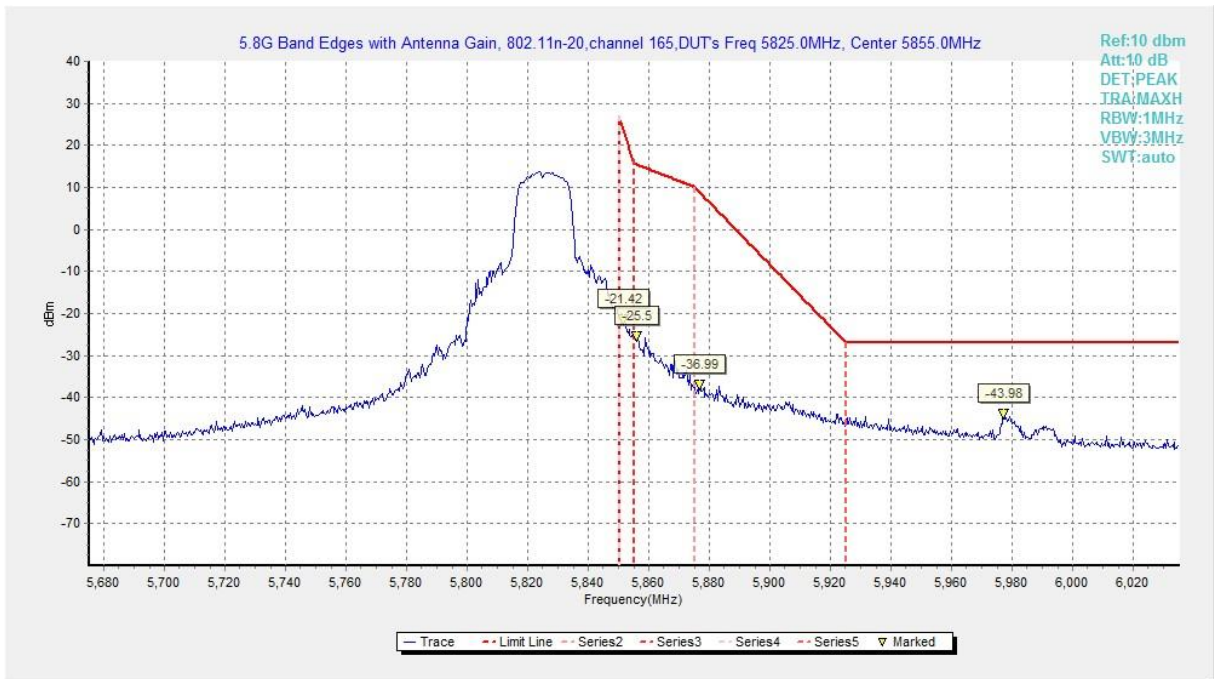


Fig. 44 Band Edges (802.11n-HT20, 5825MHz)

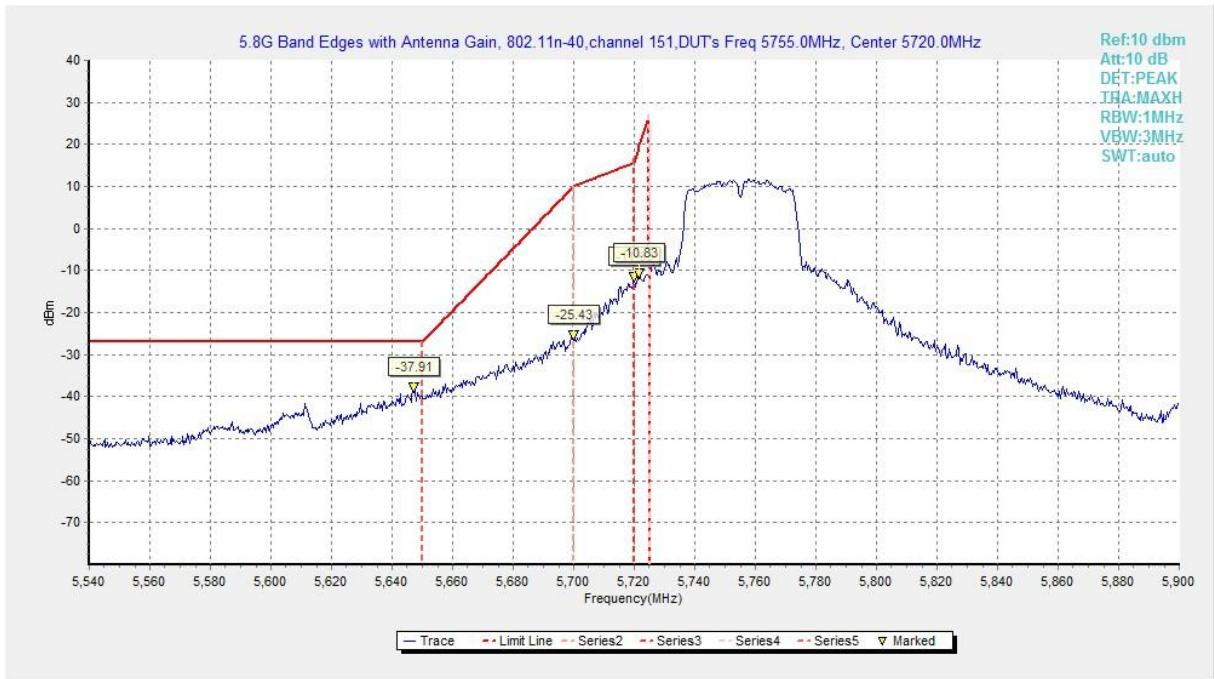

**Fig. 45 Band Edges (802.11n-HT40, 5755MHz)**

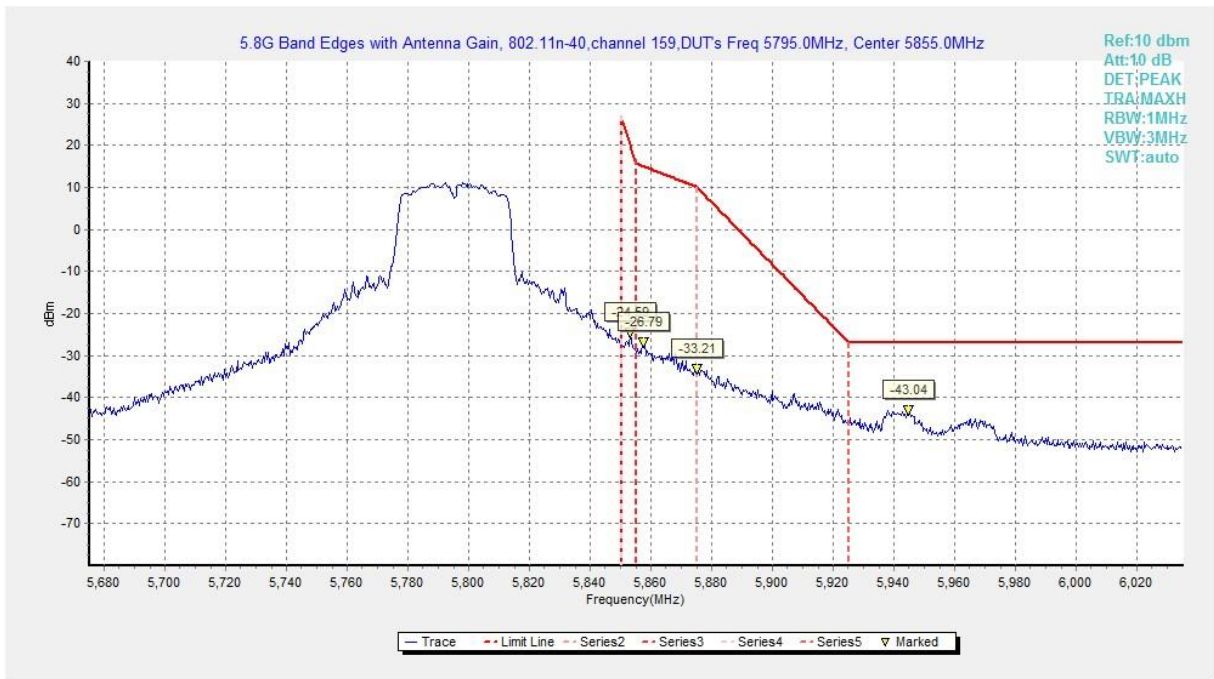

**Fig. 46 Band Edges (802.11n-HT40, 5795MHz)**

**A6.2 Band Edges - Radiated**

**Measurement Limit:**

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033 D02


In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Measurement Result:**


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.47	P
	5825 MHz	Fig.48	P
802.11n HT20	5745 MHz	Fig.49	P
	5825 MHz	Fig.50	P
802.11n HT40	5755 MHz	Fig.51	P
	5795 MHz	Fig.52	P

**Conclusion: PASS**


**Test graphs as below:**

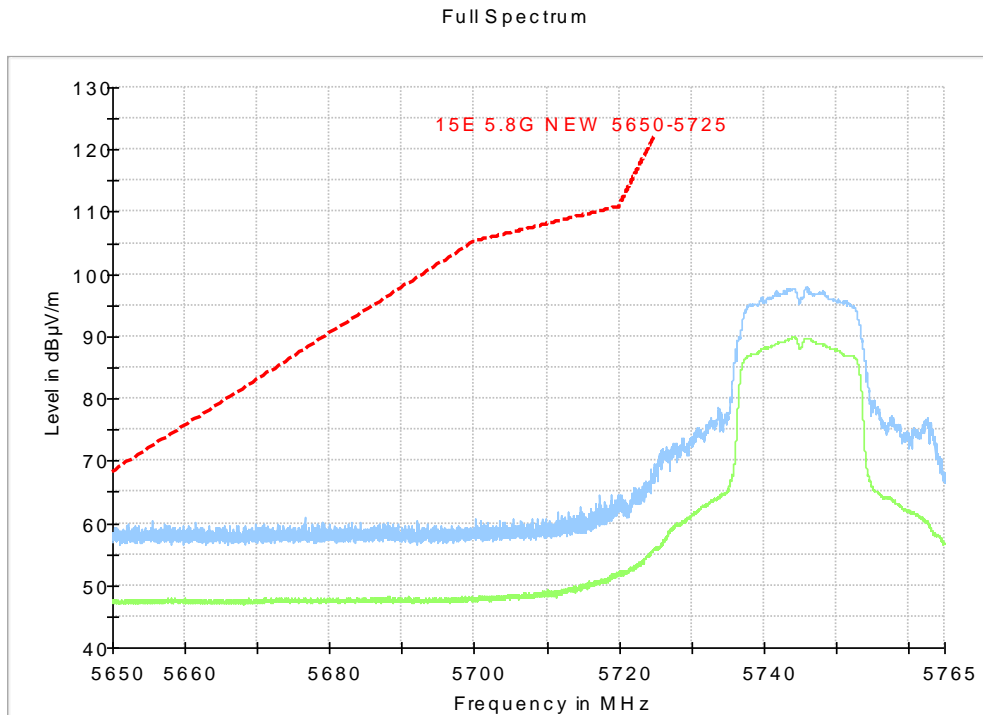


**Fig. 47 Band Edges (802.11a, 5745MHz)**

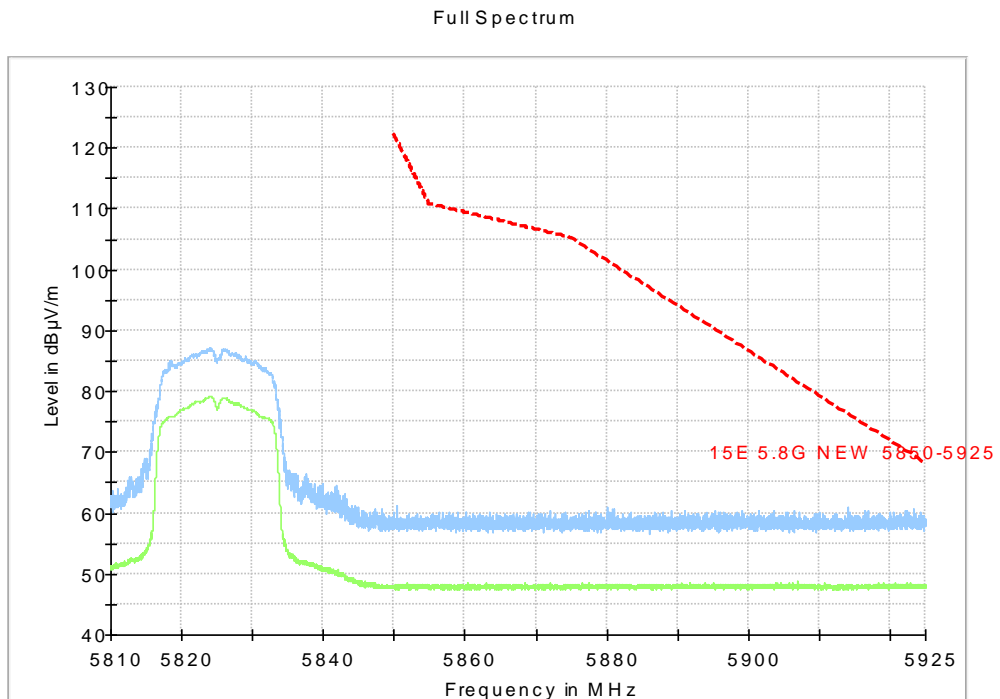


**Fig. 48 Band Edges (802.11a, 5825MHz)**

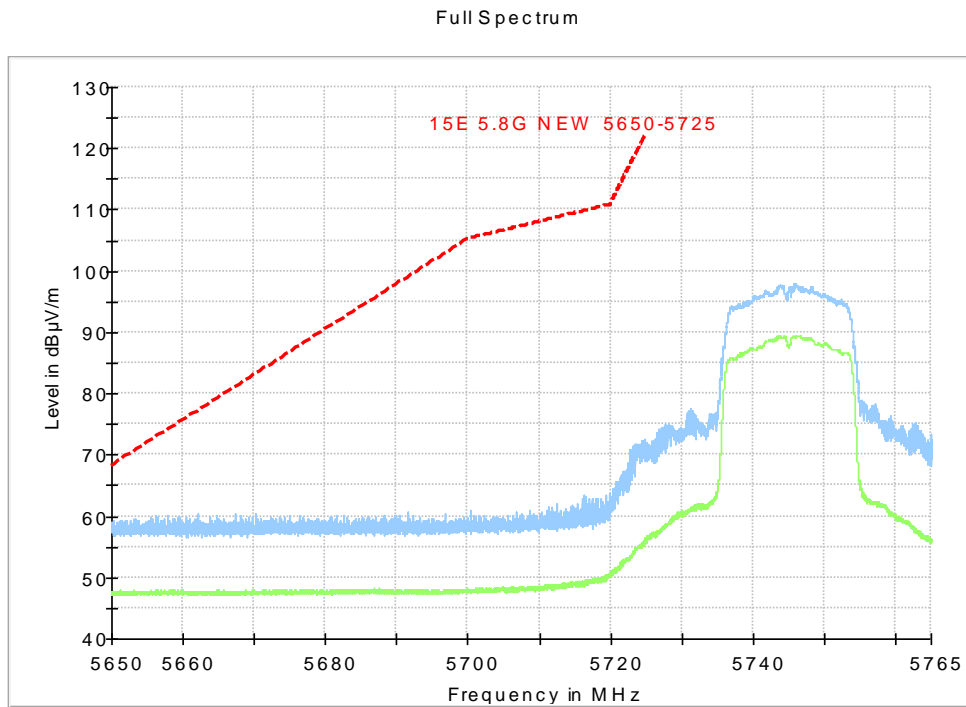


**Fig. 49 Band Edges (802.11n-HT20, 5745MHz)**

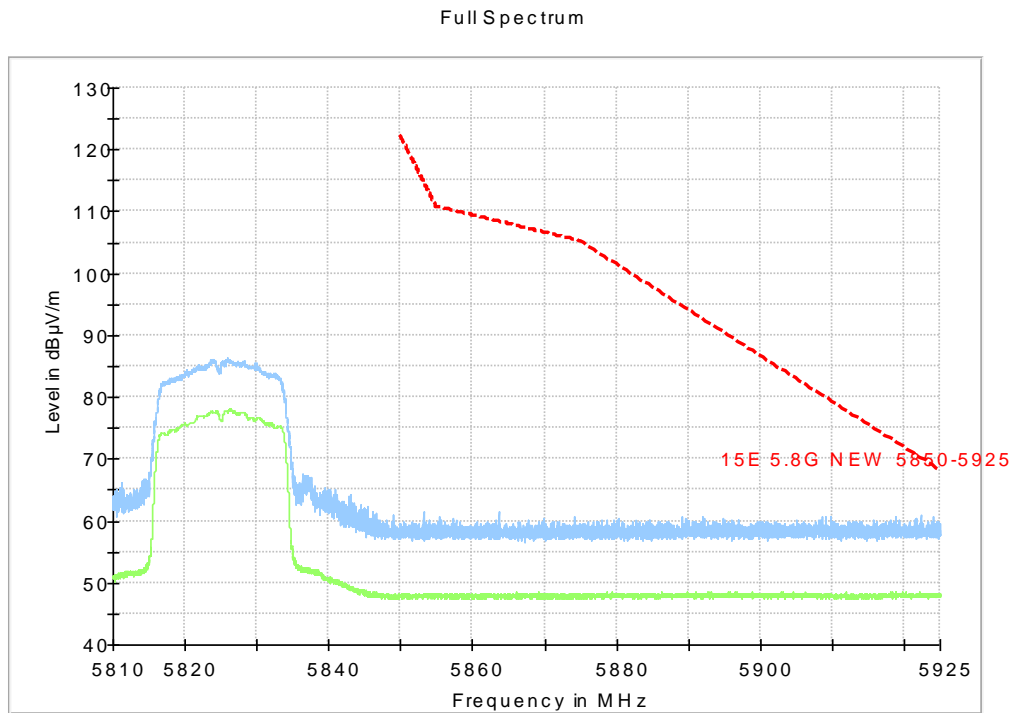

**Fig. 50 Band Edges (802.11n-HT20, 5825MHz)**

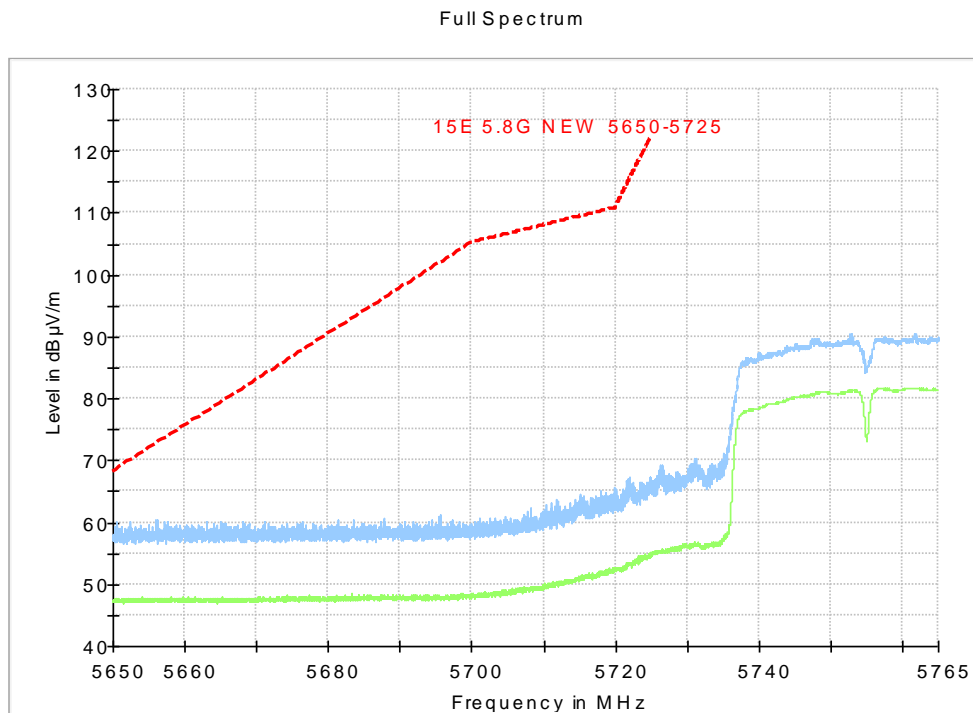

**Fig. 51 Band Edges (802.11n-HT40, 5755MHz)**

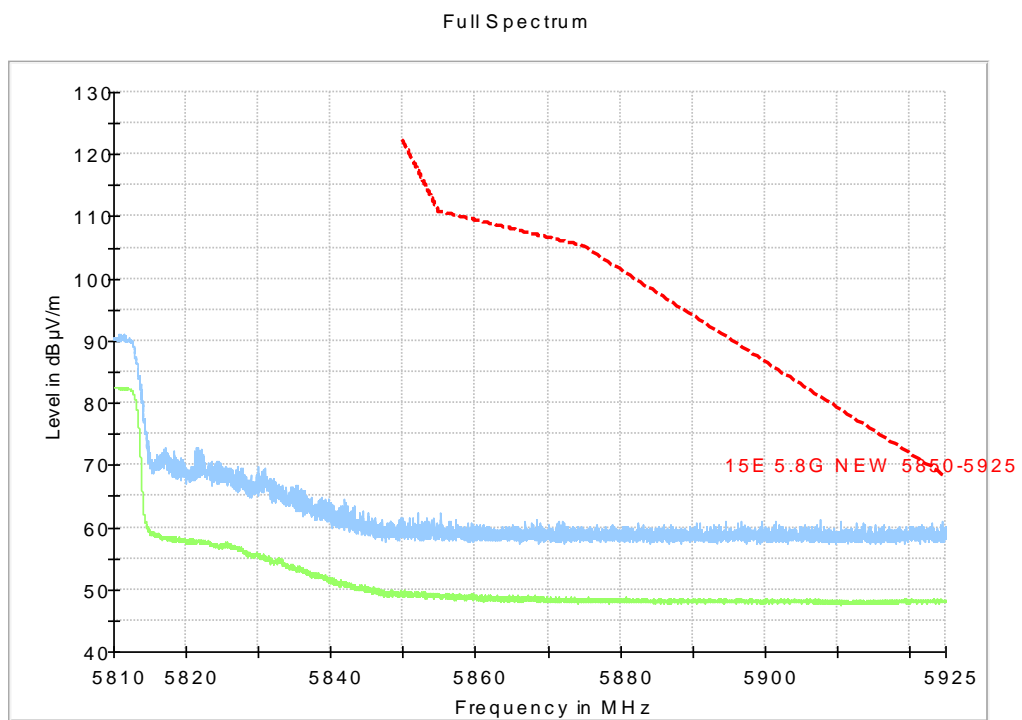

**Fig. 52 Band Edges (802.11n-HT40, 5795MHz)**



### A.7. AC Powerline Conducted Emission

**Test Condition:**

Voltage (V)	Frequency (Hz)
110	60

**Measurement uncertainty:**

Expanded measurement uncertainty for this test item is  $U = 3.2\text{dB}$ ,  $k=2$ .

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.53	Fig.55	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.54	Fig.55	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

**Conclusion: PASS**

**Test graphs as below:**

Traffic :Set.10

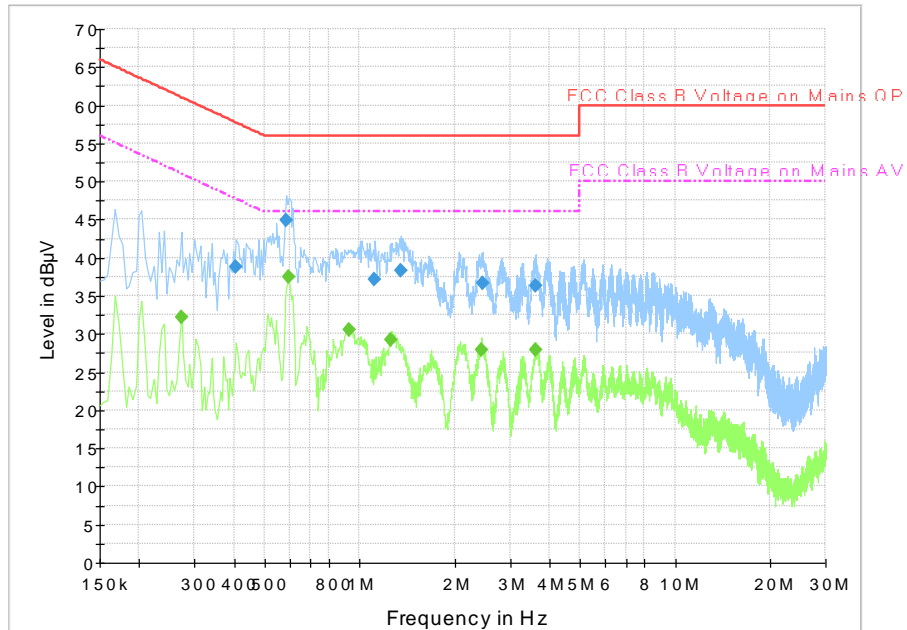


Fig. 53 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.406500	38.8	2000.0	9.000	On	L1	19.9	18.9	57.7	
0.586500	44.9	2000.0	9.000	On	L1	19.9	11.1	56.0	
1.117500	37.2	2000.0	9.000	On	N	19.7	18.8	56.0	
1.356000	38.2	2000.0	9.000	On	N	19.6	17.8	56.0	
2.458500	36.6	2000.0	9.000	On	L1	19.7	19.4	56.0	
3.606000	36.3	2000.0	9.000	On	L1	19.6	19.7	56.0	

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.271500	32.2	2000.0	9.000	On	L1	19.8	18.8	51.1	
0.595500	37.5	2000.0	9.000	On	L1	19.8	8.5	46.0	
0.928500	30.6	2000.0	9.000	On	L1	19.7	15.4	46.0	
1.257000	29.2	2000.0	9.000	On	L1	19.6	16.8	46.0	
2.436000	27.9	2000.0	9.000	On	L1	19.7	18.1	46.0	
3.624000	27.8	2000.0	9.000	On	L1	19.6	18.2	46.0	

Traffic :Set.11

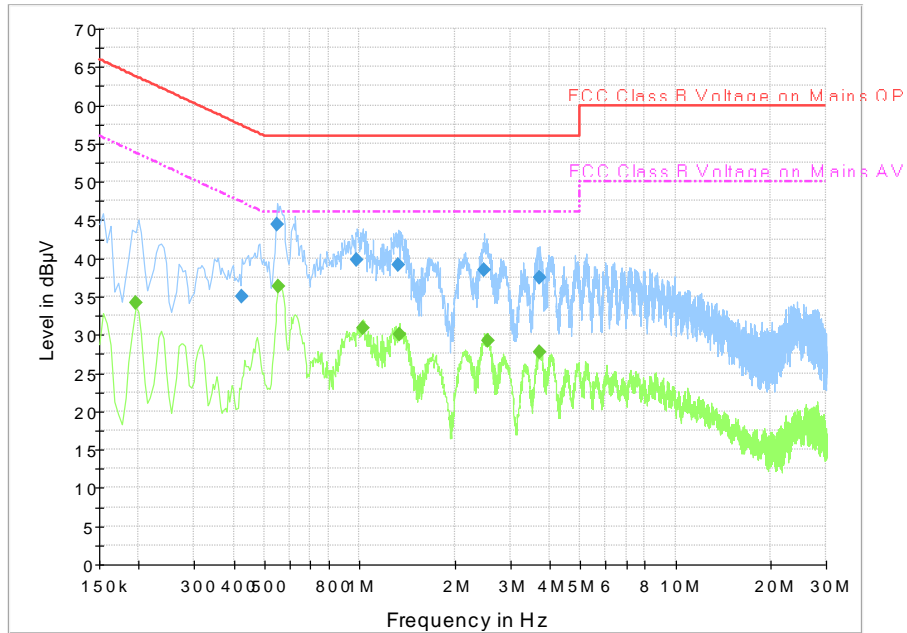


Fig. 54 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.424500	34.9	2000.0	9.000	On	N	19.9	22.4	57.4	
0.550500	44.5	2000.0	9.000	On	L1	19.9	11.5	56.0	
0.982500	39.8	2000.0	9.000	On	L1	19.6	16.2	56.0	
1.329000	39.1	2000.0	9.000	On	L1	19.6	16.9	56.0	
2.476500	38.4	2000.0	9.000	On	L1	19.7	17.6	56.0	
3.705000	37.5	2000.0	9.000	On	L1	19.6	18.5	56.0	

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.195000	34.2	2000.0	9.000	On	N	19.8	19.6	53.8	
0.555000	36.4	2000.0	9.000	On	N	19.9	9.6	46.0	
1.023000	30.9	2000.0	9.000	On	L1	19.6	15.1	46.0	
1.338000	30.1	2000.0	9.000	On	L1	19.6	15.9	46.0	
2.548500	29.2	2000.0	9.000	On	L1	19.7	16.8	46.0	
3.732000	27.7	2000.0	9.000	On	L1	19.6	18.3	46.0	

Idle: Set.10

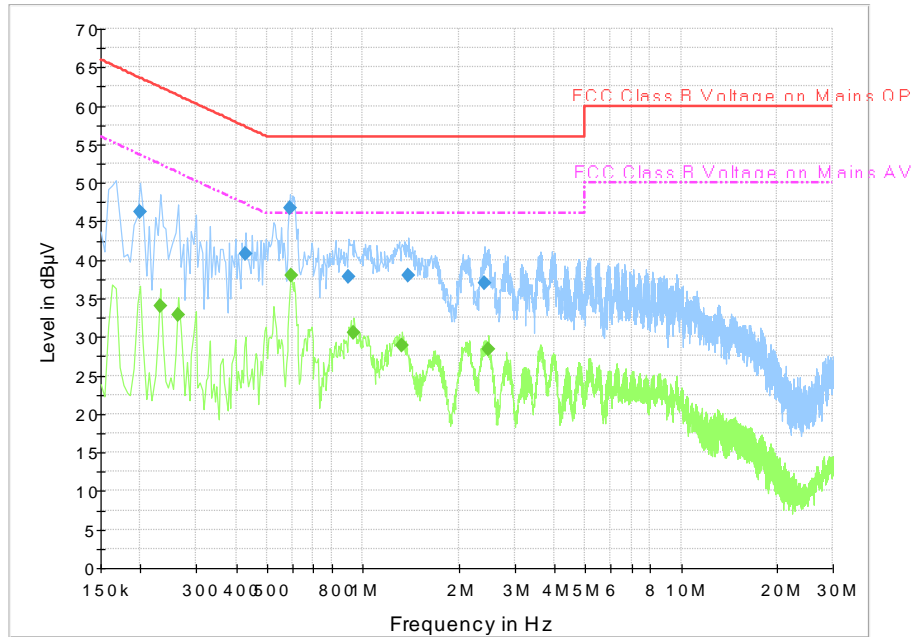


Fig. 55 AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.199500	46.3	2000.0	9.000	On	L1	19.8	17.4	63.6	
0.429000	40.8	2000.0	9.000	On	L1	19.9	16.4	57.3	
0.591000	46.6	2000.0	9.000	On	L1	19.9	9.4	56.0	
0.901500	37.8	2000.0	9.000	On	L1	19.7	18.2	56.0	
1.392000	38.0	2000.0	9.000	On	N	19.6	18.0	56.0	
2.413500	37.0	2000.0	9.000	On	L1	19.7	19.0	56.0	

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.231000	34.0	2000.0	9.000	On	L1	19.8	18.4	52.4	
0.262500	32.8	2000.0	9.000	On	L1	19.8	18.5	51.4	
0.595500	38.0	2000.0	9.000	On	L1	19.8	8.0	46.0	
0.937500	30.5	2000.0	9.000	On	L1	19.6	15.5	46.0	
1.329000	28.8	2000.0	9.000	On	L1	19.6	17.2	46.0	
2.476500	28.4	2000.0	9.000	On	L1	19.7	17.6	46.0	

**ANNEX B: Accreditation Certificate**

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP**<sup>®</sup>

---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 600118-0

**Telecommunication Technology Labs, CAICT**  
Beijing  
China


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*


**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2017-08-22 through 2018-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*

\*\*\* END OF REPORT BODY \*\*\*