



SAR TEST REPORT

No. I18Z61163-SEM01

For

TCL Communication Ltd.

Tablet PC

Model Name: 9027W

With

Hardware Version: 02

Software Version: AS2

FCC ID: 2ACCJBT13

Issued Date: 2018-8-16



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I18Z61163-SEM01	Rev.0	2018-8-8	Initial creation of test report
I18Z61163-SEM01	Rev.1	2018-8-16	<ol style="list-style-type: none">1. Update the channel with WLAN 11n-40M on page612. Update the frequency with WLAN5G UNII-3 on page633. Add the date with dipole in Annex J

TABLE OF CONTENT

1 TEST LABORATORY	6
1.1 TESTING LOCATION	6
1.2 TESTING ENVIRONMENT	6
1.3 PROJECT DATA	6
1.4 SIGNATURE	6
2 STATEMENT OF COMPLIANCE	7
3 CLIENT INFORMATION	9
3.1 APPLICANT INFORMATION	9
3.2 MANUFACTURER INFORMATION	9
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
4.1 ABOUT EUT	10
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	10
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	10
5 TEST METHODOLOGY	11
5.1 APPLICABLE LIMIT REGULATIONS	11
5.2 APPLICABLE MEASUREMENT STANDARDS	11
6 SPECIFIC ABSORPTION RATE (SAR)	12
6.1 INTRODUCTION	12
6.2 SAR DEFINITION	12
7 TISSUE SIMULATING LIQUIDS	13
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	13
7.2 DIELECTRIC PERFORMANCE	13
8 SYSTEM VERIFICATION	18
8.1 SYSTEM SETUP	18
8.2 SYSTEM VERIFICATION	19
9 MEASUREMENT PROCEDURES	20
9.1 TESTS TO BE PERFORMED	20
9.2 GENERAL MEASUREMENT PROCEDURE	22
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	23
9.4 SAR MEASUREMENT FOR LTE	24
9.5 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES FOR SAR	24
9.6 POWER DRIFT	25
10 AREA SCAN BASED 1-G SAR	26
10.1 REQUIREMENT OF KDB	26
10.2 FAST SAR ALGORITHMS	26
11 CONDUCTED OUTPUT POWER	27

11.1	GSM MEASUREMENT RESULT	27
11.2	WCDMA MEASUREMENT RESULT.....	29
11.3	LTE MEASUREMENT RESULT	31
11.4	WI-FI AND BT MEASUREMENT RESULT	55
12	SIMULTANEOUS TX SAR CONSIDERATIONS.....	62
12.1	INTRODUCTION	62
12.2	TRANSMIT ANTENNA SEPARATION DISTANCES	62
12.3	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	63
13	EVALUATION OF SIMULTANEOUS.....	64
14	SAR TEST RESULT	65
14.1	SAR RESULTS	65
14.2	FULL SAR	78
14.3	WLAN EVALUATION	79
15	SAR MEASUREMENT VARIABILITY	84
16	MEASUREMENT UNCERTAINTY	85
16.1	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	85
16.2	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz).....	86
16.3	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz).....	87
16.4	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	88
17	MAIN TEST INSTRUMENTS.....	90
ANNEX A	GRAPH RESULTS.....	91
ANNEX B	SYSTEM VERIFICATION RESULTS	126
ANNEX C	SAR MEASUREMENT SETUP	135
C.1	MEASUREMENT SET-UP	135
C.2	DASY4 OR DASY5 E-FIELD PROBE SYSTEM	136
C.3	E-FIELD PROBE CALIBRATION	136
C.4	OTHER TEST EQUIPMENT.....	137
C.4.1	DATA ACQUISITION ELECTRONICS(DAE)	137
C.4.2	ROBOT.....	138
C.4.3	MEASUREMENT SERVER	138
C.4.4	DEVICE HOLDER FOR PHANTOM.....	139
C.4.5	PHANTOM	139
ANNEX D	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	141
D.1	GENERAL CONSIDERATIONS.....	141
D.2	BODY-WORN DEVICE	142
D.3	DESKTOP DEVICE	142
D.4	DUT SETUP PHOTOS.....	143
ANNEX E	EQUIVALENT MEDIA RECIPES.....	144



ANNEX F SYSTEM VALIDATION	145
ANNEX G PROBE CALIBRATION CERTIFICATE.....	146
ANNEX H DIPOLE CALIBRATION CERTIFICATE	157
ANNEX I DAE CALIBRATION CERTIFICATE.....	221
ANNEX J RETURN LOSS OF DIPOLES	226
ANNEX K SENSOR TRIGGERING DATA SUMMARY	230
ANNEX L ACCREDITATION CERTIFICATE.....	234

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191
(if applicable) SAR test lab number	12389A-1

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data


Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	July 24, 2018
Testing End Date:	July 31, 2018

1.4 Signature



Lin Xiaojun

(Prepared this test report)

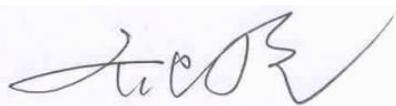

Qi Dianyuan

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2 Statement of Compliance

The maximum results of SAR found during testing for TCL Communication Ltd. Tablet PC 9027W is as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Hotspot(body)	GSM 850	0.30	PCE
	PCS 1900	1.07	
	UMTS FDD 2	1.18	
	UMTS FDD 4	1.19	
	UMTS FDD 5	0.14	
	LTE Band 2	1.19	
	LTE Band 5	0.16	
	LTE Band 7	1.15	
	LTE Band 12	0.28	
	LTE Band 66	1.18	
	LTE Band 71	0.37	
	WLAN 2.4 GHz	0.63	DTS
	WLAN 5 GHz	0.70	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance from 0/7/9/12/14 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: **1.19 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Body(normal power)	Rear 0mm	1.19	0.30	1.49
Highest reported SAR value for Body(low power)	Top edge 12mm	1.15	0.43	1.58

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Body	Rear 0mm	1.19	0.19	1.38

[1] - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is 1.58 **W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd
Address /Post:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Gong Zhizhou
E-mail:	zhizhou.gong@tcl.com
Telephone:	0086-755-36611722
Fax:	/

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Gong Zhizhou
E-mail:	zhizhou.gong@tcl.com
Telephone:	0086-755-36611722
Fax:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Tablet PC
Model name:	9027W
Operating mode(s):	GSM 850/1900 WCDMA850/1700/1900 LTE B2/5/7/12/66/71 BT, WLAN
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900) 826.4–846.6 MHz (WCDMA 850 Band V) 1712.4 – 1752.6 MHz (WCDMA 1700 Band IV) 1852.4–1907.6 MHz (WCDMA1900 Band II) 1860 – 1900 MHz (LTE Band 2) 824.7 – 848.3 MHz (LTE Band 5) 2502.5 – 2567.5 MHz(LTE Band 7) 699.7 – 715.3 MHz (LTE Band 12) 1710.7 – 1779.3 MHz (LTE Band 66) 665.5 – 695.5 MHz (LTE Band 71) 2412 – 2462 MHz (Wi-Fi 2.4G) 5.15 – 5.35 GHz 5.725 – 5.825 GHz(Wi-Fi 5G)
GRPS/EGPRS Multislot Class:	12
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support
Product dimension	Long 209.5mm ;Wide 125mm ; Diagonal 243.96mm

4.2 Internal Identification of EUT used during the test

EUTID	IMEI	HW Version	SW Version
1	015263000000643	02	AS2
2	015263000000304	02	AS2
3	015263000000668	02	AS2
4	015263000000874	02	AS2

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT3 to 4 and conducted power with the EUT1 to 2.

4.3 Internal Identification of AE used during the test

AE ID	Description	Model	SN	Manufactory
AE1	Battery	TLp040J1	/	BYD

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB616217 D04 SAR for laptop and tablets v01r02 SAR Evaluation Considerations for Laptop, Notebook, Notebook and Tablet Computers.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	\pm 5% Range	Permittivity(ϵ)	\pm 5% Range
750	Body	0.96	0.91~1.01	55.5	52.7~58.3
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1
5250	Body	5.36	5.09~5.63	48.9	46.5~51.3
5750	Body	5.49	5.22~5.76	48.3	45.9~50.7

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date yyyy/mm/dd	Frequency	Type	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2018/7/24	750 MHz	Body	54.64	-1.55	0.957	-0.31
2018/7/25	835 MHz	Body	55.01	-0.34	0.964	-0.62
2018/7/26	1750 MHz	Body	54.2	1.50	1.495	0.34
2018/7/27	1900 MHz	Body	53.43	0.24	1.533	0.86
2018/7/28	2450 MHz	Body	52.56	-0.27	1.933	-0.87
2018/7/29	2600 MHz	Body	53.36	1.64	2.2	1.85
2018/7/30	5250 MHz	Body	48.74	-0.33	5.447	1.62
2018/7/31	5750 MHz	Body	48.2	-0.21	5.549	1.07


Note: The liquid temperature is 22.0 °C



Picture 7-1 Liquid depth in the Flat Phantom (750 MHz)




Picture 7-2 Liquid depth in the Flat Phantom (835MHz)

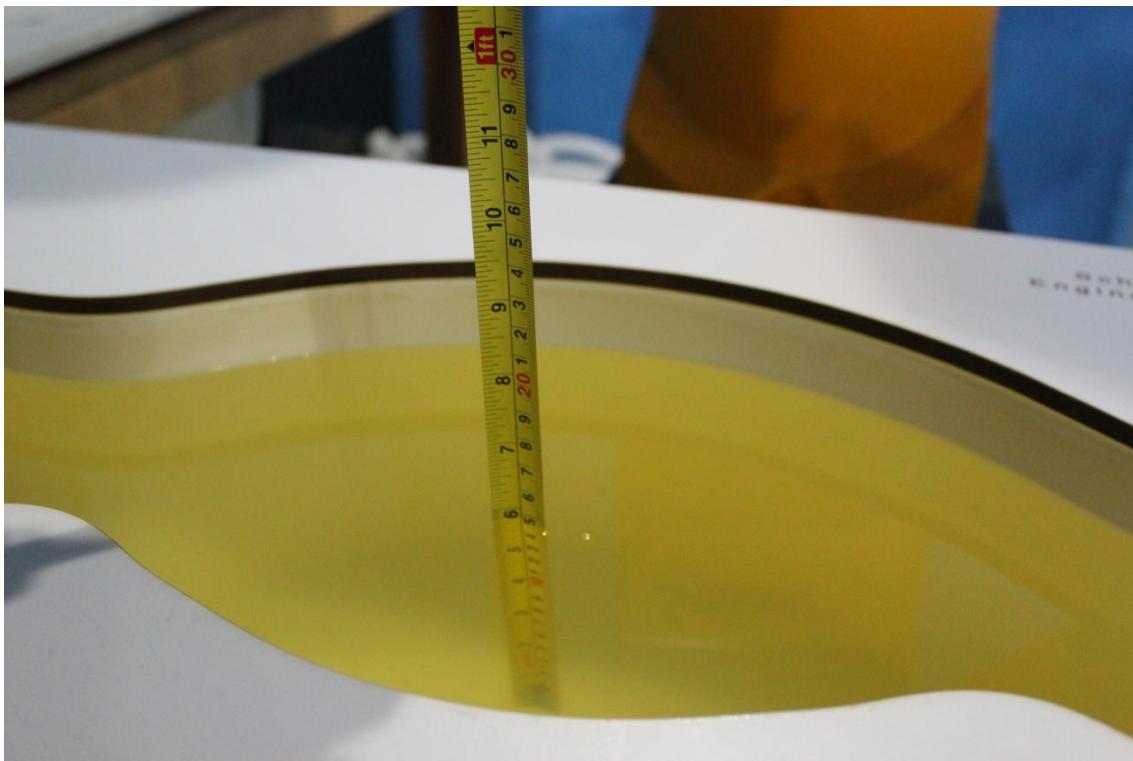


Picture 7-3 Liquid depth in the Flat Phantom (1750MHz)



Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

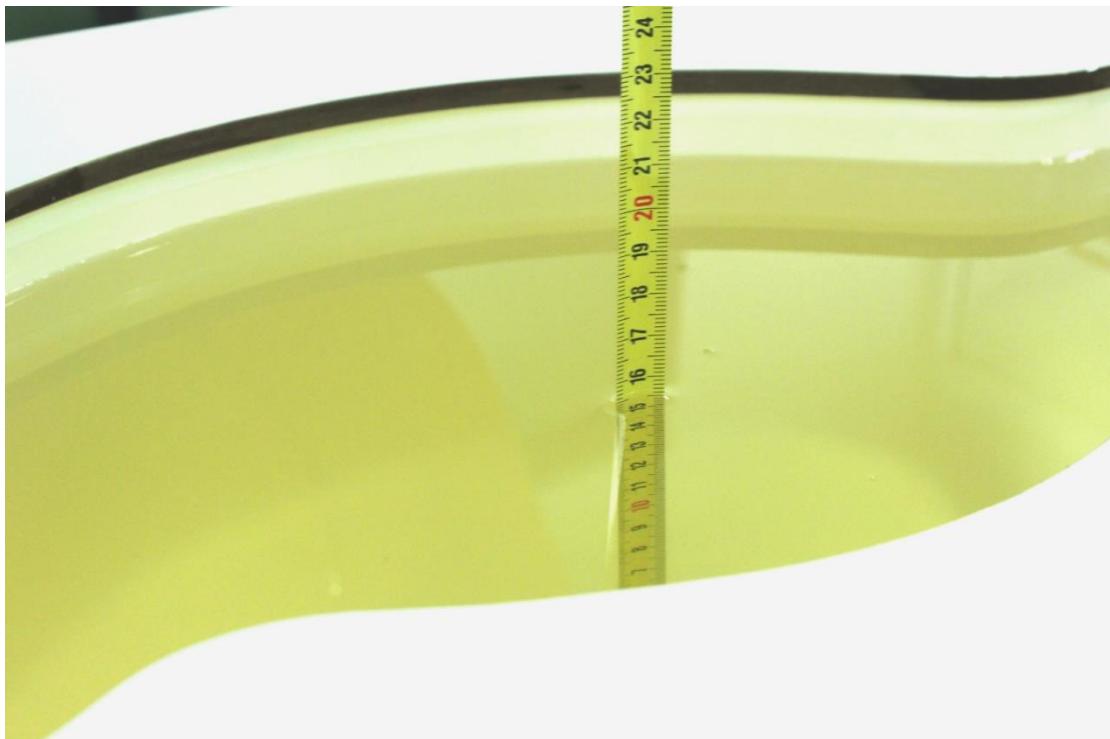

Picture 7-5 Liquid depth in the Flat Phantom (2450MHz)

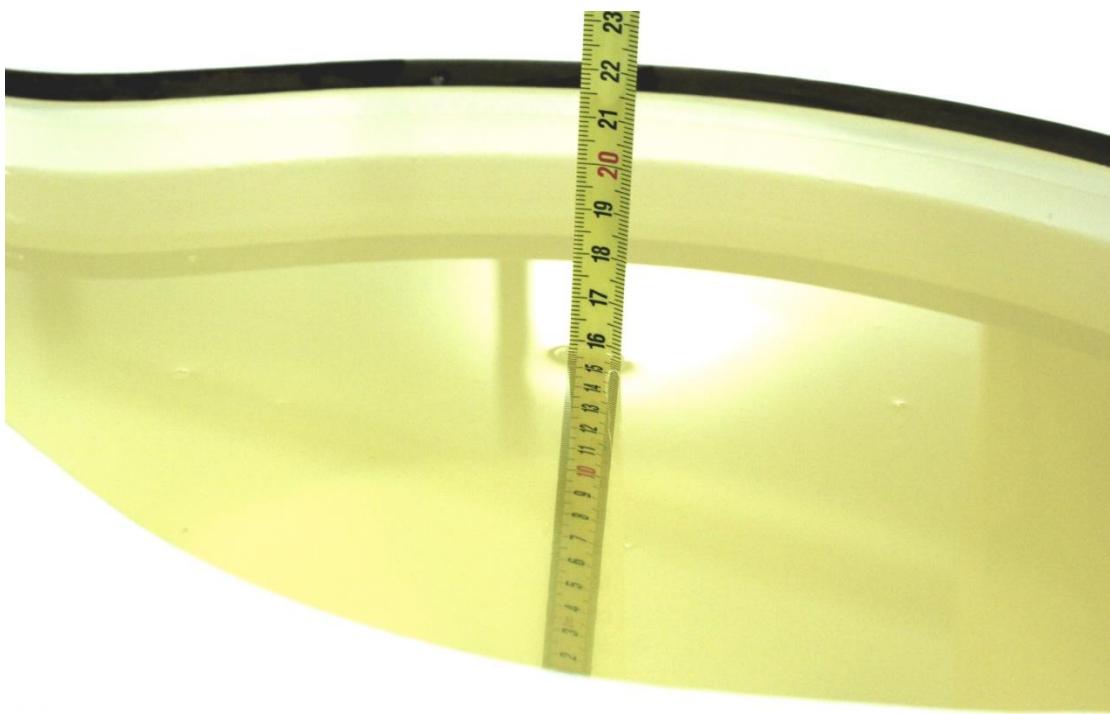

Picture 7-6 Liquid depth in the Flat Phantom (2600MHz)




Picture 7-7 Liquid depth in the Flat Phantom (5GHz)


8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

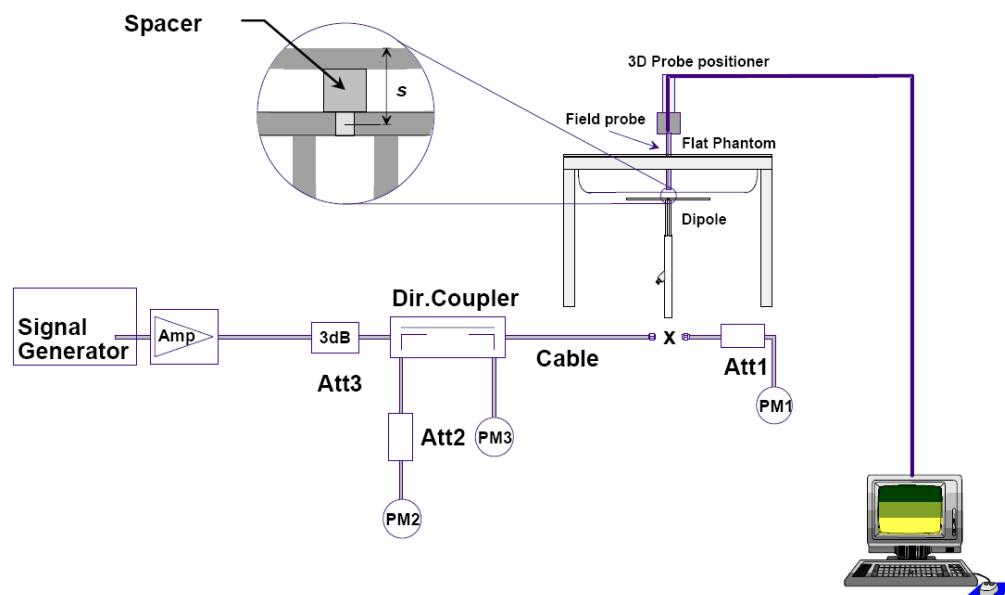

Picture 8.1 System Setup for System Evaluation

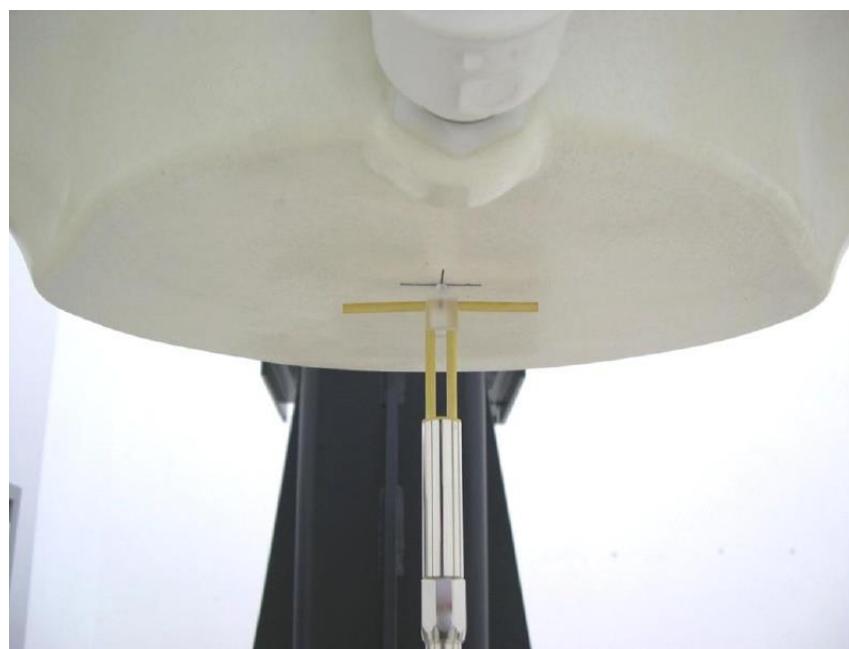

Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018/7/24	750 MHz	5.68	8.66	5.64	8.8	-0.70%	1.62%
2018/7/25	835 MHz	6.12	9.41	6.08	9.48	-0.65%	0.74%
2018/7/26	1750 MHz	19.8	37.1	19.72	36.44	-0.40%	-1.78%
2018/7/27	1900 MHz	21.5	40.5	21.32	40.4	-0.84%	-0.25%
2018/7/28	2450 MHz	23.8	50.4	23.68	51.36	-0.50%	1.90%
2018/7/29	2600 MHz	24.8	55.5	25.04	54.52	0.97%	-1.77%
2018/7/30	5250 MHz	21.3	76.6	21.6	75.9	1.41%	-0.89%
2018/7/31	5750 MHz	21.6	77.8	21.3	77.0	-1.30%	-0.98%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

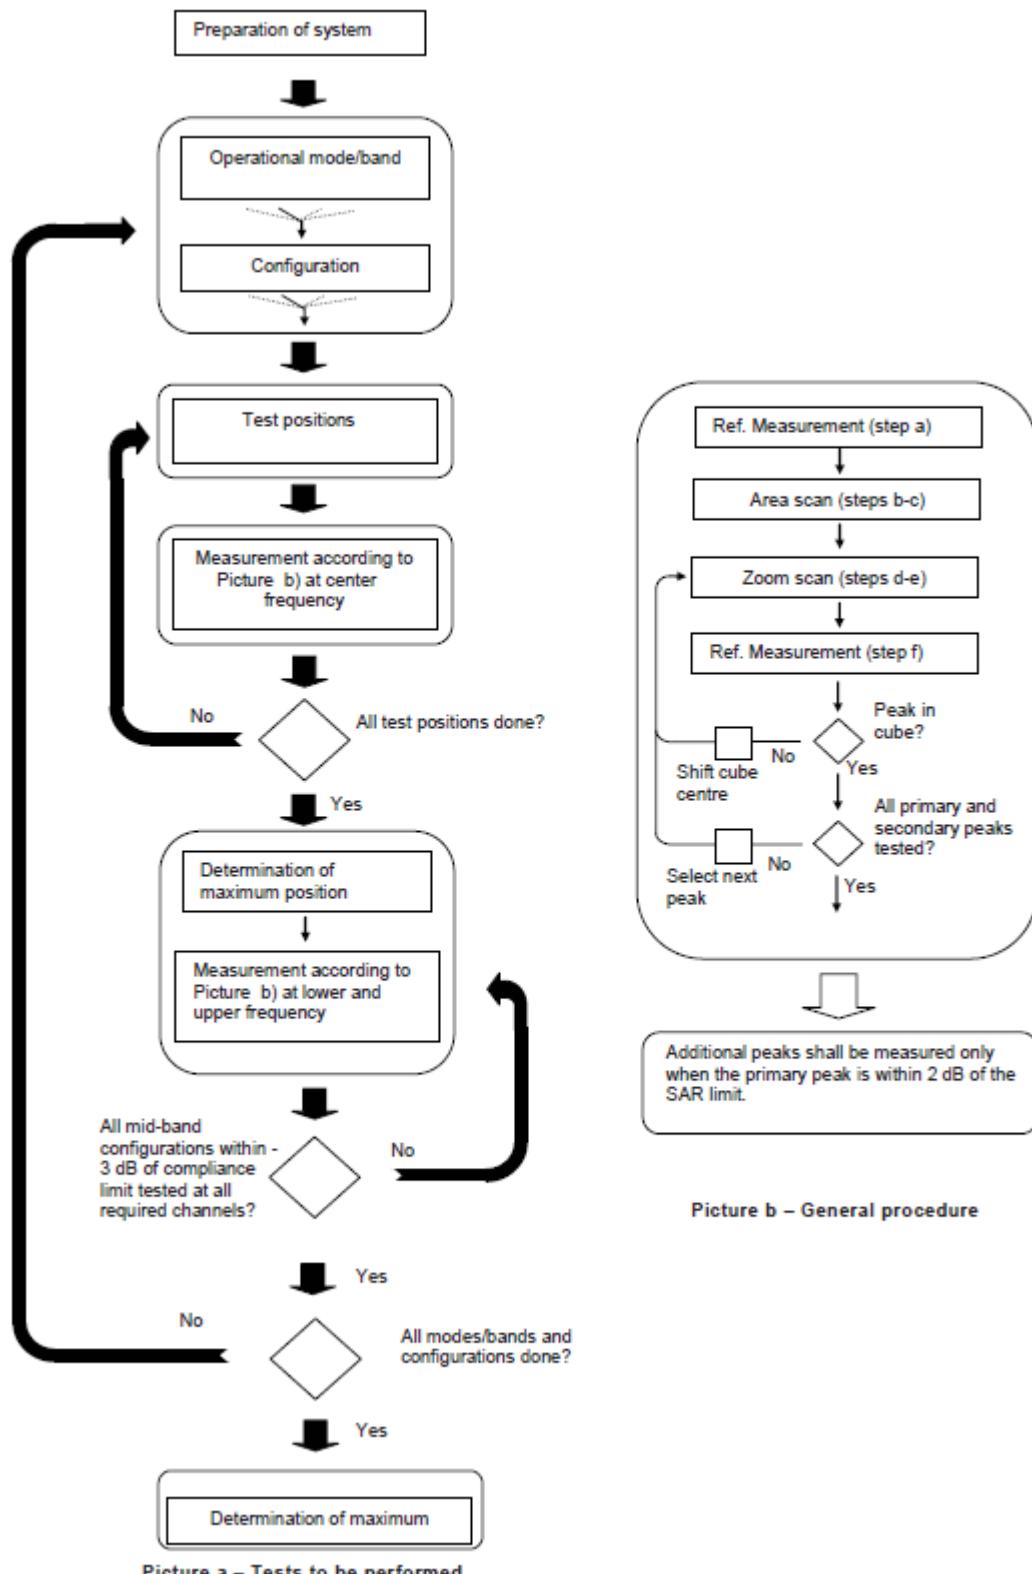

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid graded grid	$\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}}$ two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}^{47/15}$ $\beta_{ed2}^{47/15}$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Rchwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit

algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is $\leq 1.2 \text{ W/kg}$, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Note: The table #1 is normal power.

The table #2 is low power.

Table 11-1 GSM850 #1

		GSM850 #1			Caculation	Frame Burst Power (dBm)			
Config	Tune-up	Measured Power (dBm)				CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	
		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz					
GSM Speech	/	/	/	/					
GPRS 1 Txslot	34.00	32.40	32.43	32.38	-9.03	23.37	23.40	23.35	
GPRS 2 Txslots	32.00	30.88	30.90	30.84	-6.02	24.86	24.88	24.82	
GPRS 3 Txslots	30.00	28.91	28.92	28.85	-4.26	24.65	24.66	24.59	
GPRS 4 Txslots	28.50	27.48	27.45	27.37	-3.01	24.47	24.44	24.36	
EGPRS GMSK 1 Txslot	34.00	32.39	32.41	32.37	-9.03	23.36	23.38	23.34	
EGPRS GMSK 2 Txslots	32.00	30.86	30.88	30.83	-6.02	24.84	24.86	24.81	
EGPRS GMSK 3 Txslots	30.00	28.90	28.90	28.84	-4.26	24.64	24.64	24.58	
EGPRS GMSK 4 Txslots	28.50	27.46	27.44	27.36	-3.01	24.45	24.43	24.35	
EGPRS 8PSK 1 Txslot	28.00	26.96	27.02	27.01	-9.03	17.93	17.99	17.98	
EGPRS 8PSK 2 Txslots	27.00	26.01	26.08	26.15	-6.02	19.99	20.06	20.13	
EGPRS 8PSK 3 Txslots	25.00	24.07	24.20	24.28	-4.26	19.81	19.94	20.02	
EGPRS 8PSK 4 Txslots	24.00	22.83	22.96	22.99	-3.01	19.82	19.95	19.98	

Table 11-2 GSM850 #2

		GSM850 #2			Caculation	Frame Burst Power (dBm)			
Config	Tune-up	Measured Power (dBm)				CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	
		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz					
GSM Speech	/	/	/	/					
GPRS 1 Txslot	24.00	23.07	23.02	22.89	-9.03	14.04	13.99	13.86	
GPRS 2 Txslots	24.00	23.06	23.01	22.87	-6.02	17.04	16.99	16.85	
GPRS 3 Txslots	24.00	23.05	22.98	22.84	-4.26	18.79	18.72	18.58	
GPRS 4 Txslots	24.00	23.01	22.95	22.79	-3.01	20.00	19.94	19.78	
EGPRS GMSK 1 Txslot	24.00	23.09	23.03	22.90	-9.03	14.06	14.00	13.87	
EGPRS GMSK 2 Txslots	24.00	23.07	23.02	22.88	-6.02	17.05	17.00	16.86	
EGPRS GMSK 3 Txslots	24.00	23.04	22.99	22.84	-4.26	18.78	18.73	18.58	
EGPRS GMSK 4 Txslots	24.00	23.02	22.95	22.80	-3.01	20.01	19.94	19.79	
EGPRS 8PSK 1 Txslot	18.00	17.15	17.21	17.30	-9.03	8.12	8.18	8.27	
EGPRS 8PSK 2 Txslots	18.00	17.02	17.11	17.17	-6.02	11.00	11.09	11.15	
EGPRS 8PSK 3 Txslots	18.00	16.83	16.92	17.04	-4.26	12.57	12.66	12.78	
EGPRS 8PSK 4 Txslots	18.00	16.63	16.81	16.82	-3.01	13.62	13.80	13.81	

Table 11-3 PCS1900 #1

PCS1900 #1								
Config	Tune-up	Measured Power (dBm)			Calculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	/	/	/	/				
GPRS 1 Txslot	30.00	29.33	29.10	29.09	-9.03	20.30	20.07	20.06
GPRS 2 Txslots	29.00	27.89	27.66	27.65	-6.02	21.87	21.64	21.63
GPRS 3 Txslots	27.00	25.95	25.70	25.70	-4.26	21.69	21.44	21.44
GPRS 4 Txslots	26.00	24.50	24.29	24.28	-3.01	21.49	21.28	21.27
EGPRS GMSK 1 Txslot	30.00	29.34	29.10	29.09	-9.03	20.31	20.07	20.06
EGPRS GMSK 2 Txslots	29.00	27.90	27.66	27.66	-6.02	21.88	21.64	21.64
EGPRS GMSK 3 Txslots	27.00	25.96	25.71	25.71	-4.26	21.70	21.45	21.45
EGPRS GMSK 4 Txslots	26.00	24.52	24.29	24.29	-3.01	21.51	21.28	21.28
EGPRS 8PSK 1 Txslot	27.00	26.08	26.45	26.26	-9.03	17.05	17.42	17.23
EGPRS 8PSK 2 Txslots	26.00	25.17	25.47	25.40	-6.02	19.15	19.45	19.38
EGPRS 8PSK 3 Txslots	24.00	23.07	23.44	23.31	-4.26	18.81	19.18	19.05
EGPRS 8PSK 4 Txslots	23.00	22.02	22.30	22.37	-3.01	19.01	19.29	19.36

Table 11-4 PCS1900 #2

PCS1900 #2								
Config	Tune-up	Measured Power (dBm)			Calculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	/	/	/	/				
GPRS 1 Txslot	16.00	15.83	15.66	15.66	-9.03	6.80	6.63	6.63
GPRS 2 Txslots	16.00	15.88	15.71	15.71	-6.02	9.86	9.69	9.69
GPRS 3 Txslots	16.00	15.94	15.76	15.76	-4.26	11.68	11.50	11.50
GPRS 4 Txslots	16.00	15.99	15.81	15.81	-3.01	12.98	12.80	12.80
EGPRS GMSK 1 Txslot	16.00	15.83	15.66	15.66	-9.03	6.80	6.63	6.63
EGPRS GMSK 2 Txslots	16.00	15.88	15.71	15.71	-6.02	9.86	9.69	9.69
EGPRS GMSK 3 Txslots	16.00	15.94	15.77	15.76	-4.26	11.68	11.51	11.50
EGPRS GMSK 4 Txslots	16.00	15.99	15.81	15.81	-3.01	12.98	12.80	12.80
EGPRS 8PSK 1 Txslot	13.00	12.36	12.41	12.49	-9.03	3.33	3.38	3.46
EGPRS 8PSK 2 Txslots	13.00	12.30	12.37	12.45	-6.02	6.28	6.35	6.43
EGPRS 8PSK 3 Txslots	13.00	12.16	12.24	12.33	-4.26	7.90	7.98	8.07
EGPRS 8PSK 4 Txslots	13.00	11.99	12.05	12.17	-3.01	8.98	9.04	9.16

NOTES:
Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for 850MHz GPRS and 1900MHz EGPRS with normal power, 4Txslots for 850MHz GPRS and 1900MHz EGPRS with low power.

11.2 WCDMA Measurement result

Table 11-5 WCDMA1900-BII #1

WCDMA1900-BII #1					
Item		Tune-up	Measured Power (dBm)		
			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	24.00	23.09	23.26	23.40
HSUPA	subtest1	23.00	22.10	22.25	22.33
	subtest2	23.00	22.08	22.30	22.44
	subtest3	23.00	21.56	21.74	21.40
	subtest4	23.00	22.09	22.33	22.44
	subtest5	23.00	22.07	22.27	22.47
HSPA+	\	\	\	\	\
DC-HSDPA	subtest1	23.00	22.01	22.09	22.32
	subtest2	23.00	22.02	22.08	22.36
	subtest3	23.00	22.03	22.09	22.29
	subtest4	23.00	22.04	22.10	22.27

Table 11-6 WCDMA1900-BII #2

WCDMA1900-BII #2					
Item		Tune-up	Measured Power (dBm)		
			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	14.00	13.33	13.46	13.61
HSUPA	subtest1	14.00	13.25	13.41	13.01
	subtest2	14.00	13.29	13.42	13.57
	subtest3	14.00	12.77	12.90	12.55
	subtest4	14.00	13.31	13.41	13.61
	subtest5	14.00	13.31	13.44	13.60
HSPA+	\	\	\	\	\
DC-HSDPA	subtest1	14.00	12.89	13.03	13.20
	subtest2	14.00	12.92	13.02	13.20
	subtest3	14.00	12.93	13.04	13.20
	subtest4	14.00	12.92	13.03	13.21

Table 11-7 WCDMA1700-BIV #1

WCDMA1700-BIV #1					
Item		Tune-up	Measured Power (dBm)		
			CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	24.00	23.61	23.26	23.44
HSUPA	subtest1	23.00	22.14	22.07	22.02
	subtest2	23.00	22.15	22.05	22.04
	subtest3	23.00	21.65	21.62	21.44
	subtest4	23.00	22.18	22.11	22.09
	subtest5	23.00	22.17	22.15	22.13
HSPA+	\	\	\	\	\
DC-HSDPA	subtest1	23.00	22.05	21.97	21.86
	subtest2	23.00	22.03	21.99	21.85
	subtest3	23.00	22.04	21.98	21.87
	subtest4	23.00	22.04	21.96	21.87

Table 11-8 WCDMA1700-BIV #2

WCDMA1700-BIV #2					
			Measured Power (dBm)		
Item		Tune-up	CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	14.00	13.22	13.16	13.10
	subtest1	14.00	13.18	13.13	13.04
	subtest2	14.00	13.20	13.15	13.05
	subtest3	14.00	12.69	12.59	12.57
	subtest4	14.00	13.19	13.11	13.09
	subtest5	14.00	13.18	13.14	13.07
HSUPA	\	\	\	\	\
	subtest1	14.00	12.98	12.90	12.78
DC-HSDPA	subtest2	14.00	12.99	12.91	12.78
	subtest3	14.00	13.00	12.90	12.79
	subtest4	14.00	12.99	12.92	12.77

Table 11-9 WCDMA850-BV #1

WCDMA850-BV #1					
			Measured Power (dBm)		
Item		Tune-up	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz
WCDMA	RMC	24.00	23.11	23.08	23.05
	subtest1	23.00	22.05	22.01	22.04
	subtest2	23.00	22.09	22.02	22.07
	subtest3	23.00	21.61	21.57	21.58
	subtest4	23.00	22.08	22.05	22.13
	subtest5	23.00	22.12	22.11	22.08
HSUPA	\	\	\	\	\
	subtest1	23.00	21.77	21.69	21.71
DC-HSDPA	subtest2	23.00	21.76	21.68	21.70
	subtest3	23.00	21.75	21.71	21.70
	subtest4	23.00	21.76	21.70	21.68

Table 11-10 WCDMA850-BV #2

WCDMA850-BV #2					
			Measured Power (dBm)		
Item		Tune-up	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz
WCDMA	RMC	14.00	13.11	13.09	13.13
	subtest1	14.00	13.09	13.06	13.11
	subtest2	14.00	13.15	13.08	13.13
	subtest3	14.00	12.57	12.68	12.75
	subtest4	14.00	13.14	13.11	13.13
	subtest5	14.00	13.15	13.10	13.14
HSUPA	\	\	\	\	\
	subtest1	14.00	12.86	12.79	12.80
DC-HSDPA	subtest2	14.00	12.85	12.80	12.78
	subtest3	14.00	12.84	12.81	12.80
	subtest4	14.00	12.85	12.80	12.81

11.3 LTE Measurement result

Table 11-11 LTE1900-FDD2 #1

LTE1900-FDD2 #1				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	19193	24	23.04	0	22.15	1
		18900	24	23.04	0	22.04	1
		18607	24	23.03	0	22.09	1
	1M	19193	24	23.20	0	22.35	1
		18900	24	23.19	0	22.26	1
		18607	24	23.21	0	22.16	1
	1L	19193	24	23.03	0	22.17	1
		18900	24	23.01	0	22.02	1
		18607	24	22.97	0	22.05	1
	3H	19193	24	23.10	0	22.15	1
		18900	24	23.04	0	22.33	1
		18607	24	23.07	0	22.07	1
	3M	19193	24	23.12	0	22.15	1
		18900	24	23.07	0	22.29	1
		18607	24	23.11	0	22.08	1
	3L	19193	24	23.08	0	22.14	1
		18900	24	23.06	0	22.24	1
		18607	24	23.11	0	22.06	1
	6	19193	24	22.21	1	21.26	2
		18900	24	22.12	1	21.23	2
		18607	24	22.07	1	21.14	2
3MHz	1H	19185	24	23.06	0	22.09	1
		18900	24	23.09	0	21.97	1
		18615	24	23.09	0	22.48	1
	1M	19185	24	23.23	0	22.32	1
		18900	24	23.20	0	22.12	1
		18615	24	23.19	0	22.58	1
	1L	19185	24	23.10	0	22.19	1
		18900	24	23.01	0	21.98	1
		18615	24	23.04	0	22.40	1
	8H	19185	24	22.17	1	21.17	2
		18900	24	22.11	1	21.20	2
		18615	24	22.10	1	21.12	2
	8M	19185	24	22.27	1	21.27	2
		18900	24	22.21	1	21.22	2
		18615	24	22.13	1	21.21	2
	8L	19185	24	22.21	1	21.18	2
		18900	24	22.13	1	21.18	2
		18615	24	22.12	1	21.15	2
	15	19185	24	22.21	1	21.14	2
		18900	24	22.14	1	21.11	2
		18615	24	22.09	1	21.10	2
5MHz	1H	19175	24	23.02	0	22.13	1
		18900	24	23.01	0	22.11	1
		18625	24	22.94	0	22.50	1
	1M	19175	24	23.34	0	22.40	1
		18900	24	23.29	0	22.39	1
		18625	24	23.18	0	22.76	1
	1L	19175	24	23.05	0	22.15	1
		18900	24	23.02	0	22.09	1
		18625	24	22.89	0	22.44	1
	12H	19175	24	22.13	1	21.20	2
		18900	24	22.07	1	21.16	2
		18625	24	22.10	1	21.21	2
	12M	19175	24	22.22	1	21.30	2
		18900	24	22.12	1	21.23	2
		18625	24	22.10	1	21.28	2
	12L	19175	24	22.18	1	21.25	2
		18900	24	22.08	1	21.15	2
		18625	24	22.06	1	21.19	2
	25	19175	24	22.18	1	21.13	2
		18900	24	22.11	1	21.12	2
		18625	24	22.08	1	21.12	2

10MHz	1H	19150	24	23.02	0	22.11
		18900	24	23.01	0	21.99
		18650	24	23.00	0	22.39
	1M	19150	24	23.16	0	22.27
		18900	24	23.12	0	22.04
		18650	24	23.17	0	22.49
	1L	19150	24	23.02	0	22.06
		18900	24	23.00	0	21.92
		18650	24	22.98	0	22.34
	25H	19150	24	22.20	1	21.25
		18900	24	22.18	1	21.17
		18650	24	22.17	1	21.25
	25M	19150	24	22.18	1	21.28
		18900	24	22.19	1	21.16
		18650	24	22.16	1	21.17
	25L	19150	24	22.25	1	21.34
		18900	24	22.21	1	21.24
		18650	24	22.09	1	21.11
	50	19150	24	22.25	1	21.30
		18900	24	22.19	1	21.18
		18650	24	22.16	1	21.16
15MHz	1H	19125	24	22.96	0	22.31
		18900	24	22.89	0	21.86
		18675	24	22.89	0	22.24
	1M	19125	24	23.06	0	22.41
		18900	24	22.99	0	21.95
		18675	24	23.04	0	22.41
	1L	19125	24	22.90	0	22.29
		18900	24	22.88	0	21.87
		18675	24	22.94	0	22.28
	36H	19125	24	22.15	1	21.13
		18900	24	22.12	1	21.09
		18675	24	22.08	1	21.19
	36M	19125	24	22.16	1	21.11
		18900	24	22.12	1	21.10
		18675	24	22.05	1	21.16
	36L	19125	24	22.17	1	21.11
		18900	24	22.16	1	21.11
		18675	24	22.06	1	21.12
	75	19125	24	22.19	1	21.14
		18900	24	22.18	1	21.09
		18675	24	22.08	1	21.09
20MHz	1H	19100	24	22.68	0	22.35
		18900	24	22.68	0	22.26
		18700	24	22.62	0	22.12
	1M	19100	24	23.07	0	22.66
		18900	24	23.06	0	22.56
		18700	24	23.01	0	22.51
	1L	19100	24	22.65	0	22.30
		18900	24	22.62	0	22.18
		18700	24	22.63	0	22.10
	50H	19100	24	21.95	1	20.99
		18900	24	22.06	1	21.15
		18700	24	22.08	1	21.09
	50M	19100	24	22.07	1	21.12
		18900	24	22.07	1	21.11
		18700	24	22.03	1	20.98
	50L	19100	24	21.97	1	21.02
		18900	24	22.11	1	21.21
		18700	24	21.96	1	20.94
	100	19100	24	21.97	1	21.03
		18900	24	22.12	1	21.12
		18700	24	22.05	1	21.07

Table 11-12 LTE1900-FDD2 #2

LTE1900-FDD2 #2				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	19193	13.7	13.05	0	13.08	0
		18900	13.7	12.83	0	13.37	0
		18607	13.7	13.19	0	13.68	0
	1M	19193	13.7	13.12	0	13.23	0
		18900	13.7	13.36	0	13.50	0
		18607	13.7	13.37	0	13.64	0
	1L	19193	13.7	13.02	0	13.06	0
		18900	13.7	13.20	0	13.34	0
		18607	13.7	13.34	0	13.64	0
	3H	19193	13.7	13.05	0	13.34	0
		18900	13.7	13.27	0	13.50	0
		18607	13.7	13.32	0	13.61	0
	3M	19193	13.7	13.17	0	13.43	0
		18900	13.7	13.33	0	13.43	0
		18607	13.7	13.43	0	13.66	0
	3L	19193	13.7	13.13	0	13.37	0
		18900	13.7	13.35	0	13.48	0
		18607	13.7	13.38	0	13.60	0
	6	19193	13.7	13.12	0	13.27	0
		18900	13.7	13.30	0	13.45	0
		18607	13.7	13.37	0	13.26	0
				0		0	
3MHz	1H	19185	13.7	13.06	0	13.01	0
		18900	13.7	13.20	0	13.65	0
		18615	13.7	13.22	0	13.29	0
	1M	19185	13.7	13.24	0	12.94	0
		18900	13.7	13.39	0	13.53	0
		18615	13.7	13.31	0	13.51	0
	1L	19185	13.7	13.09	0	13.02	0
		18900	13.7	13.24	0	13.66	0
		18615	13.7	13.31	0	13.37	0
	8H	19185	13.7	13.07	0	13.18	0
		18900	13.7	13.26	0	13.28	0
		18615	13.7	13.29	0	13.35	0
	8M	19185	13.7	13.04	0	13.15	0
		18900	13.7	13.26	0	13.35	0
		18615	13.7	13.35	0	13.38	0
	8L	19185	13.7	13.07	0	13.16	0
		18900	13.7	13.23	0	13.39	0
		18615	13.7	13.35	0	13.37	0
	15	19185	13.7	13.08	0	13.11	0
		18900	13.7	13.26	0	13.37	0
		18615	13.7	13.33	0	13.28	0
				0		0	
5MHz	1H	19175	13.7	12.91	0	13.11	0
		18900	13.7	13.16	0	13.33	0
		18625	13.7	13.18	0	13.68	0
	1M	19175	13.7	13.24	0	13.39	0
		18900	13.7	13.45	0	13.59	0
		18625	13.7	13.45	0	13.64	0
	1L	19175	13.7	12.97	0	13.12	0
		18900	13.7	13.20	0	13.34	0
		18625	13.7	13.20	0	13.68	0
	12H	19175	13.7	12.99	0	13.11	0
		18900	13.7	13.17	0	13.24	0
		18625	13.7	13.19	0	13.34	0
	12M	19175	13.7	13.08	0	13.22	0
		18900	13.7	13.27	0	13.38	0
		18625	13.7	13.33	0	13.50	0
	12L	19175	13.7	13.08	0	13.19	0
		18900	13.7	13.27	0	13.38	0
		18625	13.7	13.30	0	13.48	0
	25	19175	13.7	13.05	0	13.02	0
		18900	13.7	13.25	0	13.23	0
		18625	13.7	13.28	0	13.33	0

				0		0
10MHz	1H	19150	13.7	13.08	0	13.07
		18900	13.7	13.22	0	13.20
		18650	13.7	13.30	0	13.67
	1M	19150	13.7	13.23	0	13.26
		18900	13.7	13.38	0	13.30
		18650	13.7	13.48	0	13.62
	1L	19150	13.7	13.24	0	13.14
		18900	13.7	13.10	0	13.16
		18650	13.7	13.26	0	13.61
	25H	19150	13.7	13.24	0	13.10
		18900	13.7	13.26	0	13.19
		18650	13.7	13.33	0	13.34
	25M	19150	13.7	13.24	0	13.24
		18900	13.7	13.35	0	13.38
		18650	13.7	13.37	0	13.43
	25L	19150	13.7	13.29	0	13.32
		18900	13.7	13.44	0	13.40
		18650	13.7	13.46	0	13.50
	50	19150	13.7	13.25	0	13.19
		18900	13.7	13.39	0	13.33
		18650	13.7	13.42	0	13.41
				0		0
15MHz	1H	19125	13.7	13.05	0	13.44
		18900	13.7	13.17	0	13.12
		18675	13.7	13.26	0	13.62
	1M	19125	13.7	13.25	0	13.63
		18900	13.7	13.30	0	13.25
		18675	13.7	13.39	0	13.70
	1L	19125	13.7	13.16	0	13.60
		18900	13.7	13.19	0	13.12
		18675	13.7	13.32	0	13.62
	36H	19125	13.7	13.08	0	13.03
		18900	13.7	13.25	0	13.26
		18675	13.7	13.38	0	13.46
	36M	19125	13.7	13.19	0	13.17
		18900	13.7	13.32	0	13.33
		18675	13.7	13.31	0	13.41
	36L	19125	13.7	13.19	0	13.18
		18900	13.7	13.42	0	13.42
		18675	13.7	13.42	0	13.48
	75	19125	13.7	13.19	0	13.14
		18900	13.7	13.35	0	13.33
		18675	13.7	13.38	0	13.40
				0		0
20MHz	1H	19100	13.7	12.88	0	13.37
		18900	13.7	12.99	0	13.43
		18700	13.7	13.09	0	13.59
	1M	19100	13.7	13.61	0	13.67
		18900	13.7	13.60	0	13.65
		18700	13.7	13.68	0	13.60
	1L	19100	13.7	13.04	0	13.54
		18900	13.7	13.02	0	13.43
		18700	13.7	13.08	0	13.60
	50H	19100	13.7	12.99	0	13.01
		18900	13.7	13.25	0	13.21
		18700	13.7	13.56	0	13.70
	50M	19100	13.7	13.44	0	13.27
		18900	13.7	13.40	0	13.35
		18700	13.7	13.39	0	13.45
	50L	19100	13.7	13.12	0	13.11
		18900	13.7	13.52	0	13.45
		18700	13.7	13.50	0	13.52
	100	19100	13.7	13.08	0	13.09
		18900	13.7	13.45	0	13.38
		18700	13.7	13.54	0	13.62

Table 11-13 LTE850-FDD5 #1

LTE850-FDD5 #1				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	20643	24	22.79	0	21.73	1
		20525	24	22.85	0	21.86	1
		20407	24	22.90	0	22.14	1
	1M	20643	24	23.04	0	21.89	1
		20525	24	23.08	0	22.08	1
		20407	24	23.10	0	22.29	1
	1L	20643	24	22.80	0	21.73	1
		20525	24	22.88	0	21.86	1
		20407	24	22.86	0	22.12	1
	3H	20643	24	22.81	0	21.97	1
		20525	24	22.84	0	21.87	1
		20407	24	22.90	0	21.98	1
	3M	20643	24	22.84	0	22.01	1
		20525	24	22.91	0	21.90	1
		20407	24	22.92	0	22.03	1
	3L	20643	24	22.79	0	21.93	1
		20525	24	22.86	0	21.88	1
		20407	24	22.88	0	22.03	1
	6	20643	24	21.95	1	20.96	2
		20525	24	21.87	1	21.00	2
		20407	24	21.88	1	20.77	2
3MHz	1H	20635	24	22.82	0	21.75	1
		20525	24	22.96	0	21.74	1
		20415	24	23.00	0	22.24	1
	1M	20635	24	23.04	0	21.97	1
		20525	24	23.03	0	21.89	1
		20415	24	23.20	0	22.39	1
	1L	20635	24	22.92	0	21.86	1
		20525	24	22.89	0	21.78	1
		20415	24	22.96	0	22.15	1
	8H	20635	24	21.91	1	20.87	2
		20525	24	21.93	1	20.98	2
		20415	24	21.96	1	20.98	2
	8M	20635	24	21.98	1	20.91	2
		20525	24	22.00	1	21.04	2
		20415	24	21.99	1	21.04	2
	8L	20635	24	21.93	1	20.87	2
		20525	24	21.91	1	20.98	2
		20415	24	21.98	1	21.03	2
	15	20635	24	21.89	1	20.80	2
		20525	24	21.93	1	20.92	2
		20415	24	21.93	1	20.96	2
5MHz	1H	20625	24	22.79	0	21.81	1
		20525	24	22.90	0	21.87	1
		20425	24	22.81	0	22.26	1
	1M	20625	24	23.10	0	22.08	1
		20525	24	23.15	0	22.14	1
		20425	24	23.11	0	22.53	1
	1L	20625	24	22.84	0	21.83	1
		20525	24	22.86	0	21.90	1
		20425	24	22.76	0	22.17	1
	12H	20625	24	21.83	1	20.83	2
		20525	24	21.85	1	20.96	2
		20425	24	21.90	1	21.01	2
	12M	20625	24	21.91	1	20.91	2
		20525	24	21.90	1	20.98	2
		20425	24	21.94	1	21.03	2
	12L	20625	24	21.87	1	20.86	2
		20525	24	21.84	1	20.89	2
		20425	24	21.85	1	21.03	2
	25	20625	24	21.86	1	20.74	2
		20525	24	21.89	1	20.87	2
		20425	24	21.91	1	20.88	2

10MHz	1H	20600	24	22.89	0	21.65
		20525	24	22.91	0	22.16
		20450	24	22.88	0	21.85
	1M	20600	24	22.96	0	21.80
		20525	24	23.00	0	22.29
		20450	24	23.01	0	21.95
	1L	20600	24	22.87	0	21.68
		20525	24	22.88	0	22.17
		20450	24	22.80	0	21.73
	25H	20600	24	21.90	1	20.85
		20525	24	21.97	1	20.97
		20450	24	21.91	1	20.98
	25M	20600	24	21.96	1	20.90
		20525	24	21.91	1	20.87
		20450	24	21.93	1	20.98
	25L	20600	24	21.87	1	20.85
		20525	24	21.88	1	20.90
		20450	24	21.92	1	20.97
	50	20600	24	21.90	1	20.80
		20525	24	21.93	1	20.92
		20450	24	21.93	1	20.90

Table 11-14 LTE850-FDD5 #2

LTE850-FDD5 #2							
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR			
				QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	20643	18	16.88	0	16.96	0
		20525	18	16.95	0	17.02	0
		20407	18	16.96	0	17.31	0
	1M	20643	18	17.03	0	17.14	0
		20525	18	17.11	0	17.24	0
		20407	18	17.12	0	17.42	0
	1L	20643	18	16.86	0	16.93	0
		20525	18	16.97	0	17.05	0
		20407	18	16.93	0	17.30	0
	3H	20643	18	16.98	0	17.20	0
		20525	18	16.97	0	17.07	0
		20407	18	16.94	0	17.21	0
	3M	20643	18	17.01	0	17.27	0
		20525	18	17.00	0	17.12	0
		20407	18	17.01	0	17.25	0
	3L	20643	18	17.01	0	17.21	0
		20525	18	16.97	0	17.05	0
		20407	18	16.96	0	17.22	0
	6	20643	18	17.02	0	17.15	0
		20525	18	17.01	0	17.14	0
		20407	18	17.01	0	16.85	0
3MHz					0		0
	1H	20635	18	16.96	0	16.99	0
		20525	18	16.98	0	16.92	0
		20415	18	16.98	0	17.36	0
	1M	20635	18	17.08	0	17.16	0
		20525	18	17.12	0	17.05	0
		20415	18	17.16	0	17.54	0
	1L	20635	18	16.98	0	17.04	0
		20525	18	16.94	0	16.96	0
		20415	18	17.00	0	17.43	0
	8H	20635	18	17.02	0	17.03	0
		20525	18	16.98	0	17.09	0
		20415	18	16.99	0	17.06	0
	8M	20635	18	17.07	0	17.10	0
		20525	18	17.05	0	17.14	0
		20415	18	17.03	0	17.13	0
	8L	20635	18	16.97	0	17.01	0
		20525	18	17.04	0	17.17	0
		20415	18	17.00	0	17.05	0
	15	20635	18	16.96	0	16.96	0
		20525	18	16.99	0	17.09	0
		20415	18	16.92	0	17.01	0
5MHz					0		0
	1H	20625	18	16.93	0	17.07	0
		20525	18	16.95	0	17.07	0
		20425	18	16.89	0	17.46	0
	1M	20625	18	17.20	0	17.31	0
		20525	18	17.25	0	17.36	0
		20425	18	17.16	0	17.67	0
	1L	20625	18	16.91	0	17.04	0
		20525	18	16.95	0	17.16	0
		20425	18	16.86	0	17.40	0
	12H	20625	18	16.93	0	17.02	0
		20525	18	16.98	0	17.11	0
		20425	18	16.89	0	17.09	0
	12M	20625	18	16.99	0	17.11	0
		20525	18	16.99	0	17.17	0
		20425	18	16.99	0	17.21	0
	12L	20625	18	16.94	0	17.00	0
		20525	18	16.95	0	17.11	0
		20425	18	16.90	0	17.13	0
	25	20625	18	16.93	0	16.90	0
		20525	18	16.95	0	17.04	0
		20425	18	16.90	0	17.01	0

				0		0
10MHz	1H	20600	18	16.98	0	17.01
		20525	18	16.98	0	16.97
		20450	18	17.02	0	17.44
	1M	20600	18	17.00	0	17.07
		20525	18	17.04	0	17.05
		20450	18	17.03	0	17.48
	1L	20600	18	16.94	0	16.95
		20525	18	16.95	0	16.92
		20450	18	16.95	0	17.36
	25H	20600	18	16.94	0	17.06
		20525	18	17.08	0	17.14
		20450	18	16.93	0	17.05
	25M	20600	18	16.99	0	17.09
		20525	18	17.00	0	17.04
		20450	18	16.94	0	17.05
	25L	20600	18	16.90	0	17.05
		20525	18	16.96	0	17.06
		20450	18	16.94	0	17.07
	50	20600	18	16.96	0	17.00
		20525	18	17.04	0	17.07
		20450	18	16.96	0	17.06

Table 11-15 LTE2500-FDD7 #1

LTE2500-FDD7 #1							
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR			
				QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
5MHz	1H	21425	22.8	22.28	0	21.33	1
		21100	22.8	22.46	0	21.45	1
		20775	22.8	22.59	0	21.80	1
	1M	21425	22.8	22.57	0	21.61	1
		21100	22.8	22.74	0	21.78	1
		20775	22.8	22.79	0	21.79	1
	1L	21425	22.8	22.31	0	21.31	1
		21100	22.8	22.49	0	21.51	1
		20775	22.8	22.63	0	21.80	1
	12H	21425	22.8	21.33	1	20.45	2
		21100	22.8	21.47	1	20.57	2
		20775	22.8	21.66	1	20.75	2
	12M	21425	22.8	21.41	1	20.48	2
		21100	22.8	21.52	1	20.64	2
		20775	22.8	21.72	1	20.77	2
	12L	21425	22.8	21.31	1	20.41	2
		21100	22.8	21.44	1	20.55	2
		20775	22.8	21.65	1	20.78	2
	25	21425	22.8	21.34	1	20.35	2
		21100	22.8	21.48	1	20.53	2
		20775	22.8	21.67	1	20.72	2
10MHz	1H	21400	22.8	22.33	0	21.28	1
		21100	22.8	22.42	0	21.27	1
		20800	22.8	22.68	0	21.78	1
	1M	21400	22.8	22.35	0	21.43	1
		21100	22.8	22.57	0	21.40	1
		20800	22.8	22.73	0	21.77	1
	1L	21400	22.8	22.25	0	21.31	1
		21100	22.8	22.48	0	21.36	1
		20800	22.8	22.74	0	21.71	1
	25H	21400	22.8	21.39	1	20.59	2
		21100	22.8	21.57	1	20.61	2
		20800	22.8	21.76	1	20.76	2
	25M	21400	22.8	21.37	1	20.52	2
		21100	22.8	21.51	1	20.56	2
		20800	22.8	21.66	1	20.69	2
	25L	21400	22.8	21.34	1	20.51	2
		21100	22.8	21.45	1	20.50	2
		20800	22.8	21.57	1	20.65	2
	50	21400	22.8	21.45	1	20.50	2
		21100	22.8	21.53	1	20.57	2
		20800	22.8	21.67	1	20.71	2
15MHz	1H	21375	22.8	22.25	0	21.59	1
		21100	22.8	22.28	0	21.17	1
		20825	22.8	22.49	0	21.78	1
	1M	21375	22.8	22.33	0	21.73	1
		21100	22.8	22.45	0	21.31	1
		20825	22.8	22.71	0	21.72	1
	1L	21375	22.8	22.20	0	21.73	1
		21100	22.8	22.42	0	21.29	1
		20825	22.8	22.68	0	21.78	1
	36H	21375	22.8	21.37	1	20.45	2
		21100	22.8	21.53	1	20.52	2
		20825	22.8	21.69	1	20.76	2
	36M	21375	22.8	21.37	1	20.40	2
		21100	22.8	21.48	1	20.52	2
		20825	22.8	21.71	1	20.71	2
	36L	21375	22.8	21.35	1	20.41	2
		21100	22.8	21.47	1	20.52	2
		20825	22.8	21.63	1	20.69	2
	75	21375	22.8	21.38	1	20.41	2
		21100	22.8	21.52	1	20.52	2
		20825	22.8	21.68	1	20.71	2

20MHz	1H	21350	22.8	22.05	0	21.56
		21100	22.8	22.12	0	21.56
		20850	22.8	22.23	0	21.62
	1M	21350	22.8	22.73	0	21.79
		21100	22.8	22.55	0	21.79
		20850	22.8	22.80	0	21.79
	1L	21350	22.8	22.05	0	21.56
		21100	22.8	22.23	0	21.65
		20850	22.8	22.42	0	21.65
	50H	21350	22.8	21.34	1	20.43
		21100	22.8	21.46	1	20.56
		20850	22.8	21.51	1	20.53
	50M	21350	22.8	21.35	1	20.46
		21100	22.8	21.49	1	20.53
		20850	22.8	21.51	1	20.55
	50L	21350	22.8	21.42	1	20.49
		21100	22.8	21.40	1	20.46
		20850	22.8	21.44	1	20.42
	100	21350	22.8	21.35	1	20.39
		21100	22.8	21.43	1	20.46
		20850	22.8	21.47	1	20.50

Table 11-16 LTE2500-FDD7 #2

LTE2500-FDD7 #2				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
5MHz	1H	21425	12	11.30	0	11.34	0
		21100	12	11.17	0	11.26	0
		20775	12	11.11	0	11.62	0
	1M	21425	12	11.54	0	11.60	0
		21100	12	11.39	0	11.47	0
		20775	12	11.34	0	11.90	0
	1L	21425	12	11.26	0	11.31	0
		21100	12	11.16	0	11.25	0
		20775	12	11.09	0	11.62	0
	12H	21425	12	11.30	0	11.37	0
		21100	12	11.17	0	11.28	0
		20775	12	11.19	0	11.40	0
	12M	21425	12	11.35	0	11.45	0
		21100	12	11.24	0	11.38	0
		20775	12	11.21	0	11.40	0
	12L	21425	12	11.36	0	11.43	0
		21100	12	11.19	0	11.29	0
		20775	12	11.15	0	11.34	0
	25	21425	12	11.33	0	11.30	0
		21100	12	11.19	0	11.26	0
		20775	12	11.19	0	11.27	0
				0		0	
10MHz	1H	21400	12	11.29	0	11.28	0
		21100	12	11.15	0	11.14	0
		20800	12	11.20	0	11.49	0
	1M	21400	12	11.36	0	11.37	0
		21100	12	11.26	0	11.22	0
		20800	12	11.33	0	11.67	0
	1L	21400	12	10.88	0	11.25	0
		21100	12	11.10	0	11.09	0
		20800	12	11.16	0	11.48	0
	25H	21400	12	11.32	0	11.47	0
		21100	12	11.20	0	11.28	0
		20800	12	11.25	0	11.30	0
	25M	21400	12	11.37	0	11.46	0
		21100	12	11.28	0	11.33	0
		20800	12	11.26	0	11.27	0
	25L	21400	12	11.29	0	11.42	0
		21100	12	11.16	0	11.15	0
		20800	12	11.12	0	11.15	0
	50	21400	12	11.33	0	11.37	0
		21100	12	11.22	0	11.23	0
		20800	12	11.25	0	11.24	0
				0		0	
15MHz	1H	21375	12	11.23	0	11.62	0
		21100	12	11.04	0	11.16	0
		20825	12	11.11	0	11.36	0
	1M	21375	12	11.33	0	11.73	0
		21100	12	11.20	0	11.14	0
		20825	12	11.24	0	11.55	0
	1L	21375	12	11.17	0	11.58	0
		21100	12	11.02	0	10.98	0
		20825	12	11.15	0	11.47	0
	36H	21375	12	11.32	0	11.34	0
		21100	12	11.21	0	11.23	0
		20825	12	11.26	0	11.28	0
	36M	21375	12	11.29	0	11.35	0
		21100	12	11.22	0	11.28	0
		20825	12	11.21	0	11.28	0
	36L	21375	12	11.28	0	11.30	0
		21100	12	11.16	0	11.21	0
		20825	12	11.13	0	11.22	0
	75	21375	12	11.32	0	11.35	0
		21100	12	11.21	0	11.25	0
		20825	12	11.19	0	11.21	0

				0		0
20MHz	1H	21350	12	11.02	0	11.56
		21100	12	10.89	0	11.43
		20850	12	10.83	0	11.24
	1M	21350	12	11.40	0	11.94
		21100	12	11.29	0	11.77
		20850	12	11.28	0	11.67
	1L	21350	12	10.96	0	11.47
		21100	12	10.80	0	11.32
		20850	12	10.88	0	11.27
	50H	21350	12	11.28	0	11.38
		21100	12	11.26	0	11.30
		20850	12	11.22	0	11.20
	50M	21350	12	11.33	0	11.39
		21100	12	11.22	0	11.28
		20850	12	11.16	0	11.15
	50L	21350	12	11.25	0	11.32
		21100	12	11.19	0	11.22
		20850	12	11.06	0	11.03
	100	21350	12	11.26	0	11.35
		21100	12	11.23	0	11.23
		20850	12	11.17	0	11.14

Table 11-17 LTE700-FDD12 #1

LTE700-FDD12 #1							
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR			
				QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	23173	24	22.69	0	21.81	1
		23095	24	22.75	0	22.15	1
		23017	24	22.83	0	21.89	1
	1M	23173	24	22.90	0	21.99	1
		23095	24	22.92	0	22.31	1
		23017	24	23.00	0	22.05	1
	1L	23173	24	22.67	0	21.84	1
		23095	24	22.78	0	22.15	1
		23017	24	22.83	0	21.85	1
	3H	23173	24	22.80	0	21.81	1
		23095	24	22.78	0	22.03	1
		23017	24	22.85	0	21.89	1
	3M	23173	24	22.79	0	21.89	1
		23095	24	22.82	0	22.08	1
		23017	24	22.91	0	21.90	1
	3L	23173	24	22.73	0	21.85	1
		23095	24	22.79	0	22.03	1
		23017	24	22.84	0	21.88	1
	6	23173	24	21.87	1	20.94	2
		23095	24	21.90	1	20.73	2
		23017	24	21.92	1	21.00	2
3MHz	1H	23165	24	22.75	0	21.75	1
		23095	24	22.77	0	21.67	1
		23025	24	22.89	0	22.21	1
	1M	23165	24	22.89	0	21.93	1
		23095	24	22.93	0	21.90	1
		23025	24	23.02	0	22.36	1
	1L	23165	24	22.80	0	21.83	1
		23095	24	22.80	0	21.76	1
		23025	24	22.88	0	22.20	1
	8H	23165	24	21.93	1	20.84	2
		23095	24	21.85	1	20.91	2
		23025	24	21.94	1	20.92	2
	8M	23165	24	21.89	1	20.87	2
		23095	24	21.95	1	20.99	2
		23025	24	21.98	1	20.98	2
	8L	23165	24	21.88	1	20.88	2
		23095	24	21.90	1	20.95	2
		23025	24	21.93	1	20.95	2
	15	23165	24	21.85	1	20.76	2
		23095	24	21.90	1	20.84	2
		23025	24	21.87	1	20.87	2
5MHz	1H	23155	24	22.73	0	21.84	1
		23095	24	22.76	0	21.91	1
		23035	24	22.75	0	22.31	1
	1M	23155	24	23.01	0	22.10	1
		23095	24	23.05	0	22.20	1
		23035	24	23.00	0	22.55	1
	1L	23155	24	22.72	0	21.82	1
		23095	24	22.81	0	21.92	1
		23035	24	22.75	0	22.27	1
	12H	23155	24	21.74	1	20.78	2
		23095	24	21.83	1	20.90	2
		23035	24	21.91	1	21.03	2
	12M	23155	24	21.90	1	20.95	2
		23095	24	21.91	1	20.94	2
		23035	24	21.89	1	21.02	2
	12L	23155	24	21.84	1	20.87	2
		23095	24	21.84	1	20.90	2
		23035	24	21.79	1	20.96	2
	25	23155	24	21.84	1	20.72	2
		23095	24	21.86	1	20.83	2
		23035	24	21.84	1	20.88	2

10MHz	1H	23130	24	22.79	0	21.69
		23095	24	22.86	0	22.16
		23060	24	22.81	0	21.86
	1M	23130	24	22.83	0	21.78
		23095	24	23.00	0	22.28
		23060	24	22.92	0	21.95
	1L	23130	24	22.81	0	21.77
		23095	24	22.81	0	22.18
		23060	24	22.76	0	21.81
	25H	23130	24	21.83	1	20.82
		23095	24	21.95	1	20.95
		23060	24	21.91	1	20.99
	25M	23130	24	21.93	1	20.89
		23095	24	21.90	1	20.90
		23060	24	21.91	1	21.00
	25L	23130	24	21.83	1	20.82
		23095	24	21.98	1	20.94
		23060	24	21.86	1	20.91
	50	23130	24	21.85	1	20.79
		23095	24	21.95	1	20.95
		23060	24	21.92	1	20.89

Table 11-18 LTE700-FDD12 #2

LTE700-FDD12 #2				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	23173	18	16.80	0	16.92	0
		23095	18	16.81	0	17.00	0
		23017	18	16.79	0	17.22	0
	1M	23173	18	16.98	0	17.04	0
		23095	18	17.00	0	17.18	0
		23017	18	17.02	0	17.40	0
	1L	23173	18	16.71	0	16.85	0
		23095	18	16.83	0	16.97	0
		23017	18	16.88	0	17.24	0
	3H	23173	18	16.85	0	17.16	0
		23095	18	16.90	0	17.03	0
		23017	18	16.97	0	17.19	0
	3M	23173	18	16.94	0	17.20	0
		23095	18	16.96	0	17.07	0
		23017	18	16.98	0	17.19	0
	3L	23173	18	16.87	0	17.15	0
		23095	18	16.92	0	17.03	0
		23017	18	16.96	0	17.16	0
	6	23173	18	16.91	0	17.02	0
		23095	18	16.92	0	17.07	0
		23017	18	16.91	0	16.79	0
				0		0	
3MHz	1H	23165	18	16.80	0	16.87	0
		23095	18	16.85	0	16.78	0
		23025	18	16.92	0	17.29	0
	1M	23165	18	16.95	0	16.93	0
		23095	18	16.89	0	16.93	0
		23025	18	16.95	0	17.40	0
	1L	23165	18	16.85	0	16.88	0
		23095	18	16.80	0	16.81	0
		23025	18	16.87	0	17.22	0
	8H	23165	18	16.88	0	16.86	0
		23095	18	16.84	0	16.96	0
		23025	18	16.88	0	16.97	0
	8M	23165	18	16.88	0	16.95	0
		23095	18	16.92	0	17.02	0
		23025	18	16.92	0	17.05	0
	8L	23165	18	16.87	0	16.91	0
		23095	18	16.85	0	16.97	0
		23025	18	16.85	0	16.97	0
	15	23165	18	16.85	0	16.80	0
		23095	18	16.87	0	16.91	0
		23025	18	16.85	0	16.90	0
				0		0	
5MHz	1H	23155	18	16.80	0	16.92	0
		23095	18	16.85	0	16.96	0
		23035	18	16.80	0	17.32	0
	1M	23155	18	17.01	0	17.14	0
		23095	18	17.05	0	17.24	0
		23035	18	17.06	0	17.57	0
	1L	23155	18	16.79	0	16.89	0
		23095	18	16.83	0	16.94	0
		23035	18	16.74	0	17.27	0
	12H	23155	18	16.78	0	16.87	0
		23095	18	16.88	0	16.99	0
		23035	18	16.84	0	17.03	0
	12M	23155	18	16.88	0	16.97	0
		23095	18	16.85	0	16.97	0
		23035	18	16.90	0	17.11	0
	12L	23155	18	16.88	0	16.93	0
		23095	18	16.76	0	16.95	0
		23035	18	16.82	0	17.00	0
	25	23155	18	16.87	0	16.82	0
		23095	18	16.85	0	16.91	0
		23035	18	16.82	0	16.91	0

					0		0
10MHz	1H	23130	18	16.84	0	16.82	0
		23095	18	16.93	0	17.26	0
		23060	18	16.81	0	16.90	0
	1M	23130	18	17.01	0	16.91	0
		23095	18	17.05	0	17.40	0
		23060	18	16.97	0	17.04	0
	1L	23130	18	16.75	0	16.75	0
		23095	18	16.84	0	17.18	0
		23060	18	16.74	0	16.87	0
	25H	23130	18	16.83	0	16.92	0
		23095	18	16.98	0	17.06	0
		23060	18	16.95	0	17.06	0
	25M	23130	18	16.94	0	16.94	0
		23095	18	16.91	0	16.99	0
		23060	18	16.93	0	17.02	0
	25L	23130	18	16.88	0	16.91	0
		23095	18	16.92	0	16.97	0
		23060	18	16.89	0	16.99	0
	50	23130	18	16.86	0	16.91	0
		23095	18	16.96	0	17.02	0
		23060	18	16.94	0	16.99	0

Table 11-19 LTE1700-FDD66 #1

LTE1700-FDD66 #1				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	132665	24	23.06	0	22.19	1
		132322	24	22.92	0	22.30	1
		131979	24	22.92	0	21.91	1
	1M	132665	24	23.26	0	22.39	1
		132322	24	23.19	0	22.42	1
		131979	24	23.12	0	22.08	1
	1L	132665	24	23.09	0	22.19	1
		132322	24	22.94	0	22.29	1
		131979	24	22.95	0	21.92	1
	3H	132665	24	23.16	0	22.17	1
		132322	24	23.01	0	22.21	1
		131979	24	22.90	0	22.19	1
	3M	132665	24	23.19	0	22.24	1
		132322	24	23.05	0	22.26	1
		131979	24	22.97	0	22.20	1
	3L	132665	24	23.14	0	22.15	1
		132322	24	23.04	0	22.18	1
		131979	24	22.93	0	22.13	1
	6	132665	24	22.20	1	21.37	2
		132322	24	22.04	1	20.93	2
		131979	24	22.01	1	21.12	2
3MHz	1H	132657	24	23.06	0	22.05	1
		132322	24	22.95	0	21.91	1
		131987	24	22.83	0	21.89	1
	1M	132657	24	23.25	0	22.25	1
		132322	24	23.08	0	22.07	1
		131987	24	23.00	0	22.05	1
	1L	132657	24	23.11	0	22.12	1
		132322	24	22.94	0	22.00	1
		131987	24	22.89	0	21.94	1
	8H	132657	24	22.13	1	21.22	2
		132322	24	21.95	1	21.01	2
		131987	24	21.95	1	20.93	2
	8M	132657	24	22.16	1	21.22	2
		132322	24	22.01	1	21.10	2
		131987	24	21.98	1	21.01	2
	8L	132657	24	22.17	1	21.22	2
		132322	24	21.99	1	21.04	2
		131987	24	21.95	1	20.97	2
	15	132657	24	22.11	1	21.14	2
		132322	24	22.01	1	20.99	2
		131987	24	21.97	1	20.91	2
5MHz	1H	132647	24	23.05	0	22.05	1
		132322	24	22.89	0	21.91	1
		131997	24	22.82	0	21.87	1
	1M	132647	24	23.31	0	22.32	1
		132322	24	23.14	0	22.15	1
		131997	24	23.08	0	22.11	1
	1L	132647	24	23.02	0	22.02	1
		132322	24	22.92	0	21.93	1
		131997	24	22.83	0	21.88	1
	12H	132647	24	22.08	1	21.18	2
		132322	24	21.91	1	21.03	2
		131997	24	21.89	1	20.96	2
	12M	132647	24	22.15	1	21.18	2
		132322	24	22.00	1	21.07	2
		131997	24	21.95	1	21.00	2
	12L	132647	24	22.06	1	21.19	2
		132322	24	21.90	1	20.99	2
		131997	24	21.90	1	20.96	2
	25	132647	24	22.13	1	21.15	2
		132322	24	21.92	1	20.89	2
		131997	24	21.92	1	20.85	2

10MHz	1H	132622	24	23.05	0	22.06
		132322	24	22.93	0	21.90
		132022	24	22.87	0	21.85
	1M	132622	24	23.18	0	22.17
		132322	24	23.04	0	22.05
		132022	24	23.00	0	21.93
	1L	132622	24	23.02	0	21.99
		132322	24	22.90	0	21.90
		132022	24	22.80	0	21.86
	25H	132622	24	22.20	1	21.32
		132322	24	21.97	1	21.10
		132022	24	22.06	1	21.16
	25M	132622	24	22.16	1	21.28
		132322	24	22.01	1	21.12
		132022	24	22.00	1	21.09
	25L	132622	24	22.12	1	21.27
		132322	24	21.97	1	21.12
		132022	24	21.97	1	21.09
	50	132622	24	22.18	1	21.24
		132322	24	21.96	1	21.04
		132022	24	22.05	1	21.05
15MHz	1H	132597	24	23.10	0	22.34
		132322	24	22.85	0	22.18
		132047	24	22.86	0	22.22
	1M	132597	24	23.15	0	22.39
		132322	24	23.01	0	22.33
		132047	24	22.93	0	22.28
	1L	132597	24	23.01	0	22.31
		132322	24	22.94	0	22.23
		132047	24	22.82	0	22.18
	36H	132597	24	22.18	1	21.26
		132322	24	22.03	1	21.03
		132047	24	21.95	1	21.01
	36M	132597	24	22.25	1	21.13
		132322	24	22.05	1	21.00
		132047	24	21.98	1	20.94
	36L	132597	24	22.17	1	21.15
		132322	24	22.03	1	20.98
		132047	24	22.01	1	20.94
	75	132597	24	22.25	1	21.14
		132322	24	22.03	1	21.02
		132047	24	22.04	1	20.97
20MHz	1H	132572	24	22.80	0	22.14
		132322	24	22.71	0	22.08
		132072	24	22.67	0	22.04
	1M	132572	24	23.18	0	22.52
		132322	24	23.12	0	22.48
		132072	24	23.02	0	22.49
	1L	132572	24	22.72	0	22.03
		132322	24	22.65	0	22.00
		132072	24	22.62	0	22.00
	50H	132572	24	22.09	1	21.13
		132322	24	21.95	1	20.98
		132072	24	21.97	1	20.98
	50M	132572	24	22.05	1	21.12
		132322	24	21.99	1	21.00
		132072	24	21.99	1	20.95
	50L	132572	24	22.14	1	21.16
		132322	24	21.92	1	20.99
		132072	24	21.95	1	20.93
	100	132572	24	22.12	1	21.18
		132322	24	21.97	1	21.00
		132072	24	22.00	1	20.97

Table 11-20 LTE1700-FDD66 #2

LTE1700-FDD66 #2				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	132665	14	12.93	0	13.07	0
		132322	14	12.75	0	12.90	0
		131979	14	12.80	0	13.05	0
	1M	132665	14	13.11	0	13.09	0
		132322	14	12.98	0	13.07	0
		131979	14	13.00	0	13.23	0
	1L	132665	14	12.94	0	13.05	0
		132322	14	12.76	0	12.86	0
		131979	14	12.76	0	13.05	0
	3H	132665	14	13.15	0	13.48	0
		132322	14	12.97	0	13.14	0
		131979	14	13.09	0	13.10	0
	3M	132665	14	13.15	0	13.35	0
		132322	14	12.95	0	13.23	0
		131979	14	12.99	0	13.15	0
	3L	132665	14	13.05	0	13.49	0
		132322	14	12.91	0	13.19	0
		131979	14	12.90	0	13.11	0
	6	132665	14	13.04	0	13.36	0
		132322	14	12.84	0	13.07	0
		131979	14	12.86	0	13.07	0
				0		0	
3MHz	1H	132657	14	13.06	0	13.06	0
		132322	14	12.81	0	12.91	0
		131987	14	12.85	0	12.97	0
	1M	132657	14	13.17	0	13.06	0
		132322	14	12.94	0	13.10	0
		131987	14	12.99	0	13.15	0
	1L	132657	14	13.02	0	13.22	0
		132322	14	12.87	0	12.95	0
		131987	14	12.91	0	13.04	0
	8H	132657	14	13.09	0	13.11	0
		132322	14	12.87	0	12.94	0
		131987	14	12.86	0	12.95	0
	8M	132657	14	13.06	0	13.18	0
		132322	14	12.90	0	12.98	0
		131987	14	12.94	0	13.02	0
	8L	132657	14	13.06	0	13.14	0
		132322	14	12.88	0	12.92	0
		131987	14	12.93	0	12.99	0
	15	132657	14	13.11	0	13.02	0
		132322	14	12.91	0	12.90	0
		131987	14	12.94	0	12.93	0
				0		0	
5MHz	1H	132647	14	13.04	0	13.12	0
		132322	14	12.82	0	12.98	0
		131997	14	12.87	0	13.01	0
	1M	132647	14	13.27	0	13.33	0
		132322	14	13.12	0	13.28	0
		131997	14	13.15	0	13.29	0
	1L	132647	14	13.01	0	13.09	0
		132322	14	12.80	0	13.02	0
		131997	14	12.86	0	13.05	0
	12H	132647	14	13.04	0	13.14	0
		132322	14	12.86	0	13.05	0
		131997	14	12.89	0	13.01	0
	12M	132647	14	13.13	0	13.20	0
		132322	14	12.91	0	13.09	0
		131997	14	12.96	0	13.13	0
	12L	132647	14	13.06	0	13.13	0
		132322	14	12.84	0	13.03	0
		131997	14	12.92	0	13.03	0
	25	132647	14	13.05	0	13.01	0
		132322	14	12.90	0	13.00	0
		131997	14	12.91	0	13.02	0

				0		0
10MHz	1H	132622	14	13.03	0	13.11
		132322	14	12.84	0	12.86
		132022	14	12.87	0	13.01
	1M	132622	14	13.08	0	13.19
		132322	14	13.01	0	12.96
		132022	14	12.99	0	13.07
	1L	132622	14	12.99	0	13.06
		132322	14	12.80	0	12.86
		132022	14	12.85	0	12.96
	25H	132622	14	13.10	0	13.22
		132322	14	13.01	0	13.05
		132022	14	12.97	0	13.08
	25M	132622	14	13.10	0	13.23
		132322	14	12.94	0	13.00
		132022	14	12.99	0	13.09
	25L	132622	14	13.12	0	13.22
		132322	14	12.90	0	12.95
		132022	14	12.98	0	13.09
	50	132622	14	13.14	0	13.18
		132322	14	12.99	0	13.04
		132022	14	12.99	0	13.06
				0		0
15MHz	1H	132597	14	12.93	0	13.47
		132322	14	12.81	0	13.30
		132047	14	12.83	0	13.40
	1M	132597	14	13.02	0	13.55
		132322	14	12.91	0	13.41
		132047	14	12.90	0	13.46
	1L	132597	14	12.91	0	13.38
		132322	14	12.78	0	13.31
		132047	14	12.78	0	13.36
	36H	132597	14	13.09	0	13.08
		132322	14	12.94	0	12.99
		132047	14	12.92	0	12.99
	36M	132597	14	13.05	0	13.09
		132322	14	12.90	0	12.93
		132047	14	12.89	0	12.95
	36L	132597	14	13.12	0	13.12
		132322	14	12.82	0	12.88
		132047	14	12.91	0	12.92
	75	132597	14	13.14	0	13.10
		132322	14	12.91	0	12.92
		132047	14	12.91	0	12.92
				0		0
20MHz	1H	132572	14	12.90	0	13.34
		132322	14	12.69	0	13.12
		132072	14	12.66	0	13.15
	1M	132572	14	13.25	0	13.69
		132322	14	12.93	0	13.54
		132072	14	13.13	0	13.51
	1L	132572	14	12.77	0	13.22
		132322	14	12.58	0	13.06
		132072	14	12.70	0	13.14
	50H	132572	14	13.17	0	13.11
		132322	14	13.07	0	13.05
		132072	14	13.08	0	13.05
	50M	132572	14	13.14	0	13.14
		132322	14	13.01	0	13.01
		132072	14	13.02	0	13.02
	50L	132572	14	13.25	0	13.26
		132322	14	12.97	0	12.94
		132072	14	13.07	0	13.00
	100	132572	14	13.22	0	13.19
		132322	14	13.01	0	13.01
		132072	14	13.11	0	13.04

Table 11-21 LTE700-FDD71 #1

LTE700-FDD71 #1				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
5MHz	1H	133447	23.5	22.57	0	21.61	1
		133297	23.5	22.61	0	21.65	1
		133147	23.5	22.60	0	21.63	1
	1M	133447	23.5	22.81	0	21.87	1
		133297	23.5	22.84	0	21.85	1
		133147	23.5	22.85	0	21.88	1
	1L	133447	23.5	22.58	0	21.55	1
		133297	23.5	22.65	0	21.66	1
		133147	23.5	22.62	0	21.62	1
	12H	133447	23.5	21.65	1	20.64	2
		133297	23.5	21.67	1	20.74	2
		133147	23.5	21.70	1	20.77	2
	12M	133447	23.5	21.64	1	20.65	2
		133297	23.5	21.61	1	20.71	2
		133147	23.5	21.68	1	20.75	2
	12L	133447	23.5	21.45	1	20.55	2
		133297	23.5	21.48	1	20.58	2
		133147	23.5	21.54	1	20.55	2
	25	133447	23.5	21.64	1	20.54	2
		133297	23.5	21.58	1	20.59	2
		133147	23.5	21.68	1	20.48	2
10MHz	1H	132422	23.5	22.62	0	21.35	1
		133297	23.5	22.61	0	21.41	1
		133172	23.5	22.68	0	21.90	1
	1M	132422	23.5	22.72	0	21.46	1
		133297	23.5	22.64	0	21.41	1
		133172	23.5	22.51	0	21.94	1
	1L	132422	23.5	22.51	0	21.31	1
		133297	23.5	22.61	0	21.38	1
		133172	23.5	22.62	0	21.82	1
	25H	132422	23.5	21.79	1	20.73	2
		133297	23.5	21.61	1	20.69	2
		133172	23.5	21.57	1	20.61	2
	25M	132422	23.5	21.63	1	20.63	2
		133297	23.5	21.61	1	20.67	2
		133172	23.5	21.64	1	20.60	2
	25L	132422	23.5	21.58	1	20.59	2
		133297	23.5	21.50	1	20.52	2
		133172	23.5	21.52	1	20.55	2
	50	132422	23.5	21.65	1	20.61	2
		133297	23.5	21.55	1	20.52	2
		133172	23.5	21.57	1	20.51	2
15MHz	1H	133397	23.5	22.53	0	21.35	1
		133297	23.5	22.49	0	21.29	1
		133197	23.5	22.55	0	21.33	1
	1M	133397	23.5	22.72	0	21.46	1
		133297	23.5	22.69	0	21.45	1
		133197	23.5	22.77	0	21.45	1
	1L	133397	23.5	22.43	0	21.21	1
		133297	23.5	22.50	0	21.29	1
		133197	23.5	22.48	0	21.21	1
	36H	133397	23.5	21.82	1	20.76	2
		133297	23.5	21.70	1	20.59	2
		133197	23.5	21.73	1	20.72	2
	36M	133397	23.5	21.64	1	20.66	2
		133297	23.5	21.66	1	20.61	2
		133197	23.5	21.67	1	20.68	2
	36L	133397	23.5	21.62	1	20.63	2
		133297	23.5	21.56	1	20.55	2
		133197	23.5	21.62	1	20.57	2
	75	133397	23.5	21.76	1	20.69	2
		133297	23.5	21.64	1	20.55	2
		133197	23.5	21.70	1	20.62	2

20MHz	1H	133372	23.5	22.49	0	21.94
		133297	23.5	22.41	0	21.82
		133222	23.5	22.40	0	21.88
	1M	133372	23.5	22.87	0	22.22
		133297	23.5	22.65	0	22.25
		133222	23.5	22.77	0	22.23
	1L	133372	23.5	22.38	0	21.76
		133297	23.5	22.33	0	21.82
		133222	23.5	22.39	0	21.62
	50H	133372	23.5	21.79	1	20.80
		133297	23.5	21.61	1	20.67
		133222	23.5	21.87	1	20.80
	50M	133372	23.5	21.67	1	20.68
		133297	23.5	21.65	1	20.64
		133222	23.5	21.69	1	20.61
	50L	133372	23.5	21.63	1	20.66
		133297	23.5	21.45	1	20.39
		133222	23.5	21.55	1	20.44
	100	133372	23.5	21.72	1	20.69
		133297	23.5	21.50	1	20.55
		133222	23.5	21.68	1	20.62

Table 11-22 LTE700-FDD71 #2

LTE700-FDD71 #2				Measured Power (dBm) & MPR			
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM	
				Measured Power	MPR	Measured Power	MPR
5MHz	1H	133447	18	16.67	0	16.70	0
		133297	18	16.64	0	16.75	0
		133147	18	16.66	0	16.88	0
	1M	133447	18	16.88	0	16.94	0
		133297	18	16.95	0	16.98	0
		133147	18	16.89	0	17.09	0
	1L	133447	18	16.47	0	16.66	0
		133297	18	16.59	0	16.75	0
		133147	18	16.71	0	16.84	0
	12H	133447	18	16.66	0	16.79	0
		133297	18	16.65	0	16.80	0
		133147	18	16.71	0	16.85	0
	12M	133447	18	16.67	0	16.71	0
		133297	18	16.65	0	16.81	0
		133147	18	16.71	0	16.82	0
	12L	133447	18	16.51	0	16.65	0
		133297	18	16.64	0	16.74	0
		133147	18	16.52	0	16.71	0
	25	133447	18	16.57	0	16.64	0
		133297	18	16.68	0	16.71	0
		133147	18	16.71	0	16.73	0
					0		0
10MHz	1H	132422	18	16.63	0	16.40	0
		133297	18	16.64	0	16.42	0
		133172	18	16.63	0	16.47	0
	1M	132422	18	16.61	0	16.50	0
		133297	18	16.52	0	16.55	0
		133172	18	16.70	0	16.71	0
	1L	132422	18	16.55	0	16.41	0
		133297	18	16.61	0	16.42	0
		133172	18	16.63	0	16.46	0
	25H	132422	18	16.75	0	16.79	0
		133297	18	16.71	0	16.83	0
		133172	18	16.72	0	16.76	0
	25M	132422	18	16.69	0	16.67	0
		133297	18	16.76	0	16.72	0
		133172	18	16.71	0	16.78	0
	25L	132422	18	16.62	0	16.74	0
		133297	18	16.61	0	16.75	0
		133172	18	16.67	0	16.71	0
	50	132422	18	16.71	0	16.73	0
		133297	18	16.75	0	16.74	0
		133172	18	16.74	0	16.70	0
					0		0
15MHz	1H	133397	18	16.68	0	16.96	0
		133297	18	16.64	0	17.06	0
		133197	18	16.62	0	16.47	0
	1M	133397	18	16.82	0	17.17	0
		133297	18	16.85	0	17.12	0
		133197	18	16.77	0	16.62	0
	1L	133397	18	16.56	0	16.99	0
		133297	18	16.69	0	17.03	0
		133197	18	16.61	0	16.44	0
	36H	133397	18	16.71	0	16.82	0
		133297	18	16.71	0	16.77	0
		133197	18	16.82	0	16.81	0
	36M	133397	18	16.72	0	16.72	0
		133297	18	16.67	0	16.77	0
		133197	18	16.72	0	16.73	0
	36L	133397	18	16.76	0	16.77	0
		133297	18	16.66	0	16.65	0
		133197	18	16.72	0	16.69	0
	75	133397	18	16.65	0	16.71	0
		133297	18	16.69	0	16.77	0
		133197	18	16.74	0	16.72	0

					0		0
20MHz	1H	133372	18	16.47	0	16.98	0
		133297	18	16.39	0	16.87	0
		133222	18	16.54	0	17.04	0
	1M	133372	18	16.73	0	17.17	0
		133297	18	16.72	0	17.12	0
		133222	18	16.86	0	17.21	0
	1L	133372	18	16.37	0	16.96	0
		133297	18	16.32	0	16.82	0
		133222	18	16.42	0	16.95	0
	50H	133372	18	16.78	0	16.82	0
		133297	18	16.74	0	16.72	0
		133222	18	16.88	0	16.97	0
	50M	133372	18	16.69	0	16.73	0
		133297	18	16.75	0	16.64	0
		133222	18	16.77	0	16.80	0
	50L	133372	18	16.74	0	16.76	0
		133297	18	16.49	0	16.51	0
		133222	18	16.76	0	16.77	0
	100	133372	18	16.77	0	16.81	0
		133297	18	16.65	0	16.68	0
		133222	18	16.87	0	16.89	0

11.4 Wi-Fi and BT Measurement result

Table 11-23 Bluetooth Power

Bluetooth Power				
Mode	Channel	Frequency	Tune-up	Measured
GFSK	78	2480 MHz	6.5	5.87
	39	2441 MHz	6.5	5.95
	0	2402 MHz	6.5	5.29
EDR2M-4_DQPSK	78	2480 MHz	5	4.82
	39	2441 MHz	5	4.9
	0	2402 MHz	5	4.35
EDR3M-8DPSK	78	2480 MHz	5	4.88
	39	2441 MHz	5	4.95
	0	2402 MHz	5	4.42

Table 11-24 WLAN2450 #1

Mode	Channel	Frequency	Data Rate	Tune-up	Measured
802.11b	11	2462 MHz	1Mbps	21.00	19.42
	6	2437 MHz		22.00	20.60
	1	2412 MHz		21.00	19.35
	11	2462 MHz	2Mbps	/	/
	6	2437 MHz		22.00	20.31
	1	2412 MHz		/	/
	11	2462 MHz	5.5Mbps	/	/
	6	2437 MHz		22.00	20.57
	1	2412 MHz		/	/
	11	2462 MHz	11Mbps	/	/
	6	2437 MHz		22.00	20.23
	1	2412 MHz		/	/
802.11g	11	2462 MHz	6Mbps	20.00	18.30
	6	2437 MHz		20.00	19.01
	1	2412 MHz		20.00	18.58
	11	2462 MHz	9Mbps	/	/
	6	2437 MHz		20.00	18.80
	1	2412 MHz		/	/
	11	2462 MHz	12Mbps	/	/
	6	2437 MHz		19.00	17.82
	1	2412 MHz		/	/
	11	2462 MHz	18Mbps	/	/
	6	2437 MHz		19.00	18.15
	1	2412 MHz		/	/
	11	2462 MHz	24Mbps	/	/
	6	2437 MHz		19.00	17.72
	1	2412 MHz		/	/
	11	2462 MHz	36Mbps	/	/
	6	2437 MHz		19.00	17.65
	1	2412 MHz		/	/
	11	2462 MHz	48Mbps	/	/
	6	2437 MHz		17.00	16.08
	1	2412 MHz		/	/
	11	2462 MHz	54Mbps	/	/
	6	2437 MHz		17.00	15.03
	1	2412 MHz		/	/

802.11n 20M	11	2462 MHz	MCS0	20.00	18.15
	6	2437 MHz		20.00	18.81
	1	2412 MHz		20.00	18.05
	11	2462 MHz	MCS1	/	/
	6	2437 MHz		18.00	17.81
	1	2412 MHz		/	/
	11	2462 MHz	MCS2	/	/
	6	2437 MHz		18.00	17.88
	1	2412 MHz		/	/
	11	2462 MHz	MCS3	/	/
	6	2437 MHz		18.00	17.01
	1	2412 MHz		/	/
	11	2462 MHz	MCS4	/	/
	6	2437 MHz		18.00	16.98
	1	2412 MHz		/	/
	11	2462 MHz	MCS5	/	/
	6	2437 MHz		16.00	15.00
	1	2412 MHz		/	/
	11	2462 MHz	MCS6	/	/
	6	2437 MHz		16.00	15.02
	1	2412 MHz		/	/
	11	2462 MHz	MCS7	/	/
	6	2437 MHz		16.00	14.98
	1	2412 MHz		/	/
802.11n 40M	9	2452 MHz	MCS0	16.50	15.44
	6	2437 MHz		16.50	16.05
	3	2422 MHz		16.50	15.55
	9	2452 MHz	MCS1	/	/
	6	2437 MHz		16.50	15.85
	3	2422 MHz		/	/
	9	2452 MHz	MCS2	/	/
	6	2437 MHz		16.50	15.62
	3	2422 MHz		/	/
	9	2452 MHz	MCS3	/	/
	6	2437 MHz		16.50	15.96
	3	2422 MHz		/	/
	9	2452 MHz	MCS4	/	/
	6	2437 MHz		16.50	15.76
	3	2422 MHz		/	/
	9	2452 MHz	MCS5	/	/
	6	2437 MHz		15.00	13.04
	3	2422 MHz		/	/
	9	2452 MHz	MCS6	/	/
	6	2437 MHz		15.00	13.08
	3	2422 MHz		/	/
	9	2452 MHz	MCS7	/	/
	6	2437 MHz		15.00	13.03
	3	2422 MHz		/	/

Table 11-25 WLAN2450 #2

Mode	Channel	Frequency	Data Rate	Tune-up	Measured
802.11b	11	2462 MHz	1Mbps	12.00	10.05
	6	2437 MHz		12.00	10.36
	1	2412 MHz		12.00	10.22
	11	2462 MHz	2Mbps	/	/
	6	2437 MHz		12.00	10.27
	1	2412 MHz		/	/
	11	2462 MHz	5.5Mbps	/	/
	6	2437 MHz		12.00	10.27
	1	2412 MHz		/	/
	11	2462 MHz	11Mbps	/	/
	6	2437 MHz		12.00	10.25
	1	2412 MHz		/	/
802.11g	11	2462 MHz	6Mbps	10.00	9.48
	6	2437 MHz		10.00	9.86
	1	2412 MHz		10.00	9.43
	11	2462 MHz	9Mbps	/	/
	6	2437 MHz		10.00	9.64
	1	2412 MHz		/	/
	11	2462 MHz	12Mbps	/	/
	6	2437 MHz		9.00	8.47
	1	2412 MHz		/	/
	11	2462 MHz	18Mbps	/	/
	6	2437 MHz		9.00	8.55
	1	2412 MHz		/	/
	11	2462 MHz	24Mbps	/	/
	6	2437 MHz		9.00	8.64
	1	2412 MHz		/	/
	11	2462 MHz	36Mbps	/	/
	6	2437 MHz		9.00	8.31
	1	2412 MHz		/	/
	11	2462 MHz	48Mbps	/	/
	6	2437 MHz		7.00	6.21
	1	2412 MHz		/	/
	11	2462 MHz	54Mbps	/	/
	6	2437 MHz		7.00	5.18
	1	2412 MHz		/	/

802.11n 20M	11	2462 MHz	MCS0	10.00	9.38
	6	2437 MHz		10.00	9.71
	1	2412 MHz		10.00	9.32
	11	2462 MHz	MCS1	/	/
	6	2437 MHz		10.00	8.34
	1	2412 MHz		/	/
	11	2462 MHz	MCS2	/	/
	6	2437 MHz		10.00	8.44
	1	2412 MHz		/	/
	11	2462 MHz	MCS3	/	/
	6	2437 MHz		8.00	7.49
	1	2412 MHz		/	/
	11	2462 MHz	MCS4	/	/
	6	2437 MHz		8.00	7.47
	1	2412 MHz		/	/
	11	2462 MHz	MCS5	/	/
	6	2437 MHz		6.00	5.23
	1	2412 MHz		/	/
	11	2462 MHz	MCS6	/	/
	6	2437 MHz		6.00	5.24
	1	2412 MHz		/	/
	11	2462 MHz	MCS7	/	/
	6	2437 MHz		6.00	5.19
	1	2412 MHz		/	/
802.11n 40M	9	2452 MHz	MCS0	7.00	6.31
	6	2437 MHz		7.00	6.49
	3	2422 MHz		7.00	6.25
	9	2452 MHz	MCS1	7.00	6.52
	6	2437 MHz		7.00	6.71
	3	2422 MHz		7.00	6.24
	9	2452 MHz	MCS2	/	/
	6	2437 MHz		7.00	6.69
	3	2422 MHz		/	/
	9	2452 MHz	MCS3	/	/
	6	2437 MHz		7.00	6.48
	3	2422 MHz		/	/
	9	2452 MHz	MCS4	/	/
	6	2437 MHz		7.00	6.47
	3	2422 MHz		/	/
	9	2452 MHz	MCS5	/	/
	6	2437 MHz		5.00	3.27
	3	2422 MHz		/	/
	9	2452 MHz	MCS6	/	/
	6	2437 MHz		5.00	3.55
	3	2422 MHz		/	/
	9	2452 MHz	MCS7	/	/
	6	2437 MHz		5.00	3.26
	3	2422 MHz		/	/

Table 11-26 WLAN UNII-1 #1

802.11a Measured Power (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36(5180 MHz)	17.27	/	/	/	/	/	/	/
40(5200 MHz)	16.78	/	/	/	/	/	/	/
44(5220 MHz)	17.04	/	/	/	/	/	/	/
48(5240 MHz)	17.45	17.27	15.62	15.84	15.66	15.63	13.95	13.00

802.11a Tune Up (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36(5180 MHz)	19.00	\	\	\	\	\	\	\
40(5200 MHz)	18.00	\	\	\	\	\	\	\
44(5220 MHz)	19.00	\	\	\	\	\	\	\
48(5240 MHz)	19.00	19.00	16.00	16.00	16.00	16.00	14.50	14.50

Table 11-27 WLAN UNII-1 #2

802.11a Measured Power (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36(5180 MHz)	5.44	\	\	\	\	\	\	\
40(5200 MHz)	5.48	\	\	\	\	\	\	\
44(5220 MHz)	5.81	\	\	\	\	\	\	\
48(5240 MHz)	6.08	6.02	4.99	5.04	5.25	4.94	2.86	2.83

802.11a Tune Up (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36(5180 MHz)	7.00	\	\	\	\	\	\	\
40(5200 MHz)	7.00	\	\	\	\	\	\	\
44(5220 MHz)	7.00	\	\	\	\	\	\	\
48(5240 MHz)	7.00	7.00	6.00	6.00	6.00	6.00	4.00	4.00

Table 11-28 WLAN UNII-2A #1

802.11a Measured Power (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
52(5260 MHz)	18.15	/	/	/	/	/	/	/
56(5280 MHz)	18.38	18.33	16.96	16.57	16.02	16.01	14.08	13.19
60(5300 MHz)	18.24	/	/	/	/	/	/	/
64(5320 MHz)	17.56	/	/	/	/	/	/	/

802.11a Tune Up (dBm)								
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
52(5260 MHz)	19.00	\	\	\	\	\	\	\
56(5280 MHz)	19.00	19.00	17.00	17.00	17.00	17.00	15.00	15.00
60(5300 MHz)	19.00	\	\	\	\	\	\	\
64(5320 MHz)	19.00	\	\	\	\	\	\	\

Table 11-29 WLAN UNII-2A #2

		802.11a Measured Power (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
52(5260 MHz)	6.04	\	\	\	\	\	\	\	\
56(5280 MHz)	6.31	6.30	5.10	5.14	5.08	5.03	2.77	2.76	
60(5300 MHz)	5.95	\	\	\	\	\	\	\	\
64(5320 MHz)	5.74	\	\	\	\	\	\	\	\

802.11a Tune Up (dBm)

		802.11a Tune Up (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
52(5260 MHz)	7.00	\	\	\	\	\	\	\	\
56(5280 MHz)	7.00	7.00	6.00	6.00	6.00	6.00	4.00	4.00	
60(5300 MHz)	7.00	\	\	\	\	\	\	\	\
64(5320 MHz)	7.00	\	\	\	\	\	\	\	\

Table 11-30 WLAN UNII-3 #1

		802.11a Measured Power (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
149(5745 MHz)	17.55	/	/	/	/	/	/	/	/
153(5765 MHz)	18.35	/	/	/	/	/	/	/	
157(5785 MHz)	18.81	18.52	16.64	16.69	16.47	16.24	14.51	13.47	
161(5805 MHz)	18.67	/	/	/	/	/	/	/	
165(5825 MHz)	18.02	/	/	/	/	/	/	/	

802.11a Tune Up (dBm)

		802.11a Tune Up (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
149(5745 MHz)	19.00	\	\	\	\	\	\	\	\
153(5765 MHz)	19.00	\	\	\	\	\	\	\	\
157(5785 MHz)	19.00	19.00	18.00	18.00	18.00	18.00	15.00	15.00	
161(5805 MHz)	19.00	\	\	\	\	\	\	\	
165(5825 MHz)	19.00	\	\	\	\	\	\	\	

Table 11-31 WLAN UNII-3 #2

		802.11a Measured Power (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
149(5745 MHz)	5.92	\	\	\	\	\	\	\	\
153(5765 MHz)	6.72	\	\	\	\	\	\	\	
157(5785 MHz)	6.91								
161(5805 MHz)	7.05	7.02	5.23	5.29	5.45	5.12	3.32	3.32	
165(5825 MHz)	6.44	\	\	\	\	\	\	\	

802.11a Tune Up (dBm)

		802.11a Tune Up (dBm)							
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
149(5745 MHz)	7.00	\	\	\	\	\	\	\	\
153(5765 MHz)	7.00	\	\	\	\	\	\	\	\
157(5785 MHz)	7.00	\	\	\	\	\	\	\	\
161(5805 MHz)	7.50	7.50	6.00	6.00	6.00	6.00	4.00	4.00	
165(5825 MHz)	7.00	\	\	\	\	\	\	\	



5GHz 802.11n Tune up #1

WiFi 802.11n-20 (5GHz)							
Data Rate	Channel 36	Channel 48	Channel 52	Channel 64	Channel 149	Channel 157	Channel 161
Target (dBm)	18	18	18	18	18	18	18
Tune-up(dB)	18± 1	18± 1	18± 1	18± 1	18± 1	18± 1	18± 1

WiFi 802.11n-40 (5GHz)							
Data Rate	Channel 38	Channel 46	Channel 54	Channel 62	Channel 151	Channel 159	
Target (dBm)	18	18	18	18	18	18	
Tune-up(dB)	18± 1	18± 1	18± 1	18± 1	18± 1	18± 1	

5GHz 802.11n Tune up #2

WiFi 802.11n-20 (5GHz)							
Data Rate	Channel 36	Channel 48	Channel 52	Channel 64	Channel 149	Channel 157	Channel 161
Target (dBm)	6	6	6	6	6	6	6
Tune-up(dB)	6± 1	6± 1	6± 1	6± 1	6± 1	6± 1	6± 1

WiFi 802.11n-40 (5GHz)							
Data Rate	Channel 38	Channel 46	Channel 54	Channel 62	Channel 151	Channel 159	
Target (dBm)	6	6	6	6	6	6	
Tune-up(dB)	6± 1	6± 1	6± 1	6± 1	6± 1	6± 1	


12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

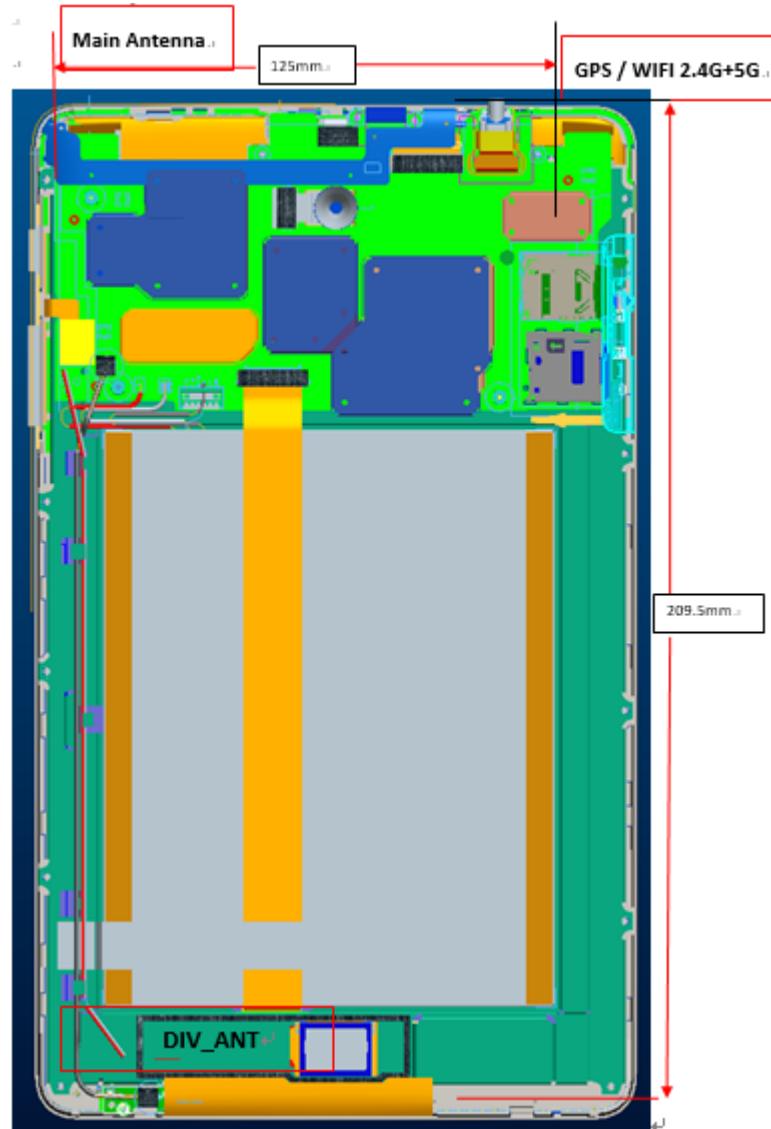

Picture 12.1 Antenna Locations

12.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Body	19.2	6.5	4.47	Yes
2.4GHz WLAN 802.11 b	2.45	Body	19.17	22	158.49	No
WLAN UNII-1	5.2	Body	13.16	19	79.43	No
WLAN UNII-2A	5.3	Body	13.03	19	79.43	No
WLAN UNII-3	5.8	Body	12.78	19	79.43	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Body	Rear 0mm	1.19	0.30	1.49
Highest reported SAR value for Body	Top edge 12mm	1.15	0.43	1.58

Table 13.2: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Body	Rear 0mm	1.19	0.19	1.38

[1] - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
Bluetooth	2.441	Body	5	6.5	4.47	0.19

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;
 where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6 W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom. The distance are 0mm, 7mm, 9mm, 12mm and 14mm, and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Mode			Duty Cycle		
GPRS&EGPRS for GSM850/1900 with normal power			1:4		
GPRS&EGPRS for GSM850/1900 with low power			1:2		
WCDMA<E			1:1		

14.1 SAR results

Table 14-1 GSM850 #1 Body

GSM850 #1 Body							
Ambient Temperature: 22.3			Liquid Temperature: 22.3				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]	
			CH251	CH190	CH128		
GPRS 2 Txslots	Tune-up		32.00	32.00	32.00	Scaling factor*	
	Slot Average Power [dBm]		30.88	30.90	30.84	1.30	
	Rear 14mm	1g SAR	0.134			0.17	
		10g SAR	0.097			0.13	
		Deviation	0.09			0.09	
	Top edge 12mm	1g SAR	0.119	0.167	0.136	0.15	
		10g SAR	0.088	0.115	0.095	0.11	
		Deviation	0.09	-0.08	-0.14	0.09	
	Right edge 12mm	1g SAR	0.048			0.06	
		10g SAR	0.032			0.04	
		Deviation	0.02			0.02	
EGPRS GMSK 2 Txslots	Tune-up		32.00	32.00	32.00	Scaling factor*	
	Slot Average Power [dBm]		30.86	30.88	30.83	1.30	
	Top edge 12mm	1g SAR	0.124			0.16	
		10g SAR	0.088			0.11	
		Deviation	0.07			0.07	

Table 14-2 GSM850 #2 Body

GSM850 #2 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			
			CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	
GPRS 4 Txslots	Tune-up		24.00	24.00	24.00	
	Slot Average Power [dBm]		23.01	22.95	22.79	
	Rear 0mm	1g SAR	0.232		0.30	
		10g SAR	0.128		0.16	
		Deviation	0.09		0.09	
	Top edge 0mm	1g SAR	0.242	0.238	0.146	
		10g SAR	0.136	0.132	0.094	
		Deviation	-0.01	0.13	0.07	
	Right edge 0mm	1g SAR	0.118		0.15	
		10g SAR	0.062		0.08	
		Deviation	0.03		0.03	
EGPRS GMSK 4 Txslots	Tune-up		24.00	24.00	24.00	
	Slot Average Power [dBm]		23.02	22.95	22.80	
	Top edge 0mm	1g SAR	0.235		0.29	
		10g SAR	0.121		0.15	
		Deviation	0.02		0.02	

Table 14-3 PCS1900 #1 Body

PCS1900 #1 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			
			CH810 1909.8	CH661 1880 MHz	CH512 1850.2	
GPRS 2 Txslots	Tune-up		29.00	29.00	29.00	
	Slot Average Power [dBm]		27.89	27.66	27.65	
	Rear 14mm	1g SAR	0.387		0.53	
		10g SAR	0.218		0.30	
		Deviation	0.09		0.09	
	Top edge 12mm	1g SAR	0.552	0.484	0.48	
		10g SAR	0.317	0.268	0.269	
		Deviation	-0.04	0.15	0.08	
	Right edge 12mm	1g SAR	0.064		0.09	
		10g SAR	0.041		0.06	
		Deviation	0.02		0.02	
EGPRS GMSK 2 Txslots	Tune-up		29.00	29.00	29.00	
	Slot Average Power [dBm]		27.90	27.66	27.66	
	Top edge 12mm	1g SAR	0.45		0.58	
		10g SAR	0.264		0.34	
		Deviation	0.11		0.11	

Table 14-4 PCS1900 #2 Body

PCS1900 #2 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]
			CH810	CH661	CH512	
GPRS 4 Txslots	Rear 0mm	1909.8	1880 MHz	1850.2	1909.8	1880 MHz
		Tune-up	16.00	16.00	16.00	Scaling factor*
		Slot Average Power [dBm]	15.99	15.81	15.81	1.00 1.04 1.05
	Top edge 0mm	1g SAR	0.936	0.812	1.02	0.94 0.85 1.07
		10g SAR	0.38	0.376	0.387	0.38 0.39 0.40
		Deviation	0.02	0.04	-0.19	0.02 0.04 -0.19
	Right edge 0mm	1g SAR		0.575		0.60
		10g SAR		0.234		0.24
		Deviation		0.11		0.11
EGPRS GMSK 4 Txslots	Rear 0mm	1g SAR		0.042		0.04
		10g SAR		0.022		0.02
		Deviation		0.07		0.07
	Tune-up		16.00	16.00	16.00	Scaling factor*
		Slot Average Power [dBm]	15.99	15.81	15.81	1.00 1.04 1.05

Table 14-5 WCDMA1900-BII #1Body

WCDMA1900-BII #1Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]
			CH9538	CH9400	CH9262	
RMC	Rear 14mm	1907.6 MHz	1880 MHz	1852.4 MHz	1907.6 MHz	1880 MHz 1852.4 MHz
		Tune-up	24.00	24.00	24.00	Scaling factor*
		Slot Average Power [dBm]	23.09	23.26	23.40	1.23 1.19 1.15
	Top edge 12mm	1g SAR		0.582		0.69
		10g SAR		0.34		0.40
		Deviation		0.08		0.08
	Right edge 12mm	1g SAR	0.856	0.894	0.837	1.06 1.06 0.96
		10g SAR	0.498	0.517	0.49	0.61 0.61 0.56
		Deviation	0.13	0.11	0.06	0.13 0.11 0.06

Table 14-6 WCDMA1900-BII #2Body

WCDMA1900-BII #2Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]
			CH9538	CH9400	CH9262	
RMC	Rear 0mm	1907.6 MHz	1880 MHz	1852.4 MHz	1907.6 MHz	1880 MHz 1852.4 MHz
		Tune-up	14.00	14.00	14.00	Scaling factor*
		Slot Average Power [dBm]	13.33	13.46	13.61	1.17 1.13 1.09
	Top edge 0mm	1g SAR	1	0.95	1.08	1.17 1.08 1.18
		10g SAR	0.395	0.414	0.431	0.46 0.47 0.47
		Deviation	-0.01	-0.08	0.04	-0.01 -0.08 0.04
	Right edge 0mm	1g SAR		0.657		0.74
		10g SAR		0.272		0.31
		Deviation		0.04		0.04

Table 14-7 WCDMA1700-BIV #1Body

WCDMA1700-BIV #1Body					
Ambient Temperature: 22.3			Liquid Temperature: 22.3		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]		
			CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
RMC	Tune-up		24.00	24.00	24.00
	Slot Average Power [dBm]	23.61	23.26	23.44	1.09
	Rear 14mm	1g SAR	1.09	1	0.812
		10g SAR	0.63	0.586	0.467
		Deviation	-0.04	0.03	0.04
	Top edge 12mm	1g SAR	1.02	0.898	0.707
		10g SAR	0.59	0.519	0.406
		Deviation	0.04	0.07	0.01
	Right edge 12mm	1g SAR		0.396	
		10g SAR		0.253	
		Deviation		0.02	

Table 14-8 WCDMA1700-BIV #2Body

WCDMA1700-BIV #2Body					
Ambient Temperature: 22.3			Liquid Temperature: 22.3		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]		
			CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
RMC	Tune-up		14.00	14.00	14.00
	Slot Average Power [dBm]	13.22	13.16	13.10	1.20
	Rear 0mm	1g SAR	0.868	0.809	0.561
		10g SAR	0.343	0.32	0.173
		Deviation	0.03	0.04	0.03
	Top edge 0mm	1g SAR		0.362	
		10g SAR		0.142	
		Deviation		0.09	
	Right edge 0mm	1g SAR		0.103	
		10g SAR		0.049	
		Deviation		0.02	

Table 14-9 WCDMA850-BV #1Body

WCDMA850-BV #1Body					
Ambient Temperature: 22.3			Liquid Temperature: 22.3		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]		
			CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz
RMC	Tune-up		24.00	24.00	24.00
	Slot Average Power [dBm]	23.11	23.08	23.05	1.23
	Rear 14mm	1g SAR		0.111	
		10g SAR		0.079	
		Deviation		0.03	
	Top edge 12mm	1g SAR	0.117	0.115	0.112
		10g SAR	0.081	0.079	0.078
		Deviation	0.05	0.14	0.01
	Right edge 12mm	1g SAR		0.039	
		10g SAR		0.025	
		Deviation		0.06	

Table 14-10 WCDMA850-BV #2Body

WCDMA850-BV #2Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			
			CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz	
RMC	Tune-up		14.00	14.00	14.00	
	Slot Average Power [dBm]		13.11	13.09	13.13	
	Rear 0mm	1g SAR		0.037		
		10g SAR		0.024		
		Deviation		0.09		
	Top edge 0mm	1g SAR	0.043	0.044	0.042	
		10g SAR	0.025	0.025	0.024	
		Deviation	0.04	-0.13	0.09	
	Right edge 0mm	1g SAR		0.023		
		10g SAR		0.011		
		Deviation		0.11		

Table 14-11 LTE1900-FDD2 #1 Body

LTE1900-FDD2 #1 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			
			19100 M	18900 M	18700 M	
20MHz QPSK1RB	Tune-up		24.00	24.00	24.00	
	Measured Power [dBm]		23.07	23.06	23.01	
	Rear 14mm	1g SAR	0.556		0.69	
		10g SAR	0.308		0.38	
		Deviation	0.01		0.01	
	Top edge 12mm	1g SAR	0.908	0.931	0.84	
		10g SAR	0.499	0.535	0.462	
		Deviation	0.09	-0.06	0.04	
	Right edge 12mm	1g SAR	0.104		0.13	
		10g SAR	0.064		0.08	
		Deviation	0.02		0.02	
20MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			
			19100 M	18900 L	18700 H	
	Tune-up		23.00	23.00	23.00	
	Measured Power [dBm]		22.07	22.11	22.08	
	Rear 14mm	1g SAR		0.519		
		10g SAR		0.287		
		Deviation		0.02		
	Top edge 12mm	1g SAR	0.651	0.687	0.795	
		10g SAR	0.362	0.383	0.43	
		Deviation	0.08	0.09	-0.05	
	Right edge 12mm	1g SAR		0.099		
		10g SAR		0.06		
		Deviation		0.13		
20MHz QPSK100% RB	Mode	Device orientation	Measured SAR [W/kg]			
			19100	18900	18700	
	Tune-up		23.00	23.00	23.00	
	Measured Power [dBm]		21.97	22.12	22.05	
	Top edge 12mm	1g SAR		0.662		

Table 14-12 LTE1900-FDD2 #2 Body

LTE1900-FDD2 #2 Body								
Ambient Temperature: 22.3			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100		
			M	M	M	M		
20MHz QPSK1RB	Tune-up		13.70	13.70	13.70	Scaling factor*		
	Measured Power [dBm]		13.61	13.60	13.68	1.02	1.02	1.00
	Rear 0mm	1g SAR	1.12	1.13	1.18	1.14	1.16	1.19
		10g SAR	0.314	0.319	0.327	0.32	0.33	0.33
		Deviation	-0.14	-0.13	0.05	-0.14	-0.13	0.05
	Top edge 0mm	1g SAR			0.642			0.64
		10g SAR			0.208			0.21
		Deviation			-0.01			-0.01
	Right edge 0mm	1g SAR			0.081			0.08
		10g SAR			0.028			0.03
		Deviation			-0.01			-0.01
20MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			M	L	H			
		Tune-up		13.70	13.70	13.70	Scaling factor*	
		Measured Power [dBm]		13.44	13.52	13.56	1.06	1.04
	Rear 0mm	1g SAR	1.05	1.13	1.1	1.11	1.18	1.14
		10g SAR	0.294	0.31	0.292	0.31	0.32	0.30
		Deviation	0.04	0.09	-0.13	0.04	0.09	-0.13
	Top edge 0mm	1g SAR			0.69			0.71
		10g SAR			0.223			0.23
		Deviation			0.05			0.05
	Right edge 0mm	1g SAR			0.09			0.09
		10g SAR			0.031			0.03
		Deviation			0.05			0.05
20MHz QPSK100% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
		Tune-up		13.70	13.70	13.70	Scaling factor*	
		Measured Power [dBm]		13.08	13.45	13.54	1.15	1.06
	Rear 0mm	1g SAR			1.09			1.13
		10g SAR			0.352			0.37
		Deviation			0.12			0.12

Table 14-13 LTE850-FDD5 #1 Body

LTE850-FDD5 #1 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			20600	20525	20450	20600	20525	20450	
			M	M	M	M	M	M	
10MHz QPSK1RB	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Measured Power [dBm]		22.96	23.00	23.01	1.27	1.26	1.26	
	Rear 14mm	1g SAR			0.099			0.12	
		10g SAR			0.07			0.09	
		Deviation			0.12			0.12	
	Top edge 12mm	1g SAR			0.122			0.15	
		10g SAR			0.084			0.11	
		Deviation			-0.07			-0.07	
	Right edge 12mm	1g SAR			0.043			0.05	
		10g SAR			0.028			0.04	
		Deviation			0.09			0.09	
10MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			20600	20525	20450	20600	20525	20450	
			M	H	M				
			Scaling factor*			Scaling factor*			
			23.00	23.00	23.00	1.27	1.27	1.28	
			Measured Power [dBm]	21.96	21.97	21.93			
	Rear 14mm	1g SAR		0.073			0.09		
		10g SAR		0.052			0.07		
		Deviation		-0.02			-0.02		
	Top edge 12mm	1g SAR		0.086			0.11		
		10g SAR		0.058			0.07		
		Deviation		0.08			0.08		
	Right edge 12mm	1g SAR		0.032			0.04		
		10g SAR		0.022			0.03		
		Deviation		0.11			0.11		

Table 14-14 LTE850-FDD5 #2 Body

LTE850-FDD5 #2 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			20600	20525	20450	20600	20525	20450	
			M	M	M	M	M	M	
10MHz QPSK1RB	Tune-up		18.00	18.00	18.00	Scaling factor*			
	Measured Power [dBm]		17.00	17.04	17.03	1.26	1.25	1.25	
	Rear 0mm	1g SAR		0.099			0.12		
		10g SAR		0.067			0.08		
		Deviation		0.09			0.09		
	Top edge 0mm	1g SAR		0.127			0.16		
		10g SAR		0.073			0.09		
		Deviation		-0.09			-0.09		
	Right edge 0mm	1g SAR		0.047			0.06		
		10g SAR		0.03			0.04		
		Deviation		-0.08			-0.08		
10MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			20600	20525	20450	20600	20525	20450	
			M	H	L				
			Scaling factor*			Scaling factor*			
			18.00	18.00	18.00	1.26	1.24	1.28	
			Measured Power [dBm]	16.99	17.08	16.94			
	Rear 0mm	1g SAR		0.1			0.12		
		10g SAR		0.066			0.08		
		Deviation		0.02			0.02		
	Top edge 0mm	1g SAR		0.126			0.16		
		10g SAR		0.072			0.09		
		Deviation		-0.1			-0.10		
	Right edge 0mm	1g SAR		0.042			0.05		
		10g SAR		0.027			0.03		
		Deviation		0.13			0.13		

Table 14-15 LTE2500-FDD7 #1 Body

LTE2500-FDD7 #1 Body								
Ambient Temperature: 22.3			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350		
20MHz QPSK1RB	Rear 14mm	M	M	M	M	M		
		Tune-up	22.80	22.80	22.80	Scaling factor*		
		Measured Power [dBm]	22.73	22.55	22.80	1.02	1.06	1.00
	Top edge 12mm	1g SAR			0.642			0.64
		10g SAR			0.332			0.33
		Deviation			0.05			0.05
	Right edge 12mm	1g SAR	1.13	1.02	0.975	1.15	1.08	0.98
		10g SAR	0.56	0.499	0.489	0.57	0.53	0.49
		Deviation	-0.04	0.09	0.04	0.04	0.09	0.04
20MHz QPSK50% RB	Rear 14mm	1g SAR			0.119			0.12
		10g SAR			0.07			0.07
		Deviation			0.12			0.12
	Top edge 12mm	L	M	M				
		Tune-up	21.80	21.80	21.80	Scaling factor*		
		Measured Power [dBm]	21.42	21.49	21.51	1.09	1.07	1.07
	Right edge 12mm	1g SAR			0.487			0.52
		10g SAR			0.245			0.26
		Deviation			0.04			0.04
20MHz QPSK100% RB	Top edge 12mm	1g SAR	0.761	0.989	0.799	0.83	1.06	0.85
		10g SAR	0.405	0.501	0.369	0.44	0.54	0.39
		Deviation	0.06	0.06	0.02	0.06	0.06	0.02
	Right edge 12mm	1g SAR			0.057			0.06
		10g SAR			0.024			0.03
		Deviation			0.03			0.03
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	M	M			
	Tune-up		21.80	21.80	21.80	Scaling factor*		
		Measured Power [dBm]	21.35	21.43	21.47	1.11	1.09	1.08
20MHz QPSK100% RB	Top edge 12mm	1g SAR			0.795			0.86
		10g SAR			0.368			0.40
	Deviation				0.14			0.15

Table 14-16 LTE2500-FDD7 #2 Body

LTE2500-FDD7 #2 Body									
Ambient Temperature: 22.3				Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			21350	21100	20850	21350	21100	20850	
			M	M	M	M	M	M	
20MHz QPSK1RB	Tune-up		12.00	12.00	12.00	Scaling factor*			
	Measured Power [dBm]		11.40	11.29	11.28	1.15	1.18	1.18	
	Rear 0mm	1g SAR	0.856	0.774	0.602	0.98	0.91	0.71	
		10g SAR	0.293	0.267	0.228	0.34	0.31	0.27	
		Deviation	0.03	0.03	0.05	0.03	0.03	0.05	
	Top edge 0mm	1g SAR	0.757	0.69	0.598	0.87	0.81	0.71	
		10g SAR	0.269	0.245	0.216	0.31	0.29	0.25	
		Deviation	0.07	0.02	0.19	0.07	0.02	0.19	
	Right edge 0mm	1g SAR	0.038			0.04			
		10g SAR	0.015			0.02			
		Deviation	0.03			0.03			
20MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			21350	21100	20850	21350	21100	20850	
			M	H	H				
	Tune-up		12.00	12.00	12.00	Scaling factor*			
	Measured Power [dBm]		11.33	11.26	11.22	1.17	1.19	1.20	
	Rear 0mm	1g SAR	0.791	0.759	0.586	0.92	0.90	0.70	
		10g SAR	0.272	0.261	0.222	0.32	0.31	0.27	
		Deviation	0.11	0.17	0.19	0.11	0.17	0.19	
	Top edge 0mm	1g SAR	0.661			0.77			
		10g SAR	0.252			0.29			
		Deviation	0.13			0.13			
	Right edge 0mm	1g SAR	0.036			0.04			
		10g SAR	0.014			0.02			
		Deviation	0.08			0.08			
20MHz QPSK100% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			21350	21100	20850	21350	21100	20850	
			M	H	H				
	Tune-up		12.00	12.00	12.00	Scaling factor*			
	Measured Power [dBm]		11.26	11.23	11.17	1.18	1.20	1.21	
	Rear 0mm	1g SAR	0.578			0.68			
		10g SAR	0.221			0.26			
		Deviation	0.17			0.17			
	20MHz QPSK100% RB	Top edge 0mm	1g SAR	0.715		0.82			
			10g SAR	0.247		0.28			
			Deviation	0.06		0.06			

Table 14-17 LTE700-FDD12 #1 Body

LTE700-FDD12 #1 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			M	M	M	M	M	M	
10MHz QPSK1RB	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Measured Power [dBm]		22.83	23.00	22.92	1.31	1.26	1.28	
	Rear 14mm	1g SAR		0.22			0.28		
		10g SAR		0.159			0.20		
		Deviation		0.02			0.02		
	Top edge 12mm	1g SAR		0.139			0.17		
		10g SAR		0.094			0.12		
		Deviation		0.11			0.11		
	Right edge 12mm	1g SAR		0.048			0.06		
		10g SAR		0.03			0.04		
		Deviation		0.08			0.08		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			M	L	M				
10MHz QPSK50% RB	Tune-up		23.00	23.00	23.00	Scaling factor*			
	Measured Power [dBm]		21.93	21.98	21.91	1.28	1.27	1.28	
	Rear 14mm	1g SAR		0.14			0.18		
		10g SAR		0.102			0.13		
		Deviation		0.05			0.05		
	Top edge 12mm	1g SAR		0.101			0.13		
		10g SAR		0.068			0.09		
		Deviation		0.09			0.09		
	Right edge 12mm	1g SAR		0.038			0.05		
		10g SAR		0.023			0.03		
		Deviation		-0.12			-0.12		

Table 14-18 LTE700-FDD12 #2 Body

LTE700-FDD12 #2 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			M	M	M	M	M	M	
10MHz QPSK1RB	Tune-up		18.00	18.00	18.00	Scaling factor*			
	Measured Power [dBm]		17.01	17.05	16.97	1.26	1.24	1.27	
	Rear 0mm	1g SAR		0.187			0.23		
		10g SAR		0.105			0.13		
		Deviation		0.12			0.12		
	Top edge 0mm	1g SAR		0.163			0.20		
		10g SAR		0.084			0.10		
		Deviation		0.07			0.07		
	Right edge 0mm	1g SAR		0.089			0.11		
		10g SAR		0.049			0.06		
		Deviation		0.08			0.08		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			M	H	H				
10MHz QPSK50% RB	Tune-up		18.00	18.00	18.00	Scaling factor*			
	Measured Power [dBm]		16.94	16.98	16.95	1.28	1.26	1.27	
	Rear 0mm	1g SAR		0.167			0.21		
		10g SAR		0.094			0.12		
		Deviation		-0.09			-0.09		
	Top edge 0mm	1g SAR		0.161			0.20		
		10g SAR		0.084			0.11		
		Deviation		0.12			0.12		
	Right edge 0mm	1g SAR		0.088			0.11		
		10g SAR		0.046			0.06		
		Deviation		-0.06			-0.06		

Table 14-19 LTE1700-FDD66 #1 Body

LTE1700-FDD66 #1 Body									
Ambient Temperature: 22.3				Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			132572	132322	132072	132572	132322	132072	
20MHz QPSK1RB	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Measured Power [dBm]		23.18	23.12	23.02	1.21	1.23	1.25	
	Rear 14mm	1g SAR	0.454			0.55			
		10g SAR	0.348			0.42			
		Deviation	0.09			0.09			
	Top edge 12mm	1g SAR	0.527			0.64			
		10g SAR	0.307			0.37			
		Deviation	-0.06			-0.06			
	Right edge 12mm	1g SAR	0.172			0.21			
		10g SAR	0.139			0.17			
		Deviation	0.06			0.06			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			132572	132322	132072	132572	132322	132072	
20MHz QPSK50% RB	Tune-up		23.00	23.00	23.00	Scaling factor*			
	Measured Power [dBm]		22.14	21.99	21.99	1.22	1.26	1.26	
	Rear 14mm	1g SAR	0.346			0.42			
		10g SAR	0.262			0.32			
		Deviation	0.09			0.09			
	Top edge 12mm	1g SAR	0.375			0.46			
		10g SAR	0.282			0.34			
		Deviation	0.08			0.08			
	Right edge 12mm	1g SAR	0.114			0.14			
		10g SAR	0.094			0.11			
		Deviation	0.04			0.04			

Table 14-20 LTE1700-FDD66 #2 Body

LTE1700-FDD66 #2 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			132572	132322	132072	132572			
			M	M	M	M			
20MHz QPSK1RB	Tune-up		14.00	14.00	14.00	Scaling factor*			
	Measured Power [dBm]		13.25	12.93	13.13	1.19	1.28	1.22	
	Rear 0mm	1g SAR	0.996	0.926	0.902	1.18	1.18	1.10	
		10g SAR	0.394	0.356	0.349	0.47	0.46	0.43	
		Deviation	0.07	-0.07	-0.02	0.07	-0.07	-0.02	
	Top edge 0mm	1g SAR	0.449			0.53			
		10g SAR	0.186			0.22			
		Deviation	0.06			0.06			
	Right edge 0mm	1g SAR	0.122			0.15			
		10g SAR	0.062			0.07			
		Deviation	0.05			0.05			
20MHz QPSK50% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			132572	132322	132072	132572	132322	132072	
			L	H	H				
	Tune-up		14.00	14.00	14.00	Scaling factor*			
	Measured Power [dBm]		13.25	13.07	13.08	1.19	1.24	1.23	
	Rear 0mm	1g SAR	0.968	0.914	0.896	1.15	1.13	1.11	
		10g SAR	0.38	0.367	0.339	0.45	0.45	0.42	
		Deviation	-0.08	0.09	0.02	-0.08	0.09	0.02	
	Top edge 0mm	1g SAR	0.426			0.51			
		10g SAR	0.177			0.21			
		Deviation	0.1			0.10			
	Right edge 0mm	1g SAR	0.12			0.14			
		10g SAR	0.063			0.07			
		Deviation	0.04			0.04			
20MHz QPSK100% RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]			
			132572	132322	132072	132572	132322	132072	
			L	H	H				
	Tune-up		14.00	14.00	14.00	Scaling factor*			
	Measured Power [dBm]		13.22	13.01	13.11	1.20	1.26	1.23	
	Rear 0mm	1g SAR	0.987			1.18			
		10g SAR	0.389			0.47			
		Deviation	0.05			0.05			

Table 14-21 LTE700-FDD71 #1 Body

LTE700-FDD71 #1 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			133372	133297	133222	133372	133297	133222	
20MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*			
	Measured Power [dBm]		22.87	22.65	22.77	1.16	1.22	1.18	
	Rear 14mm	1g SAR	0.259			0.30			
		10g SAR	0.19			0.22			
		Deviation	0.01			0.01			
	Top edge 12mm	1g SAR	0.199			0.23			
		10g SAR	0.135			0.16			
		Deviation	0.05			0.05			
	Right edge 12mm	1g SAR	0.057			0.07			
		10g SAR	0.035			0.04			
		Deviation	0.11			0.11			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			133372	133297	133222	133372	133297	133222	
20MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*			
	Measured Power [dBm]		21.79	21.65	21.87	1.18	1.22	1.16	
	Rear 14mm	1g SAR			0.194			0.22	
		10g SAR			0.142			0.16	
		Deviation			-0.02			-0.02	
	Top edge 12mm	1g SAR			0.159			0.18	
		10g SAR			0.105			0.12	
		Deviation			0.08			0.08	
	Right edge 12mm	1g SAR			0.043			0.05	
		10g SAR			0.027			0.03	
		Deviation			0.14			0.14	

Table 14-22 LTE700-FDD71 #2 Body

LTE700-FDD71 #2 Body									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			133372	133297	133222	133372	133297	133222	
20MHz QPSK1RB	Tune-up		18.00	18.00	18.00	Scaling factor*			
	Measured Power [dBm]		16.73	16.72	16.86	1.34	1.34	1.30	
	Rear 0mm	1g SAR			0.283			0.37	
		10g SAR			0.167			0.22	
		Deviation			-0.04			-0.04	
	Top edge 0mm	1g SAR			0.14			0.18	
		10g SAR			0.086			0.11	
		Deviation			0.09			0.09	
	Right edge 0mm	1g SAR			0.069			0.09	
		10g SAR			0.04			0.05	
		Deviation			-0.05			-0.05	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			133372	133297	133222	133372	133297	133222	
20MHz QPSK50% RB	Tune-up		18.00	18.00	18.00	Scaling factor*			
	Measured Power [dBm]		16.78	16.75	16.88	1.32	1.33	1.29	
	Rear 0mm	1g SAR			0.253			0.33	
		10g SAR			0.138			0.18	
		Deviation			0.16			0.16	
	Top edge 0mm	1g SAR			0.145			0.19	
		10g SAR			0.089			0.12	
		Deviation			0.07			0.07	
	Right edge 0mm	1g SAR			0.065			0.08	
		10g SAR			0.038			0.05	
		Deviation			0.12			0.12	

14.2 Full SAR

Test Band	Channel	Frequency	Tune-Up	Measured Power	Test Position	Measured 10g SAR	Measured 1g SAR	Reported 10g SAR	Reported 1g SAR	Power Drift	Figure
GSM850	190	836.6 MHz	32	30.90	Top edge 12mm	0.115	0.167	0.15	0.22	-0.08	Fig A.1
GSM850	251	848.8 MHz	24	23.01	Top edge 0mm	0.136	0.242	0.17	0.30	-0.01	Fig A.2
PCS1900	810	1909.8 MHz	29	27.89	Top edge 12mm	0.317	0.552	0.41	0.71	-0.04	Fig A.3
PCS1900	512	1850.2 MHz	16	15.81	Rear 0mm	0.387	1.02	0.40	1.07	-0.19	Fig A.4
WCDMA1900-BII	9538	1907.6 MHz	24	23.09	Top edge 12mm	0.517	0.894	0.61	1.06	0.12	Fig A.5
WCDMA1900-BII	9262	1852.4 MHz	14	13.61	Rear 0mm	0.431	1.06	0.47	1.18	0.04	Fig A.6
WCDMA1700-BIV	1513	1752.6 MHz	24	23.61	Rear 14mm	0.63	1.09	0.69	1.19	-0.04	Fig A.7
WCDMA1700-BIV	1513	1752.6 MHz	14	13.22	Rear 0mm	0.343	0.868	0.41	1.04	0.03	Fig A.8
WCDMA850-BV	4233	846.6 MHz	24	23.11	Top edge 12mm	0.081	0.117	0.10	0.14	0.05	Fig A.9
WCDMA850-BV	4182	835.4 MHz	14	13.09	Top edge 0mm	0.025	0.044	0.03	0.05	-0.13	Fig A.10
LTE1900-FDD2	18900	1880 MHz	24	23.06	Top edge 12mm	0.535	0.931	0.64	1.15	-0.06	Fig A.11
LTE1900-FDD2	18700	1860 MHz	13.7	13.68	Rear 0mm	0.327	1.18	0.33	1.19	0.05	Fig A.12
LTE850-FDD5	20450	829 MHz	24	23.01	Top edge 12mm	0.084	0.122	0.11	0.15	-0.07	Fig A.13
LTE850-FDD5	20525	836.5 MHz	18	17.04	Top edge 0mm	0.073	0.127	0.09	0.16	-0.09	Fig A.14
LTE2500-FDD7	21350	2560 MHz	22.8	22.73	Top edge 12mm	0.56	1.13	0.57	1.15	-0.04	Fig A.15
LTE2500-FDD7	21350	2560 MHz	12	11.40	Rear 0mm	0.293	0.856	0.34	0.98	0.03	Fig A.16
LTE700-FDD12	23095	707.5 MHz	24	23.00	Rear 14mm	0.159	0.22	0.20	0.28	0.02	Fig A.17
LTE700-FDD12	23095	707.5 MHz	18	17.05	Rear 0mm	0.105	0.187	0.13	0.23	0.12	Fig A.18
LTE1700-FDD66	132572	707.5 MHz	24	23.18	Top edge 12mm	0.307	0.527	0.37	0.64	-0.06	Fig A.19
LTE1700-FDD66	132572	707.5 MHz	14	13.25	Rear 0mm	0.394	0.996	0.47	1.18	0.07	Fig A.20
LTE700-FDD71	133372	707.5 MHz	23.5	22.87	Rear 14mm	0.19	0.259	0.22	0.30	0.01	Fig A.21
LTE700-FDD71	133222	707.5 MHz	18	16.86	Rear 0mm	0.167	0.283	0.22	0.37	-0.04	Fig A.22

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 802.11b DSSS using the initial test position procedure.

Note1: When the reported SAR of the initial test position is $> 0.4 \text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.

Note3: According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

Table 14-23 WLAN2450 #1 Body Fast SAR

WLAN2450 #1 Body Fast SAR						Liquid Temperature: 22.3			
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11 2462 MHz	6 2437 MHz	1 2412 MHz	11	6	1	
802.11b 1Mbps	Tune up		21	22	21	Scaling factor*			
	Slot Average Power [dBm]		19.42	20.60	19.35	1.44	1.38	1.46	
	Rear 9mm	1g Fast SAR		0.308			0.43		
		10g SAR		0.166			0.23		
		Deviation		-0.01			-0.01		
	Top edge 7mm	1g Fast SAR		0.429			0.59		
		10g SAR		0.211			0.29		
		Deviation		-0.09			-0.09		
	Left edge 7mm	1g Fast SAR		0.229			0.32		
		10g SAR		0.108			0.15		
		Deviation		-0.03			-0.03		

Table 14-24 WLAN2450 #1 Body Full SAR

WLAN2450 #1 Body Full SAR									
Ambient Temperature: 22.3			Liquid Temperature: 22.3						
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11 2462 MHz	6 2437 MHz	1 2412 MHz	11	6	1	
802.11b 1Mbps	Tune up		21	22	21	Scaling factor*			
	Slot Average Power [dBm]		19.42	20.60	19.35	1.44	1.38	1.46	
	Rear 9mm	1g Full SAR		0.316			0.44		
		10g SAR		0.177			0.24		
		Deviation		-0.01			-0.01		
	Top edge 7mm	1g Full SAR		0.459			0.63		
		10g SAR		0.219			0.30		
		Deviation		-0.09			-0.09		

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency	Test Position	Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.					
2437 MHz	6	Top edge 7mm	100.00%	100%	0.63	0.63

Table 14-25 WLAN2450 #2 Body Fast SAR


WLAN2450 #2 Body Fast SAR								
Ambient Temperature: 22.3			Liquid Temperature: 22.3					
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			11	6	1			
			2462 MHz	2437 MHz	2412 MHz			
802.11b 1Mbps	Tune up		12	12	12	Scaling factor*		
	Slot Average Power [dBm]		10.05	10.36	10.22	1.57	1.46	1.51
	Rear 0mm	1g Fast SAR		0.21			0.31	
		10g SAR		0.091			0.13	
		Deviation		0.02			0.02	
	Top edge 0mm	1g Fast SAR		0.184			0.27	
		10g SAR		0.067			0.10	
		Deviation		-0.07			-0.07	
	Left edge 0mm	1g Fast SAR		0.085			0.12	
		10g SAR		0.038			0.06	
		Deviation		-0.01			-0.01	

Table 14-26 WLAN2450 #2 Body Full SAR

WLAN2450 #2 Body Full SAR								
Ambient Temperature: 22.3			Liquid Temperature: 22.3					
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			11	6	1			
			2462 MHz	2437 MHz	2412 MHz			
802.11b 1Mbps	Tune up		12	12	12	Scaling factor*		
	Slot Average Power [dBm]		10.05	10.36	10.22	1.57	1.46	1.51
	Rear 0mm	1g Full SAR		0.206			0.30	
		10g SAR		0.092			0.13	
		Deviation		0.02			0.02	
	Top edge 0mm	1g Full SAR		0.184			0.27	
		10g SAR		0.067			0.10	
		Deviation		-0.07			-0.07	
	Left edge 0mm	1g Full SAR		0.085			0.12	
		10g SAR		0.038			0.06	
		Deviation		-0.01			-0.01	

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency	Test Position		Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.						
2437 MHz	6	Rear 0mm	100.00%	100%	0.30	0.30	Fig.24

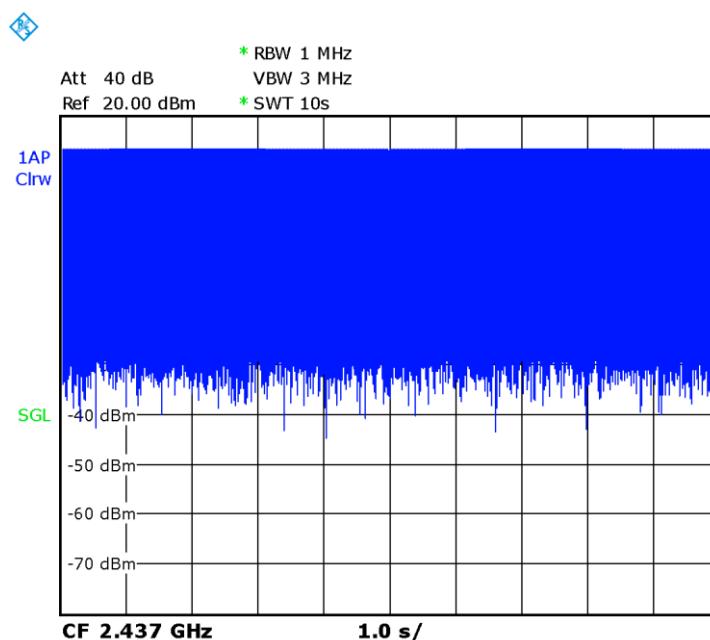

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq 1.2 \text{ W/kg}$.

Table 14-27 WLAN UNII-2A #1 Body

WLAN UNII-2A #1 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured	SAR [W/kg]	Reported SAR [W/kg]	
			56	60	56	
802.11a	Rear 9mm	1g SAR	0.609			
		10g SAR	0.209			
		Deviation	0.09			
	Top edge 7mm	1g SAR	0.501			
		10g SAR	0.175			
		Deviation	-0.03			
	Left edge 7mm	1g SAR	0.228			
		10g SAR	0.093			
		Deviation	0.15			
Tune-up			19.00	19.00	Scaling factor*	
Slot Average Power [dBm]			18.38	18.24	1.15 1.19	

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency	Test Position		Actual duty	maximum duty	Reported SAR(1g)/W	Scaled reported	Figure
MHz	Ch.						
6Mbps	56	Rear 9mm	100.00%	100%	0.70	0.70	Fig.25

Table 14-28 WLAN UNII-2A #2 Body

WLAN UNII-2A #2 Body						
Ambient Temperature: 22.3			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured	SAR [W/kg]	Reported SAR [W/kg]	
			56	52	56 52	
802.11a	Rear 0mm	1g SAR	0.246			
		10g SAR	0.06			
		Deviation	0.02			
	Top edge 0mm	1g SAR	0.122			
		10g SAR	0.027			
		Deviation	0.01			
	Left edge 0mm	1g SAR	0.034			
		10g SAR	0.014			
		Deviation	-0.06			
Tune-up			7.00	7.00	Scaling factor*	
Slot Average Power [dBm]			6.31	6.04	1.17 1.25	

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency	Test Position		Actual duty	maximum duty	Reported SAR(1g)/W	Scaled reported	Figure
MHz	Ch.						
6Mbps	56	Rear 0mm	100.00%	100%	0.29	0.29	Fig.26

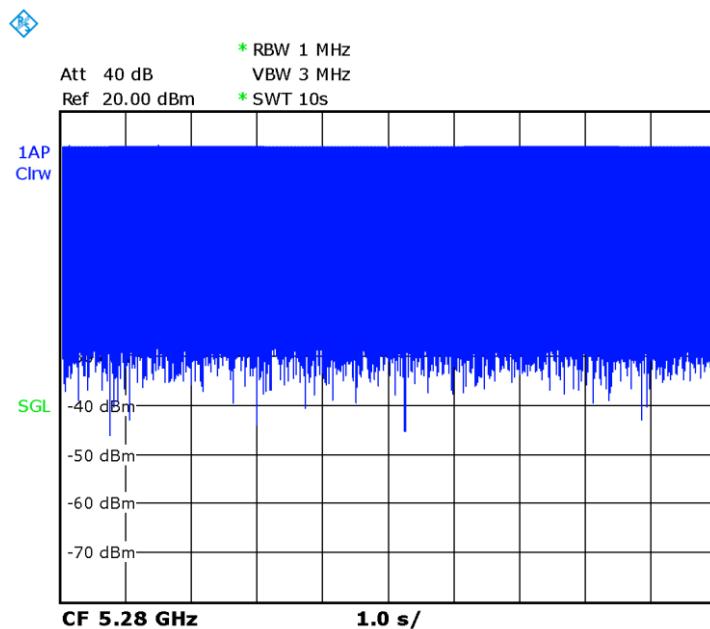


Table 14-29 WLAN UNII-3 #1 Body

WLAN UNII-3 #1 Body							
Ambient Temperature: 22.3			Liquid Temperature: 22.3				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]	Reported SAR [W/kg]			
			157 6Mbps	161 6Mbps	157 6Mbps		
802.11a	Tune-up		19.00	19.00	Scaling factor*		
	Slot Average Power [dBm]		18.81	18.67	1.04	1.08	
	Rear 9mm	1g SAR	0.424	0.44			
		10g SAR	0.154	0.16			
		Deviation	-0.06	-0.06			
	Top edge 7mm	1g SAR	0.518	0.54			
		10g SAR	0.186	0.19			
		Deviation	-0.08	-0.08			
	Left edge 7mm	1g SAR	0.203	0.21			
		10g SAR	0.084	0.09			
		Deviation	-0.04	-0.04			

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below


Frequency	Test Position	Actual duty	maximum duty	Reported SAR(1g)(W)	Scaled reported	Figure
MHz	Ch.					
6Mbps	157	Top edge 7mm	100.00%	100%	0.54	0.54

Table 14-30 WLAN UNII-3 #2 Body

WLAN UNII-3 #2 Body					
Ambient Temperature: 22.3			Liquid Temperature: 22.3		
Mode	Device orientation	SAR measurement	Measured	SAR [W/kg]	Reported SAR [W/kg]
			161	157	161 157
802.11a	Rear 0mm	Tune-up	7.50	7.00	Scaling factor*
		Slot Average Power [dBm]	7.05	6.91	1.11 1.02
		1g SAR	0.187		0.21
	Top edge 0mm	10g SAR	0.046		0.05
		Deviation	0.09		0.09
		1g SAR	0.062		0.07
	Left edge 0mm	10g SAR	0.016		0.02
		Deviation	0.03		0.03
		1g SAR	0.037		0.04
		10g SAR	0.013		0.01
		Deviation	-0.01		-0.01

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency	Test Position		Actual duty	maximum duty	Reported SAR(1g)W	Scaled reported	Figure
MHz	Ch.						
6Mbps	161	Rear 0mm	100.00%	100%	0.21	0.21	Fig.26

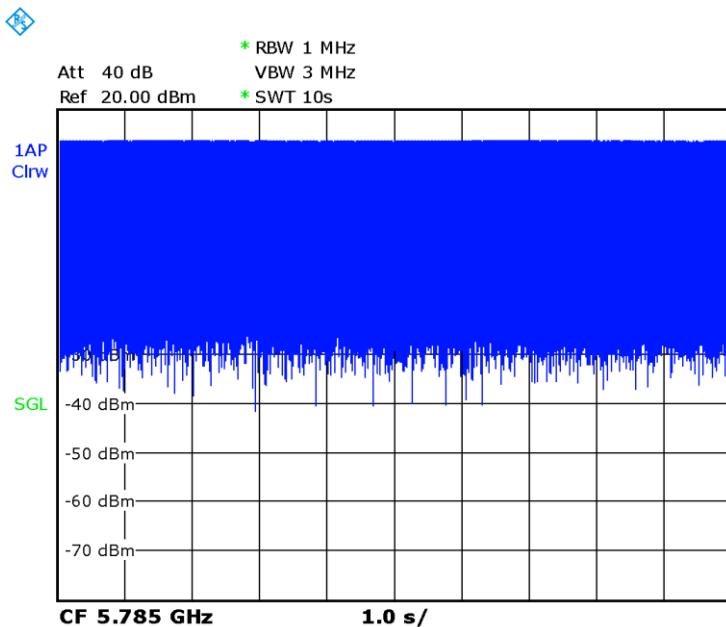

Test Band	Channel	Frequency	Tune-Up	Measured Power	Test Position	Measured 10g SAR	Measured 1g SAR	Reported 10g SAR	Reported 1g SAR	Power Drift
WLAN5250	56	5280 MHz	19	18.38	Rear 14mm	0.117	0.3	0.13	0.35	-0.07
WLAN5250	56	5280 MHz	19	18.38	Top edge 12mm	0.147	0.373	0.17	0.43	-0.02

Test Band	Channel	Frequency	Tune-Up	Measured Power	Test Position	Measured 10g SAR	Measured 1g SAR	Reported 10g SAR	Reported 1g SAR	Power Drift
LTE1900-FDD2	18900	1880 MHz	13.7	13.68	Top edge 7mm	0.141	0.301	0.14	0.30	0.01
WCDMA1700-BIV	1513	1752.6 MHz	14	13.22	Rear 9mm	0.073	0.155	0.09	0.19	0.05

Note: to evaluate the simultaneous SAR of main antenna and WLAN.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Mode	CH	Freq	Test Position	Original SAR (W/kg)	First Repeated SAR(W/kg)	The Ratio
PCS1900	512	1850. 2 MHz	Rear 0mm	1. 02	0. 98	1. 04
WCDMA1900-BII	9538	1907. 6 MHz	Top edge 12mm	0. 894	0. 876	1. 02
WCDMA1900-BII	9262	1852. 4 MHz	Rear 0mm	1. 06	1. 05	1. 01
WCDMA1700-BIV	1513	1752. 6 MHz	Rear 14mm	1. 09	1. 05	1. 04
WCDMA1700-BIV	1513	1752. 6 MHz	Rear 0mm	0. 868	0. 857	1. 01
LTE1900-FDD2	18900	1880 MHz	Top edge 12mm	0. 931	0. 901	1. 03
LTE1900-FDD2	18700	1860 MHz	Rear 0mm	1. 18	1. 13	1. 04
LTE2500-FDD7	21350	2560 MHz	Top edge 12mm	1. 13	1. 1	1. 03
LTE2500-FDD7	21350	2560 MHz	Rear 0mm	0. 856	0. 853	1. 00
LTE1700-FDD66	132572	707. 5 MHz	Rear 0mm	0. 996	0. 989	1. 01

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

	(target)									
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
	Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
	Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞	
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43	
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞	
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521	
Combined standard uncertainty			$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)			$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	---------	----------	----------------	-----------------	-------------------

Measurement system

1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z- Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞

Test sample related

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
----	-------------------------	---	-----	---	---	---	---	-----	-----	----

16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	



17 MAIN TEST INSTRUMENTS

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 24, 2018	One year
02	Power meter	NRVD	102083	November 01,2017	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49070393	January 02,2018	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	CMW500	159889	December 20, 2017	One year
07	E-field Probe	SPEAG EX3DV4	7464	September 12,2017	One year
08	DAE	SPEAG DAE4	1525	October 02, 2017	One year
09	Dipole Validation Kit	SPEAG D750V3	1017	July 19,2017	Three year
10	Dipole Validation Kit	SPEAG D835V2	4d069	July 19,2017	Three year
11	Dipole Validation Kit	SPEAG D1750V2	1003	July 21,2017	Three year
12	Dipole Validation Kit	SPEAG D1900V2	5d101	July 26,2017	Three year
13	Dipole Validation Kit	SPEAG D2450V2	853	July 21,2017	Three year
14	Dipole Validation Kit	SPEAG D2600V2	1012	July 21,2017	Three year
15	Dipole Validation Kit	SPEAG D5GHzV2	1060	July 25,2017	Three year

Note: The verifications in return loss of dipoles are listed in ANNEX J

END OF REPORT BODY