



The Photos of SAR test

No. I19Z60823-SEM01

For

TCL Communication Ltd.

Tablet PC

Model name: 9029W

With

Hardware Version: 02

Software Version: v5F5U

FCC ID: 2ACCJBT16



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

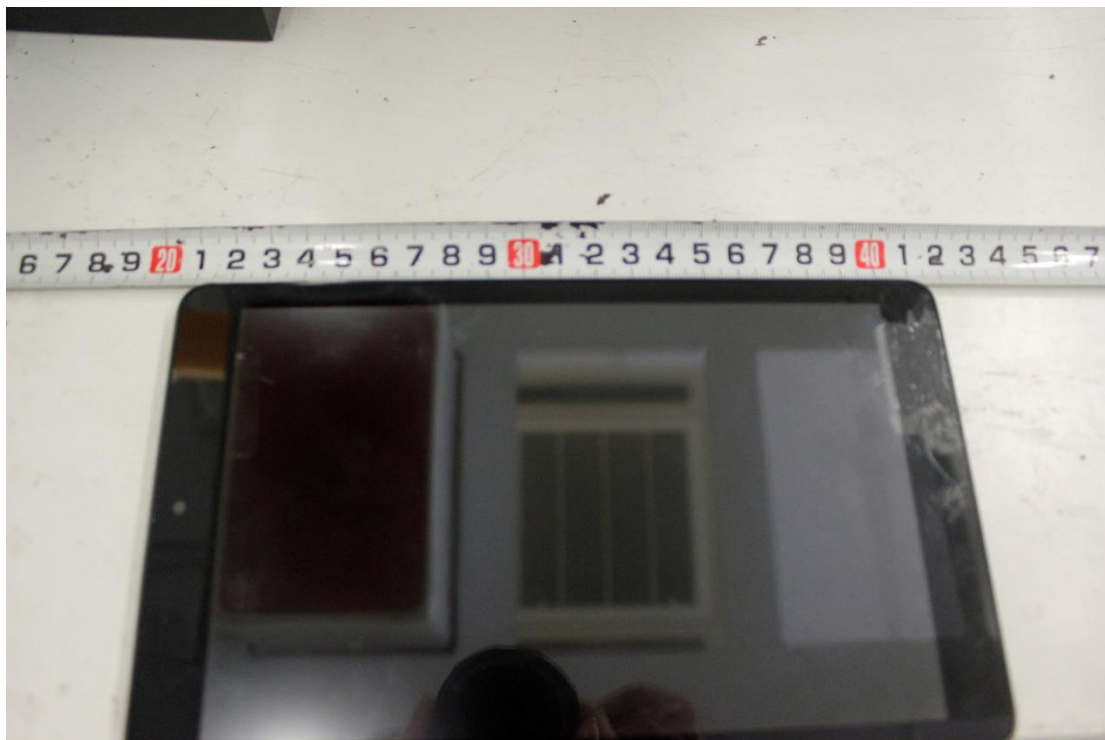


Picture 1: Constituents of the sample

Test positions for body:


The Body SAR is tested at the following 10 test positions all with the distance =0/7/9/12/14mm between the EUT and the phantom bottom:

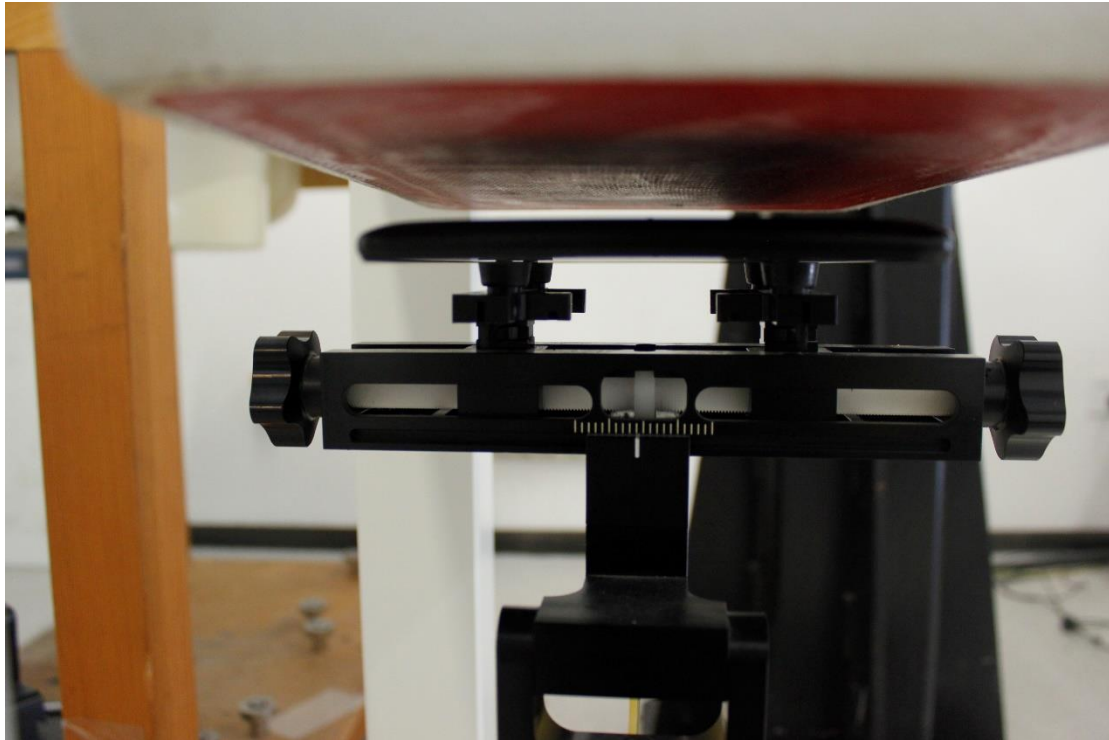


Picture 2: Rear with 14mm

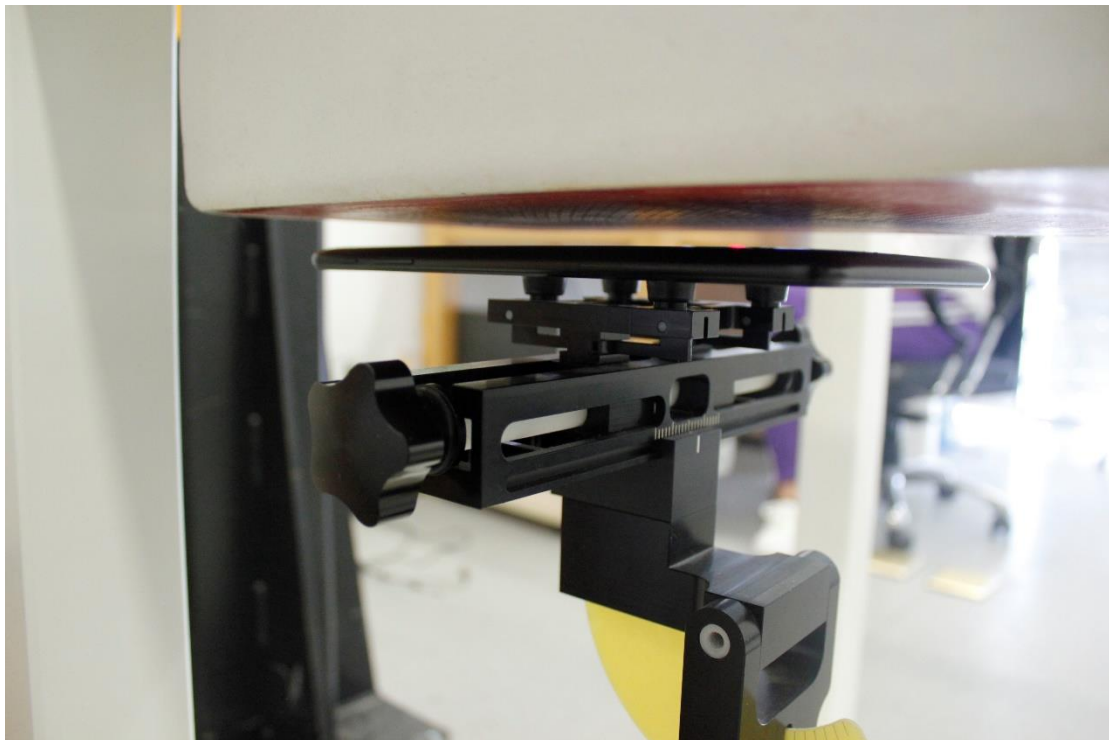

Picture 3: Rear with 9mm

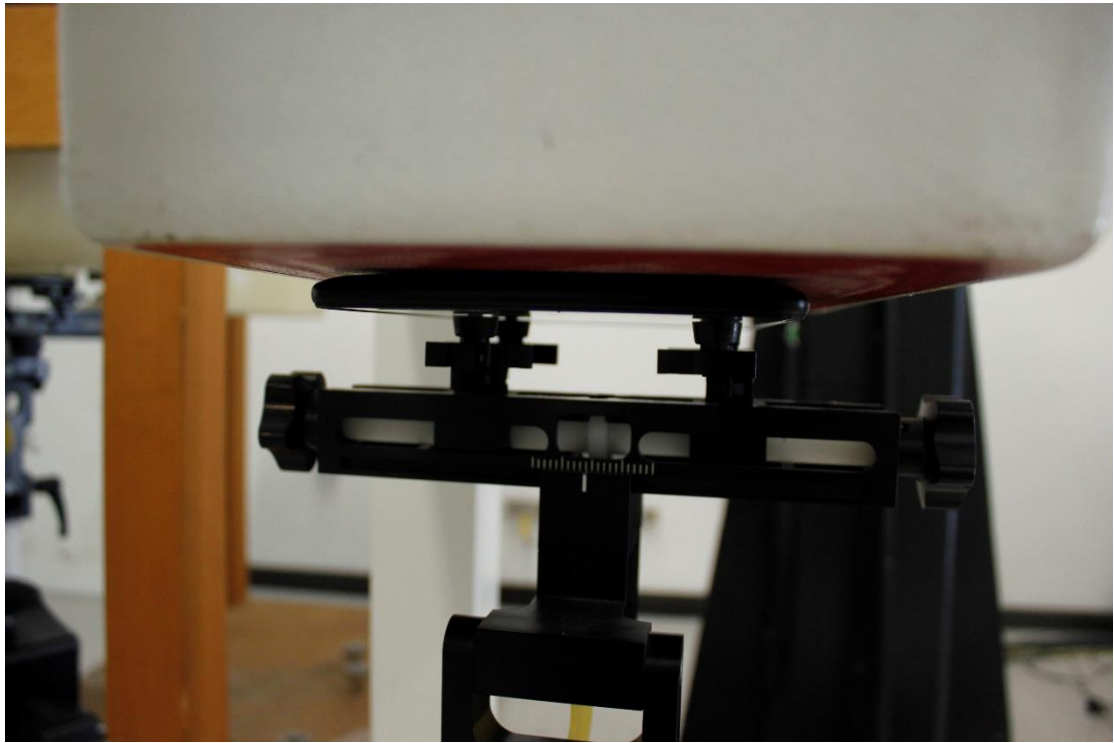

Picture 4: Rear with 0mm

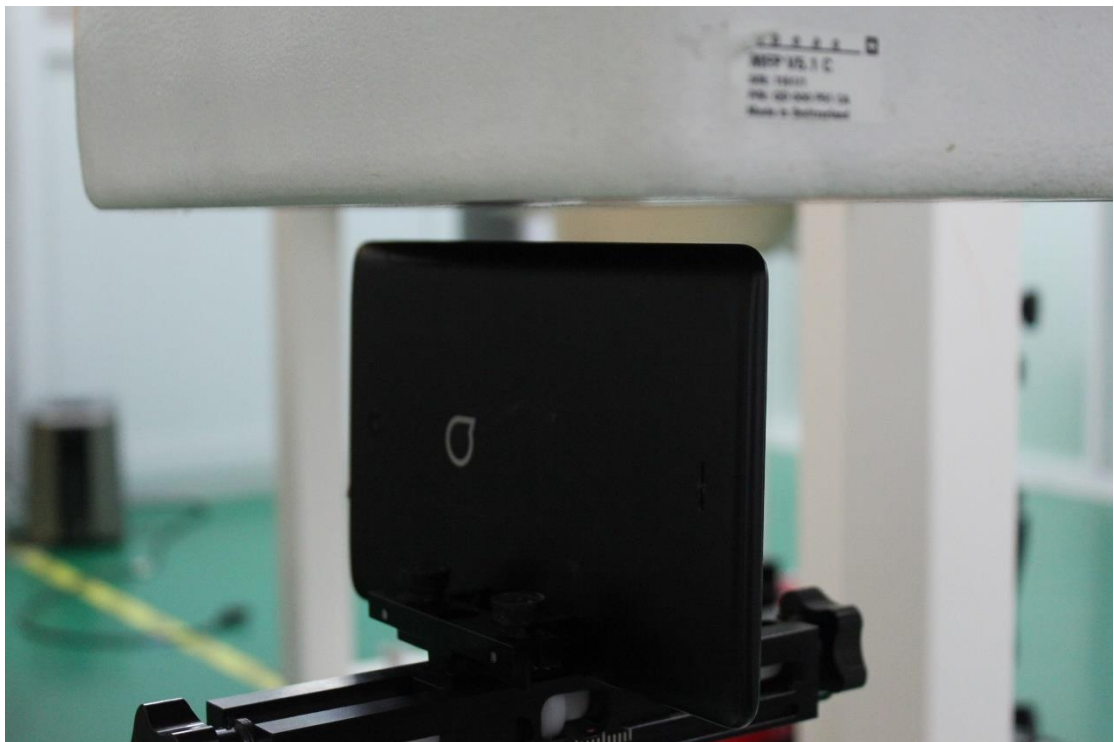


Picture 5: Left with 7mm



Picture 6: Left with 0mm



Picture 7: Right with 12mm

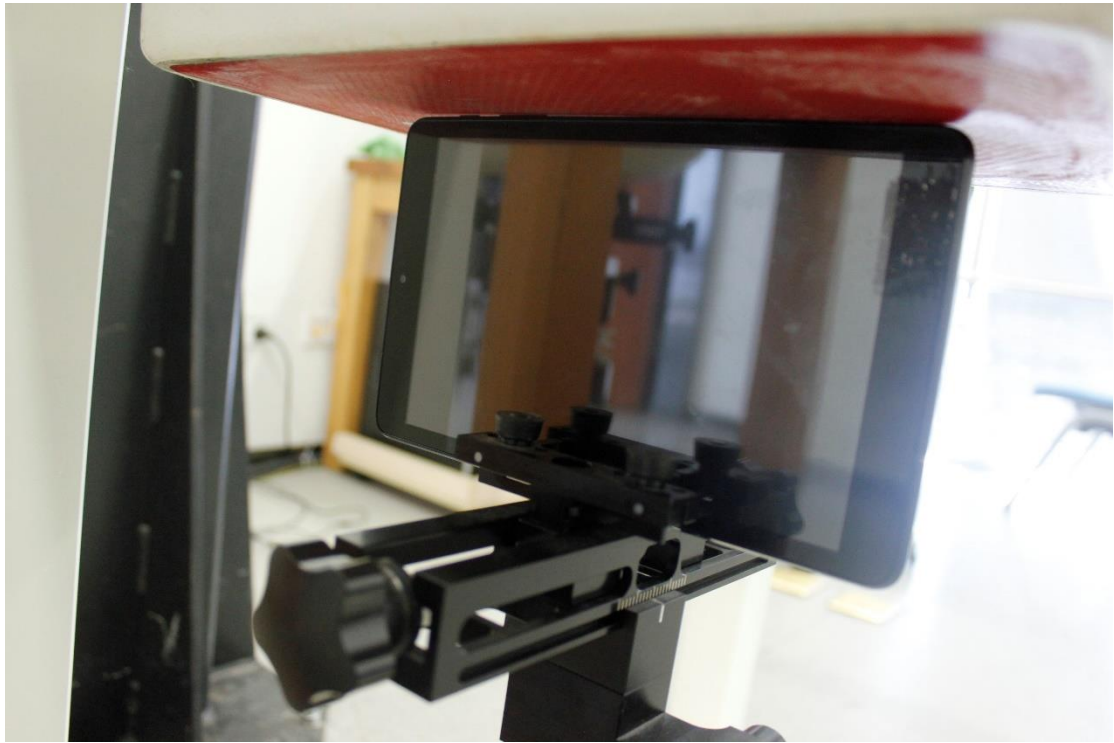

Picture 8: Right with 0mm



Picture 9: Top edge with 12mm



Picture 10: Top edge with 7mm



Picture 11: Top edge with 0mm