

Table14-9 WCDMA850-BV #1Head

WCDMA850-BV #1Head									
Ambient Temperature:			22.5			Liquid Temperature:			22.3
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz	
RMC	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Slot Average Power [dBm]		23.76	23.77	23.95	1.06	1.05	1.01	
	Left Cheek	1g SAR	0.259	0.271	0.256	0.27	0.29	0.26	
		10g SAR	0.199	0.208	0.195	0.21	0.22	0.20	
		Deviation	0.04	-0.05	-0.01	0.04	-0.05	-0.01	
	Left Tilt	1g SAR		0.219			0.23		
		10g SAR		0.169			0.18		
		Deviation		0.03			0.03		
	Right Cheek	1g SAR		0.199			0.21		
		10g SAR		0.146			0.15		
		Deviation		0.01			0.01		
	Right Tilt	1g SAR		0.176			0.19		
		10g SAR		0.137			0.14		
		Deviation		-0.08			-0.08		
	RMC B1	Left Cheek	1g SAR		0.264			0.28	
10g SAR				0.195			0.21		
Deviation				-0.01			-0.01		

Table14-10 WCDMA850-BV #1Body

WCDMA850-BV #1Body									
Ambient Temperature:			22.5			Liquid Temperature:			22.3
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz	
RMC	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Slot Average Power [dBm]		23.76	23.77	23.95	1.06	1.05	1.01	
	Front	1g SAR		0.354			0.37		
		10g SAR		0.331			0.35		
		Deviation		0.03			0.03		
	Rear	1g SAR	0.446	0.428	0.364	0.47	0.45	0.37	
		10g SAR	0.344	0.405	0.324	0.36	0.43	0.33	
		Deviation	0.12	-0.05	-0.04	0.12	-0.05	-0.04	
	Left edge	1g SAR		0.219			0.23		
		10g SAR		0.19			0.20		
		Deviation		0.07			0.07		
	Right edge	1g SAR		0.261			0.28		
		10g SAR		0.204			0.22		
		Deviation		0.02			0.02		
	Bottom edge	1g SAR		0.102			0.11		
10g SAR			0.068			0.07			
Deviation			0.06			0.06			
RMC B2	Rear	1g SAR	0.422			0.45			
		10g SAR	0.308			0.33			
		Deviation	-0.03			-0.03			



Table14-11 LTE1900-FDD2 #1 Head

LTE1900-FDD2 #1 Head								
Ambient Temperature: 22.5				Liquid Temperature: 22.3				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		23.18	23.15	23.14	1.08	1.08	1.09
	Left Cheek	1g SAR	0.19			0.20		
		10g SAR	0.12			0.13		
		Deviation	0.04			0.04		
	Left Tilt	1g SAR	0.115			0.12		
		10g SAR	0.068			0.07		
		Deviation	0.02			0.02		
	Right Cheek	1g SAR	0.239			0.26		
		10g SAR	0.145			0.16		
		Deviation	-0.15			-0.15		
	Right Tilt	1g SAR	0.06			0.06		
		10g SAR	0.037			0.04		
Deviation		0.07			0.07			
TRUE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			L	M	L	L	M	L
20MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.26	22.03	22.18	1.06	1.11	1.08
	Left Cheek	1g SAR	0.161			0.17		
		10g SAR	0.102			0.11		
		Deviation	0.13			0.13		
	Left Tilt	1g SAR	0.097			0.10		
		10g SAR	0.059			0.06		
		Deviation	0.08			0.08		
	Right Cheek	1g SAR	0.209			0.22		
		10g SAR	0.127			0.13		
		Deviation	0.03			0.03		
	Right Tilt	1g SAR	0.05			0.05		
		10g SAR	0.03			0.03		
Deviation		0.12			0.12			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
20MHz QPSK1RB B1	Right Cheek	1g SAR	0.226			0.24		
		10g SAR	0.137			0.15		
		Deviation	0.09			0.09		



Table 14-12 LTE1900-FDD2 #1 Body

LTE1900-FDD2 #1 Body								
Ambient Temperature: 22.5				Liquid Temperature: 22.3				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		23.18	23.15	23.14	1.08	1.08	1.09
	Front	1g SAR	0.519			0.56		
		10g SAR	0.305			0.33		
		Deviation	0.04			0.04		
	Rear	1g SAR	0.701			0.75		
		10g SAR	0.386			0.42		
		Deviation	0.03			0.03		
	Left edge	1g SAR	0.211			0.23		
		10g SAR	0.126			0.14		
		Deviation	0.13			0.13		
	Right edge	1g SAR	0.195			0.21		
		10g SAR	0.117			0.13		
		Deviation	0.09			0.09		
	Bottom edge	1g SAR	0.8	0.699	0.615	0.86	0.76	0.67
10g SAR		0.441	0.385	0.343	0.47	0.42	0.37	
Deviation		0.07	0.09	0.012	0.07	0.09	0.01	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			L	M	L			
20MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.26	22.03	22.18	1.06	1.11	1.08
	Front	1g SAR	0.461			0.49		
		10g SAR	0.269			0.28		
		Deviation	-0.03			-0.03		
	Rear	1g SAR	0.624			0.66		
		10g SAR	0.343			0.36		
		Deviation	-0.13			-0.13		
	Left edge	1g SAR	0.187			0.20		
		10g SAR	0.111			0.12		
		Deviation	0.07			0.07		
	Right edge	1g SAR	0.174			0.18		
		10g SAR	0.104			0.11		
		Deviation	0.16			0.16		
	Bottom edge	1g SAR	0.682			0.72		
10g SAR		0.37			0.39			
Deviation		0.07			0.07			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100	18900	18700
			L	M	L			
20MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.18	21.98	22.13	1.08	1.13	1.09
	Bottom edge	1g SAR	0.75			0.81		
		10g SAR	0.421			0.45		
Deviation		0.02			0.02			
20MHz QPSK1RB B2	Bottom edge	1g SAR	0.785			0.85		
		10g SAR	0.419			0.45		
		Deviation	0.03			0.03		



Table 14-13 LTE1700-FDD4 #1 Head

LTE1700-FDD4 #1 Head								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		24.30	24.30	24.30	Scaling factor*		
	Measured Power [dBm]		23.20	23.38	23.68	1.29	1.24	1.15
	Left Cheek	1g SAR			0.211			0.24
		10g SAR			0.14			0.16
		Deviation			0.08			0.08
	Left Tilt	1g SAR			0.148			0.17
		10g SAR			0.101			0.12
		Deviation			-0.03			-0.03
	Right Cheek	1g SAR			0.335			0.39
		10g SAR			0.217			0.25
		Deviation			0.04			0.04
	Right Tilt	1g SAR			0.113			0.13
10g SAR				0.067			0.08	
Deviation				0.04			0.04	
TRUE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L	L	L	L
20MHz QPSK50% RB	Tune-up		23.30	23.30	23.30	Scaling factor*		
	Measured Power [dBm]		22.25	22.29	22.59	1.27	1.26	1.18
	Left Cheek	1g SAR			0.316			0.37
		10g SAR			0.207			0.24
		Deviation			0.02			0.02
	Left Tilt	1g SAR			0.101			0.12
		10g SAR			0.068			0.08
		Deviation			-0.05			-0.05
	Right Cheek	1g SAR			0.252			0.30
		10g SAR			0.166			0.20
		Deviation			0.06			0.06
	Right Tilt	1g SAR			0.11			0.13
10g SAR				0.068			0.08	
Deviation				0.01			0.01	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L	L	L	L
20MHz QPSK100% RB	Tune-up		23.30	23.30	23.30	Scaling factor*		
	Measured Power [dBm]		22.07	22.21	22.47	1.33	1.28	1.21
	Left Cheek	1g SAR						
10g SAR								
Deviation								
20MHz QPSK1RB B1	Right Cheek	1g SAR			0.324			0.37
		10g SAR			0.208			0.24
		Deviation			-0.05			-0.05

Table 14-14 LTE1700-FDD4 #1 Body

LTE1700-FDD4 #1 Body								
Ambient Temperature: 22.5					Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		24.30	24.30	24.30	Scaling factor*		
	Measured Power [dBm]		23.20	23.38	23.68	1.29	1.24	1.15
	Front	1g SAR			0.693			0.80
		10g SAR			0.461			0.53
		Deviation			-0.01			-0.01
	Rear	1g SAR	0.573	0.638	0.733	0.74	0.79	0.85
		10g SAR	0.369	0.41	0.487	0.48	0.51	0.56
		Deviation	-0.06	-0.04	-0.05	-0.06	-0.04	-0.05
	Left edge	1g SAR			0.223			0.26
		10g SAR			0.131			0.15
		Deviation			0.05			0.05
	Right edge	1g SAR			0.169			0.19
		10g SAR			0.105			0.12
		Deviation			0.08			0.08
	Bottom edge	1g SAR			0.392			0.45
10g SAR				0.229			0.26	
Deviation				0.02			0.02	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L			
20MHz QPSK50% RB	Tune-up		23.30	23.30	23.30	Scaling factor*		
	Measured Power [dBm]		22.25	22.29	22.59	1.27	1.26	1.18
	Front	1g SAR			0.428			0.50
		10g SAR			0.291			0.34
		Deviation			0.1			0.10
	Rear	1g SAR			0.543			0.64
		10g SAR			0.361			0.43
		Deviation			-0.04			-0.04
	Left edge	1g SAR			0.304			0.36
		10g SAR			0.182			0.21
		Deviation			0.08			0.08
	Right edge	1g SAR			0.133			0.16
		10g SAR			0.082			0.10
		Deviation			-0.05			-0.05
	Bottom edge	1g SAR			0.29			0.34
10g SAR				0.169			0.20	
Deviation				0.09			0.09	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20300	20175	20050	20300	20175	20050
			L	L	L			
20MHz QPSK100% RB	Tune-up		23.30	23.30	23.30	Scaling factor*		
	Measured Power [dBm]		22.07	22.21	22.47	1.33	1.28	1.21
	Rear	1g SAR			0.518			0.63
		10g SAR			0.334			0.40
		Deviation			-0.02			-0.02
20MHz QPSK1RB B2	Rear	1g SAR			0.692			0.80
		10g SAR			0.456			0.53
		Deviation			0.02			0.02

Table 14-15 LTE850-FDD5 #1 Head

LTE850-FDD5 #1 Head								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
			L	L	H	L	L	H
10MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		22.91	22.95	22.98	1.15	1.13	1.13
	Left Cheek	1g SAR			0.285			0.32
		10g SAR			0.227			0.26
		Deviation			0.01			0.01
	Left Tilt	1g SAR			0.213			0.24
		10g SAR			0.169			0.19
		Deviation			0.05			0.05
	Right Cheek	1g SAR			0.33			0.37
		10g SAR			0.251			0.28
		Deviation			-0.04			-0.04
	Right Tilt	1g SAR			0.215			0.24
		10g SAR			0.173			0.20
		Deviation			0.02			0.02
TRUE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
			L	L	L	L	L	L
10MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		21.95	21.98	21.98	1.14	1.13	1.13
	Left Cheek	1g SAR			0.215			0.24
		10g SAR			0.171			0.19
		Deviation			0.01			0.01
	Left Tilt	1g SAR			0.155			0.17
		10g SAR			0.123			0.14
		Deviation			-0.03			-0.03
	Right Cheek	1g SAR			0.247			0.28
		10g SAR			0.188			0.21
		Deviation			-0.07			-0.07
	Right Tilt	1g SAR			0.167			0.19
		10g SAR			0.132			0.15
		Deviation			0.02			0.02
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
10MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		21.91	21.94	21.96	1.15	1.14	1.13
	Right Cheek	1g SAR						
		10g SAR						
10MHz QPSK1RB B1	Right Cheek	1g SAR			0.289			0.33
		10g SAR			0.243			0.27
		Deviation			0.04			0.04

Table 14-16 LTE850-FDD5 #1 Body

LTE850-FDD5 #1 Body								
Ambient Temperature: 22.5					Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
			L	L	H	L	L	H
10MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		22.91	22.95	22.98	1.15	1.13	1.13
	Front	1g SAR			0.333			0.38
		10g SAR			0.255			0.29
		Deviation			0.08			0.08
	Rear	1g SAR			0.393			0.44
		10g SAR			0.305			0.34
		Deviation			0.18			0.18
	Left edge	1g SAR			0.202			0.23
		10g SAR			0.133			0.15
		Deviation			-0.03			-0.03
	Right edge	1g SAR			0.245			0.28
		10g SAR			0.166			0.19
		Deviation			0.05			0.05
Bottom edge	1g SAR			0.087			0.10	
	10g SAR			0.046			0.05	
	Deviation			0.12			0.12	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
			L	L	L			
10MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		21.95	21.98	21.98	1.14	1.13	1.13
	Front	1g SAR			0.288			0.32
		10g SAR			0.221			0.25
		Deviation			0.07			0.07
	Rear	1g SAR			0.338			0.38
		10g SAR			0.262			0.30
		Deviation			-0.07			-0.07
	Left edge	1g SAR			0.218			0.25
		10g SAR			0.147			0.17
		Deviation			0.04			0.04
	Right edge	1g SAR			0.303			0.34
		10g SAR			0.206			0.23
		Deviation			0.01			0.01
Bottom edge	1g SAR			0.071			0.08	
	10g SAR			0.037			0.04	
	Deviation			-0.08			-0.08	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			20600	20525	20450	20600	20525	20450
10MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		21.91	21.94	21.96	1.15	1.14	1.13
	Front	1g SAR						
10g SAR								
Deviation								
10MHz QPSK1RB B2	Rear	1g SAR			0.372			0.42
		10g SAR			0.285			0.32
		Deviation			0.04			0.04

Table 14-17 LTE2500-FDD7 #1 Head

LTE2500-FDD7 #1 Head								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		23.15	23.20	23.33	1.08	1.07	1.04
	Left Cheek	1g SAR			0.273			0.28
		10g SAR			0.15			0.16
		Deviation			0.04			0.04
	Left Tilt	1g SAR			0.149			0.16
		10g SAR			0.082			0.09
		Deviation			-0.01			-0.01
	Right Cheek	1g SAR			0.173			0.18
		10g SAR			0.099			0.10
		Deviation			0.03			0.03
	Right Tilt	1g SAR			0.162			0.17
		10g SAR			0.099			0.10
		Deviation			0.01			0.01
FALSE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L	L	L	L
20MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.17	22.11	22.06	1.08	1.09	1.11
	Left Cheek	1g SAR	0.3			0.32		
		10g SAR	0.161			0.17		
		Deviation	0.1			0.10		
	Left Tilt	1g SAR	0.142			0.15		
		10g SAR	0.076			0.08		
		Deviation	0.08			0.08		
	Right Cheek	1g SAR	0.179			0.19		
		10g SAR	0.094			0.10		
		Deviation	-0.03			-0.03		
	Right Tilt	1g SAR	0.285			0.31		
		10g SAR	0.145			0.16		
		Deviation	0.06			0.06		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L	L	L	L
20MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.10	22.09	22.02	1.10	1.10	1.12
	Left Cheek	1g SAR						
		10g SAR						
Deviation								
20MHz QPSK50% RB	Left Cheek	1g SAR	0.292			0.31		
		10g SAR	0.156			0.17		
		Deviation	0.06			0.06		

Table 14-18 LTE2500-FDD7 #1 Body

LTE2500-FDD7 #1 Body								
Ambient Temperature: 22.5					Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L	L	L	L
20MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		23.15	23.20	23.33	1.08	1.07	1.04
	Front	1g SAR			0.636			0.66
		10g SAR			0.296			0.31
		Deviation			0.12			0.12
	Rear	1g SAR			0.653			0.68
		10g SAR			0.32			0.33
		Deviation			0.09			0.09
	Left edge	1g SAR			0.518			0.54
		10g SAR			0.262			0.27
		Deviation			0.06			0.06
	Right edge	1g SAR			0.159			0.17
		10g SAR			0.085			0.09
		Deviation			0.08			0.08
	Bottom edge	1g SAR			0.609			0.63
10g SAR				0.259			0.27	
Deviation				0.07			0.07	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L			
20MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.17	22.11	22.06	1.08	1.09	1.11
	Front	1g SAR	0.689			0.74		
		10g SAR	0.323			0.35		
		Deviation	0.03			0.03		
	Rear	1g SAR	0.708			0.76		
		10g SAR	0.315			0.34		
		Deviation	0.06			0.06		
	Left edge	1g SAR	0.55			0.59		
		10g SAR	0.278			0.30		
		Deviation	0.03			0.03		
	Right edge	1g SAR	0.103			0.11		
		10g SAR	0.056			0.06		
		Deviation	0.12			0.12		
	Bottom edge	1g SAR	0.553			0.60		
10g SAR		0.234			0.25			
Deviation		0.14			0.14			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			21350	21100	20850	21350	21100	20850
			L	L	L			
20MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.10	22.09	22.02	1.10	1.10	1.12
	Front	1g SAR						
10g SAR								
Deviation								
20MHz QPSK50% RB	Rear	1g SAR	0.69			0.74		
		10g SAR	0.301			0.32		
		Deviation	0.09			0.09		

Table 14-19 LTE700-FDD12 #2 Head

LTE700-FDD12 #2 Head								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			23130	23095	23060	23130	23095	23060
			L	M	H	L	M	H
10MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*		
	Measured Power [dBm]		23.17	23.17	23.21	1.08	1.08	1.07
	Left Cheek	1g SAR			0.361			0.39
		10g SAR			0.188			0.20
		Deviation			0.06			0.06
	Left Tilt	1g SAR			0.456			0.49
		10g SAR			0.217			0.23
		Deviation			-0.01			-0.01
	Right Cheek	1g SAR			0.541			0.58
		10g SAR			0.25			0.27
		Deviation			0.07			0.07
	Right Tilt	1g SAR	0.847	0.854	0.844	0.91	0.92	0.90
10g SAR		0.35	0.354	0.354	0.38	0.38	0.38	
Deviation		-0.02	-0.07	-0.07	-0.02	-0.07	-0.07	
TRUE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			23130	23095	23060	23130	23095	23060
			L	L	M	L	L	M
10MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.31	22.19	22.13	1.04	1.07	1.09
	Left Cheek	1g SAR	0.362			0.38		
		10g SAR	0.19			0.20		
		Deviation	0.15			0.15		
	Left Tilt	1g SAR	0.387			0.40		
		10g SAR	0.188			0.20		
		Deviation	-0.05			-0.05		
	Right Cheek	1g SAR	0.532			0.56		
		10g SAR	0.219			0.23		
		Deviation	0.1			0.10		
	Right Tilt	1g SAR	0.681			0.71		
10g SAR		0.281			0.29			
Deviation		0.02			0.02			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			23130	23095	23060	23130	23095	23060
10MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*		
	Measured Power [dBm]		22.29	22.16	22.01	1.05	1.08	1.12
	Right Tilt	1g SAR	0.657			0.69		
		10g SAR	0.273			0.29		
Deviation		0.03			0.03			
10MHz QPSK1RB B1	Right Tilt	1g SAR		0.842			0.91	
		10g SAR		0.343			0.37	
		Deviation		-0.09			-0.09	

Table 14-20 LTE700-FDD12 #2 Body

LTE700-FDD12 #2 Body									
Ambient Temperature:			22.5			Liquid Temperature:			22.3
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			L	M	H	L	M	H	
10MHz QPSK1RB	Tune-up		23.50	23.50	23.50	Scaling factor*			
	Measured Power [dBm]		23.17	23.17	23.21	1.08	1.08	1.07	
	Front	1g SAR			0.191			0.20	
		10g SAR			0.107			0.11	
		Deviation			-0.06			-0.06	
	Rear	1g SAR			0.17			0.18	
		10g SAR			0.124			0.13	
		Deviation			-0.01			-0.01	
	Left edge	1g SAR			0.226			0.24	
		10g SAR			0.162			0.17	
		Deviation			0.05			0.05	
	Top edge	1g SAR			0.155			0.17	
10g SAR				0.118			0.13		
Deviation				0.1			0.10		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
			L	L	M				
10MHz QPSK50% RB	Tune-up		22.50	22.50	22.50	Scaling factor*			
	Measured Power [dBm]		22.31	22.19	22.13	1.04	1.07	1.09	
	Front	1g SAR	0.141			0.15			
		10g SAR	0.079			0.08			
		Deviation	0.02			0.02			
	Rear	1g SAR	0.138			0.14			
		10g SAR	0.098			0.10			
		Deviation	-0.06			-0.06			
	Left edge	1g SAR	0.164			0.17			
		10g SAR	0.108			0.11			
		Deviation	-0.01			-0.01			
	Top edge	1g SAR	0.095			0.10			
10g SAR		0.063			0.07				
Deviation		0.08			0.08				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23130	23095	23060	23130	23095	23060	
10MHz QPSK100% RB	Tune-up		22.50	22.50	22.50	Scaling factor*			
	Measured Power [dBm]		22.29	22.16	22.01	1.05	1.08	1.12	
	Front	1g SAR							
		10g SAR							
Deviation									
10MHz QPSK1RB B2	Left edge	1g SAR			0.176			0.19	
		10g SAR			0.101			0.11	
		Deviation			-0.01			-0.01	

Table 14-21 LTE750-FDD13 #2 Head

LTE750-FDD13 #2 Head				
Ambient Temperature:		22.5	22.3	
Mode	Device orientation	SAR measurement	Measured SAR	Reported SAR
			23230	23230
			L	L
10MHz QPSK1RB	Tune-up		23.00	Scaling factor*
	Measured Power [dBm]		22.97	1.01
	Left Cheek	1g SAR	0.312	0.31
		10g SAR	0.178	0.18
		Deviation	0.04	0.04
	Left Tilt	1g SAR	0.364	0.37
		10g SAR	0.194	0.20
		Deviation	0.01	0.01
	Right Cheek	1g SAR	0.48	0.48
		10g SAR	0.256	0.26
		Deviation	-0.06	-0.06
	Right Tilt	1g SAR	0.69	0.69
10g SAR		0.296	0.30	
Deviation		-0.01	-0.01	
TRUE	Device orientation	SAR measurement	Measured SAR	Reported SAR
			23230	23230
			H	H
10MHz QPSK50% RB	Tune-up		22.00	Scaling factor*
	Measured Power [dBm]		21.77	1.05
	Left Cheek	1g SAR	0.233	0.25
		10g SAR	0.133	0.14
		Deviation	-0.02	-0.02
	Left Tilt	1g SAR	0.261	0.28
		10g SAR	0.139	0.15
		Deviation	0.08	0.08
	Right Cheek	1g SAR	0.353	0.37
		10g SAR	0.19	0.20
		Deviation	0.09	0.09
	Right Tilt	1g SAR	0.508	0.54
10g SAR		0.22	0.23	
Deviation		-0.04	-0.04	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]	Reported SAR [W/kg]
			23230	23230
10MHz QPSK100% RB	Tune-up		22.00	Scaling factor*
	Measured Power [dBm]		21.73	1.06
	Right Tilt	1g SAR		
		10g SAR		
Deviation				
10MHz QPSK1RB B1	Right Tilt	1g SAR	0.679	0.68
		10g SAR	0.281	0.28
		Deviation	0.03	0.03

Table 14-22 LTE750-FDD13 #2 Body

LTE750-FDD13 #2 Body				
Ambient Temperature:		22.5	22.3	
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]	Reported SAR [W/kg]
			23230	23230
			L	L
10MHz QPSK1RB	Tune-up		23.00	Scaling factor*
	Measured Power [dBm]		22.97	1.01
	Front	1g SAR	0.157	0.16
		10g SAR	0.09	0.09
		Deviation	0.05	0.05
	Rear	1g SAR	0.109	0.11
		10g SAR	0.066	0.07
		Deviation	0.04	0.04
	Left edge	1g SAR	0.127	0.13
		10g SAR	0.086	0.09
		Deviation	0.07	0.07
	Top edge	1g SAR	0.103	0.10
10g SAR		0.057	0.06	
Deviation		0.09	0.09	
Mode	Device orientation	SAR measurement	Measured SAR	Reported SAR
			23230	23230
			H	
10MHz QPSK50% RB	Tune-up		22.00	Scaling factor*
	Measured Power [dBm]		21.77	1.05
	Front	1g SAR	0.118	0.12
		10g SAR	0.067	0.07
		Deviation	-0.05	-0.05
	Rear	1g SAR	0.069	0.07
		10g SAR	0.044	0.05
		Deviation	0.03	0.03
	Left edge	1g SAR	0.107	0.11
		10g SAR	0.071	0.07
		Deviation	0.12	0.12
	Top edge	1g SAR	0.098	0.10
10g SAR		0.052	0.05	
Deviation		0.07	0.07	
Mode	Device orientation	SAR measurement	Measured SAR	Reported SAR
			23230	23230
10MHz QPSK100% RB	Tune-up		22.00	Scaling factor*
	Measured Power [dBm]		21.73	1.06
	Front	1g SAR		
		10g SAR		
Deviation				
10MHz QPSK1RB B2	Front	1g SAR	0.117	0.12
		10g SAR	0.074	0.07
		Deviation	-0.01	-0.01



14.3 Full SAR

Test Band	Channel	Frequency	Tune-Up	Measured Power	Test Position	Measured 10g SAR	Measured 1g SAR	Reported 10g SAR	Reported 1g SAR	Power Drift	Figure
GSM850	251	848.8 MHz	33.3	32.81	Right Cheek	0.268	0.359	0.30	0.40	0.07	Fig A.1
GSM850	190	836.6 MHz	33.3	32.86	Rear	0.318	0.414	0.35	0.46	0.06	Fig A.2
PCS1900	512	1850.2 MHz	31	30.70	Left Cheek	0.131	0.154	0.14	0.17	0.01	Fig A.3
PCS1900	512	1850.2 MHz	27.5	27.38	Bottom edge	0.202	0.347	0.21	0.36	-0.02	Fig A.4
WCDMA1900-BII	9400	1880 MHz	24	23.78	Right Cheek	0.186	0.31	0.20	0.33	-0.02	Fig A.5
WCDMA1900-BII	9400	1880 MHz	24	23.78	Bottom edge	0.495	0.89	0.52	0.94	0.07	Fig A.6
WCDMA1700-BIV	1412	1732.4 MHz	24	23.80	Right Cheek	0.212	0.33	0.22	0.35	-0.02	Fig A.7
WCDMA1700-BIV	1412	1732.4 MHz	24	23.80	Rear	0.467	0.698	0.49	0.73	0.04	Fig A.8
WCDMA850-BV	4182	835.4 MHz	24	23.77	Left Cheek	0.208	0.271	0.22	0.29	-0.05	Fig A.9
WCDMA850-BV	4233	846.6 MHz	24	23.76	Rear	0.344	0.446	0.36	0.47	0.12	Fig A.10
LTE1900-FDD2	19100	1900 MHz	23.5	23.18	Right Cheek	0.145	0.239	0.16	0.26	-0.15	Fig A.11
LTE1900-FDD2	19100	1900 MHz	23.5	23.18	Bottom edge	0.441	0.8	0.47	0.86	0.07	Fig A.12
LTE1700-FDD4	20050	1720 MHz	24.3	23.68	Right Cheek	0.217	0.335	0.25	0.39	0.04	Fig A.13
LTE1700-FDD4	20050	1720 MHz	24.3	23.68	Rear	0.487	0.733	0.56	0.85	-0.05	Fig A.14
LTE850-FDD5	20450	829 MHz	23.5	22.98	Right Cheek	0.251	0.33	0.28	0.37	-0.04	Fig A.15
LTE850-FDD5	20450	829 MHz	23.5	22.98	Rear	0.305	0.393	0.34	0.44	0.18	Fig A.16
LTE2500-FDD7	21350	2560 MHz	23.5	23.15	Left Cheek	0.161	0.3	0.17	0.32	0.1	Fig A.17
LTE2500-FDD7	21350	2560 MHz	23.5	23.15	Rear	0.315	0.708	0.34	0.76	0.06	Fig A.18
LTE700-FDD12	23095	707.5 MHz	23.5	23.17	Right Tilt	0.354	0.854	0.38	0.92	-0.07	Fig A.19
LTE700-FDD12	23060	704 MHz	23.5	23.21	Left edge	0.162	0.226	0.17	0.24	0.05	Fig A.20
LTE750-FDD13	23230	782 MHz	23	22.97	Right Tilt	0.296	0.69	0.30	0.69	-0.01	Fig A.21
LTE750-FDD13	23230	782 MHz	23	22.97	Front	0.09	0.157	0.09	0.16	0.05	Fig A.22



14.4 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 802.11b DSSS using the initial test position procedure.

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Note3: According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

Table 14-23 WLAN2450 #1

WLAN2450 #1								
Ambient Temperature: 22.5				Liquid Temperature: 22.1				
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			11 2462 MHz	6 2437 MHz	1 2412 MHz	11	6	1
802.11b 1Mbps	Tune up		15.5	18	15.5	Scaling factor*		
	Slot Average Power [dBm]		15.34	17.42	14.96	1.04	1.14	1.13
	Left Cheek	1g Fast SAR		0.793			0.91	
		10g SAR		0.399			0.46	
		Deviation		0.16			0.16	
	Left Tilt	1g Fast SAR		0.584			0.67	
		10g SAR		0.286			0.33	
		Deviation		0.15			0.15	
	Right Cheek	1g Fast SAR		0.288			0.33	
		10g SAR		0.153			0.17	
		Deviation		0.12			0.12	
	Right Tilt	1g Fast SAR		0.223			0.25	
		10g SAR		0.111			0.13	
		Deviation		0.05			0.05	
	802.11b 1Mbps B1	Left Cheek	1g Fast SAR		0.786			0.90
10g SAR				0.381			0.44	
Deviation				0.03			0.03	



Table 14-24 WLAN2450 #1 Body Fast SAR

WLAN2450 #1 Body Fast SAR									
Ambient Temperature:			22.5			Liquid Temperature:			22.1
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11	6	1	11	6	1	
			2462 MHz	2437 MHz	2412 MHz				
802.11b 1Mbps	Tune up		15.5	18	15.5	Scaling factor*			
	Slot Average Power [dBm]		15.34	17.42	14.96	1.04	1.14	1.13	
	Front	1g Fast SAR		0.101			0.12		
		10g SAR		0.0549			0.06		
		Deviation		0.11			0.11		
	Rear	1g Fast SAR		0.149			0.17		
		10g SAR		0.0766			0.09		
		Deviation		-0.18			-0.18		
	Top edge	1g Fast SAR		0.0502			0.06		
		10g SAR		0.0265			0.03		
		Deviation		-0.09			-0.09		
	Right edge	1g Fast SAR		0.132			0.15		
		10g SAR		0.0658			0.08		
		Deviation		0.15			0.15		
	802.11b 1Mbps B2	Rear	1g Fast SAR		0.131			0.15	
10g SAR				0.06			0.07		
Deviation				0.01			0.01		

Table 14-25 WLAN2450 #1 Head Full SAR

WLAN2450 #1 Head Full SAR									
Ambient Temperature:			0			Liquid Temperature:			0
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11	6	1	11	6	1	
			2462 MHz	2437 MHz	2412 MHz				
802.11b 1Mbps	Tune up		15.5	18	15.5	Scaling factor*			
	Slot Average Power [dBm]		15.34	17.42	14.96	1.04	1.14	1.13	
	Left Cheek	1g Full SAR	0.573	0.8		0.59	0.91		
		10g SAR	0.275	0.388		0.29	0.44		
		Deviation	0.05	0.16		0.05	0.16		
	Left Tilt	1g Full SAR		0.603			0.69		
		10g SAR		0.269			0.31		
		Deviation		0.15			0.15		

Table 14-26 WLAN2450 #1 Body Full SAR

WLAN2450 #1 Body Full SAR									
Ambient Temperature:			0			Liquid Temperature:			0
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11	6	1	11	6	1	
			2462 MHz	2437 MHz	2412 MHz				
802.11b 1Mbps	Tune up		15.5	18	15.5	Scaling factor*			
	Slot Average Power [dBm]		15.34	17.42	14.96	1.04	1.14	1.13	
	Rear	1g Full SAR		0.154			0.18		
		10g SAR		0.0783			0.09		
		Deviation		-0.18			-0.18		


SAR is not required for OFDM because the 802.11b adjusted SAR \leq 1.2 W/kg.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.						
2437	6	Left Cheek	99.53%	100%	0.91	0.92	Figure.A.23

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below

Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.						
2437	6	Rear	99.53%	100%	0.18	0.18	Figure.A.24

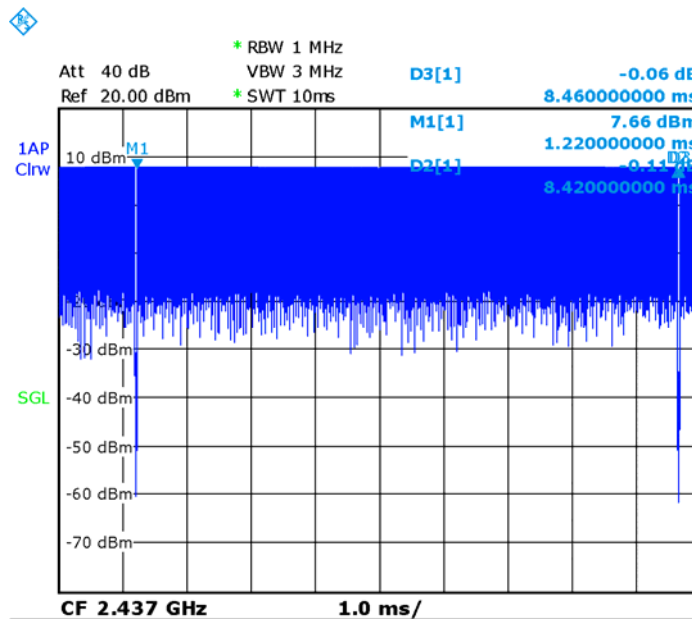

Picture 14.1 Duty factor plot

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Mode	CH	Freq	Test Position	Original SAR (W/kg)	First Repeated SAR(W/kg)	The Ratio
WCDMA1900-BII	9400	1880 MHz	Bottom	0.89	0.87	1.02
LTE700-FDD12	23095	707.5 MHz	Right Tilt	0.854	0.844	1.01

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$							9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$							19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

	(target)									
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u'_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71

16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	



17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 13, 2017	One year
02	Power meter	NRVD	102196	March 02,2017	One year
03	Power sensor	NRV-Z5	100596		
04	Signal Generator	E4438C	MY49071430	January 13,2017	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 16, 2017	One year
07	BTS	CMW500	149646	October 31, 2017	One year
08	E-field Probe	SPEAG EX3DV4	3846	January 13,2017	One year
09	DAE	SPEAG DAE4	1331	January19, 2017	One year
10	Dipole Validation Kit	SPEAG D750V3	1017	July 19, 2017	One year
11	Dipole Validation Kit	SPEAG D835V2	4d069	July 19, 2017	One year
12	Dipole Validation Kit	SPEAG D1750V2	1003	July 21, 2017	One year
13	Dipole Validation Kit	SPEAG D1900V2	5d101	July 26, 2017	One year
14	Dipole Validation Kit	SPEAG D2450V2	853	July 21, 2017	One year
15	Dipole Validation Kit	SPEAG D2600V2	1012	July 21, 2017	One year

END OF REPORT BODY

ANNEX A Graph Results

GSM850_CH251 Right Cheek

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.58$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 848.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 – SN3846 ConvF(9.33,9.33,9.33)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.388 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.897 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.399 W/kg

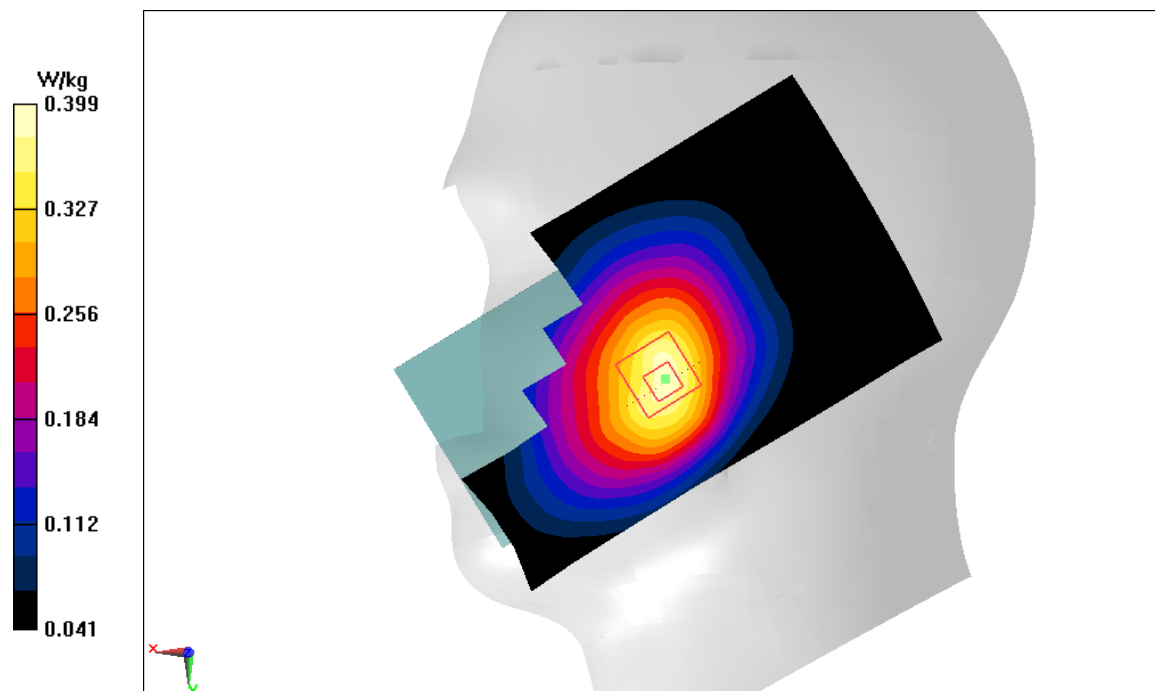


Fig A.1

GSM850_CH190 Rear

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 – SN3846 ConvF(9.52,9.52,9.52)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.451 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.19 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

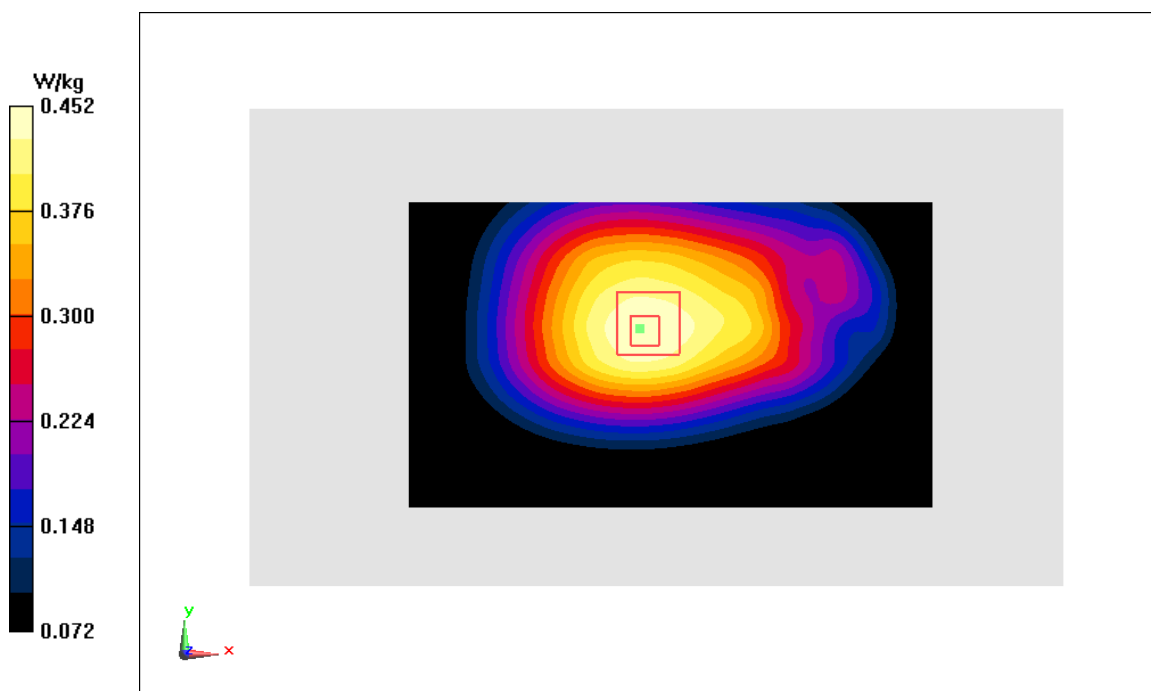


Fig A.2

PCS1900_CH512 Left Cheek

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.342$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1850.2 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 – SN3846 ConvF(7.89,7.89,7.89)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.168 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.651 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

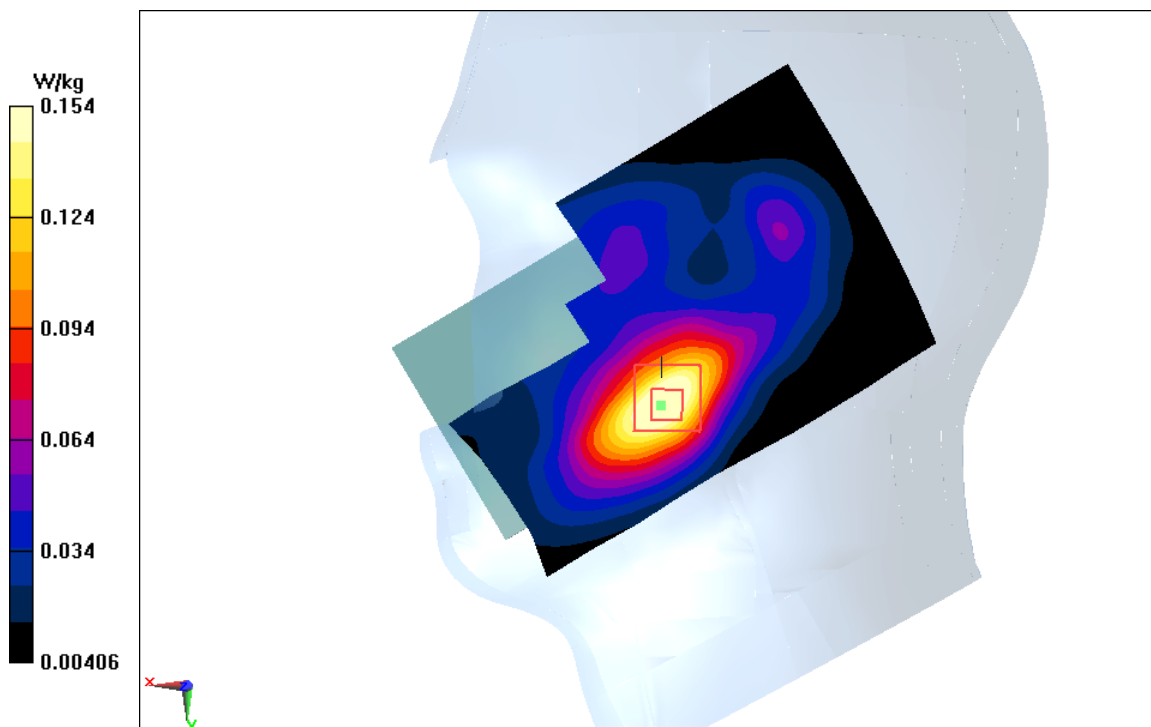


Fig A.3

PCS1900_CH512 Bottom edge

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 53.25$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1850.2 MHz Duty Cycle: 1:2

Probe: EX3DV4 – SN3846 ConvF(7.57,7.57,7.57)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.396 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.61 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

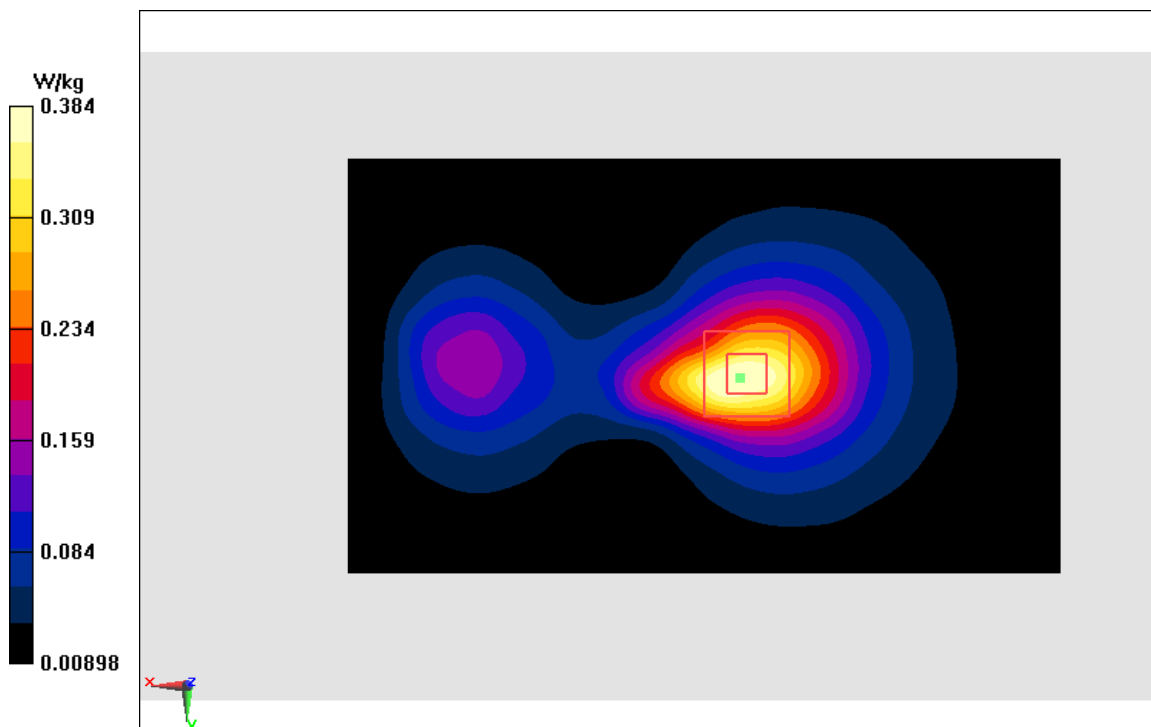


Fig A.4

WCDMA1900-BII_CH9400 Right Cheek

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ mho/m; $\epsilon_r = 39.57$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1900-BII 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.89,7.89,7.89)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.39 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.407 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.31 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.374 W/kg

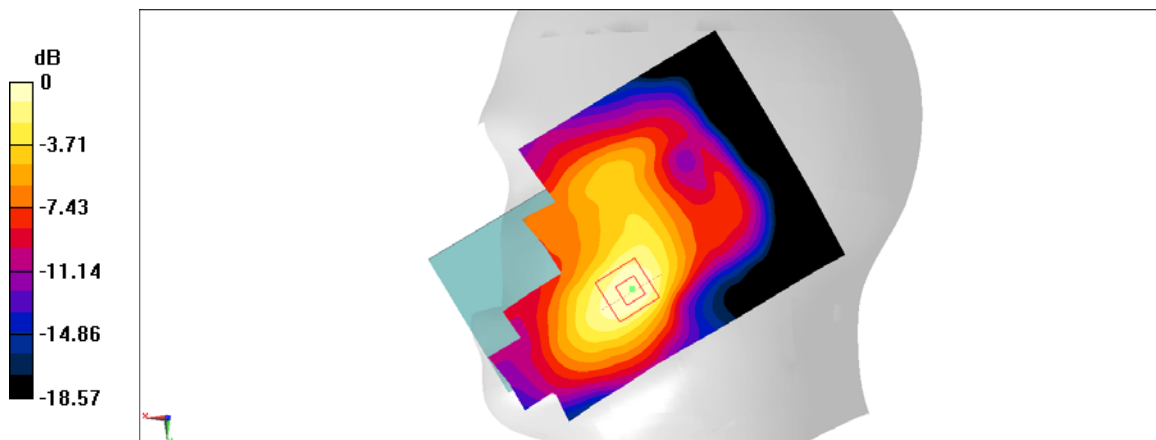


Fig A.5

WCDMA1900-BII_CH9400 Bottom edge

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ mho/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1900-BII 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.57,7.57,7.57)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.44 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.89 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

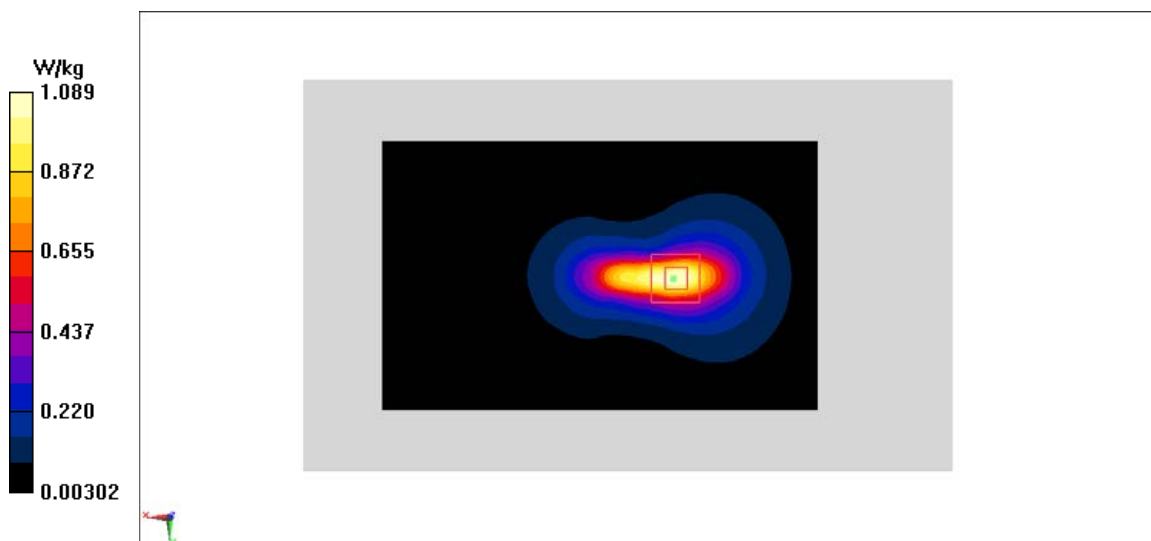


Fig A.6

WCDMA1700-BIV_CH1412 Right Cheek

Date: 12/6/2017

Electronics: DAE4 Sn1331

Medium: Head 1750 MHz

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.363$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1732.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(8.16,8.16,8.16)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.392 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.275 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.33 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

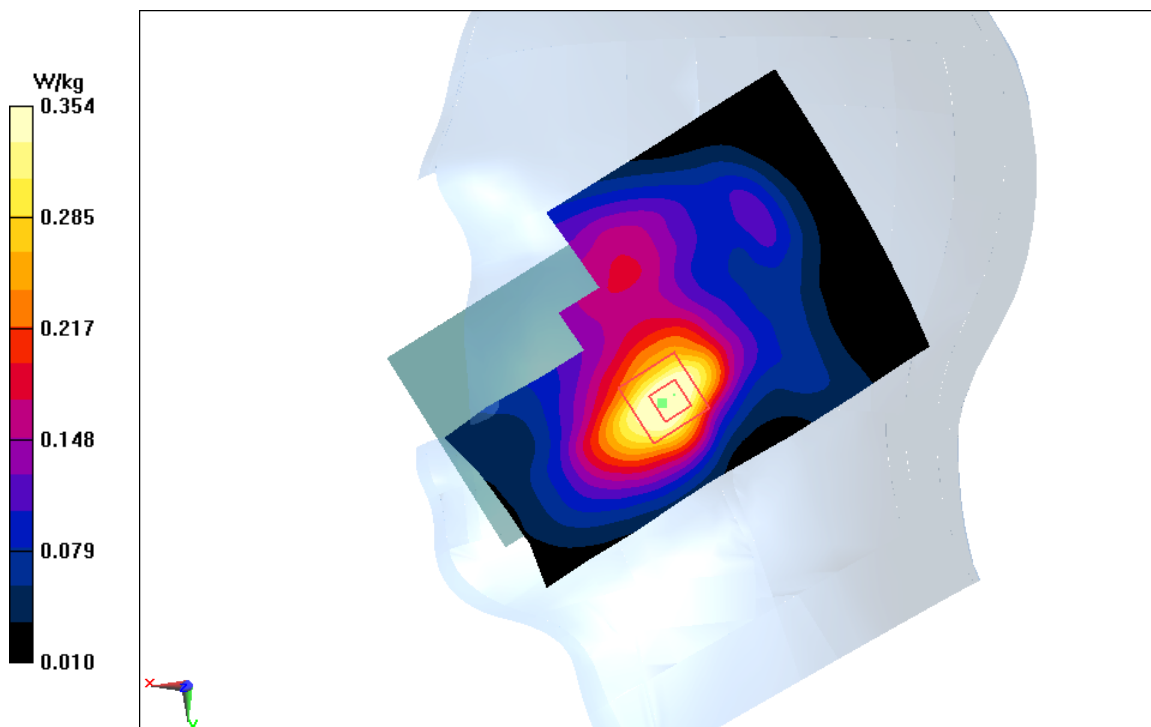


Fig A.7

WCDMA1700-BIV_CH1412 Rear

Date: 12/6/2017

Electronics: DAE4 Sn1331

Medium: Head 1750 MHz

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.497$ mho/m; $\epsilon_r = 53.24$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1732.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.9,7.9,7.9)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.836 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.49 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 0.74 W/kg

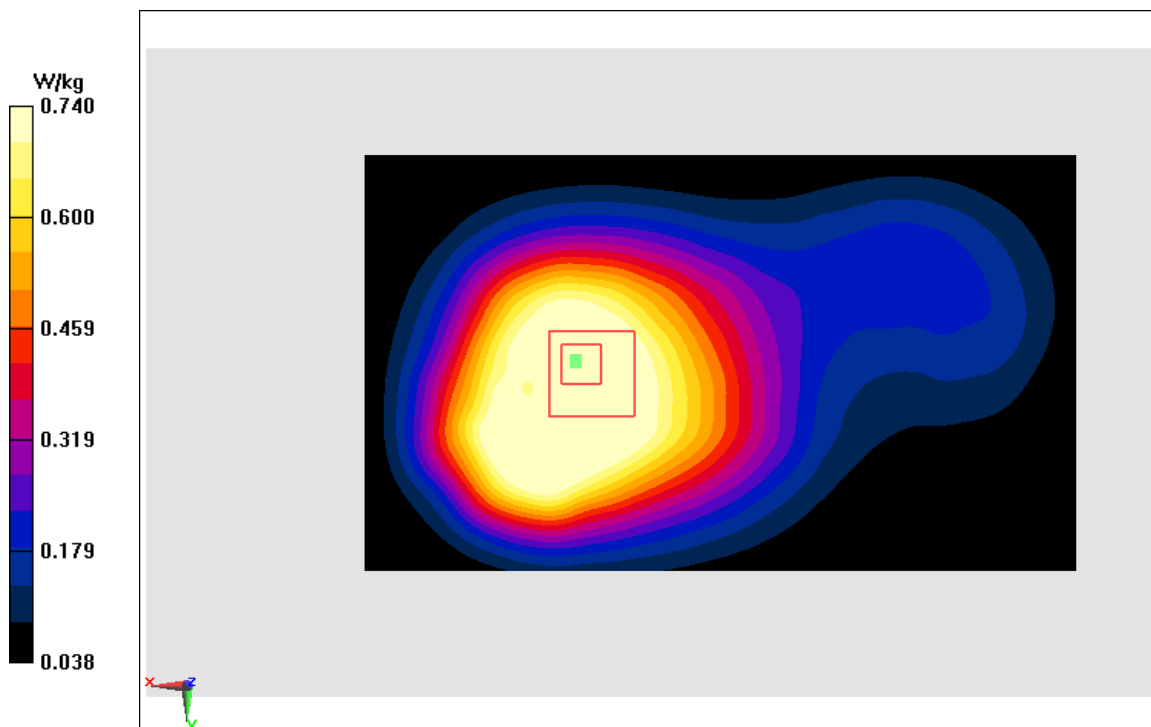


Fig A.8

WCDMA850-BV_CH4182 Left Cheek

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 835.4$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 835.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(9.33,9.33,9.33)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.297 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.694 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

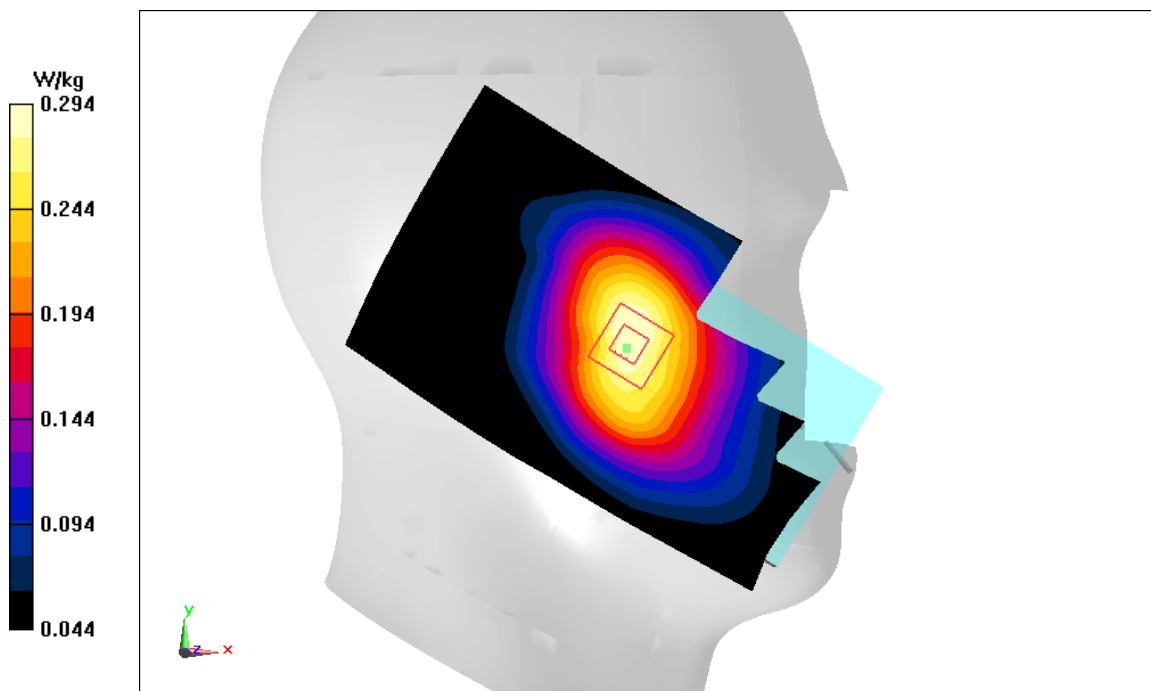


Fig A.9

WCDMA850-BV_CH4233 Rear

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 846.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(9.52,9.52,9.52)

Area Scan (121x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.30 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 0.487 W/kg

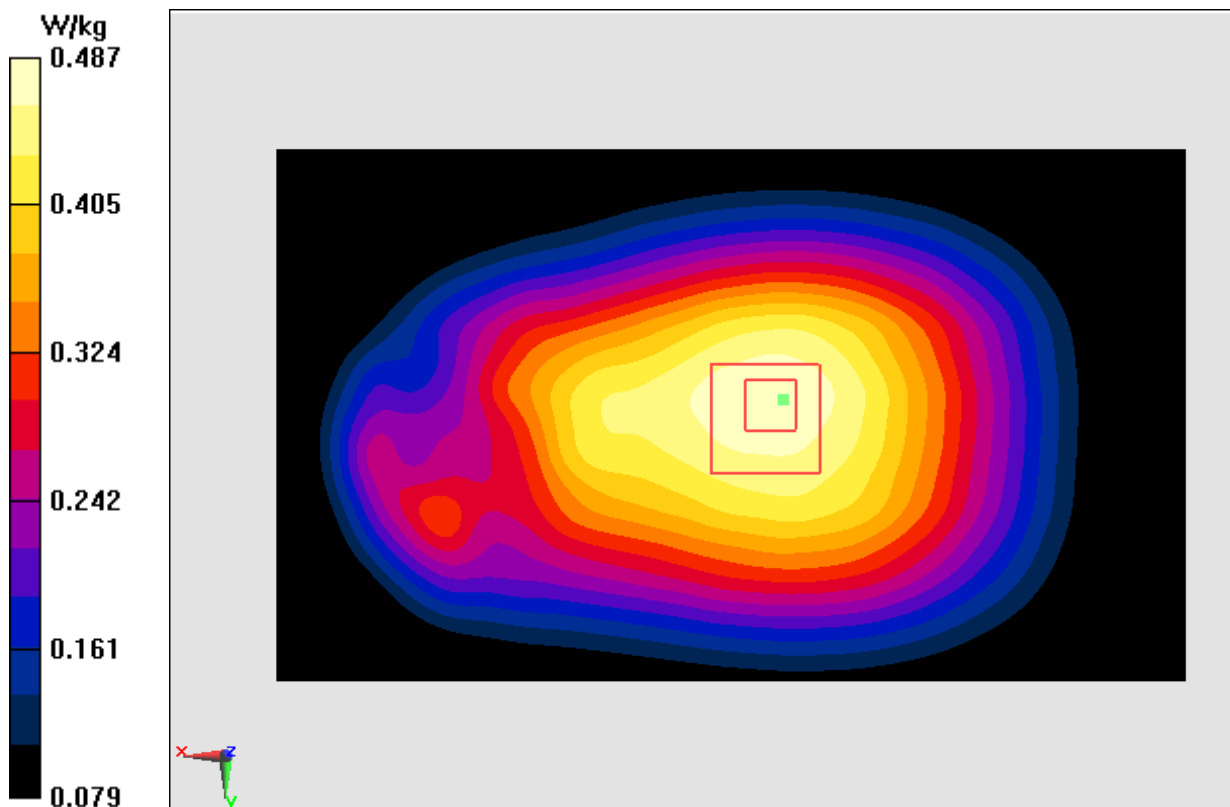


Fig A.10

LTE1900-FDD2_CH19100 Right Cheek

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.89,7.89,7.89)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.385 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

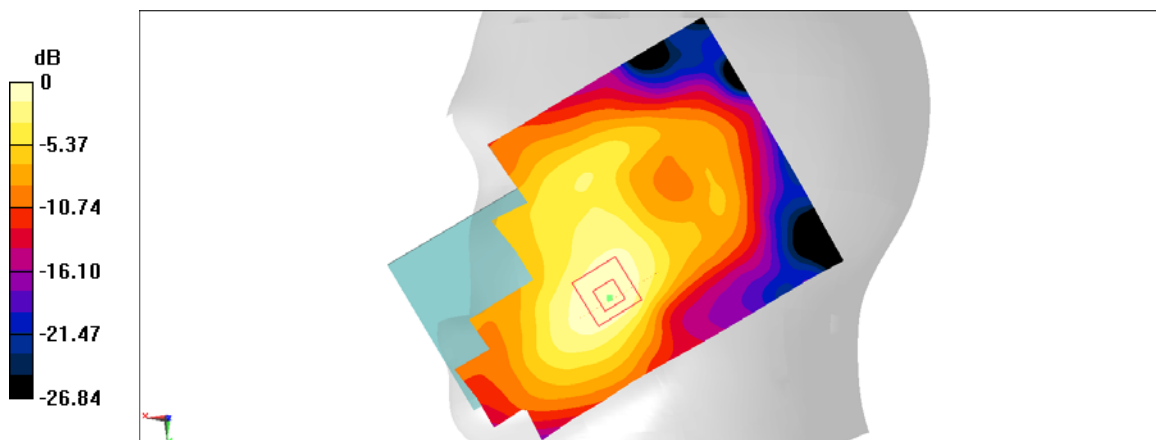


Fig A.11

LTE1900-FDD2_CH19100 Bottom edge

Date: 12/7/2017

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 53.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.57,7.57,7.57)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.953 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.99 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.8 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 0.978 W/kg

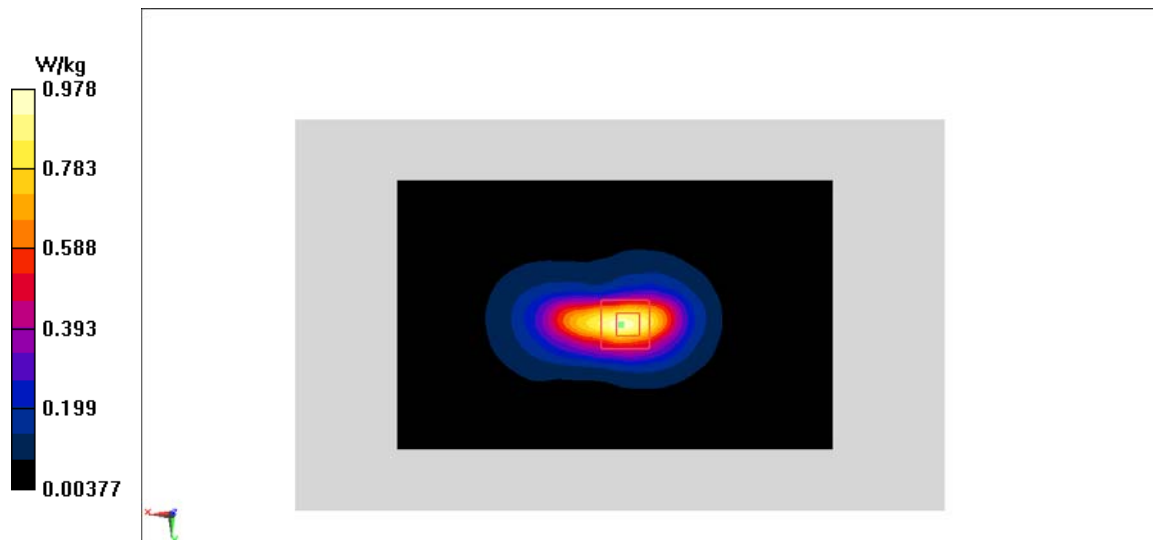


Fig A.12

LTE1700-FDD4_CH20050 Right Cheek

Date: 12/6/2017

Electronics: DAE4 Sn1331

Medium: Head 1750 MHz

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.352$ mho/m; $\epsilon_r = 40.72$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD4 1720 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(8.16,8.16,8.16)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.399 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.64 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.36 W/kg

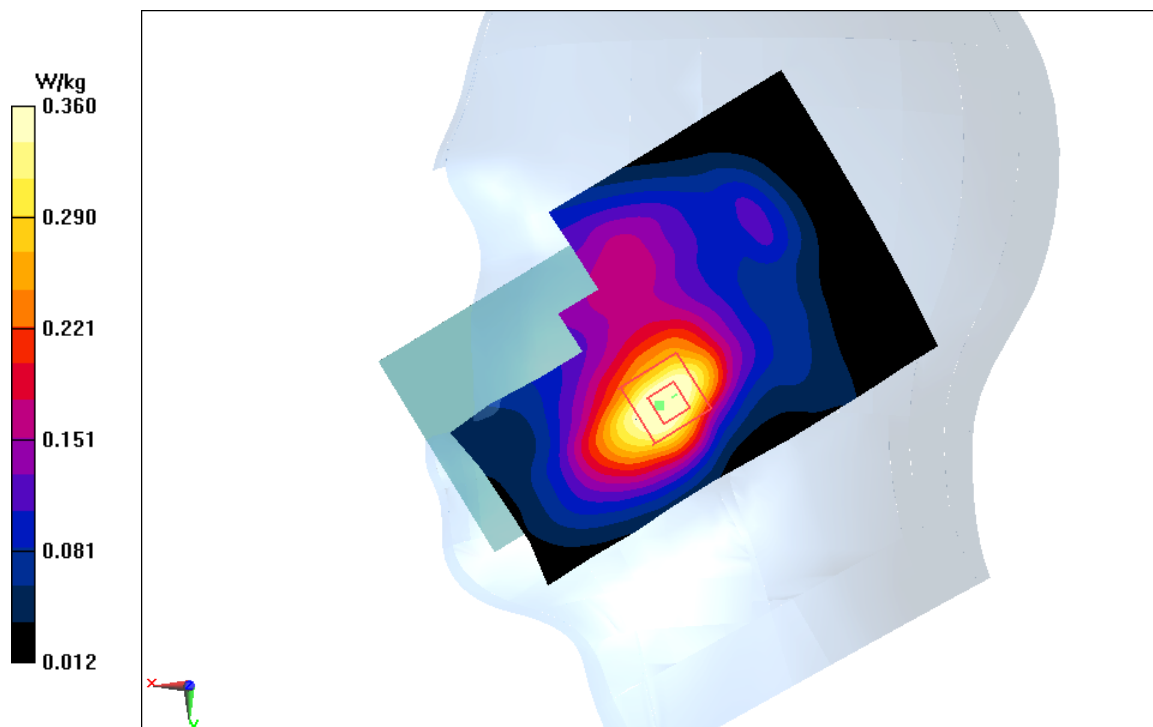


Fig A.13

LTE1700-FDD4_CH20050 Rear

Date: 12/6/2017

Electronics: DAE4 Sn1331

Medium: Head 1750 MHz

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.486$ mho/m; $\epsilon_r = 53.26$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD4 1720 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.9,7.9,7.9)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.832 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

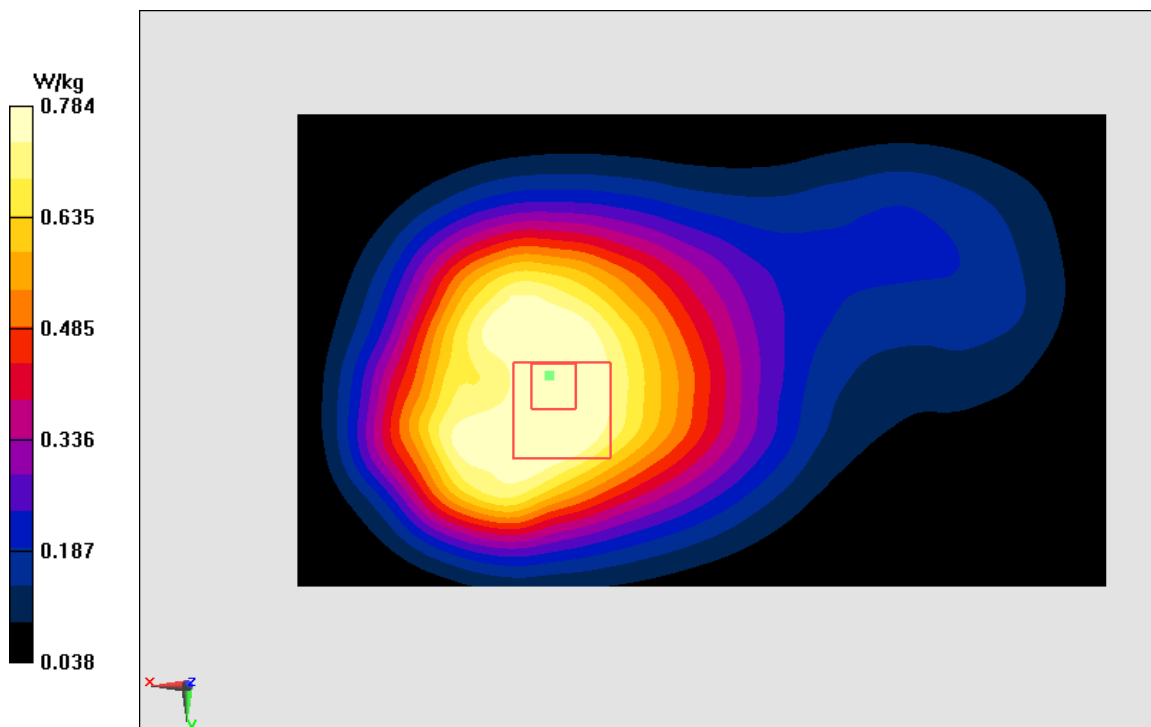


Fig A.14

LTE850-FDD5_CH20450 Right Cheek

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.61$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(9.33,9.33,9.33)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.377 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.583 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.33 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.364 W/kg

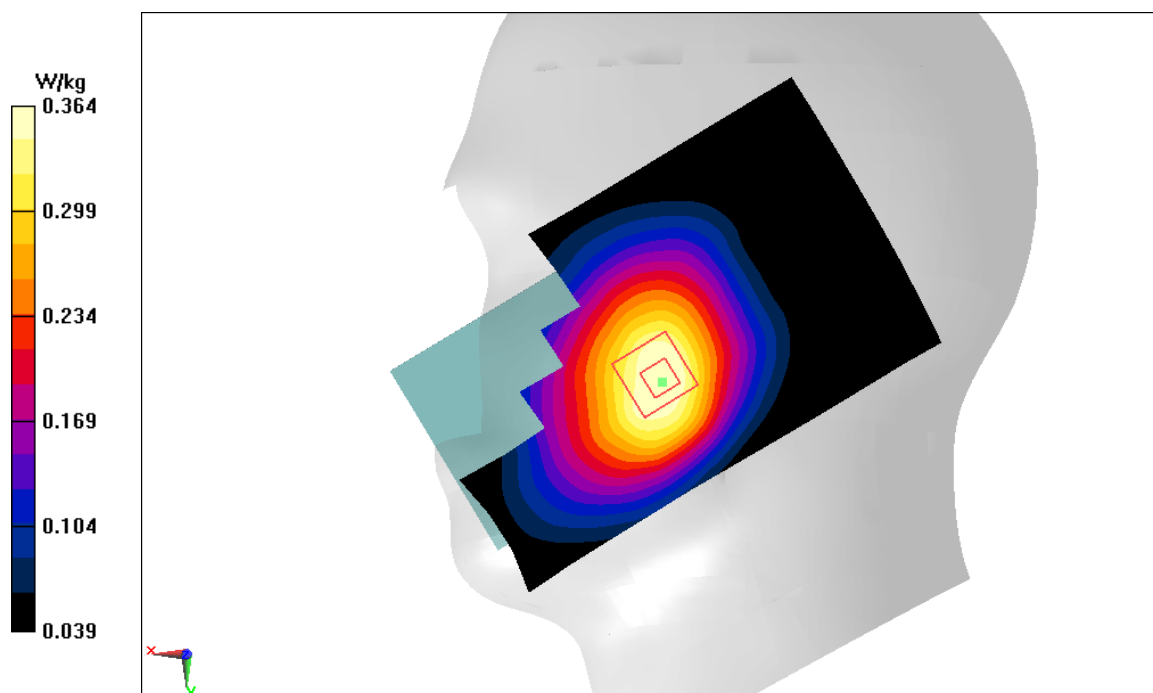


Fig A.15

LTE850-FDD5_CH20450 Rear

Date: 12/5/2017

Electronics: DAE4 Sn1331

Medium: Head 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(9.52,9.52,9.52)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.429 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.65 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

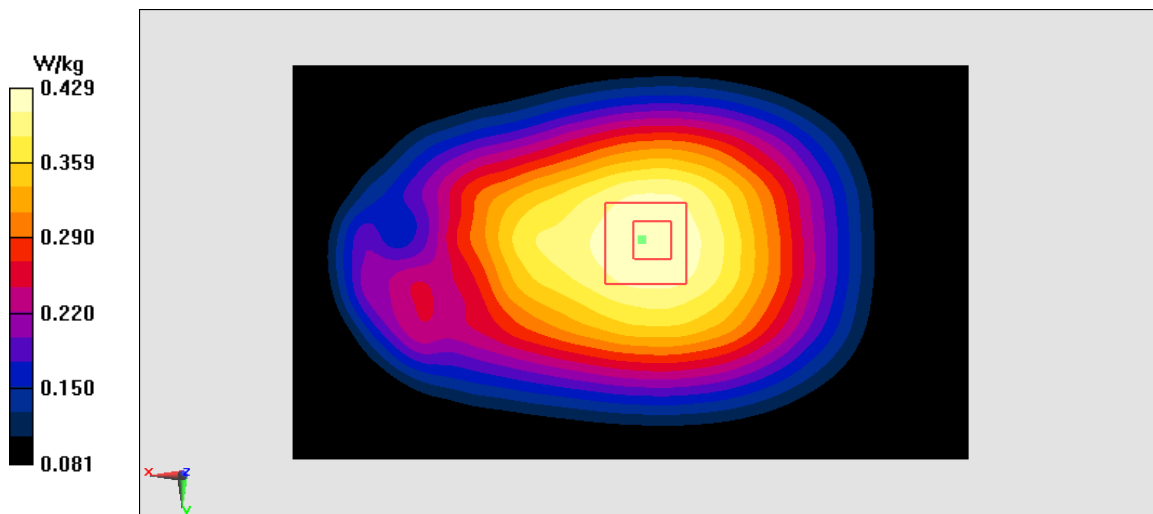


Fig A.16

LTE2500-FDD7_CH21350 Left Cheek

Date: 12/9/2017

Electronics: DAE4 Sn1331

Medium: Head 2600 MHz

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.928$ mho/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.12,7.12,7.12)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.387 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.764 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.3 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.374 W/kg

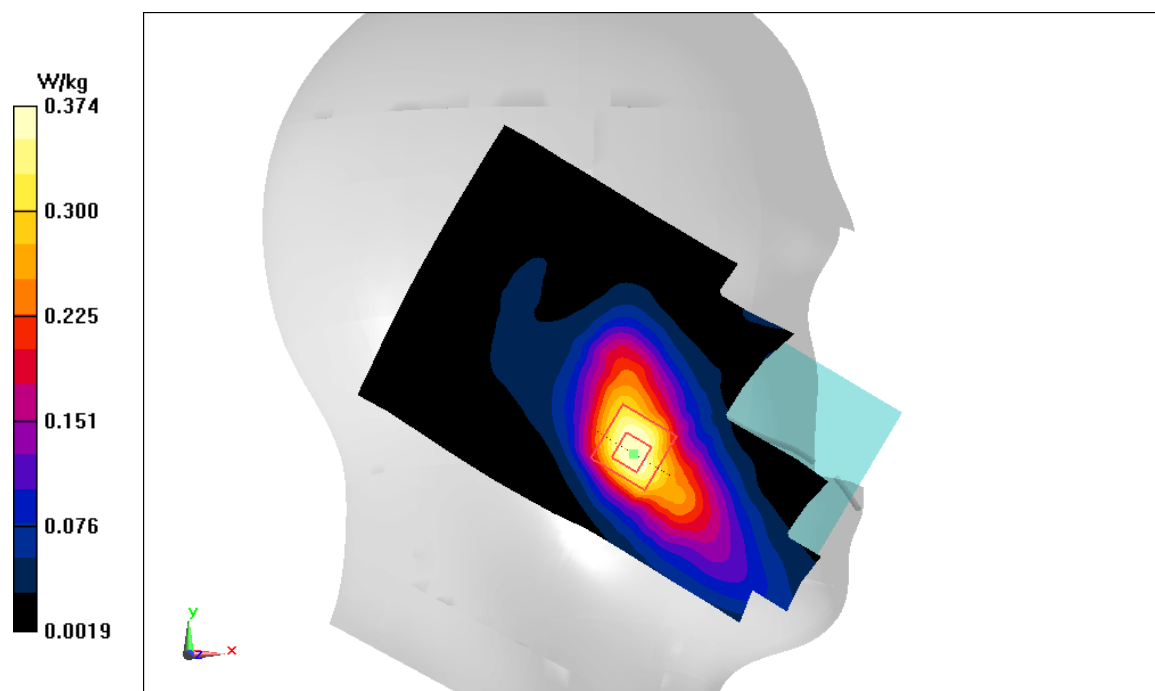


Fig A.17

LTE2500-FDD7_CH21350 Rear

Date: 12/9/2017

Electronics: DAE4 Sn1331

Medium: Head 2600 MHz

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.1$ mho/m; $\epsilon_r = 51.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3846 ConvF(7.25,7.25,7.25)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.815 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.877 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

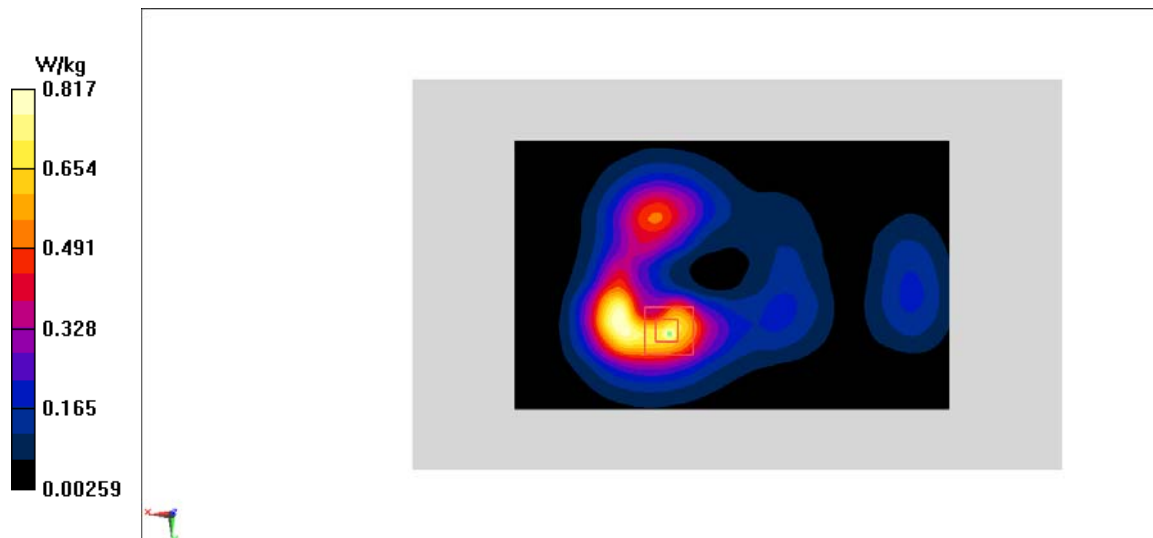


Fig A.18