

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

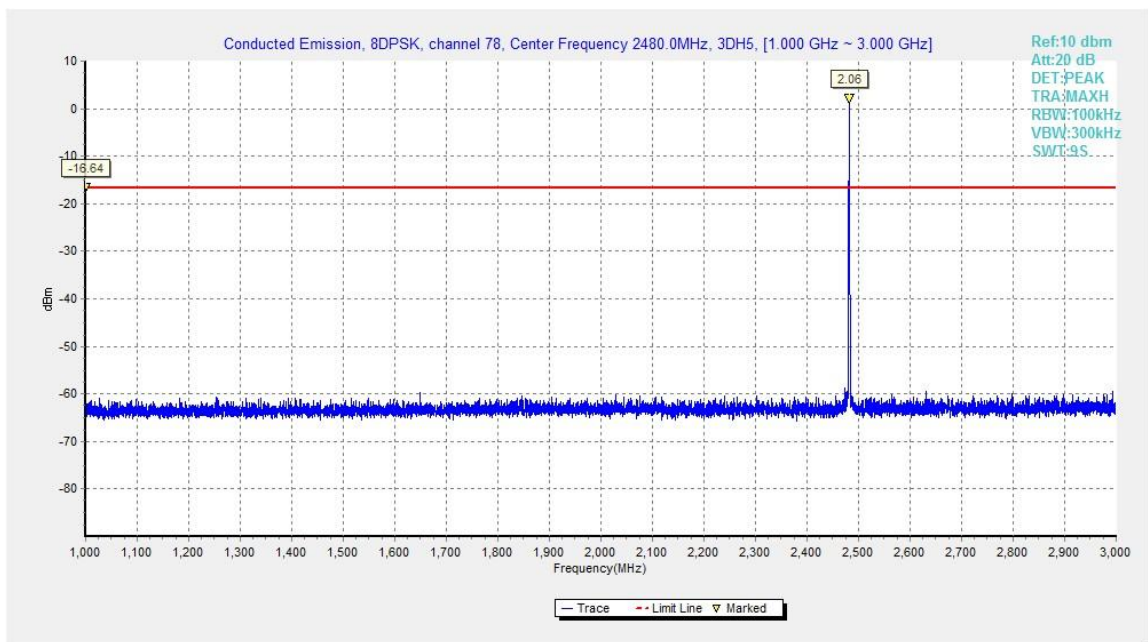


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

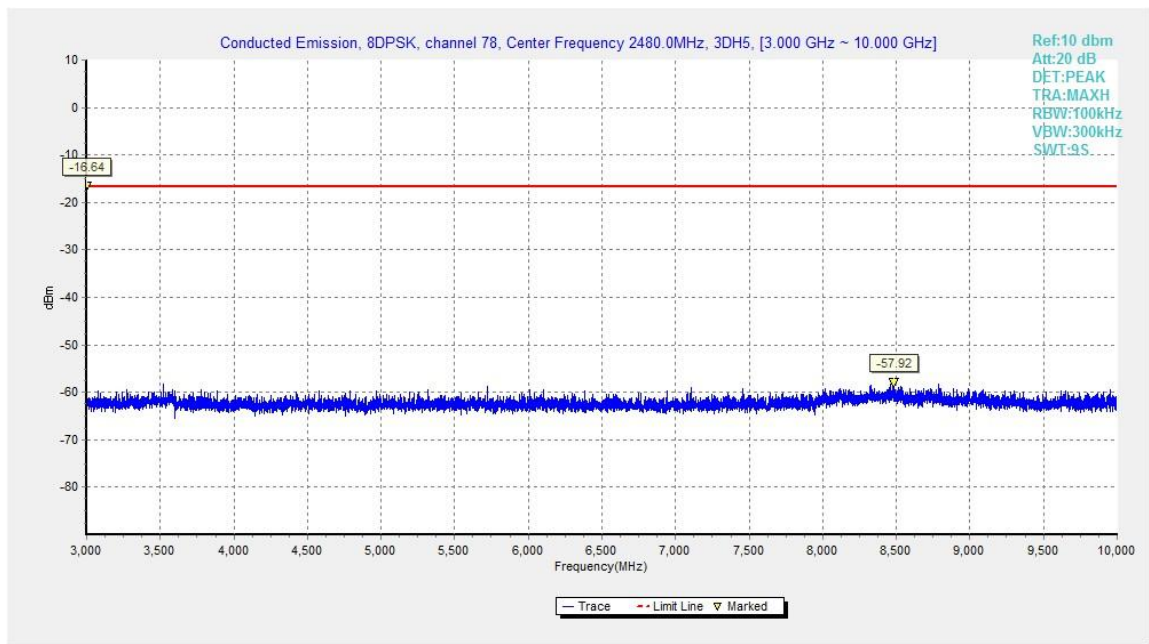


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

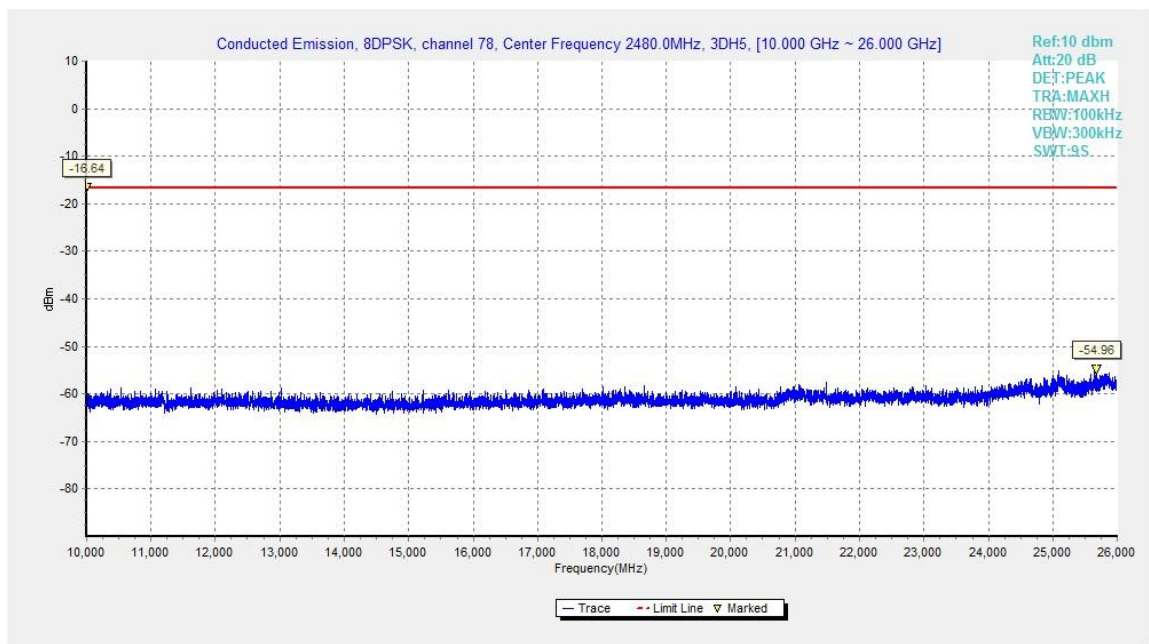


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

**A.5. Transmitter Spurious Emission - Radiated**  
**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result= $P_{Mea} + ARPL$

**For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	9 kHz ~ 30 MHz	--	P
	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
Ch 78 2480 MHz	3 GHz ~ 18 GHz	--	P
	1 GHz ~ 3 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.58	P
Power	2.45GHz~2.5GHz---H	Fig.59	P
For all channels	18 GHz ~ 26 GHz	--	P

**Forπ/4 DQPSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.60	P
Power	2.45GHz~2.5GHz---H	Fig.61	P
For all channels	18 GHz ~ 26 GHz	--	P

**For 8DPSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 39 2440 MHz	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.62	P
Power	2.45GHz~2.5GHz---H	Fig.63	P
For all channels	18 GHz ~ 26 GHz	--	P

**GFSK Ch 0 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.300	47.16	2.9	32.0	12.30	54.0	6.8	H	155	16
2389.500	47.21	2.9	32.0	12.37	54.0	6.8	H	155	48
4804.000	36.19	-32.9	34.5	34.54	54.0	17.8	H	155	80
7206.000	38.48	-31.6	36.1	34.01	54.0	15.5	H	155	8
9608.000	39.40	-30.0	37.0	32.44	54.0	14.6	H	155	102
12010.000	44.07	-29.8	39.3	34.60	54.0	9.9	H	155	118

**GFSK Ch 39 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2383.800	47.58	2.9	32.0	12.69	54.0	6.4	H	155	28
2489.600	47.64	2.9	32.6	12.12	54.0	6.4	H	155	46
4882.000	36.39	-32.7	34.5	34.60	54.0	17.6	H	155	8
7323.000	38.74	-31.9	36.1	34.59	54.0	15.3	H	155	6
9764.000	39.49	-30.6	37.2	32.86	54.0	14.5	H	155	24
12205.000	44.18	-29.4	39.2	34.39	54.0	9.8	H	155	185

**GFSK Ch 78 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	48.68	2.9	32.8	12.99	54.0	5.3	H	155	28
2485.400	47.68	2.9	32.7	12.04	54.0	6.3	H	155	248
4960.000	36.28	-33.4	34.5	35.15	54.0	17.7	H	155	38
7440.000	38.56	-31.8	36.0	34.30	54.0	15.4	H	155	98
9920.000	39.55	-29.9	37.4	32.08	54.0	14.4	H	155	183
12400.000	44.38	-29.5	39.1	34.75	54.0	9.6	H	155	356

**GFSK Ch 0 – Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2383.206	60.08	2.9	32.0	25.19	74.0	13.9	H	155	22
2386.524	60.17	2.9	32.0	25.29	74.0	13.8	H	155	44
4804.000	41.91	-32.9	34.5	40.26	74.0	32.1	V	155	88
7206.000	43.49	-31.6	36.1	39.02	74.0	30.5	V	155	0
9608.000	44.47	-30.0	37.0	37.52	74.0	29.5	H	155	110
12010.000	48.86	-29.8	39.3	39.39	74.0	25.1	H	155	132

**GFSK Ch 39 - Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2373.240	49.03	-26.8	32.1	43.73	74.0	25.0	H	155	22
2508.630	49.83	-26.5	32.4	43.85	74.0	24.2	H	155	44
4882.000	41.92	-32.7	34.5	40.13	74.0	32.1	V	155	0
7323.000	43.57	-31.9	36.1	39.41	74.0	30.4	H	155	0
9764.000	44.59	-30.6	37.2	37.96	74.0	29.4	V	155	22
12205.000	48.92	-29.4	39.2	39.13	74.0	25.1	H	155	176

**GFSK Ch 78 - Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2486.000	60.79	2.9	32.7	25.16	74.0	13.2	H	155	22
2488.070	61.53	2.9	32.6	25.96	74.0	12.5	H	155	242
4960.000	41.96	-33.4	34.5	40.83	74.0	32.0	V	155	44
7440.000	43.58	-31.8	36.0	39.32	74.0	30.4	H	155	88
9920.000	44.57	-29.9	37.4	37.10	74.0	29.4	V	155	176
12400.000	48.92	-29.5	39.1	39.29	74.0	25.1	H	155	0

**$\pi/4$  DQPSK Ch 0 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2384.800	47.17	2.9	32.0	12.29	54.0	6.8	H	155	354
2389.800	47.20	2.9	32.0	12.36	54.0	6.8	H	155	28
4804.000	36.29	-32.9	34.5	34.64	54.0	17.7	H	155	348
7206.000	38.67	-31.6	36.1	34.20	54.0	15.3	H	155	345
9608.000	39.52	-30.0	37.0	32.57	54.0	14.5	H	155	184
12010.000	44.24	-29.8	39.3	34.77	54.0	9.8	H	155	182

**$\pi/4$  DQPSK Ch 39 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2387.000	47.02	2.9	32.0	12.15	54.0	7.0	H	155	142
2486.300	47.59	2.9	32.7	11.97	54.0	6.4	H	155	168
4882.000	36.38	-32.7	34.5	34.59	54.0	17.6	H	155	90
7323.000	38.56	-31.9	36.1	34.41	54.0	15.4	H	155	102
9764.000	40.01	-30.6	37.2	33.38	54.0	14.0	H	155	118
12205.000	44.32	-29.4	39.2	34.53	54.0	9.7	H	155	94

**$\pi/4$  DQPSK Ch 78 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	48.38	2.9	32.8	12.68	54.0	5.6	H	155	98
2483.900	47.80	2.9	32.7	12.11	54.0	6.2	H	155	135
4960.000	36.28	-33.4	34.5	35.15	54.0	17.7	H	155	4
7440.000	38.66	-31.8	36.0	34.40	54.0	15.3	H	155	74
9920.000	39.43	-29.9	37.4	31.96	54.0	14.6	H	155	48
12400.000	44.24	-29.5	39.1	34.61	54.0	9.8	H	155	246



**$\pi/4$  DQPSK Ch 0– Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2387.686	60.17	2.9	32.0	25.31	74.0	13.8	H	155	0
2389.632	60.21	2.9	32.0	25.36	74.0	13.8	H	155	22
4804.000	41.92	-32.9	34.5	40.27	74.0	32.1	V	155	352
7206.000	43.62	-31.6	36.1	39.15	74.0	30.4	V	155	352
9608.000	44.68	-30.0	37.0	37.72	74.0	29.3	V	155	176
12010.000	48.95	-29.8	39.3	39.48	74.0	25.1	V	155	176

**$\pi/4$  DQPSK Ch 39 - Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2373.450	48.64	-26.8	32.1	43.33	74.0	25.4	H	155	132
2514.860	49.23	-26.6	32.5	43.29	74.0	24.8	V	155	154
4882.000	42.00	-32.7	34.5	40.21	74.0	32.0	H	155	88
7323.000	43.62	-31.9	36.1	39.47	74.0	30.4	V	155	110
9764.000	44.57	-30.6	37.2	37.94	74.0	29.4	V	155	110
12205.000	48.94	-29.4	39.2	39.15	74.0	25.1	V	155	88

**$\pi/4$  DQPSK Ch 78 - Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2486.820	61.04	2.9	32.7	25.43	74.0	13.0	H	155	88
2494.720	60.96	2.9	32.4	25.57	74.0	13.0	H	155	132
4960.000	42.03	-33.4	34.5	40.90	74.0	32.0	H	155	0
7440.000	43.68	-31.8	36.0	39.42	74.0	30.3	V	155	66
9920.000	44.66	-29.9	37.4	37.19	74.0	29.3	V	155	44
12400.000	48.97	-29.5	39.1	39.34	74.0	25.0	H	155	242



**8DPSK Ch 0 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.600	47.16	2.9	32.0	12.31	54.0	6.8	H	155	28
2389.900	47.51	2.9	32.0	12.67	54.0	6.5	H	155	49
4804.000	36.32	-32.9	34.5	34.67	54.0	17.7	H	155	246
7206.000	38.58	-31.6	36.1	34.11	54.0	15.4	H	155	182
9608.000	40.13	-30.0	37.0	33.17	54.0	13.9	H	155	94
12010.000	44.28	-29.8	39.3	34.81	54.0	9.7	H	155	42

**8DPSK Ch 39 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2384.400	47.58	2.9	32.0	12.69	54.0	6.4	H	155	26
2487.700	47.61	2.9	32.6	12.03	54.0	6.4	H	155	48
4882.000	36.29	-32.7	34.5	34.50	54.0	17.7	H	155	68
7323.000	38.57	-31.9	36.1	34.42	54.0	15.4	H	155	44
9764.000	39.46	-30.6	37.2	32.83	54.0	14.5	H	155	8
12205.000	44.18	-29.4	39.2	34.39	54.0	9.8	H	155	102

**8DPSK Ch 78 - Average**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	48.32	2.9	32.8	12.62	54.0	5.7	H	155	132
2483.800	47.97	2.9	32.8	12.28	54.0	6.0	H	155	28
4960.000	36.31	-33.4	34.5	35.18	54.0	17.7	H	155	38
7440.000	38.59	-31.8	36.0	34.33	54.0	15.4	H	155	65
9920.000	39.49	-29.9	37.4	32.02	54.0	14.5	H	155	4
12400.000	44.32	-29.5	39.1	34.69	54.0	9.7	H	155	24

**8DPSK Ch 0– Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2382.646	60.67	2.9	32.0	25.77	74.0	13.3	H	155	22
2387.476	60.71	2.9	32.0	25.84	74.0	13.3	H	155	44
4804.000	42.07	-32.9	34.5	40.42	74.0	31.9	V	155	242
7206.000	43.68	-31.6	36.1	39.21	74.0	30.3	H	155	176
9608.000	44.66	-30.0	37.0	37.71	74.0	29.3	V	155	88
12010.000	48.94	-29.8	39.3	39.47	74.0	25.1	V	155	22

**8DPSK Ch 39 - Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2359.640	48.73	-27.6	31.8	44.50	74.0	25.3	H	155	22
2506.670	49.98	-26.4	32.4	43.99	74.0	24.0	H	155	44
4882.000	42.12	-32.7	34.5	40.33	74.0	31.9	V	155	66
7323.000	43.59	-31.9	36.1	39.43	74.0	30.4	V	155	22
9764.000	44.67	-30.6	37.2	38.04	74.0	29.3	V	155	0
12205.000	48.98	-29.4	39.2	39.19	74.0	25.0	V	155	88

**8DPSK Ch 78 - Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2487.880	61.22	2.9	32.6	25.64	74.0	12.8	H	155	110
2494.190	60.82	2.9	32.5	25.41	74.0	13.2	H	155	22
4960.000	42.13	-33.4	34.5	41.00	74.0	31.9	V	155	44
7440.000	43.57	-31.8	36.0	39.31	74.0	30.4	V	155	66
9920.000	44.59	-29.9	37.4	37.12	74.0	29.4	V	155	0
12400.000	48.96	-29.5	39.1	39.33	74.0	25.0	H	155	22

**Conclusion: PASS**

**Test graphs as below for Set.10:**

RE - Power-2.38GHz-2.45GHz

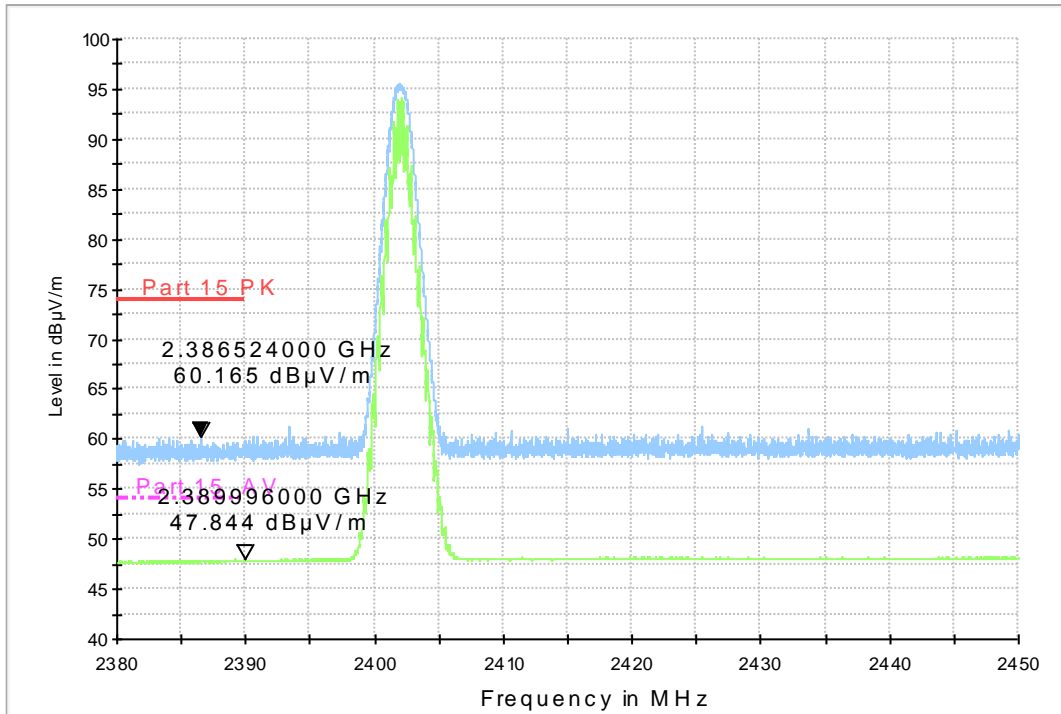


Fig.58. Radiated emission (Power): GFSK, low channel

RE - Power-2.45GHz-2.5GHz

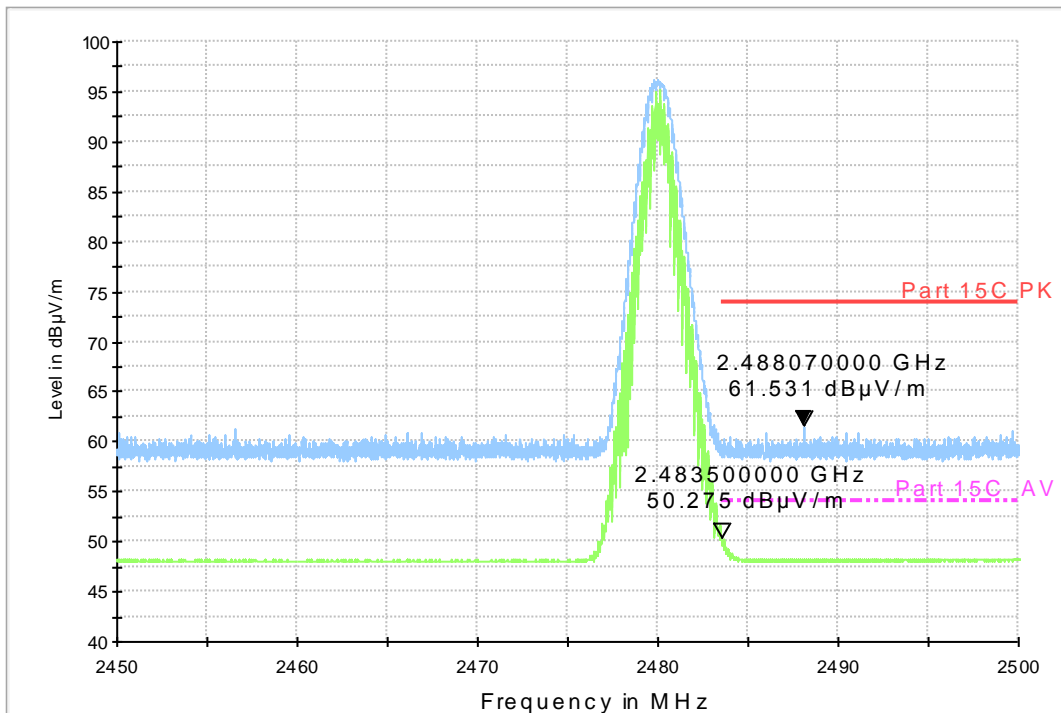


Fig.59. Radiated emission (Power) GFSK, high channel

RE - Power-2.38GHz-2.45GHz

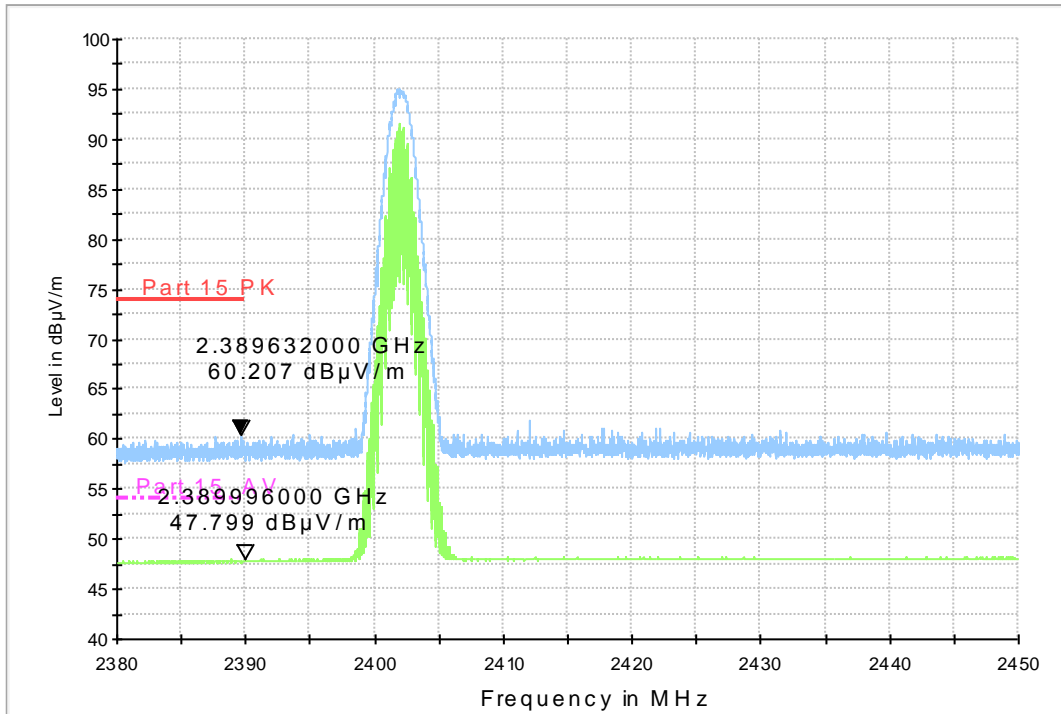


Fig.60. Radiated emission (Power):  $\pi/4$  DQPSK, low channel

RE - Power-2.45GHz-2.5GHz

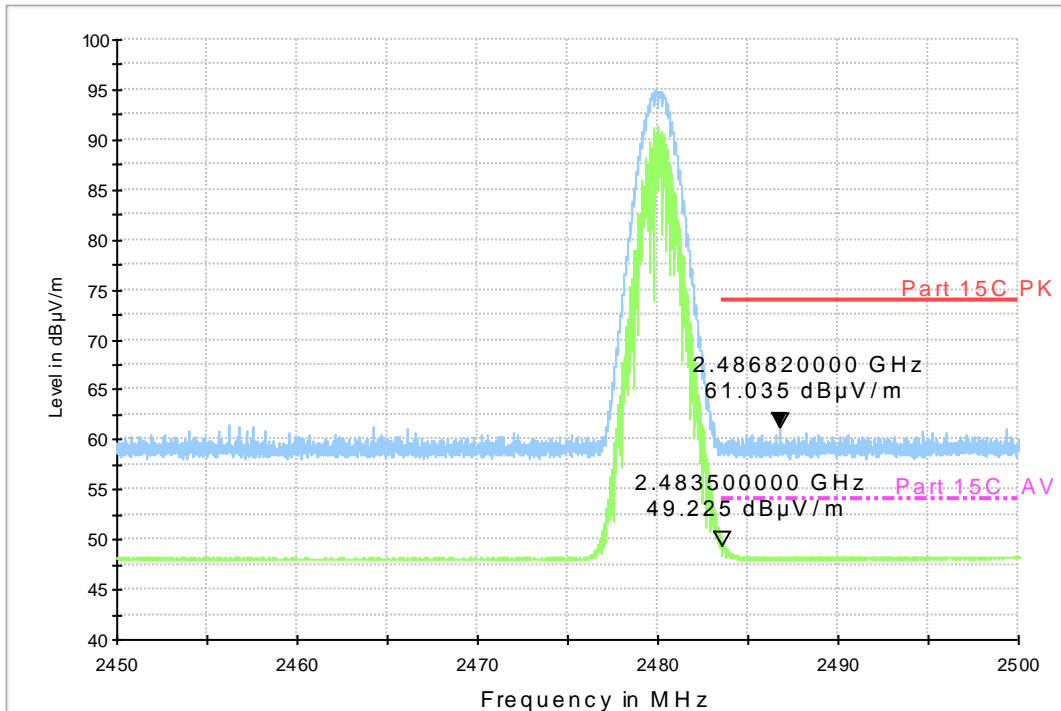


Fig.61. Radiated emission (Power):  $\pi/4$  DQPSK, high channel

RE - Power-2.38GHz-2.45GHz

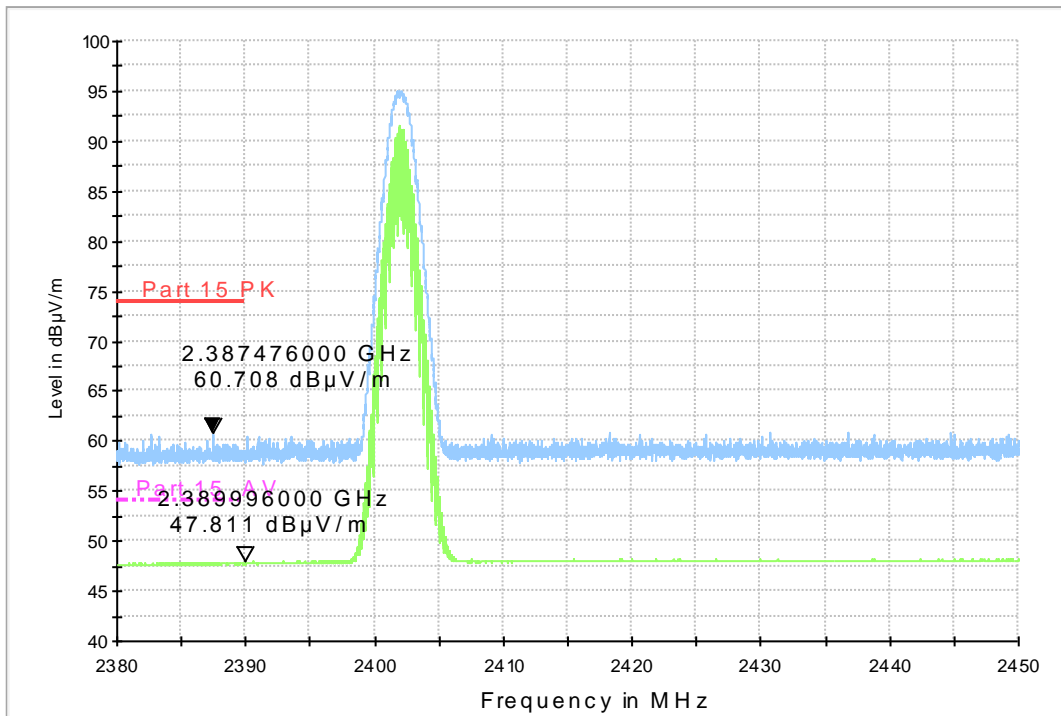


Fig.62. Radiated emission (Power): 8DPSK, low channel

RE - Power-2.45GHz-2.5GHz

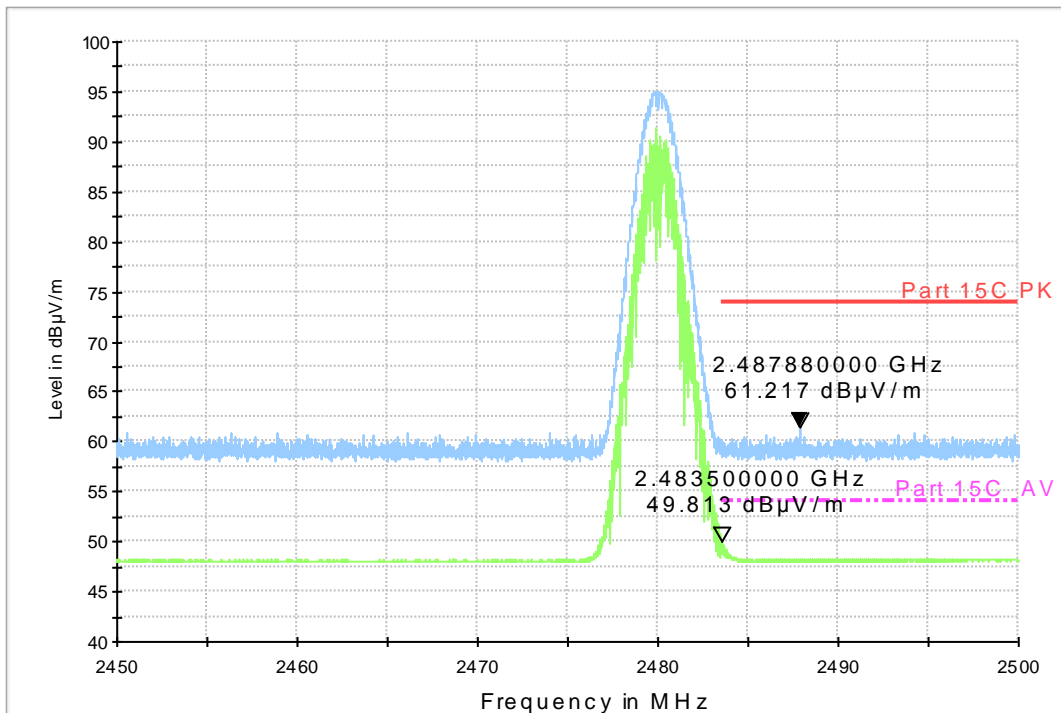


Fig.63. Radiated emission (Power): 8DPSK, high channel

## A.6. Time of Occupancy (Dwell Time)

### Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

### Measurement Result:

#### For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.64	118.06	P
		Fig.65		
	DH3	Fig.66	185.37	P
		Fig.67		
	DH5	Fig.68	181.07	P
		Fig.69		

#### For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.70	120.32	P
		Fig.71		
	DH3	Fig.72	149.90	P
		Fig.73		
	DH5	Fig.74	152.50	P
		Fig.75		

#### For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.76	121.12	P
		Fig.77		
	DH3	Fig.78	172.64	P
		Fig.79		

	DH5	Fig.80	169.01	P
		Fig.81		

**Conclusion: PASS**

**Test graphs as below:**

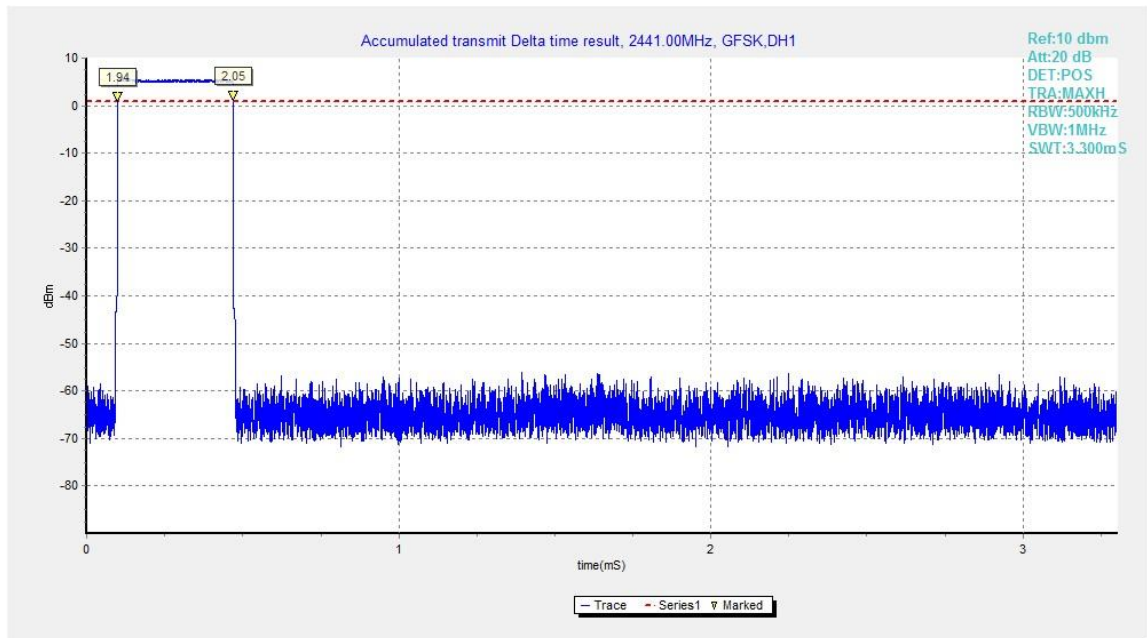


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

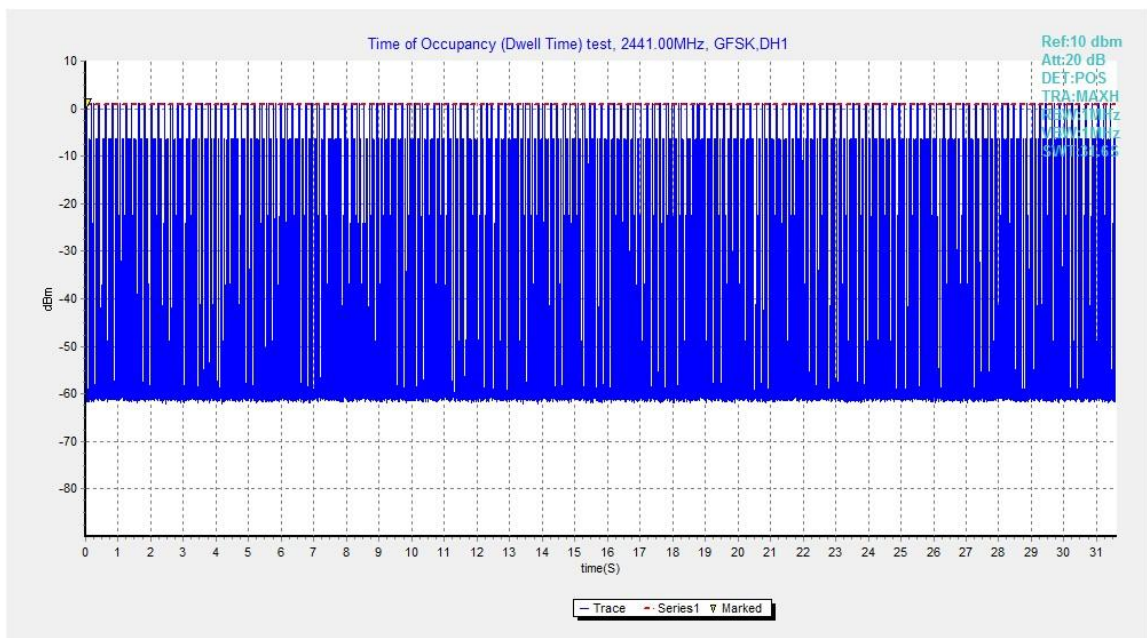


Fig.65. Number of Transmissions Measurement:Channel 39,Packet DH1



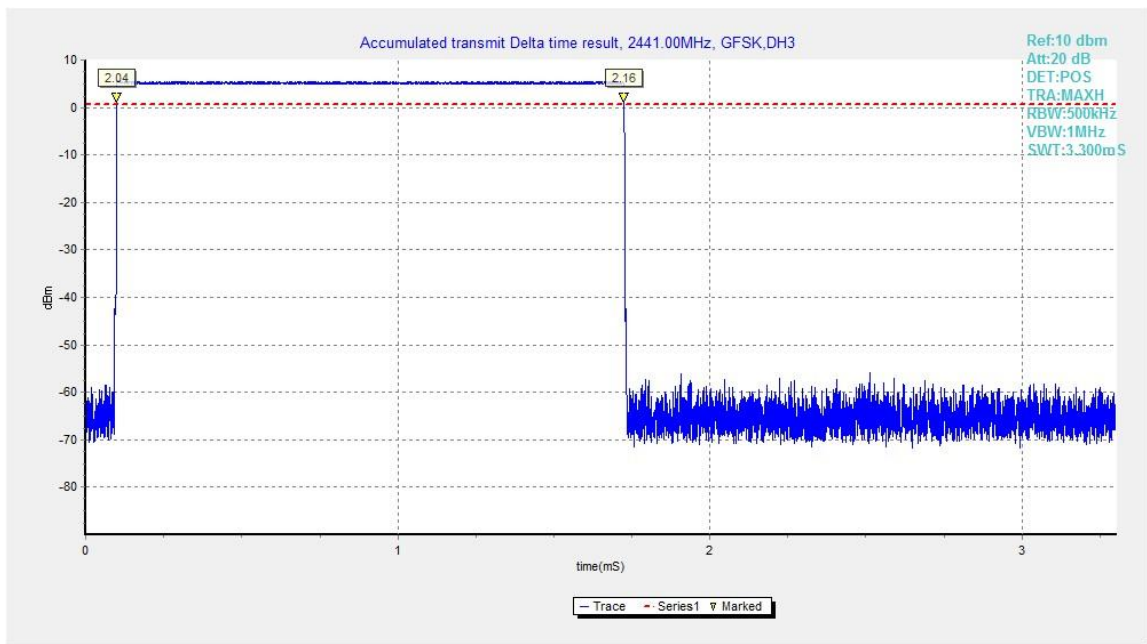


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

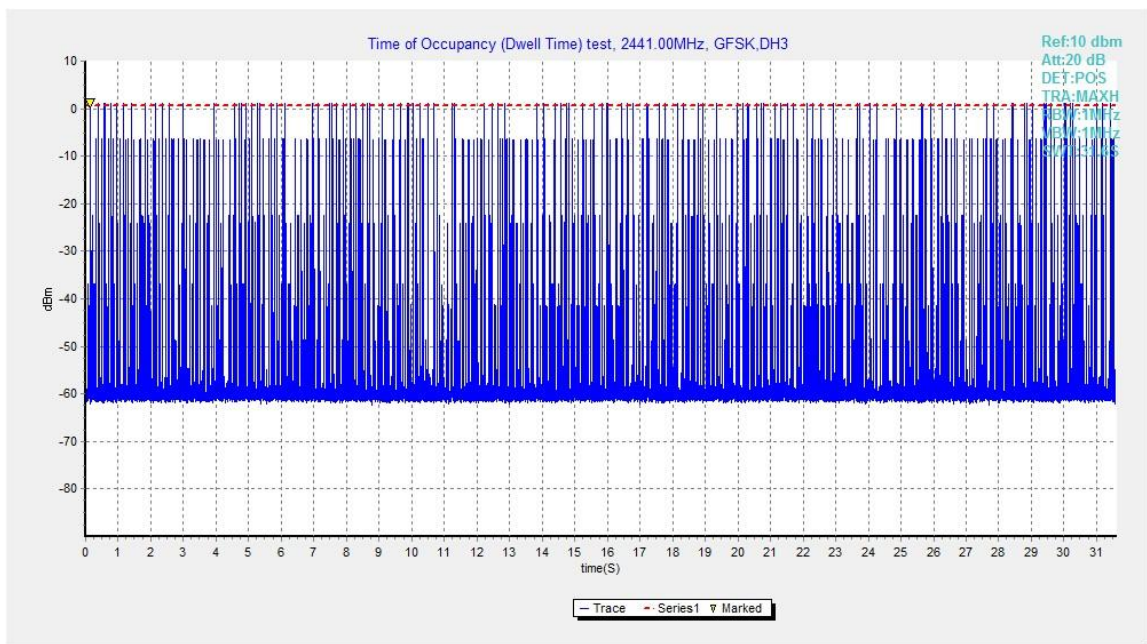


Fig.67. Number of Transmissions Measurement:Channel 39,Packet DH3

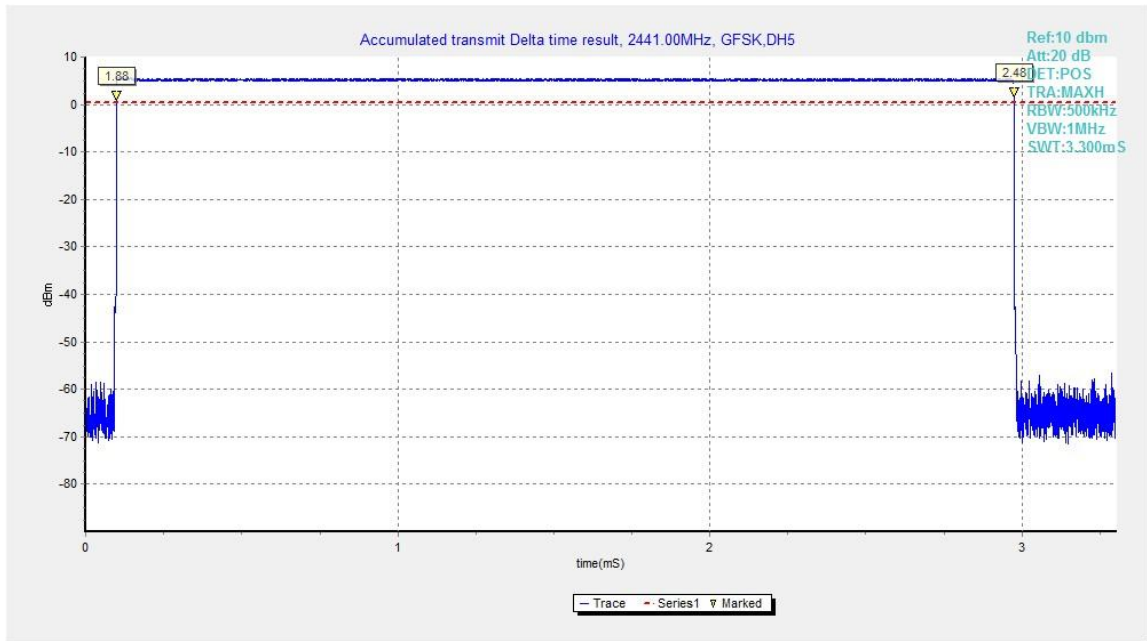


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

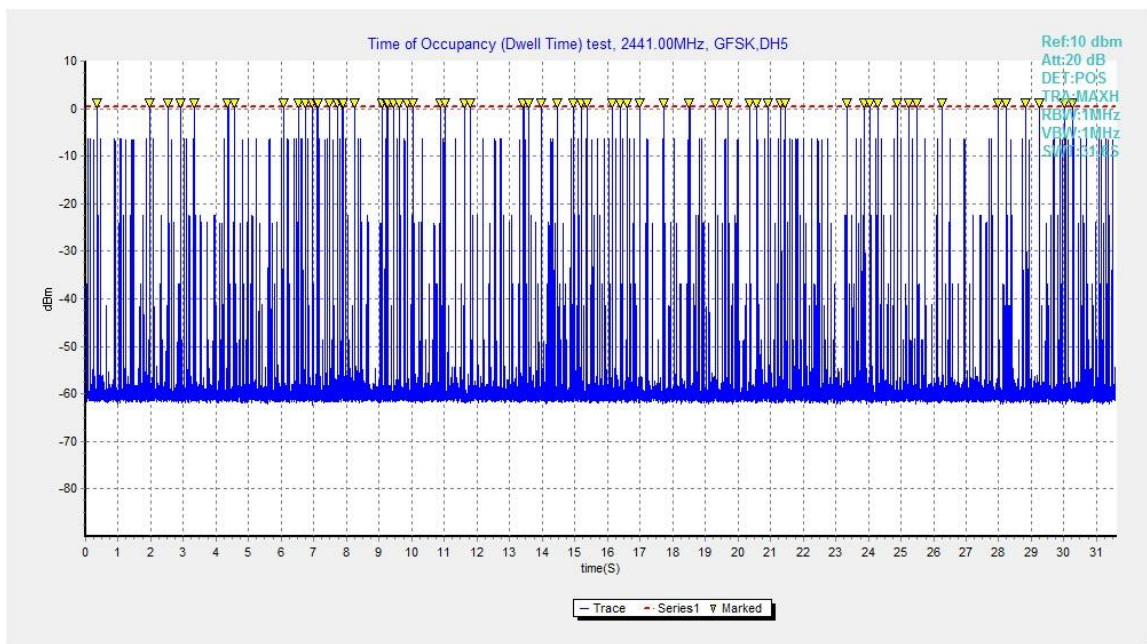


Fig.69. Number of Transmissions Measurement:Channel 39,Packet DH5

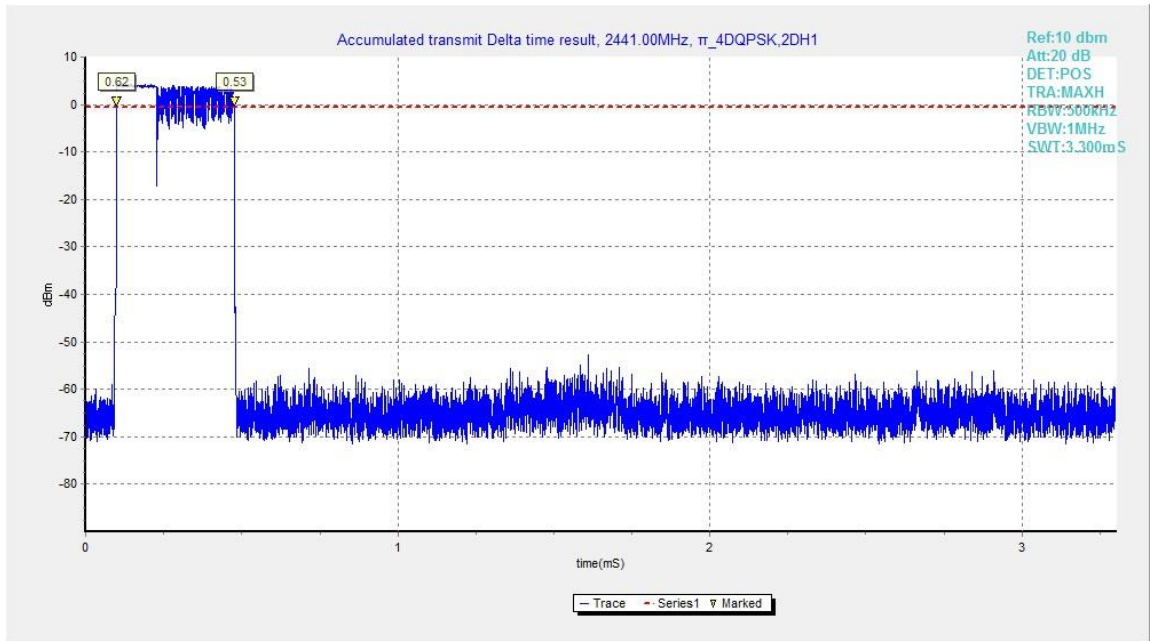


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

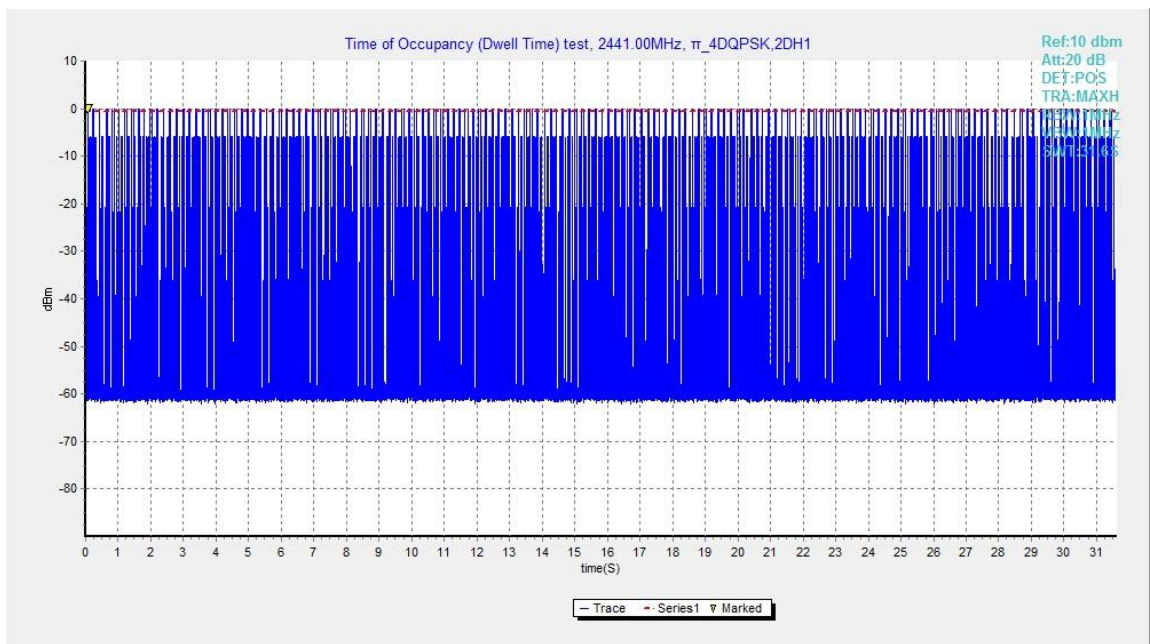


Fig.71. Number of Transmissions Measurement:Channel 39,Packet 2-DH1

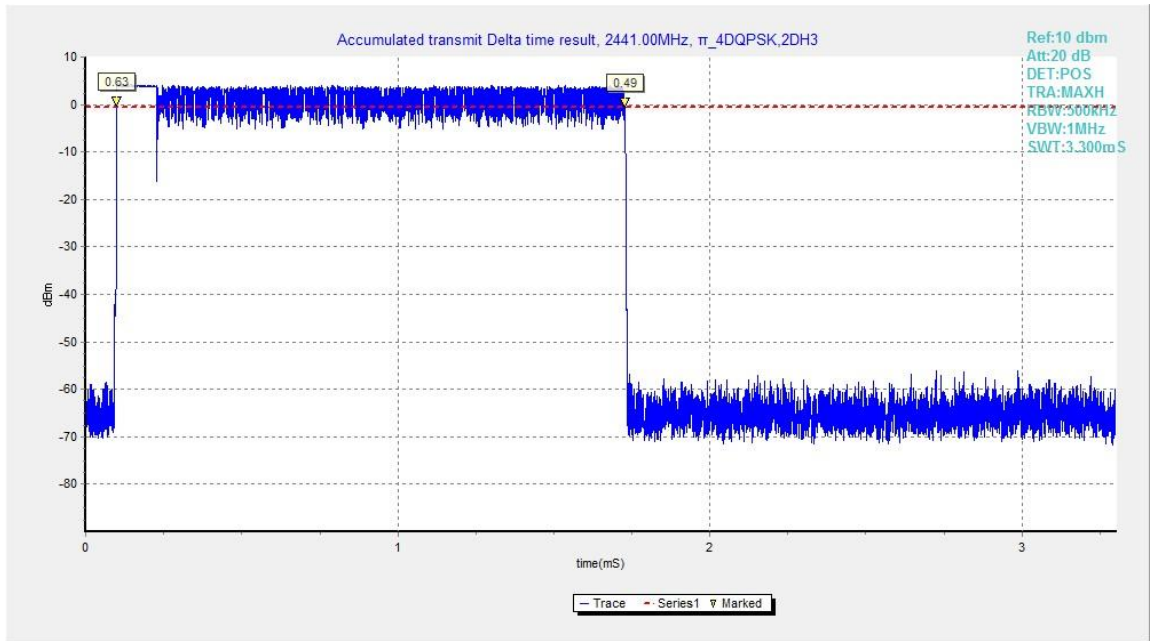


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

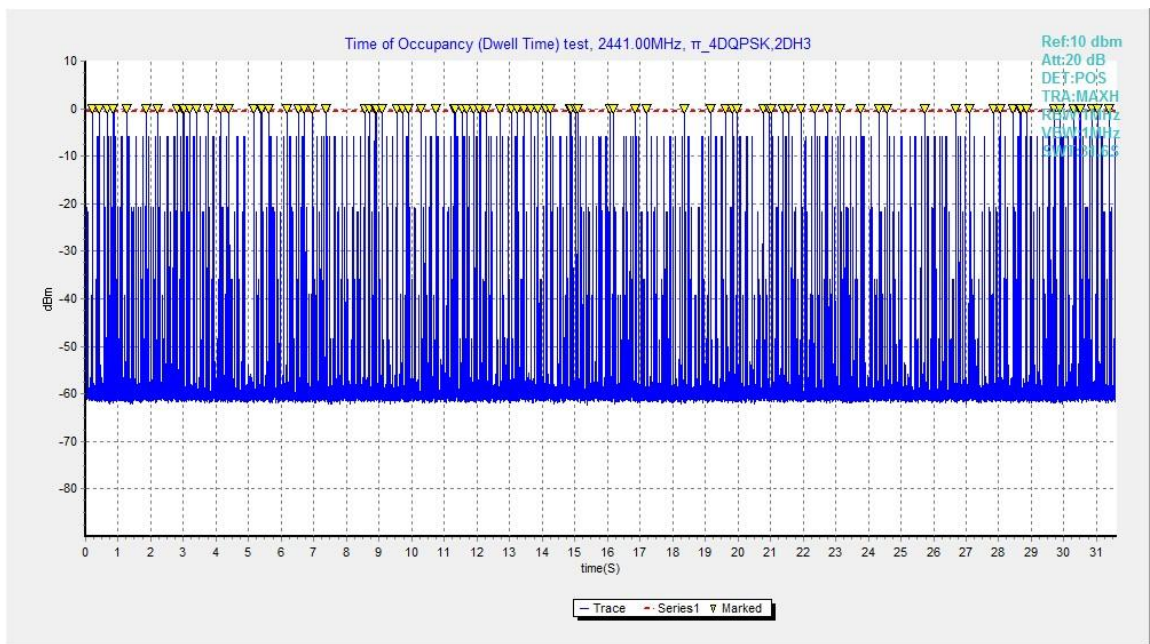


Fig.73. Number of Transmissions Measurement:Channel 39,Packet 2-DH3



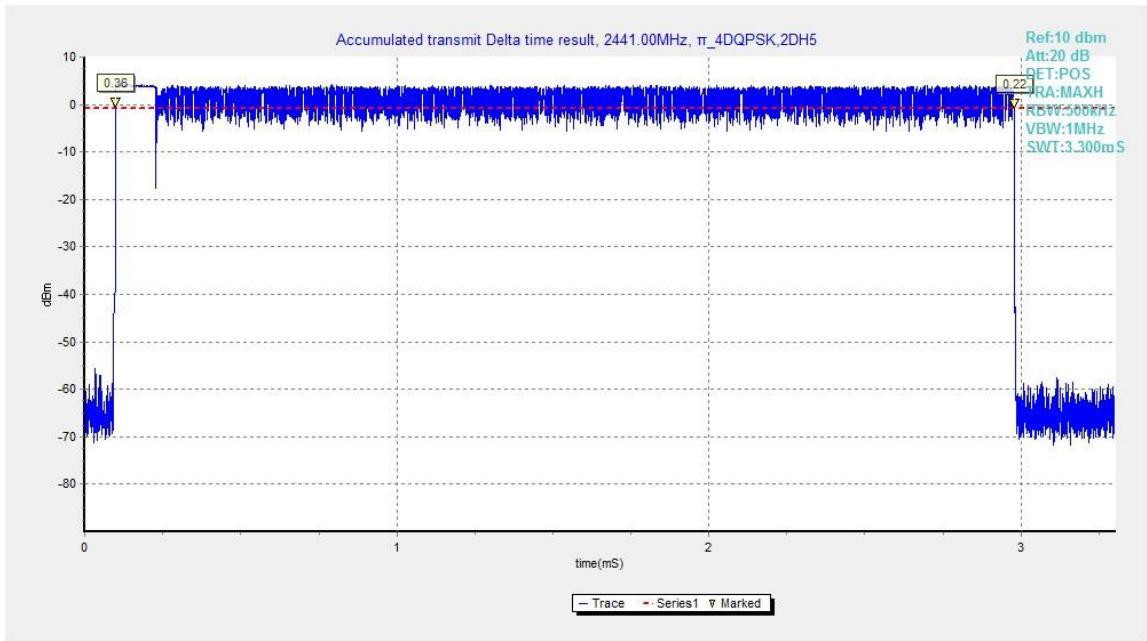


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

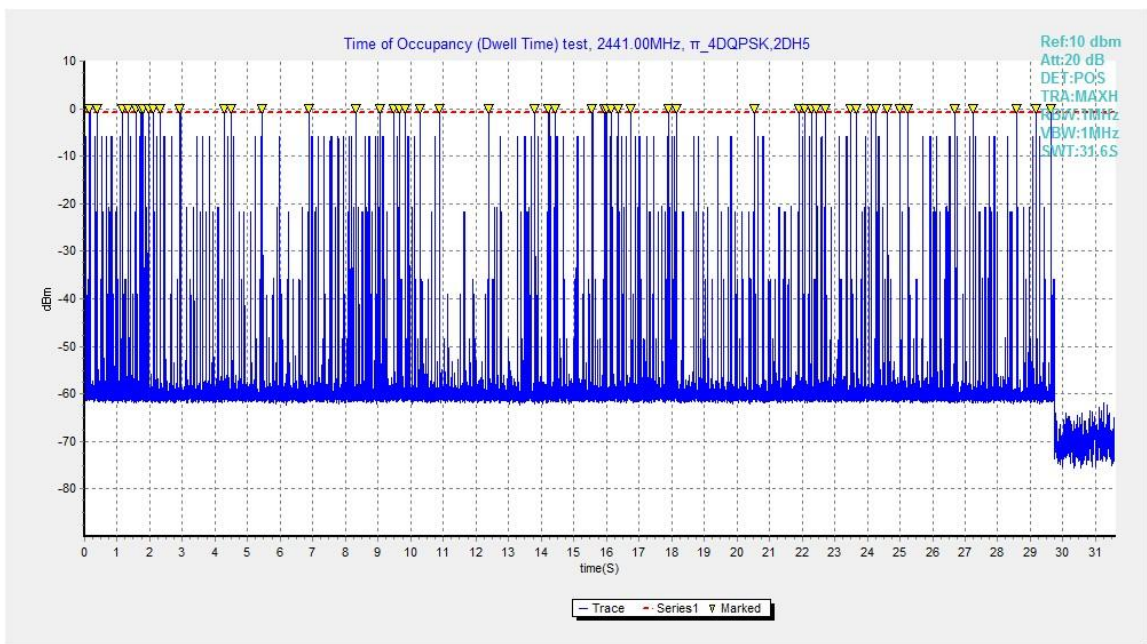


Fig.75. Number of Transmissions Measurement:Channel 39,Packet 2-DH5

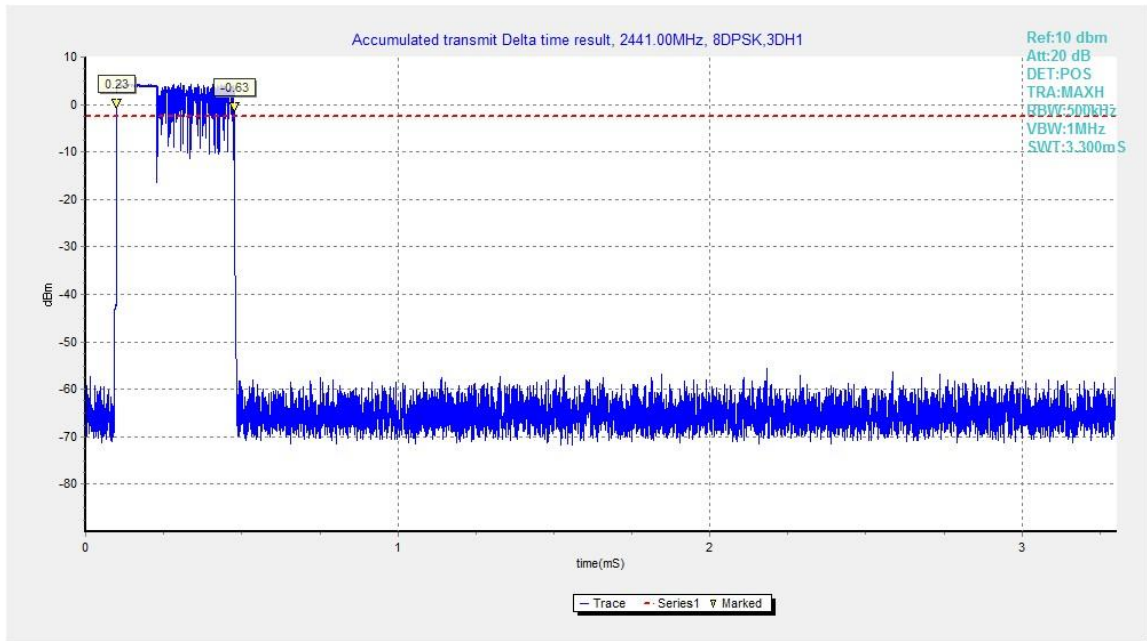


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

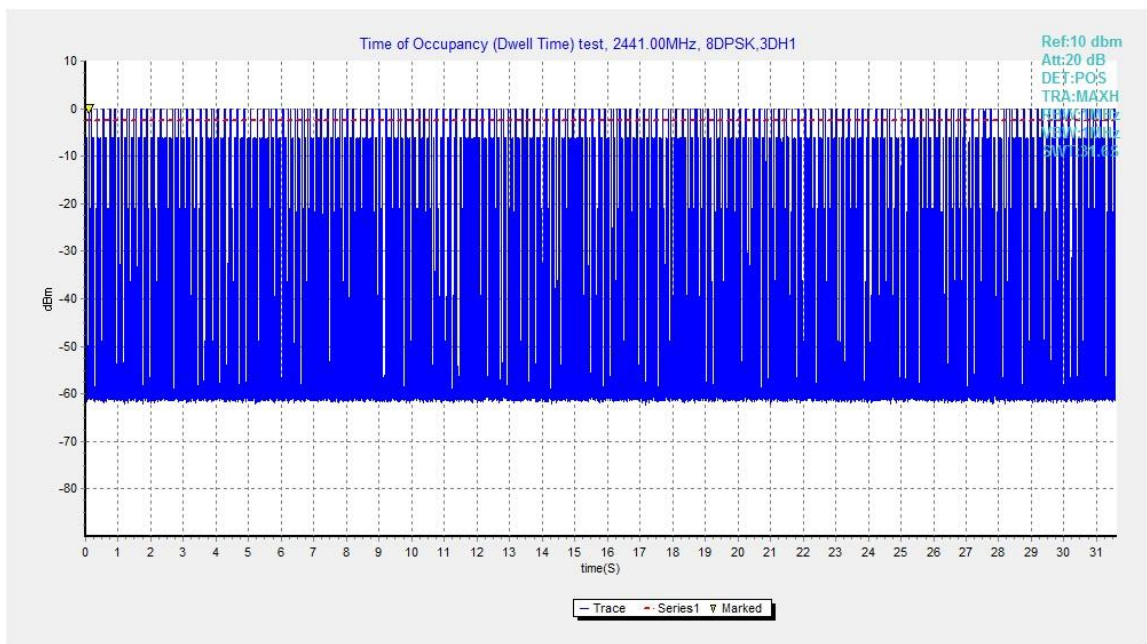


Fig.77. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

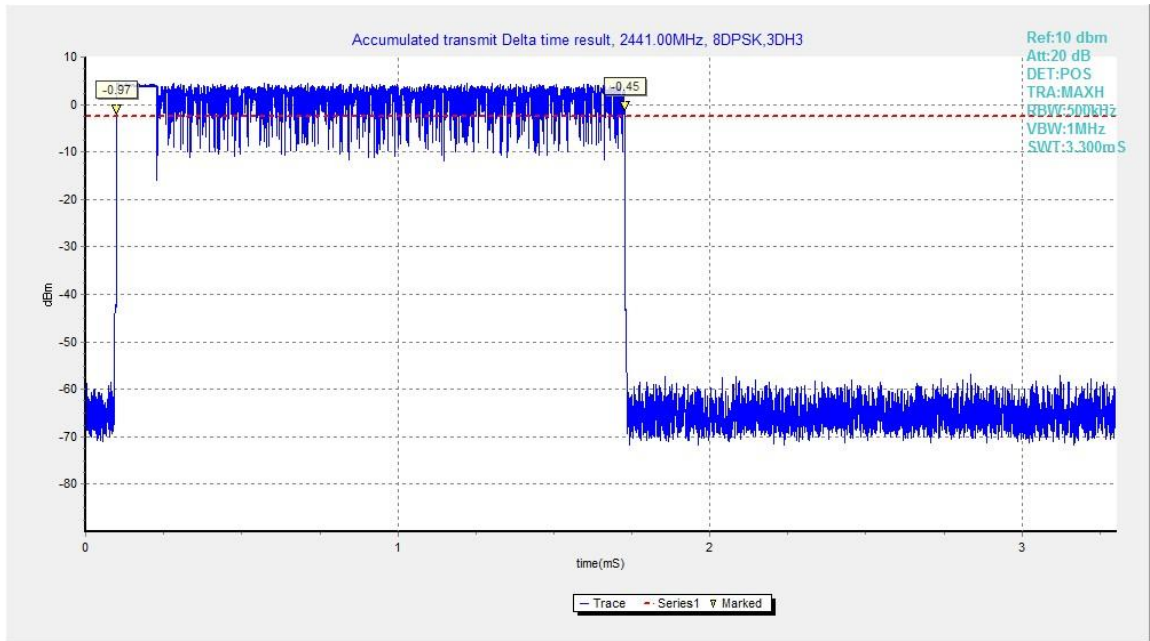


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

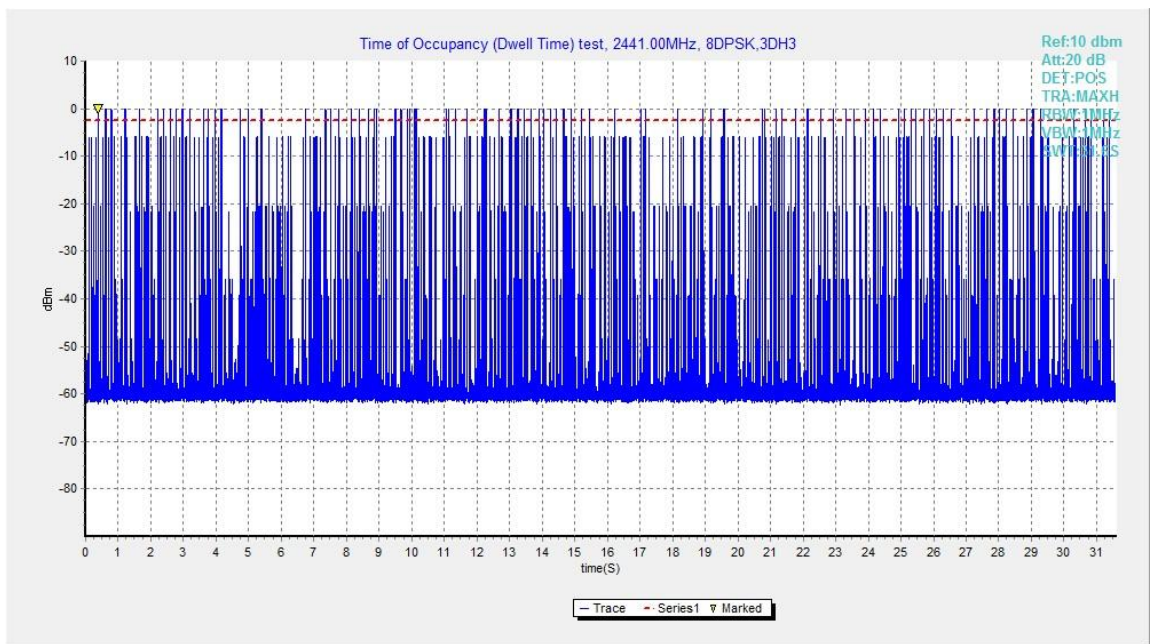


Fig.79. Number of Transmissions Measurement:Channel 39,Packet 3-DH3



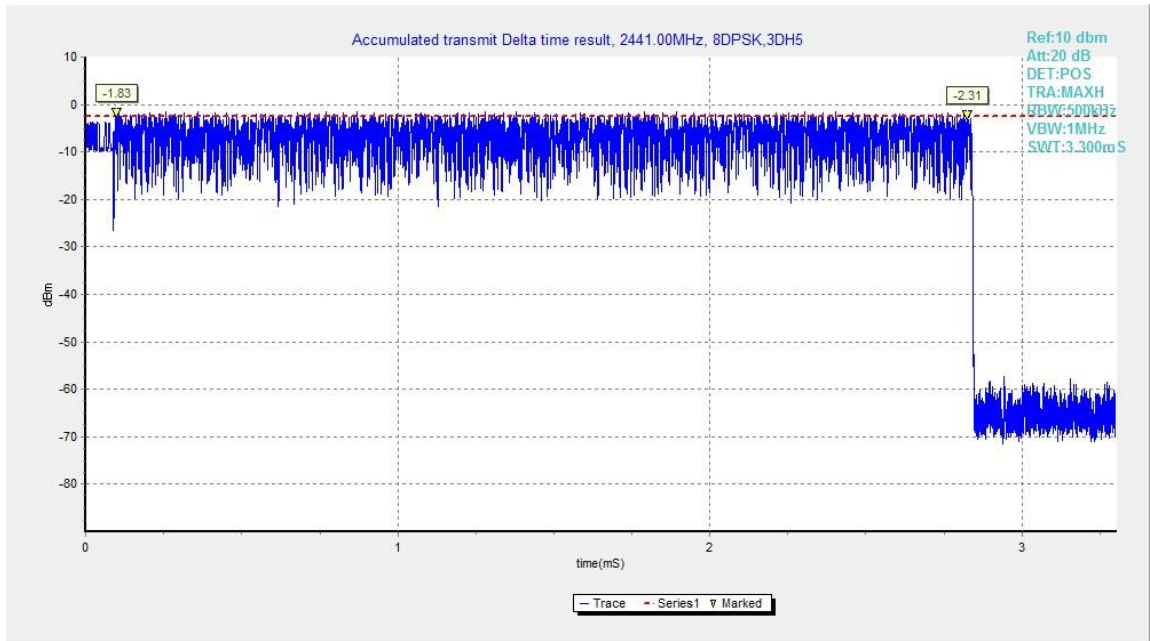


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

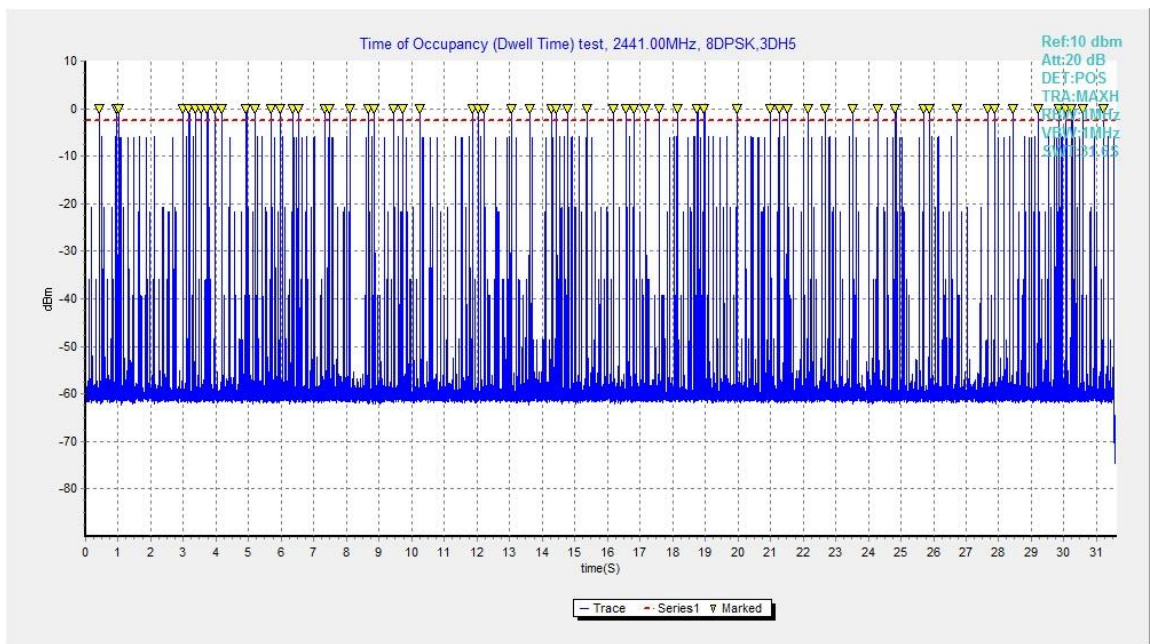


Fig.81. Number of Transmissions Measurement:Channel 39,Packet 3-DH5

## A.7. 20dB Bandwidth

### Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

### Measurement Results:

#### For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	954.00	NA
39	Fig.83	942.75	NA
78	Fig.84	942.00	NA

#### For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1299.00	NA
39	Fig.86	1266.00	NA
78	Fig.87	1266.00	NA

#### For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1273.50	NA
39	Fig.89	1288.50	NA
78	Fig.90	1290.00	NA

**Conclusion: NA**

**Test graphs as below:**

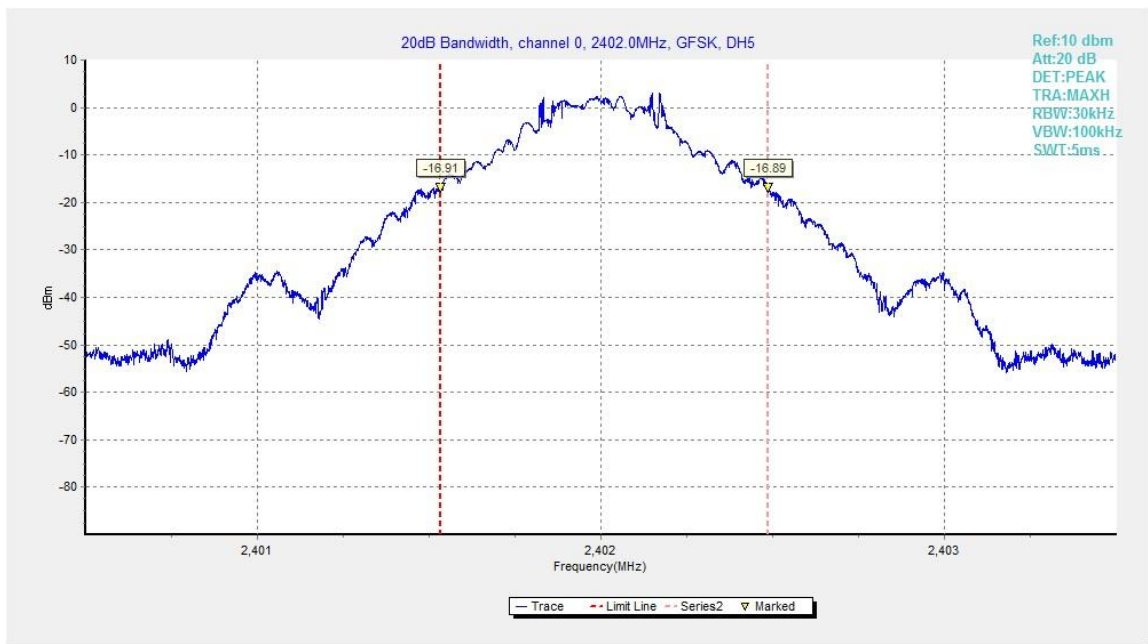


Fig.82. 20dB Bandwidth: GFSK, Channel 0

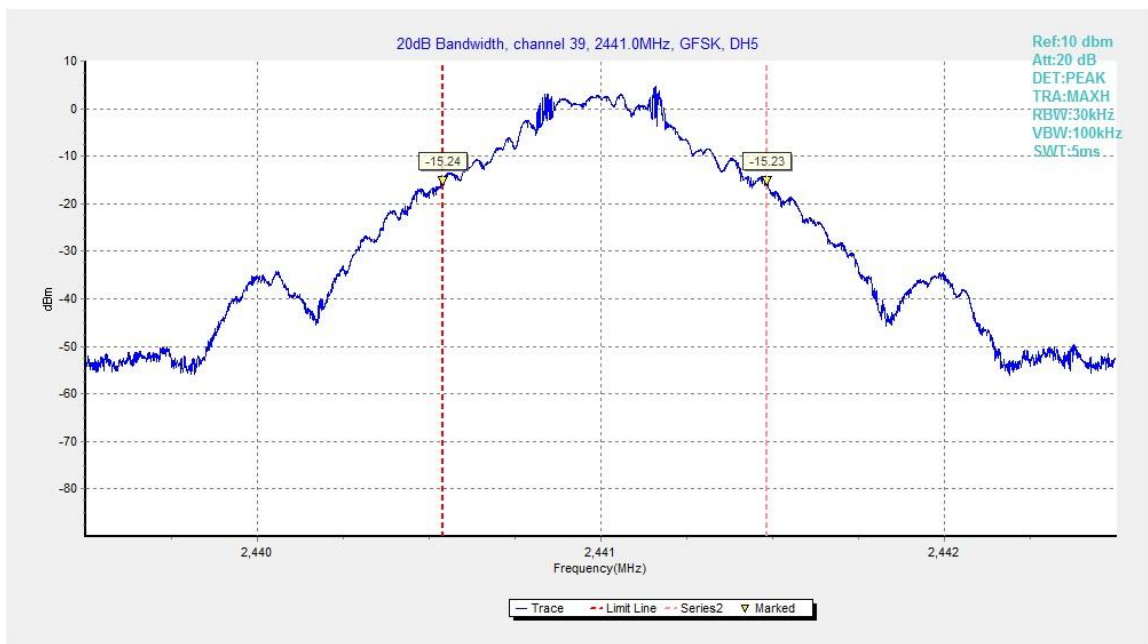


Fig.83. 20dB Bandwidth: GFSK, Channel 39

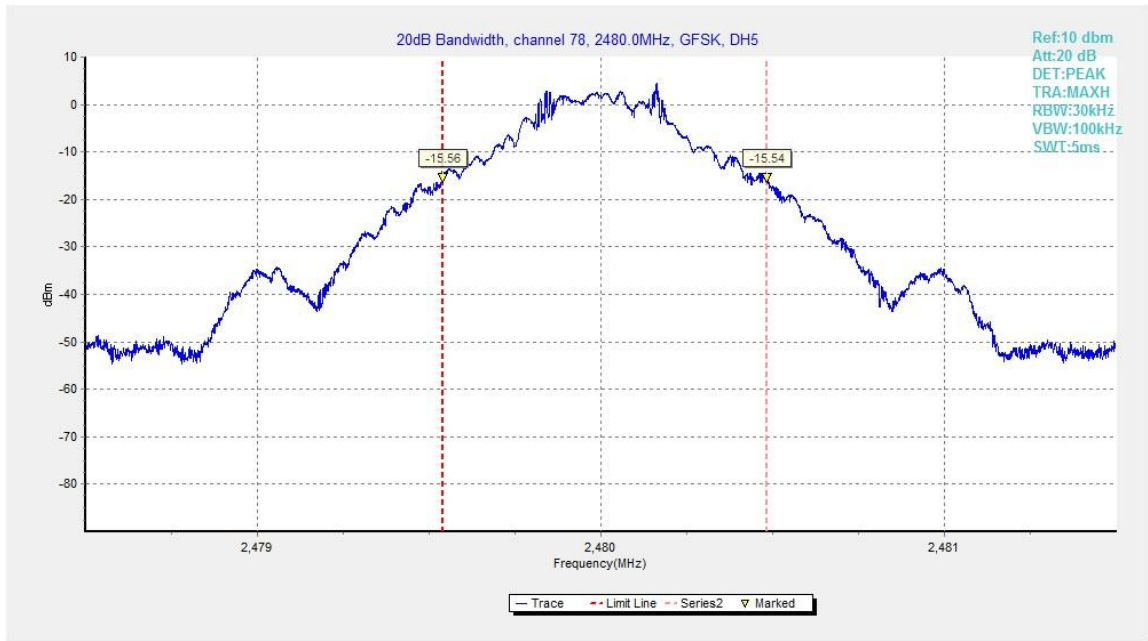


Fig.84. 20dB Bandwidth: GFSK, Channel 78

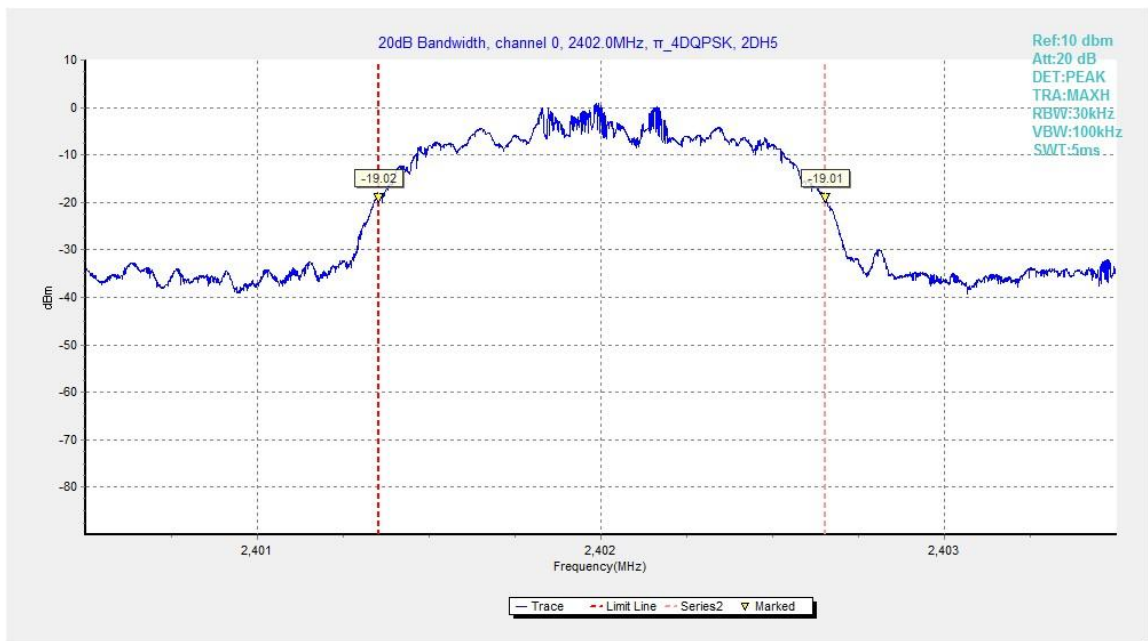


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0

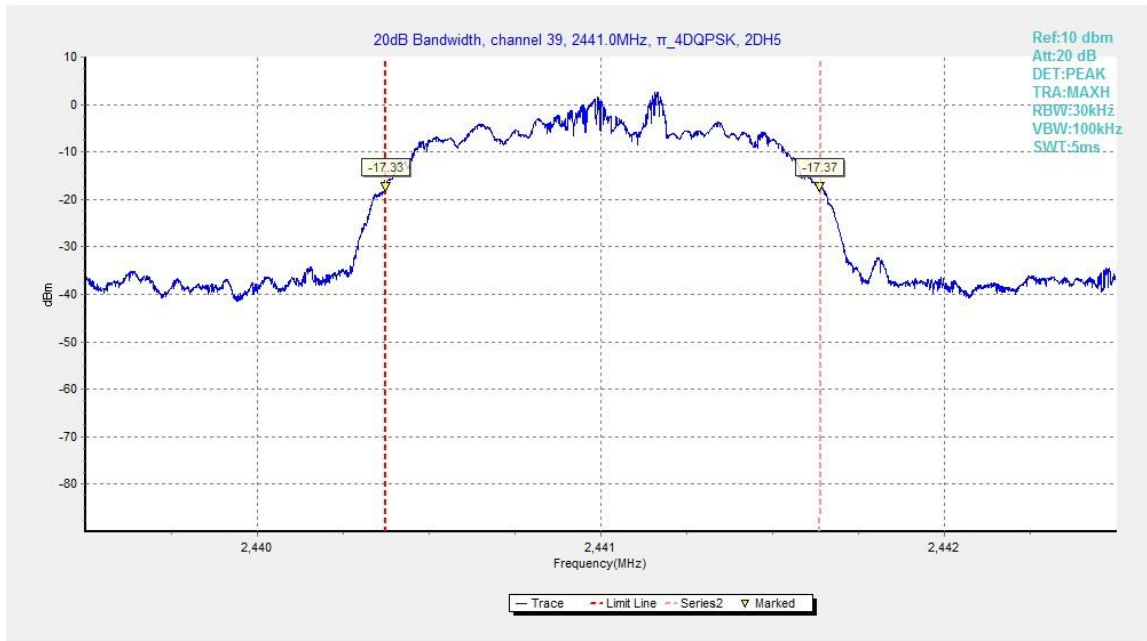


Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

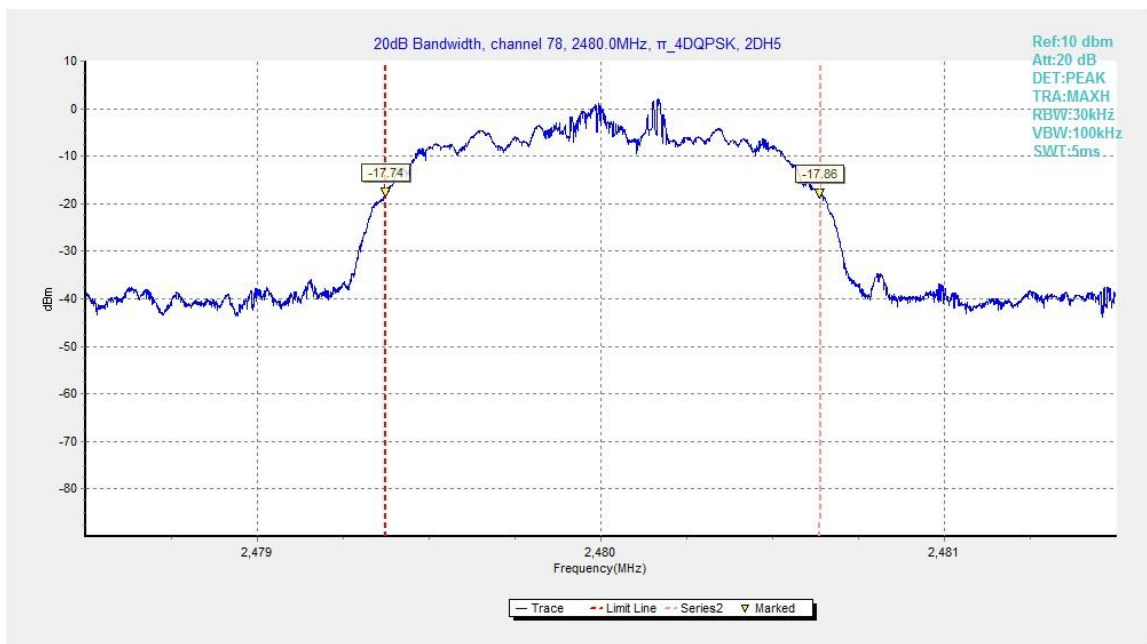


Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

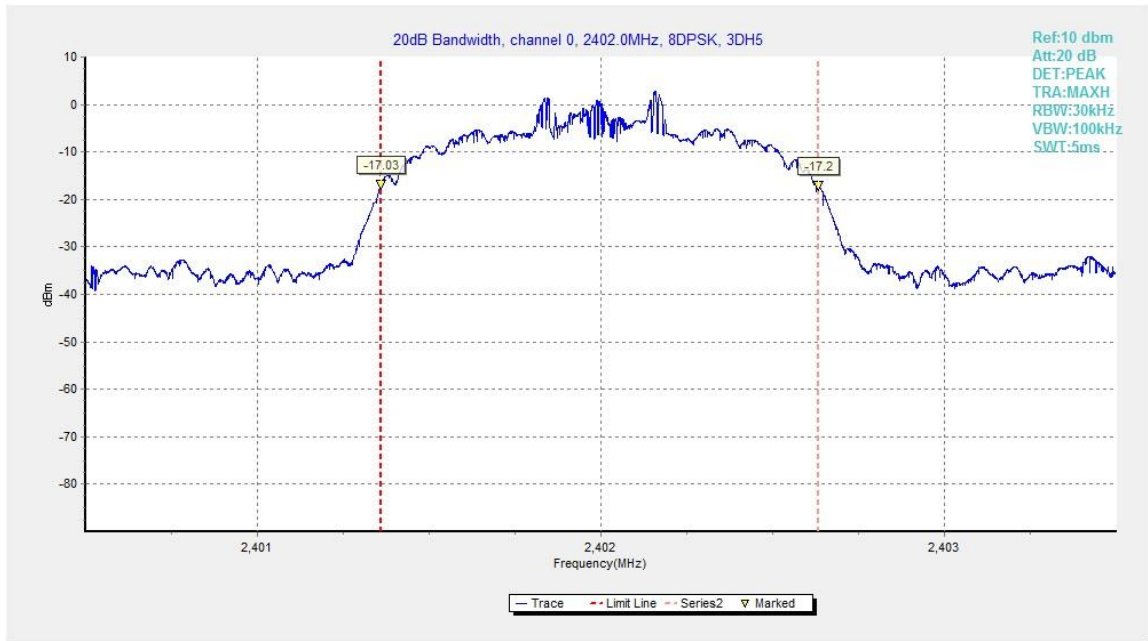


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

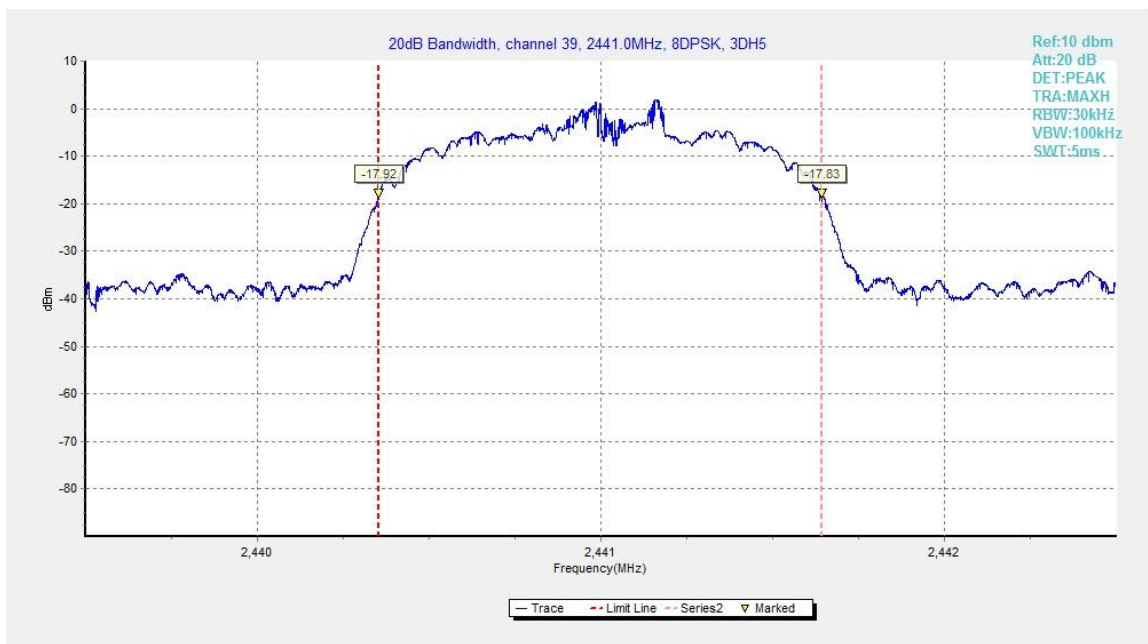


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39



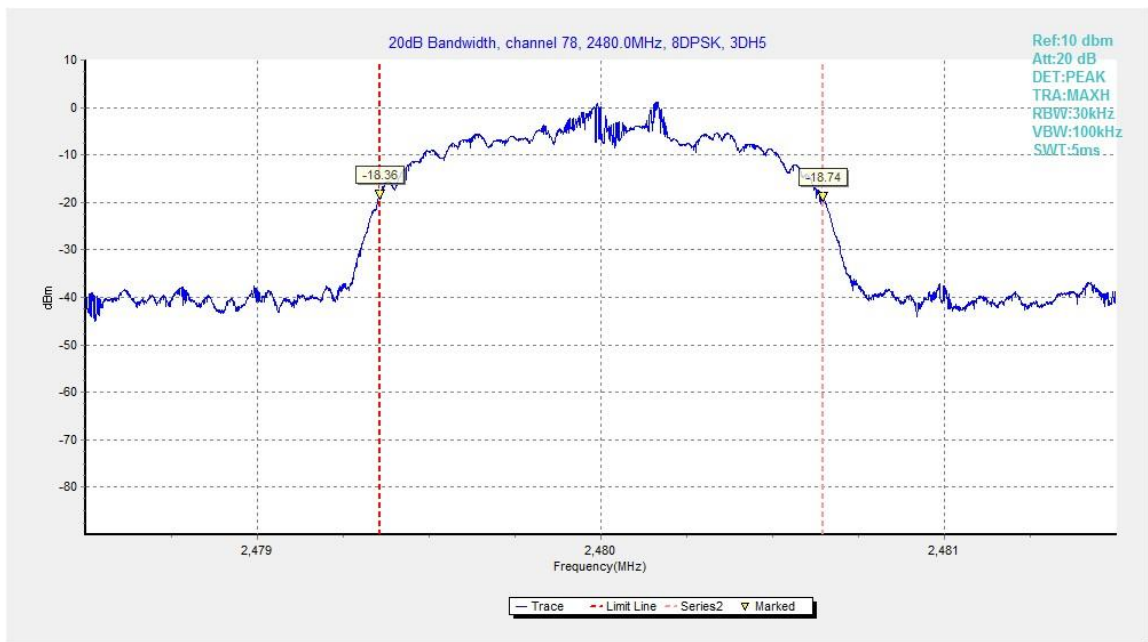


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78



## A.8. Carrier Frequency Separation

**Method of Measurement: See ANSI C63.10-clause 7.8.2**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

### Measurement Result:

#### For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	997.50	P

#### For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1020.00	P

#### For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1365.75	P

**Conclusion: PASS**

**Test graphs as below:**

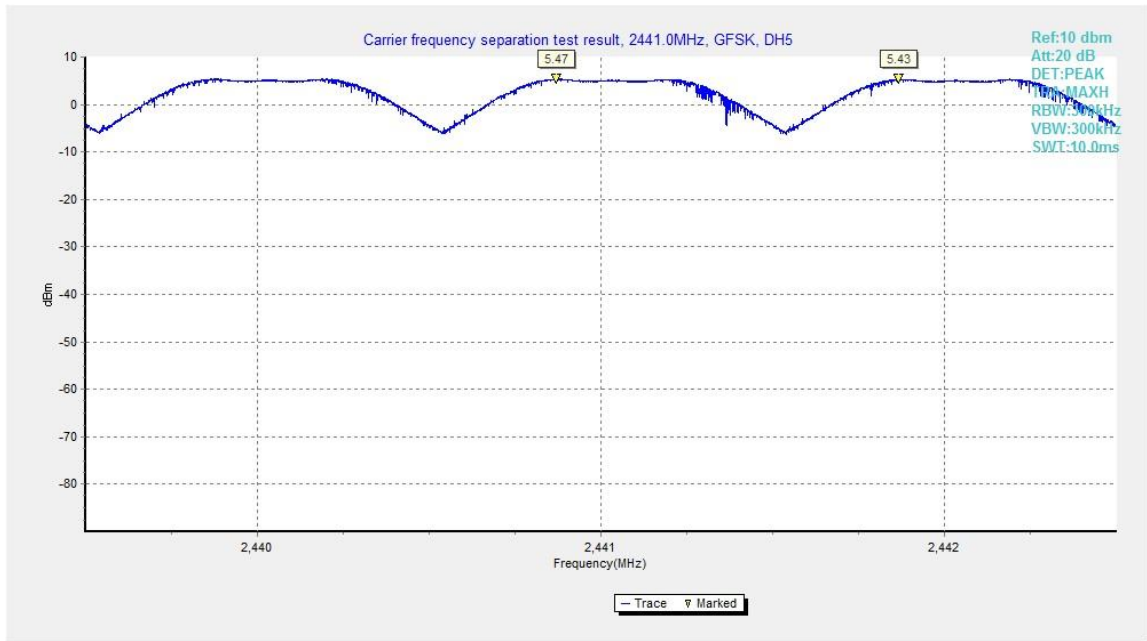


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

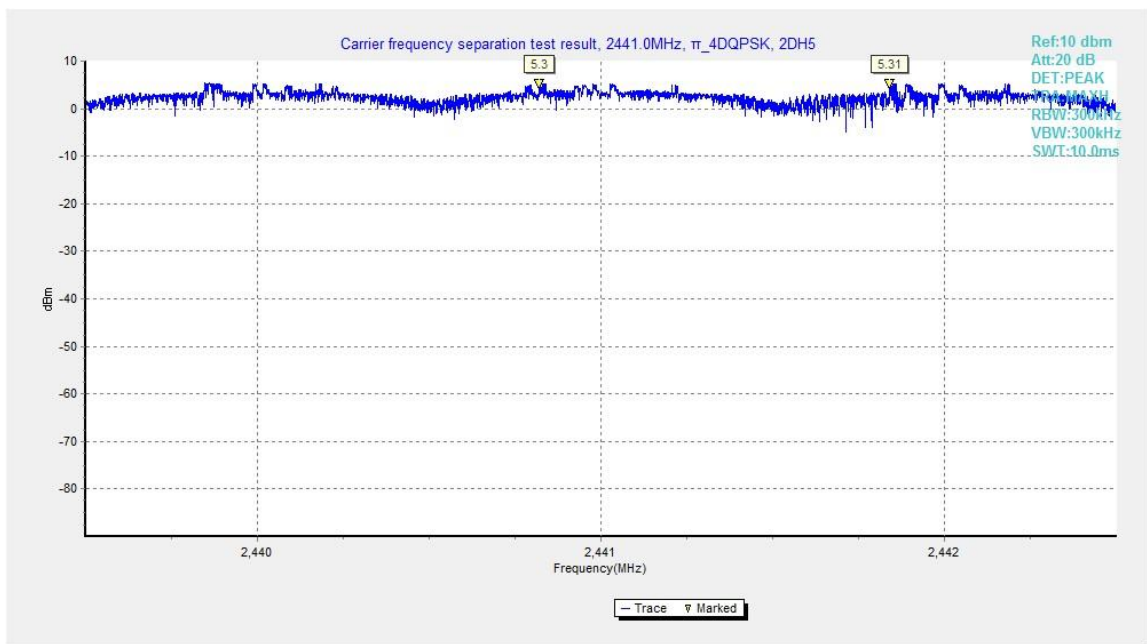


Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

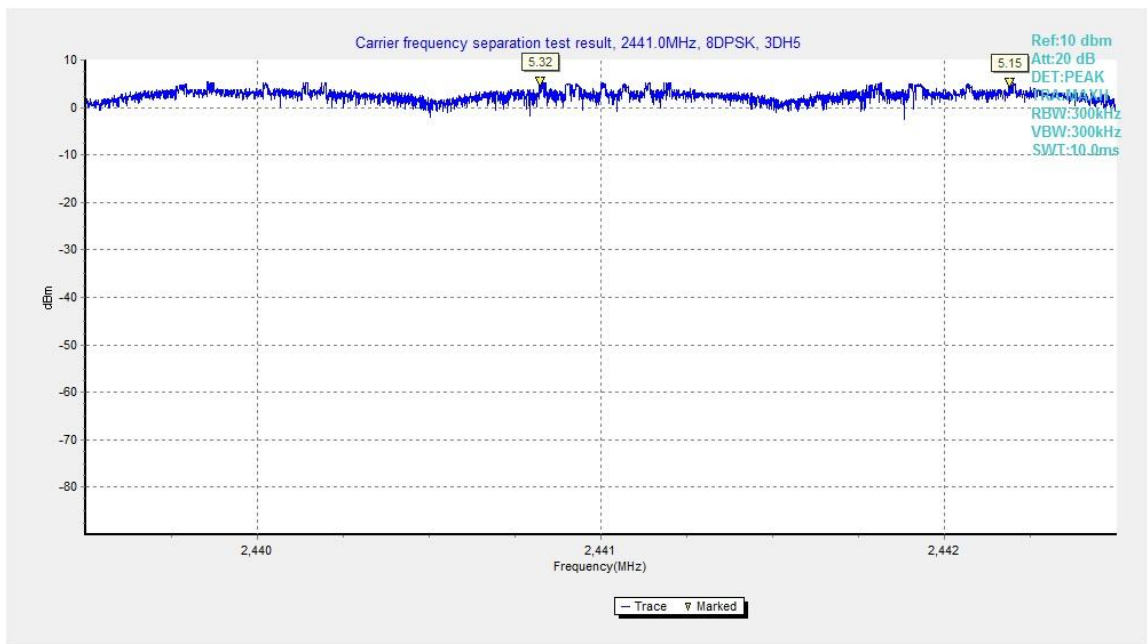


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

## A.9. Number of Hopping Channels

### Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	79 P
40~78	Fig.95	

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	79 P
40~78	Fig.97	

#### For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	79 P
40~78	Fig.99	

**Conclusion: PASS**

**Test graphs as below:**

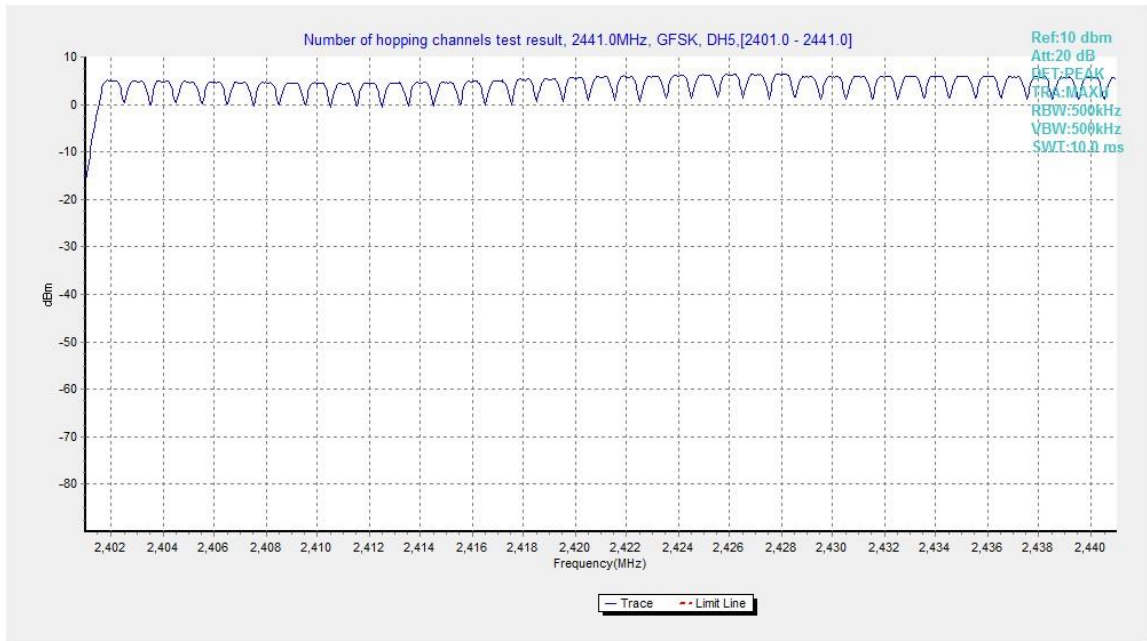


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

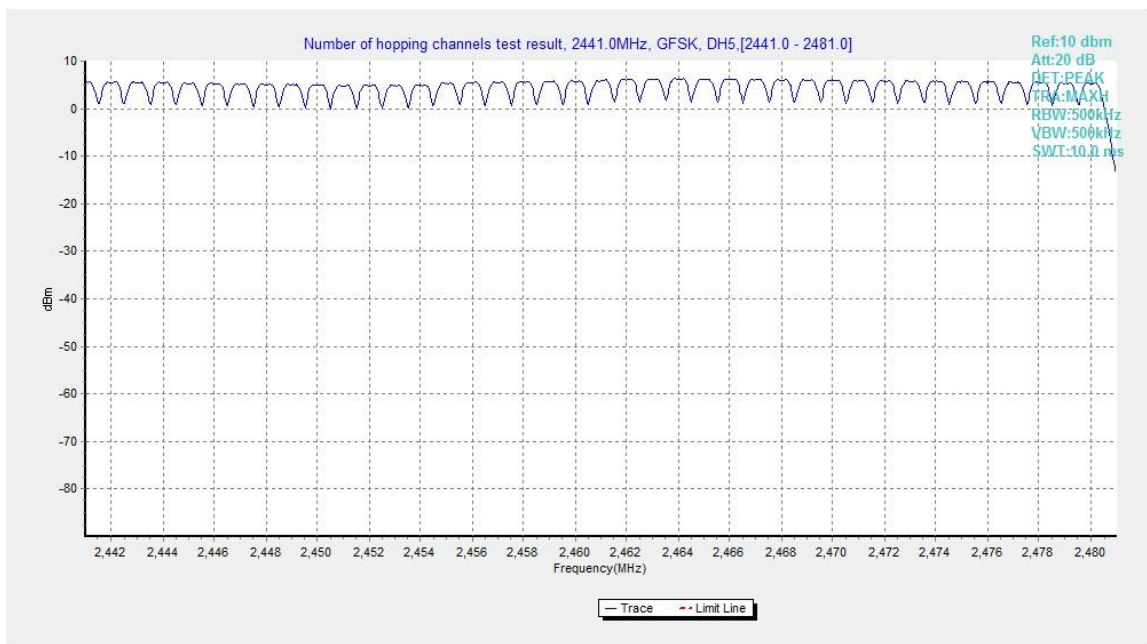


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

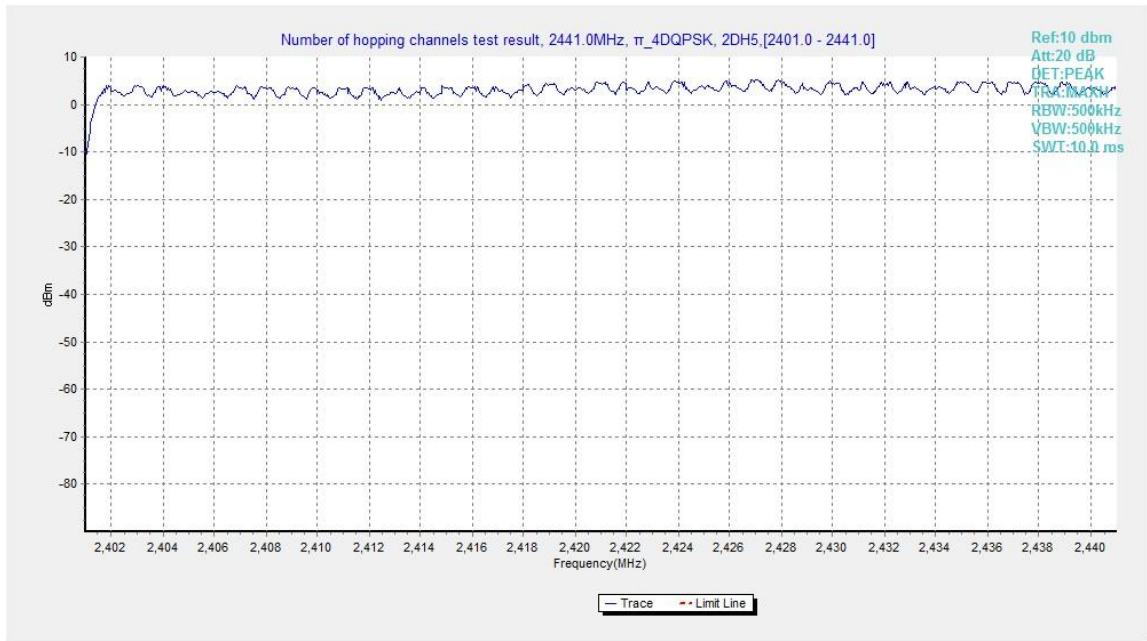


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

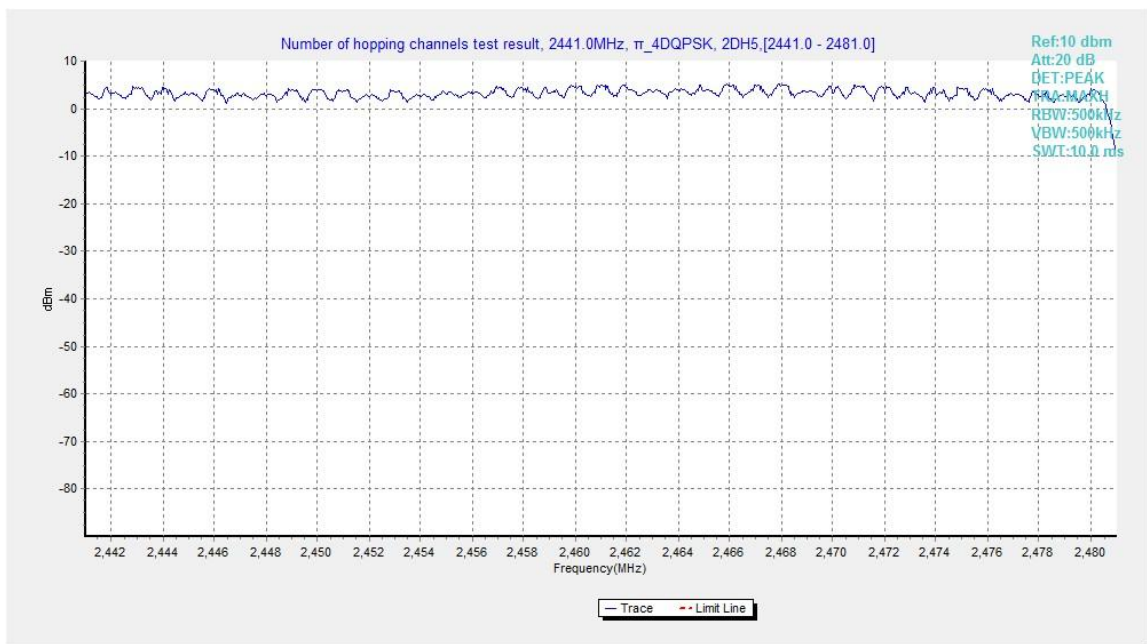


Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78



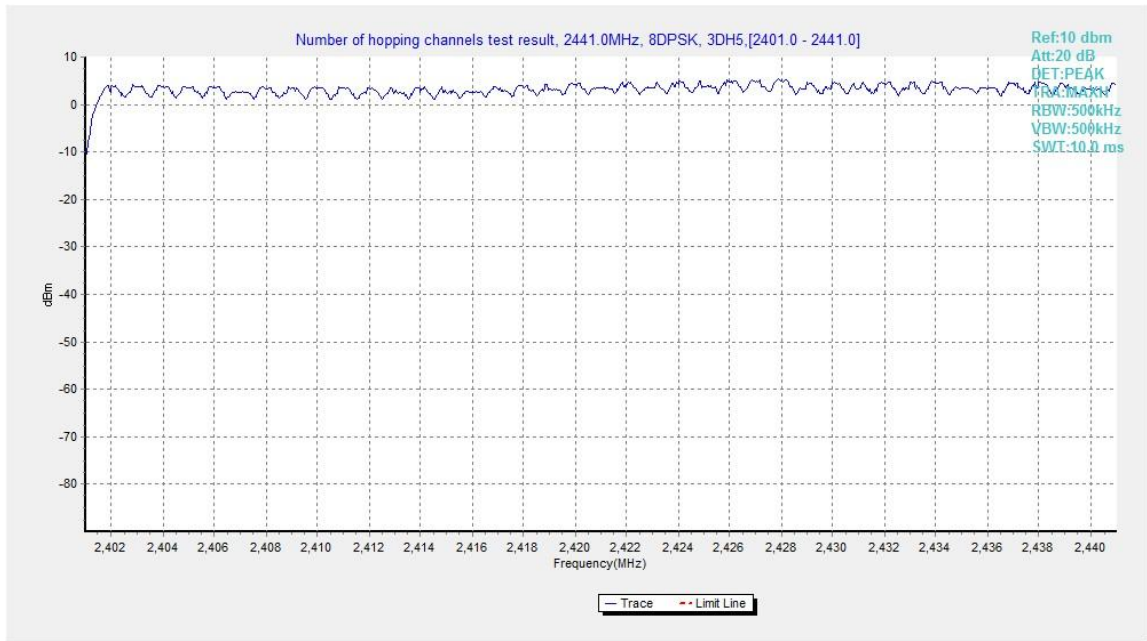


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

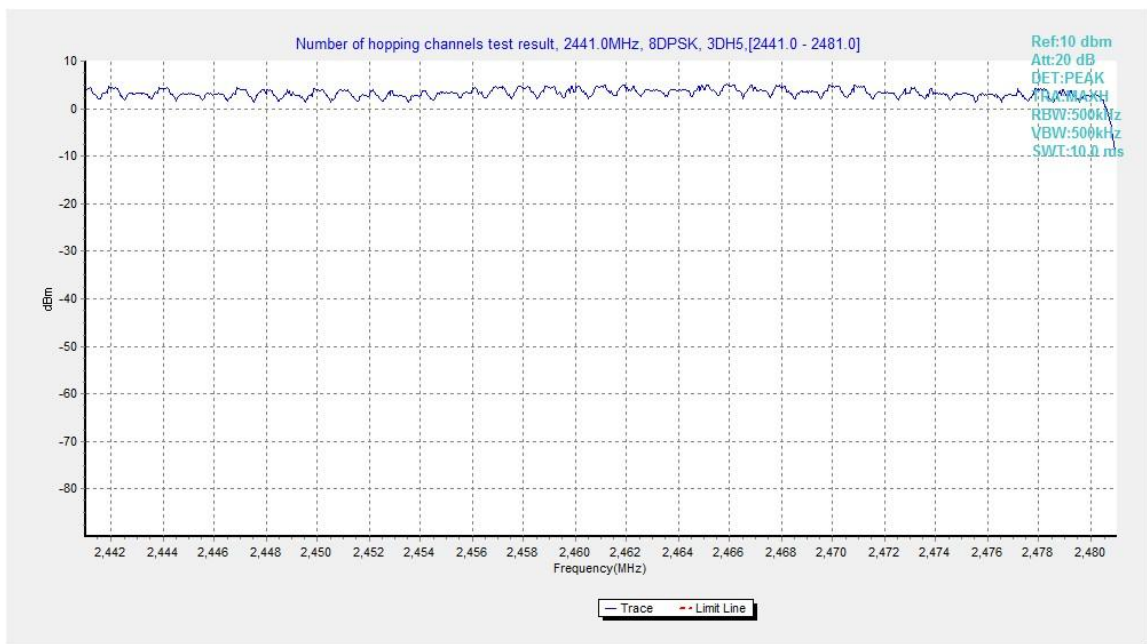


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78



## A.10. AC Powerline Conducted Emission

**Method of Measurement: See ANSI C63.10-clause 6.2**

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

#### Bluetooth (Average Limit)



Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

Set.10 Traffic:

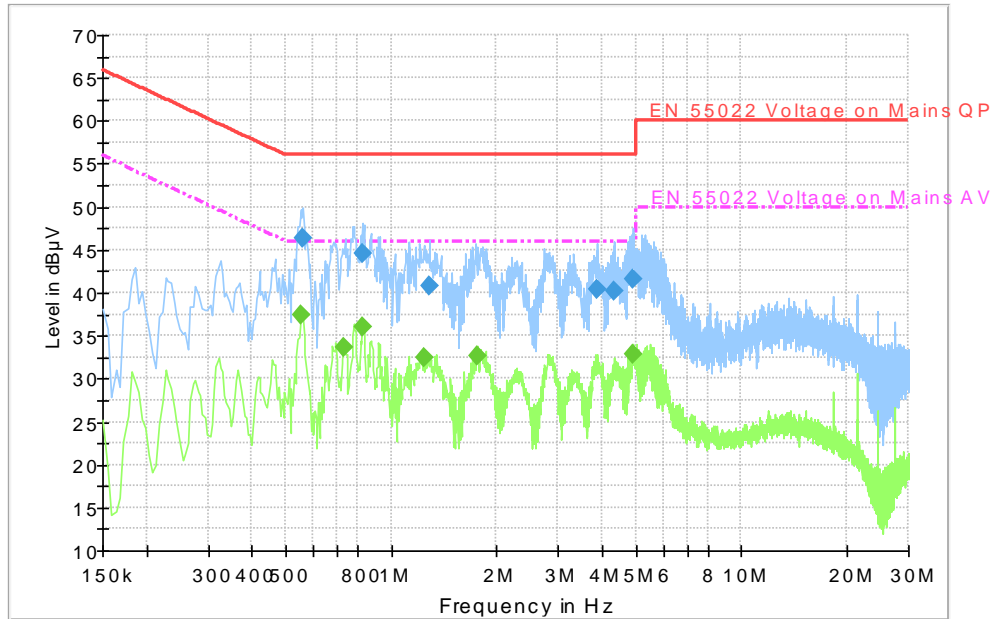


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.559500	46.3	2000.0	9.000	L1	10.2	9.7	56.0
0.825000	44.5	2000.0	9.000	L1	10.2	11.5	56.0
1.288500	40.8	2000.0	9.000	L1	10.2	15.2	56.0
3.862500	40.5	2000.0	9.000	L1	10.3	15.5	56.0
4.330500	40.2	2000.0	9.000	L1	10.3	15.8	56.0
4.897500	41.7	2000.0	9.000	L1	10.3	14.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.550500	37.5	2000.0	9.000	L1	10.2	8.5	46.0
0.730500	33.7	2000.0	9.000	L1	10.2	12.3	46.0
0.825000	36.1	2000.0	9.000	L1	10.2	9.9	46.0
1.239000	32.4	2000.0	9.000	L1	10.2	13.6	46.0
1.770000	32.6	2000.0	9.000	L1	10.2	13.4	46.0
4.906500	32.8	2000.0	9.000	L1	10.3	13.2	46.0

Set.10 Idle:

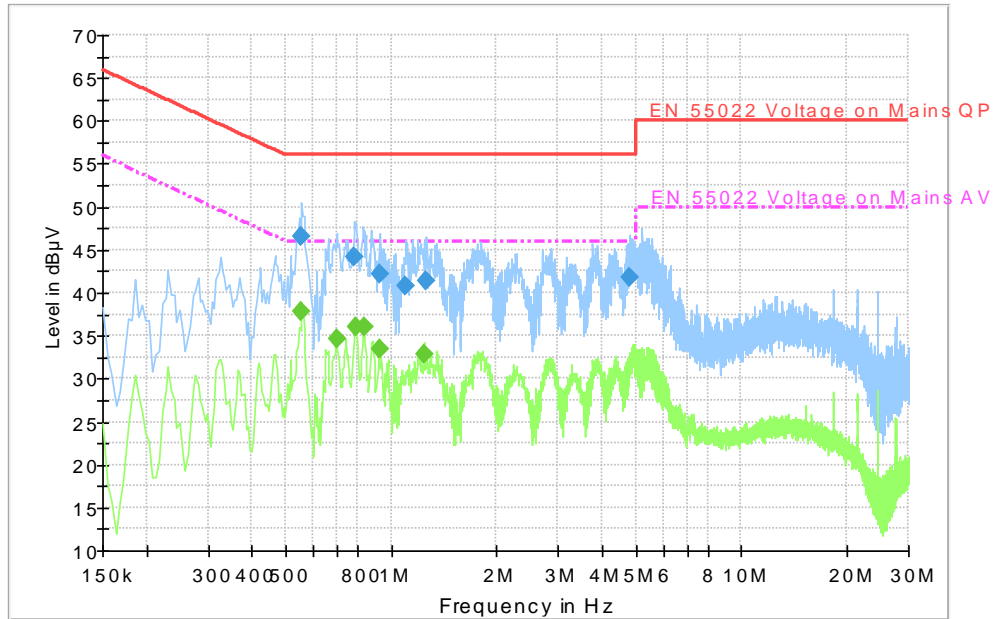


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.555000	46.5	2000.0	9.000	L1	10.2	9.5	56.0
0.784500	44.3	2000.0	9.000	L1	10.2	11.7	56.0
0.933000	42.2	2000.0	9.000	L1	10.2	13.8	56.0
1.104000	40.9	2000.0	9.000	L1	10.2	15.1	56.0
1.261500	41.3	2000.0	9.000	L1	10.2	14.7	56.0
4.798500	41.8	2000.0	9.000	L1	10.3	14.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.555000	37.8	2000.0	9.000	L1	10.2	8.2	46.0
0.699000	34.6	2000.0	9.000	L1	10.2	11.4	46.0
0.793500	36.1	2000.0	9.000	L1	10.2	9.9	46.0
0.838500	36.0	2000.0	9.000	L1	10.2	10.0	46.0
0.933000	33.3	2000.0	9.000	L1	10.2	12.7	46.0
1.243500	32.8	2000.0	9.000	L1	10.2	13.2	46.0

Set.11 Traffic:

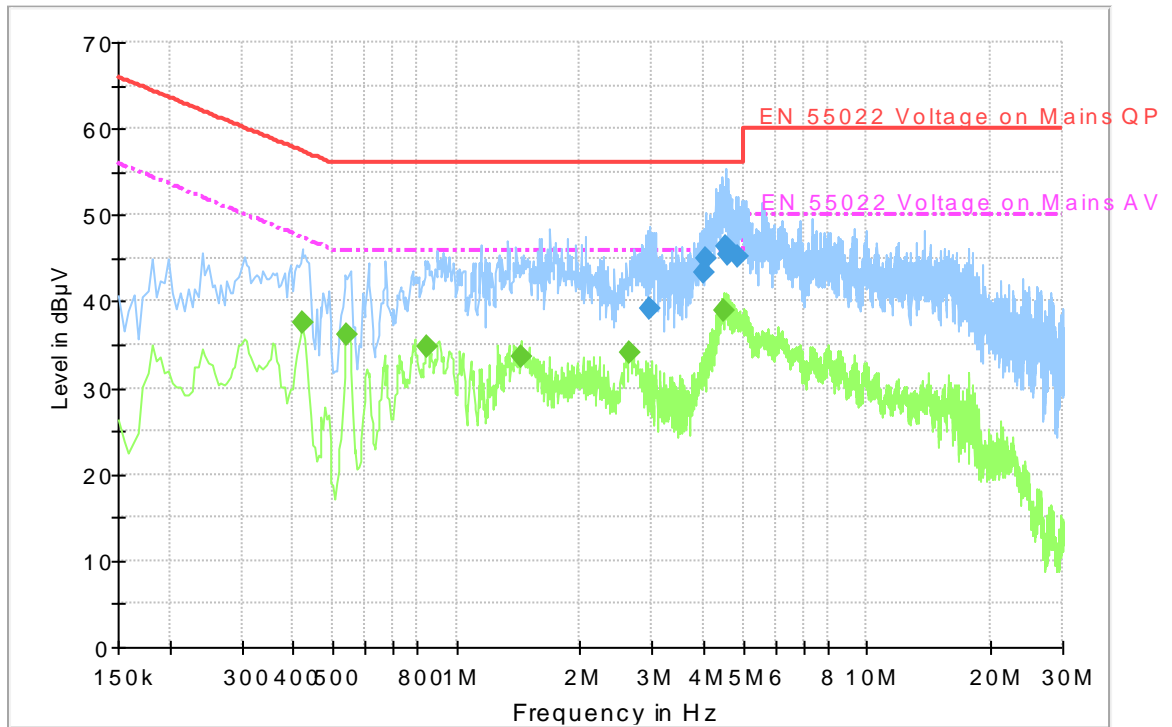


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.949000	39.2	2000.0	9.000	L1	10.3	16.8	56.0
3.988500	43.4	2000.0	9.000	L1	10.3	12.6	56.0
4.065000	44.9	2000.0	9.000	L1	10.3	11.1	56.0
4.515000	46.2	2000.0	9.000	L1	10.3	9.8	56.0
4.582500	45.5	2000.0	9.000	L1	10.3	10.5	56.0
4.830000	45.3	2000.0	9.000	L1	10.3	10.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	37.5	2000.0	9.000	L1	10.2	10.0	47.4
0.541500	36.2	2000.0	9.000	L1	10.2	9.8	46.0
0.847500	34.8	2000.0	9.000	L1	10.2	11.2	46.0
1.441500	33.5	2000.0	9.000	L1	10.2	12.5	46.0
2.634000	34.1	2000.0	9.000	L1	10.2	11.9	46.0
4.497000	38.9	2000.0	9.000	L1	10.3	7.1	46.0

Set.12 Traffic:

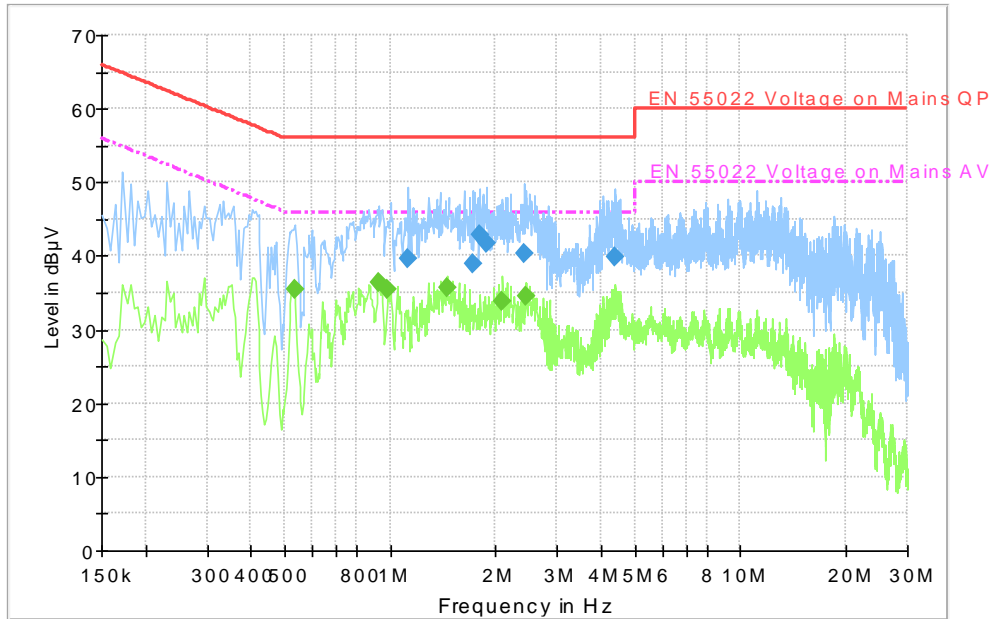


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.122000	39.7	2000.0	9.000	N	10.2	16.3	56.0
1.720500	38.8	2000.0	9.000	N	10.2	17.2	56.0
1.801500	42.9	2000.0	9.000	L1	10.2	13.1	56.0
1.882500	41.8	2000.0	9.000	N	10.3	14.2	56.0
2.422500	40.3	2000.0	9.000	N	10.2	15.7	56.0
4.371000	39.9	2000.0	9.000	L1	10.3	16.1	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.532500	35.5	2000.0	9.000	L1	10.2	10.5	46.0
0.924000	36.3	2000.0	9.000	L1	10.2	9.7	46.0
0.987000	35.4	2000.0	9.000	L1	10.2	10.6	46.0
1.450500	35.6	2000.0	9.000	L1	10.2	10.4	46.0
2.094000	33.9	2000.0	9.000	L1	10.2	12.1	46.0
2.436000	34.6	2000.0	9.000	L1	10.2	11.4	46.0

Set.13 Traffic:

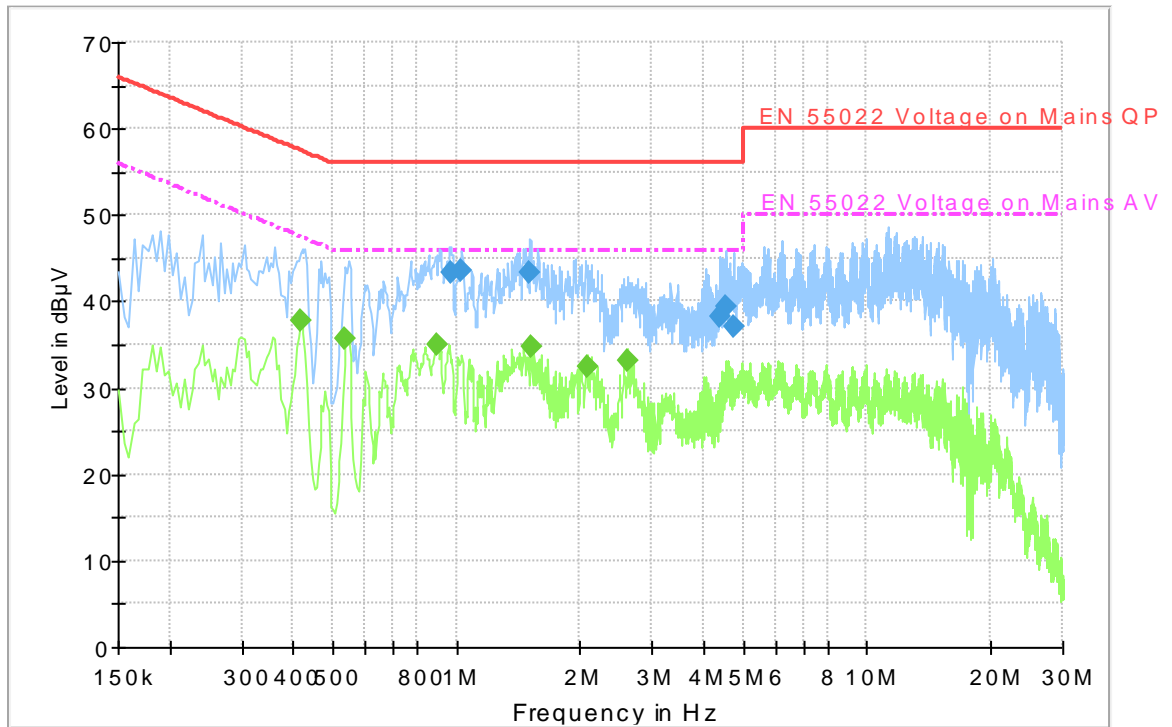

Final Result 1




Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.969000	43.4	2000.0	9.000	L1	10.2	12.6	56.0
1.032000	43.5	2000.0	9.000	L1	10.2	12.5	56.0
1.513500	43.5	2000.0	9.000	L1	10.2	12.5	56.0
4.389000	38.3	2000.0	9.000	L1	10.3	17.7	56.0
4.537500	39.3	2000.0	9.000	L1	10.3	16.7	56.0
4.758000	37.0	2000.0	9.000	L1	10.3	19.0	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.415500	37.8	2000.0	9.000	L1	10.2	9.7	47.5
0.537000	35.6	2000.0	9.000	L1	10.2	10.4	46.0
0.892500	35.1	2000.0	9.000	L1	10.2	10.9	46.0
1.518000	34.7	2000.0	9.000	L1	10.2	11.3	46.0
2.080500	32.4	2000.0	9.000	L1	10.2	13.6	46.0
2.616000	33.2	2000.0	9.000	L1	10.2	12.8	46.0



## ANNEX E: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <hr/> <table border="0" style="width: 100%;"><tr><td style="width: 33%; text-align: center;"><p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p></td><td style="width: 33%; text-align: center;"></td><td style="width: 33%; text-align: center;"> <i>For the National Voluntary Laboratory Accreditation Program</i></td></tr></table>		<p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <i>For the National Voluntary Laboratory Accreditation Program</i>
<p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <i>For the National Voluntary Laboratory Accreditation Program</i>		

\*\*\*END OF REPORT\*\*\*