



TEST REPORT

No. I17Z62177-EMC01

for

TCL Communication Ltd.

LTE/UMTS/GSM mobile phone

Model Name: 5052A

FCC ID: 2ACCJH080

with

Hardware Version: PIO

Software Version: 1BC3

Issued Date: 2018-01-05



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z62177-EMC01	Rev.0	1 st edition	2018-01-05



CONTENTS

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION.....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS.....	12
ANNEX B: ACCREDITATION CERTIFICATE.....	34

1. Test Laboratory

1.1. Testing Location

CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, P. R. China 100176

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-12-19

Testing End Date: 2017-12-23


1.4. Signature



Wang Junqing
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park,
Pudong Area,Shanghai,201203,P.R.China
Contact Person: Gong Zhizhou
Contact Email zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park,
Pudong Area,Shanghai,201203,P.R.China
Contact Person: Gong Zhizhou
Contact Email zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE/UMTS/GSM mobile phone
Model Name	5052A
FCC ID	2ACCJH080
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	353245090200332	PIO	1BC3

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	inbuilt
AE2	Battery	/	inbuilt
AE3	Charger	/	17TCT-CH-1323
AE4	Charger	/	16TCT-CH-0631
AE5	Charger	/	17TCT-CH-0179
AE6	Charger	/	17TCT-CH-0677
AE7	USB Cable	/	17TCT-DC-0486
AE8	USB Cable	/	17TCT-DC-0565
AE9	USB Cable	/	17TCT-DC-0315
AE10	USB Cable	/	/
AE16	Charger	/	/
AE17	Charger	/	/

AE1

Model	CAC2900007C1
Manufacturer	BYD
Capacitance	mAh
Nominal voltage	V

AE2

Model	CAC2900009C7
Manufacturer	VEKEN
Capacitance	mAh
Nominal voltage	V

AE3

Model	CBA0058AGAC5
Manufacturer	PUAN
Length of cable	/



AE4	
Model	CBA0058AGAC2
Manufacturer	Ten Pao
Length of cable	/
AE5	
Model	CBA0058AGAD2
Manufacturer	Ten Pao
Length of cable	/
AE6	
Model	CBA0058AAAC2
Manufacturer	Ten Pao
Length of cable	/
AE7, AE8	
Model	CDA3122005C2
Manufacturer	shenghua
Length of cable	m
AE9	
Model	CDA3122005C8
Manufacturer	PUAN
Length of cable	m
AE10	
Model	CDA3122005C1
Manufacturer	Juwei
Length of cable	m
AE16	
Model	CBA0058ACAC2
Manufacturer	Ten Pao
Length of cable	/
AE17	
Model	CBA0058ABAC2
Manufacturer	Ten Pao
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.
Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1/AE2+ AE3+ AE7/AE9/AE10	Charger
Set.2	EUT1+ AE1/AE2+ AE4+ AE7/AE9/AE10	Charger
Set.3	EUT1+ AE1/AE2+ AE5+ AE7/AE9/AE10	Charger
Set.4	EUT1+ AE1/AE2+ AE6+ AE7/AE9/AE10	Charger
Set.5	EUT1+ AE1/AE2+ AE7/AE9/AE10	USB mode

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz – 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(BDA)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(BDA)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	R&S	2018-04-01	1 year
2	Test Receiver	ESCI 7	100344	R&S	2018-03-15	1 year
3	Universal Radio Communication Tester	CMW500	143008	R&S	2018-12-01	1 year
4	Universal Radio Communication Tester	CMW500	155415	R&S	2018-02-15	1 year
5	LISN	ENV216	101200	R&S	2018-08-03	1 year
6	EMI Antenna	VULB 9163	9163-301	Schwarzbeck	2020-12-16	3 years
7	EMI Antenna	3115	6914	ETS-Lindgren	2020-12-15	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
10	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17631.000	39.42	-25.9	41.1	24.2	54.0	14.6	V
17658.000	39.36	-25.5	41.1	23.8	54.0	14.6	H
17595.000	39.26	-25.7	41.1	23.9	54.0	14.7	V
17616.750	39.26	-25.8	41.1	24.0	54.0	14.7	H
17008.500	39.24	-25.6	41.4	23.4	54.0	14.8	H
17639.250	39.24	-25.8	41.1	23.9	54.0	14.8	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16553.250	51.41	-25.9	41.2	36.2	74.0	22.6	V
16761.000	51.22	-26.2	41.5	35.9	74.0	22.8	H
17096.250	51.20	-25.5	41.3	35.4	74.0	22.8	V
17078.250	51.12	-25.5	41.3	35.3	74.0	22.9	H
17788.500	51.09	-23.3	41.0	33.5	74.0	22.9	H
17605.500	51.01	-25.8	41.1	35.7	74.0	23.0	H

Measurement results for Set.2:

Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16944.750	39.35	-25.7	41.4	23.6	54.0	14.7	V
17568.000	39.31	-25.6	41.1	23.8	54.0	14.7	H
17577.000	39.29	-25.7	41.1	23.8	54.0	14.7	V
17946.750	39.29	-24.8	40.8	23.3	54.0	14.7	H
17616.750	39.29	-25.8	41.1	24.0	54.0	14.7	H
17655.000	39.29	-25.5	41.1	23.7	54.0	14.7	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17952.750	52.09	-24.9	40.8	36.2	74.0	21.9	V
16164.000	51.93	-25.7	40.6	37.0	74.0	22.1	H
17938.500	51.49	-24.7	40.8	35.4	74.0	22.5	V
16656.000	51.21	-26.0	41.4	35.9	74.0	22.8	H
17577.000	51.14	-25.7	41.1	35.7	74.0	22.9	H
17550.750	50.95	-25.6	41.2	35.3	74.0	23.1	H

Measurement results for Set.3:

Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17585.250	39.40	-25.7	41.1	24.0	54.0	14.6	V
17565.750	39.39	-25.6	41.1	23.9	54.0	14.6	H
17635.500	39.36	-25.9	41.1	24.1	54.0	14.6	V
17652.000	39.33	-25.6	41.1	23.8	54.0	14.7	H
17618.250	39.32	-25.8	41.1	24.1	54.0	14.7	H
16946.250	39.29	-25.7	41.4	23.5	54.0	14.7	H

Charging Mode/ Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17649.000	51.16	-25.6	41.1	35.7	74.0	22.8	V
16942.500	51.15	-25.7	41.4	35.4	74.0	22.9	H
16773.750	51.09	-26.2	41.5	35.8	74.0	22.9	V
16995.750	51.00	-25.6	41.4	35.2	74.0	23.0	H
17928.000	51.00	-24.6	40.9	34.7	74.0	23.0	H
16181.250	50.91	-25.6	40.6	36.0	74.0	23.1	H

Measurement results for Set.4:

Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17954.250	39.31	-24.9	40.8	23.4	54.0	14.7	V
17618.250	39.30	-25.8	41.1	24.0	54.0	14.7	H
17606.250	39.29	-25.8	41.1	24.0	54.0	14.7	V
17582.250	39.28	-25.7	41.1	23.8	54.0	14.7	H
17574.750	39.28	-25.7	41.1	23.8	54.0	14.7	H
16944.750	39.27	-25.7	41.4	23.5	54.0	14.7	H

Charging Mode/ Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16720.500	51.42	-26.1	41.5	36.1	74.0	22.6	V
16823.250	51.40	-26.1	41.5	36.0	74.0	22.6	H
16501.500	51.36	-26.0	41.1	36.2	74.0	22.6	V
17668.500	51.33	-25.3	41.1	35.6	74.0	22.7	H
17815.500	51.22	-23.1	40.9	33.4	74.0	22.8	H
17002.500	51.19	-25.6	41.4	35.4	74.0	22.8	H

Measurement results for Set.5:

USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17616.750	39.50	-25.8	41.1	24.2	54.0	14.5	H
17642.250	39.35	-25.7	41.1	24.0	54.0	14.6	V
17594.250	39.33	-25.7	41.1	23.9	54.0	14.7	H
17616.000	39.31	-25.8	41.1	24.0	54.0	14.7	H
17574.000	39.29	-25.7	41.1	23.8	54.0	14.7	V
17577.750	39.28	-25.7	41.1	23.8	54.0	14.7	H

USB Mode/ Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17675.250	51.48	-25.2	41.1	35.6	74.0	22.5	H
17912.250	51.45	-24.4	40.9	34.9	74.0	22.6	V
16803.000	51.39	-26.2	41.5	36.1	74.0	22.6	H
17154.750	51.36	-25.6	41.3	35.7	74.0	22.6	H
17576.250	51.35	-25.7	41.1	35.9	74.0	22.7	V
16698.750	51.34	-26.1	41.4	36.0	74.0	22.7	H

Note: The measurement results of Set.1, Set.2, Set.3, Set.4 and Set.5 showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.1

15B RE 30MHz-1GHz

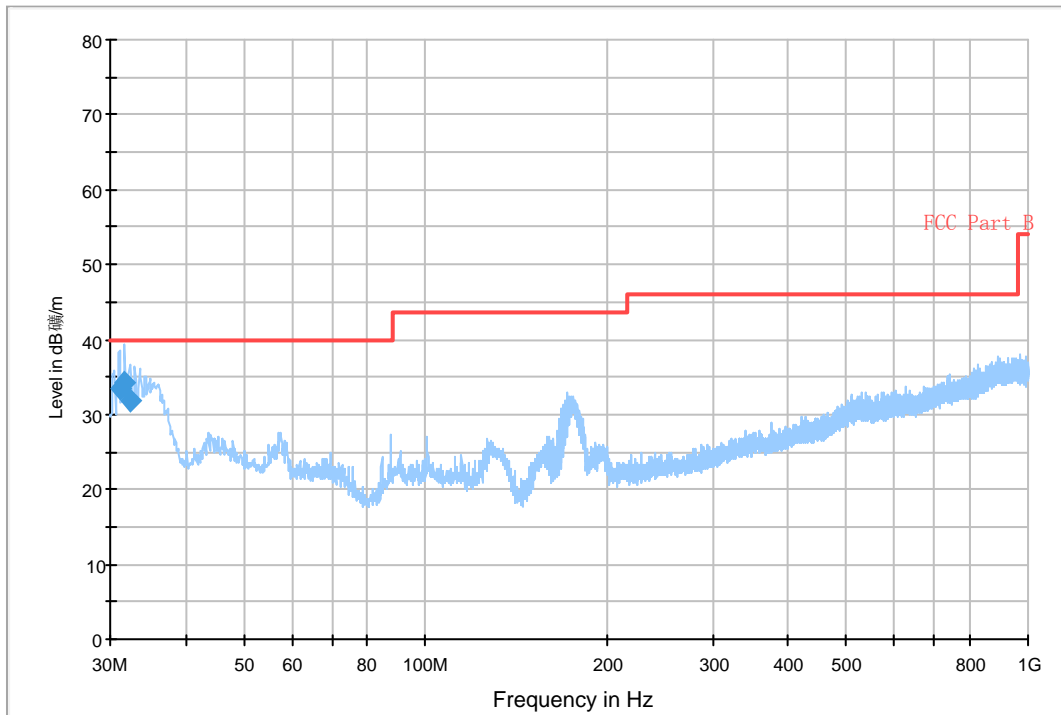


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.067000	33.6	100.0	V	156.0	-2.7	6.4	40.0	
31.649000	34.4	100.0	V	181.0	-2.6	5.6	40.0	
32.425000	31.9	100.0	V	115.0	-2.4	8.1	40.0	

15B RE - 1GHz-3GHz

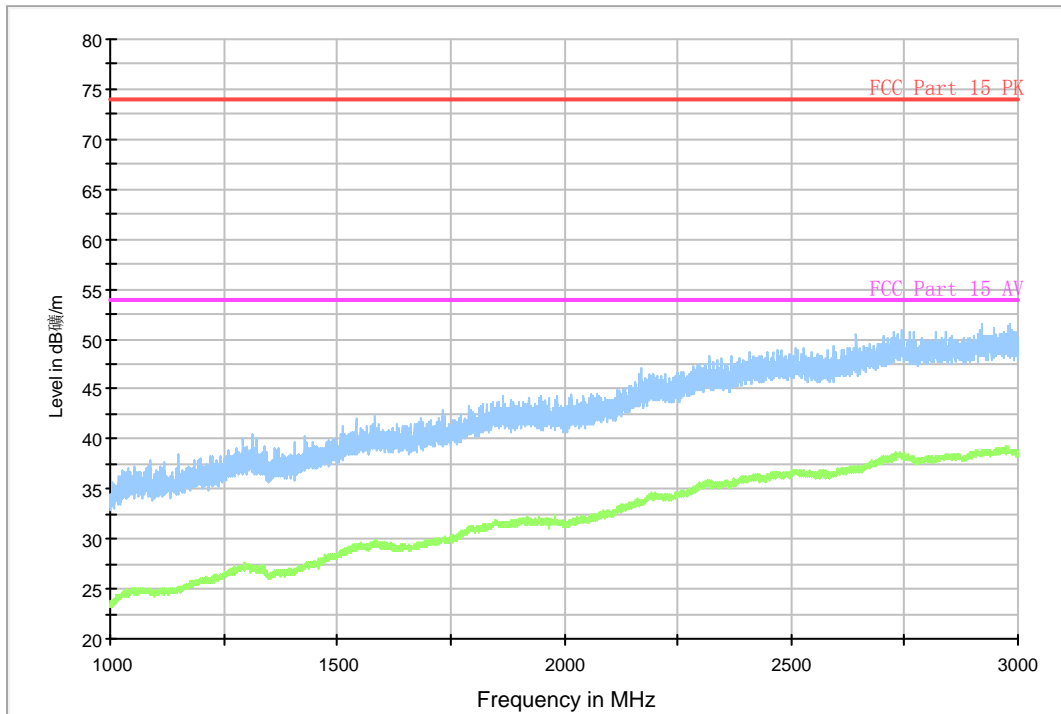


Fig A.2 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

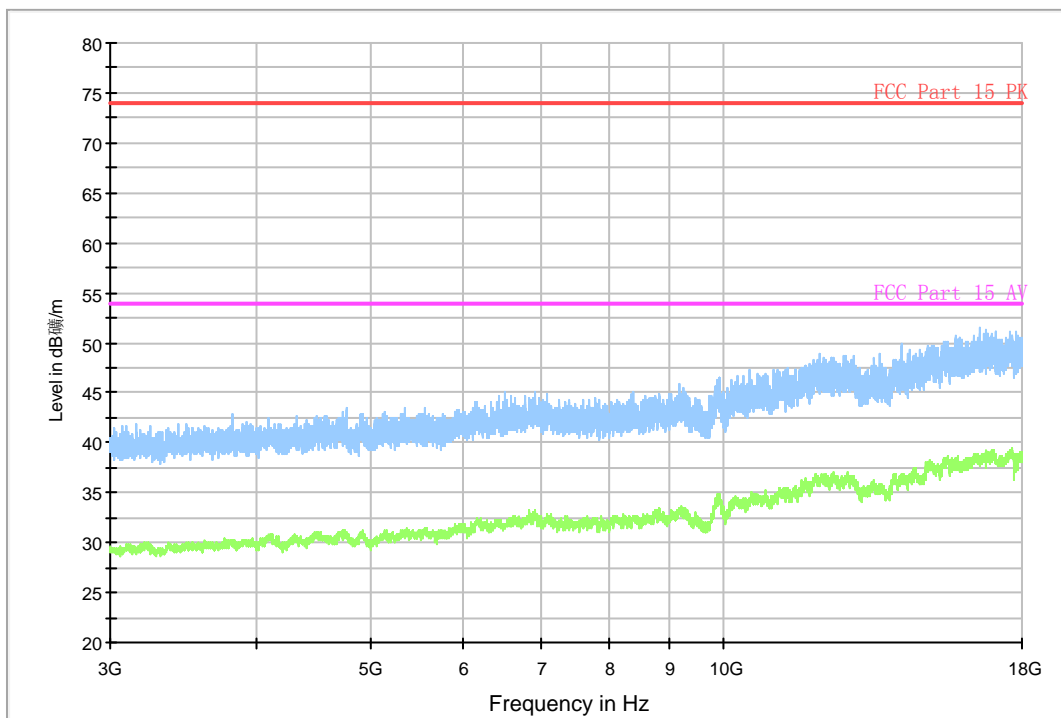


Fig A.3 Radiated Emission from 3GHz to 18GHz

Charging Mode, Set.2

15B RE 30MHz-1GHz

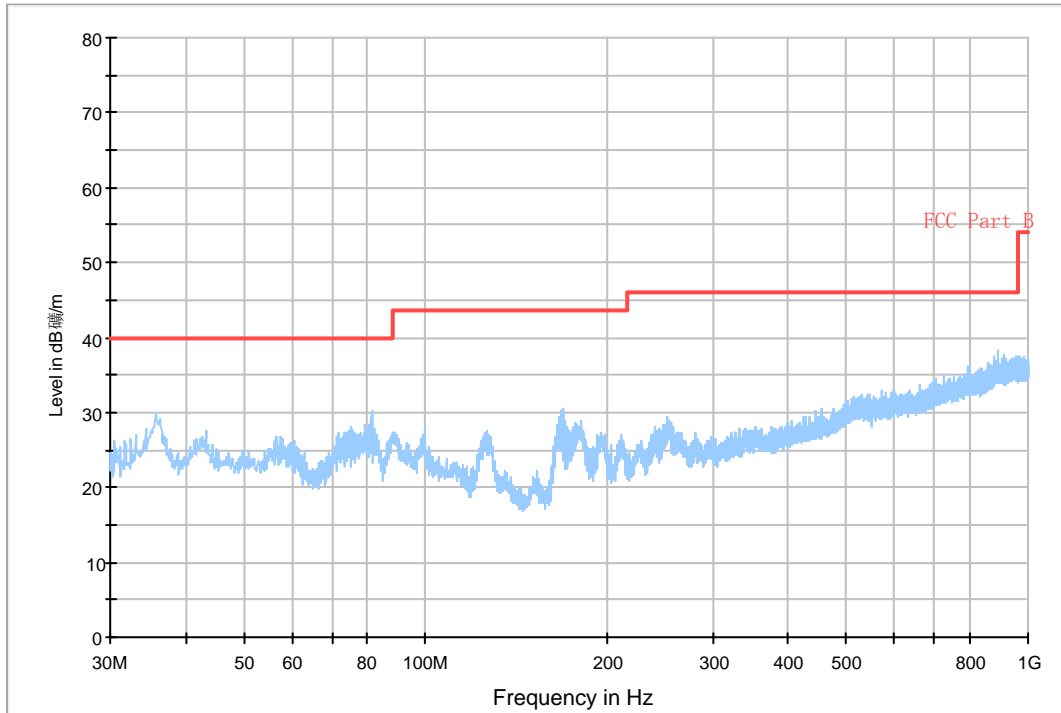


Fig A.4 Radiated Emission from 30MHz to 1GHz

15B RE - 1GHz-3GHz

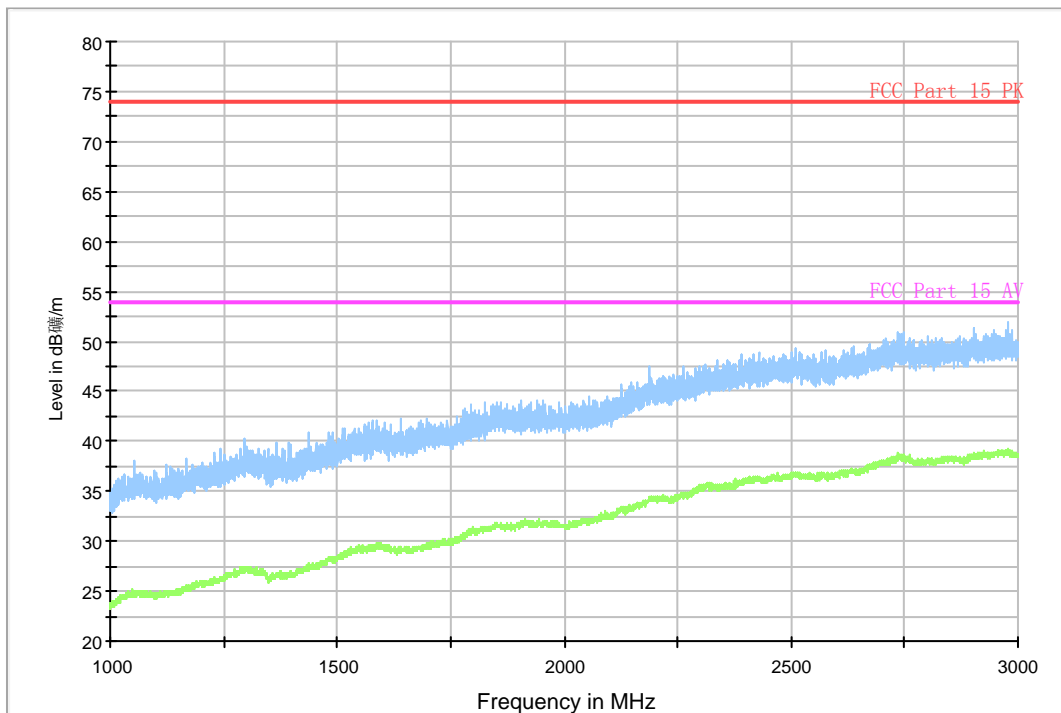


Fig A.5 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

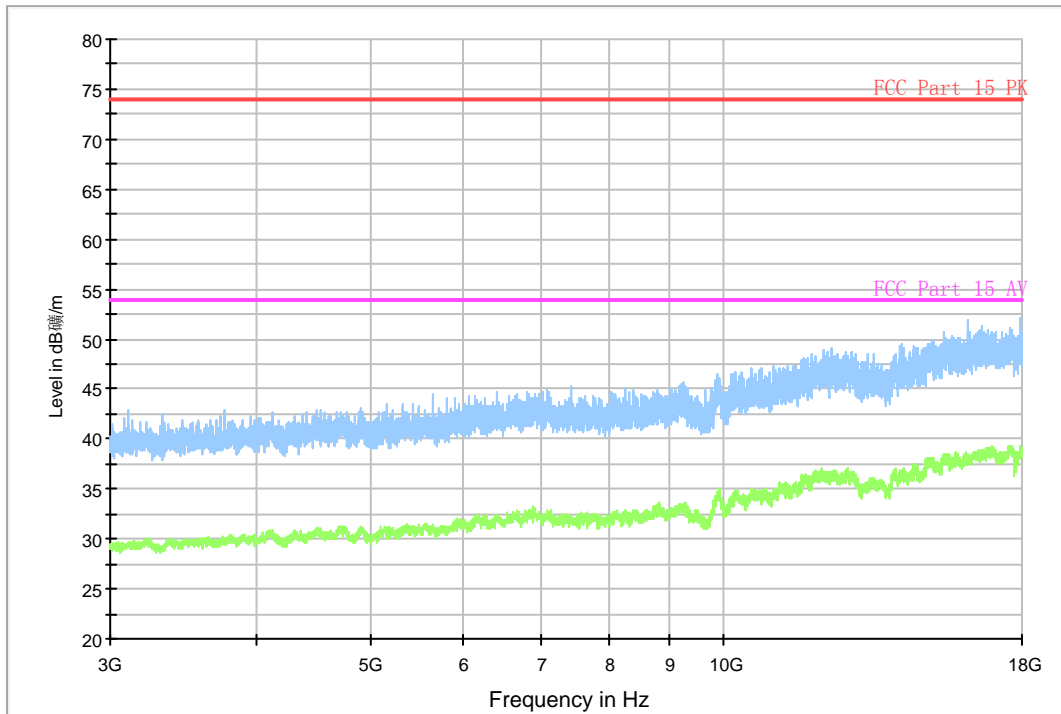


Fig A.6 Radiated Emission from 3GHz to 18GHz

Charging Mode, Set.3

15B RE 30MHz-1GHz

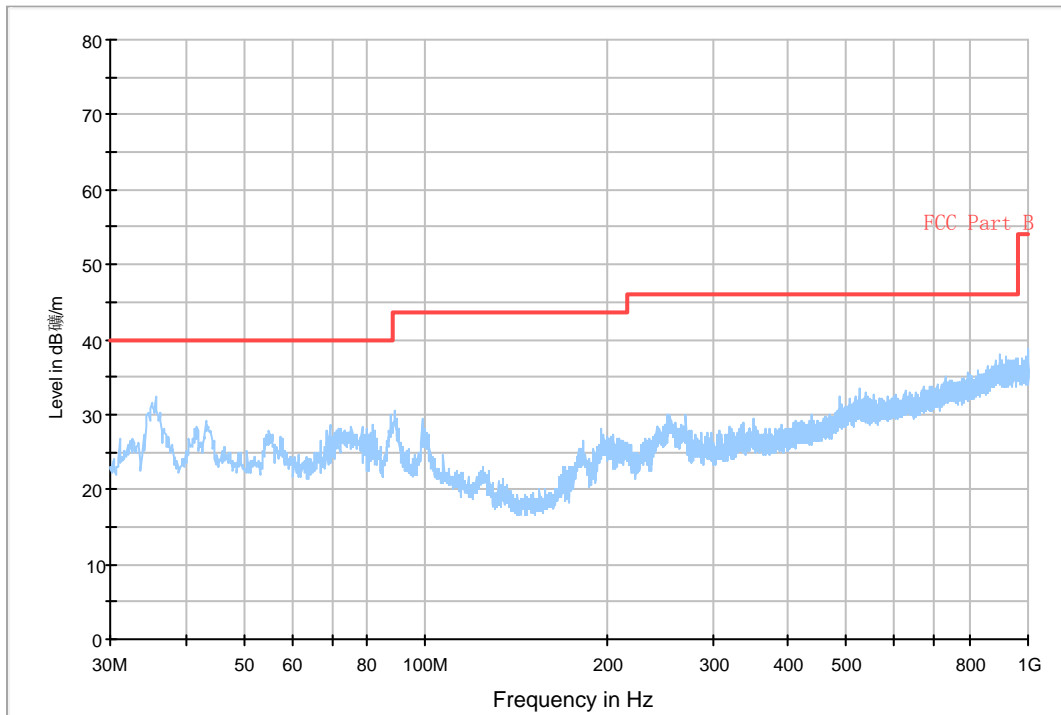


Fig A.7 Radiated Emission from 30MHz to 1GHz

15B RE - 1GHz-3GHz

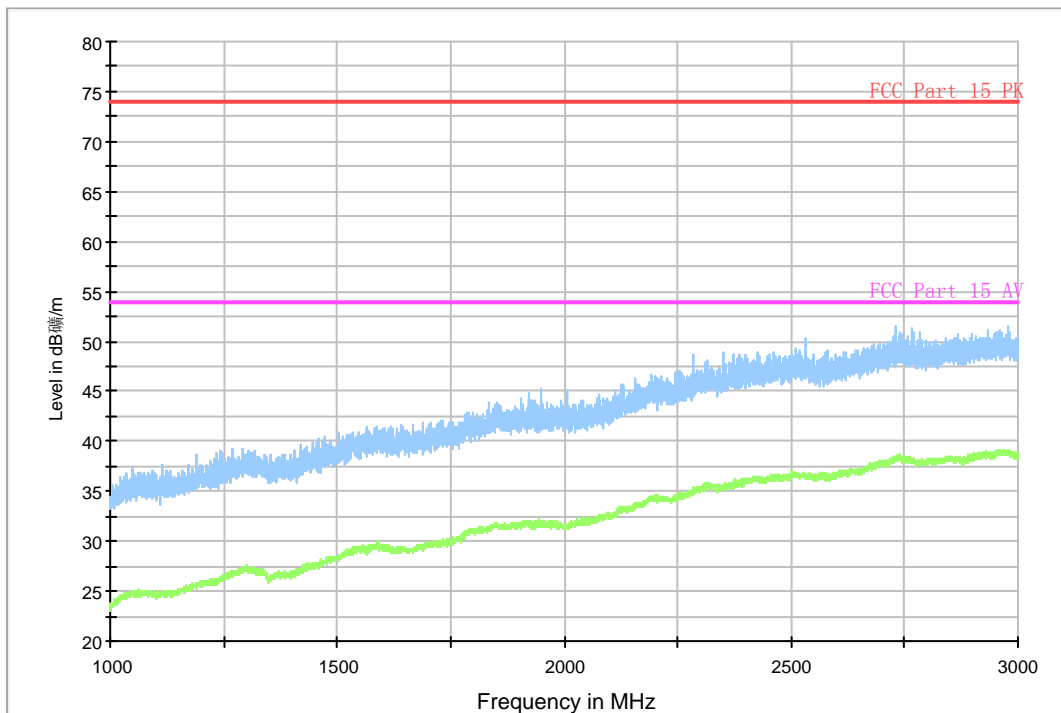


Fig A.8 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

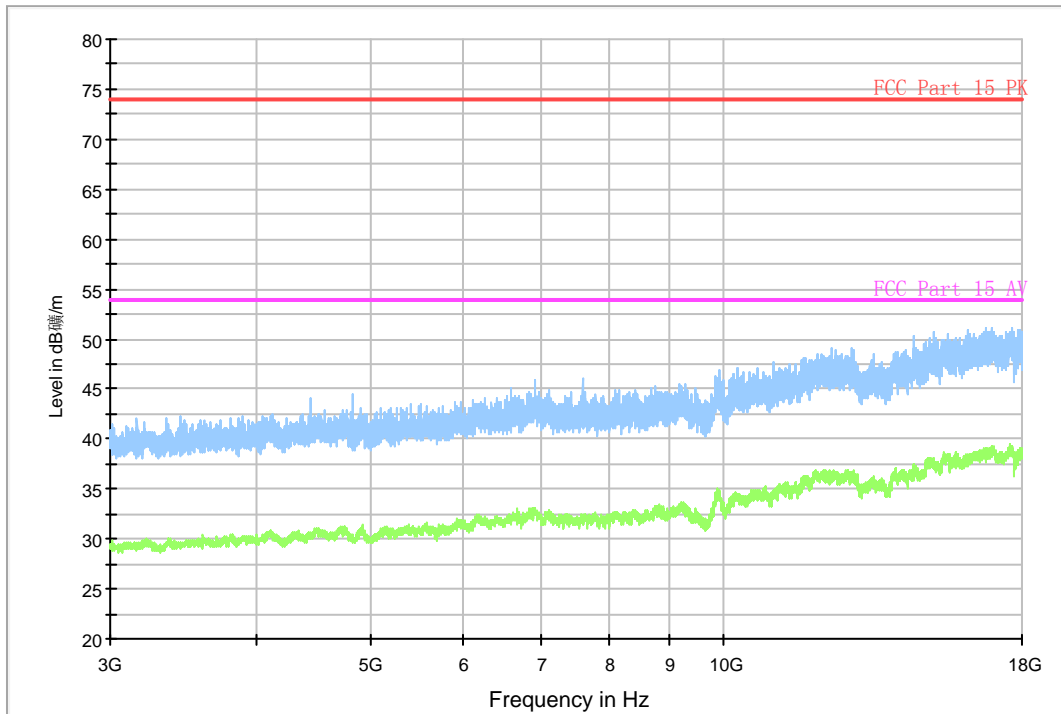


Fig A.9 Radiated Emission from 3GHz to 18GHz

Charging Mode, Set.4

15B RE 30MHz-1GHz

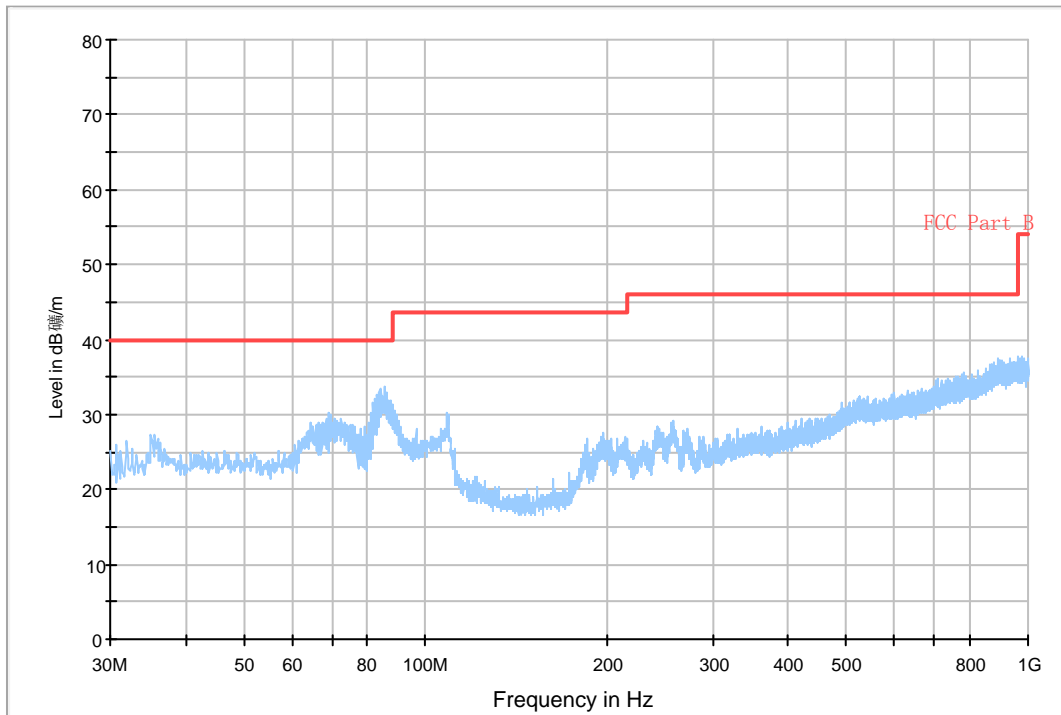


Fig A.10 Radiated Emission from 30MHz to 1GHz

15B RE - 1GHz-3GHz

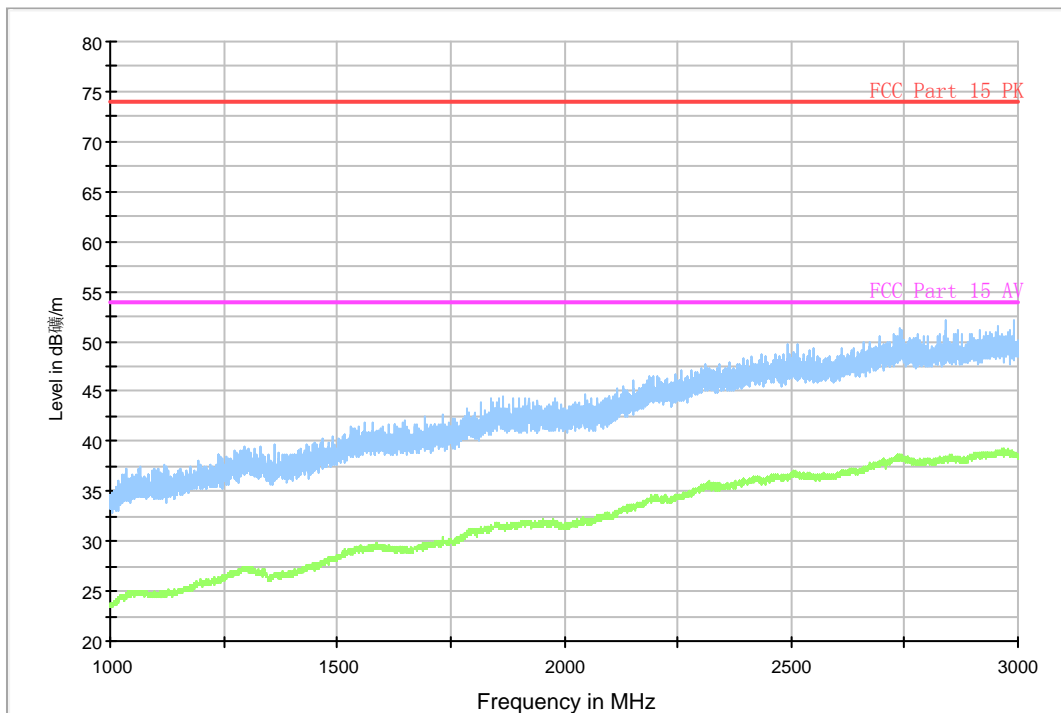


Fig A.11 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

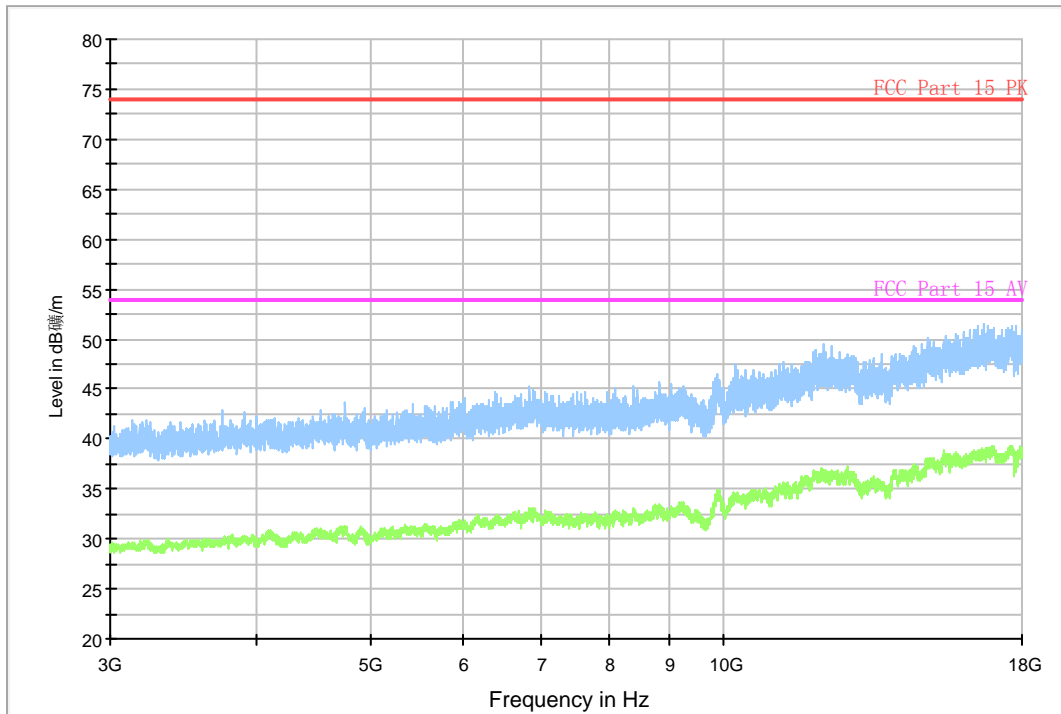


Fig A.12 Radiated Emission from 3GHz to 18GHz

USB Mode, Set.5

15B RE 30MHz-1GHz

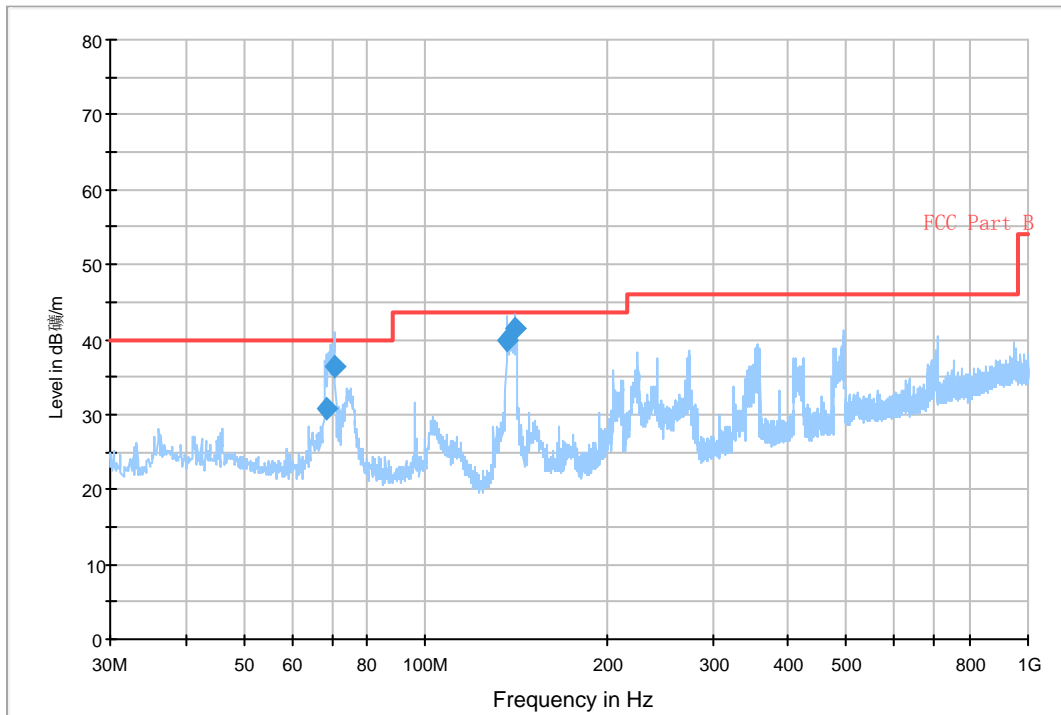


Fig A.13 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
68.509000	30.7	100.0	V	-21.0	-4.2	9.3	40.0	
70.643000	36.3	109.0	V	-21.0	-4.6	3.7	40.0	
136.506000	39.8	125.0	H	263.0	-4.4	3.7	43.5	
140.968000	41.4	125.0	H	10.0	-4.6	2.1	43.5	

15B RE - 1GHz-3GHz

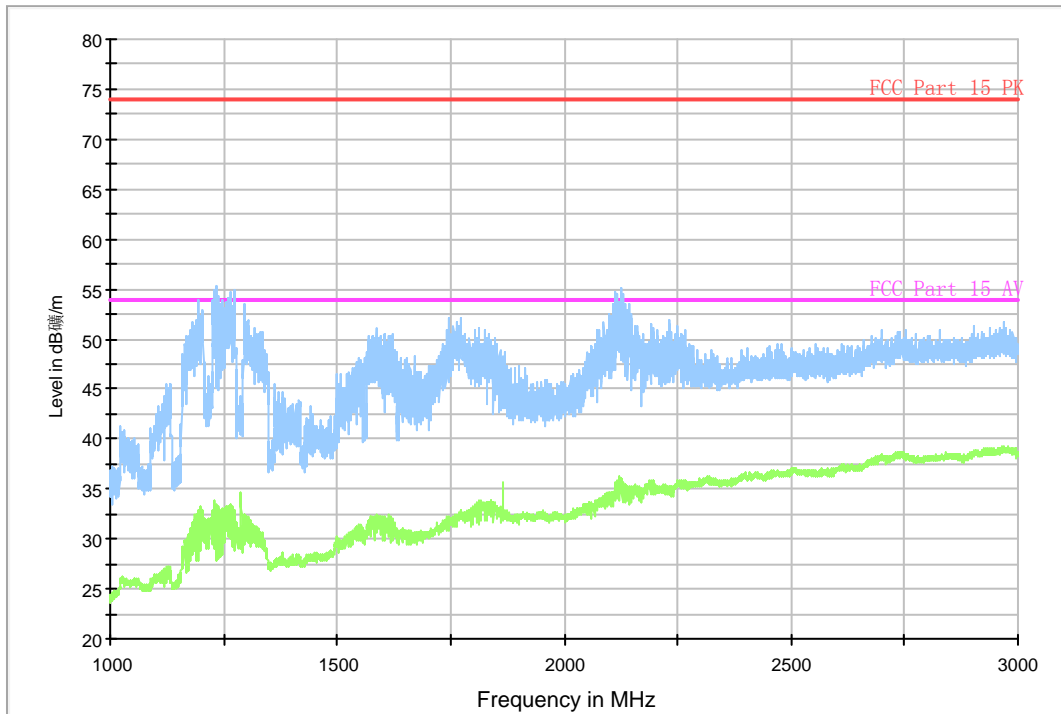


Fig A.14 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

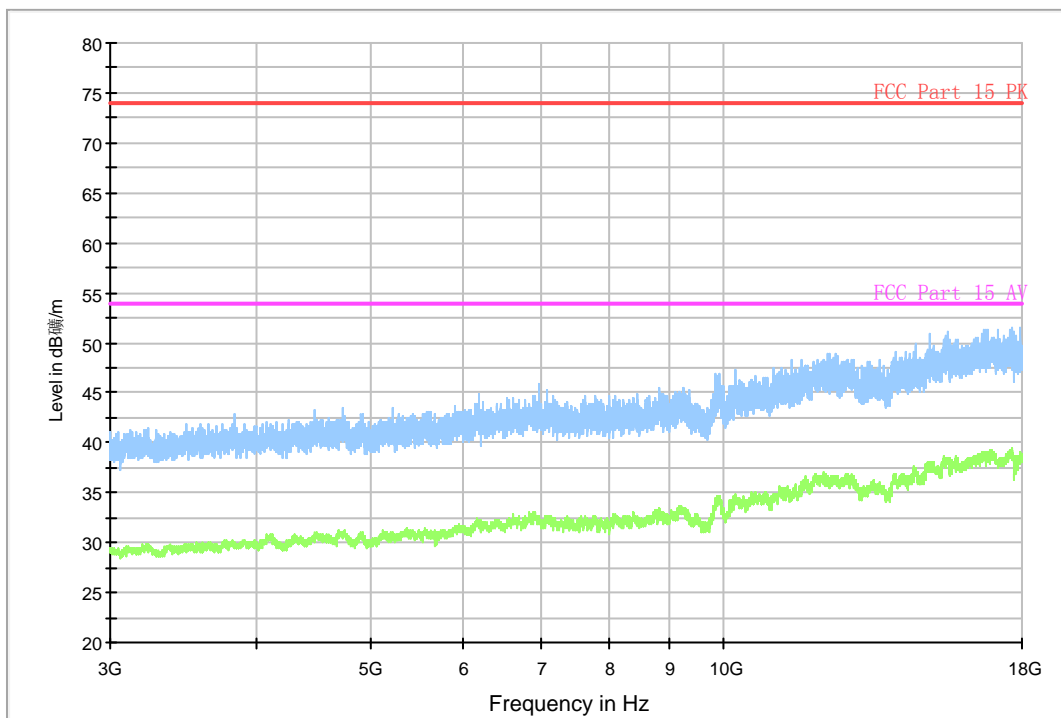


Fig A.15 Radiated Emission from 3GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 2.9$ dB, $k=2$.

Charging Mode, Set.1

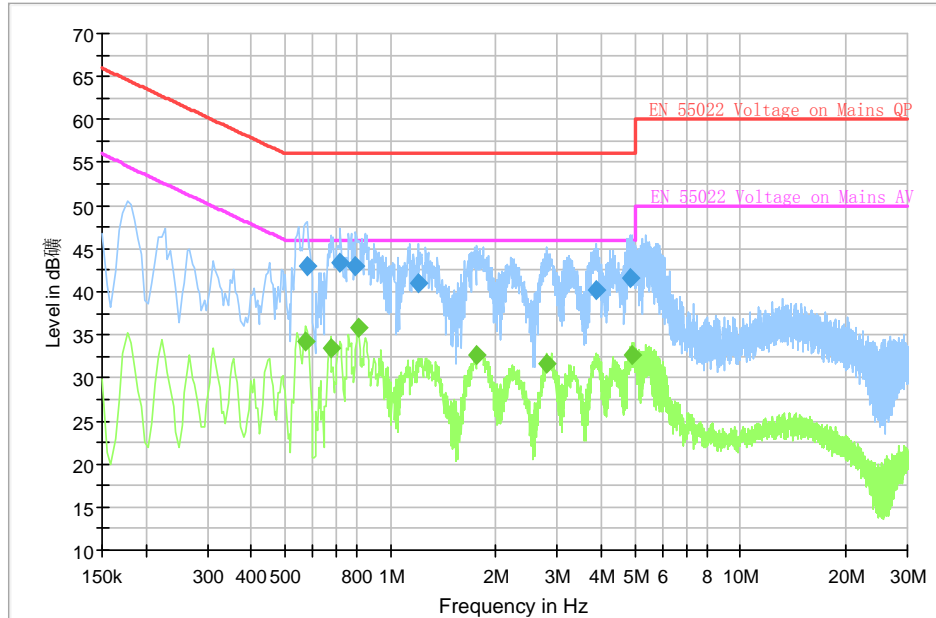


Fig A.16 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.577500	43.0	2000.0	9.000	L1	10.2	13.0	56.0
0.717000	43.5	2000.0	9.000	L1	10.2	12.5	56.0
0.793500	43.0	2000.0	9.000	L1	10.2	13.0	56.0
1.203000	41.0	2000.0	9.000	L1	10.2	15.0	56.0
3.871500	40.3	2000.0	9.000	L1	10.3	15.7	56.0
4.866000	41.7	2000.0	9.000	L1	10.3	14.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.573000	34.3	2000.0	9.000	L1	10.2	11.7	46.0
0.676500	33.4	2000.0	9.000	L1	10.2	12.6	46.0
0.807000	35.8	2000.0	9.000	L1	10.2	10.2	46.0
1.765500	32.6	2000.0	9.000	L1	10.2	13.4	46.0
2.809500	31.8	2000.0	9.000	L1	10.3	14.2	46.0
4.906500	32.7	2000.0	9.000	L1	10.3	13.3	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.2

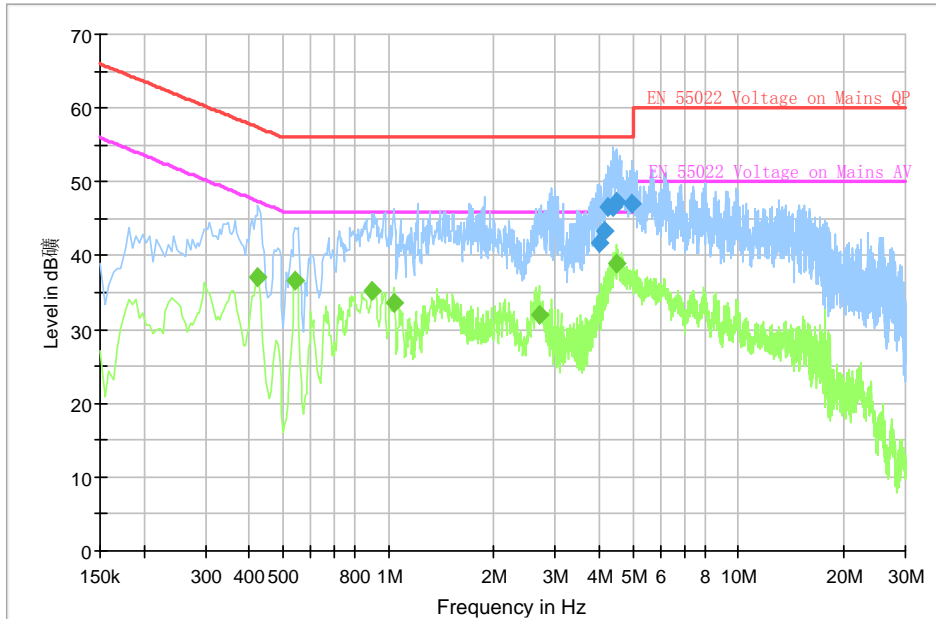


Fig A.17 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.011000	41.8	2000.0	9.000	L1	10.3	14.2	56.0
4.146000	43.2	2000.0	9.000	L1	10.3	12.8	56.0
4.236000	46.5	2000.0	9.000	L1	10.3	9.5	56.0
4.371000	46.7	2000.0	9.000	L1	10.3	9.3	56.0
4.506000	47.4	2000.0	9.000	L1	10.3	8.6	56.0
4.956000	47.1	2000.0	9.000	L1	10.3	8.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.424500	37.1	2000.0	9.000	L1	10.2	10.2	47.4
0.541500	36.6	2000.0	9.000	L1	10.2	9.4	46.0
0.901500	35.1	2000.0	9.000	L1	10.2	10.9	46.0
1.036500	33.6	2000.0	9.000	L1	10.2	12.4	46.0
2.697000	32.0	2000.0	9.000	L1	10.2	14.0	46.0
4.479000	39.0	2000.0	9.000	L1	10.3	7.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.3

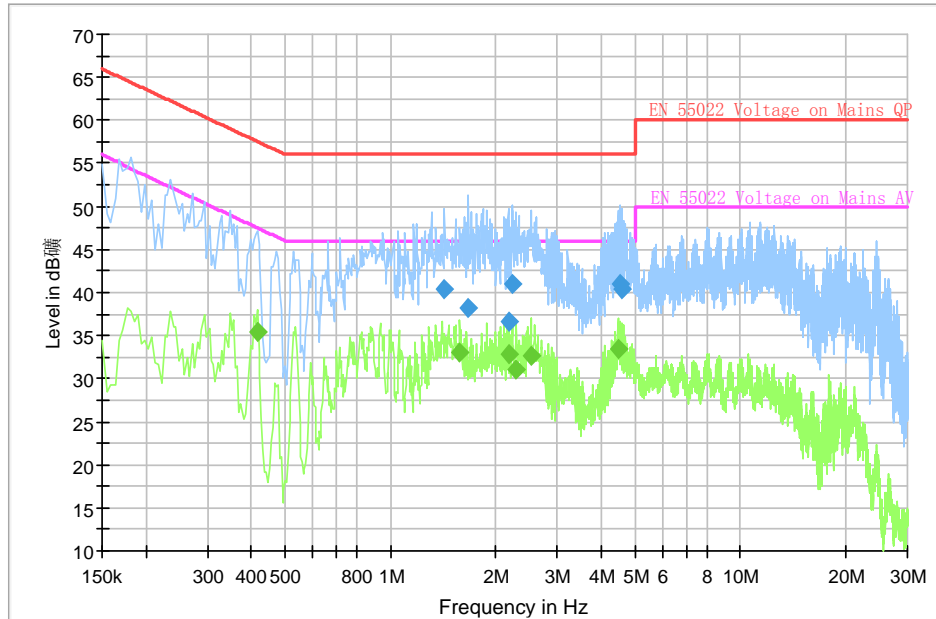


Fig A.18 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.428000	40.4	2000.0	9.000	N	10.2	15.6	56.0
1.671000	38.3	2000.0	9.000	N	10.2	17.7	56.0
2.170500	36.6	2000.0	9.000	N	10.2	19.4	56.0
2.224500	40.9	2000.0	9.000	L1	10.2	15.1	56.0
4.519500	40.9	2000.0	9.000	L1	10.3	15.1	56.0
4.578000	40.4	2000.0	9.000	L1	10.3	15.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.415500	35.4	2000.0	9.000	L1	10.2	12.2	47.5
1.581000	33.1	2000.0	9.000	L1	10.2	12.9	46.0
2.175000	32.8	2000.0	9.000	L1	10.2	13.2	46.0
2.292000	31.1	2000.0	9.000	L1	10.2	14.9	46.0
2.526000	32.6	2000.0	9.000	L1	10.2	13.4	46.0
4.461000	33.5	2000.0	9.000	L1	10.3	12.5	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.4

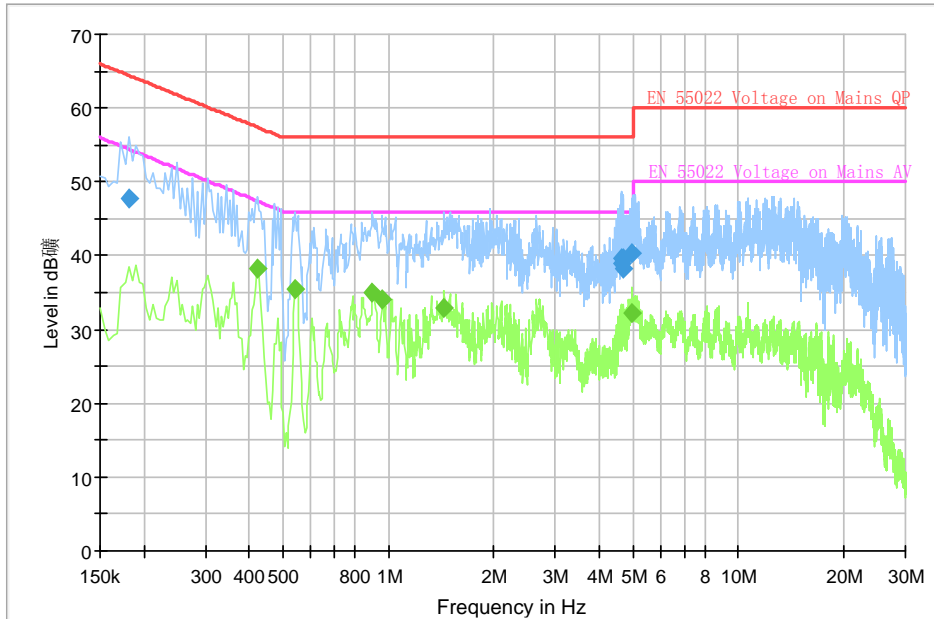


Fig A.19 Conducted Emission

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	47.7	2000.0	9.000	N	10.1	16.7	64.4
4.632000	39.7	2000.0	9.000	L1	10.3	16.3	56.0
4.650000	38.9	2000.0	9.000	L1	10.3	17.1	56.0
4.690500	39.6	2000.0	9.000	L1	10.3	16.4	56.0
4.708500	38.2	2000.0	9.000	L1	10.3	17.8	56.0
4.951500	40.3	2000.0	9.000	L1	10.3	15.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	38.3	2000.0	9.000	L1	10.2	9.2	47.4
0.541500	35.4	2000.0	9.000	L1	10.2	10.6	46.0
0.901500	35.0	2000.0	9.000	L1	10.2	11.0	46.0
0.960000	34.1	2000.0	9.000	L1	10.2	11.9	46.0
1.441500	33.0	2000.0	9.000	L1	10.2	13.0	46.0
4.951500	32.2	2000.0	9.000	L1	10.3	13.8	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.5

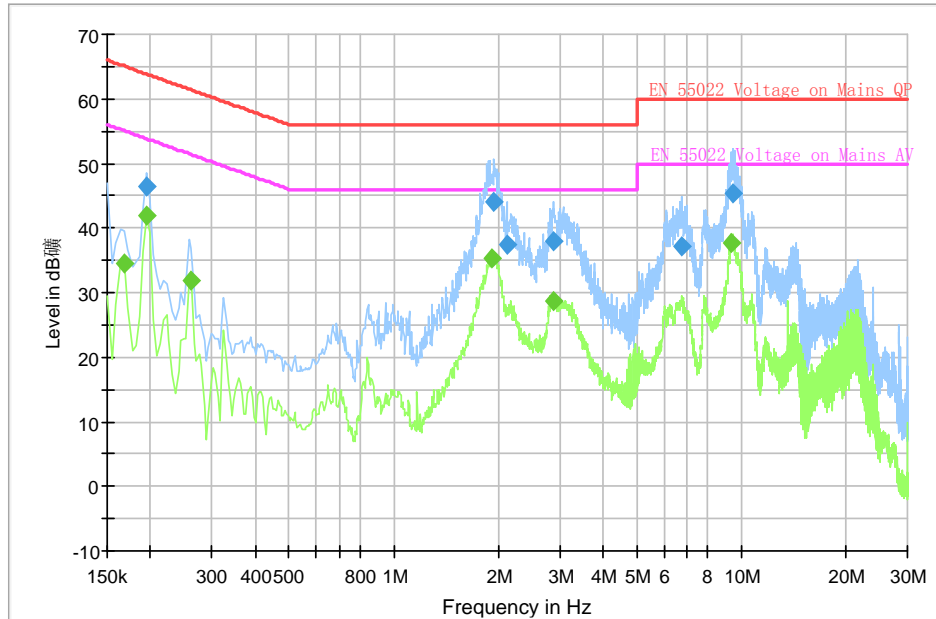

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.195000	46.5	2000.0	9.000	N	10.2	17.3	63.8
1.945500	44.0	2000.0	9.000	L1	10.2	12.0	56.0
2.112000	37.5	2000.0	9.000	N	10.2	18.5	56.0
2.877000	38.0	2000.0	9.000	N	10.3	18.0	56.0
6.706500	37.0	2000.0	9.000	L1	10.4	23.0	60.0
9.487500	45.4	2000.0	9.000	L1	10.5	14.6	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	34.6	2000.0	9.000	L1	10.1	20.4	55.1
0.195000	42.0	2000.0	9.000	N	10.2	11.9	53.8
0.262500	32.0	2000.0	9.000	L1	10.1	19.4	51.4
1.923000	35.4	2000.0	9.000	L1	10.2	10.6	46.0
2.881500	28.7	2000.0	9.000	L1	10.3	17.3	46.0
9.379500	37.8	2000.0	9.000	N	10.5	12.2	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

ANNEX B: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0


Telecommunication Technology Labs, CAICT
Beijing
China


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2016-09-29 through 2017-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT