



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. I17Z62177-IOT02**

**for**

**TCL Communication Ltd.**

**LTE/UMTS/GSM mobile phone**

**Model Name: 5052A**

**FCC ID:2ACCJH080**

**with**

**Hardware Version:PIO**

**Software Version:1BC3**

**Issued Date: 2018-1-5**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email:[ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website:[www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I17Z62177-IOT02	Rev.0	1st edition	2018-1-5



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. TESTING LOCATION .....	5
1.2. TESTING ENVIRONMENT .....	5
1.3. PROJECT DATA .....	5
1.4. SIGNATURE .....	5
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE .....	7
<b>3.4. EUT SET-UPS .....</b>	<b>8</b>
3.5. NORMAL ACCESSORY SETTING .....	8
3.6. GENERAL DESCRIPTION .....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING .....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF TEST RESULTS .....	10
5.2. STATEMENTS .....	10
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. PEAK OUTPUT POWER - CONDUCTED .....	12
7.2. FREQUENCY BAND EDGES .....	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	12
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	12
7.5. 6DB BANDWIDTH .....	12
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	12
7.7. AC POWERLINE CONDUCTED EMISSION .....	13
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>14</b>
A.1. MEASUREMENT METHOD .....	14
A.2. PEAK OUTPUT POWER - CONDUCTED .....	15
A.3. FREQUENCY BAND EDGES - CONDUCTED .....	16
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	18
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	27



A.6. 6dB BANDWIDTH.....	32
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	35
A.8. AC POWERLINE CONDUCTED EMISSION .....	38
<b>ANNEX E: ACCREDITATION CERTIFICATE.....</b>	<b>45</b>

## 1. Test Laboratory

### 1.1. Testing Location

Conducted testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China100191

### 1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2017-12-7

Testing End Date: 2018-1-5

### 1.4. Signature

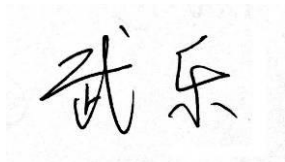

---

Wu Le


(Prepared this test report)



---

Sun Zhenyu

(Reviewed this test report)



---

Lv Songdong

(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address/Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address/Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	LTE/UMTS/GSM mobile phone
Model Name	5052A
FCC ID	2ACCJH080
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	353245090200308	PIO	1BC3
EUT2	353245090200290	PIO	1BC3

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>	<b>Remarks</b>
AE1	Battery	/	inbuilt
AE3	Charger	/	17TCT-CH-1323
AE4	Charger	/	16TCT-CH-0631
AE5	Charger	/	17TCT-CH-0179
AE6	Charger	/	17TCT-CH-0677
AE8	USB Cable	/	17TCT-DC-0565

##### **AE1**

Model	CAC2900007C1
Manufacturer	BYD
Capacitance	mAh
Nominal voltage	V

##### **AE3**

Model	CBA0058AGAC5
Manufacturer	PUAN
Length of cable	/

##### **AE4**

Model	CBA0058AGAC2
Manufacturer	Ten Pao
Length of cable	/



AE5

Model CBA0058AGAD2  
Manufacturer Ten Pao  
Length of cable /

AE6

Model CBA0058AAAC2  
Manufacturer Ten Pao  
Length of cable /

AE8

Model CDA3122005C2  
Manufacturer shenghua  
Length of cable m

\*AE ID: is used to identify the test sample in the lab internally.

**3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.10	EUT1+ AE1+ AE3+ AE8	BT
Set.11	EUT1+ AE1+ AE4+ AE8	BT
Set.12	EUT1+ AE1+ AE5+ AE8	BT
Set.13	EUT1+ AE1+ AE6+ AE8	BT

**3.5. Normal Accessory setting**

Fully charged battery is used during the test.

**3.6. General Description**

The Equipment Under Test (EUT) is a model of LTE/UMTS/GSM mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.



## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2016
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of Test Results

Abbreviations used in this clause:

**P** Pass, The EUT complies with the essential requirements in the standard.

**F** Fail, The EUT does not comply with the essential requirements in the standard

**NA** Not Applicable, The test was not applicable

**NP** Not Performed, The test was not performed by CTTL

<b>SUMMARY OF MEASUREMENT RESULTS</b>	<b>Sub-clause</b>	<b>Verdict</b>
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	<b>P</b>
Frequency Band Edges	15.247 (d)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2018-09-30
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2018-08-03
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2018-03-05
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESCI 7	100948	Rohde & Schwarz	1 year	2018-07-25
2	Loop antenna	HFH2-Z2	829324/00 7	Rohde & Schwarz	3 years	2019-01-13
3	BiLog Antenna	VULB9163	235	Schwarzbeck	3 years	2019-05-10
4	Dual-Ridge Waveguide Horn Antenna	3117	6914	EMCO	3 years	2020-12-15
5	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2020-05-31
6	Vector Signal Analyzer	FSV	101047	Rohde & Schwarz	1 year	2018-06-27

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### 7.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

### 7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------



## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty(k=2)	3.38dB
------------------------------	--------


## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **A.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

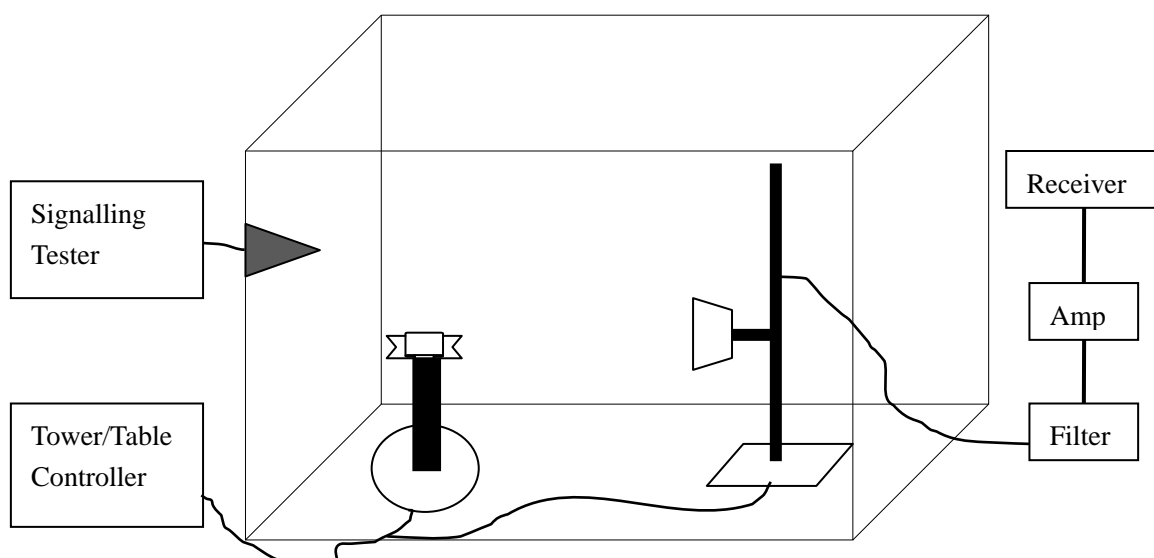

## A.2. Peak Output Power - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

### Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
0	2402	0.00	P
19	2440	0.06	P
39	2480	-0.49	P

**Conclusion: PASS**

### A.3. Frequency Band Edges - Conducted

**Method of Measurement:** See ANSI C63.10-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW=100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20

**Measurement Result:**

For GFSK

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-54.67	P
39	2480	Hopping OFF	Fig.2	-56.57	P

**Conclusion: PASS**



Test graphs as below

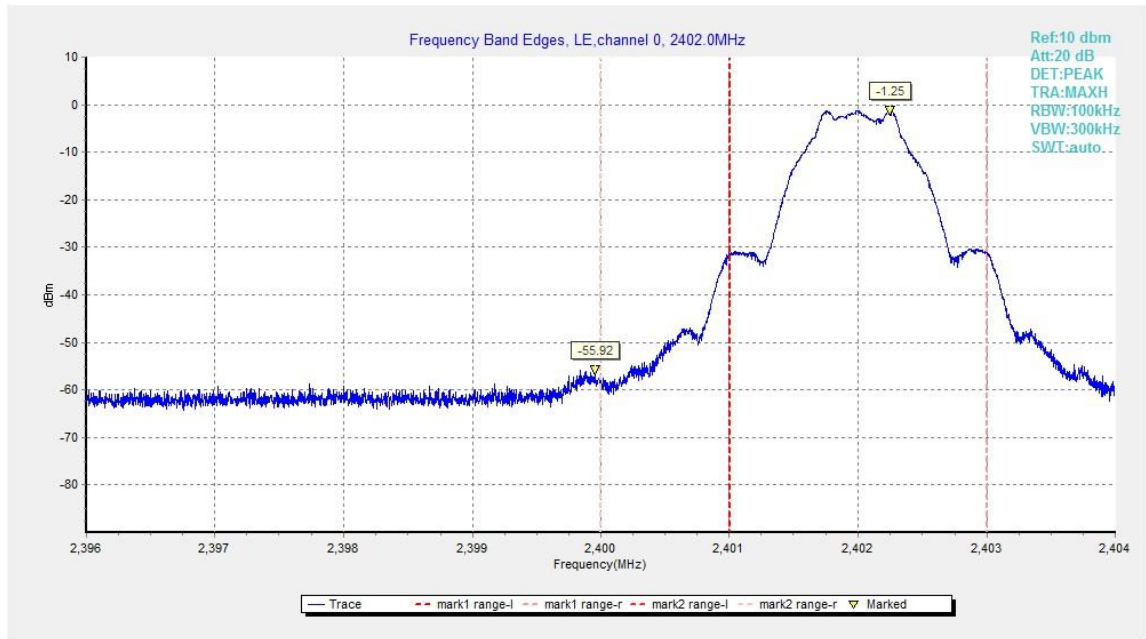


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

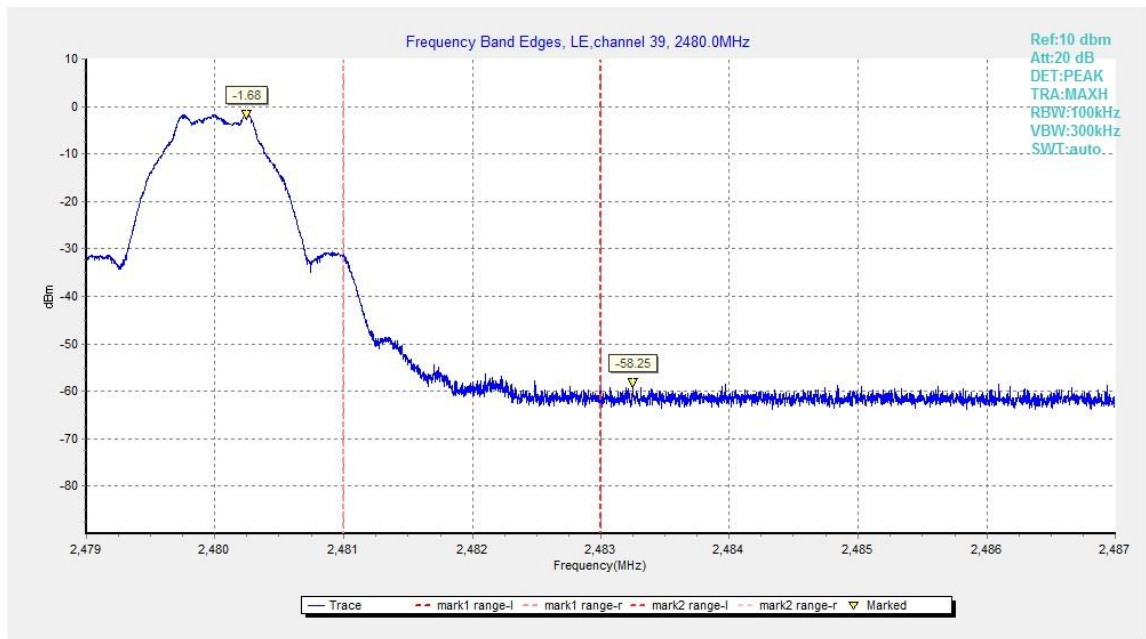


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off



#### A.4. Transmitter Spurious Emission-Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.11.2 and clause 11.11.3

##### Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

##### Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
  2. Set VBW = 300 kHz.
  3. Set span to encompass the spectrum to be examined.
  4. Detector = peak.
  5. Trace Mode = max hold.
  6. Sweep = auto couple.
  7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

##### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:  
For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**

**Test graphs as below**

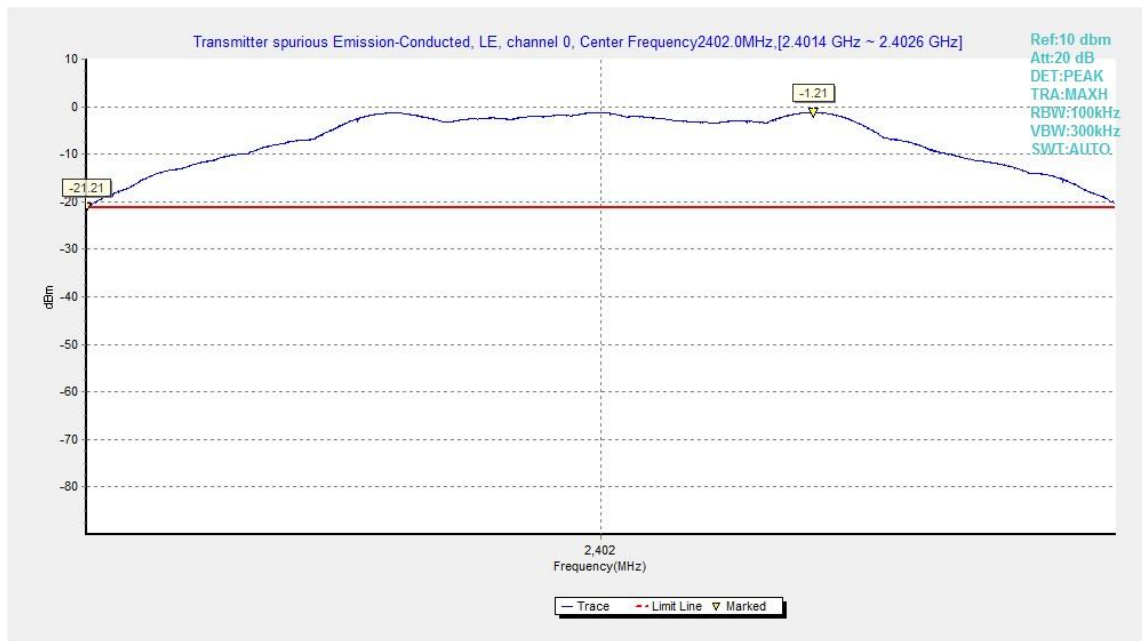


Fig.3. Transmitter Spurious Emission -Conducted: GFSK,2402MHz

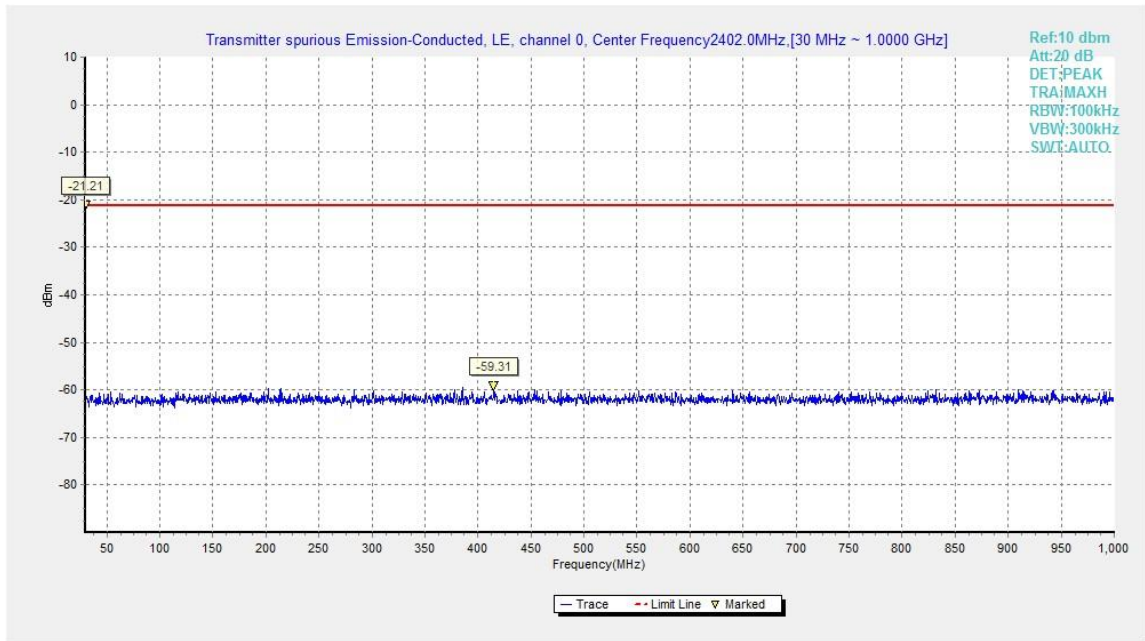


Fig.4. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

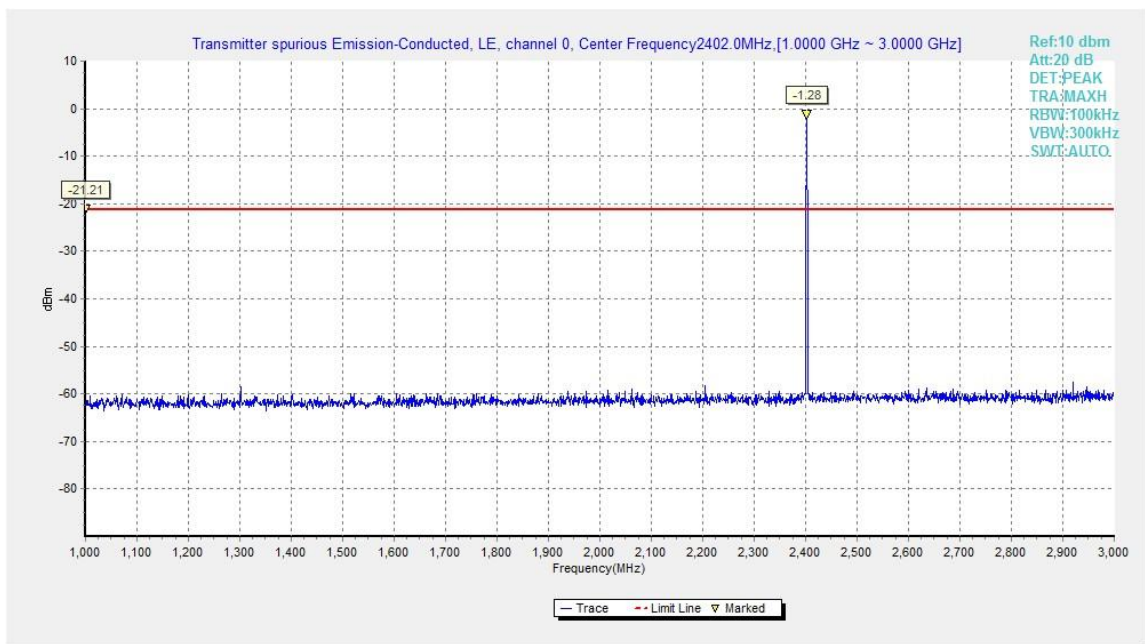


Fig.5. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

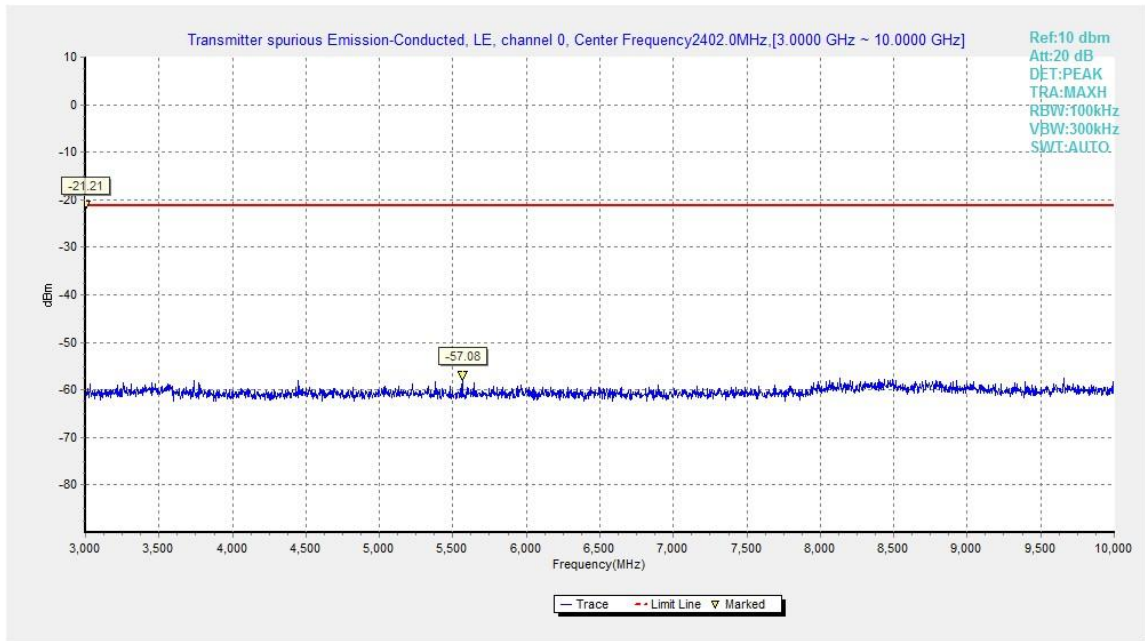


Fig.6. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz,3GHz - 10GHz

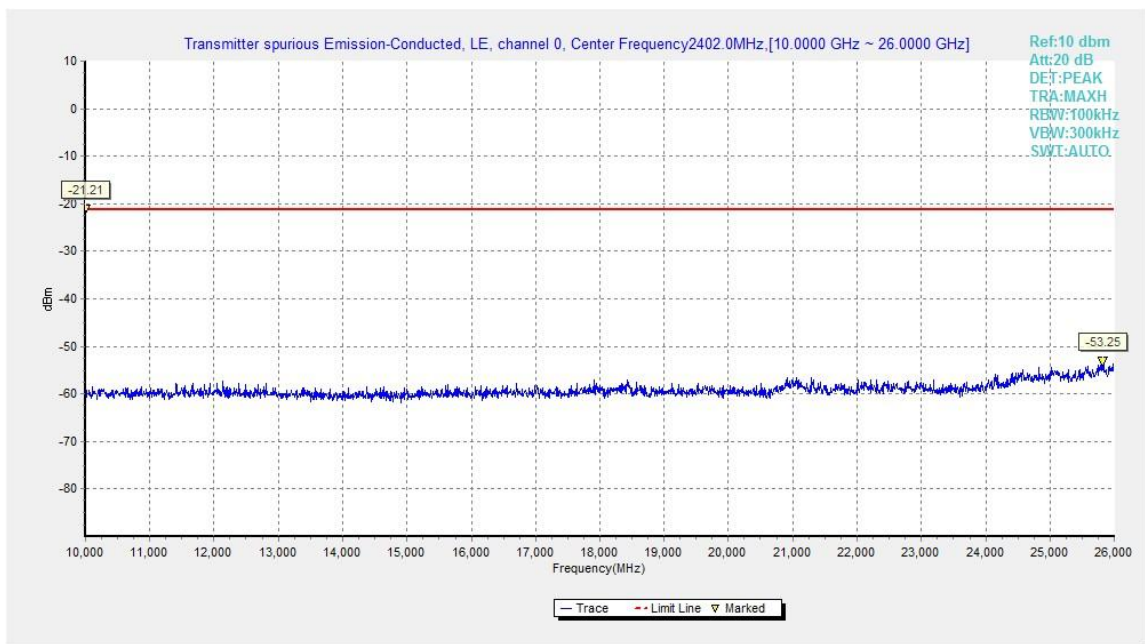


Fig.7. Transmitter Spurious Emission -Conducted: GFSK, 2402 MHz,10GHz - 26GHz



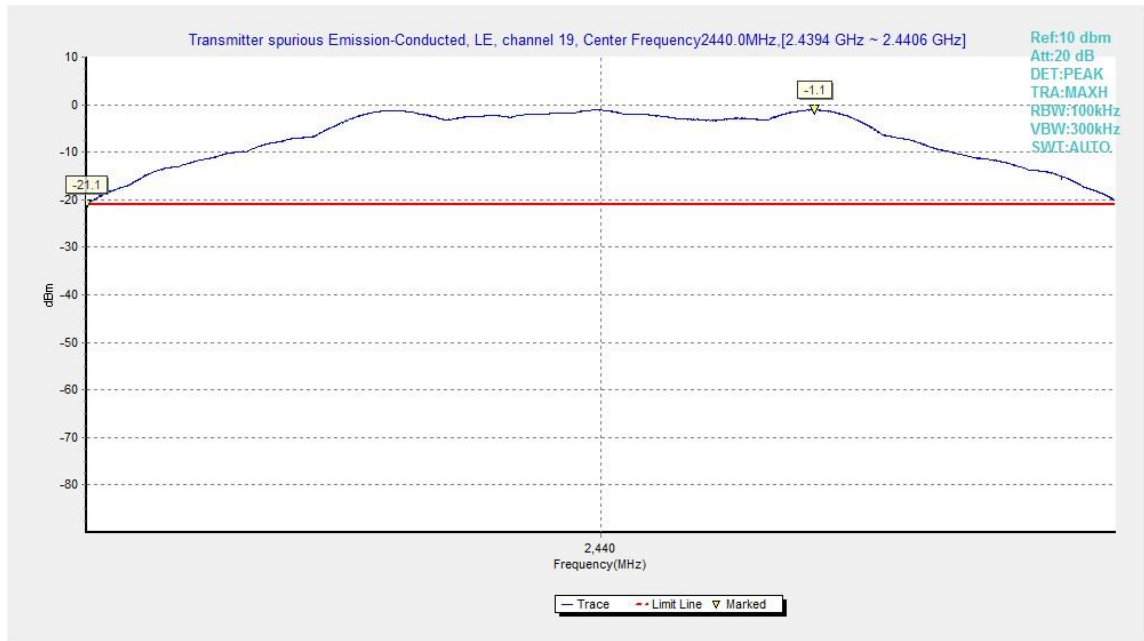


Fig.8. Transmitter Spurious Emission -Conducted: GFSK, 2440MHz

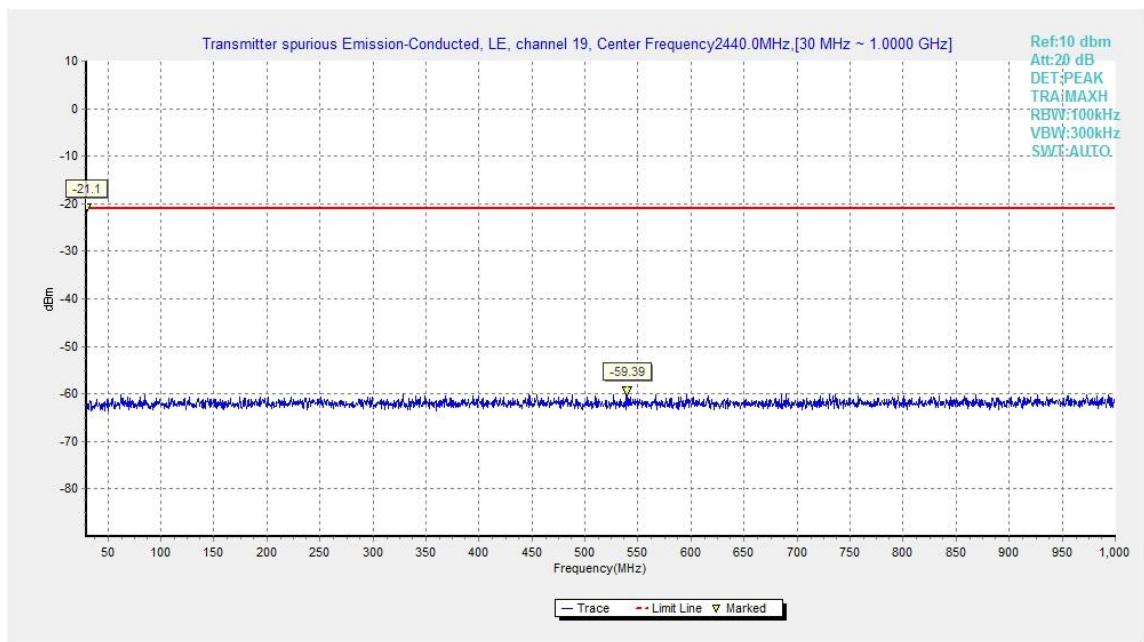


Fig.9. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

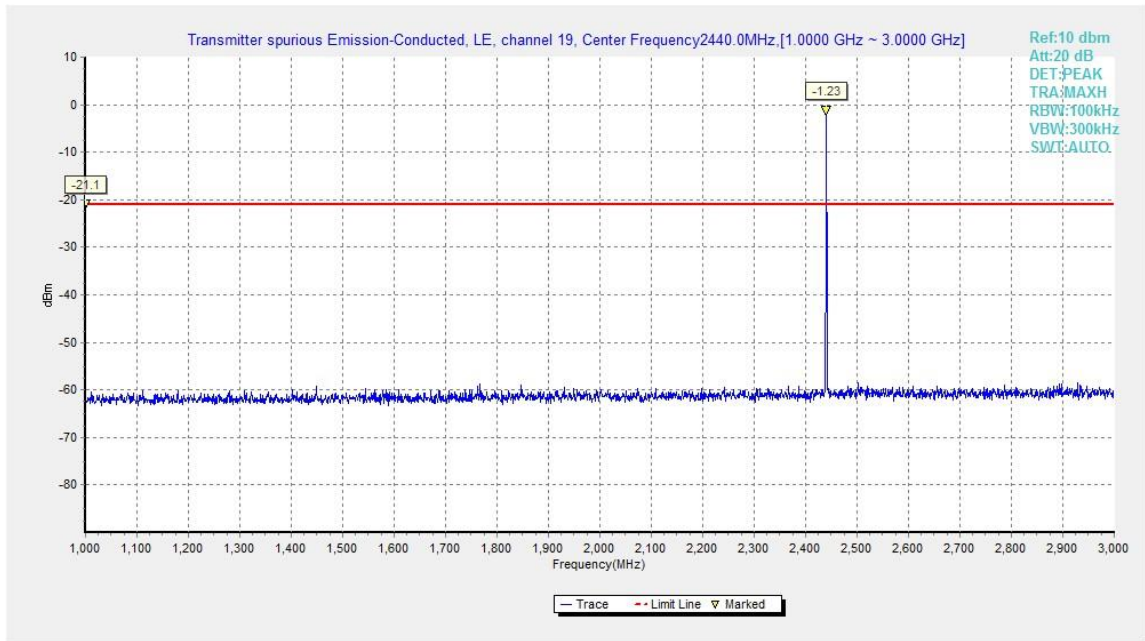


Fig.10. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

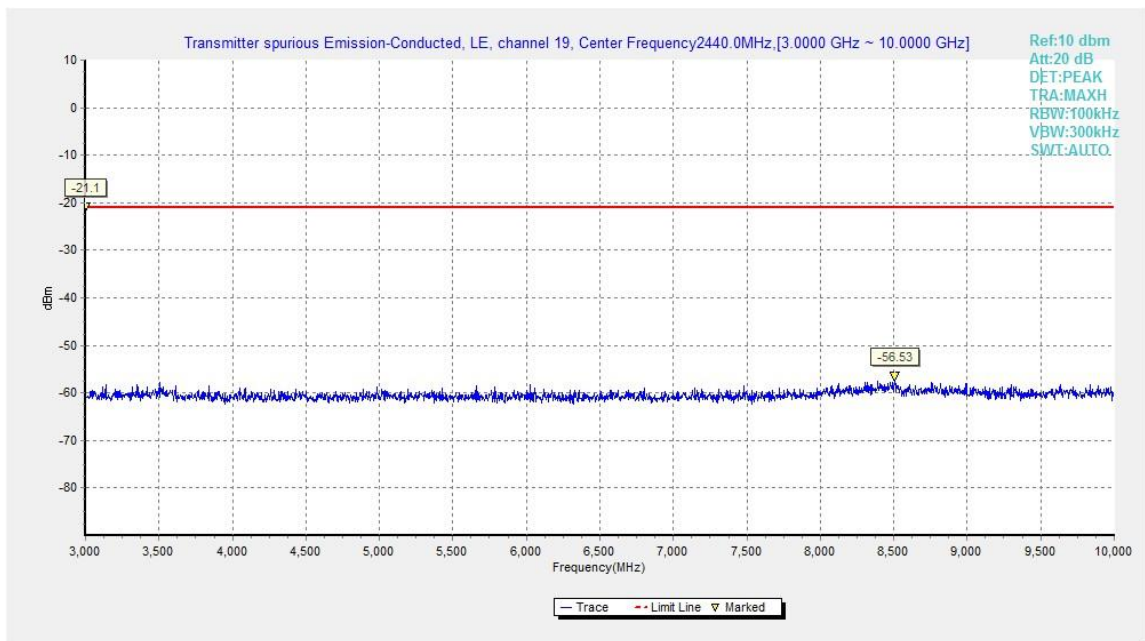


Fig.11. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

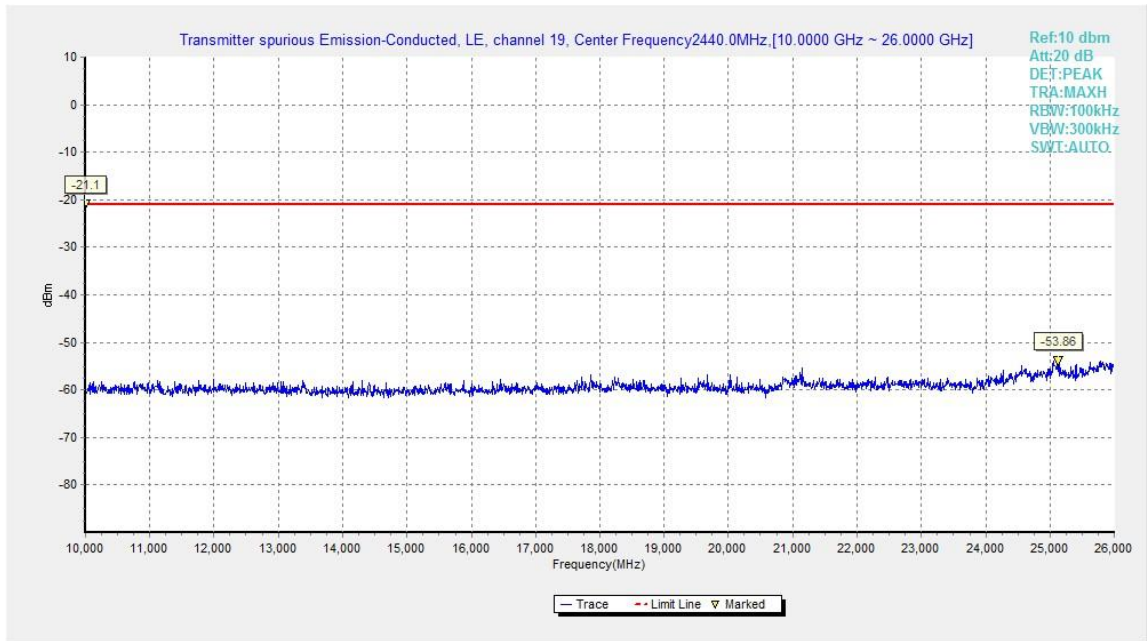


Fig.12. Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

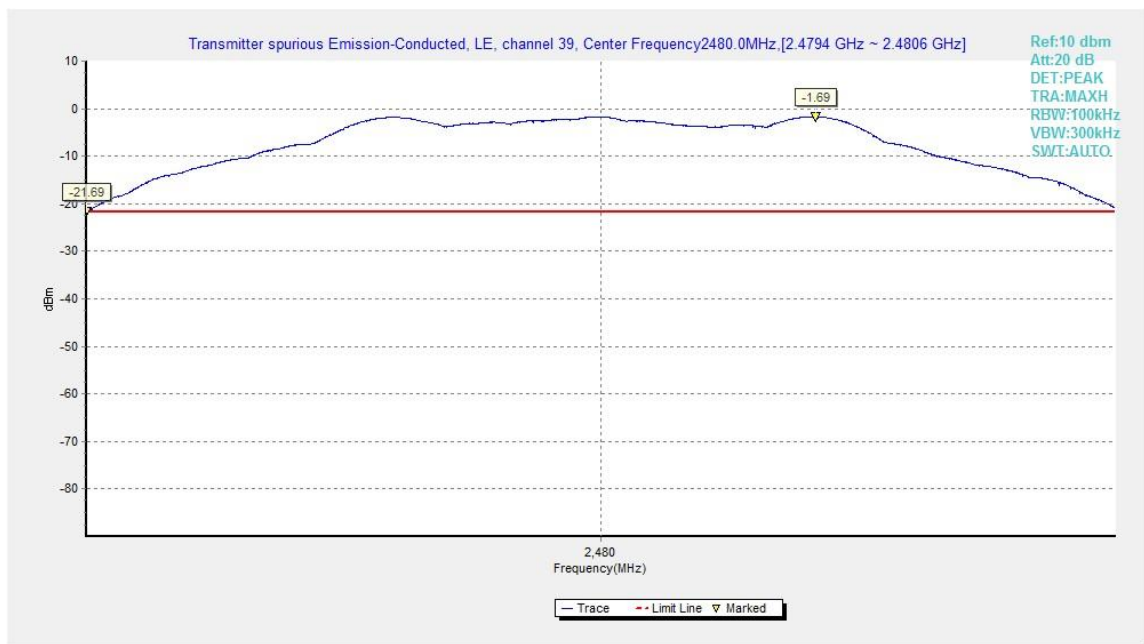


Fig.13. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz



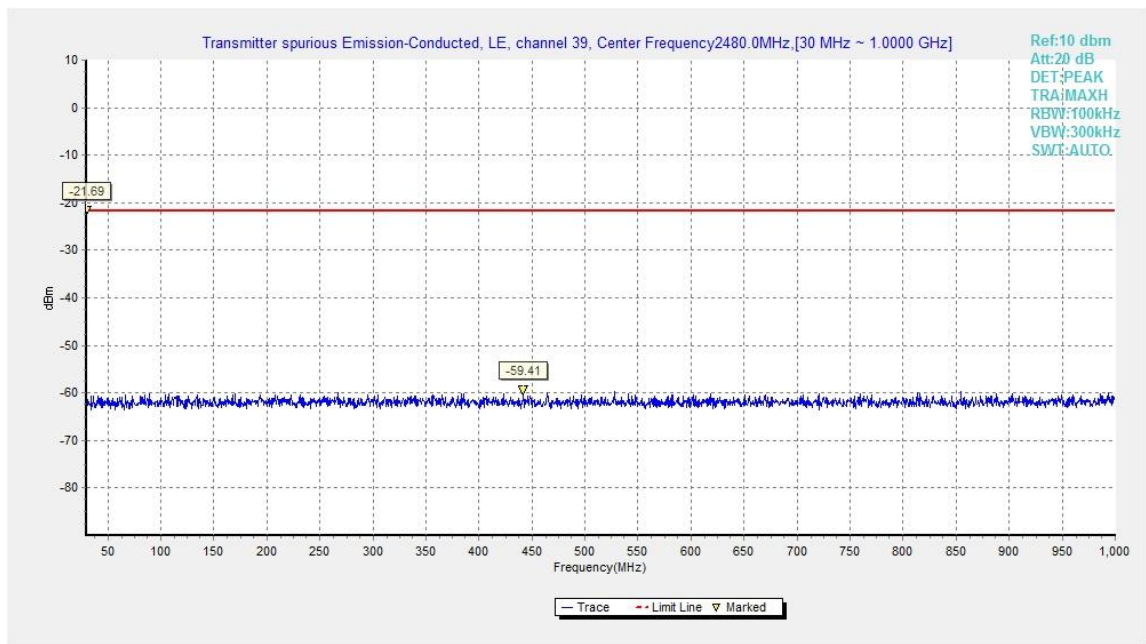


Fig.14. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

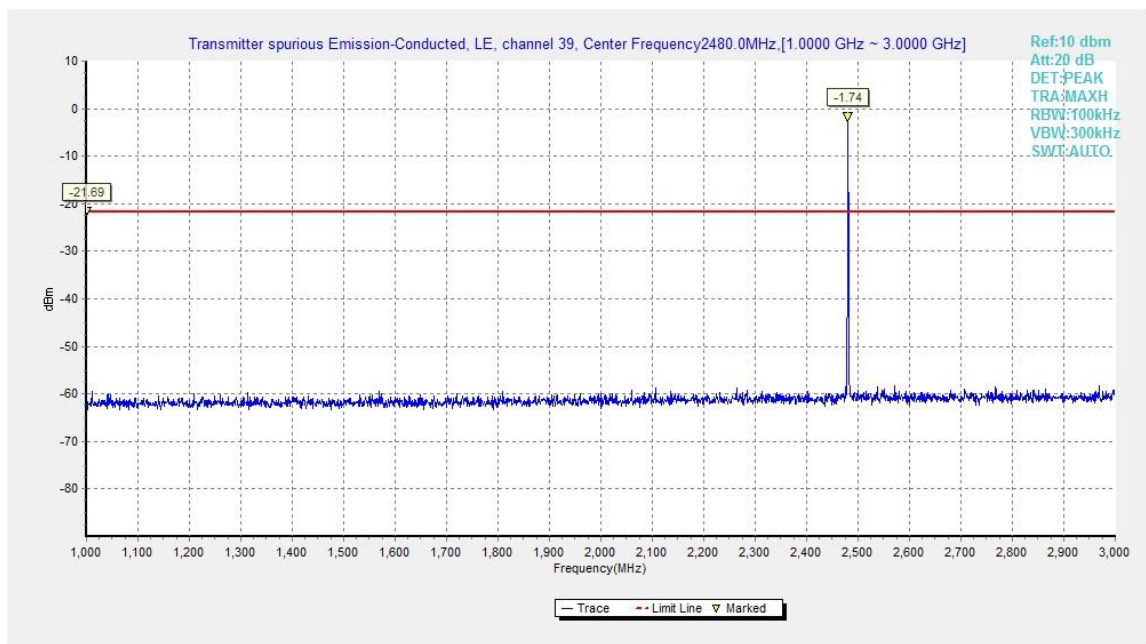


Fig.15. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

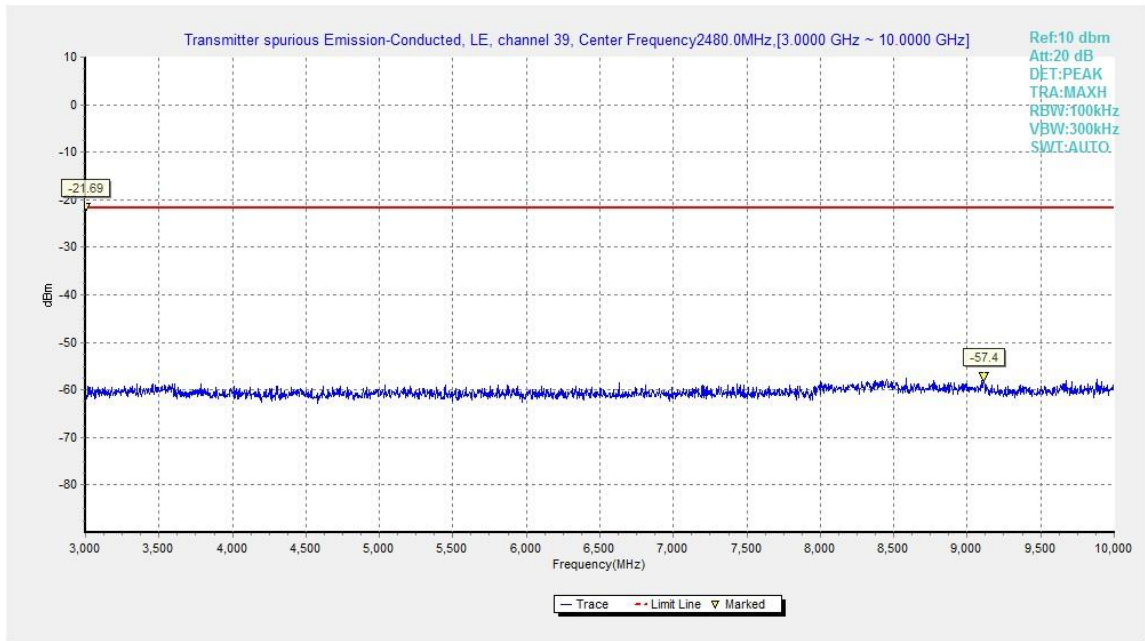


Fig.16. Transmitter Spurious Emission -Conducted:GFSK, 2480 MHz,3GHz - 10GHz

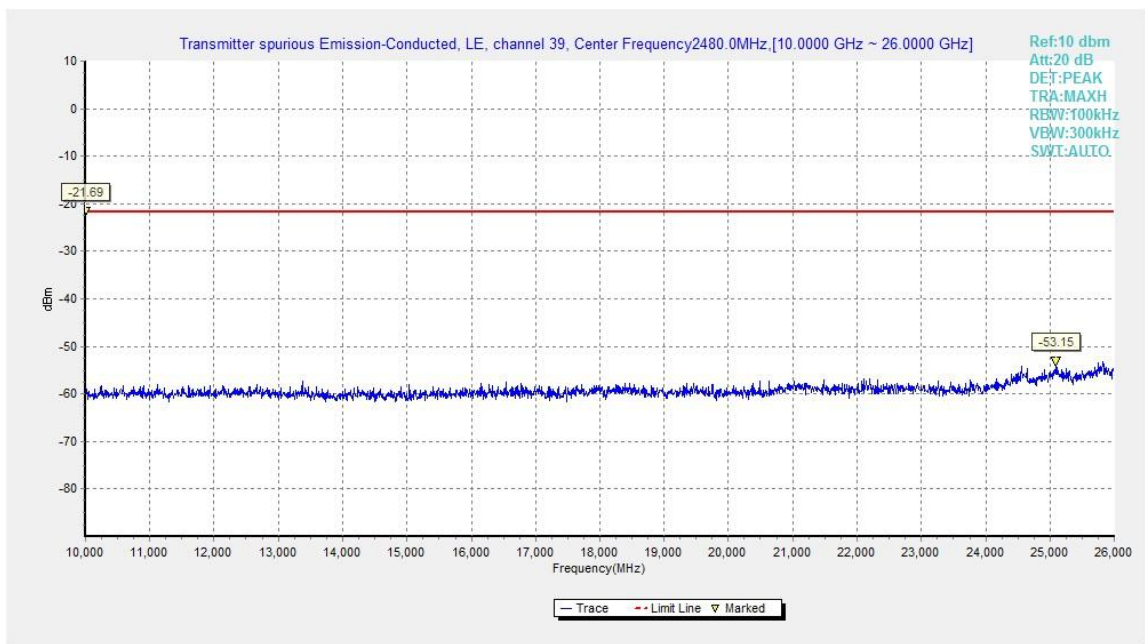


Fig.17. Transmitter Spurious Emission -Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

**A.5. Transmitter Spurious Emission - Radiated  
Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

**Measurement Results:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

**For GFSK**

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
2440 MHz	9 kHz ~ 30 MHz	--	P
	30 MHz ~ 1 GHz	--	P
	1 GHz ~ 3 GHz	--	P
	3 GHz ~ 18 GHz	--	P
2480 MHz	1 GHz ~ 3 GHz	--	P



	3 GHz ~ 18 GHz	--	P
Power	2.38GHz~2.4GHz---L	Fig.18	P
Power	2.45GHz~2.5GHz---H	Fig.19	P
For all channels	18 GHz ~ 26.5 GHz	--	P

**GFSK 2402MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2387.900	47.17	2.9	32.0	12.31	54.0	6.8	H	155	268
2389.500	47.22	2.9	32.0	12.37	54.0	6.8	H	155	138
4804.000	36.34	-32.9	34.5	34.69	54.0	17.7	H	155	104
7206.000	38.64	-31.6	36.1	34.17	54.0	15.4	H	155	40
9608.000	39.46	-30.0	37.0	32.50	54.0	14.5	H	155	28
12010.000	45.17	-29.8	39.3	35.70	54.0	8.8	H	155	8

**GFSK 2440MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2380.900	47.59	2.9	32.1	12.68	54.0	6.4	H	155	8
2490.500	47.66	2.9	32.6	12.16	54.0	6.3	H	155	46
4882.000	36.39	-32.7	34.5	34.60	54.0	17.6	H	155	20
7323.000	38.55	-31.9	36.1	34.39	54.0	15.5	H	155	118
9764.000	40.01	-30.6	37.2	33.38	54.0	14.0	H	155	82
12205.000	44.32	-29.4	39.2	34.53	54.0	9.7	H	155	46

**GFSK 2480MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.83	2.9	32.8	12.14	54.0	6.2	H	155	92
2487.300	47.72	2.9	32.7	12.13	54.0	6.3	H	155	68
4960.000	36.29	-33.4	34.5	35.16	54.0	17.7	H	155	118
7440.000	38.54	-31.8	36.0	34.28	54.0	15.5	H	155	354
9920.000	39.65	-29.9	37.4	32.17	54.0	14.4	H	155	18
12400.000	44.17	-29.5	39.1	34.54	54.0	9.8	H	155	38

**GFSK 2402MHz–Peak**



Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2384.410	60.63	2.9	32.0	25.74	74.0	13.4	H	155	264
2389.870	60.66	2.9	32.0	25.81	74.0	13.3	H	155	132
4804.000	42.12	-32.9	34.5	40.47	74.0	31.9	H	155	110
7206.000	43.59	-31.6	36.1	39.12	74.0	30.4	H	155	44
9608.000	44.65	-30.0	37.0	37.70	74.0	29.4	H	155	22
12010.000	48.96	-29.8	39.3	39.49	74.0	25.0	V	155	0

**GFSK 2440MHz–Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2361.650	48.02	-27.5	31.9	43.65	74.0	26.0	H	155	0
2850.060	52.41	-25.9	33.2	45.09	74.0	21.6	H	155	44
4882.000	42.93	-32.7	34.5	41.14	74.0	31.1	V	155	22
7323.000	43.59	-31.9	36.1	39.43	74.0	30.4	H	155	110
9764.000	44.63	-30.6	37.2	38.00	74.0	29.4	H	155	88
12205.000	48.96	-29.4	39.2	39.17	74.0	25.0	H	155	44



**GFSK 2480MHz–Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2484.470	61.07	2.9	32.7	25.41	74.0	12.9	H	155	88
2490.140	61.26	2.9	32.6	25.75	74.0	12.7	H	155	66
4960.000	42.93	-33.4	34.5	41.80	74.0	31.1	H	155	110
7440.000	43.58	-31.8	36.0	39.32	74.0	30.4	V	155	0
9920.000	44.67	-29.9	37.4	37.20	74.0	29.3	H	155	22
12400.000	48.89	-29.5	39.1	39.26	74.0	25.1	H	155	44

**Conclusion: PASS**

**Test graphs as below for Set.10:**

RE - Power-2.38GHz-2.45GHz

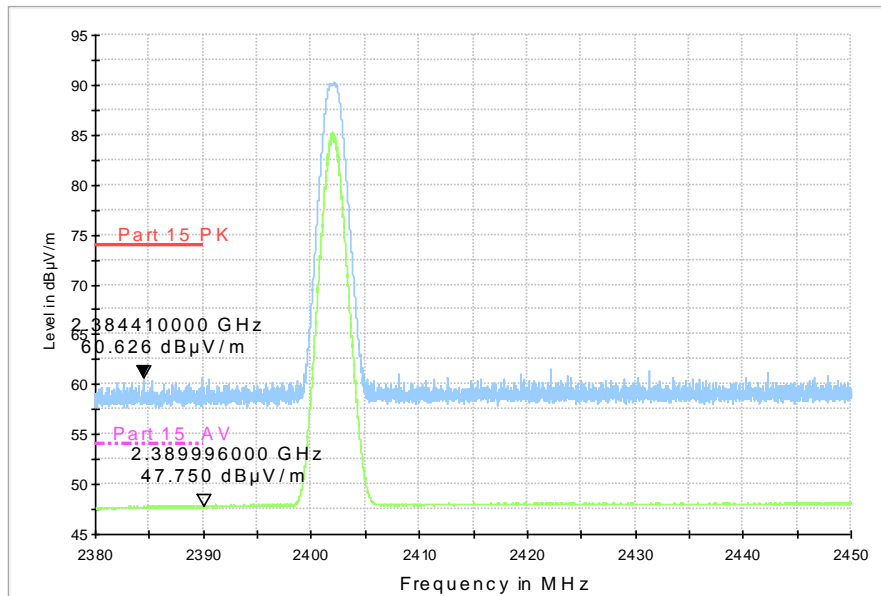


Fig.18. Transmitter Spurious Emission -Radiated (Power): GFSK low channel

RE - Power-2.45GHz-2.5GHz

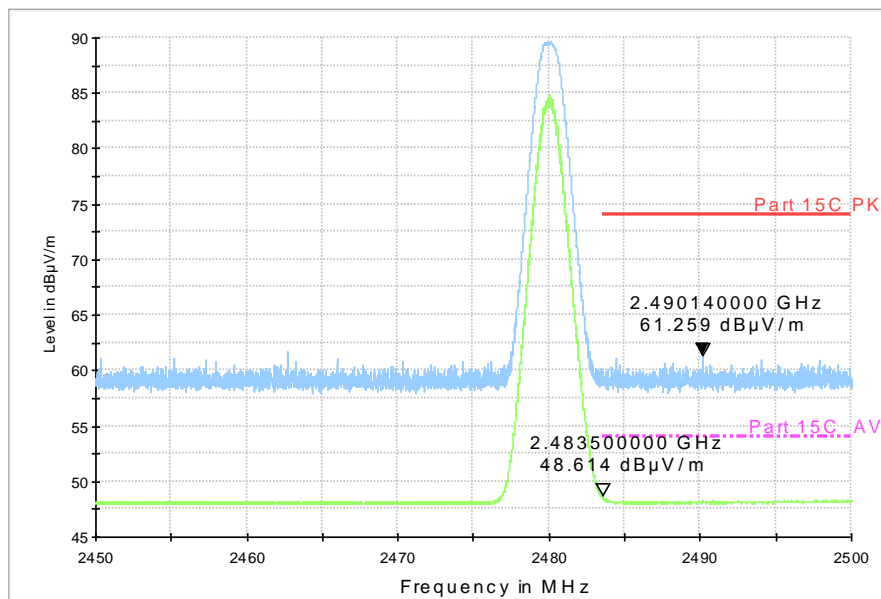


Fig.19. Transmitter Spurious Emission -Radiated (Power): GFSK high channel



## A.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.20	708.50	P
19	2440	Fig.21	708.00	P
39	2480	Fig.22	708.50	P

**Conclusion: PASS**

**Test graphs as below:**



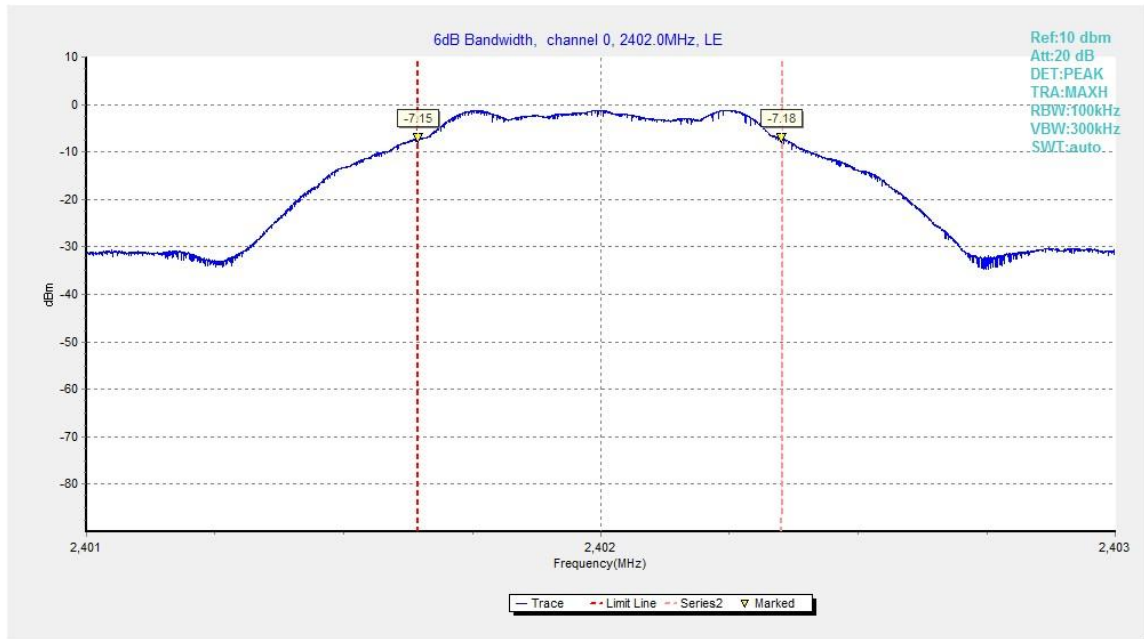


Fig.20. 6dB Bandwidth: GFSK, 2402 MHz



Fig.21. 6dB Bandwidth: GFSK, 2440 MHz

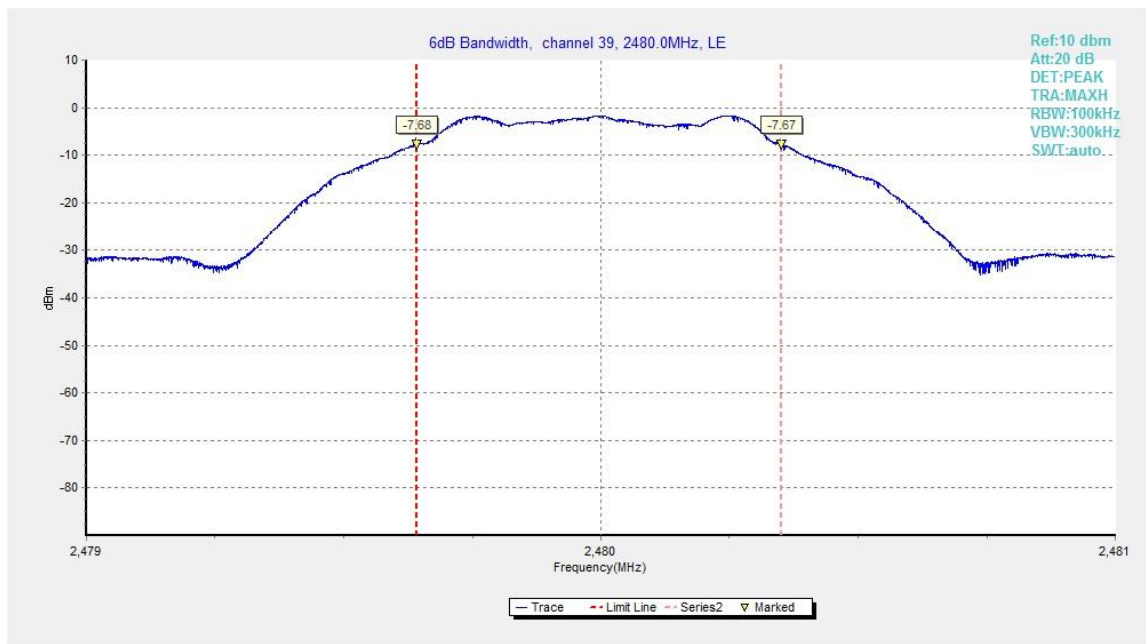


Fig.22. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW =10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

### Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
		Fig.23		
0	2402	Fig.23	-15.86	P
19	2440	Fig.24	-15.76	P
39	2480	Fig.25	-16.28	P

Test graphs as below:

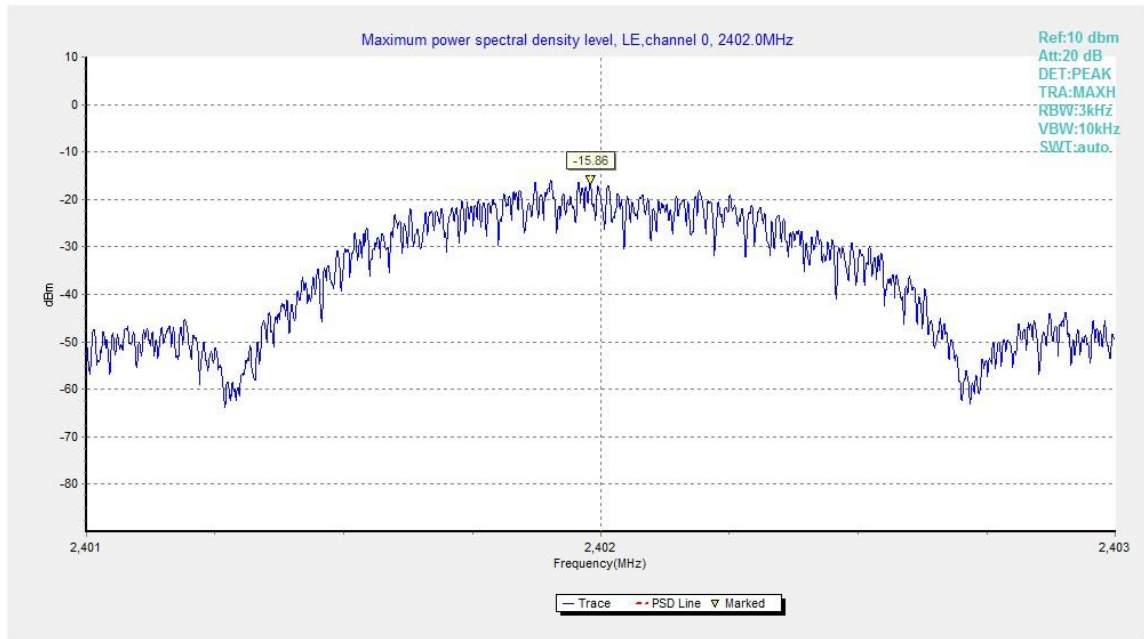


Fig.23. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

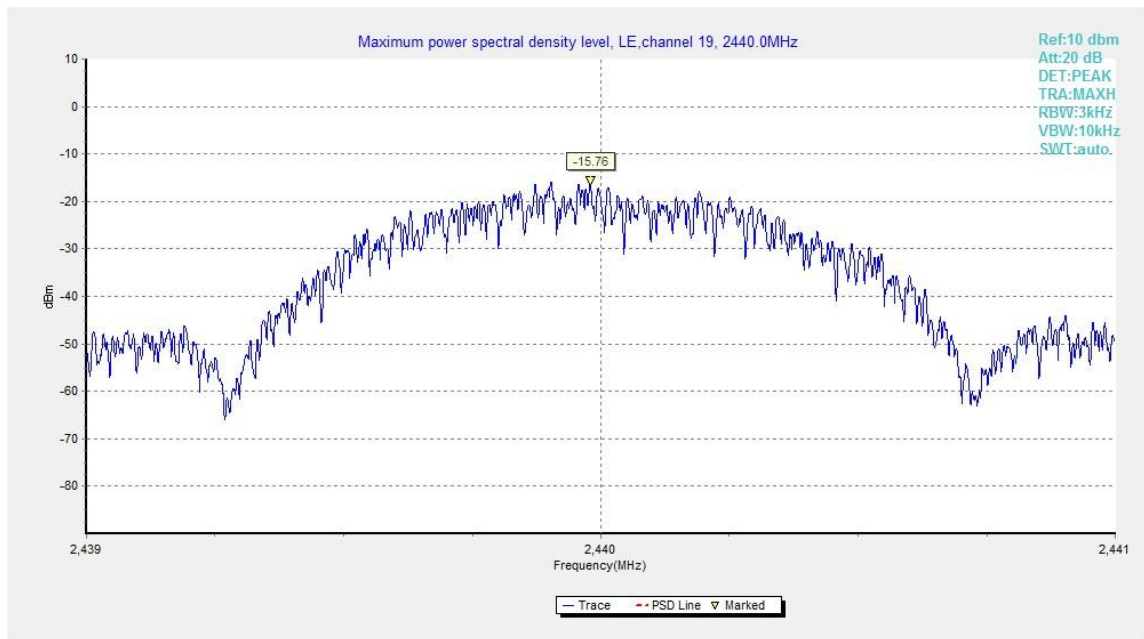


Fig.24. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

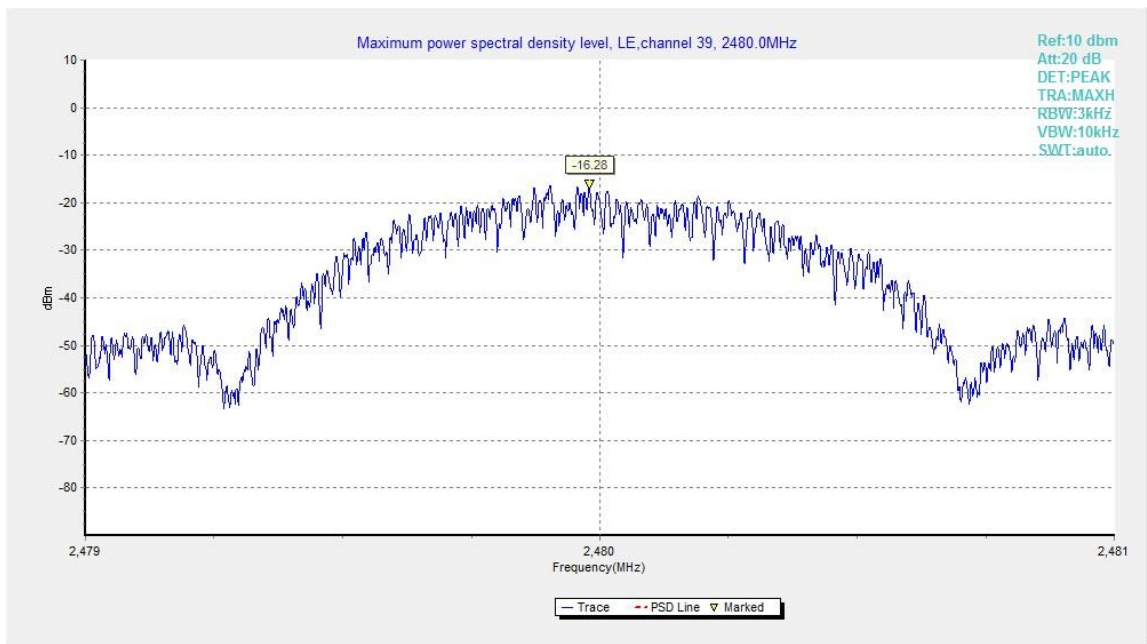


Fig.25. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

## A.8. AC Powerline Conducted Emission

**Method of Measurement: See ANSI C63.10-clause 6.2**

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range(MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



**Bluetooth (Average Limit)**

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

Traffic: Set.10

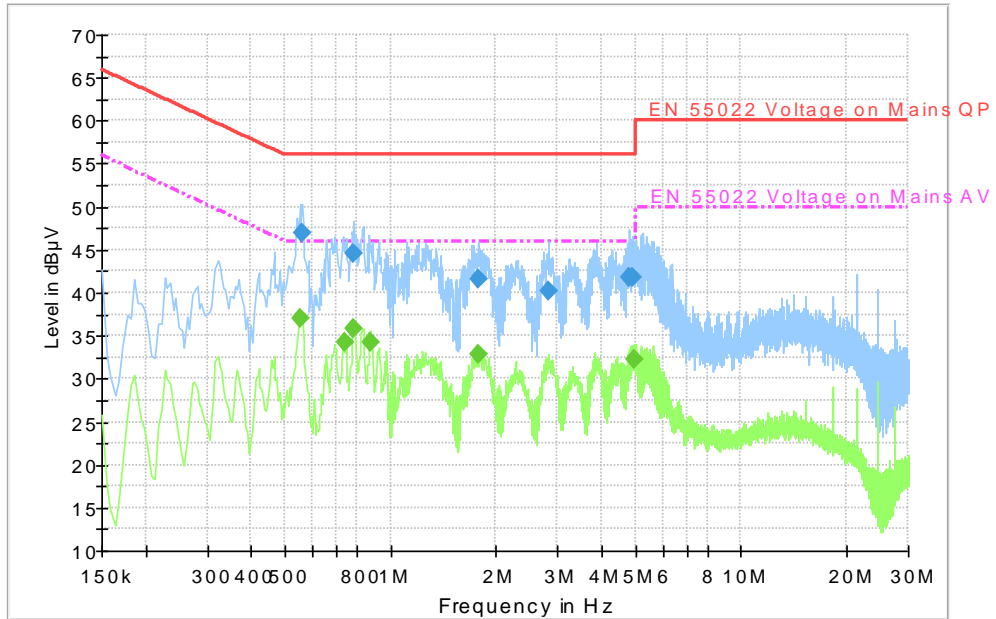

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.559500	47.0	2000.0	9.000	L1	10.2	9.0	56.0
0.784500	44.6	2000.0	9.000	L1	10.2	11.4	56.0
1.774500	41.7	2000.0	9.000	L1	10.2	14.3	56.0
2.836500	40.2	2000.0	9.000	L1	10.3	15.8	56.0
4.812000	41.8	2000.0	9.000	L1	10.3	14.2	56.0
4.893000	41.8	2000.0	9.000	L1	10.3	14.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.550500	37.0	2000.0	9.000	L1	10.2	9.0	46.0
0.739500	34.2	2000.0	9.000	L1	10.2	11.8	46.0
0.784500	35.9	2000.0	9.000	L1	10.2	10.1	46.0
0.879000	34.2	2000.0	9.000	L1	10.2	11.8	46.0
1.774500	32.9	2000.0	9.000	L1	10.2	13.1	46.0
4.978500	32.2	2000.0	9.000	L1	10.3	13.8	46.0



Idle: Set.10

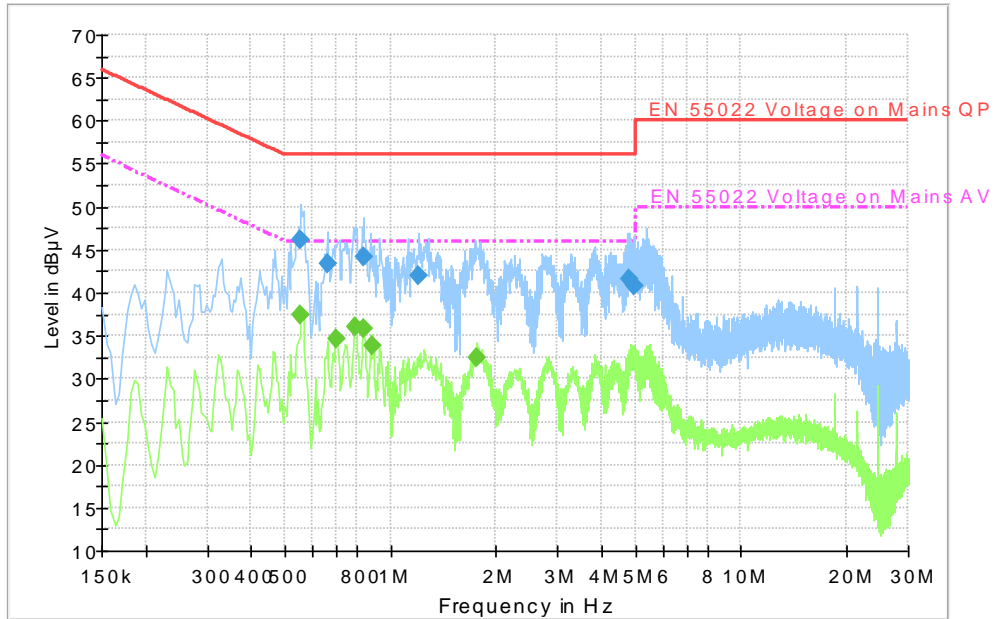


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.555000	46.1	2000.0	9.000	L1	10.2	9.9	56.0
0.658500	43.4	2000.0	9.000	L1	10.2	12.6	56.0
0.838500	44.1	2000.0	9.000	L1	10.2	11.9	56.0
1.203000	41.9	2000.0	9.000	L1	10.2	14.1	56.0
4.803000	41.6	2000.0	9.000	L1	10.3	14.4	56.0
4.947000	40.8	2000.0	9.000	L1	10.3	15.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.555000	37.5	2000.0	9.000	L1	10.2	8.5	46.0
0.703500	34.7	2000.0	9.000	L1	10.2	11.3	46.0
0.789000	35.9	2000.0	9.000	L1	10.2	10.1	46.0
0.838500	35.9	2000.0	9.000	L1	10.2	10.1	46.0
0.883500	33.9	2000.0	9.000	L1	10.2	12.1	46.0
1.770000	32.5	2000.0	9.000	L1	10.2	13.5	46.0

Traffic: Set.11

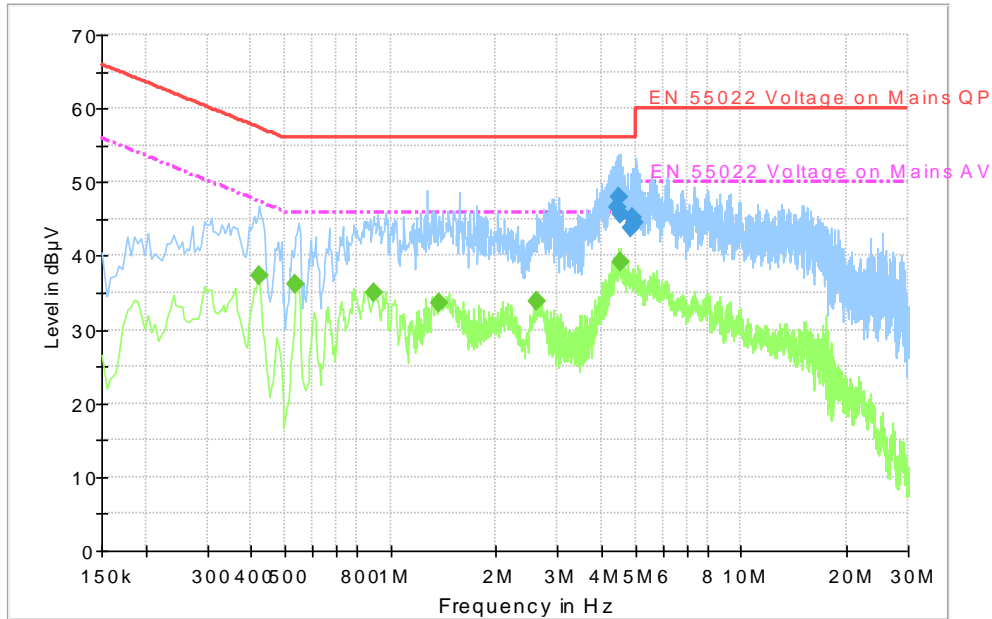


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.434000	46.6	2000.0	9.000	L1	10.3	9.4	56.0
4.470000	48.0	2000.0	9.000	L1	10.3	8.0	56.0
4.542000	45.6	2000.0	9.000	L1	10.3	10.4	56.0
4.848000	43.9	2000.0	9.000	L1	10.3	12.1	56.0
4.884000	45.2	2000.0	9.000	L1	10.3	10.8	56.0
4.960500	44.6	2000.0	9.000	L1	10.3	11.4	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	37.3	2000.0	9.000	L1	10.2	10.2	47.4
0.537000	36.1	2000.0	9.000	L1	10.2	9.9	46.0
0.897000	35.0	2000.0	9.000	L1	10.2	11.0	46.0
1.369500	33.5	2000.0	9.000	L1	10.2	12.5	46.0
2.620500	33.9	2000.0	9.000	L1	10.2	12.1	46.0
4.519500	39.2	2000.0	9.000	L1	10.3	6.8	46.0

Traffic: Set.12

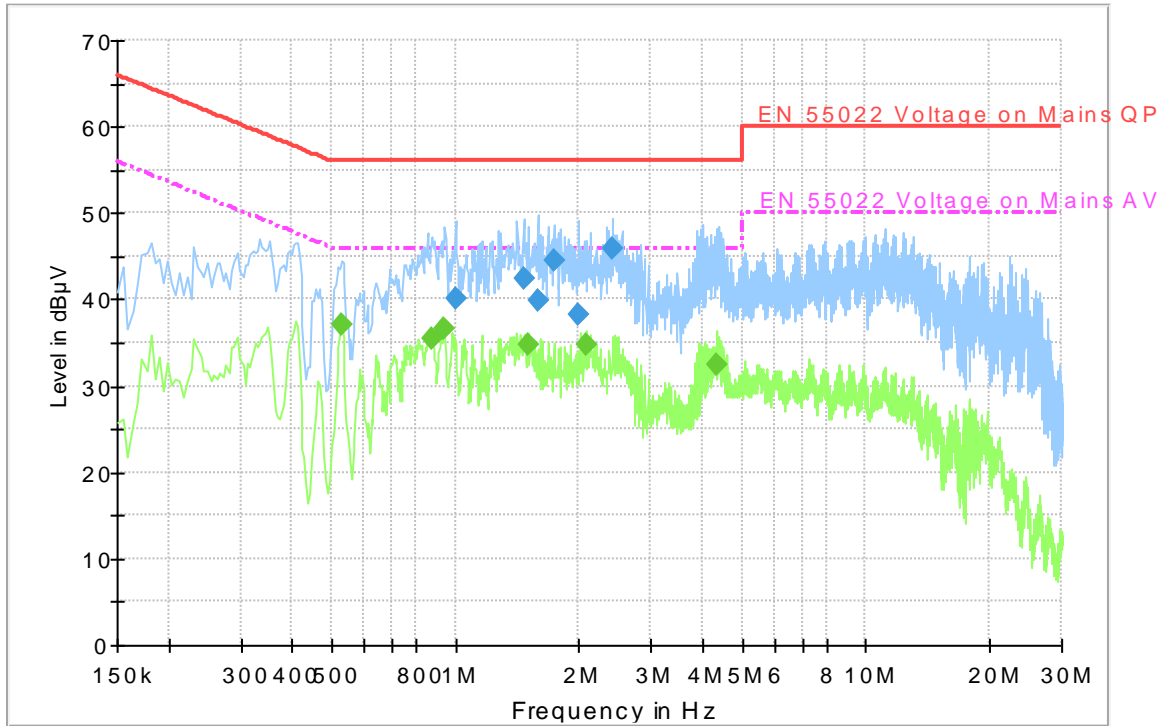


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.000500	40.0	2000.0	9.000	N	10.2	16.0	56.0
1.464000	42.4	2000.0	9.000	N	10.2	13.6	56.0
1.585500	39.9	2000.0	9.000	N	10.2	16.1	56.0
1.734000	44.4	2000.0	9.000	L1	10.2	11.6	56.0
1.999500	38.2	2000.0	9.000	N	10.3	17.8	56.0
2.422500	46.0	2000.0	9.000	L1	10.2	10.0	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.528000	37.0	2000.0	9.000	L1	10.2	9.0	46.0
0.874500	35.5	2000.0	9.000	L1	10.2	10.5	46.0
0.937500	36.6	2000.0	9.000	L1	10.2	9.4	46.0
1.500000	34.7	2000.0	9.000	L1	10.2	11.3	46.0
2.080500	34.7	2000.0	9.000	L1	10.2	11.3	46.0
4.348500	32.5	2000.0	9.000	L1	10.3	13.5	46.0

Traffic: Set.13

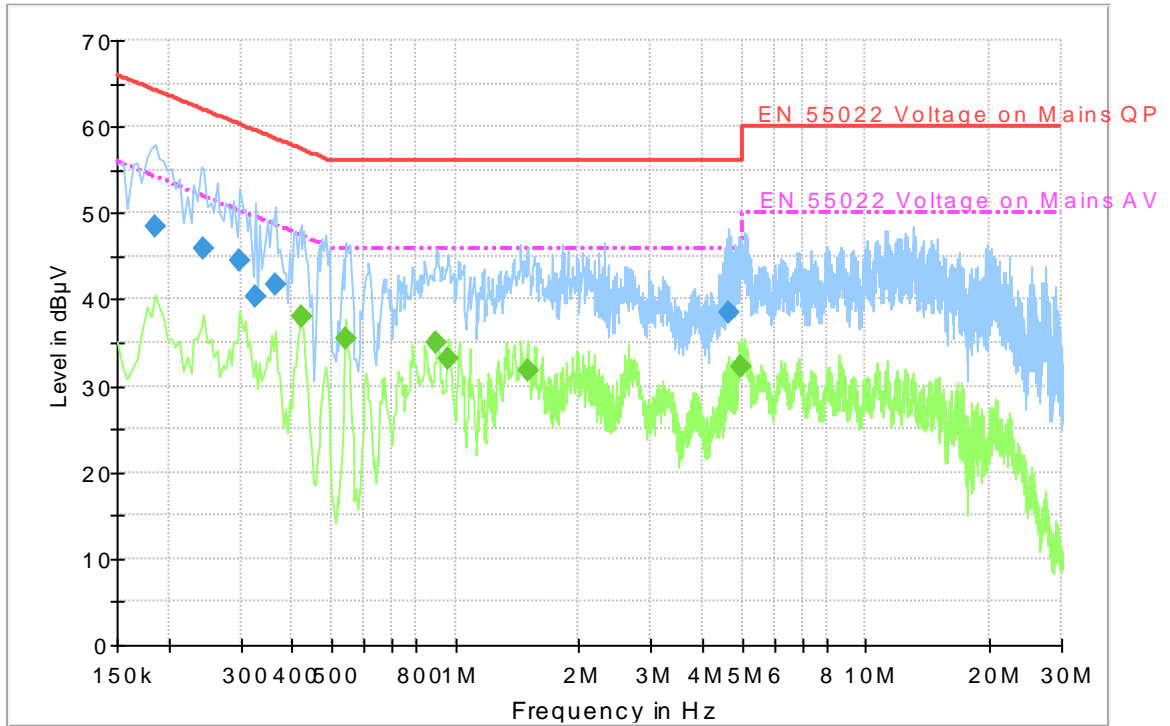





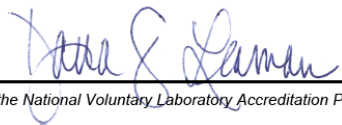

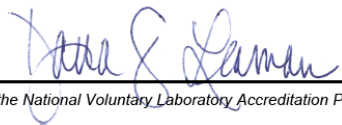
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	48.5	2000.0	9.000	L1	10.1	15.7	64.2
0.244500	45.8	2000.0	9.000	L1	10.2	16.1	61.9
0.298500	44.5	2000.0	9.000	L1	10.1	15.7	60.3
0.325500	40.3	2000.0	9.000	L1	10.2	19.2	59.6
0.366000	41.8	2000.0	9.000	L1	10.2	16.8	58.6
4.650000	38.6	2000.0	9.000	L1	10.3	17.4	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	38.1	2000.0	9.000	L1	10.2	9.3	47.4
0.541500	35.5	2000.0	9.000	L1	10.2	10.5	46.0
0.901500	34.9	2000.0	9.000	L1	10.2	11.1	46.0
0.964500	33.1	2000.0	9.000	L1	10.2	12.9	46.0
1.504500	31.8	2000.0	9.000	L1	10.2	14.2	46.0
4.978500	32.2	2000.0	9.000	L1	10.3	13.8	46.0

## ANNEX E: Accreditation Certificate
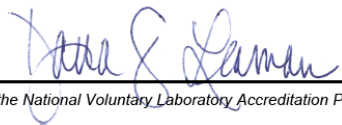
<p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <hr/> <table border="0" style="width: 100%;"><tr><td style="width: 40%; text-align: center;"><p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p></td><td style="width: 20%; text-align: center;"></td><td style="width: 40%; text-align: center;"> <i>For the National Voluntary Laboratory Accreditation Program</i></td></tr></table>		<p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <i>For the National Voluntary Laboratory Accreditation Program</i>
<p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>		 <i>For the National Voluntary Laboratory Accreditation Program</i>		

\*\*\*END OF REPORT\*\*\*