

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Report No.: ZR/2018/9003204

Page: 1 of 74

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

# FCC TEST REPORT

**Application No.:** ZR/2018/90032  
**Applicant:** TCL Communication Ltd.  
**Address of Applicant** 7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052  
**Manufacturer:** TCL Communication Ltd.  
**Address of Manufacturer** 7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052  
**EUT Description:** GSM/UMTS/LTE mobile phone  
**Model No.:** 5008A  
**Trade Mark:** alcatel  
**FCC ID:** 2ACCJH097  
**Standards:** 47 CFR FCC Part 2, Subpart J  
47 CFR Part 15, Subpart C  
**Test Method** ANSI C63.4(2014)  
ANSI C63.10 (2013)  
**Date of Receipt:** 2018/10/20  
**Date of Test:** 2018/10/21 to 2018/11/14  
**Date of Issue:** 2018/11/21

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



# 1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2018/11/21		Original

<b>Authorized for issue by:</b>			
<b>Tested By</b>		 <hr/> <b>(Mike Hu) /Project Engineer</b>	2018/11/21 <hr/> <b>Date</b>
<b>Checked By</b>		 <hr/> <b>(David Chen) /Reviewer</b>	2018/11/21 <hr/> <b>Date</b>



## 2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 (2013)	Clause 4.2	PASS
Conducted Peak Output Power	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.3	PASS
20dB Emission Bandwidth & 99% Occupied Bandwidth	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.4	PASS
Carrier Frequencies Separation	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.5	PASS
Hopping Channel Number	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.6	PASS
Dwell Time	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.7	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.8	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.9	PASS
Radiated Spurious emissions	15.247(d) ;15.205/15.209	ANSI C63.10 (2013)	Clause 4.10	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d) ;15.205/15.209	ANSI C63.10 (2013)	Clause 4.11	PASS

## Contents

<b>1</b>	<b>VERSION</b> .....	<b>2</b>
<b>2</b>	<b>TEST SUMMARY</b> .....	<b>3</b>
<b>3</b>	<b>GENERAL INFORMATION</b> .....	<b>5</b>
3.1	CLIENT INFORMATION .....	5
3.2	TEST LOCATION .....	5
3.3	TEST FACILITY.....	5
3.4	GENERAL DESCRIPTION OF EUT.....	6
3.5	TEST ENVIRONMENT.....	7
3.6	DESCRIPTION OF SUPPORT UNITS .....	7
<b>4</b>	<b>TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>8</b>
4.1	ANTENNA REQUIREMENT .....	8
4.2	AC POWER LINE CONDUCTED EMISSIONS .....	8
4.3	CONDUCTED PEAK OUTPUT POWER.....	12
4.3.1	<i>Test Results</i> .....	13
4.3.2	<i>Test plots</i> .....	14
4.4	20dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH .....	19
4.4.1	<i>Test Results</i> .....	19
4.4.1	<i>Test plots</i> .....	20
4.5	CARRIER FREQUENCIES SEPARATION .....	29
4.5.1	<i>Test Results</i> .....	29
4.5.2	<i>Test plots</i> .....	30
4.6	HOPPING CHANNEL NUMBER.....	32
4.6.1	<i>Test Results</i> .....	32
4.6.2	<i>Test plots</i> .....	33
4.7	DWELL TIME.....	35
4.7.1	<i>Test Results</i> .....	36
4.7.2	<i>Test plots</i> .....	37
4.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	42
4.8.1	<i>Test plots</i> .....	43
4.9	SPURIOUS RF CONDUCTED EMISSIONS .....	49
4.9.1	<i>Test plots</i> .....	50
4.10	RADIATED SPURIOUS EMISSION.....	55
4.10.1	<i>Radiated Emission below 1GHz</i> .....	58
4.10.2	<i>Transmitter Emission above 1GHz</i> .....	60
4.11	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	67
4.11.1	<i>Test plots</i> .....	69
<b>5</b>	<b>MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)</b> .....	<b>73</b>
<b>6</b>	<b>EQUIPMENT LIST</b> .....	<b>74</b>
<b>7</b>	<b>PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	<b>74</b>

### 3 General Information

#### 3.1 Client Information

Applicant:	TCL Communication Ltd.
Address of Applicant:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Manufacturer:	TCL Communication Ltd.
Address of Manufacturer:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052

#### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

#### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

### 3.4 General Description of EUT

EUT Description::	GSM/UMTS/LTE mobile phone
Model No.:	5008A
Trade Mark:	alcatel
Hardware Version:	vBVT4
Software Version:	PIO
Operation Frequency:	2400MHz~2480MHz $f_c = 2402 \text{ MHz} + N * 1 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 0 to 78.
Bluetooth Version:	V2.0/3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	<input checked="" type="checkbox"/> Portable Device, <input type="checkbox"/> Module
Antenna Type:	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
Antenna Gain:	-0.13 dBi
Power Supply	<input checked="" type="checkbox"/> AC/DC Adapter; <input type="checkbox"/> Battery <input type="checkbox"/> PoE;; <input type="checkbox"/> Other:

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

### 3.5 Test Environment

Operating Environment	
Temperature:	24.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	101.30 KPa

### 3.6 Description of Support Units

The EUT has been tested independent unit.

## 4 Test results and Measurement Data

### 4.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.13 dBi.</p>	

### 4.2 AC Power Line Conducted Emissions

<b>Test Requirement:</b>	47 CFR Part 15C Section 15.207		
<b>Test Method:</b>	ANSI C63.10: 2013		
<b>Test Frequency Range:</b>	150kHz to 30MHz		
<b>Limit:</b>	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs</li> </ol>		




	<p>mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p>
<p>Test Setup:</p>	
<p>Exploratory Test Mode:</p>	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 5.10 for details</p>
<p>Test Results:</p>	<p>Pass</p>

**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

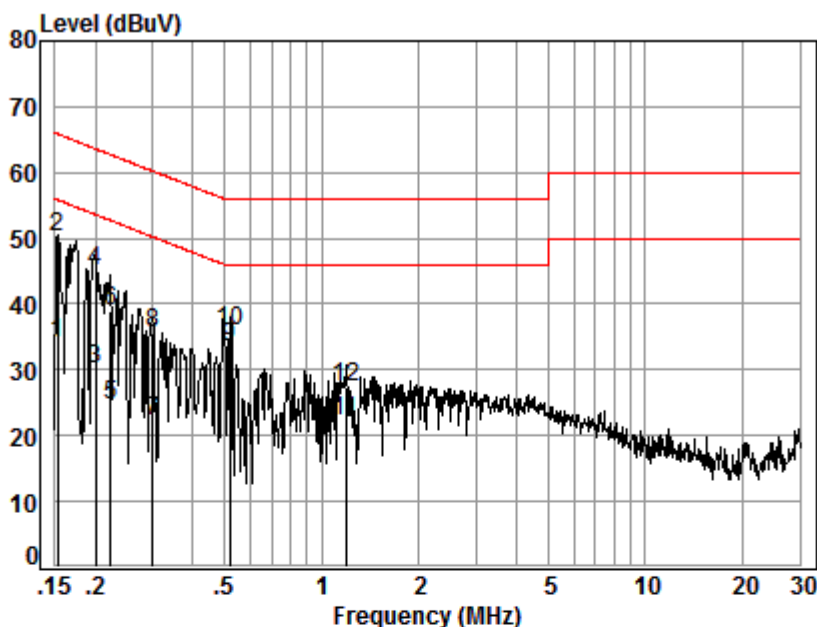

Site : Shielding Room


Condition: Line

Job No. : 90032

Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.15	0.01	9.66	24.54	55.87	-21.66	Average
2	0.15	0.01	9.66	40.57	65.87	-15.63	QP
3	0.20	0.02	9.66	20.45	53.58	-23.45	Average
4	0.20	0.02	9.66	35.45	63.58	-18.45	QP
5	0.22	0.03	9.66	14.98	52.70	-28.03	Average
6	0.22	0.03	9.66	29.21	62.70	-23.80	QP
7	0.30	0.04	9.67	12.62	50.24	-27.91	Average
8	0.30	0.04	9.67	25.84	60.24	-24.69	QP
9	0.52	0.06	9.67	23.81	46.00	-12.46	Average
10	0.52	0.06	9.67	26.06	56.00	-20.21	QP
11	1.19	0.11	9.73	12.21	46.00	-23.95	Average
12	1.19	0.11	9.73	17.68	56.00	-28.48	QP

Neutral line:

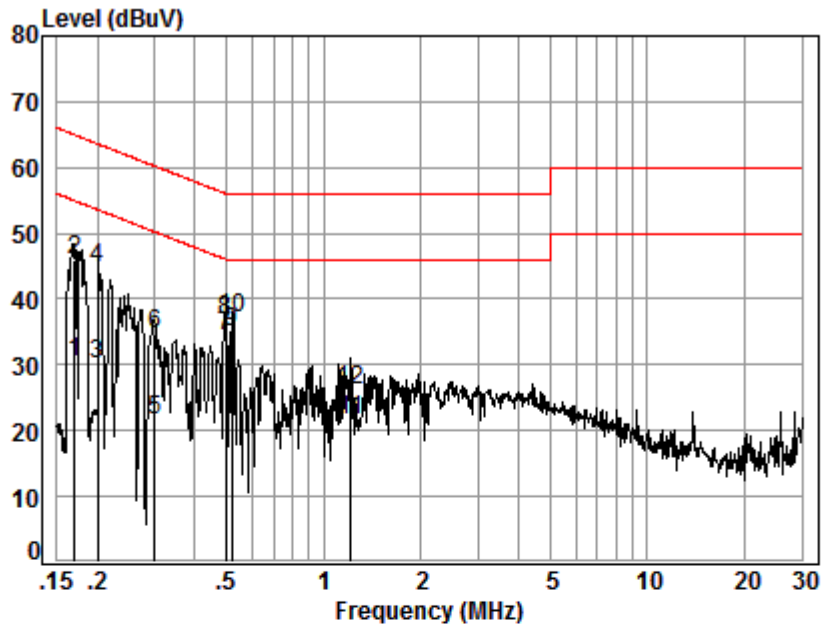

Site : Shielding Room  
Condition: Neutral  
Job No. : 90032  
Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17	0.02	9.64	20.71	30.37	54.99	-24.62	Average
2	0.17	0.02	9.64	36.20	45.86	64.99	-19.13	QP
3	0.20	0.02	9.64	20.37	30.03	53.58	-23.55	Average
4	0.20	0.02	9.64	34.99	44.65	63.58	-18.93	QP
5	0.30	0.04	9.64	11.95	21.63	50.24	-28.61	Average
6	0.30	0.04	9.64	25.14	34.82	60.24	-25.42	QP
7	0.50	0.06	9.64	24.68	34.38	46.01	-11.63	Average
8	0.50	0.06	9.64	27.16	36.86	56.01	-19.15	QP
9	0.52	0.06	9.64	25.34	35.04	46.00	-10.96	Average
10	0.52	0.06	9.64	27.37	37.07	56.00	-18.93	QP
11	1.22	0.11	9.70	11.82	21.63	46.00	-24.37	Average
12	1.22	0.11	9.70	16.28	26.09	56.00	-29.91	QP

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

### 4.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	<p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is positioned above a Ground Reference Plane.</p>
Limit:	(20.97dBm) 125mW
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

### 4.3.1 Test Results

**Measurement Data of Average power:**


GFSK mode		
Test channel	Average Output Power (dBm)	Result
Lowest	6.37	Report purpose only
Middle	6.25	Report purpose only
Highest	6.41	Report purpose only
π/4DQPSK mode		
Test channel	Average Output Power (dBm)	Result
Lowest	3.71	Report purpose only
Middle	3.59	Report purpose only
Highest	3.61	Report purpose only
8DPSK mode		
Test channel	Average Output Power (dBm)	Result
Lowest	3.73	Report purpose only
Middle	3.70	Report purpose only
Highest	3.64	Report purpose only

**Measurement Data of Peak power:**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.80	20.97	Pass
Middle	7.70	20.97	Pass
Highest	7.91	20.97	Pass
π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.08	20.97	Pass
Middle	7.01	20.97	Pass
Highest	7.11	20.97	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.19	20.97	Pass
Middle	7.14	20.97	Pass
Highest	7.23	20.97	Pass


**4.3.2 Test plots**

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

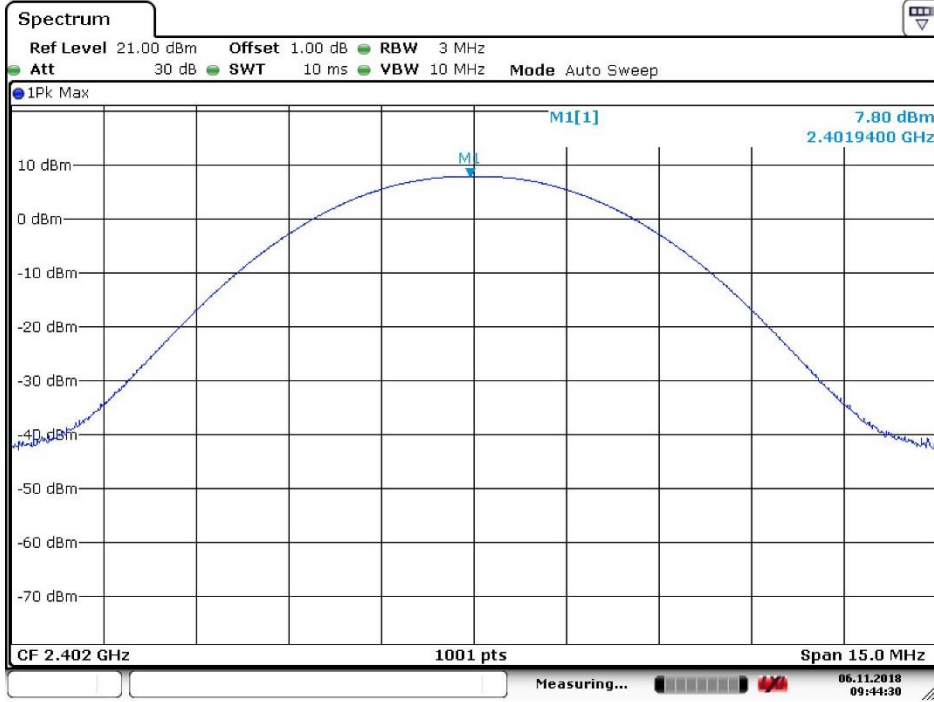


Date: 6 NOV. 2018 09:44:31

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

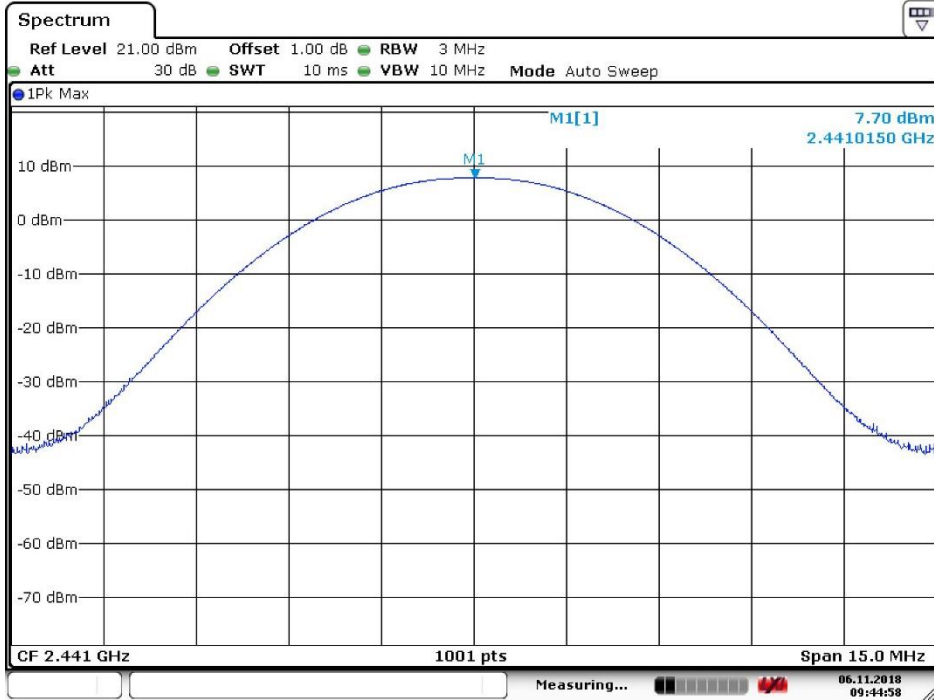


Date: 6 NOV. 2018 09:44:58

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

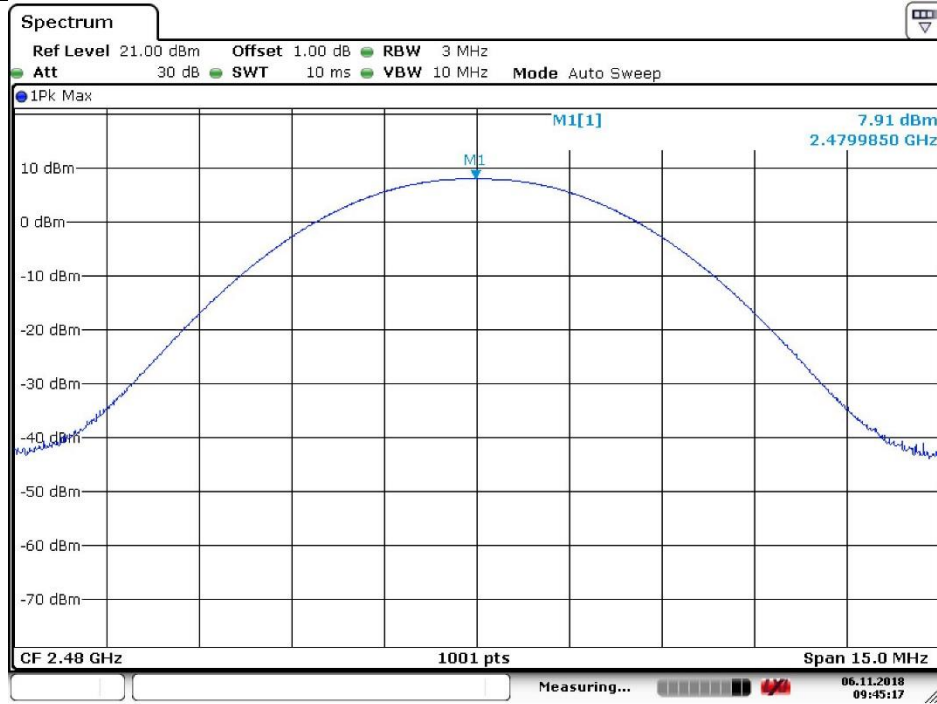


Date: 6 NOV. 2018 09:45:17

Test mode:	$\pi$ /4DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

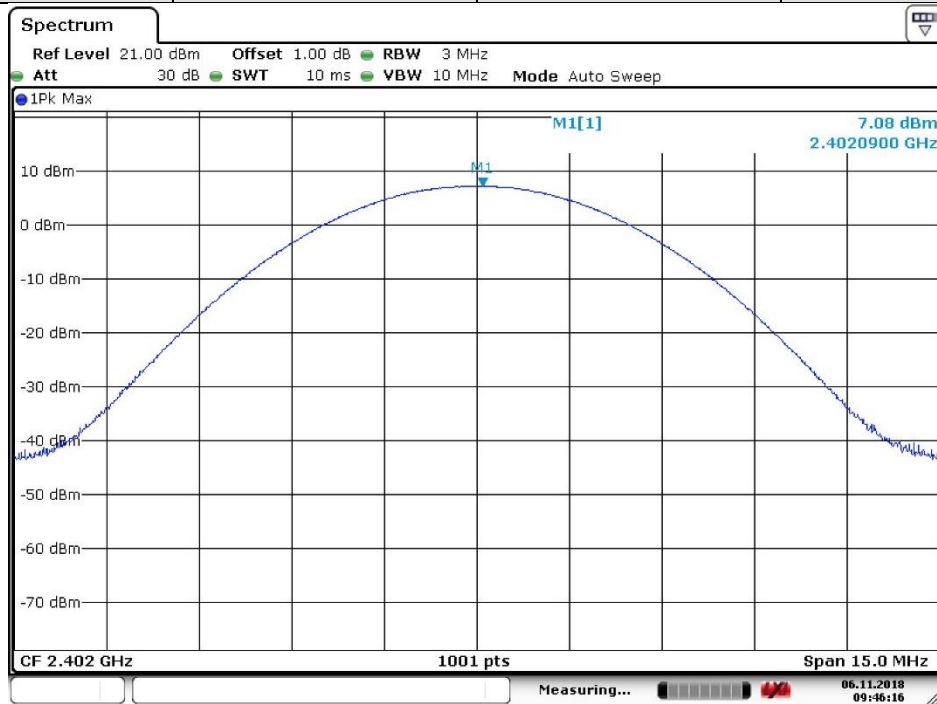


Date: 6 NOV. 2018 09:46:17

Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

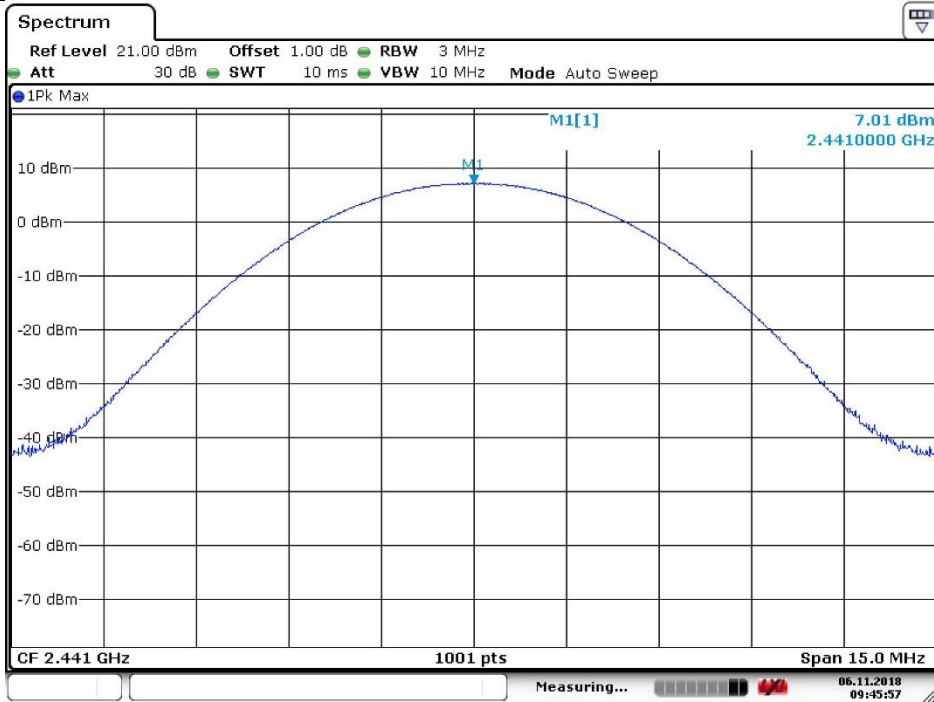

Date: 6 NOV. 2018 09:45:58


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

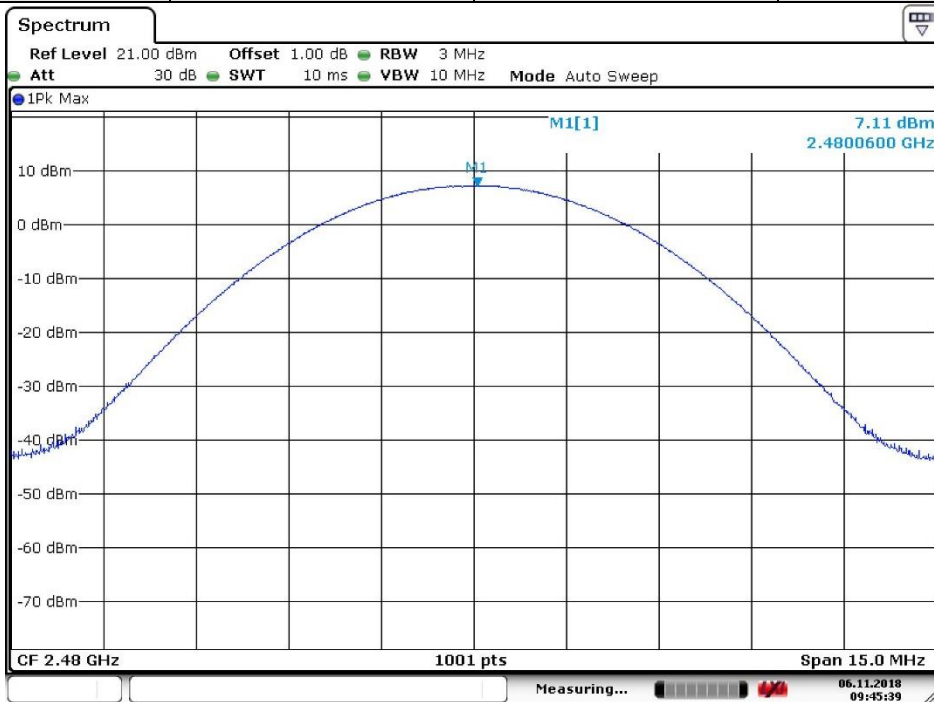

Date: 6 NOV. 2018 09:45:40




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

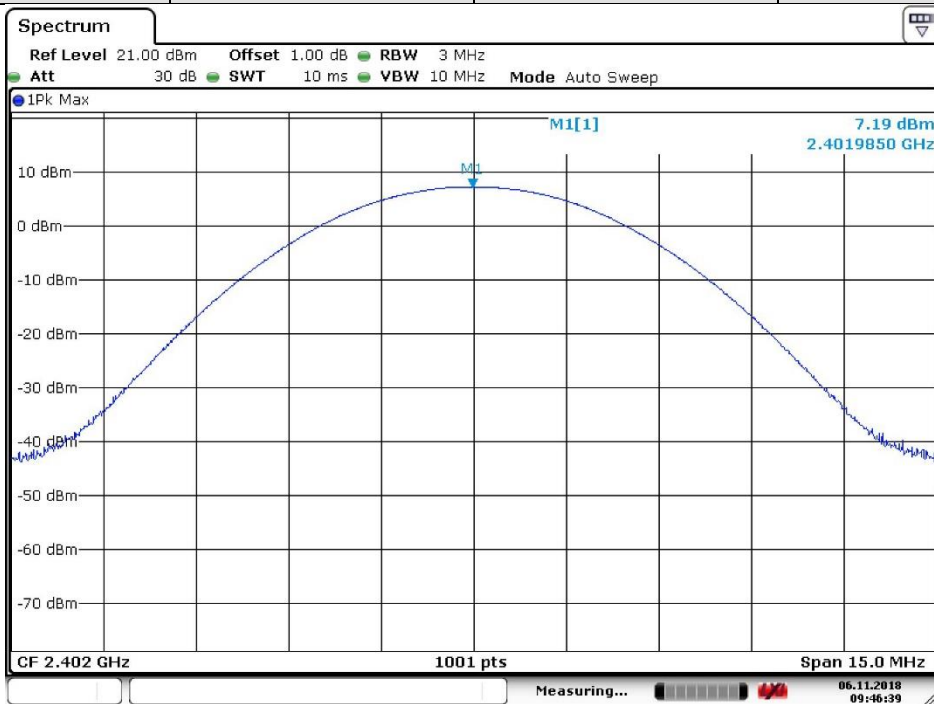


Date: 6 NOV. 2018 09:46:39

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

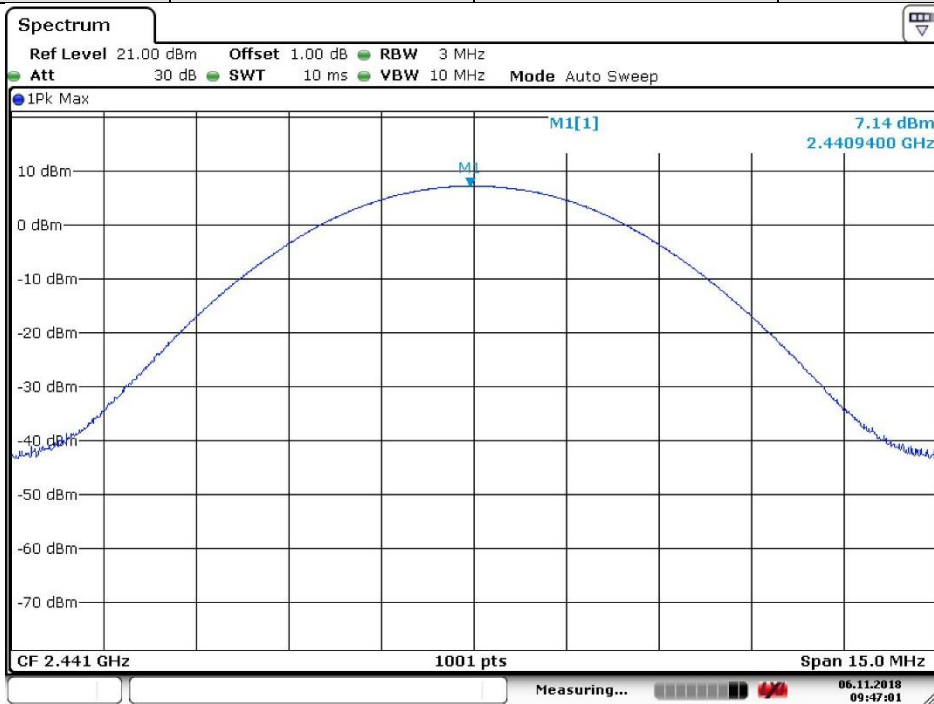

Date: 6 NOV. 2018 09:47:01

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

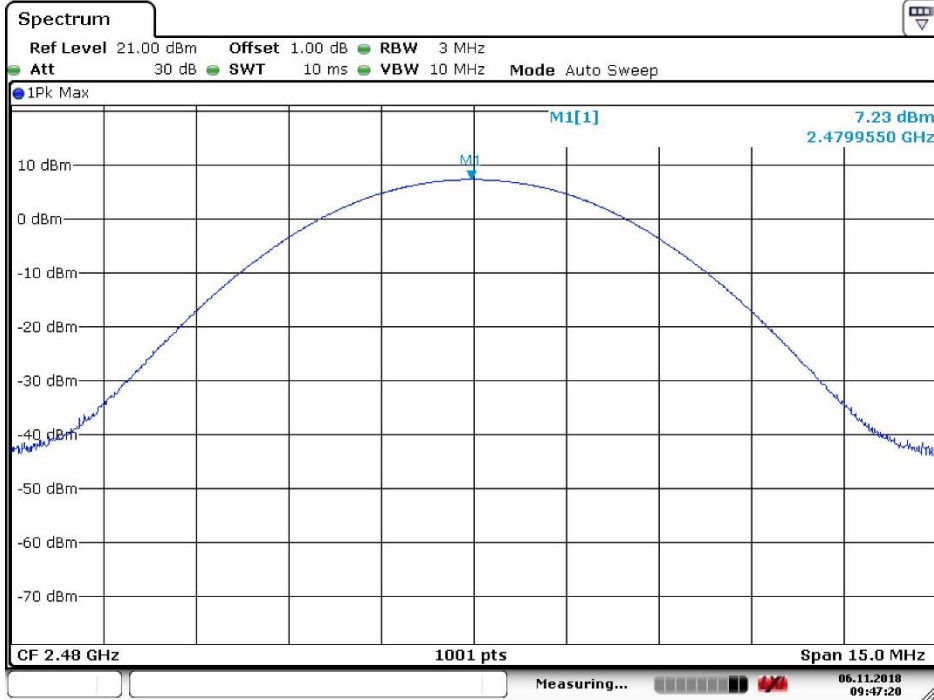

Date: 6 NOV. 2018 09:47:21

### 4.4 20dB Emission Bandwidth & 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.7
Test Setup:	<p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

#### 4.4.1 Test Results


Mode	Test Channel	99% Occupied Bandwidth (KHz)	20dB Emission Bandwidth (KHz)	Result
GFSK	Lowest	914.1	992.0	Pass
	Middle	908.1	977.0	Pass
	Highest	914.1	1007.0	Pass
$\pi/4$ DQPSK	Lowest	1183.8	1300.7	Pass
	Middle	1177.8	1297.7	Pass
	Highest	1174.8	1297.7	Pass
8DPSK	Lowest	1183.8	1282.7	Pass
	Middle	1180.8	1282.7	Pass
	Highest	1177.8	1282.7	Pass

### 4.4.1 Test plots

#### 4.4.1.1 GFSK\_Lowest Channel

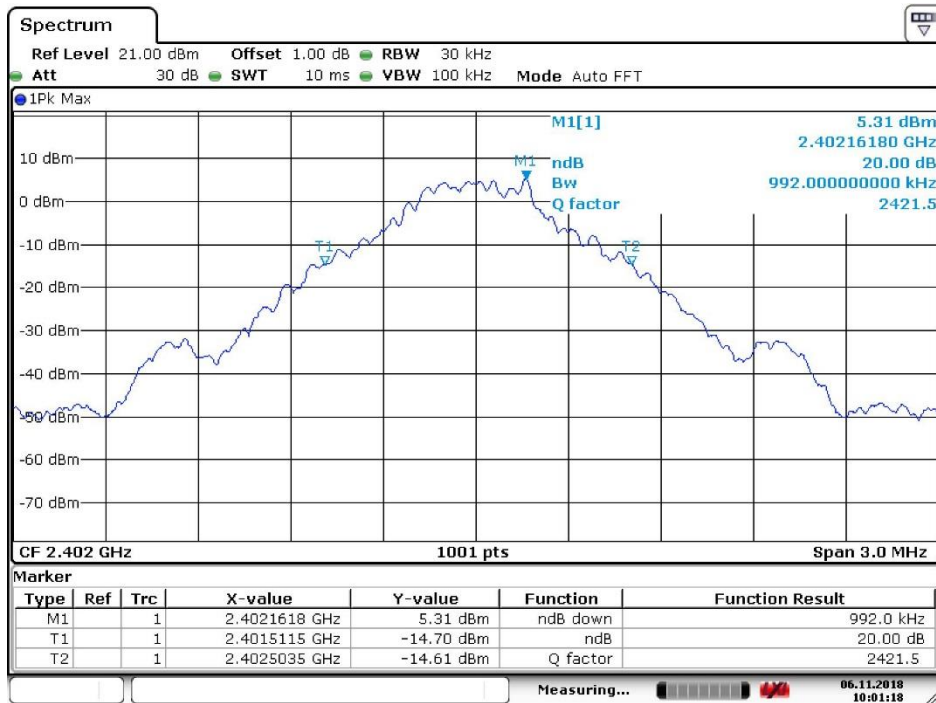


Date: 6.NOV.2018 10:01:18

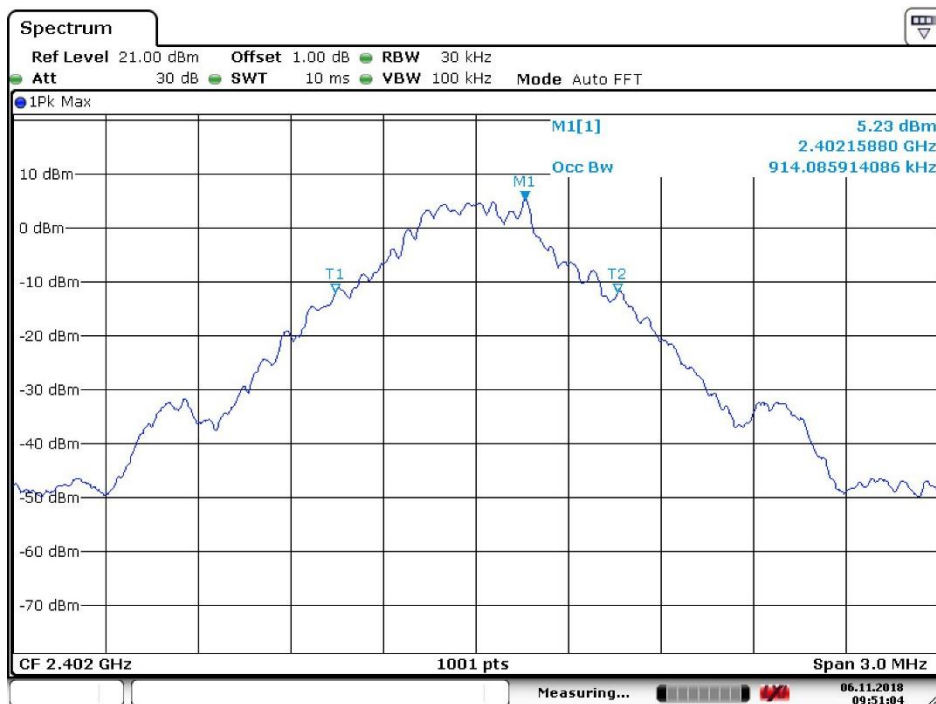


Date: 6.NOV.2018 09:51:05

**4.4.1.2 GFSK\_Middle Channel**

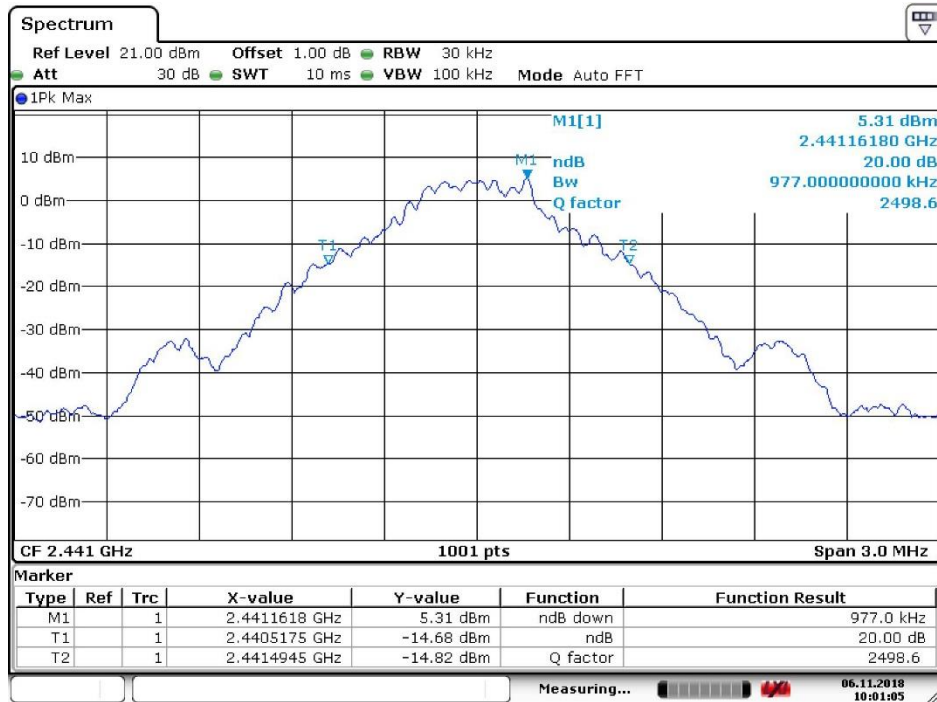


Date: 6 NOV.2018 10:01:05

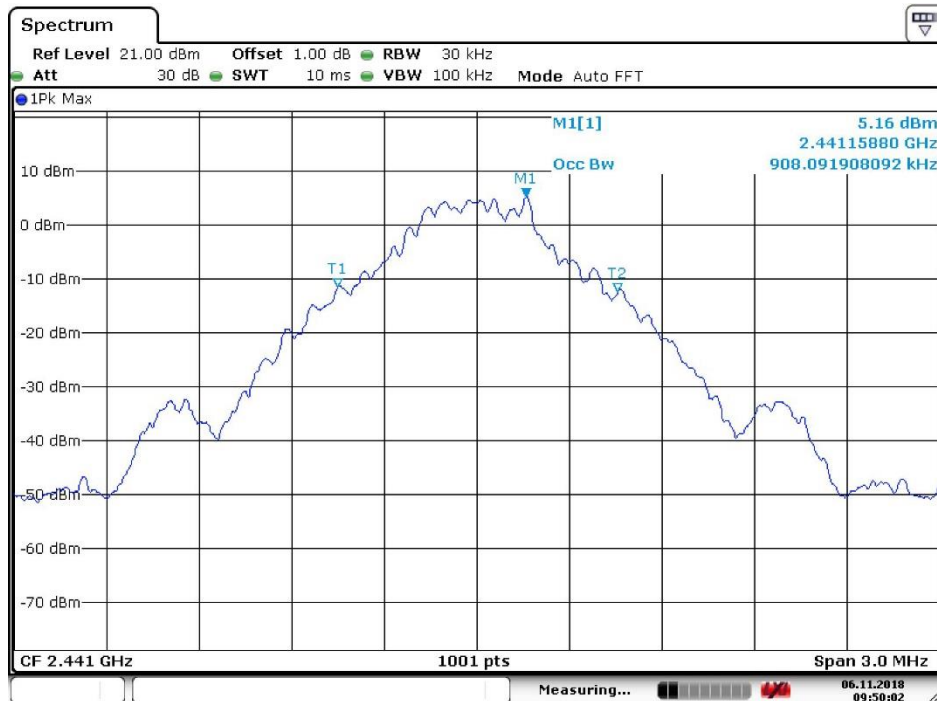


Date: 6 NOV.2018 09:50:02

**4.4.1.3**

**GFSK\_Highest Channel**

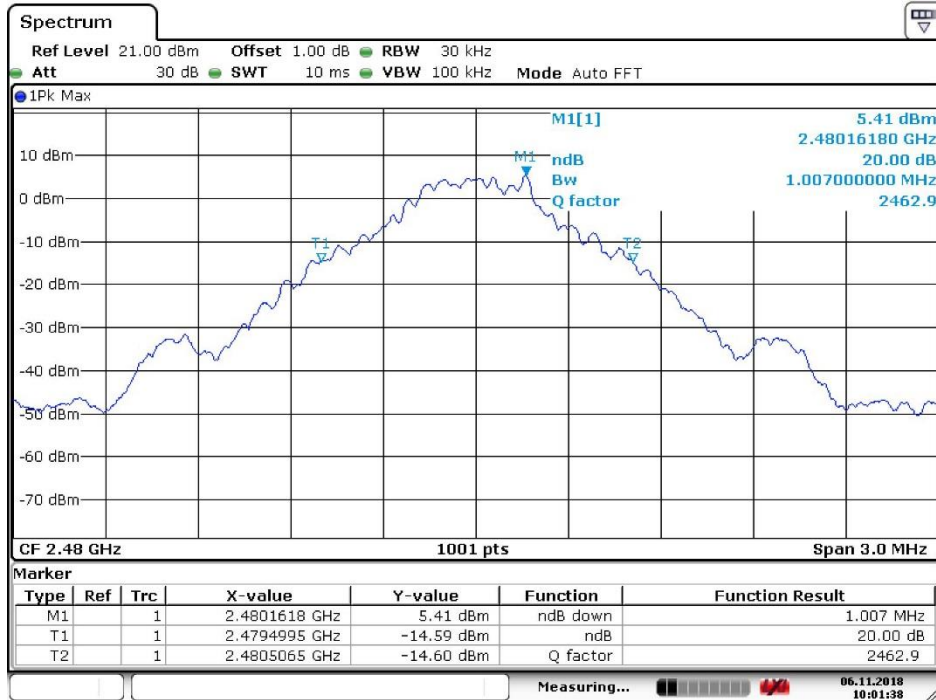


Date: 6 NOV.2018 10:01:39

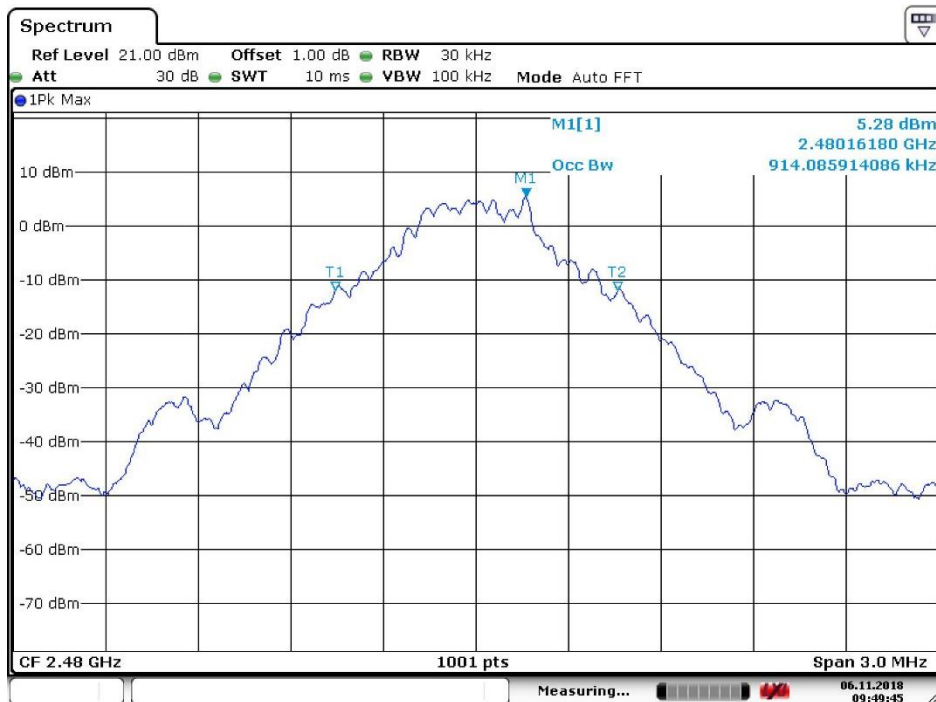


Date: 6 NOV.2018 09:49:45

**4.4.1.4  $\pi/4$ DQPSK \_Lowest Channel**

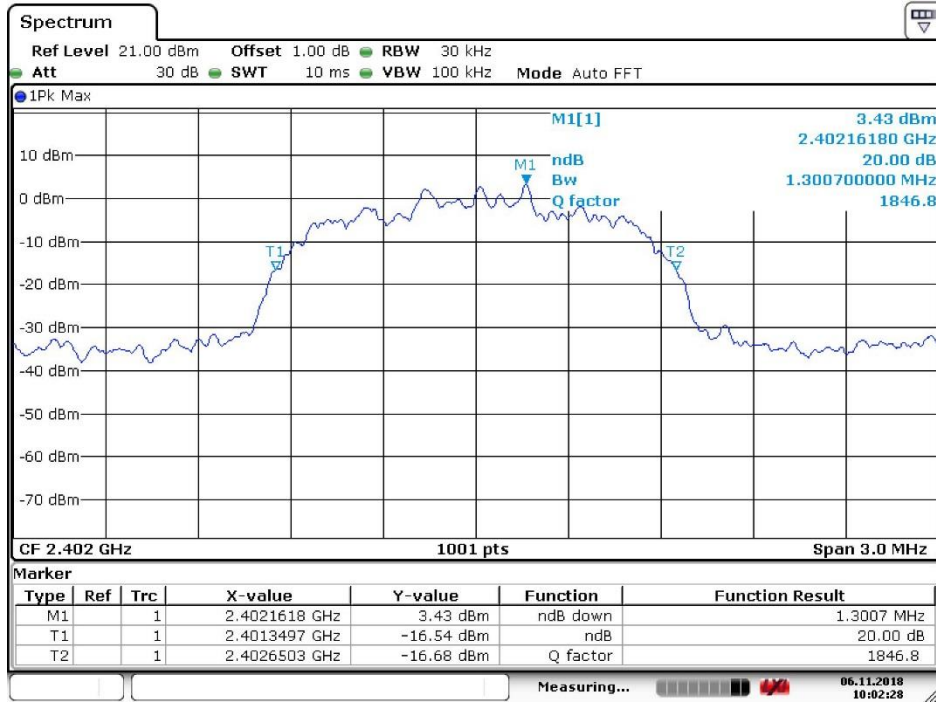


Date: 6 NOV.2018 10:02:28

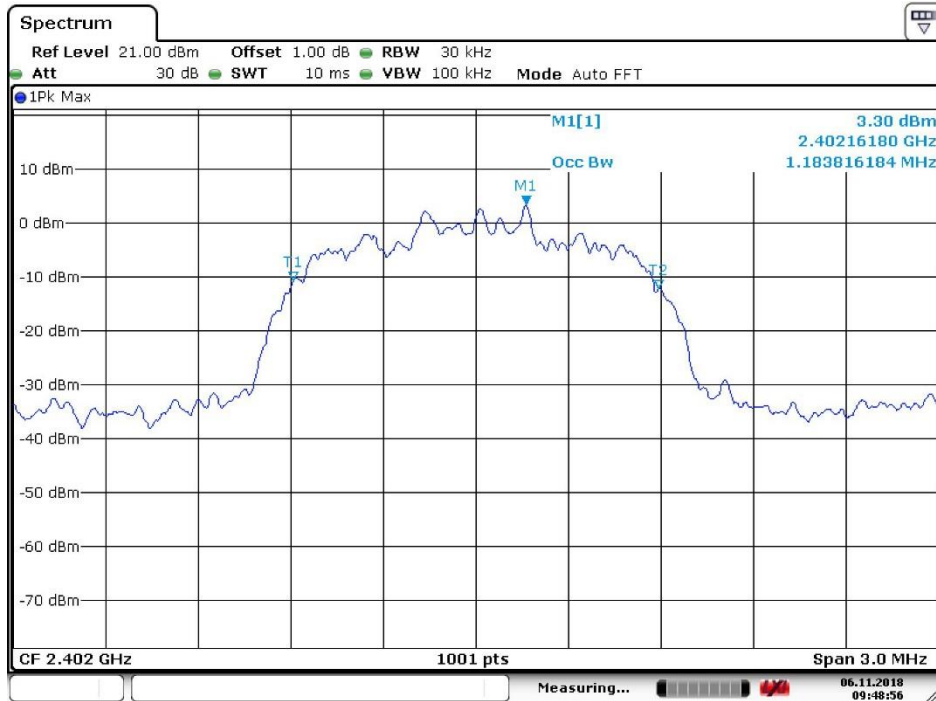


Date: 6 NOV.2018 09:48:56

4.4.1.5  $\pi/4$ DQPSK\_Middle Channel

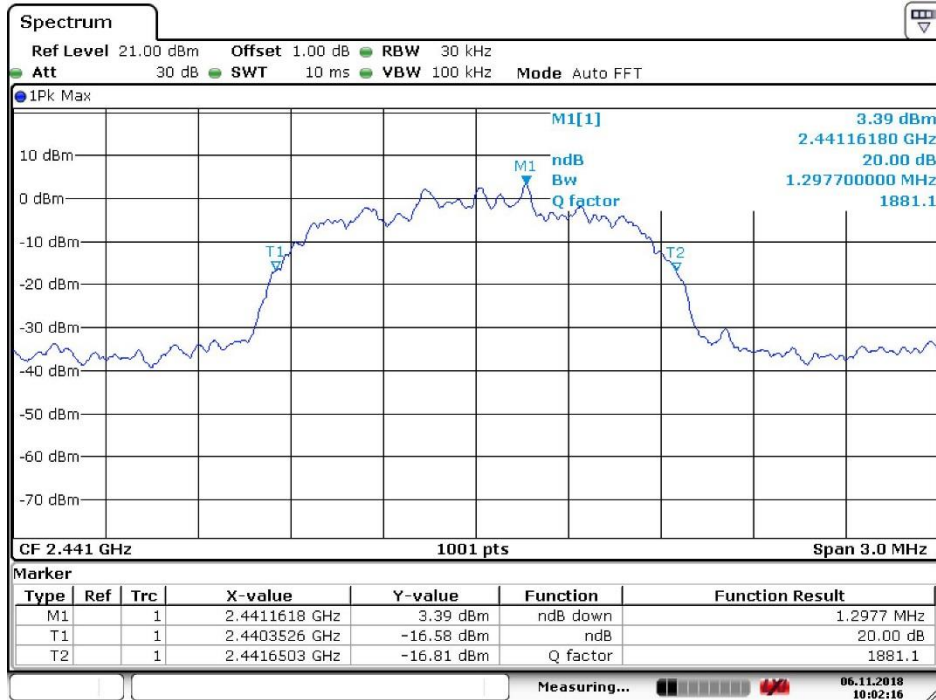


Date: 6 NOV.2018 10:02:16

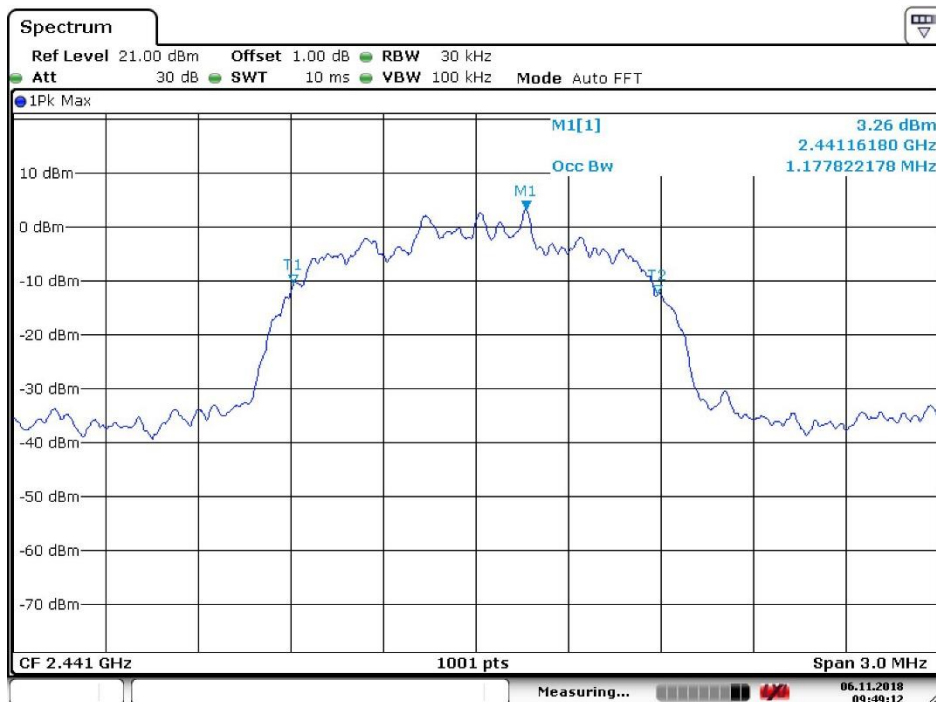


Date: 6 NOV.2018 09:49:12



**4.4.1.6  $\pi/4$ DQPSK\_Highest Channel**

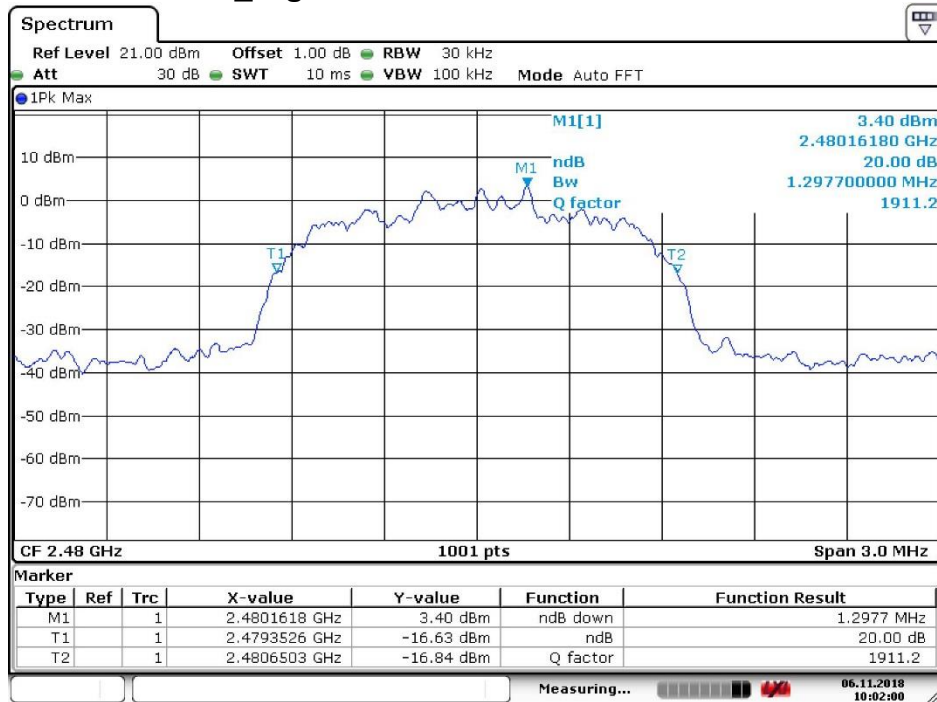


Date: 6 NOV. 2018 10:02:01

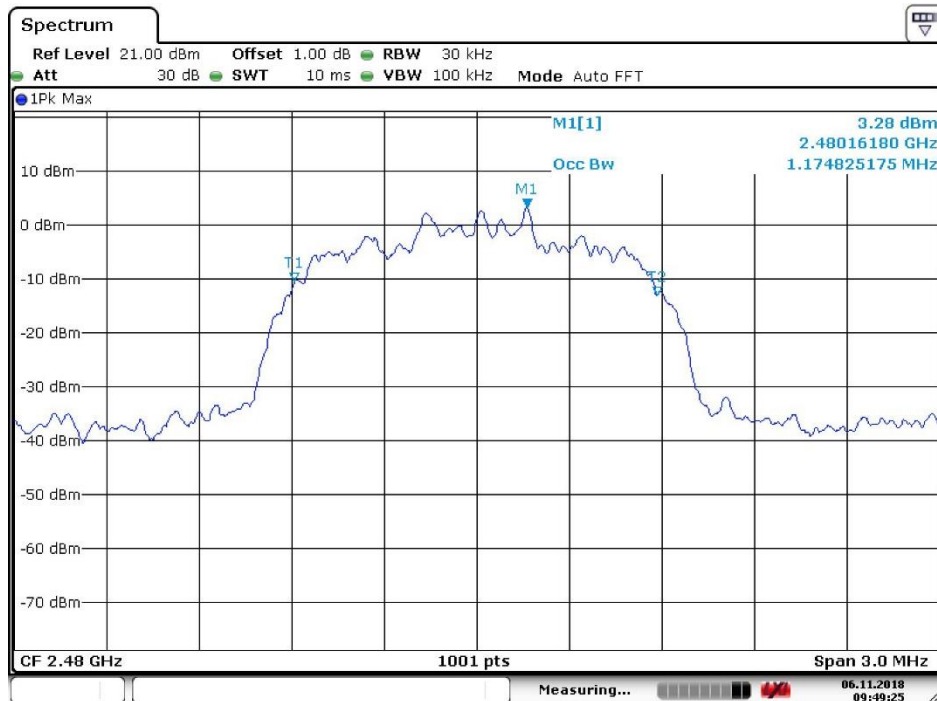


Date: 6 NOV. 2018 09:49:26

4.4.1.7

**8DPSK\_Lowest Channel**

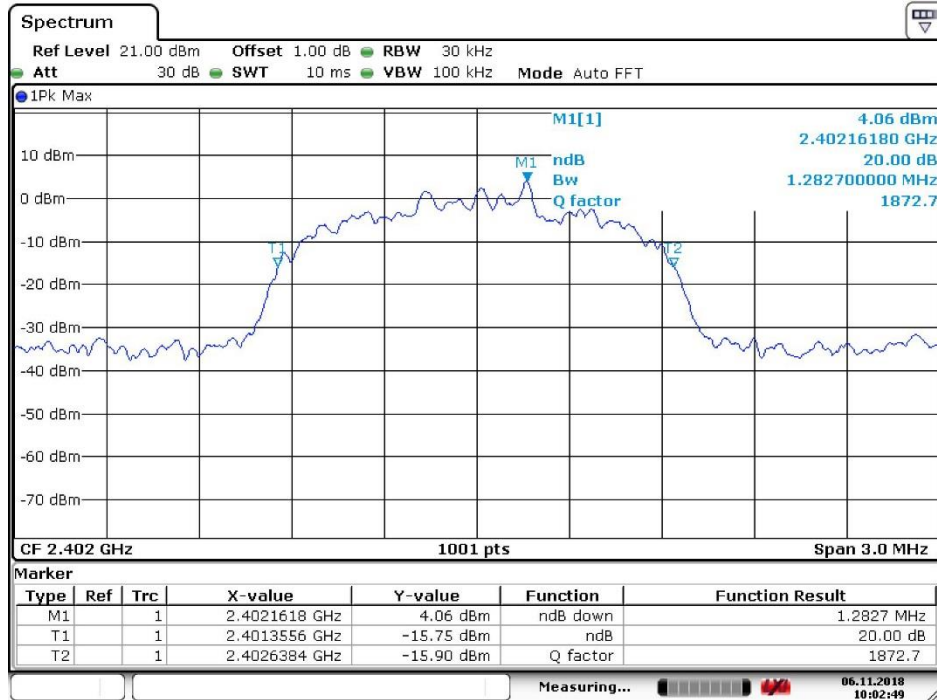


Date: 6 NOV.2018 10:02:49

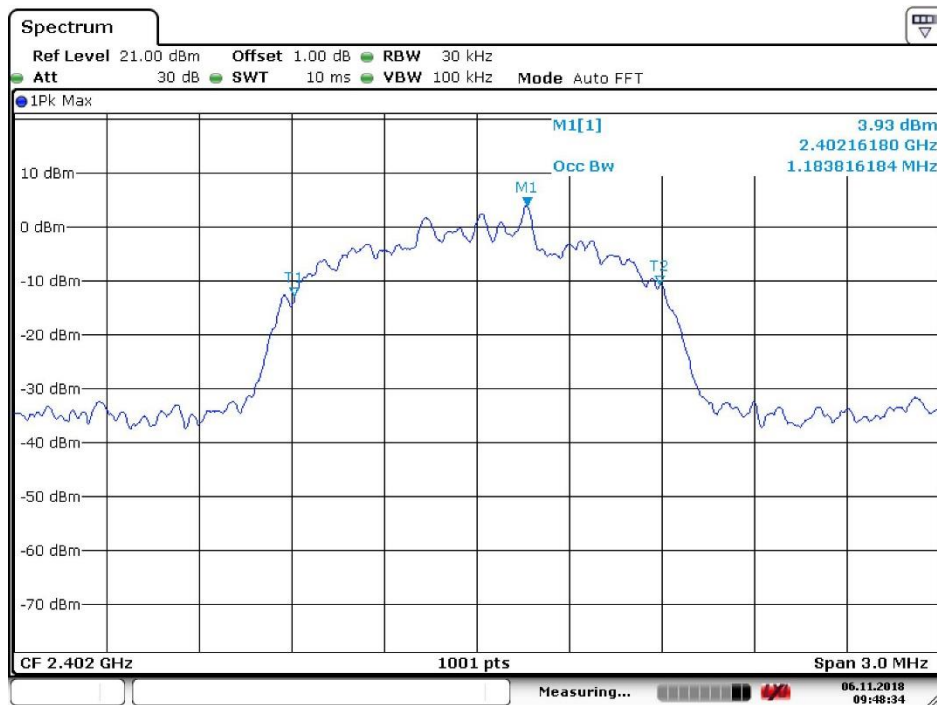


Date: 6 NOV.2018 09:48:35

**4.4.1.8 8DPSK\_Middle Channel**

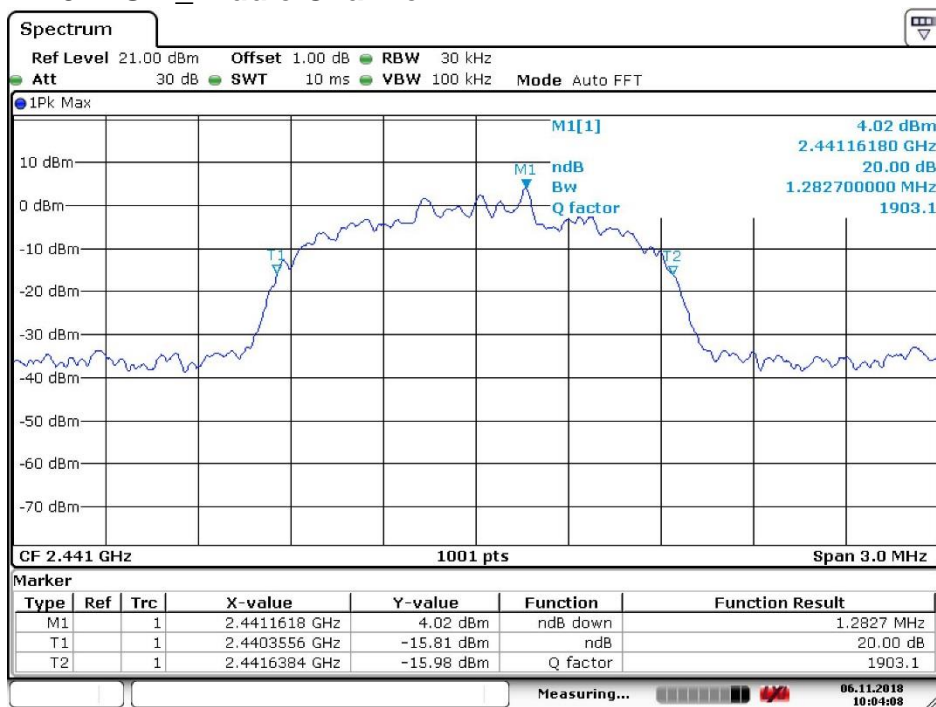


Date: 6 NOV. 2018 10:04:09

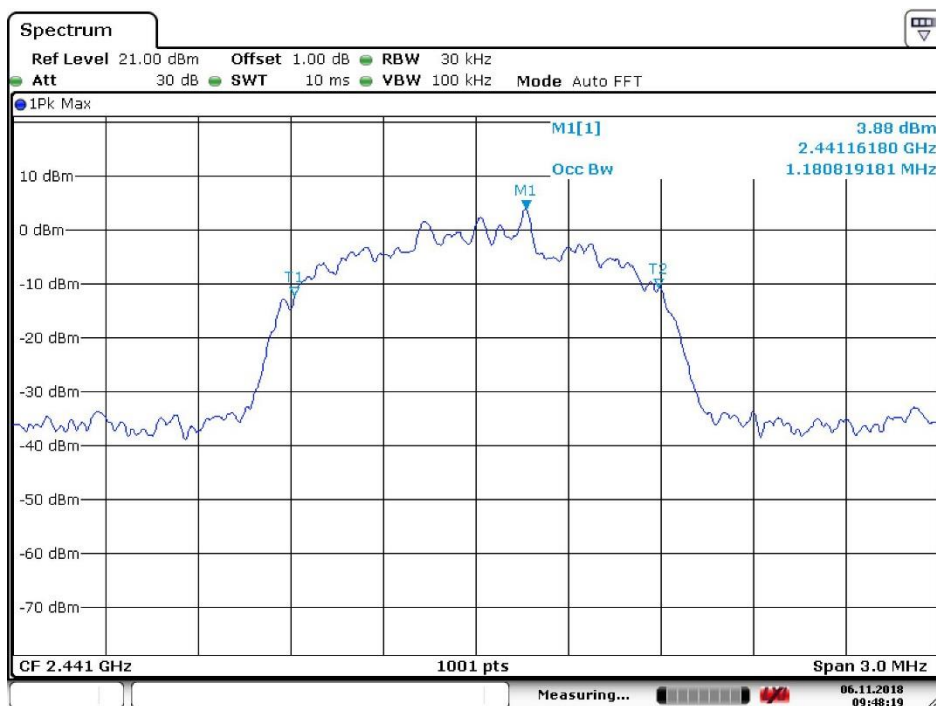


Date: 6 NOV. 2018 09:48:19

4.4.1.9 8DPSK\_Highest Channel

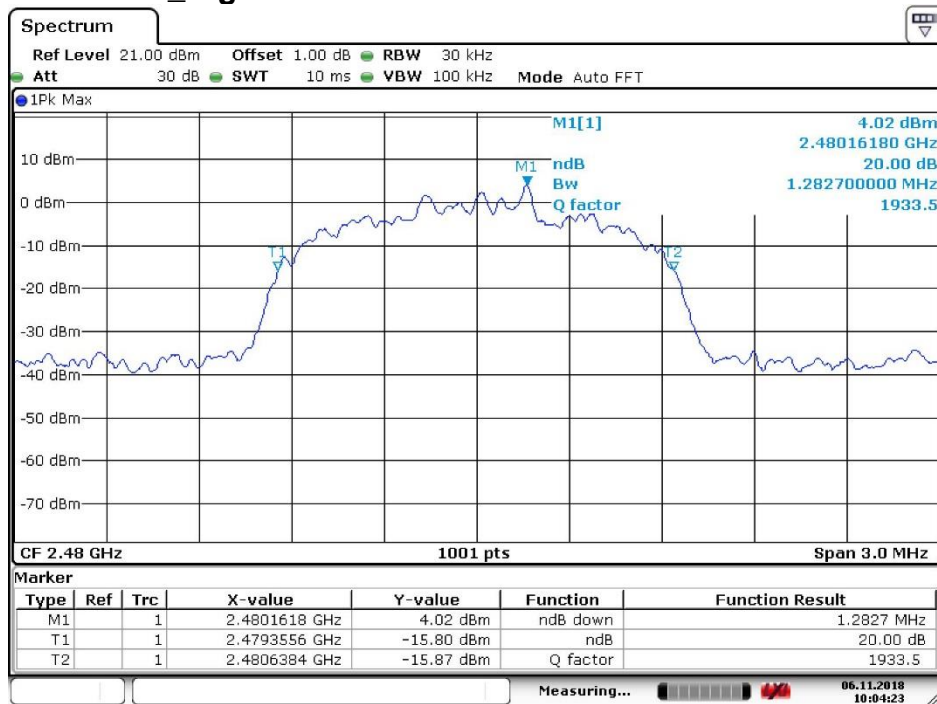

Date: 6 NOV.2018 10:04:23

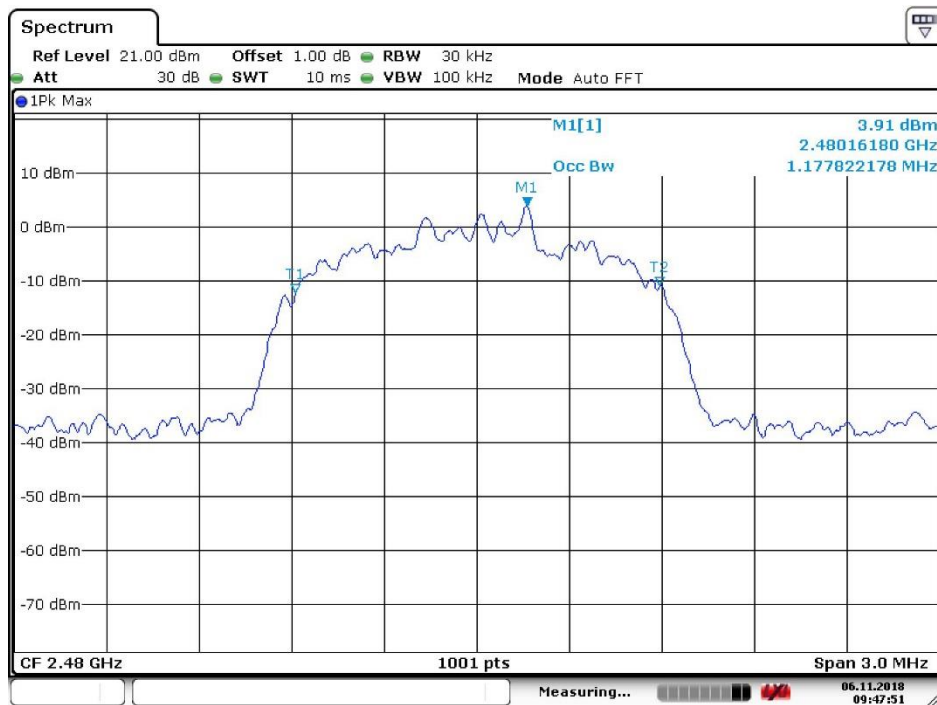

Date: 6 NOV.2018 09:47:52

### 4.5 Carrier Frequencies Separation


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.2
Test Setup:	<p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Limit:	2/3 of the 20dB bandwidth Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

#### 4.5.1 Test Results

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1001	599.4	Pass
$\pi/4$ DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1001	835.1	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1001	841.1	Pass


**4.5.2 Test plots:**

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

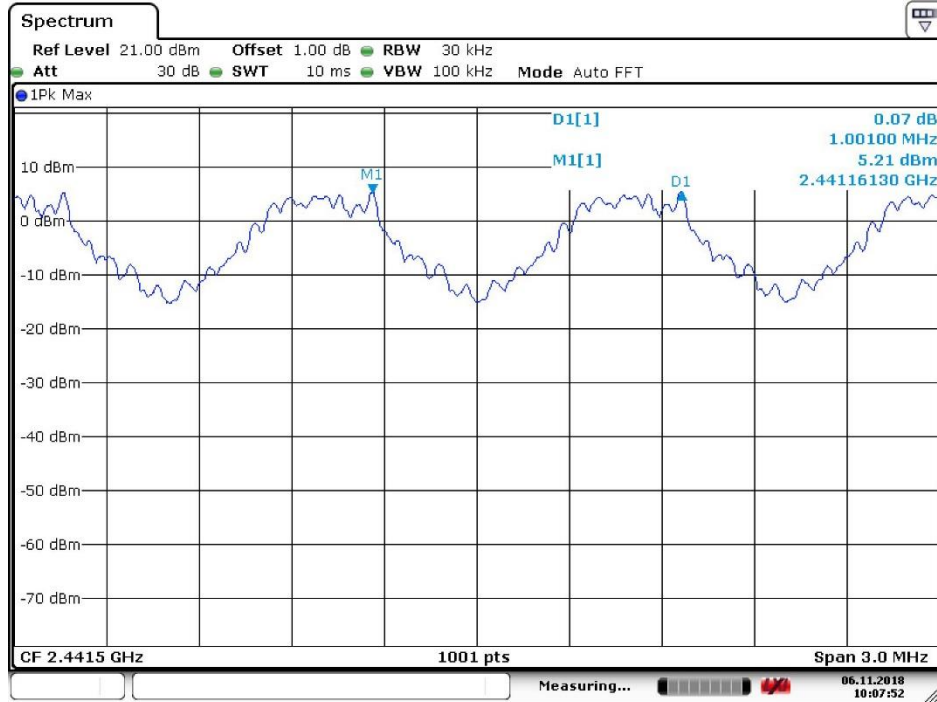

Date: 6 NOV. 2018 10:07:53


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

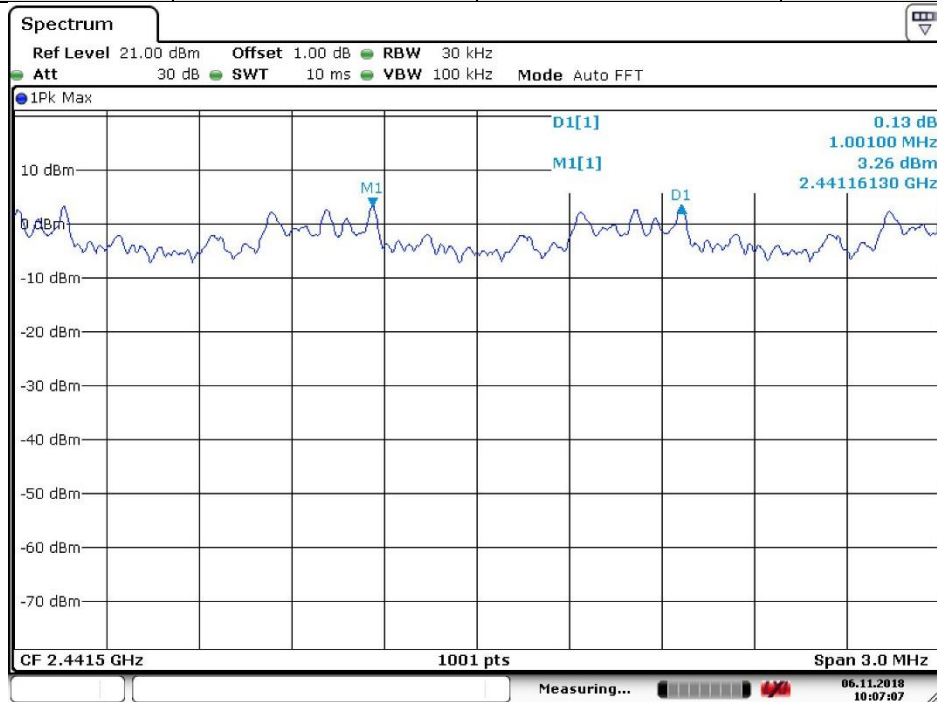

Date: 6 NOV. 2018 10:07:07



Test mode: 8DPSK Test channel: Middle

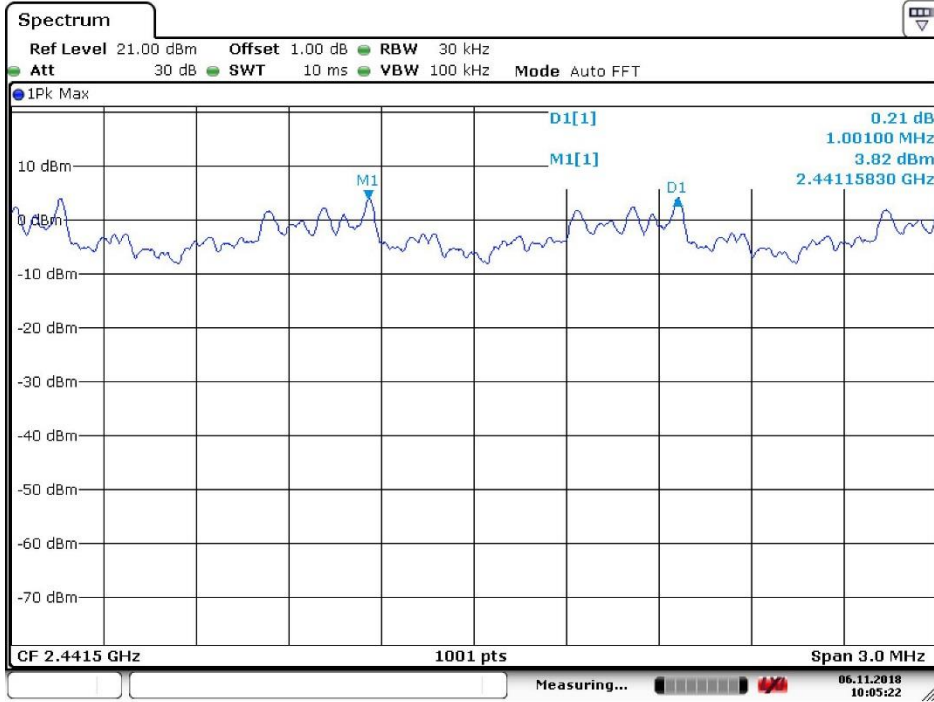

Date: 6.NOV.2018 10:05:22

## 4.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.3
Test Setup:	<p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are both on a table labeled 'Non-Conducted Table'. Below the table is a grey bar labeled 'Ground Reference Plane'.</p>
Limit:	At least 15 channels
Test Mode:	Hopping transmitting with all kind of modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

### 4.6.1 Test Results

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
$\pi/4$ DQPSK	79	≥15
8DPSK	79	≥15