



4.6.2.5 802.11G_Middle Channel

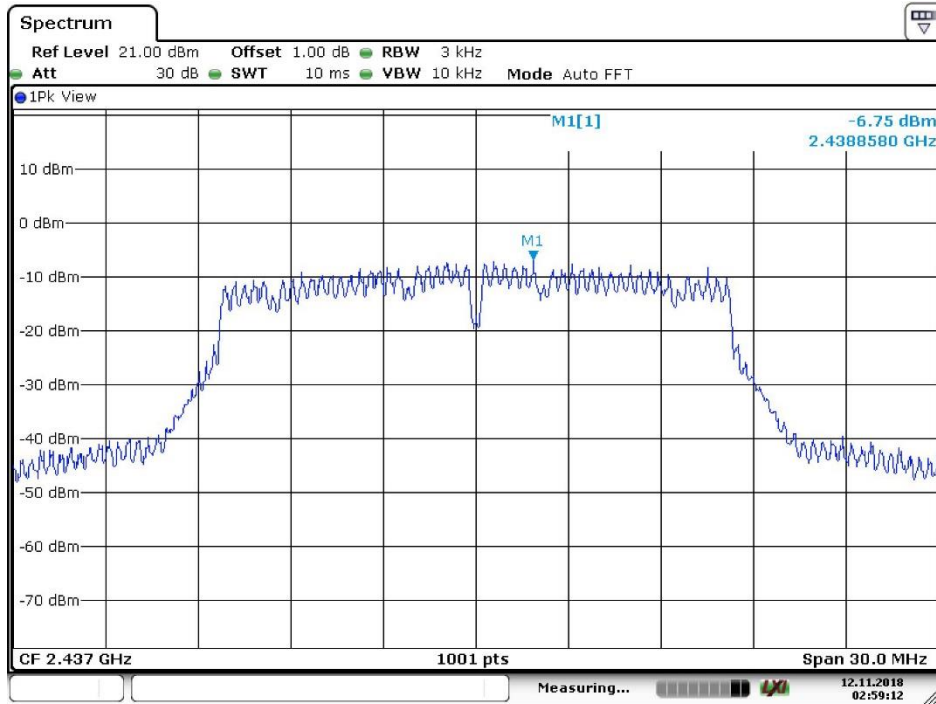


Date: 12.NOV.2018 02:59:13

4.6.2.6 802.11G_Highest Channel

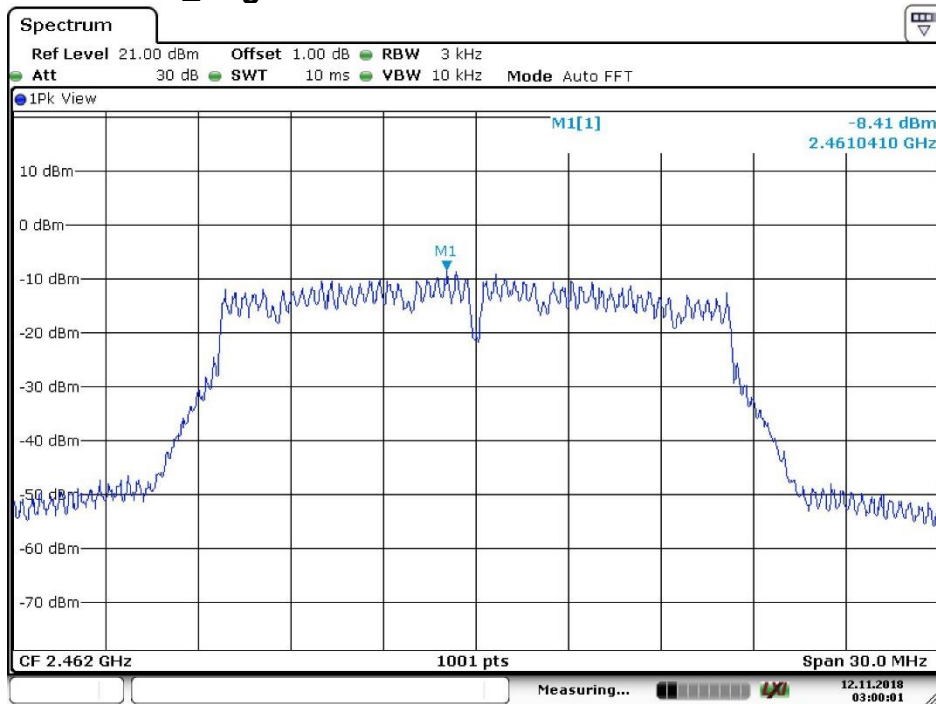


Date: 12.NOV.2018 03:00:02

4.6.2.7 802.11N20_Lowest Channel

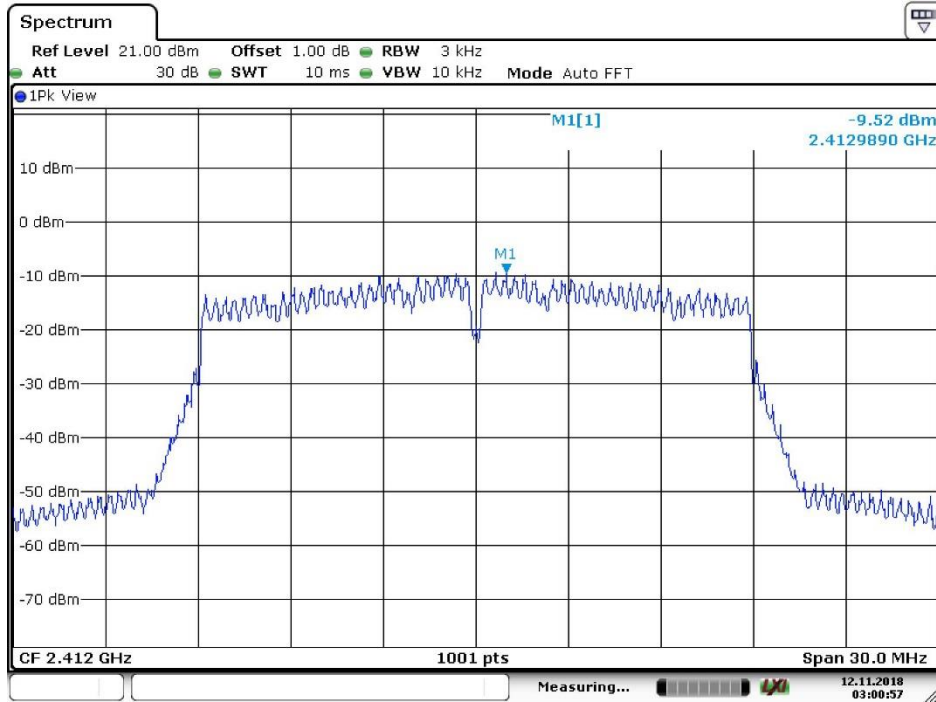


Date: 12.NOV.2018 03:00:57

4.6.2.8 802.11 N20_Middle Channel

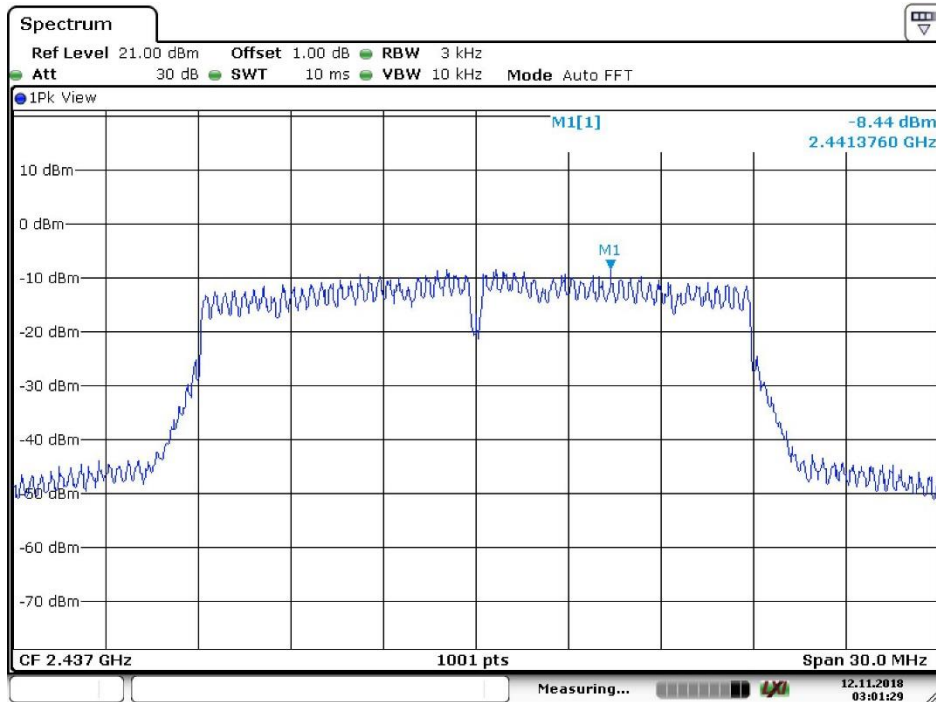


Date: 12.NOV.2018 03:01:30

4.6.2.9 802.11 N20_ Highest Channel

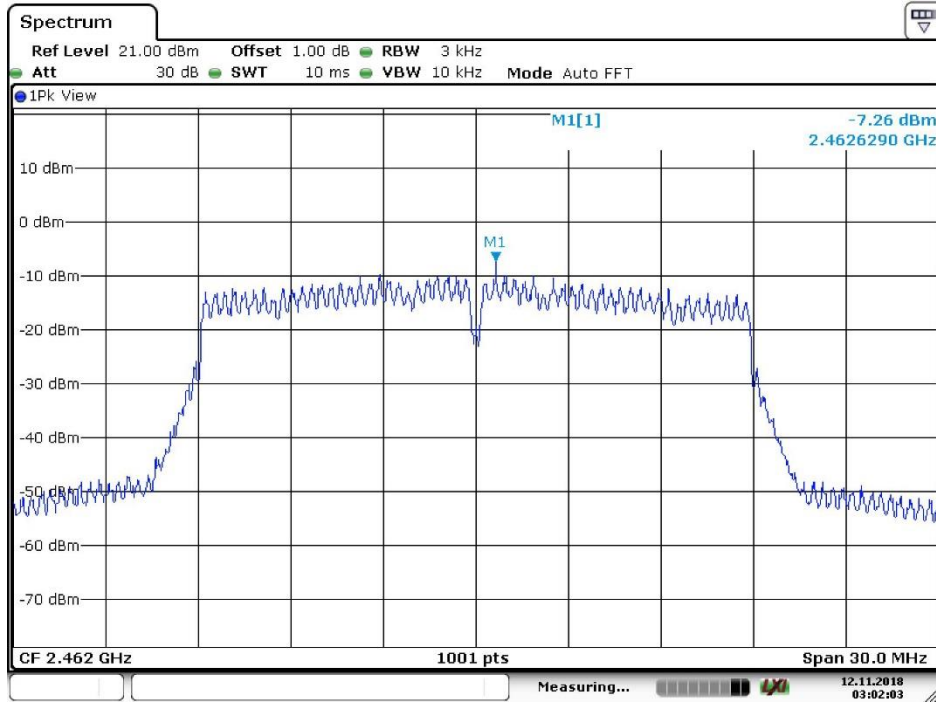


Date: 12.NOV.2018 03:02:03

4.6.2.10 802.11N40_ Lowest Channel

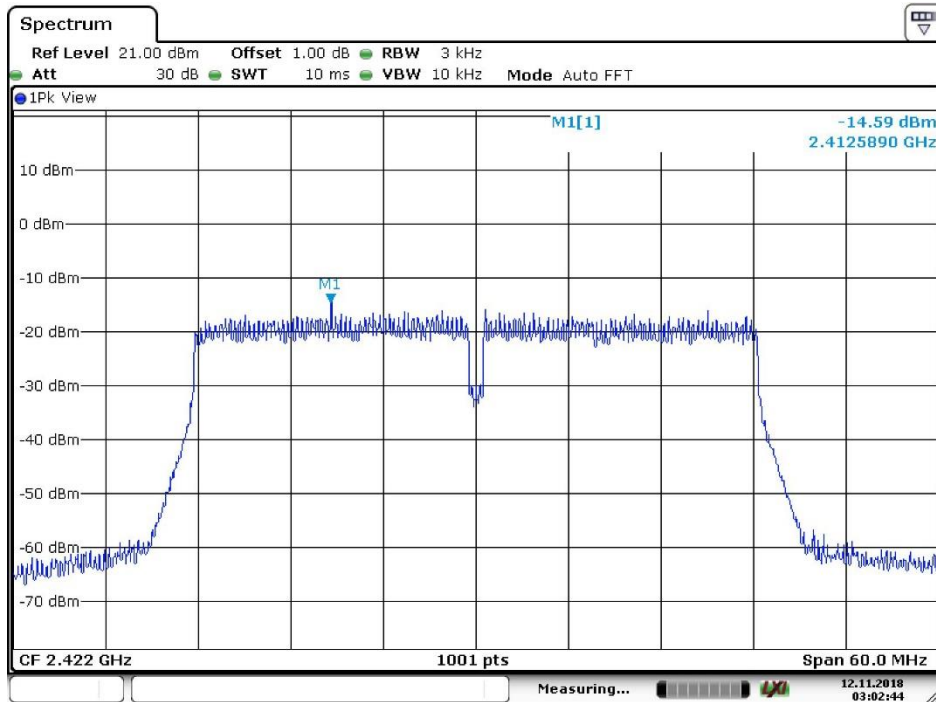


Date: 12.NOV.2018 03:02:45

4.6.2.11 802.11 N40_ Middle Channel

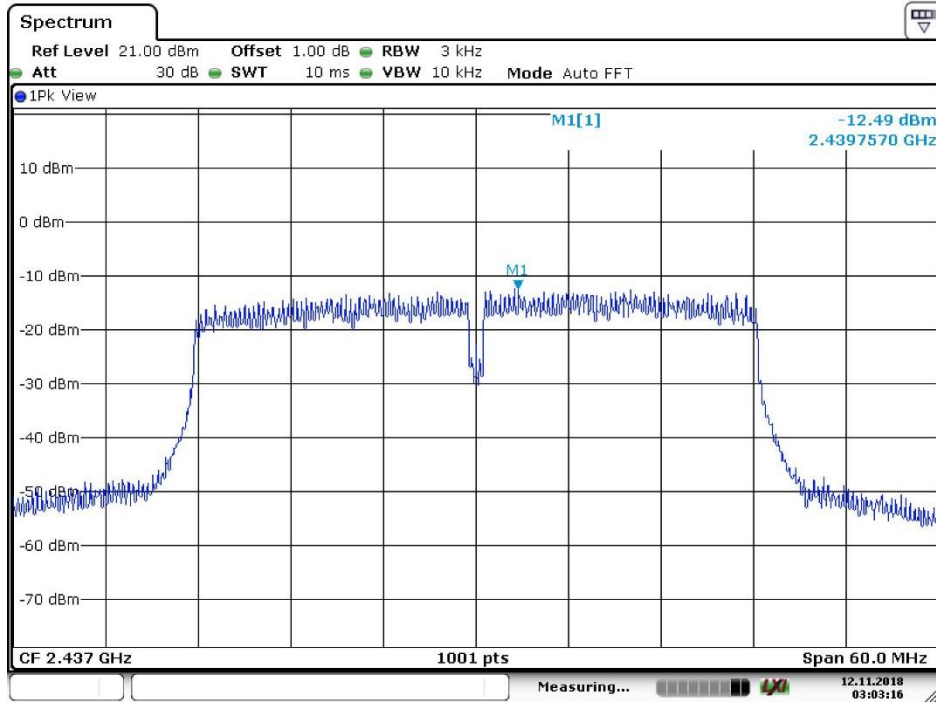


Date: 12.NOV.2018 03:03:16

4.6.2.12 802.11 N40_ Highest Channel

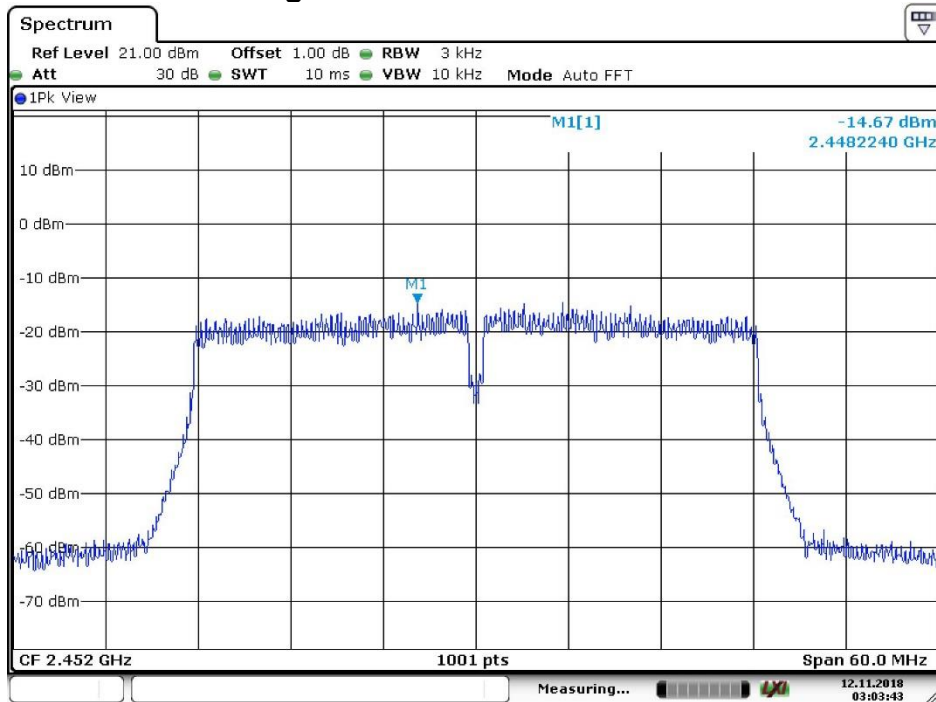


Date: 12.NOV.2018 03:03:43

4.7 Band-edge for RF Conducted Emissions

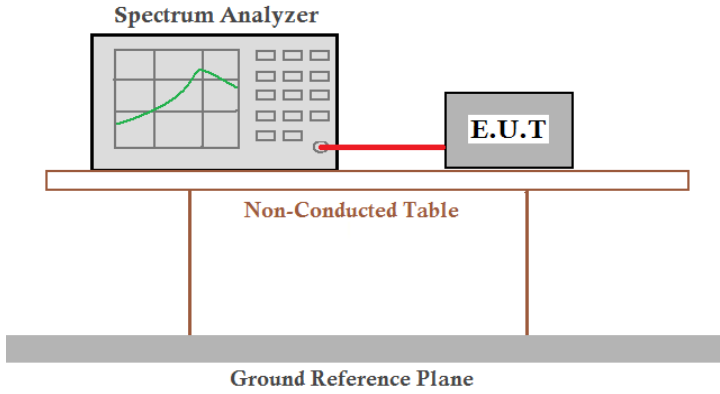Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	 <p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are placed on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20) ; 13.5Mbps of rate is the worst case of 802.11N(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


4.7.1 Test plots

4.7.1.1 802.11B_Lowest Channel

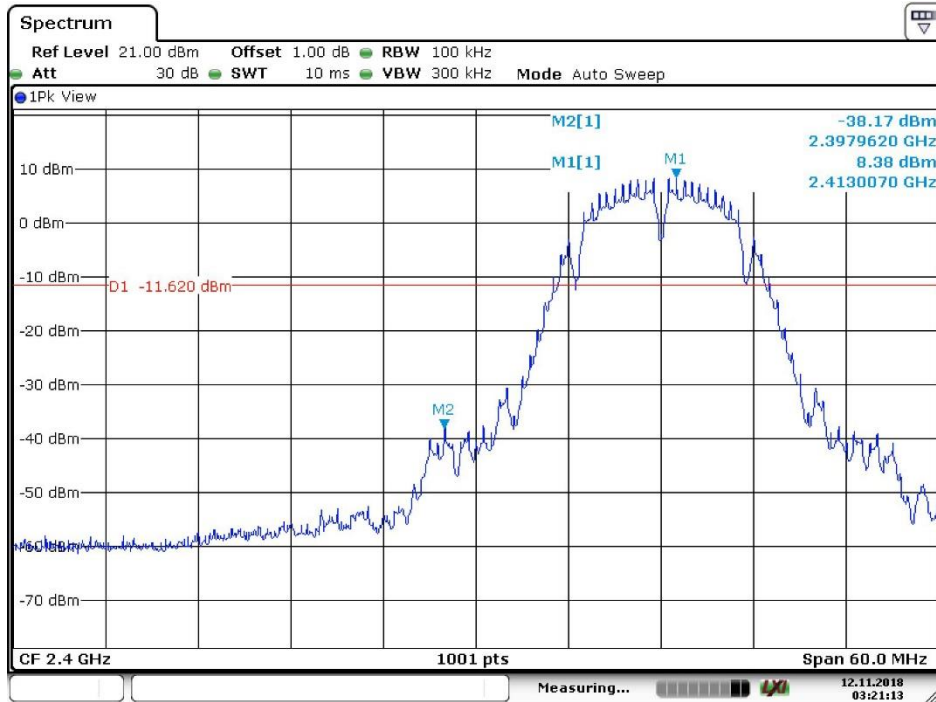


Date: 12.NOV.2018 03:21:13

4.7.1.2 802.11B_Highest Channel

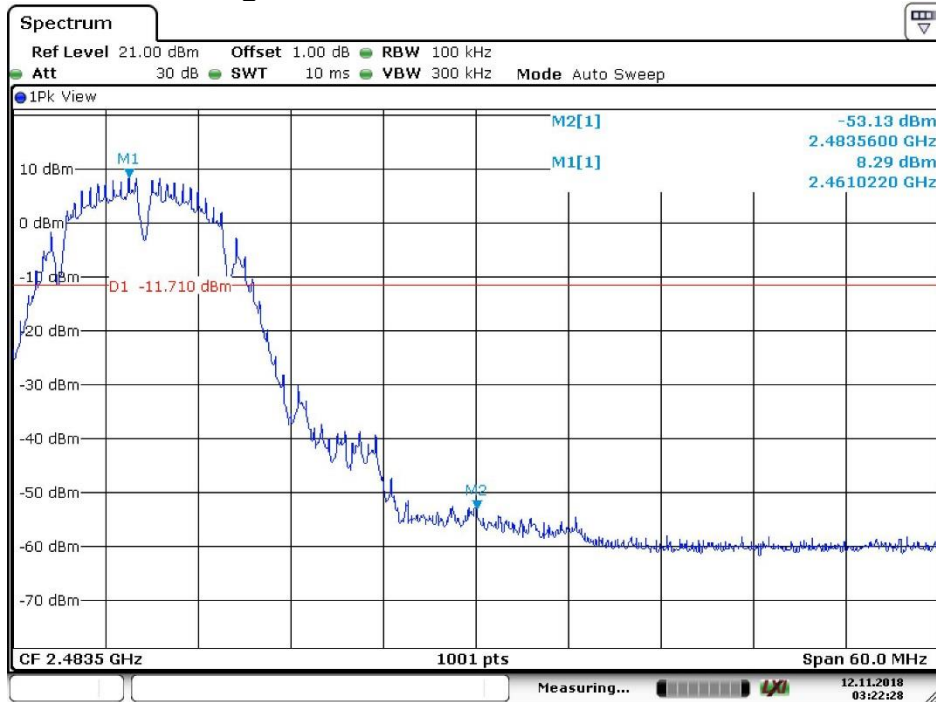


Date: 12.NOV.2018 03:22:28

4.7.1.3 802.11G_Lowest Channel

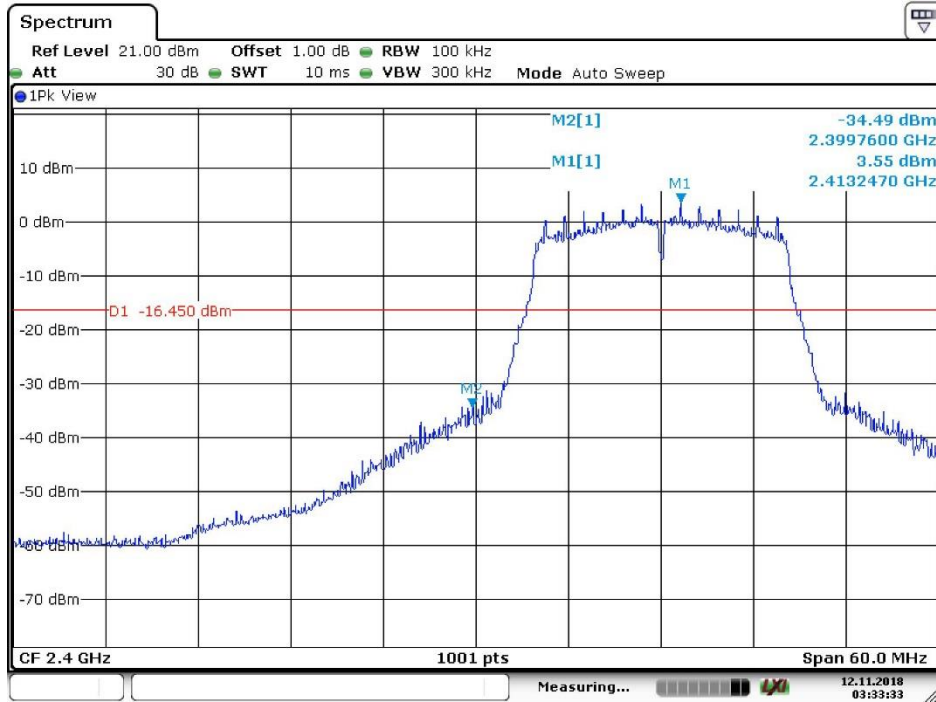


Date: 12.NOV.2018 03:33:34

4.7.1.4 802.11G_Highest Channel

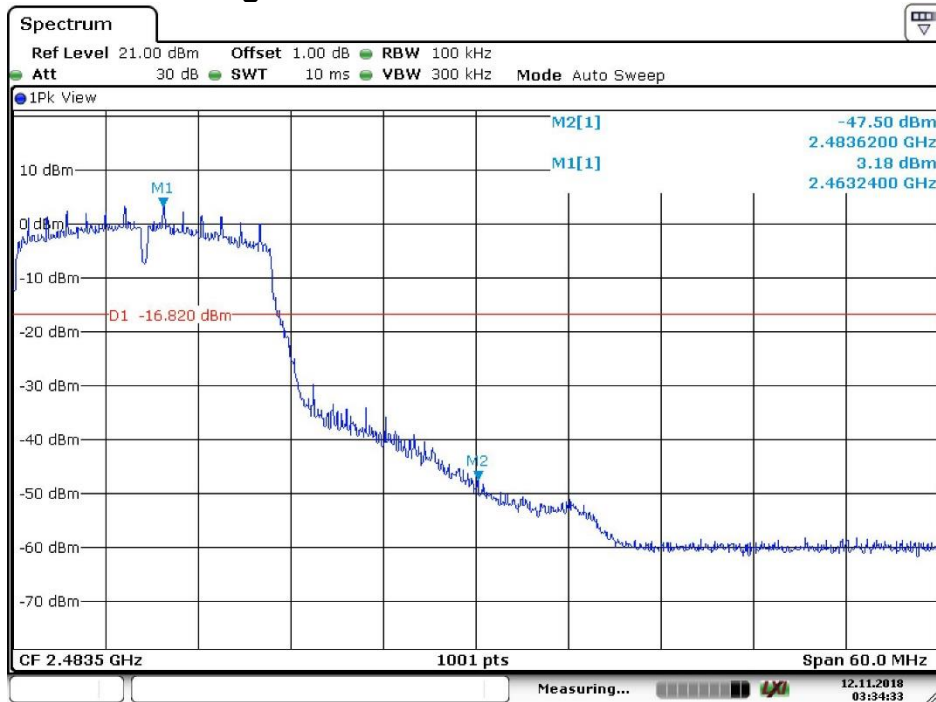


Date: 12.NOV.2018 03:34:33

4.7.1.5 802.11N20_Lowest Channel

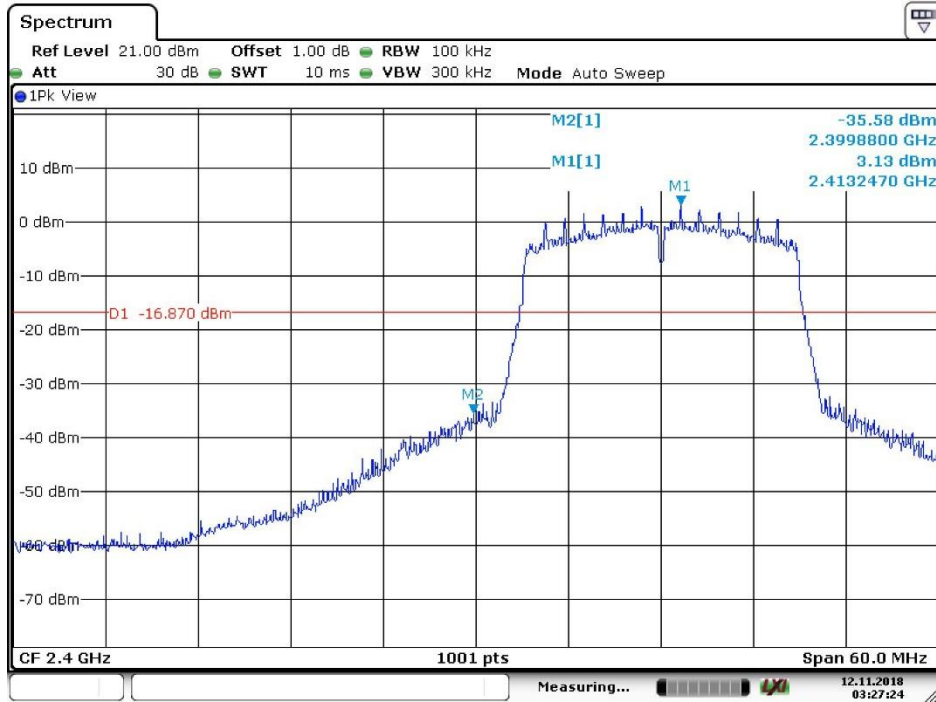


Date: 12.NOV.2018 03:27:24

4.7.1.6 802.11 N20_Highest Channel

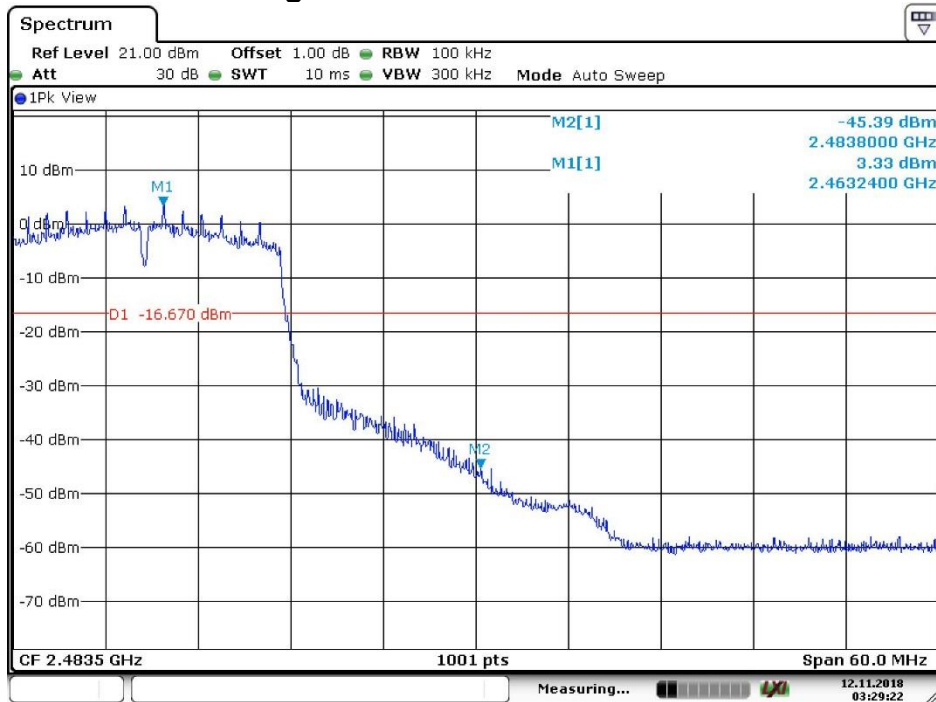


Date: 12.NOV.2018 03:29:23

4.7.1.7 802.11N40_Lowest Channel

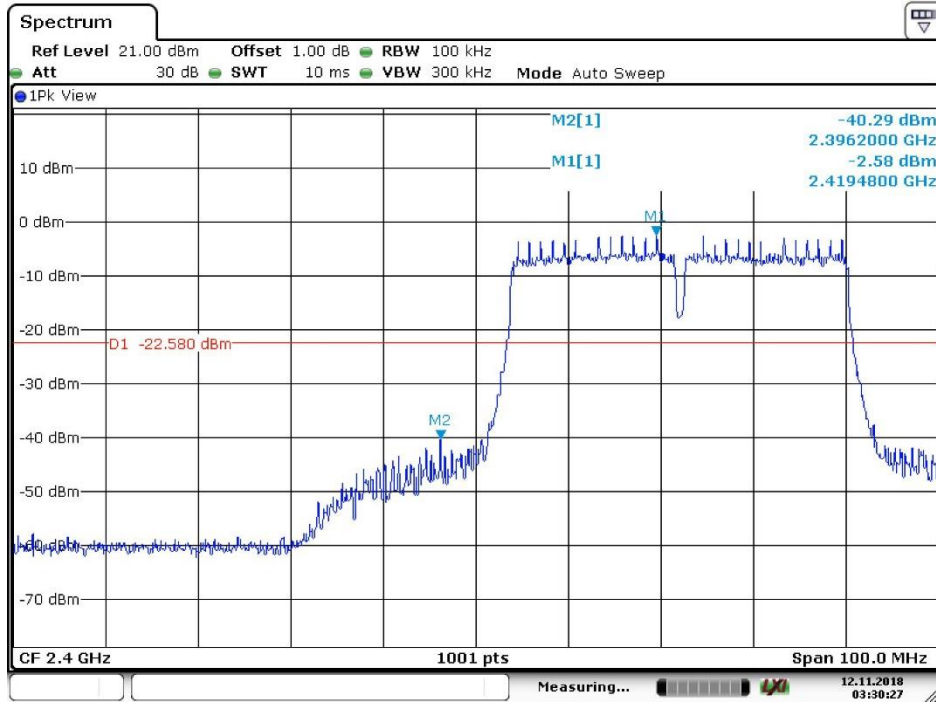


Date: 12.NOV.2018 03:30:27

4.7.1.8 802.11 N40_ Highest Channel

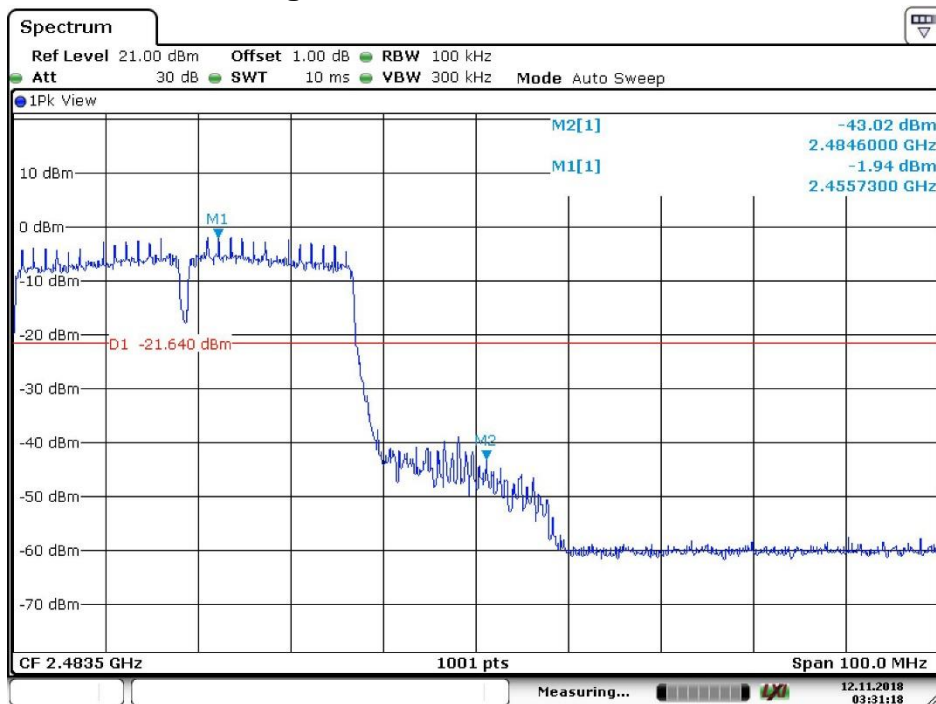


Date: 12.NOV.2018 03:31:19

4.8 RF Conducted Spurious Emissions

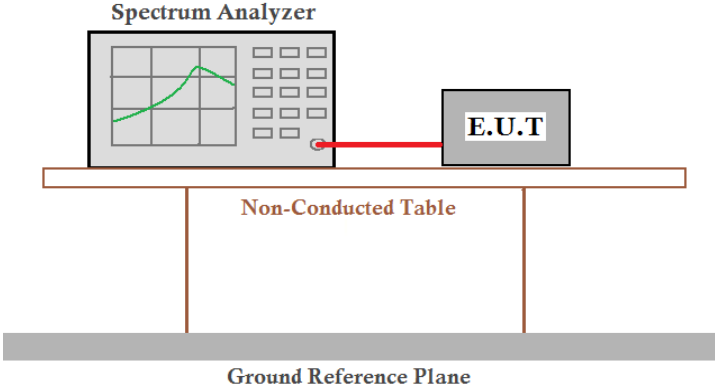Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); 13.5Mbps of rate is the worst case of 802.11N(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


4.8.1 Test plots

4.8.1.1 802.11B_Lowest Channel

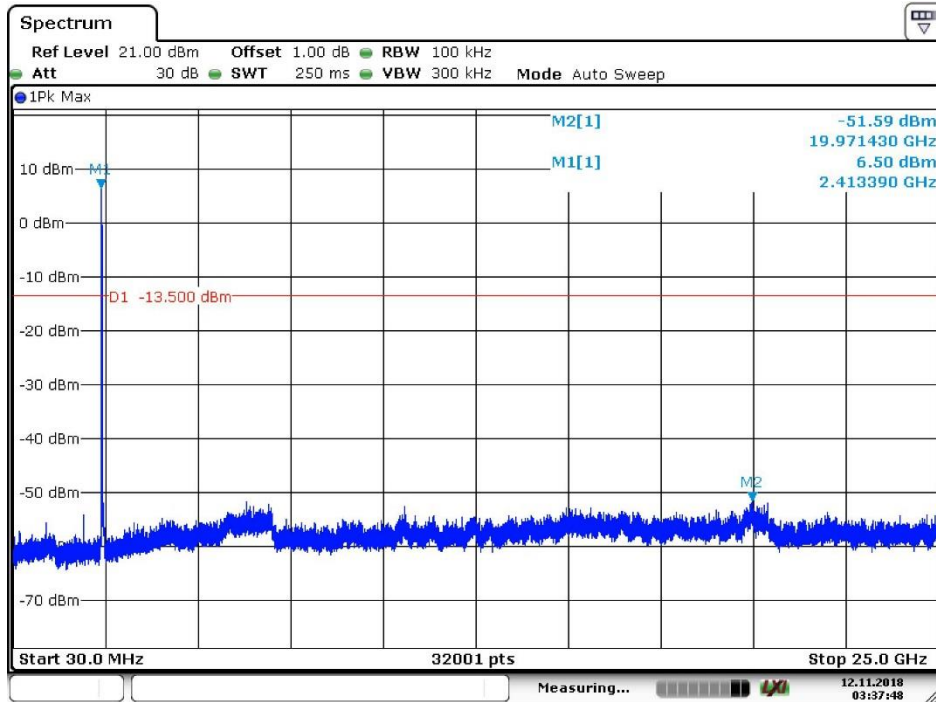


Date: 12.NOV.2018 03:37:48

4.8.1.2 802.11B_Middle Channel

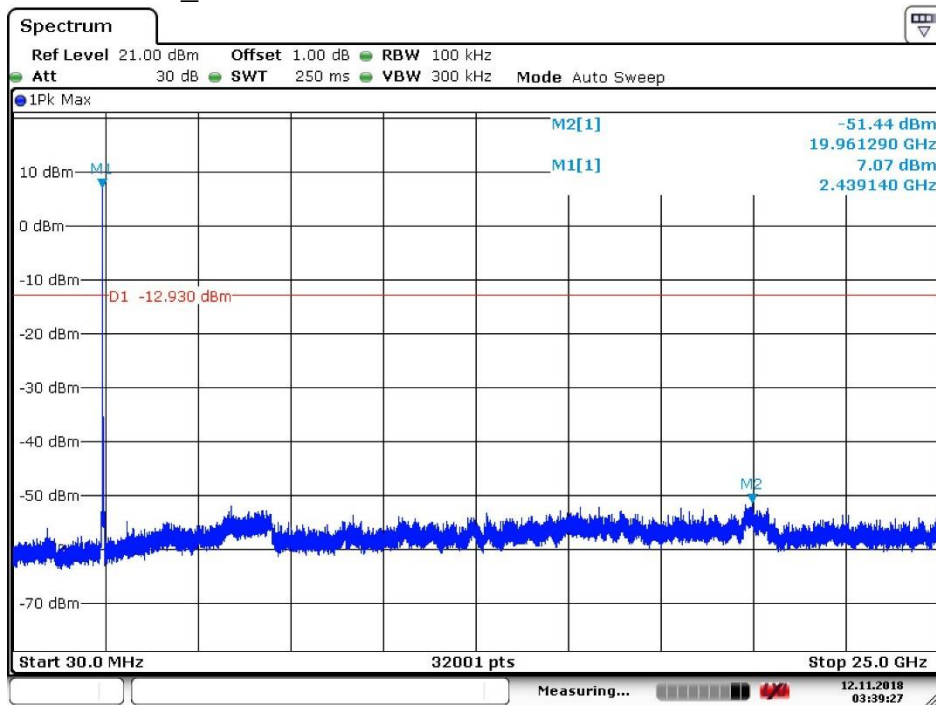


Date: 12.NOV.2018 03:39:27

4.8.1.3 802.11B_Highest Channel

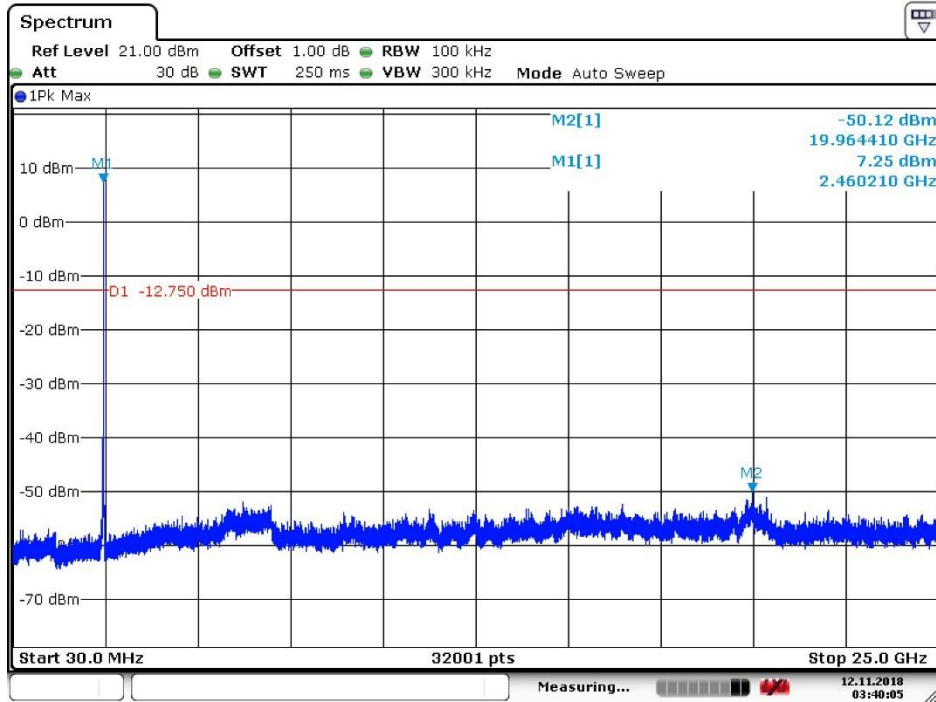


Date: 12.NOV.2018 03:40:06

4.8.1.4 802.11G_Lowest Channel

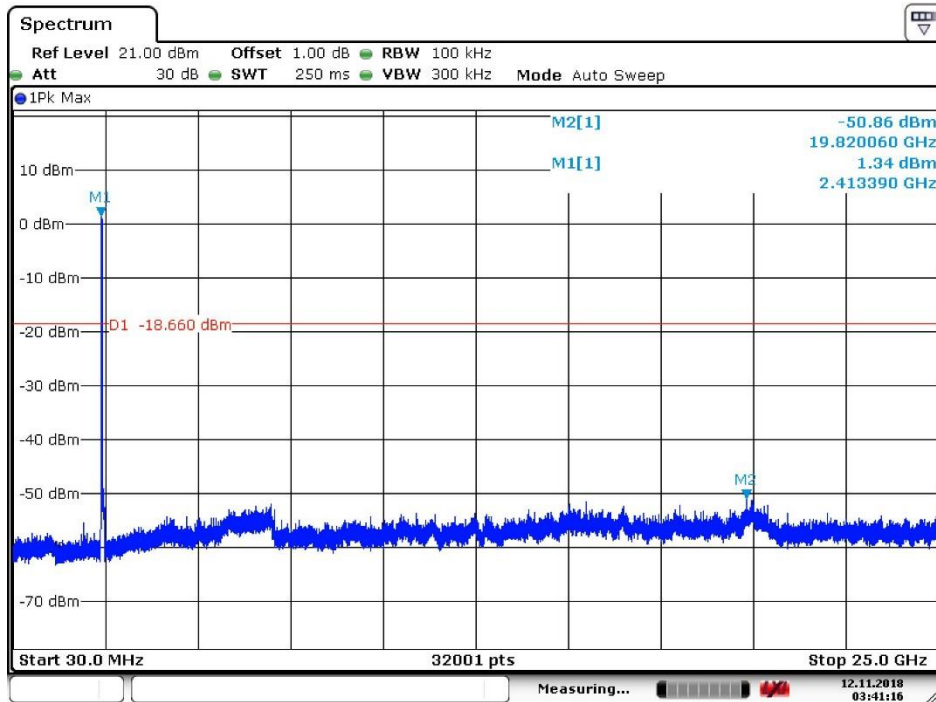


Date: 12.NOV.2018 03:41:16

4.8.1.5 802.11G_Middle Channel

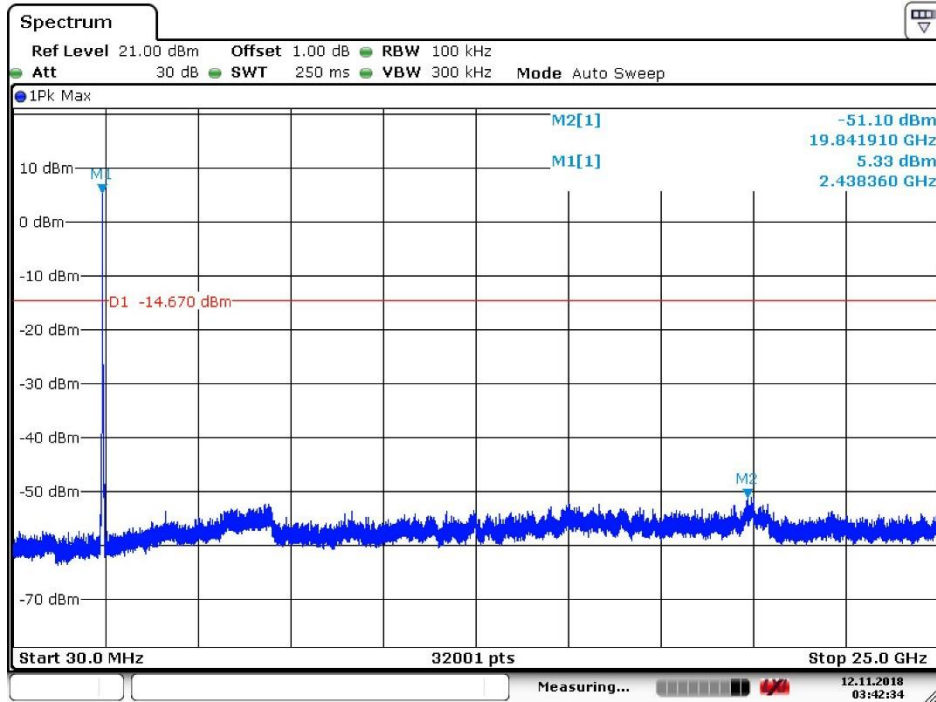


Date: 12.NOV.2018 03:42:35

4.8.1.6 802.11G_Highest Channel

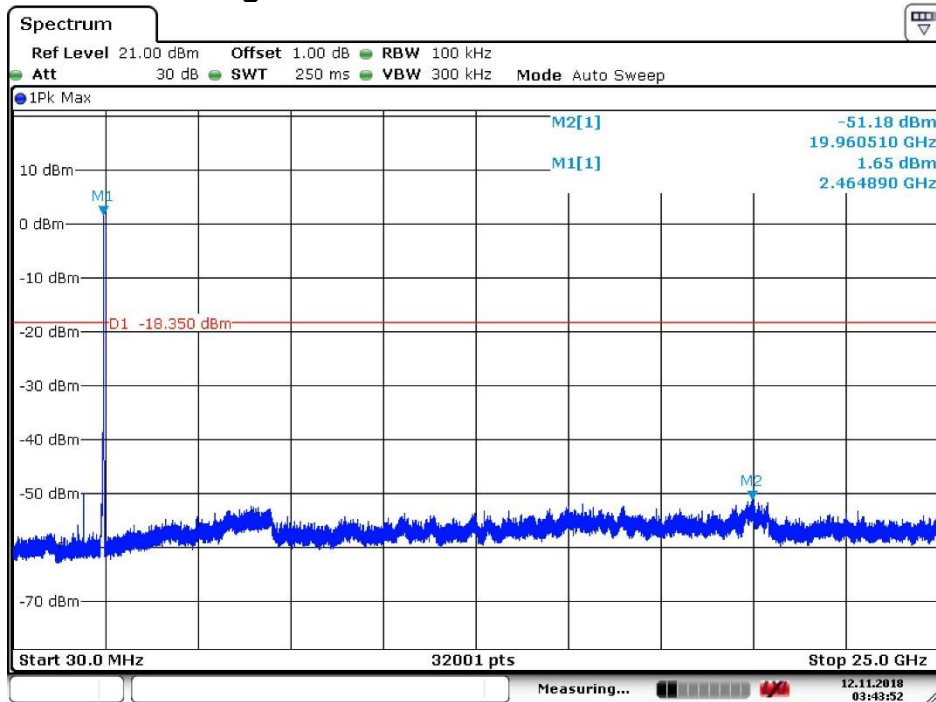


Date: 12.NOV.2018 03:43:53

4.8.1.7 802.11N20_Lowest Channel

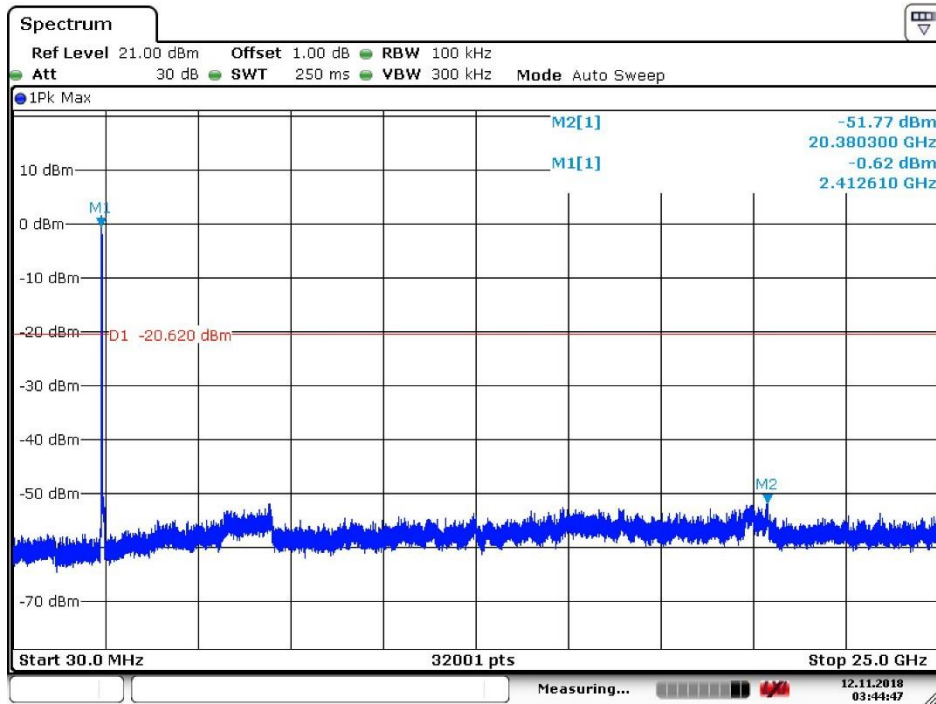


Date: 12.NOV.2018 03:44:48

4.8.1.8 802.11 N20_Middle Channel

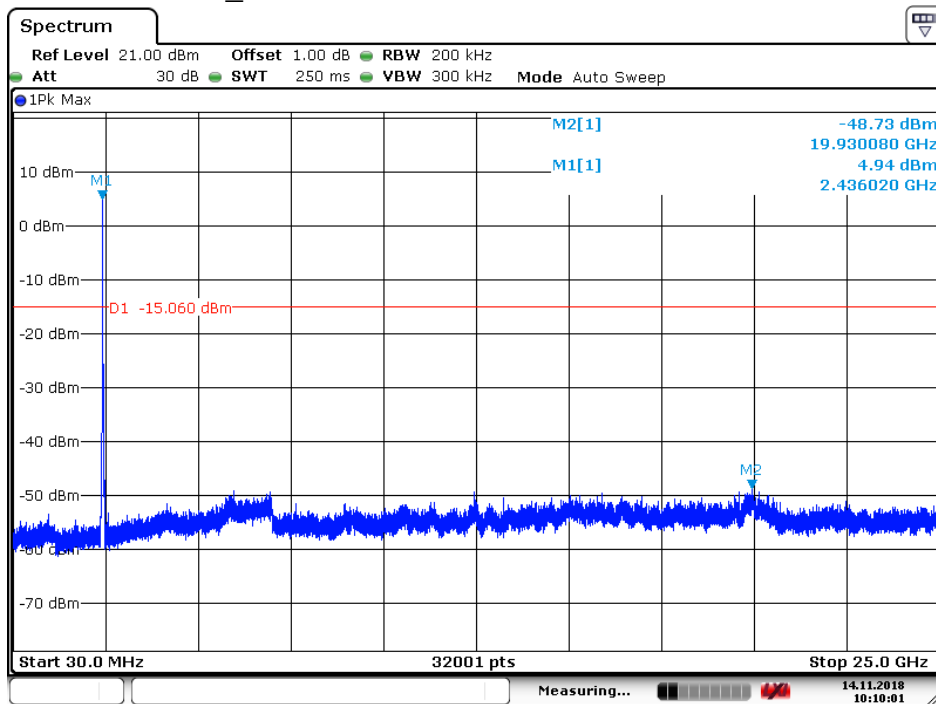


Date: 14.NOV.2018 10:10:02

4.8.1.9 802.11 N20_ Highest Channel

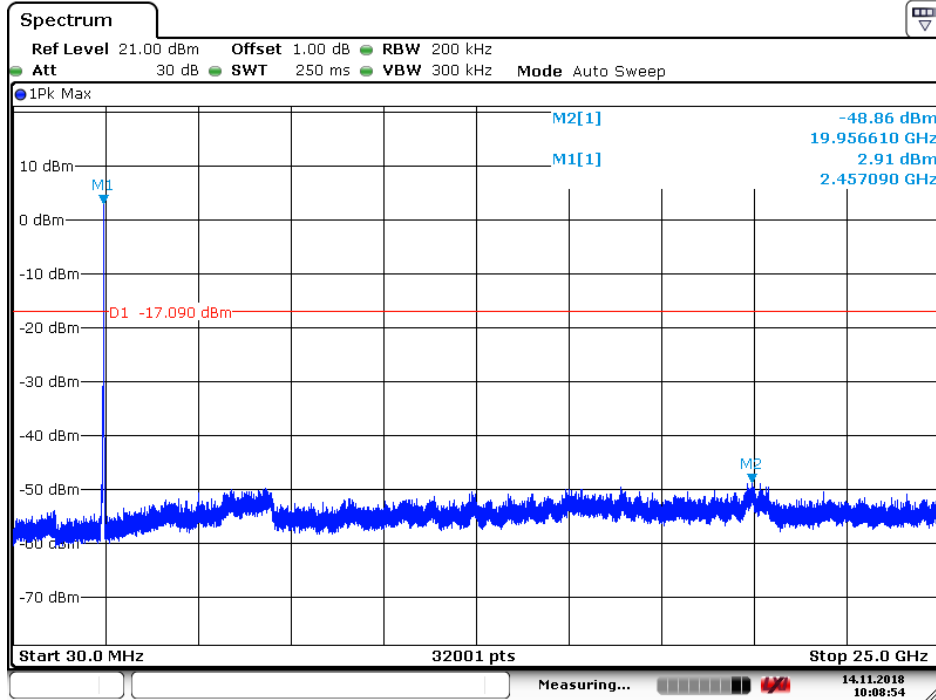


Date: 14 NOV 2018 10:08:55

4.8.1.10 802.11N40_ Lowest Channel

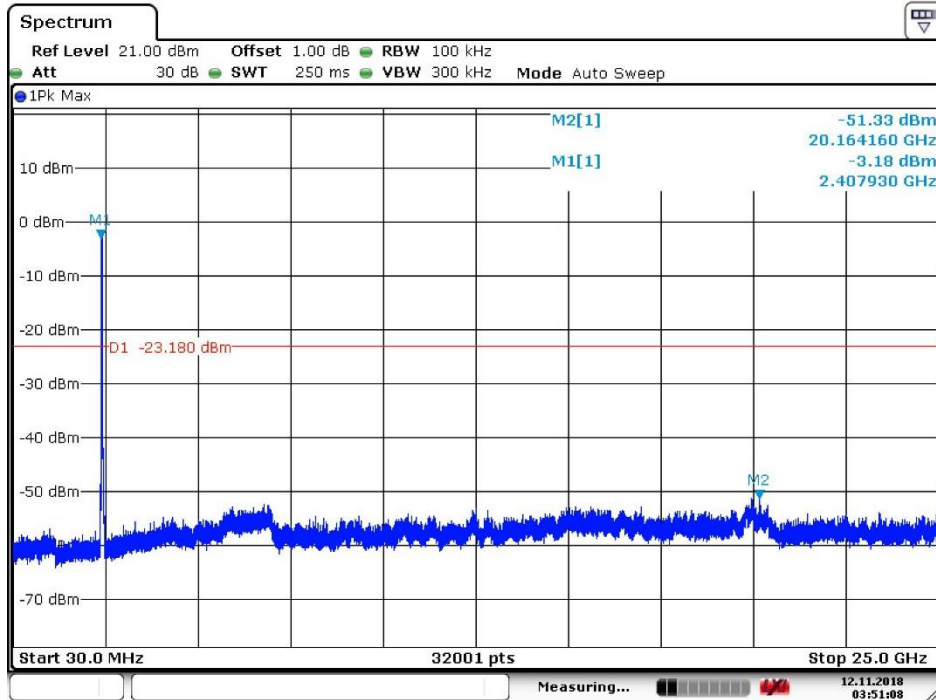


Date: 12 NOV 2018 03:51:08

4.8.1.11 802.11 N40_ Middle Channel

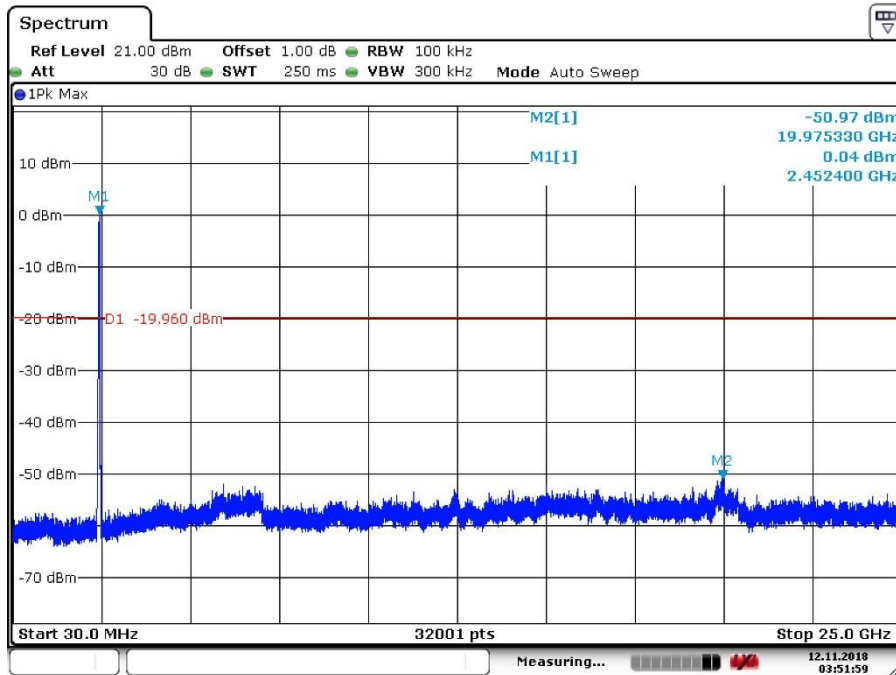

Date: 12.NOV.2018 03:52:00

4.8.1.12 802.11 N40_ Highest Channel

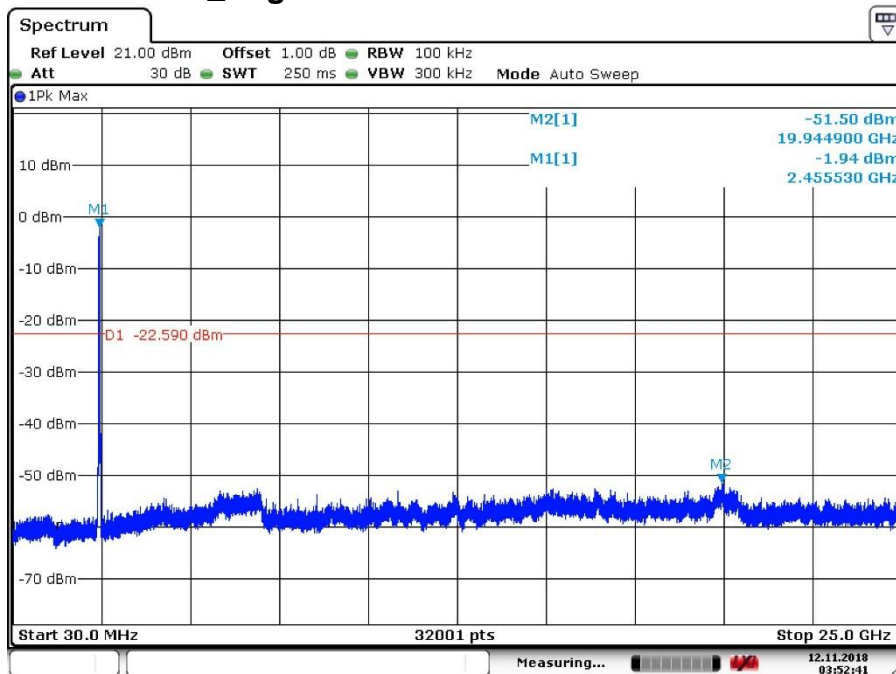


Date: 12.NOV.2018 03:52:41

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak	
	Peak	1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

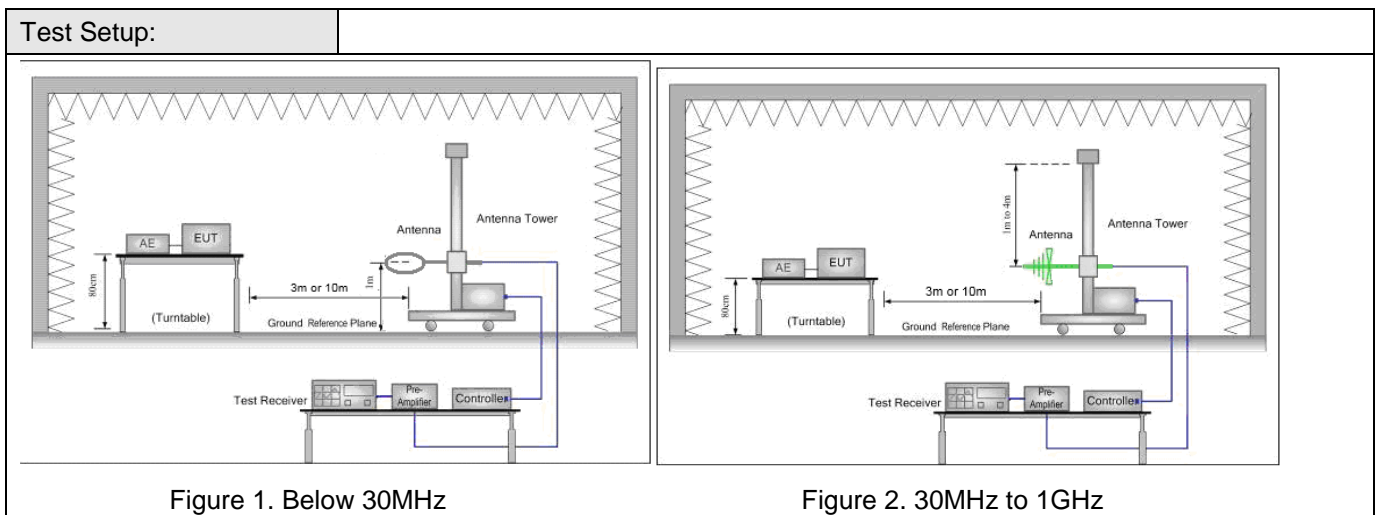

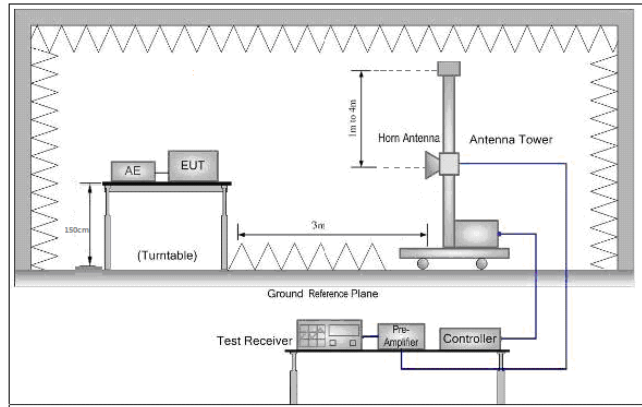



Figure 3. Above 1 GHz

<p>Test Procedure:</p>	<ol style="list-style-type: none"> a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
<p>Exploratory Test Mode:</p>	<p>Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); 13.5Mbps of rate is the worst case of 802.11N(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Only the worst case is recorded in the report.</p>

Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

4.9.1 Radiated emission below 1GHz

4.9.1.1 Charge + Transmitting, Vertical

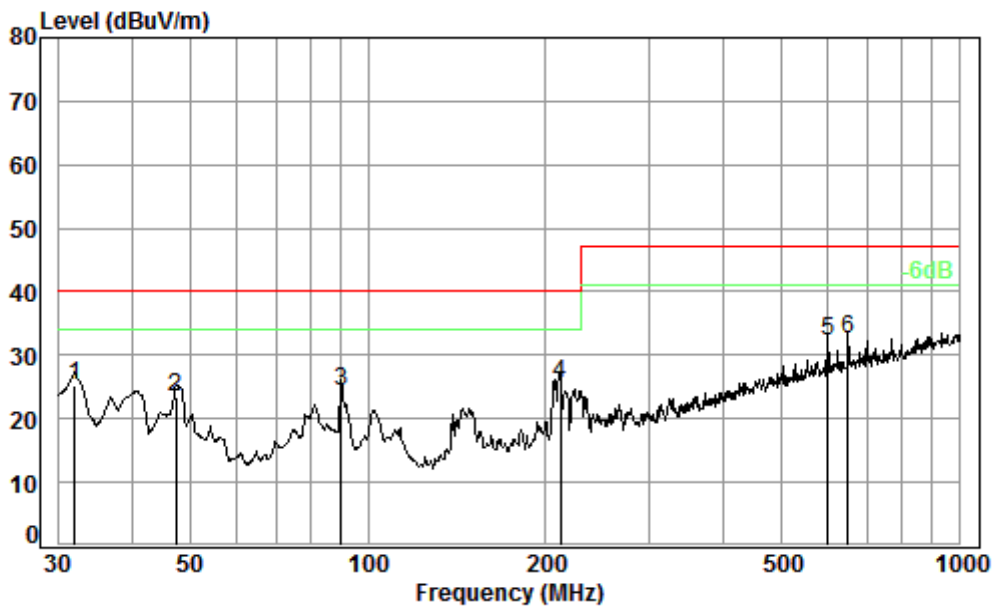


Condition: 3m VERTICAL

Job No. : 90032

Test mode: d

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	31.95	0.60	21.40	27.45	30.73	40.00	-14.72
2	47.49	0.75	14.96	27.41	34.99	40.00	-16.71
3	90.22	1.10	13.12	27.36	37.34	40.00	-15.80
4	211.53	1.47	16.91	26.87	33.99	40.00	-14.50
5	599.32	2.70	26.59	27.95	31.00	47.00	-14.66
6 pp	647.39	2.80	27.24	27.87	30.34	47.00	-14.49

4.9.1.2 Charge + Transmitting, Horizontal

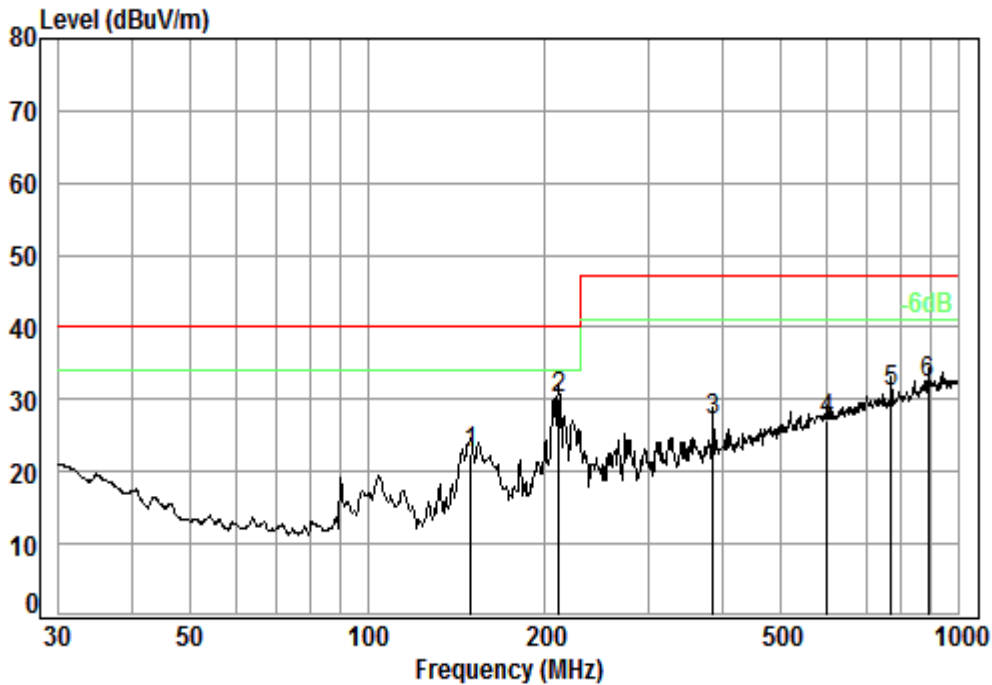

Condition: 3m HORIZONTAL


Job No. : 90032

Test mode: d

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	149.49	1.32	14.58	27.09	33.80	22.61	40.00 -17.39
2	pp 210.79	1.46	16.89	26.87	38.49	29.97	40.00 -10.03
3	383.93	2.16	22.00	27.11	29.97	27.02	47.00 -19.98
4	599.32	2.70	26.59	27.95	25.72	27.06	47.00 -19.94
5	768.75	3.11	28.32	27.68	27.27	31.02	47.00 -15.98
6	887.61	3.55	29.65	27.12	26.14	32.22	47.00 -14.78

4.9.2 Transmitter emission above 1GHz


4.9.2.1 802.11B_Lowest Channel_Peak_Vertical

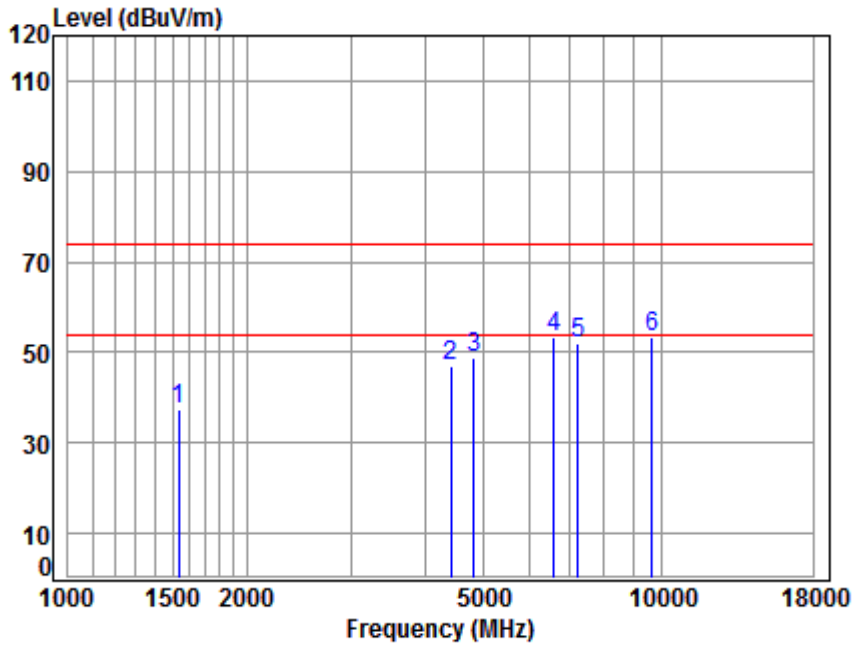

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1533.841	5.44	25.96	41.43	47.57	37.54	74.00	-36.46	peak
2	4417.841	7.47	33.46	42.40	48.58	47.11	74.00	-26.89	peak
3	4824.000	7.91	34.00	42.47	49.20	48.64	74.00	-25.36	peak
4	6602.265	11.24	35.66	41.14	47.53	53.29	74.00	-20.71	peak
5	7236.000	10.07	36.09	40.69	46.43	51.90	74.00	-22.10	peak
6	9648.000	10.77	37.69	37.68	42.82	53.60	74.00	-20.40	peak


4.9.2.2 802.11B_ Middle Channel_ Peak_ Vertical

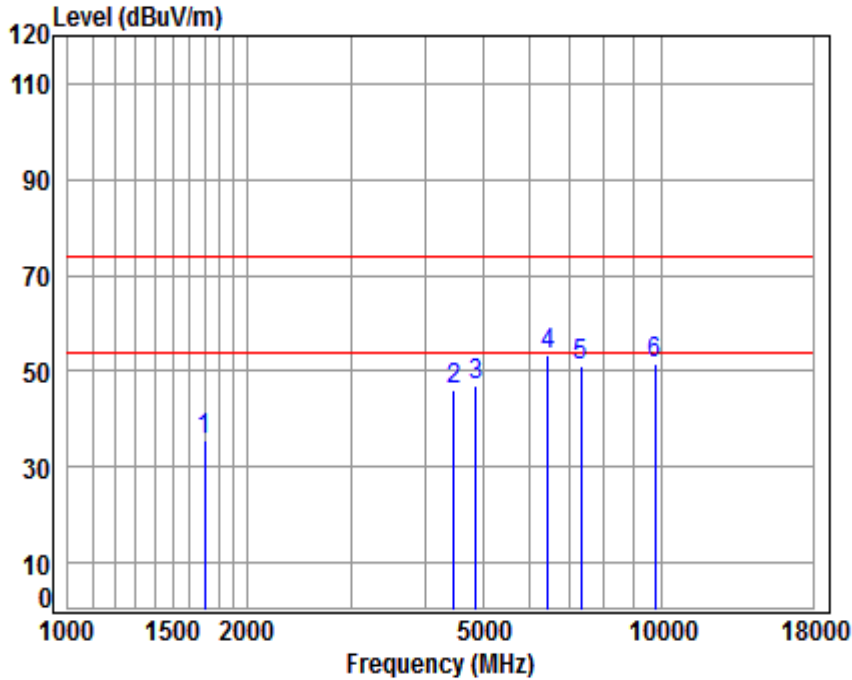

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11B

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.23	26.68	41.53	45.35	35.73	74.00	-38.27	peak
2	7.53	33.55	42.41	47.26	45.93	74.00	-28.07	peak
3	7.96	34.05	42.48	47.41	46.94	74.00	-27.06	peak
4	11.41	35.54	41.27	47.64	53.32	74.00	-20.68	peak
5	10.05	36.15	40.64	45.57	51.13	74.00	-22.87	peak
6	10.82	37.75	37.54	40.41	51.44	74.00	-22.56	peak


4.9.2.3 802.11B_ Highest Channel_ Peak_ Vertical

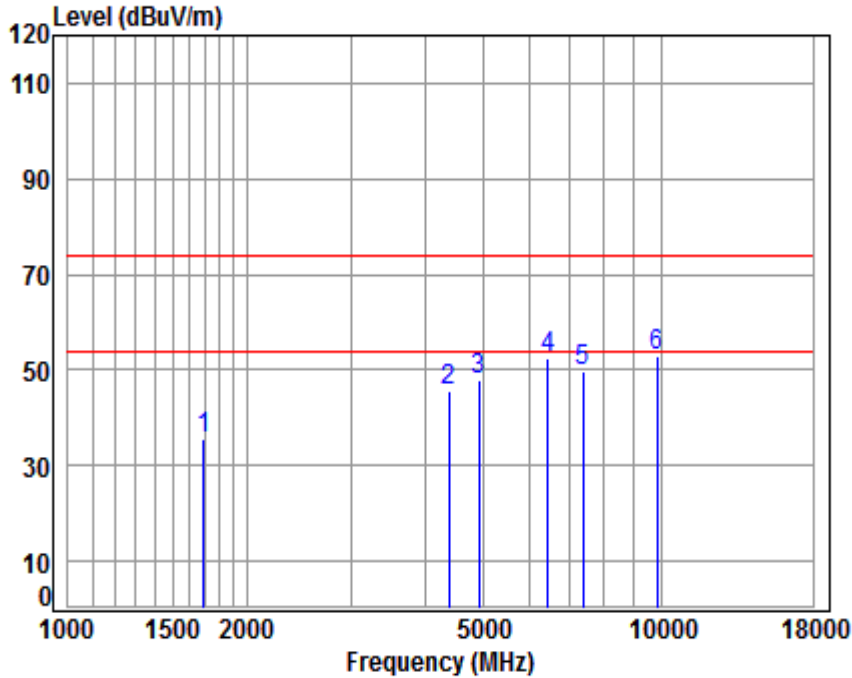

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	45.43	35.78	74.00	-38.22	peak
2	4392.376	7.44	33.42	42.40	47.09	45.55	74.00	-28.45	peak
3	4924.000	8.01	34.11	42.49	48.06	47.69	74.00	-26.31	peak
4	6451.353	11.45	35.55	41.25	46.78	52.53	74.00	-21.47	peak
5	7386.000	10.03	36.21	40.59	44.06	49.71	74.00	-24.29	peak
6	9848.000	10.87	37.81	37.41	41.50	52.77	74.00	-21.23	peak


4.9.2.4 802.11B_Lowest Channel_Peak_Horizontal

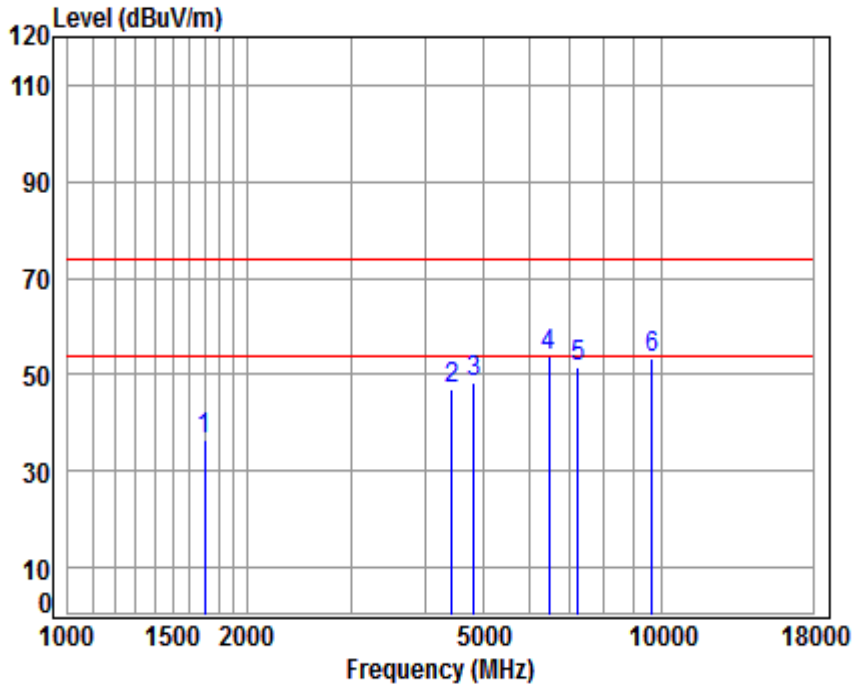

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1697.129	5.23	26.66	41.53	46.35	36.71	74.00	-37.29 peak
2	4430.628	7.48	33.48	42.41	48.37	46.92	74.00	-27.08 peak
3	4824.000	7.91	34.00	42.47	48.70	48.14	74.00	-25.86 peak
4	6470.026	11.48	35.57	41.24	48.08	53.89	74.00	-20.11 peak
5	7236.000	10.07	36.09	40.69	46.17	51.64	74.00	-22.36 peak
6	9648.000	10.77	37.69	37.68	42.74	53.52	74.00	-20.48 peak


4.9.2.5 802.11B_ Middle Channel_ Peak_ Horizontal

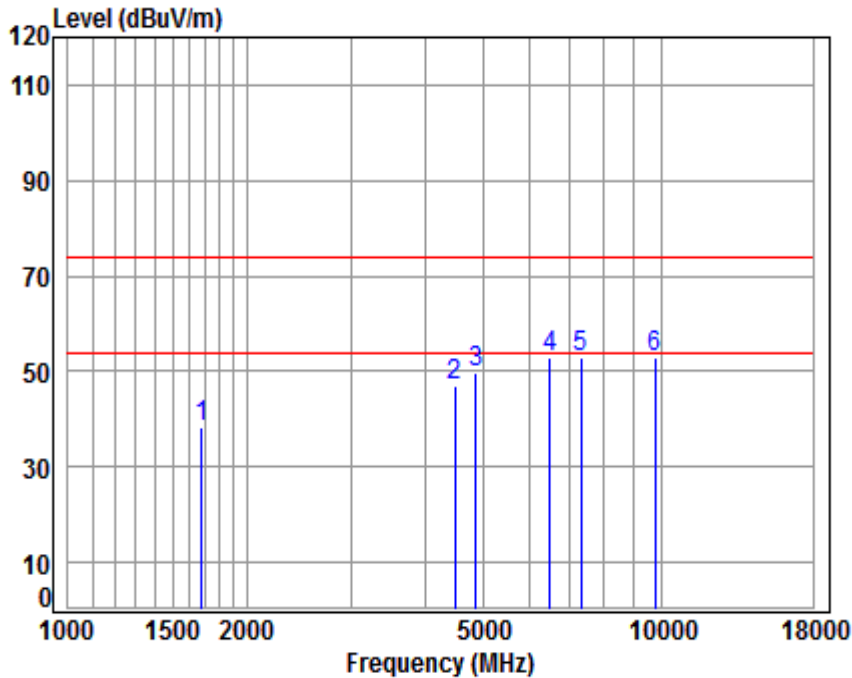

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	48.21	38.52	74.00	-35.48	peak
2	4482.150	7.54	33.57	42.41	48.52	47.22	74.00	-26.78	peak
3	4874.000	7.96	34.05	42.48	50.10	49.63	74.00	-24.37	peak
4	6488.754	11.52	35.59	41.22	47.05	52.94	74.00	-21.06	peak
5	7311.000	10.05	36.15	40.64	47.24	52.80	74.00	-21.20	peak
6	9748.000	10.82	37.75	37.54	42.01	53.04	74.00	-20.96	peak


4.9.2.6 802.11B_ Highest Channel_ Peak_ Horizontal

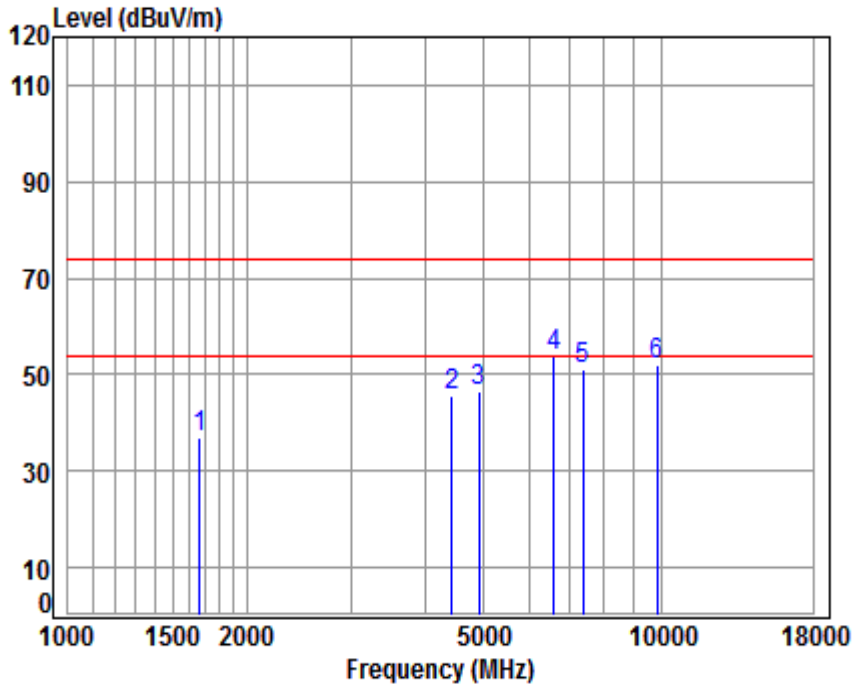

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1667.951	5.27	26.54	41.51	46.54	36.84	74.00	-37.16 peak
2	4430.628	7.48	33.48	42.41	46.91	45.46	74.00	-28.54 peak
3	4924.000	8.01	34.11	42.49	47.02	46.65	74.00	-27.35 peak
4	6602.265	11.24	35.66	41.14	47.86	53.62	74.00	-20.38 peak
5	7386.000	10.03	36.21	40.59	45.31	50.96	74.00	-23.04 peak
6	9848.000	10.87	37.81	37.41	40.94	52.21	74.00	-21.79 peak


4.9.2.7 802.11G_Lowest Channel_Peak_Vertical

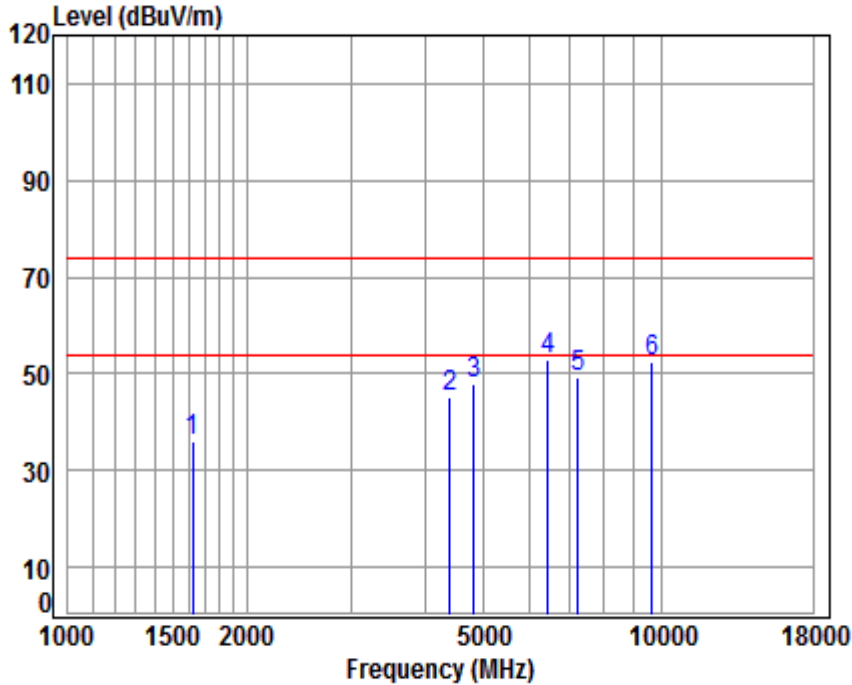

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1620.431	5.32	26.34	41.48	45.67	35.85	74.00	-38.15 peak
2	4405.090	7.46	33.44	42.40	46.71	45.21	74.00	-28.79 peak
3	4824.000	7.91	34.00	42.47	48.46	47.90	74.00	-26.10 peak
4	6451.353	11.45	35.55	41.25	46.98	52.73	74.00	-21.27 peak
5	7236.000	10.07	36.09	40.69	43.88	49.35	74.00	-24.65 peak
6	9648.000	10.77	37.69	37.68	41.91	52.69	74.00	-21.31 peak


4.9.2.8 802.11G_ Middle Channel_ Peak_ Vertical

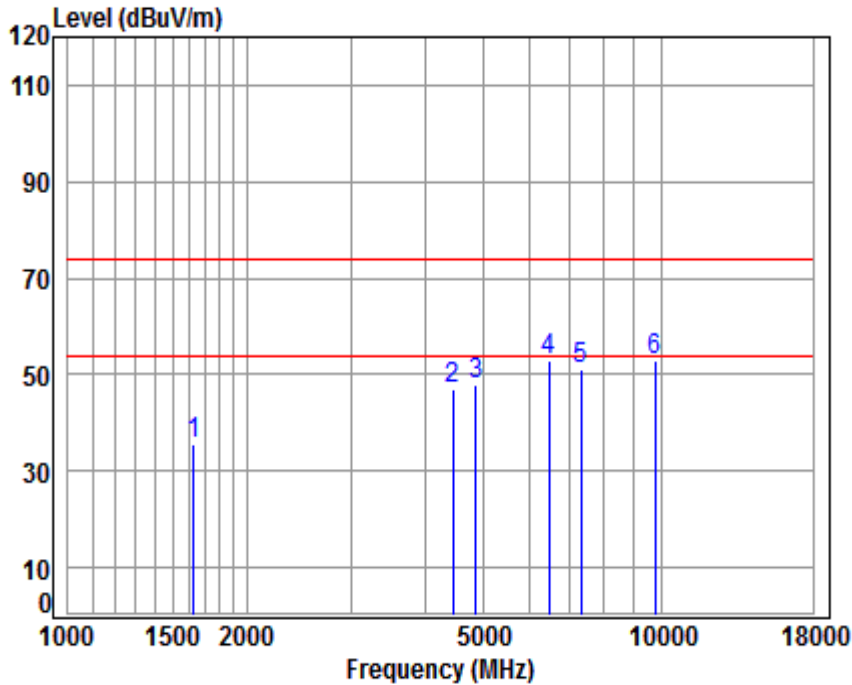

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1629.825	5.31	26.38	41.49	45.53	35.73	74.00	-38.27 peak
2	4456.315	7.51	33.53	42.41	48.49	47.12	74.00	-26.88 peak
3	4874.000	7.96	34.05	42.48	48.31	47.84	74.00	-26.16 peak
4	6470.026	11.48	35.57	41.24	47.21	53.02	74.00	-20.98 peak
5	7311.000	10.05	36.15	40.64	45.72	51.28	74.00	-22.72 peak
6	9748.000	10.82	37.75	37.54	42.04	53.07	74.00	-20.93 peak


4.9.2.9 802.11G_ Highest Channel_ Peak_ Vertical

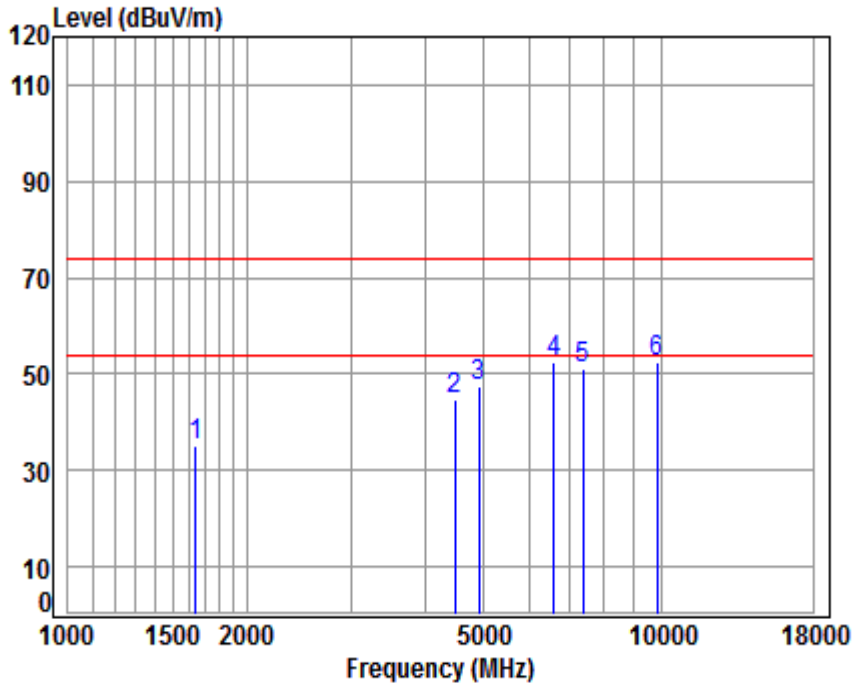

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	41.50	45.04	35.28	74.00	-38.72	peak
2	4482.150	7.54	33.57	42.41	46.11	44.81	74.00	-29.19	peak
3	4924.000	8.01	34.11	42.49	48.01	47.64	74.00	-26.36	peak
4	6602.265	11.24	35.66	41.14	46.77	52.53	74.00	-21.47	peak
5	7386.000	10.03	36.21	40.59	45.37	51.02	74.00	-22.98	peak
6	9848.000	10.87	37.81	37.41	41.03	52.30	74.00	-21.70	peak


4.9.2.10 802.11G_Lowest Channel_Peak_Horizontal

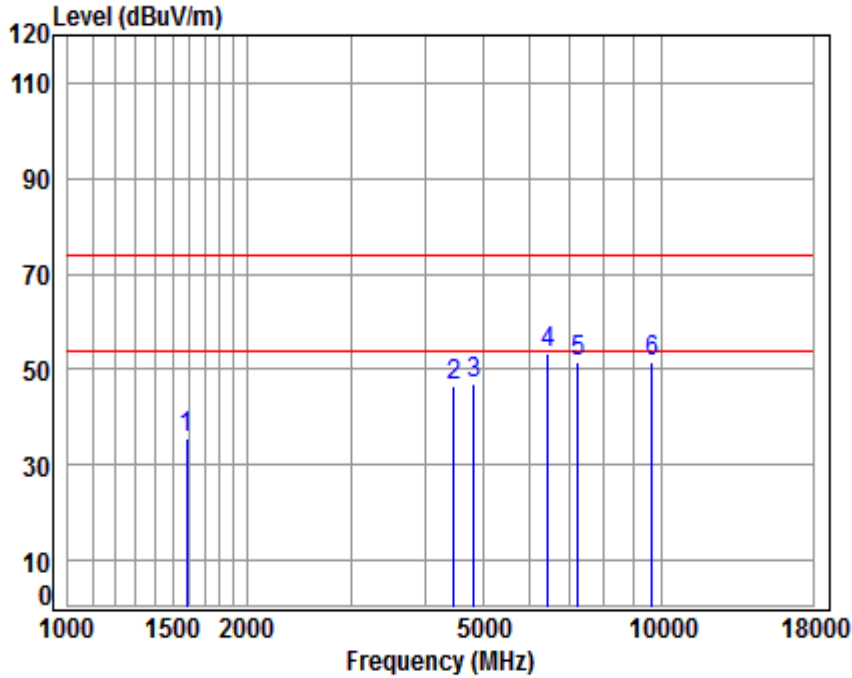

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1587.975	5.37	26.20	41.46	45.60	35.71	74.00	-38.29	peak
2	4469.214	7.53	33.55	42.41	48.00	46.67	74.00	-27.33	peak
3	4824.000	7.91	34.00	42.47	47.39	46.83	74.00	-27.17	peak
4	6432.732	11.41	35.54	41.27	47.68	53.36	74.00	-20.64	peak
5	7236.000	10.07	36.09	40.69	45.92	51.39	74.00	-22.61	peak
6	9648.000	10.77	37.69	37.68	40.59	51.37	74.00	-22.63	peak


4.9.2.11 802.11G_ Middle Channel_ Peak_ Horizontal

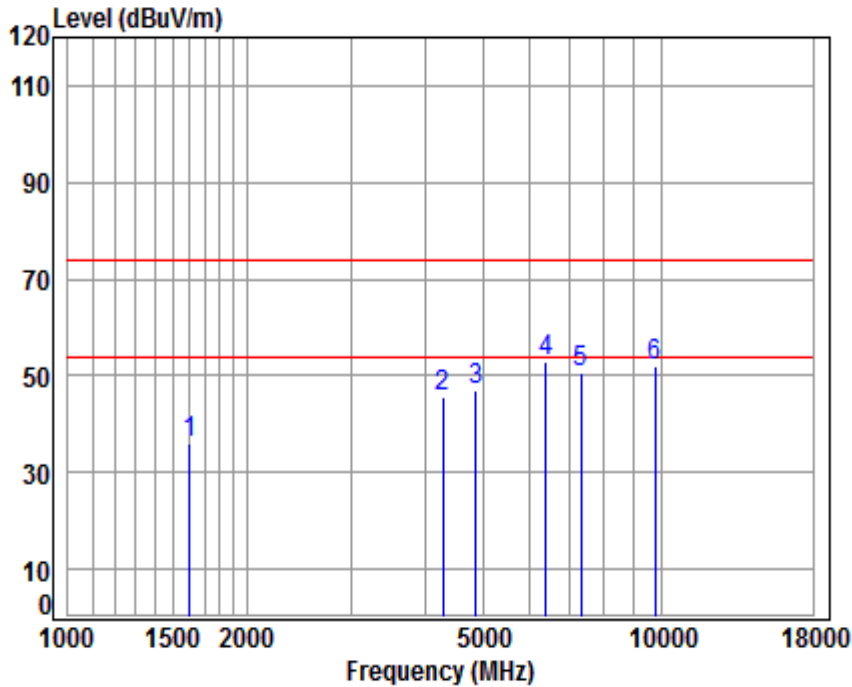

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1601.804	5.35	26.26	41.47	45.85	74.00	-38.01	peak
2	4291.977	7.33	33.24	42.38	47.22	74.00	-28.59	peak
3	4874.000	7.96	34.05	42.48	47.59	74.00	-26.88	peak
4	6395.654	11.34	35.50	41.30	47.51	74.00	-20.95	peak
5	7311.000	10.05	36.15	40.64	45.11	74.00	-23.33	peak
6	9748.000	10.82	37.75	37.54	40.81	74.00	-22.16	peak


4.9.2.12 802.11G_ Highest Channel_ Peak_ Horizontal

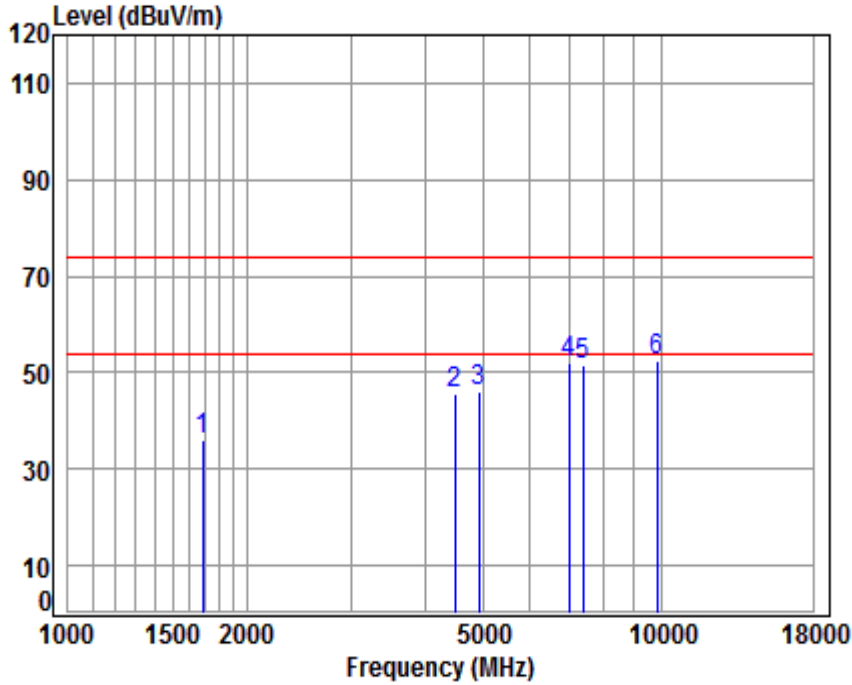

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1687.347	5.24	26.62	41.52	45.80	74.00	-37.86	peak
2	4482.150	7.54	33.57	42.41	47.15	74.00	-28.15	peak
3	4924.000	8.01	34.11	42.49	46.36	74.00	-28.01	peak
4	6974.982	10.20	35.89	40.87	46.79	74.00	-21.99	peak
5	7386.000	10.03	36.21	40.59	46.02	74.00	-22.33	peak
6	9848.000	10.87	37.81	37.41	41.35	74.00	-21.38	peak


4.9.2.13 802.11N20_Lowest Channel_Peak_Vertical

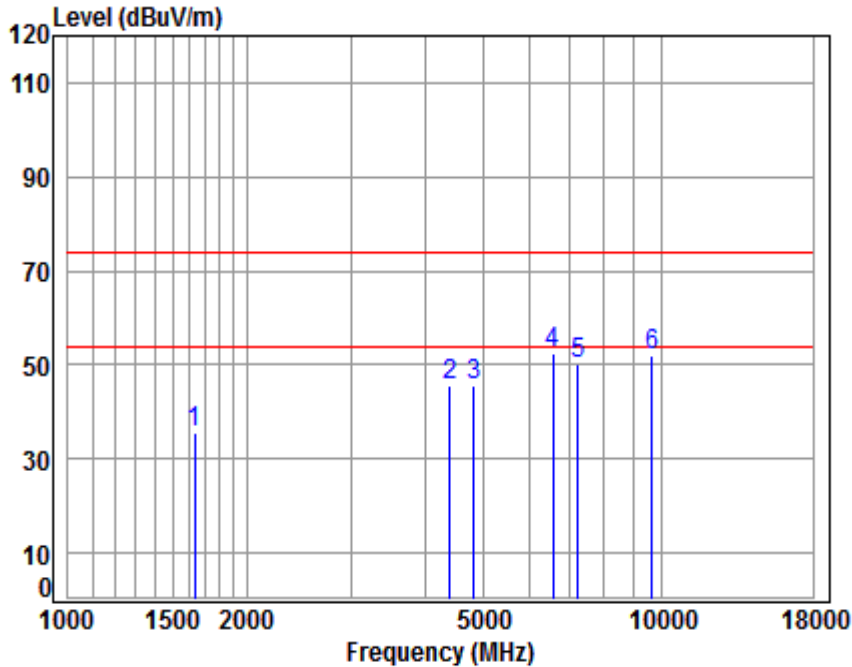

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1634.543	5.31	26.40	41.49	45.58	35.80	74.00	-38.20	peak
2	4405.090	7.46	33.44	42.40	46.90	45.40	74.00	-28.60	peak
3	4824.000	7.91	34.00	42.47	45.98	45.42	74.00	-28.58	peak
4	6564.209	11.35	35.64	41.17	46.82	52.64	74.00	-21.36	peak
5	7236.000	10.07	36.09	40.69	44.55	50.02	74.00	-23.98	peak
6	9648.000	10.77	37.69	37.68	41.44	52.22	74.00	-21.78	peak


4.9.2.14 802.11N20_ Middle Channel_ Peak_ Vertical

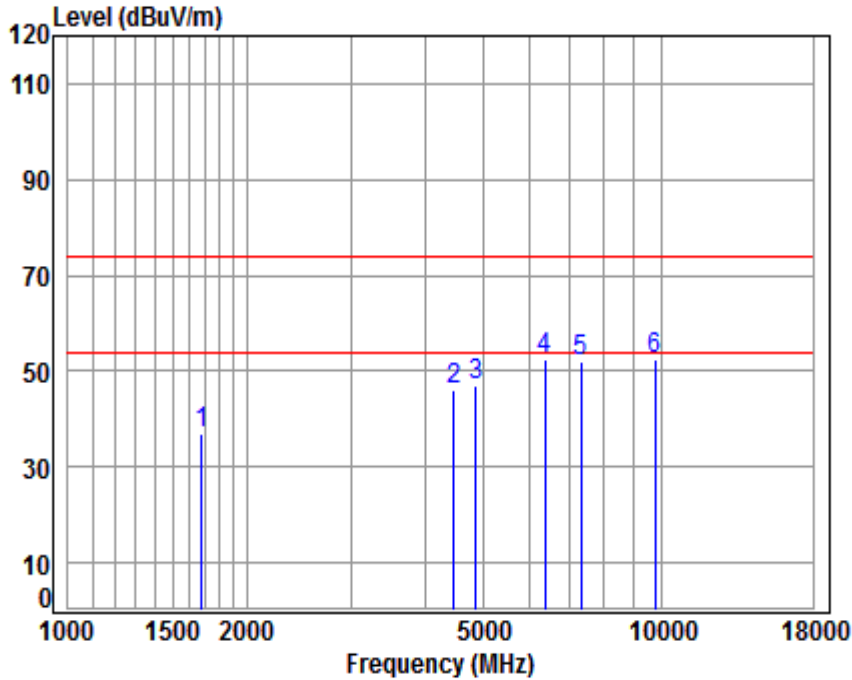

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11N 20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.25	26.60	41.52	46.66	36.99	74.00	-37.01	peak
2	7.53	33.55	42.41	47.38	46.05	74.00	-27.95	peak
3	7.96	34.05	42.48	47.29	46.82	74.00	-27.18	peak
4	11.31	35.48	41.31	46.92	52.40	74.00	-21.60	peak
5	10.05	36.15	40.64	46.40	51.96	74.00	-22.04	peak
6	10.82	37.75	37.54	41.48	52.51	74.00	-21.49	peak


4.9.2.15 802.11N20_ Highest Channel_ Peak_ Vertical

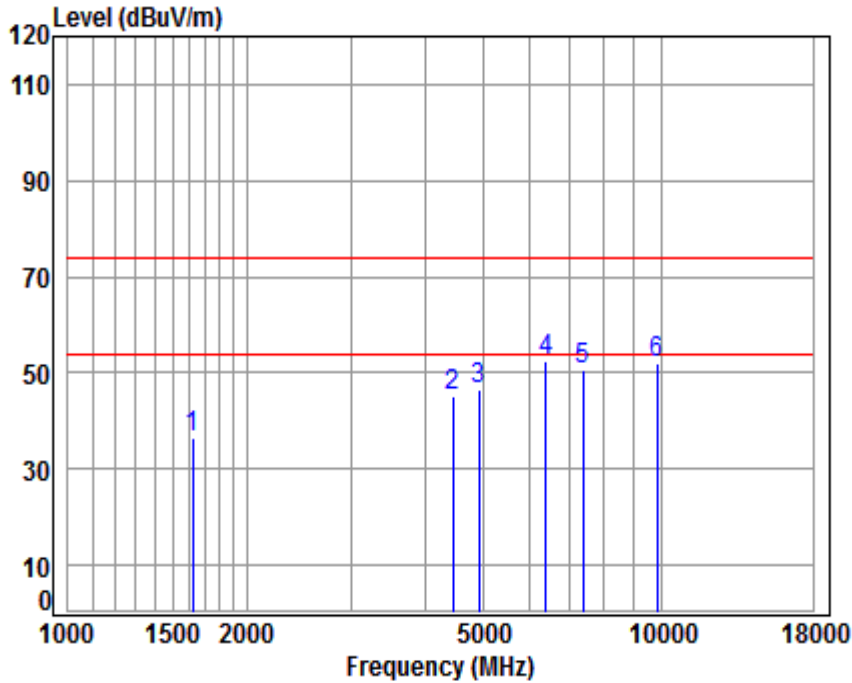

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1625.121	5.32	26.36	41.49	46.24	36.43	74.00	-37.57	peak
2	4456.315	7.51	33.53	42.41	46.74	45.37	74.00	-28.63	peak
3	4924.000	8.01	34.11	42.49	46.82	46.45	74.00	-27.55	peak
4	6395.654	11.34	35.50	41.30	46.76	52.30	74.00	-21.70	peak
5	7386.000	10.03	36.21	40.59	45.18	50.83	74.00	-23.17	peak
6	9848.000	10.87	37.81	37.41	40.60	51.87	74.00	-22.13	peak


4.9.2.16 802.11N20_Lowest Channel_Peak_Horizontal

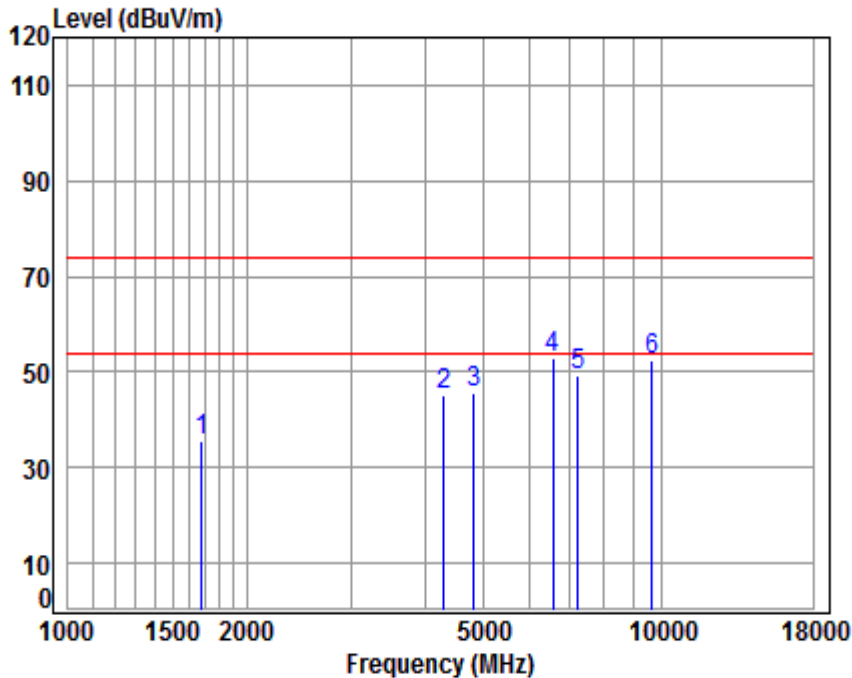

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 TX RSE
 Note : 2.4G WIFI 11N 20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.25	26.60	41.52	45.40	35.73	74.00	-38.27	peak
2	7.34	33.26	42.38	47.06	45.28	74.00	-28.72	peak
3	7.91	34.00	42.47	46.27	45.71	74.00	-28.29	peak
4	11.35	35.64	41.17	47.28	53.10	74.00	-20.90	peak
5	10.07	36.09	40.69	43.97	49.44	74.00	-24.56	peak
6	10.77	37.69	37.68	41.71	52.49	74.00	-21.51	peak


4.9.2.17 802.11N20_ Middle Channel_ Peak_ Horizontal

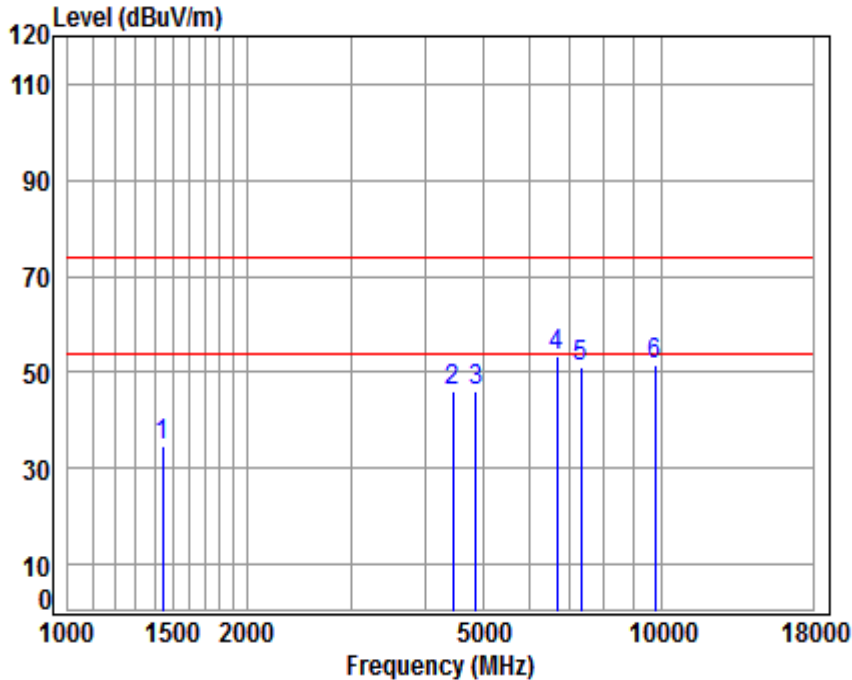

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11N 20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.30	25.59	41.37	45.34	34.86	74.00	-39.14	peak
2	7.51	33.53	42.41	47.37	46.00	74.00	-28.00	peak
3	7.96	34.05	42.48	46.45	45.98	74.00	-28.02	peak
4	11.02	35.71	41.08	47.63	53.28	74.00	-20.72	peak
5	10.05	36.15	40.64	45.57	51.13	74.00	-22.87	peak
6	10.82	37.75	37.54	40.44	51.47	74.00	-22.53	peak


4.9.2.18 802.11N20_ Highest Channel_ Peak_ Horizontal

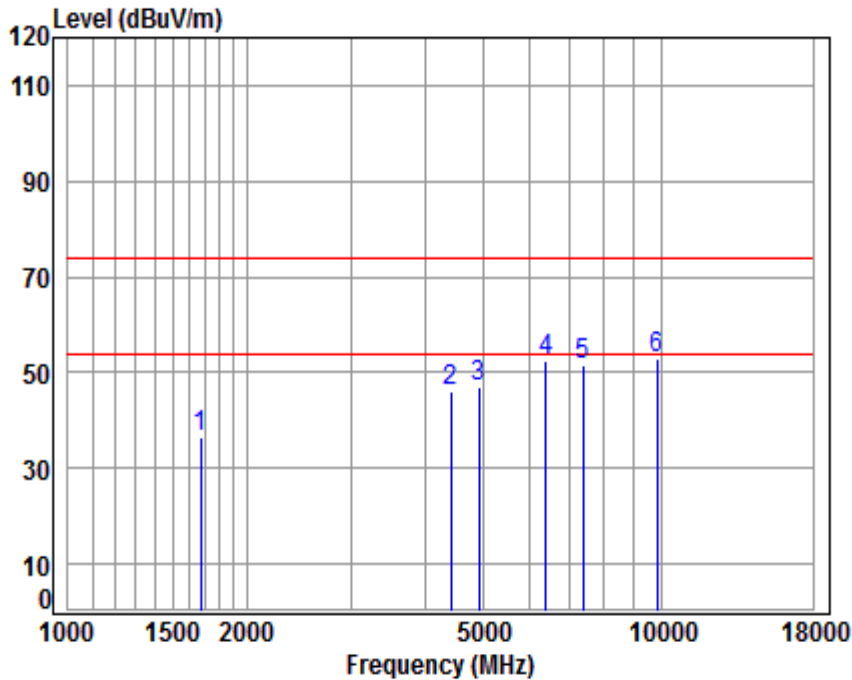

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 TX RSE
 Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	46.09	36.39	74.00	-37.61	peak
2	4417.841	7.47	33.46	42.40	47.62	46.15	74.00	-27.85	peak
3	4924.000	8.01	34.11	42.49	47.44	47.07	74.00	-26.93	peak
4	6395.654	11.34	35.50	41.30	47.05	52.59	74.00	-21.41	peak
5	7386.000	10.03	36.21	40.59	45.73	51.38	74.00	-22.62	peak
6	9848.000	10.87	37.81	37.41	41.74	53.01	74.00	-20.99	peak


4.9.2.19 802.11N40_Lowest Channel_Peak_Vertical

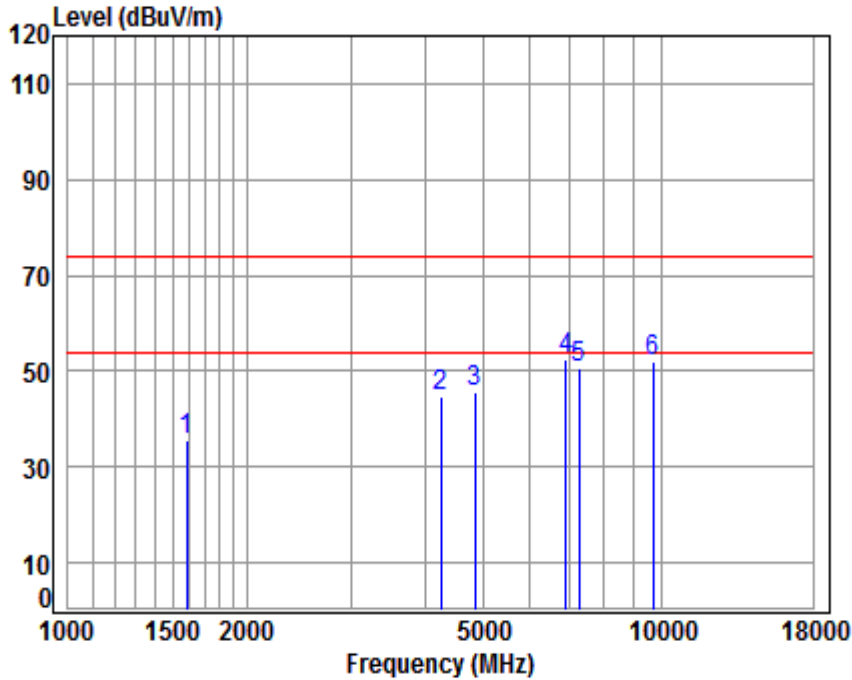

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2422 TX RSE
 Note : 2.4G WIFI 11N 40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.37	26.18	41.46	45.51	35.60	74.00	-38.40	peak
2	7.27	33.15	42.37	46.85	44.90	74.00	-29.10	peak
3	7.93	34.02	42.48	46.14	45.61	74.00	-28.39	peak
4	10.36	35.85	40.91	47.29	52.59	74.00	-21.41	peak
5	10.06	36.12	40.67	44.99	50.50	74.00	-23.50	peak
6	10.79	37.71	37.63	41.20	52.07	74.00	-21.93	peak


4.9.2.20 802.11N40_ Middle Channel_ Peak_ Vertical

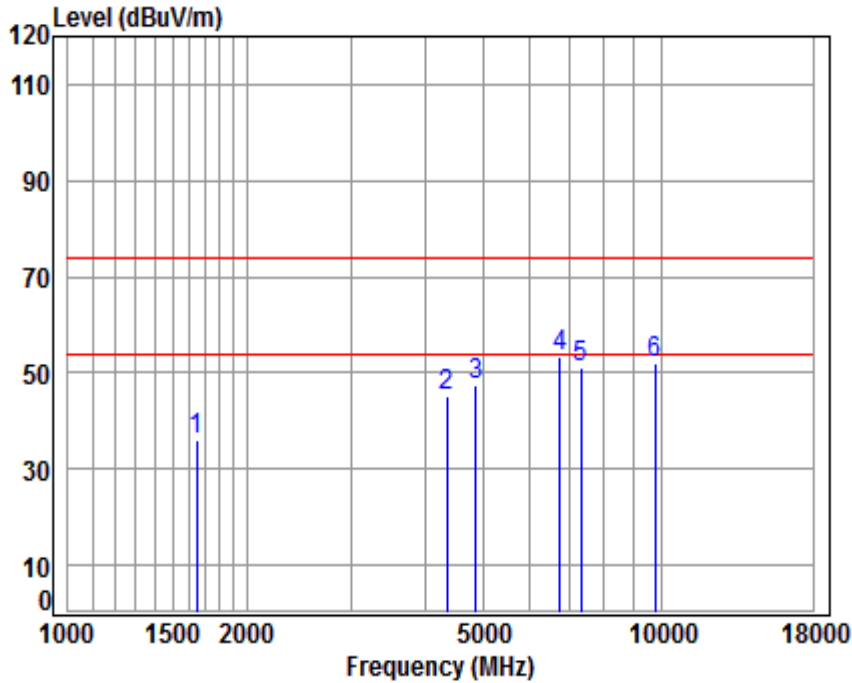

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11N 40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.29	26.46	41.50	45.57	35.82	74.00	-38.18	peak
2	7.40	33.35	42.39	46.96	45.32	74.00	-28.68	peak
3	7.96	34.05	42.48	47.74	47.27	74.00	-26.73	peak
4	10.80	35.76	41.03	47.64	53.17	74.00	-20.83	peak
5	10.05	36.15	40.64	45.56	51.12	74.00	-22.88	peak
6	10.82	37.75	37.54	41.13	52.16	74.00	-21.84	peak


4.9.2.21 802.11N40_ Highest Channel_ Peak_ Vertical

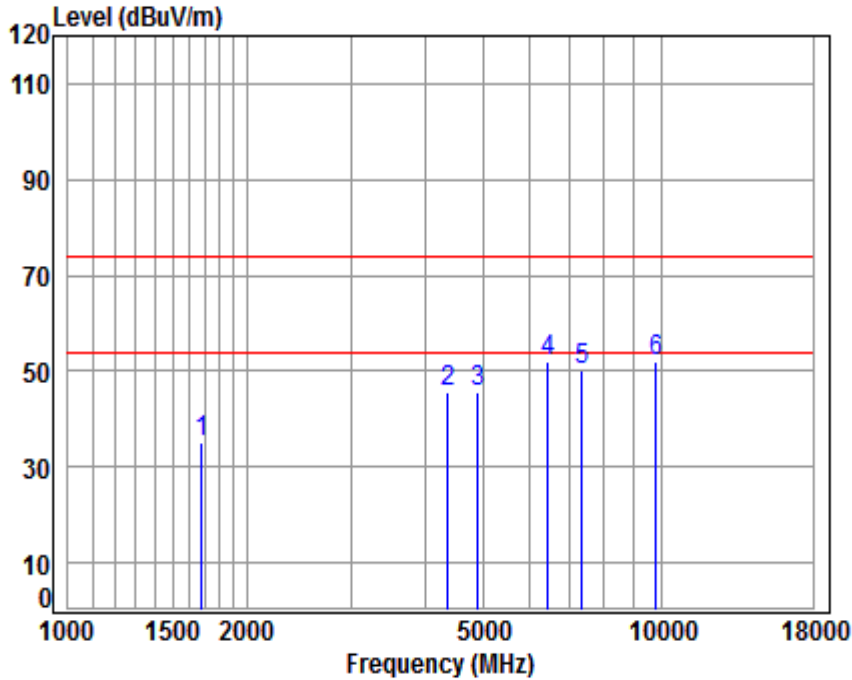

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2452 TX RSE
 Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	44.95	35.26	74.00	-38.74	peak
2	4367.058	7.41	33.37	42.39	47.18	45.57	74.00	-28.43	peak
3	4904.000	7.99	34.09	42.48	46.07	45.67	74.00	-28.33	peak
4	6451.353	11.45	35.55	41.25	46.40	52.15	74.00	-21.85	peak
5	7356.000	10.04	36.19	40.61	44.58	50.20	74.00	-23.80	peak
6	9808.000	10.85	37.79	37.46	40.63	51.81	74.00	-22.19	peak


4.9.2.22 802.11N40_Lowest Channel_Peak_Horizontal

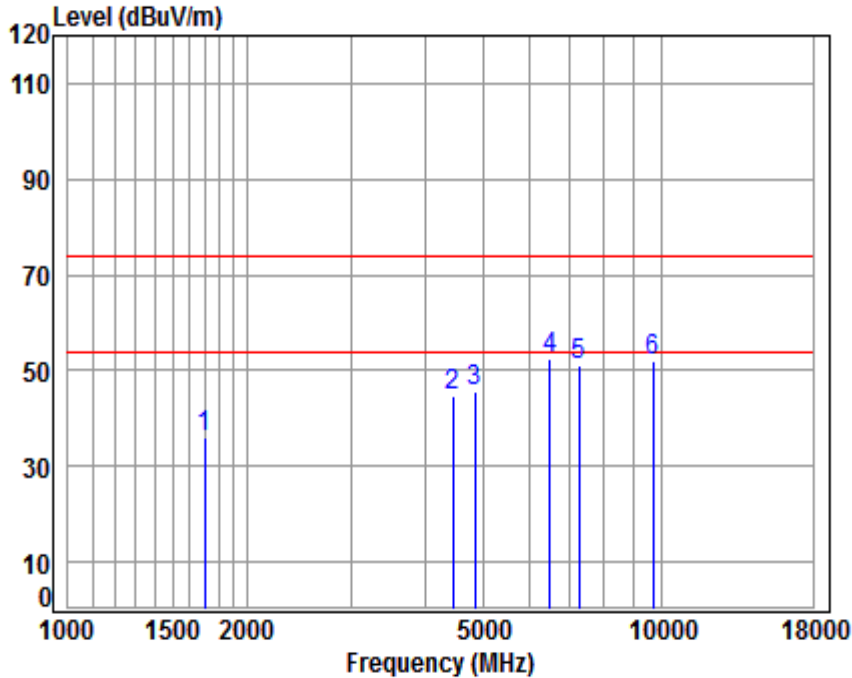

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2422 TX RSE
 Note : 2.4G WIFI 11N 40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.23	26.66	41.53	45.62	35.98	74.00	-38.02	peak
2	7.51	33.53	42.41	46.05	44.68	74.00	-29.32	peak
3	7.93	34.02	42.48	45.94	45.41	74.00	-28.59	peak
4	11.52	35.59	41.22	46.51	52.40	74.00	-21.60	peak
5	10.06	36.12	40.67	45.42	50.93	74.00	-23.07	peak
6	10.79	37.71	37.63	41.05	51.92	74.00	-22.08	peak


4.9.2.23 802.11N40_ Middle Channel_ Peak_ Horizontal

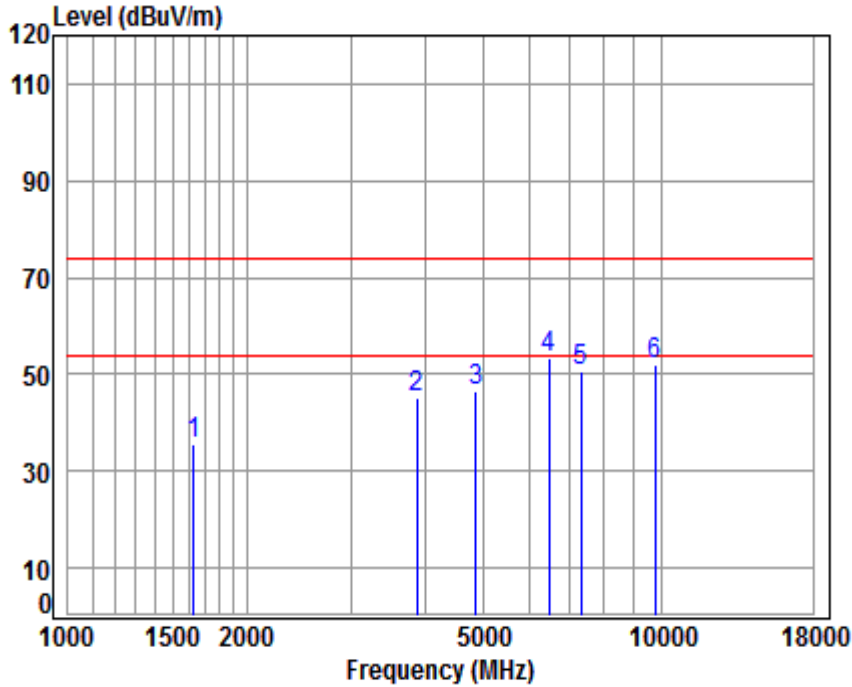

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2437 TX RSE
 Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1629.825	5.31	26.38	41.49	45.62	35.82	74.00	-38.18 peak
2	3879.027	6.86	32.47	42.30	48.16	45.19	74.00	-28.81 peak
3	4874.000	7.96	34.05	42.48	46.79	46.32	74.00	-27.68 peak
4	6470.026	11.48	35.57	41.24	47.58	53.39	74.00	-20.61 peak
5	7311.000	10.05	36.15	40.64	45.26	50.82	74.00	-23.18 peak
6	9748.000	10.82	37.75	37.54	41.00	52.03	74.00	-21.97 peak

4.9.2.24 802.11N40_ Highest Channel_ Peak_ Horizontal

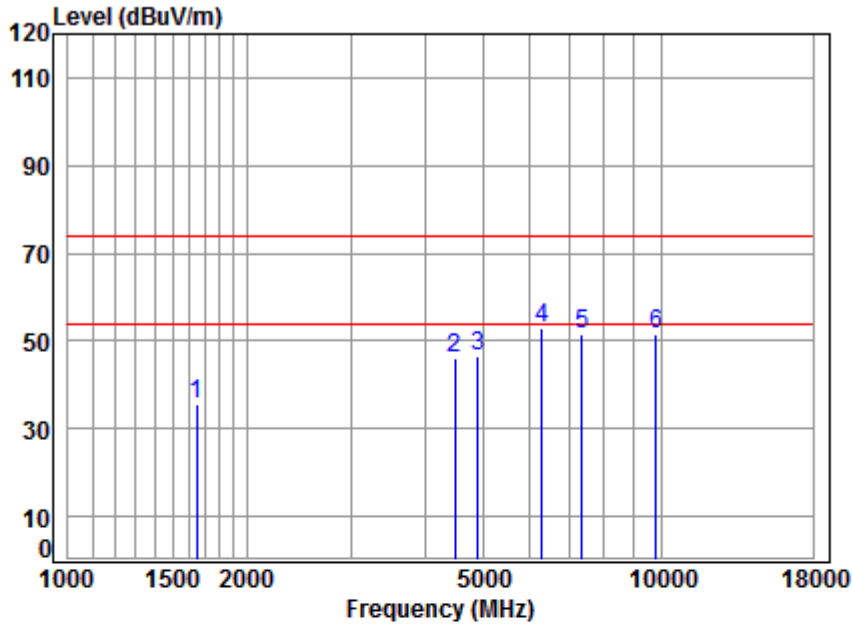

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2452 TX RSE
 Note : 2.4G WIFI 11N 40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.29	26.46	41.50	45.34	35.59	74.00	-38.41	peak
2	7.54	33.57	42.41	47.30	46.00	74.00	-28.00	peak
3	7.99	34.09	42.48	46.79	46.39	74.00	-27.61	peak
4	11.17	35.41	41.37	47.83	53.04	74.00	-20.96	peak
5	10.04	36.19	40.61	45.87	51.49	74.00	-22.51	peak
6	10.85	37.79	37.46	40.38	51.56	74.00	-22.44	peak

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:



Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.

4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

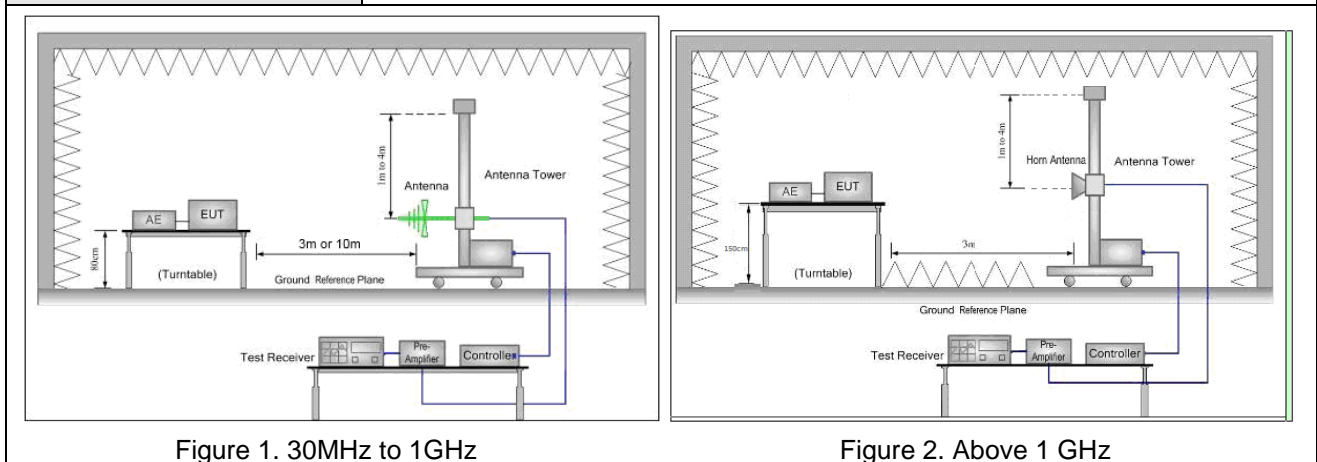



Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

<p>Test Procedure:</p>	<ol style="list-style-type: none"> a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
<p>Exploratory Test Mode:</p>	<p>Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Pretest the EUT at Charge +Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20); 13.5Mbps of rate is the worst case of 802.11N(HT40). Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 5.10 for details</p>
<p>Test Results:</p>	<p>Pass</p>

Test plot as follows:


4.10.1.1 802.11B_Lowest Channel_Peak_Vertical

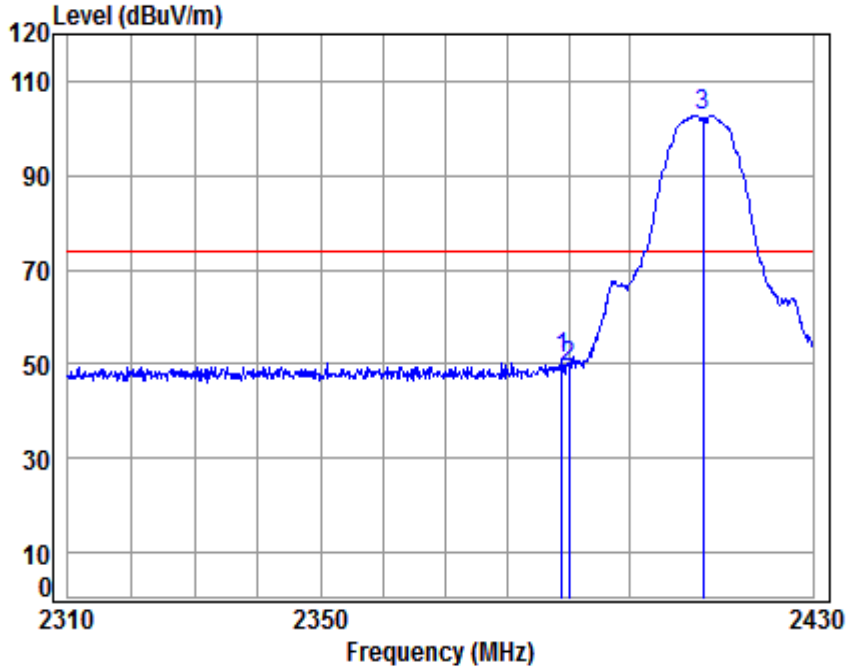

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.879	5.47	28.52	41.87	58.91	51.03	74.00	-22.97	peak
2	2390.000	5.47	28.52	41.87	57.16	49.28	74.00	-24.72	peak
3 *	2412.000	5.50	28.56	41.88	110.67	102.85	74.00	28.85	peak


4.10.1.2 802.11B_ Highest Channel_ Peak_ Vertical

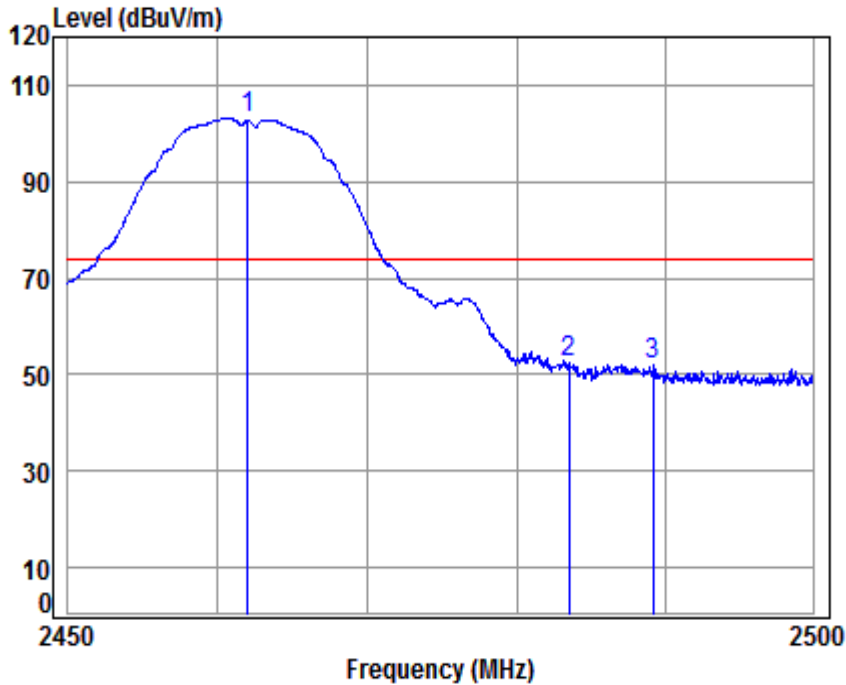

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	110.82	103.13	74.00	29.13 peak
2	2483.500	5.60	28.67	41.91	60.10	52.46	74.00	-21.54 peak
3	2489.165	5.61	28.68	41.91	59.68	52.06	74.00	-21.94 peak


4.10.1.3 802.11B_Lowest Channel_ Peak_Horizontal

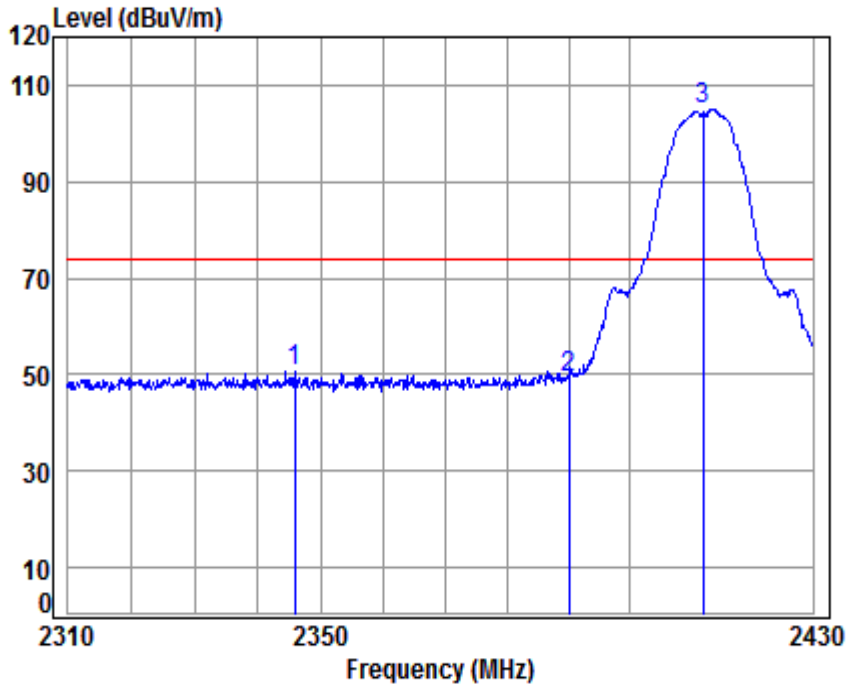

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2345.839	5.41	28.44	41.85	58.71	50.71	74.00	-23.29 peak
2	2390.000	5.47	28.52	41.87	57.25	49.37	74.00	-24.63 peak
3 *	2412.000	5.50	28.56	41.88	112.78	104.96	74.00	30.96 peak


4.10.1.4 802.11B_ Highest Channel_ Peak_ Horizontal

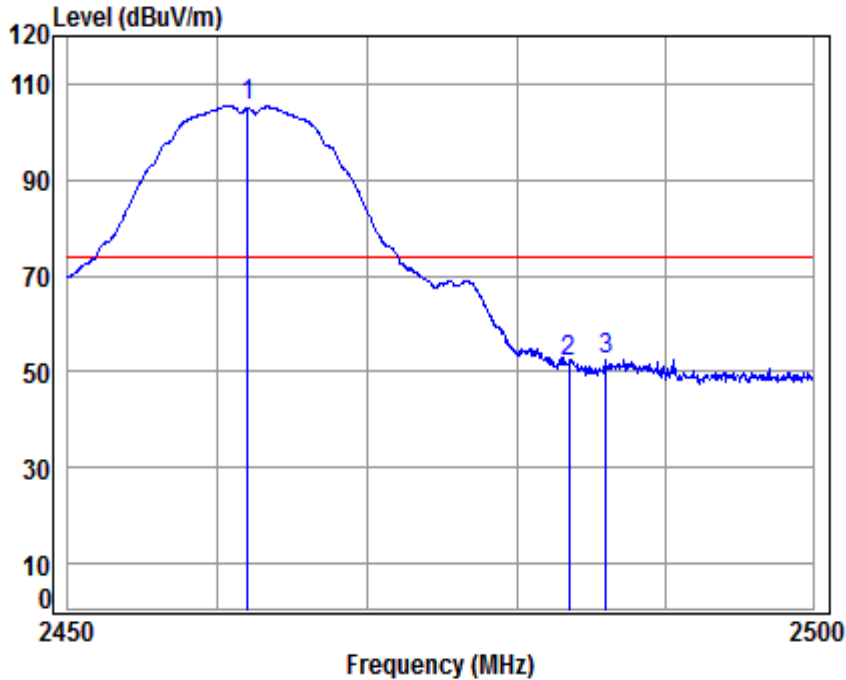

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	112.99	105.30	74.00	31.30 peak
2	2483.500	5.60	28.67	41.91	59.54	51.90	74.00	-22.10 peak
3	2485.999	5.60	28.68	41.91	60.03	52.40	74.00	-21.60 peak


4.10.1.5 802.11B_Lowest Channel_ Average_ Vertical

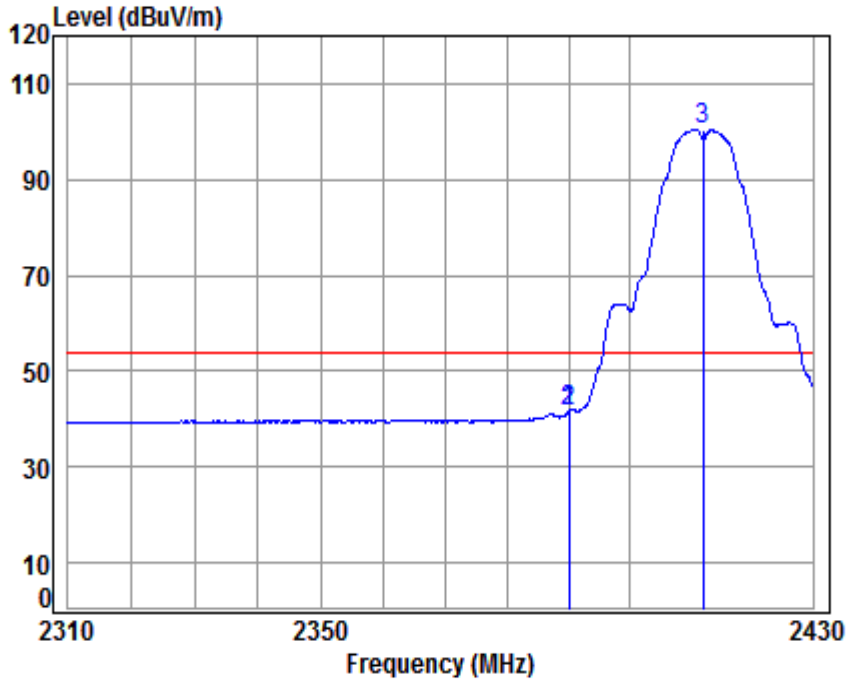

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	49.53	41.65	54.00	-12.35 Average
2	2390.000	5.47	28.52	41.87	49.53	41.65	54.00	-12.35 Average
3 *	2412.000	5.50	28.56	41.88	108.19	100.37	54.00	46.37 Average


4.10.1.6 802.11B_ Highest Channel_ Average _ Vertical

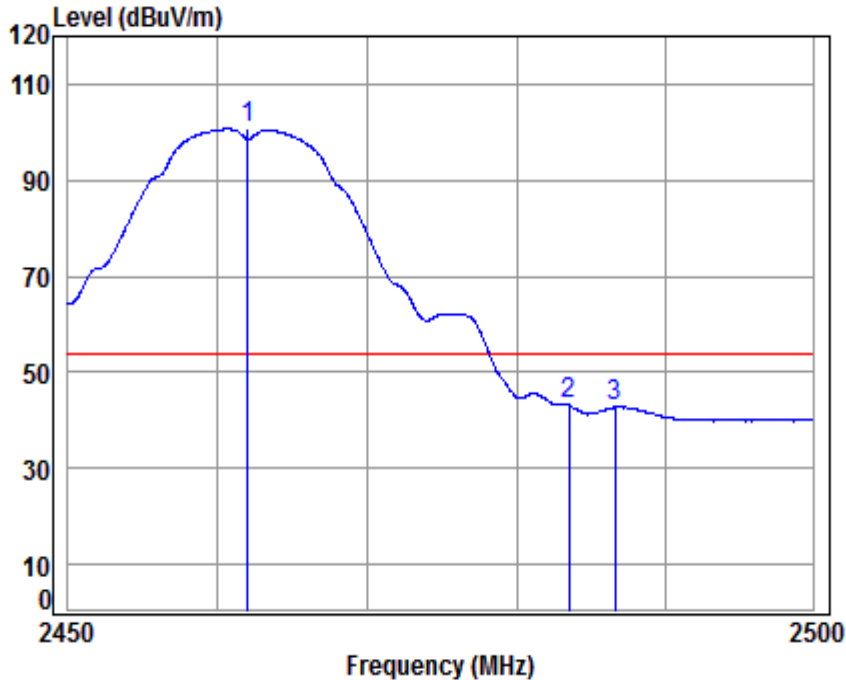

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	108.32	100.63	54.00	46.63 Average
2	2483.500	5.60	28.67	41.91	50.79	43.15	54.00	-10.85 Average
3	2486.601	5.60	28.68	41.91	50.47	42.84	54.00	-11.16 Average


4.10.1.7 802.11B_Lowest Channel_ Average _ Horizontal

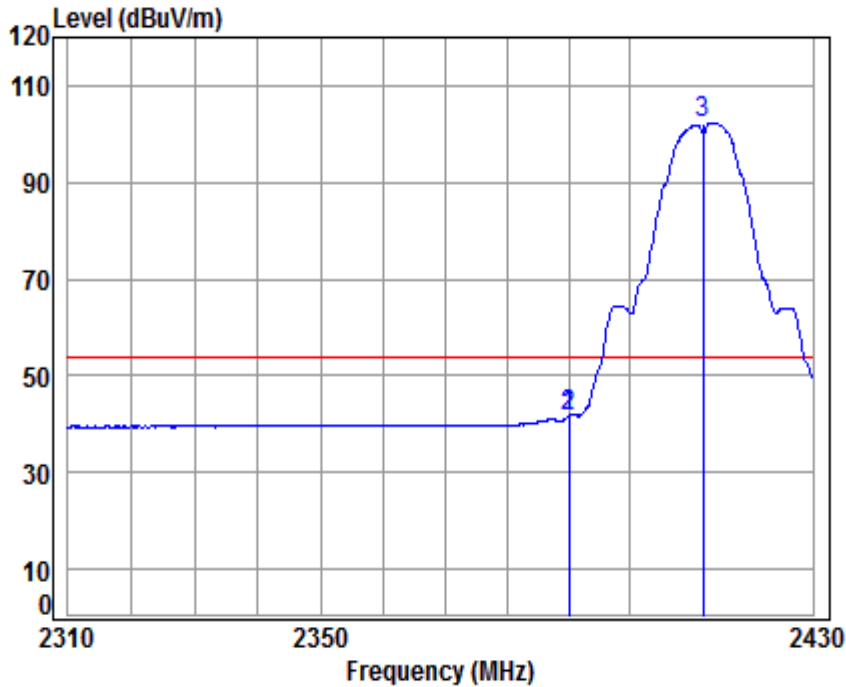

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	49.47	41.59	54.00	-12.41	Average
2	2390.000	5.47	28.52	41.87	49.47	41.59	54.00	-12.41	Average
3 *	2412.000	5.50	28.56	41.88	110.22	102.40	54.00	48.40	Average


4.10.1.8 802.11B_ Highest Channel_ Average_ Horizontal

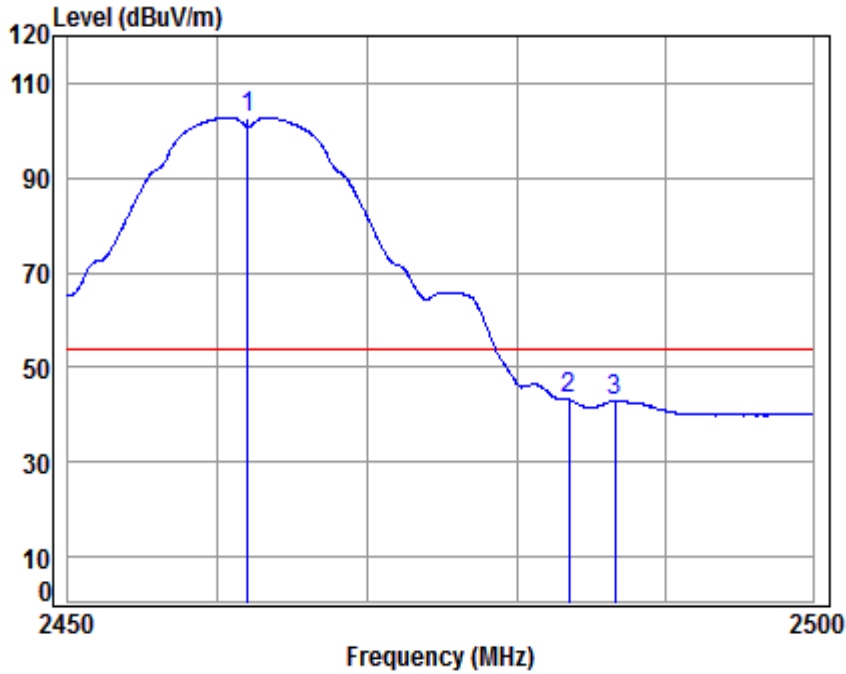

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11B

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	110.53	102.84	54.00	48.84 Average
2	2483.500	5.60	28.67	41.91	51.00	43.36	54.00	-10.64 Average
3	2486.651	5.60	28.68	41.91	50.61	42.98	54.00	-11.02 Average


4.10.1.9 802.11G_Lowest Channel_Peak_Vertical

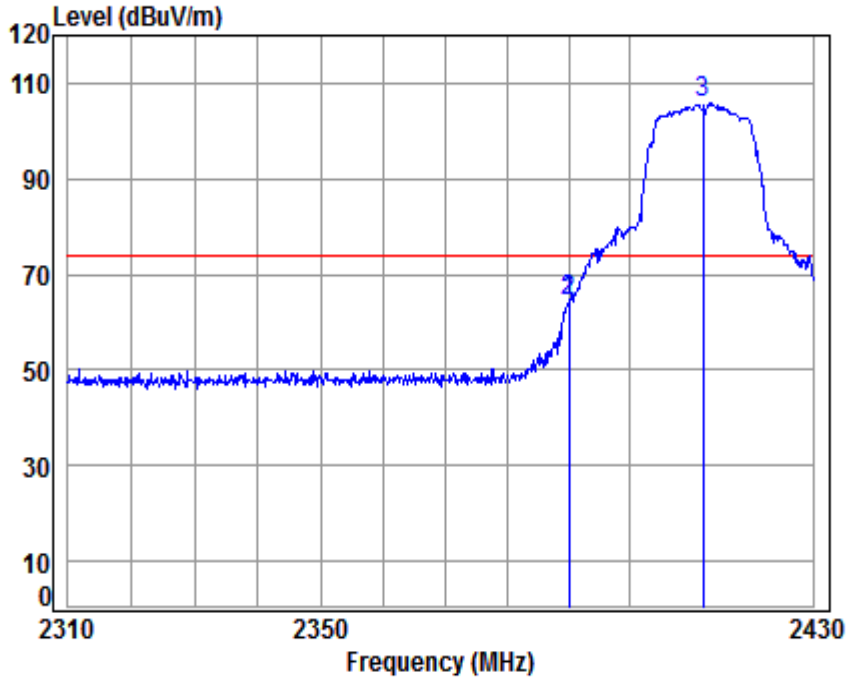

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11G

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	72.14	64.26	74.00	-9.74	peak
2	2390.000	5.47	28.52	41.87	72.14	64.26	74.00	-9.74	peak
3 *	2412.000	5.50	28.56	41.88	113.65	105.83	74.00	31.83	peak


4.10.1.10 802.11G_ Highest Channel_ Peak_ Vertical

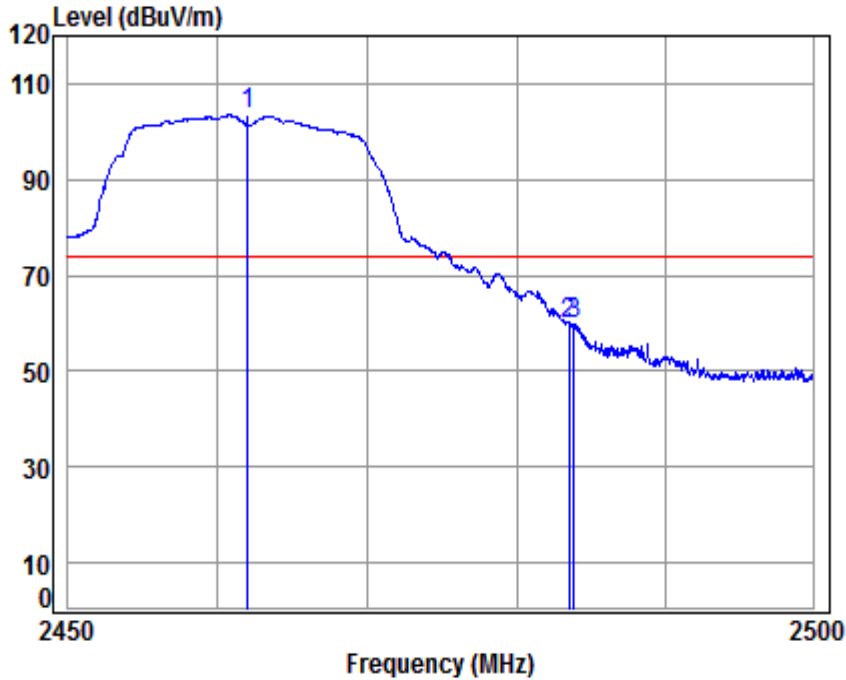

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11G

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	111.07	103.38	74.00	29.38 peak
2	2483.500	5.60	28.67	41.91	67.59	59.95	74.00	-14.05 peak
3	2483.890	5.60	28.67	41.91	67.28	59.64	74.00	-14.36 peak


4.10.1.11 802.11G_Lowest Channel_Peak_Horizontal

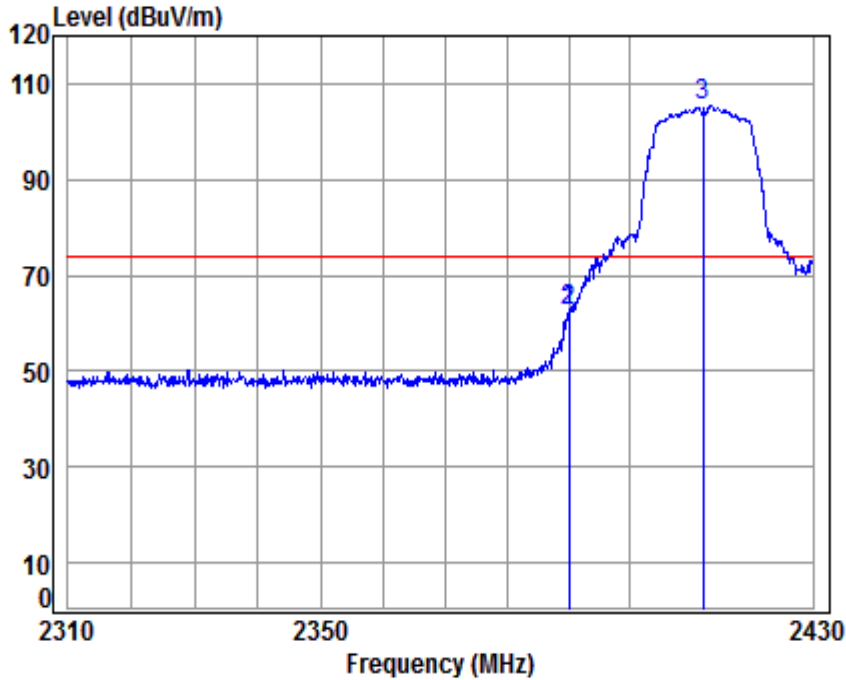

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11G

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	70.37	62.49	74.00	-11.51 peak
2	2390.000	5.47	28.52	41.87	70.37	62.49	74.00	-11.51 peak
3 *	2412.000	5.50	28.56	41.88	113.22	105.40	74.00	31.40 peak


4.10.1.12 802.11G_ Highest Channel_ Peak_ Horizontal

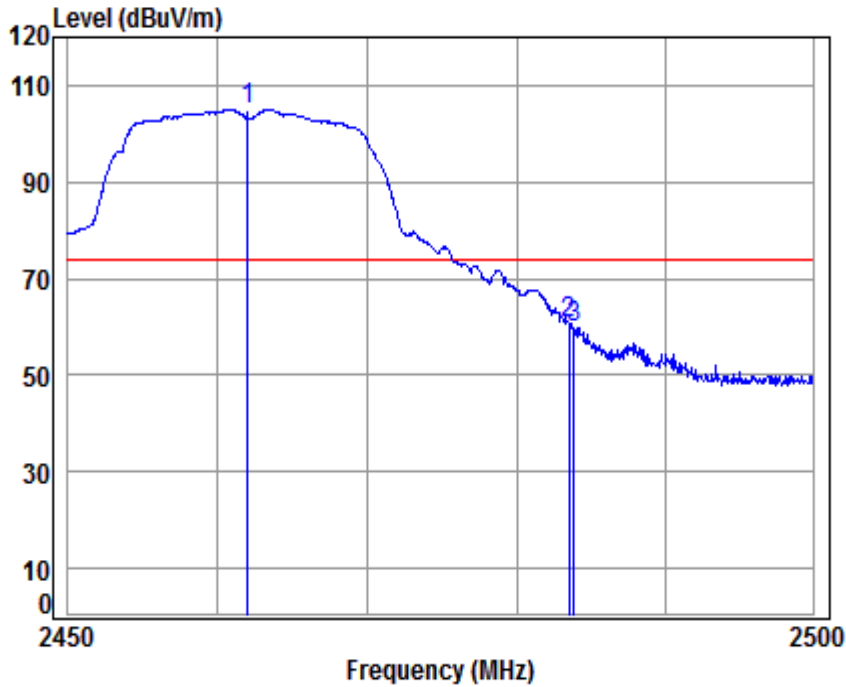

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11G

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	112.67	104.98	74.00	30.98 peak
2	2483.500	5.60	28.67	41.91	68.16	60.52	74.00	-13.48 peak
3	2483.890	5.60	28.67	41.91	67.64	60.00	74.00	-14.00 peak


4.10.1.13 802.11G_Lowest Channel_ Average_ Vertical

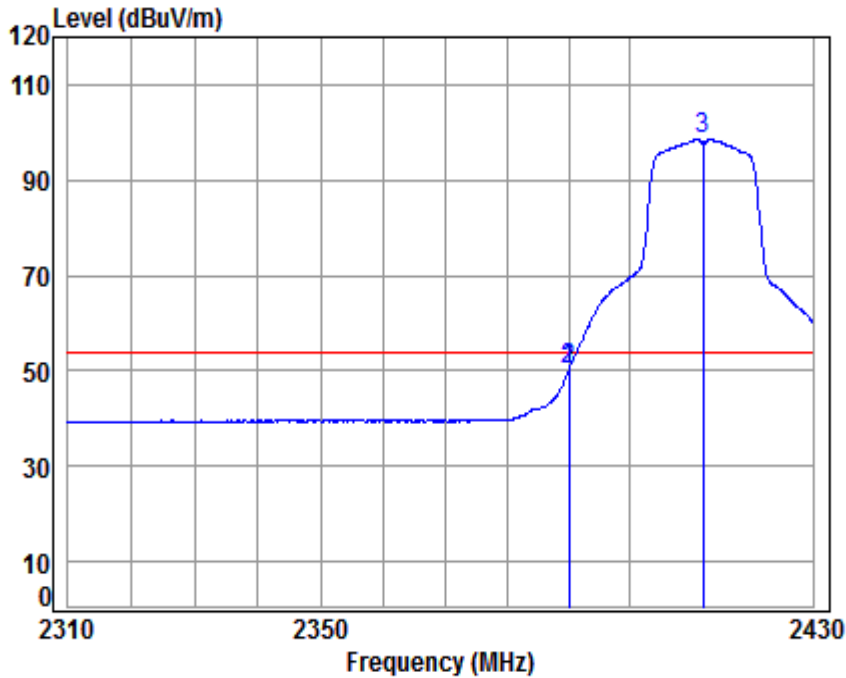

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	58.08	50.20	54.00	-3.80	Average
2	2390.000	5.47	28.52	41.87	58.08	50.20	54.00	-3.80	Average
3 *	2412.000	5.50	28.56	41.88	106.37	98.55	54.00	44.55	Average


4.10.1.14 802.11G_ Highest Channel_ Average _ Vertical

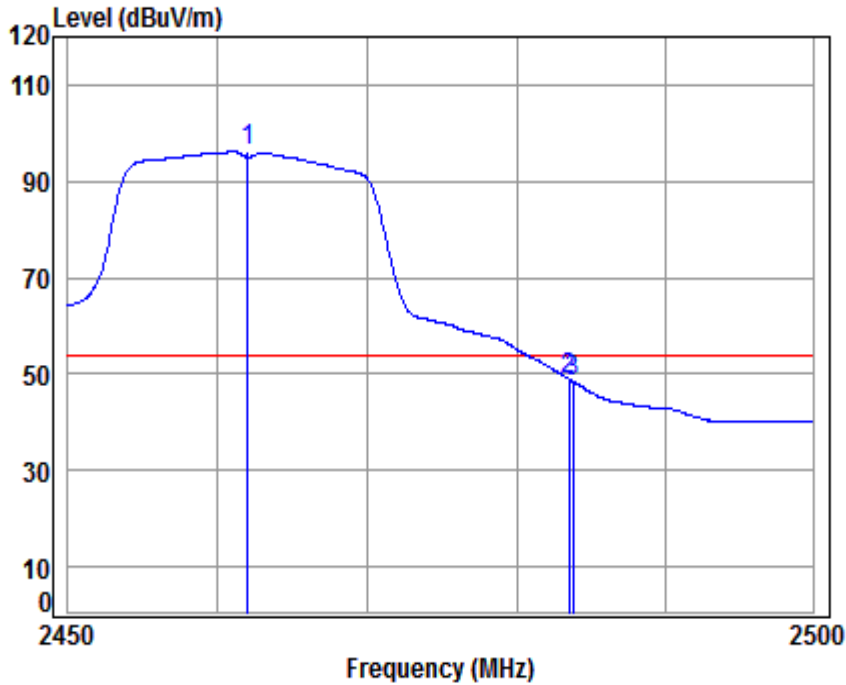

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11G

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	103.83	96.14	54.00	42.14 Average
2	2483.500	5.60	28.67	41.91	56.60	48.96	54.00	-5.04 Average
3	2483.790	5.60	28.67	41.91	56.05	48.41	54.00	-5.59 Average


4.10.1.15 802.11G_Lowest Channel_ Average _ Horizontal

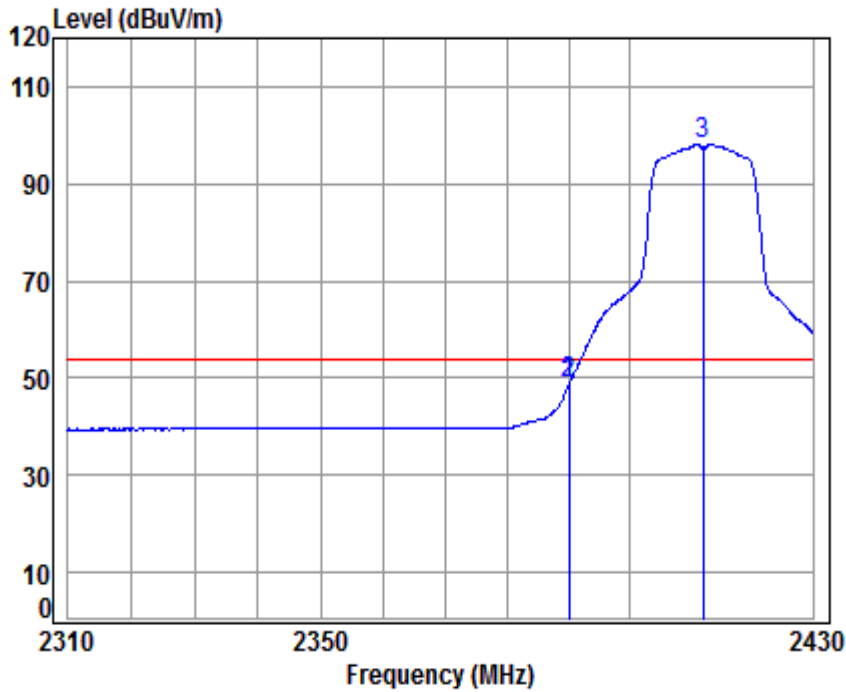

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2389.968	5.47	28.52	41.87	56.48	48.60	54.00	-5.40 Average
2	2390.000	5.47	28.52	41.87	56.48	48.60	54.00	-5.40 Average
3 *	2412.000	5.50	28.56	41.88	105.91	98.09	54.00	44.09 Average


4.10.1.16 802.11G_ Highest Channel_ Average_ Horizontal

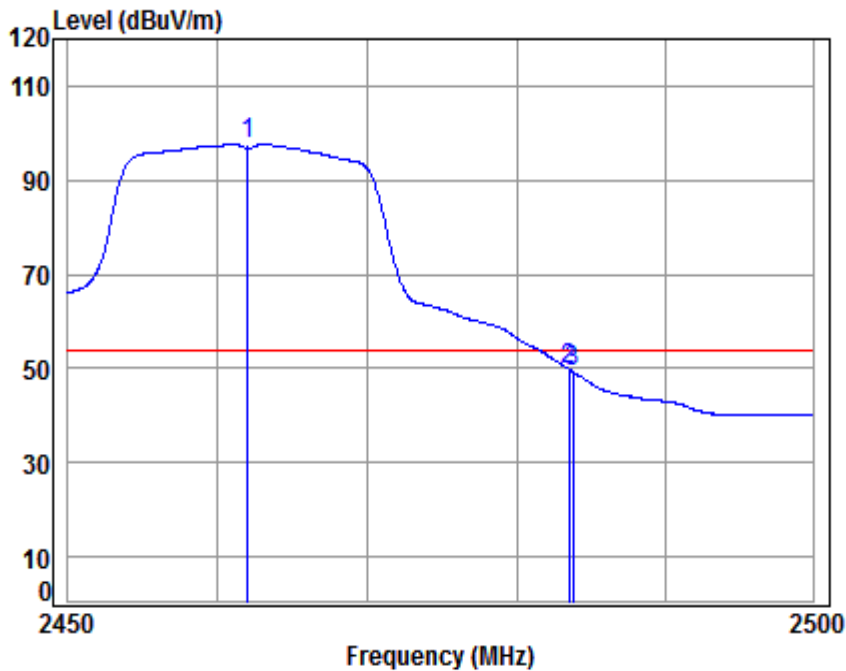

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11G

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	105.39	97.70	54.00	43.70 Average
2	2483.500	5.60	28.67	41.91	57.51	49.87	54.00	-4.13 Average
3	2483.790	5.60	28.67	41.91	56.90	49.26	54.00	-4.74 Average


4.10.1.17 802.11N20_Lowest Channel_Peak_Vertical

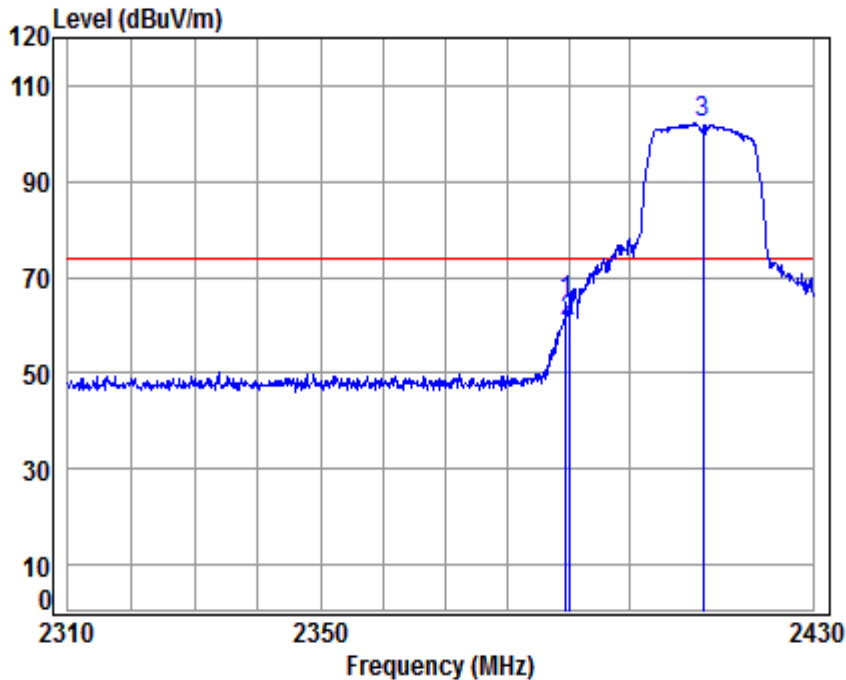

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.605	5.47	28.52	41.87	72.73	64.85	74.00	-9.15 peak
2	2390.000	5.47	28.52	41.87	68.38	60.50	74.00	-13.50 peak
3 *	2412.000	5.50	28.56	41.88	109.89	102.07	74.00	28.07 peak


4.10.1.18 802.11N20_ Highest Channel_ Peak_ Vertical

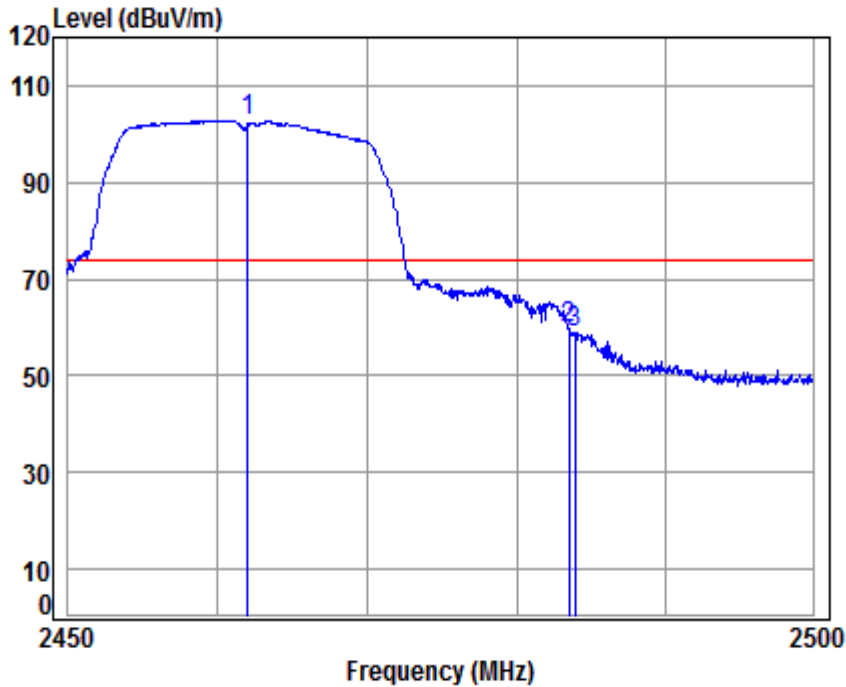

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	110.54	102.85	74.00	28.85 peak
2	2483.500	5.60	28.67	41.91	67.61	59.97	74.00	-14.03 peak
3	2483.940	5.60	28.67	41.91	66.56	58.92	74.00	-15.08 peak


4.10.1.19 802.11N20_Lowest Channel_Peak_Horizontal

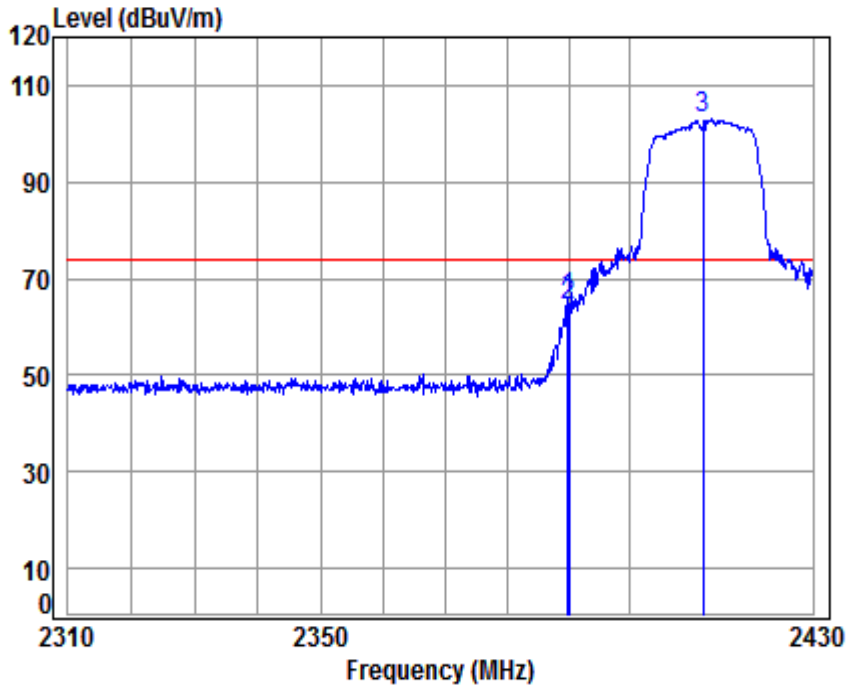

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2389.847	5.47	28.52	41.87	73.49	65.61	74.00	-8.39 peak
2	2390.000	5.47	28.52	41.87	72.39	64.51	74.00	-9.49 peak
3 *	2412.000	5.50	28.56	41.88	110.75	102.93	74.00	28.93 peak


4.10.1.20 802.11N20_ Highest Channel_ Peak_ Horizontal

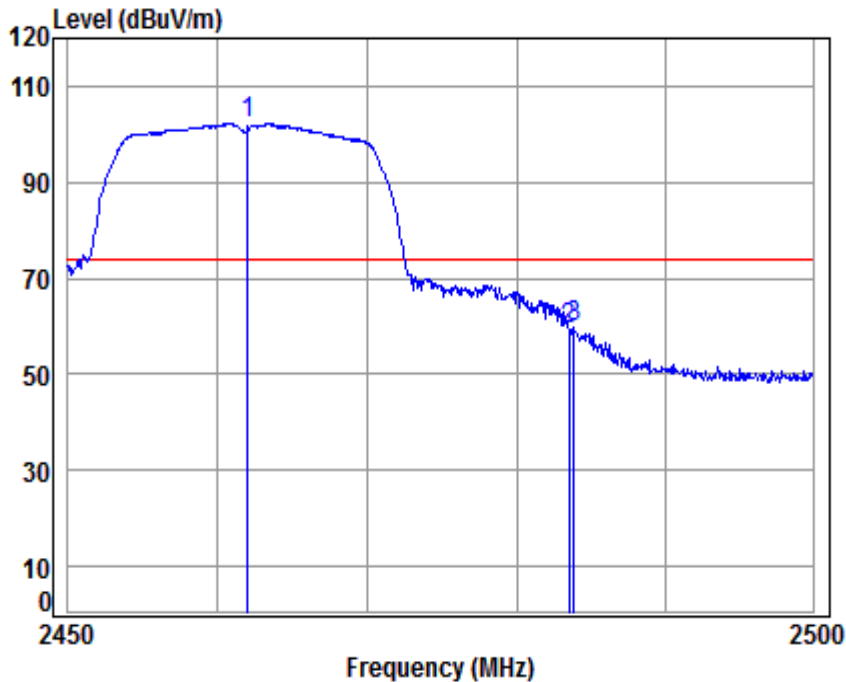

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	109.84	102.15	74.00	28.15 peak
2	2483.500	5.60	28.67	41.91	66.86	59.22	74.00	-14.78 peak
3	2483.840	5.60	28.67	41.91	67.30	59.66	74.00	-14.34 peak


4.10.1.21 802.11N20_Lowest Channel_ Average_ Vertical

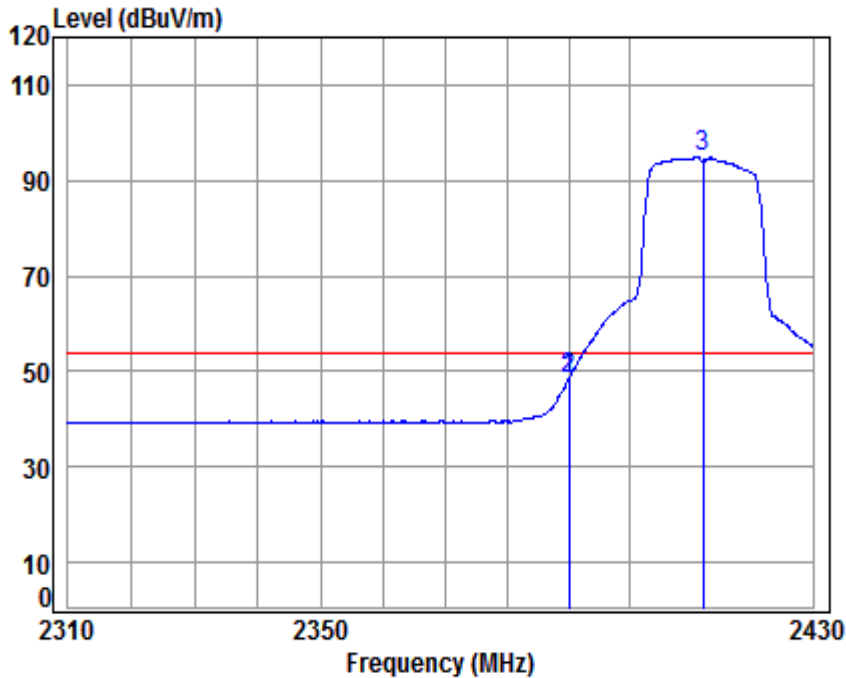

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	56.35	48.47	54.00	-5.53 Average
2	2390.000	5.47	28.52	41.87	56.35	48.47	54.00	-5.53 Average
3 *	2412.000	5.50	28.56	41.88	102.62	94.80	54.00	40.80 Average


4.10.1.22 802.11N20_ Highest Channel_ Average _ Vertical

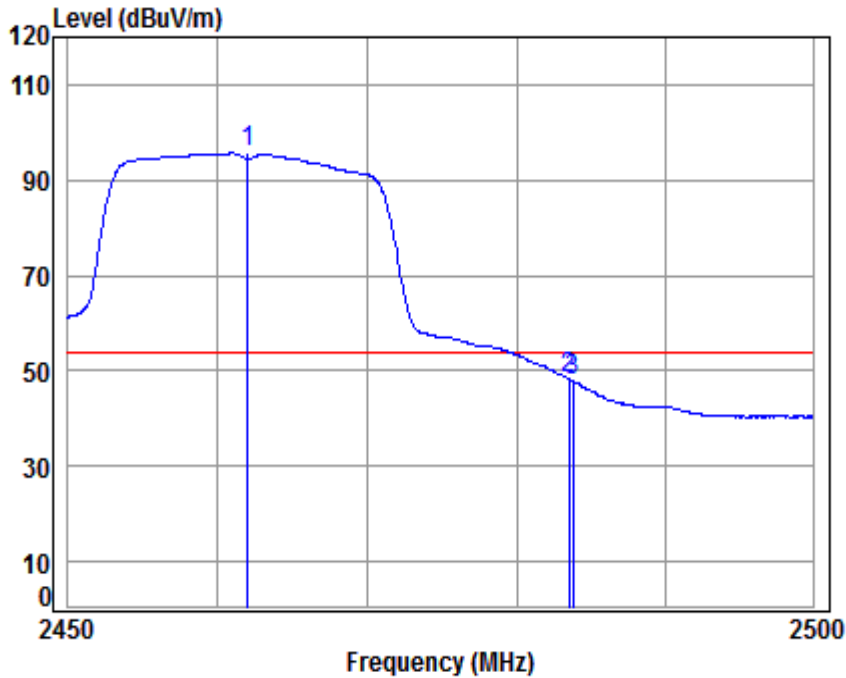

Site : chamber
 Condition: 3m VERTICAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	103.30	95.61	54.00	41.61 Average
2	2483.500	5.60	28.67	41.91	56.02	48.38	54.00	-5.62 Average
3	2483.790	5.60	28.67	41.91	55.47	47.83	54.00	-6.17 Average


4.10.1.23 802.11N20_Lowest Channel_ Average _ Horizontal

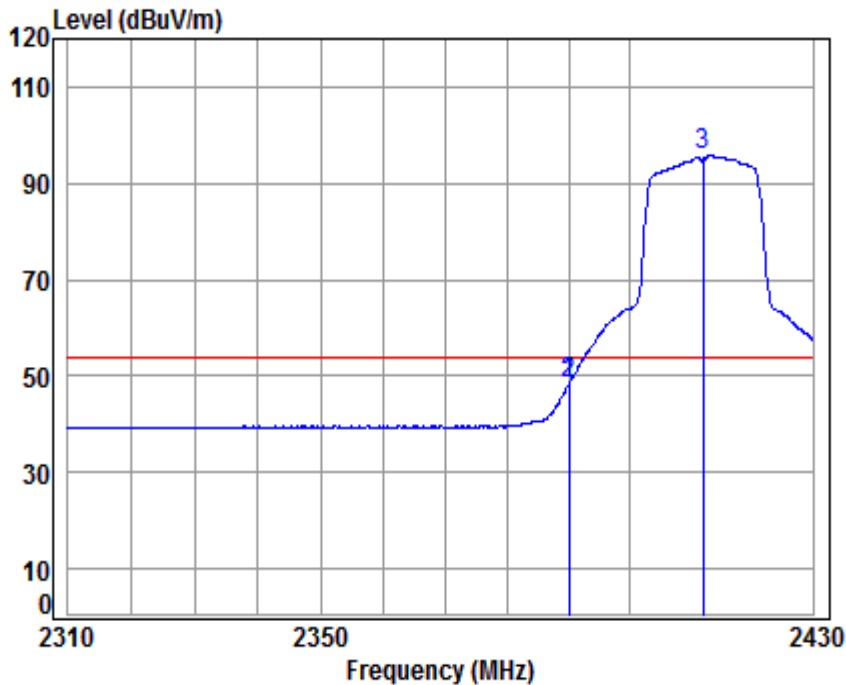

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2412 Band edge
 : 2.4G Wifi 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	56.04	48.16	54.00	-5.84	Average
2	2390.000	5.47	28.52	41.87	56.04	48.16	54.00	-5.84	Average
3 *	2412.000	5.50	28.56	41.88	103.60	95.78	54.00	41.78	Average

4.10.1.24 802.11N20_ Highest Channel_ Average_ Horizontal

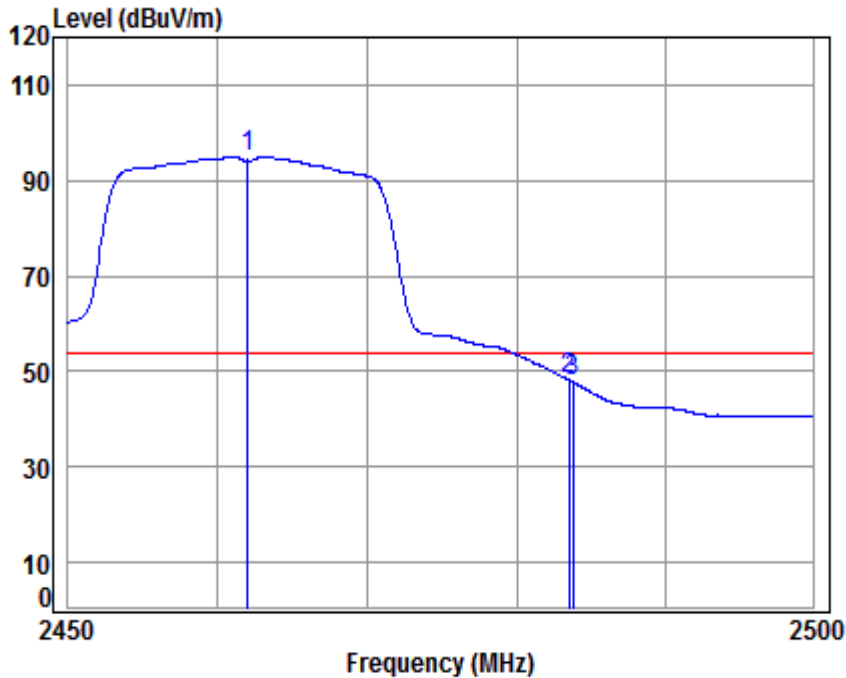

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 90032
 Mode : 2462 Band edge
 : 2.4G Wifi 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	5.57	28.64	41.90	102.67	94.98	54.00	40.98	Average
2	5.60	28.67	41.91	55.90	48.26	54.00	-5.74	Average
3	5.60	28.67	41.91	55.46	47.82	54.00	-6.18	Average