

# The Photos of SAR test

## No. I18Z61344-SEM02

For

## Vodafone Procurement Company S.à.r.I

## LTE / UMTS / GSM mobile phone

#### Model Name: VFD 529

#### With

#### Hardware Version: 05

#### Software Version: v7LT8

#### FCC ID: 2ACCJH098

(R) TESTING NVLAP LAB CODE 600118-0

#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

#### Test Laboratory:

 ${\sf CTTL}, {\sf Telecommunication} {\sf TechnologyLabs}, {\sf CAICT}$ 

No. 51, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl\_terminals@caict.ac.cn, website: www.caict.ac.cn


©Copyright. All rights reserved by CTTL.




Picture - 1 Constituents of the sample




Picture - 2 Left Hand Touch Cheek Position

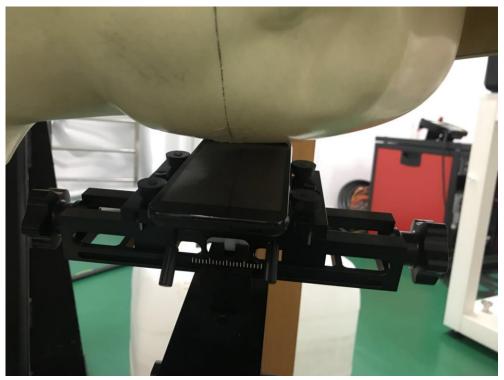

Picture - 3 Left Hand Tilt 15° Position

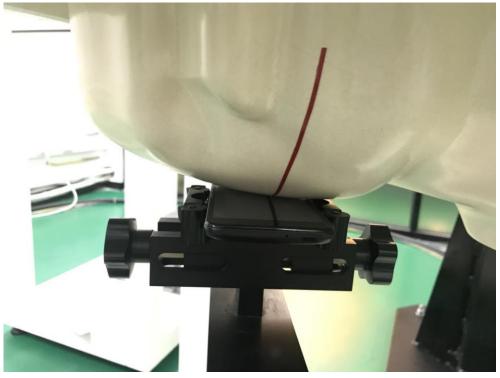


Picture - 4 Right Hand Touch Cheek Position

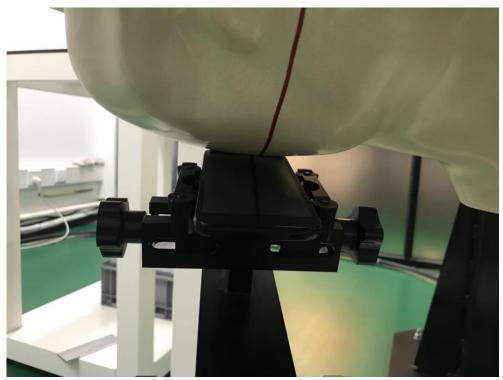


Picture - 5 Right Hand Tilt 15° Position

#### Test positions for body:

The Body SAR is tested at the following 7 test positions all with the distance =10mm between the EUT and the phantom bottom:

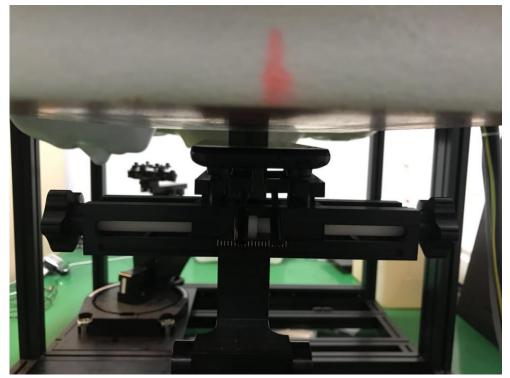


Picture - 6 Front 10mm

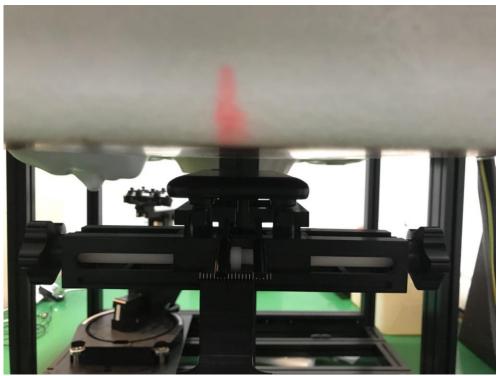

Picture - 7 Rear 10mm




Picture - 8 Left edge 10mm

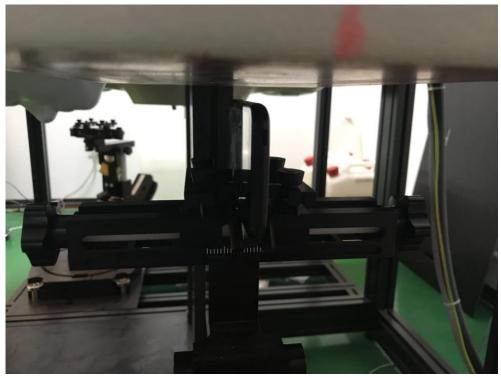


Picture - 9 Right edge 10mm



Picture - 10 Bottom edge 10mm

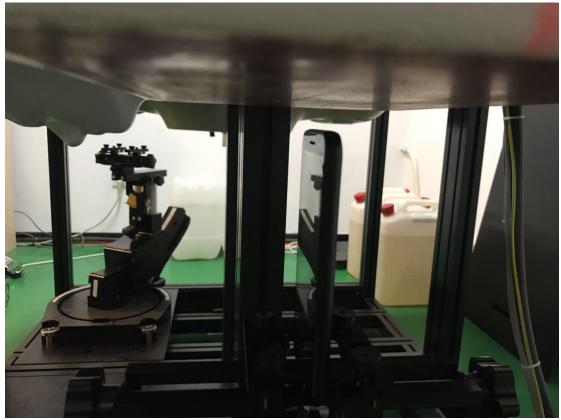

Picture - 11 Top edge 10mm

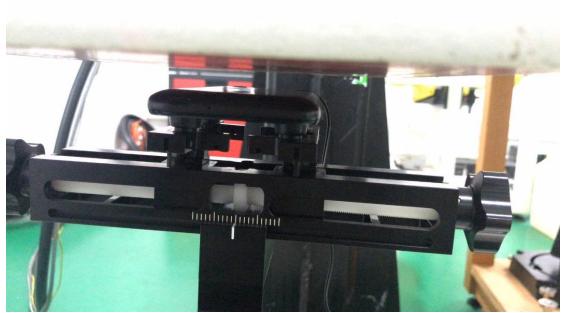

Picture - 12 Rear with Headset