

Hearing Aid Compatibility (HAC) **TEST REPORT**

<For T-Coil Measurement>

Applicant Name	TCL Communication Ltd.
	7/F, Block F4, TCL Communication Technology Building, TCL
Address of Applicant	International E City, Zhong Shan Yuan Road, Nanshan District,
	Shenzhen, Guangdong, P.R. China 518052
Model No.	5059S
FCC ID	2ACCJH102
Date of Receive	Dec. 11, 2018
Date of Test(s)	Dec. 14, 2018 ~ Dec. 18, 2018
Date of Issue	Jan. 02, 2019
Standards:	

Standards:

ANSI C63.19-2011

FCC RULE PART(S): 47 CFR PART 20.19(B)

HAC RATE CATEGORY: T3 (T Category)

In the configuration tested, the EUT complied with the standards specified above. Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronics & Communication Laboratory or testing done by SGS Taiwan Electronics & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronics & Communication Laboratory in writing.

Signed on behalf of SGS Sr. Engineer

Matt Kuo

Mate Kuo

Date: Jan. 02, 2019

Asst. Manager

John Teh

John Yeh Date: Jan. 02, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/C0011 Page: 2 of 67

Revision History

Report Number	Revision	Description	Issue Date
E5/2018/C0011	Rev.00	Initial creation of document	Jan. 02, 2019
FPA			AFC
		C	
C			
ED L			1504

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

www.tw.sgs.com



Table of Contents

1. Introduction	4
2. Testing Laboratory	
3. Details of Applicant	5
4. Description of EUT	6
5. Air Interfaces and Bands	8
6. Test Environment	9
7. Description of test system	9
8. Measurement Procedure	13
9. System calibration	
10. T-coil testing for GSM	
11. T-coil testing for WCDMA	17
11. T-coil testing for WCDMA12. T-coil testing for VoLTE	
	18
12. T-coil testing for VoLTE	18 21
12. T-coil testing for VoLTE	18 21 24
12. T-coil testing for VoLTE13. T-coil testing for VoWIFI14. Justification of held to ear modes tested	
 12. T-coil testing for VoLTE 13. T-coil testing for VoWIFI 14. Justification of held to ear modes tested 15. Test Standards and Limits 	
 12. T-coil testing for VoLTE 13. T-coil testing for VoWIFI 14. Justification of held to ear modes tested	
 12. T-coil testing for VoLTE 13. T-coil testing for VoWIFI 14. Justification of held to ear modes tested 15. Test Standards and Limits 16. Instruments List 17. Summary of Results 	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

Report No. : E5/2018/C0011 Page: 4 of 67



1. Introduction

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized. In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

- a) Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.
- b) Magnetic field measurements of a WD emitted via the audio transducer associated with the T-coil mode of the hearing aid, for assessment of hearing aid performance.
- Measurements with the hearing aid and a simulation of the categorized WD T-coil c) emissions to assess the hearing aid RF immunity in the T-coil mode.

The WD radio frequency (RF) and audio band emissions are measured.

Hence, the following are measurements made for the WD:

- a) **RF E-Field emissions**
- T-coil mode, magnetic signal strength in the audio band b)
- T-coil mode, magnetic signal and noise articulation index c)

d) T-coil mode, magnetic signal frequency response through the audio band Corresponding to the WD measurements, the hearing aid is measured for:

RF immunity in microphone mode a)

RF immunity in T-coil mode b)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2. Testing Laboratory

Company Name	SGS Taiwan Ltd. Electronics & Communication Laboratory
Company address	No.2, Keji 1st Rd., Guishan Township, Taoyuan County 333,
	Taiwan (R.O.C.)
Telephone	+886-2-2299-3279
Fax	+886-2-2298-0488
Website	http://www.tw.sgs.com/

3. Details of Applicant

Applicant Name	TCL Communication Ltd.
	7/F, Block F4, TCL Communication Technology Building, TCL
Applicant Address	International E City, Zhong Shan Yuan Road, Nanshan District,
	Shenzhen, Guangdong, P.R. China 518052

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



4. Description of EUT

Model No.	5059S	
FCC ID	2ACCJH102	
Mode of Operation	GSM ⊠GPRS ⊠EI ⊠LTE FDD ⊠Bluetooth ⊠WLAN802.11b/g/n/(20M/40M)	DGE XWCDMA
	GSM (DTM multi class B)	1/8.3
	GPRS (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)
Duty Cycle	EDGE (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)
CAL	WCDMA	
	LTE FDD	
	WLAN802.11b/g/n(20M/40M)	1
	Bluetooth	1
	GSM850	824 — 849
	GSM1900	1850 — 1910
	WCDMA Band II	1850 — 1910
	WCDMA Band V	824 — 849
	LTE FDD Band 2	1850 — 1910
TX Frequency Range	LTE FDD Band 4	1710 — 1755
(MHz)	LTE FDD Band 5	824 — 849
	LTE FDD Band 13	777 — 787
	LTE FDD Band 66	1710 — 1780
	WLAN802.11 b/g/n(20M)	2412 — 2462
	WLAN802.11 n(40M)	2422 — 2452
	Bluetooth	2402 — 2480

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

```
www.tw.sgs.com
```



Report No. : E5/2018/C0011 Page: 7 of 67

	GSM850	128	_	251
	GSM1900	512	_	810
	WCDMA Band II	9262	_	9538
	WCDMA Band V	4132	-	4233
	LTE FDD Band 2	18607		19193
Channel Number	LTE FDD Band 4	19957		20393
(ARFCN)	LTE FDD Band 5	20407		20643
	LTE FDD Band 13	23205	_	23255
	LTE FDD Band 66	131979	—	132665
	WLAN802.11 b/g/n(20M)	1	—	11
	WLAN802.11 n(40M)	3	_	9
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Company's sole except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



Report No. : E5/2018/C0011 Page: 8 of 67

5. Air Interfaces and Bands

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction	
	850						
GSM	1900	VO	Yes B	BT and Wi-Fi	CMRS Voice*	NA	
	GPRS/EDGE	VD	Yes		Google Duo**		
	850	VO	Voo		CMPS Vision*		
WCDMA	1900	VU	VO Yes E	BT and Wi-Fi	CMRS Voice*	NA	
	HSPA	VD	Yes		Google Duo**		
LTE	Band 2/4/5/13/66	VD	Yes	BT and Wi-Fi	VoLTE* Google Duo**	NA	
Wi-Fi	2450	VD	Yes	BT, GSM, WCDMA and LTE	Wi-Fi calling** Google Duo**	NA	
ВТ	2450	DT	NA	Wi-Fi, GSM, WCDMA and LTE	NA	NA	

VO: Legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011 DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

* Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation

** Ref Lev -20 dBm0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6. Test Environment

Ambient Temperature	21.7° C	
Relative Humidity	<80 %	

7. Description of test system

7.1 Measurement System Diagram for SPEAG Robotic

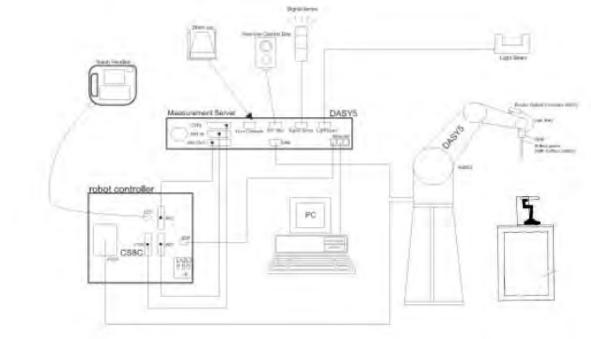


Fig. 1. The SPEAG Robotic Diagram

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 www.tw.sas.com

f (886-2) 2298-0488



The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positionina.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

f (886-2) 2298-0488

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.2 Audio Magnetic Probe AM1DV3

Description	- Active single sensor probe for	0
	both axial and radial measurement	
	scans- Fully RF shielded,	
	compatible with DAE, with adapted	11
	probe cup	4
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	
Dimensions	300X18mm	
		AM1DV3 Audio Probe

7.3 Test Arch

Description	Enables easy and well defined	
	positioning of the phone and	
	validation dipoles as well as simple	
	teaching of the robot.	
Dimensions	length: 370 mm	
	width: 370 mm	
	height: 370 mm	Test Arch

7.4 AMCC- Audio Magnetic Calibration Coil

Description	Allows calibration of the complete	
	measurement setup, The two	
	horizontal coils create a	AMCC
	homogeneous magnetic field in the	
	z direction. Refer to Appendix 5 for	5
	more detail on AMCC coil	
		AMCC

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to is Client and this document does not exonerate parties to a transaction from exercising all their lights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



7.5 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	
		Phone Holder

7.6 AMMI - Audio Magnetic Measurement Instrument

Description	-USB interface to PC	-
	- Probe signal digitization and	
	power supply- Test signal	AMMI
	generation for wireless device	AMMI AMMI
	(via base station simulator)-	
	Auto-calibration and interfaces to	AMMI
x	AMCC for complete	
	setup-calibration	
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/C0011 Page: 13 of 67

8. Measurement Procedure

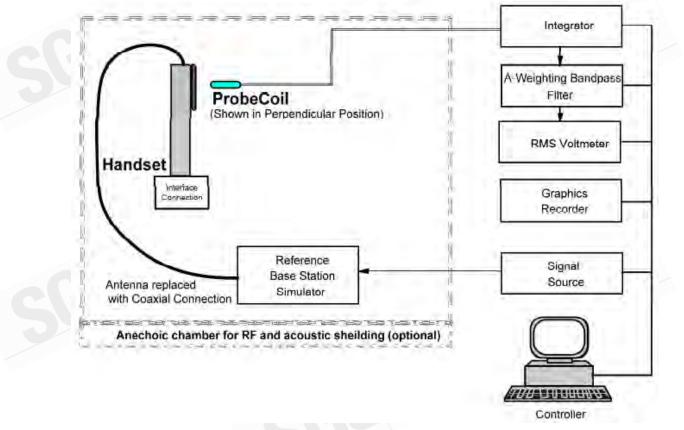


Fig. 2. T-coil signal measurement test setup

The sequence of the measurement is T-Coil testing procedure over a wireless communication device:

- 1. Confirm Geometry & signal check. Probe phantom alignment and check of accuracy.
- Background noise measurement in the area of the WD.
- Perform 50x50mm area scan with narrow band signal to determine ABM1, ABM2 and SNR for axial and radial orientation positions.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/C0011 Page: 14 of 67

4. For Axial position, perform optimal SNR point measurement with a broadband signal – determine Frequency Response


Note.

#. The EUT do not use the special HAC SW.

#. Setting the maximum volume for EUT during the measurement.

#. For the measurement, it don't use the "post-test measurement processing of results".

#. Per KDB 285076 D01v05, handsets that that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2011. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.



除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No. : E5/2018/C0011 Page: 15 of 67

9. System calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

f (886-2) 2298-0488



Report No. : E5/2018/C0011 Page: 16 of 67

10. T-coil testing for GSM

1. Codec investigation

An investigation was performed to determine the audio codec to be used for testing by SNR comparison. The FR V1 setting was used for the testing as the worst-case codec.

Codec Investigation - GSM									
Codec Setting:	FR V1	HR V1	Orientation	Band	Channel				
ABM1 (dBA/m)	7.11	8.65							
ABM2 (dBA/m)	-27.07	-25.73	Axial	GSM 850	190				
Frequency Response	Pass	Pass	Axiai						
Signal Quality (dB)	34.18	34.38		CFP	4				

2. Air Interface Investigation

Using the worst case codec to test low/middle/high channels in each band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Member of SGS Group

www.tw.sas.com



Report No. : E5/2018/C0011 Page: 17 of 67

11. T-coil testing for WCDMA

1. Codec investigation

An investigation was performed to determine the audio codec to be used for testing by SNR comparison. The AMR 12.2kbps setting was used for the testing as the worst-case codec.

	Codec Investigation - WCDMA										
Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps		Band	Channel					
ABM1 (dBA/m)	-6.14	-5.75	-5.41		Band II						
ABM2 (dBA/m)	-37.96	-38.58	-37.97	Axial		0.400					
Frequency Response	Pass	Pass	Pass	Axiai		9400					
Signal Quality (dB)	31.82	32.83	32.56			4					

2. Air Interface Investigation

Using the worst case codec to test low/middle/high channels in each band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com




12. T-coil testing for VoLTE

I. Test setup for VoLTE over IMS T-coil Testing

1. Test setup

The general test setup used for VoLTE over IMS is shown below. The call box used when performing VoLTE over IMS T-coil measurement is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

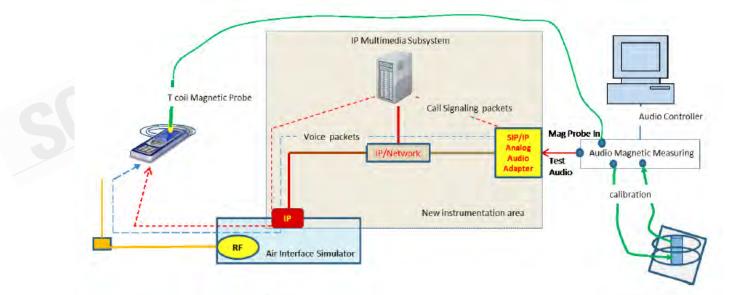

2. Audio level setting

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/C0011 Page: 19 of 67

II. DUT configuration for VoLTE over IMS T-coil Testing

1.Radio configuration investigation

An investigation was performed to determine the modulation and RB configuration to be used for testing. QPSK, 1RB, 0RB offset was used for the testing as the worst-case configuration.

	VoL	TE over I	MS SNN	R by Ra	adio Cor	figuration	on	
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
1880	18900	20	QPSK	1	0	-8.14	-35.36	27.22
1880	18900	20	QPSK	1	50	-6.89	-35.22	28.33
1880	18900	20	QPSK	1	99	-6.87	-34.44	27.57
1880	18900	20	QPSK	50	0	-6.26	-34.94	28.68
1880	18900	20	QPSK	50	25	-6.40	-34.28	27.88
1880	18900	20	QPSK	50	50	-7.82	-35.89	28.07
1880	18900	20	QPSK	100	0	-6.81	-34.61	27.80
1880	18900	20	16QAM	1	0	-6.84	-34.79	27.95
1880	18900	20	16QAM	1	50	-6.34	-35.21	28.87
1880	18900	20	16QAM	1	99	-7.40	-36.04	28.64
1880	18900	20	16QAM	50	0	-6.36	-34.46	28.10
1880	18900	20	16QAM	50	25	-7.38	-35.00	27.62
1880	18900	20	16QAM	50	50	-7.64	-36.04	28.40
1880	18900	20	16QAM	100	0	-7.00	-35.72	28.72

Radio Configuration Investigation

2.Codec investigation

An investigation was performed to determine the audio codec to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	AMR Codec Investigation - VoLTE over IMS										
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel				
ABM1 (dBA/m)	-8.14	-9.4	-9.29	-7.58		Band 2 / 20MHz					
ABM2 (dBA/m)	-35.36	-35.93	-35.95	-34.52	Axial		18900				
Frequency Response	Pass	Pass	Pass	Pass	Axiai		10900				
Signal Quality (dB)	27.22	26.53	26.66	26.94							

	EVS Coo	dec Inve	stigation	า - VoLT	E over IM	S	
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	-8.52	-9.03	-7.61	-9.09			
ABM2 (dBA/m)	-36.94	-37.12	-34.37	-37	Axial	Band 2 / 20MHz	18900
Frequency Response	Pass	Pass	Pass	Pass	Axiai		10900
Signal Quality (dB)	28.42	28.09	26.76	27.91			

3. Air Interface Investigation

The worst case band for each probe orientation is additionally tested on all bandwidth combination. LTE B2 at 20MHz is the worst case for the Axial and Radial probe orientation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com

Member of SGS Group




13. T-coil testing for VoWIFI

I. Test setup for VoWIFI over IMS T-coil Testing

1. Test setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI calling, is shown below. The call box used when performing VoWIFI over IMS T-coil measurement is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

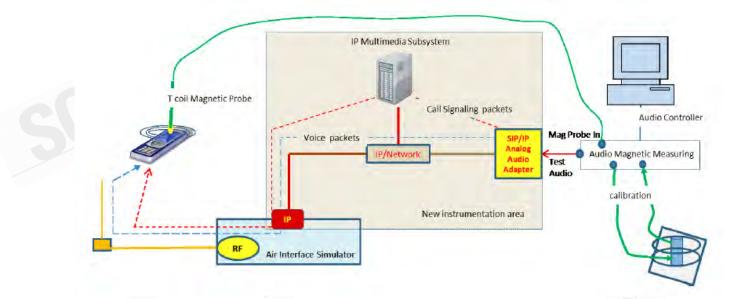

2. Audio level setting

According to the KDB285076 D02, regarding the appropriate audio levels to be used for WIFI over IMS T-coil testing, -20dBm0 shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/C0011 Page: 22 of 67

II. DUT configuration for VoWIFI over IMS T-coil Testing

1. Radio configuration investigation

Investigate the lowest and highest data rates and modulation to determine worst radio configuration to be used for testing by SNR comparison.

802.11b Radio configuration investigation									
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]				
802.11b	6	1	-13.34	-40.18	26.84				
802.11b	6	11	-12.31	-40.00	27.69				

802.11g Radio configuration investigation									
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]				
802.11g	6	6	-11.95	-40.26	28.31				
802.11g	6	54	-11.58	-39.47	27.89				

802.11n(20M) Radio configuration investigation								
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]			
802.11n(20M)	6	MCS0	-13.18	-40.60	27.42			
802.11n(20M)	6	MCS7	-11.99	-40.00	28.01			

802.11n(40M) Radio configuration investigation									
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]				
802.11n(40M)	6	MCS0	-12.52	-39.88	27.36				
802.11n(40M)	6	MCS7	-11.79	-40.60	28.81				

2. Codec investigation

Determine the worst-case codec by SNR comparison.

The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing.

```
www.tw.sas.com
```

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AMR Codec Investigation - VoWIFI over IMS										
Codec Setting:	WB AMR 23.85kbps		NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel		
ABM1 (dBA/m)	-13.34	-13.75	-11.92	-13.46			802.11b	6		
ABM2 (dBA/m)	-40.18	-40.2	-39.05	-40.08	Axial	2.4GHz				
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.40112				
Signal Quality (dB)	26.84	26.45	27.13	26.62						

EVS Codec Investigation - VoWIFI over IMS										
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps		NB AMR 4.75kbps	Orientation	Band	Standard	Channel		
ABM1 (dBA/m)	-13.32	-13.6	-13.07	-13.42		2.4GHz	802.11b			
ABM2 (dBA/m)	-39.93	-41.22	-40.6	-41.85	Avial			6		
Frequency Response	Pass	Pass	Pass	Pass	Axial			0		
Signal Quality (dB)	26.61	27.62	27.53	28.43						

3. Air Interface Investigation

Using the worst case codec to proceed T-coil test of worst case mode for axial and radial orientations.

(802.11b is the worst case mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to is Client and this document does not exonerate parties to a transaction from exercising all their lights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/C0011 Page: 24 of 67

14. Justification of held to ear modes tested

a. The device supports VoLTE/VoWLAN, so T-coil test for VoLTE/VoWLAN is required.

b. There is one OTT voice service (Google Duo) pre-installed (installed and delivered) by the manufacturer.

c. There is one OTT voice service (Google Duo) pre-installed (installed and delivered) by the manufacturer for the operating system manufacturer's software partner.

d. There is one OTT voice service (Google Duo) installed and delivered by the manufacturer at the direction of the service provider.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



15. Test Standards and Limits

The measurements were performed to ensure compliance to the ANSI C63.19-2011 standard.

The limit values please follow in Table 2

Category	Telephone parameters WD signal quality
T1	0 dB to 10 dB
T2	10 dB to 20 dB
Т3	20 dB to 30 dB
T4	> 30 dB

Table 2. Signal Quality Range

Signal strength

Axial field intensity

The axial component of the magnetic field, directed along the measurement axis and located at the measurement plane, shall be \geq -18 dB (A/m) at 1 kHz, in 1/3 octave band filter.

Radial(Y) field intensity

The radial component of the magnetic field, as measured at the radial, measurement points shall be \geq -18 dB (A/m) at 1 kHz, in 1/3 octave band filter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/C0011 Page: 26 of 67

16. Instruments List

io. instrum					
Manufacturer	Device	Туре	Serial Number	Date of Last Calibration	Date of Next Calibration
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1336	Aug.06,2018	Aug.05,2019
Schmid & Partner Engineering AG	Software	DASY52 52.10.1	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Audio Magnetic 1D Field Probe	AM1DV3	3115	Mar.15.2018	Mar.14.2019
Schmid & Partner Engineering AG	AMMI	010 AB	1028	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	AMCC SD HAC	P01 BA	1026	N/A	N/A
Schmid & Partner Engineering AG	Test Arch SD HAC	P01	1047	N/A	N/A
R&S	Radio Communication Test	CMU200	113505	Dec.20.2017	Dec.19.2018
R&S	Radio Communication Tester	CMW 500	143913	Apr.29.2018	Apr.28.2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



17. Summary of Results

	Air interface investigation for GSM											
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page		
		-	128	8.68	-26.70		1.31	35.38	T4	-		
	Axial SM 850	-	190	7.11	-27.07	-59.04	1.32	34.18	T4	29		
CSM 950		-	251	7.52	-26.89		1.48	34.41	T4	-		
G3101 050		-	128	0.09	-37.44			37.53	T4	-		
	Radial	-	190	0.04	-36.35	-58.49	N/A	36.39	T4	30		
		-	251	0.10	-38.17			38.27	T4	-		
		-	512	7.63	-28.31		1.39	35.94	T4	-		
	Axial	-	661	7.22	-28.52	-59.04	1.29	35.74	T4	32		
GSM 1900		-	810	7.66	-29.27		1.44	36.93	T4	-		
G3W 1900		-	512	0.08	-39.28			39.36	T4	-		
	Radial	-	661	0.01	-37.75	-58.49	N/A	37.76	T4	33		
		-	810	0.04	-39.08			39.12	T4	-		

	Air interface investigation for WCDMA										
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page	
		-	9262	-5.79	-37.71		1.93	31.92	T4	-	
	Axial	-	9400	-6.14	-37.96	-58.43 1.83	31.82	T4	35		
WCDMA		-	9538	-5.55	-38.36		1.99	1.99 32.81 32.75	T4	-	
Band II		-	9262	-15.80	-48.55	-58.72	N/A	32.75	T4	-	
	Radial	-	9400	-16.06	-46.84			30.78	T4	36	
		-	9538	-15.72	-48.26			32.54	T4	-	
		-	4132	-12.67	-36.28	1.35	23.61	Т3	-		
	Axial	-	4183	-14.25	-37.35	-58.43	1.21	23.10	T3	38	
WCDMA		-	4233	-13.70	-38.47		1.32	24.77	Т3	-	
Band V		-	4132	-16.80	-44.75			27.95	T3	-	
	Radial	-	4183	-17.57	-44.00	-58.72	N/A	26.43	Т3	41	
		-	4233	-15.98	-44.23			28.25	T3	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



			Air inte	rface inv	esugali		E B2			
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page
		20	18900	-9.40	-35.93		2.00	26.53	T3	41
		15	18900	-8.93	-35.64		2.00	26.71	T3	-
	Axial	10	18900	-8.55	-35.24	-58.91	2.00	26.69	T3	-
	, order	5	18900	-7.60	-35.20	00.01	2.00	27.60	T3	-
		3	18900	-9.04	-37.20		2.00	28.16	T3	-
LTE Band		1.4	18900	-8.29	-35.97		2.00	27.68	T3	-
2		20	18900	-14.13	-38.81			24.68	Т3	42
		15	18900	-12.52	-38.65			26.13	T3	-
	Radial	10	18900	-12.20	-37.25	-58.56	N/A	25.05	T3	-
		5	18900	-12.79	-39.38			26.59	Т3	-
		3	18900	-13.68	-39.99			26.31	T3	-
		1.4	18900	-13.87	-39.49			25.62	T3	-
			Air inte	rface inv	estigati	on for LT	E B4			
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page
LTE Band	Axial	20	20175	-6.29	-33.76	-58.91	2.00	27.47	T3	44
4	Radial	20	20175	-14.67	-40.11	-58.56	N/A	25.44	T3	45
			Air inte	rface inv	estigati	on for LT	E B5			
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page
LTE Band	Axial	10	20525	-6.22	-33.91	-58.91	2.00	27.69	Т3	47
5	Radial	10	20525	-14.92	-40.59	-58.56	N/A	25.67	Т3	48
			Air inter	face inve	estigatio	n for LT	E B13			
Mode	Orientation	Bandwidth (MHz)	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page
LTE Band	Axial	10	23230	-6.31	-33.11	-58.91	2.00	26.80	Т3	50
13	Radial	40							T3	F 4
	Hadiai	10	23230	-16.82	-43.22	-58.56	N/A	26.40	13	51
		_						26.40	13	51
Mode	Orientation	_		face inve	estigatio	-58.56		26.40 Signal Quality (dB)	00040-0044	Plot page
Mode LTE Band	Orientation Axial	Bandwidth	Air inter	face inve ABM1 [dB(A/m)] -6.18	estigatio	-58.56 n for LT Ambient Noise	E B66 Frequency Response	Signal Quality	C63.19-2011	Plot page 53
Mode	Orientation	Bandwidth (MHz)	Air inter Channel	face inve ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	-58.56 on for LT Ambient Noise [dB(A/m)]	E B66 Frequency Response Variation(dB)	Signal Quality (dB)	C63.19-2011 Rating	Plot page
Mode LTE Band	Orientation Axial	Bandwidth (MHz) 20 20	Air inter Channel 132322 132322	face inve ABM1 [dB(A/m)] -6.18 -16.87	ABM2 [dB(A/m)] -34.02 -41.60	-58.56 on for LTI Ambient Noise [dB(A/m)] -58.91	E B66 Frequency Response Variation(dB) 2.00 N/A	Signal Quality (dB) 27.84	C63.19-2011 Rating T3	Plot page
Mode LTE Band	Orientation Axial	Bandwidth (MHz) 20 20	Air inter Channel 132322 132322	face inve ABM1 [dB(A/m)] -6.18 -16.87 ce inves ABM1	ABM2 [dB(A/m)] -34.02 -41.60	-58.56 on for LTI Ambient Noise [dB(A/m)] -58.91 -58.56	E B66 Frequency Response Variation(dB) 2.00 N/A	Signal Quality (dB) 27.84 24.73	C63.19-2011 Rating T3	Plot page 53
Mode LTE Band 66	Orientation Axial Radial	Bandwidth (MHz) 20 20 A Bandwidth	Air inter Channel 132322 132322 ir interfa	face inve ABM1 [dB(A/m)] -6.18 -16.87 ice inves ABM1	ABM2 [dB(A/m)] -34.02 -41.60 tigation ABM2	-58.56 on for LTI Noise [dB(A/m)] -58.91 -58.56 for 2.4GI Ambient Noise	E B66 Frequency Response Variation(dB) 2.00 N/A Hz WIFI Frequency Response	Signal Quality (dB) 27.84 24.73 Signal Quality	C63.19-2011 Rating T3 T3 C63.19-2011	Plot page 53 54 Plot

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

```
f (886-2) 2298-0488
                              www.tw.sgs.com
```



Report No. : E5/2018/C0011 Page: 29 of 67

18. Measurement Data

Date: 2018/12/14

T-Coil-GSM 850 CH 190


Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 34.18 dB ABM1 comp = 7.11 dBA/mBWC Factor = 0.16 dB Location: 4.2, -4.2, 3.7 mm

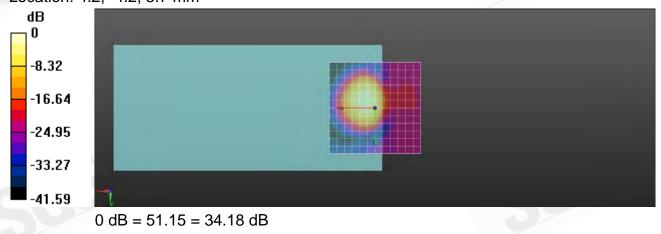

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Date: 2018/12/14

T-Coil-GSM 850 CH 190


Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section


DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 36.39 dB ABM1 comp = 0.04 dBA/mBWC Factor = 0.16 dB Location: 4.2, 4.2, 3.7 mm

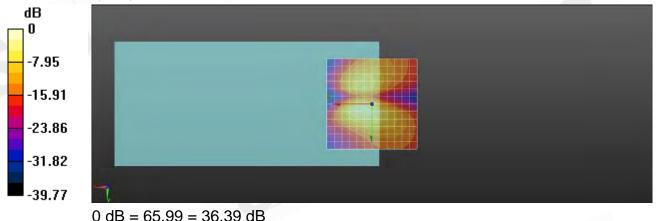




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



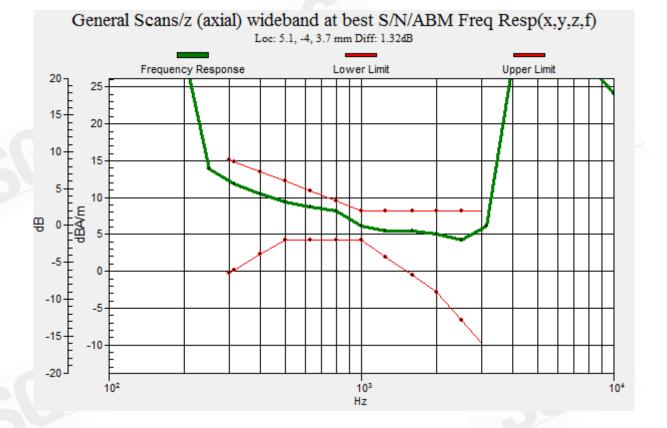

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



Date: 2018/12/14

T-Coil-GSM 1900 CH 661


Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 35.74 dB ABM1 comp = 7.22 dBA/mBWC Factor = 0.16 dB Location: 4.2, -4.2, 3.7 mm

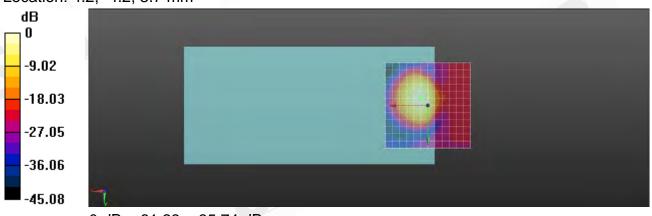

0 dB = 61.23 = 35.74 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279

Member of SGS Group



Date: 2018/12/14

T-Coil-GSM 1900 CH 661

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 37.76 dB ABM1 comp = 0.01 dBA/mBWC Factor = 0.16 dB Location: 4.2, 4.2, 3.7 mm



0 dB = 77.31 = 37.76 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com





General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) Loc: 4.6, -4.3, 3.7 mm Diff: 1.29dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

Member of SGS Group



Date: 2018/12/15

T-Coil-WCDMA Band II CH 9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 31.82 dB ABM1 comp = -6.14 dBA/m BWC Factor = 0.15 dB Location: 8.3, -4.2, 3.7 mm

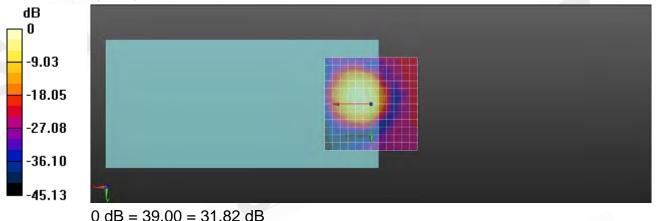

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Date: 2018/12/15

T-Coil-WCDMA Band II CH 9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 30.78 dB ABM1 comp = -16.06 dBA/mBWC Factor = 0.15 dB Location: 4.2, -8.3, 3.7 mm

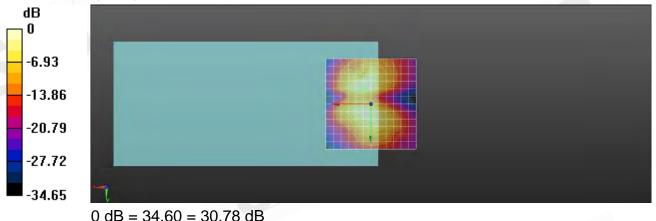

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. www.tw.sas.com

t (886-2) 2299-3279 台灣檢驗科技股份有限公司





General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) Loc: 4.6, -4.3, 3.7 mm Diff: 1.83dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488



T-Coil-WCDMA Band V CH 4183


Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k voice 1kHz 1s.wav ABM1/ABM2 = 23.10 dB ABM1 comp = -14.25 dBA/m BWC Factor = 0.16 dB Location: 0, -4.2, 3.7 mm

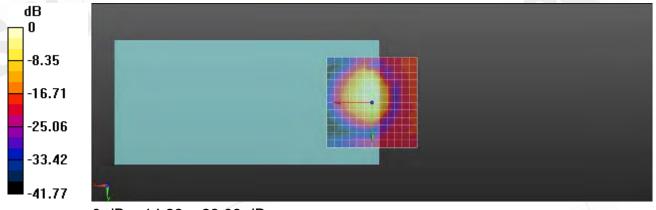

0 dB = 14.28 = 23.09 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

```
www.tw.sas.com
```



T-Coil-WCDMA Band V CH 4183


Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 26.43 dBABM1 comp = -17.57 dBA/m BWC Factor = 0.16 dB Location: 8.3, 0, 3.7 mm

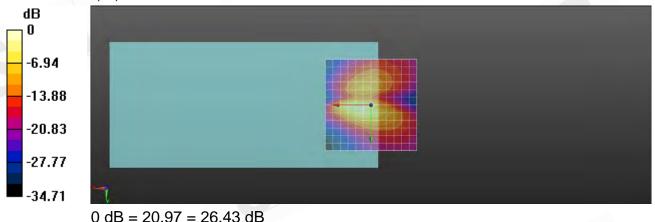


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

t (886-2) 2299-3279



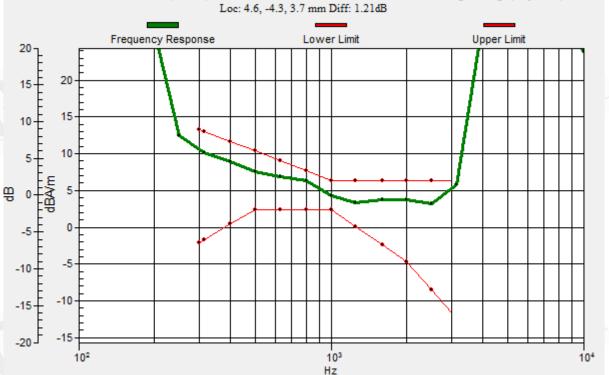

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) Loc: 4.6, -4.3, 3.7 mm Diff: 1.21dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



T-Coil-LTE Band 2 (20MHz) CH 18900 QPSK 1-0


Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 26.53 dB ABM1 comp = -9.40 dBA/mBWC Factor = 0.15 dB Location: 4.2, -4.2, 3.7 mm

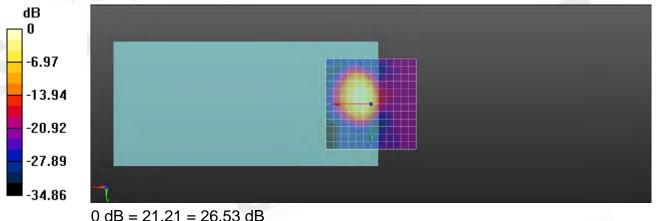

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



T-Coil-LTE Band 2 (20MHz) CH 18900 QPSK 1-0


Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 24.68 dBABM1 comp = -14.13 dBA/m BWC Factor = 0.15 dB Location: 8.3, 4.2, 3.7 mm

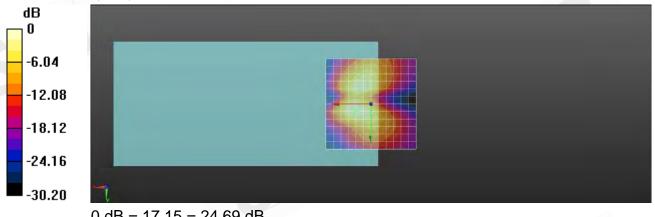

0 dB = 17.15 = 24.69 dB


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279



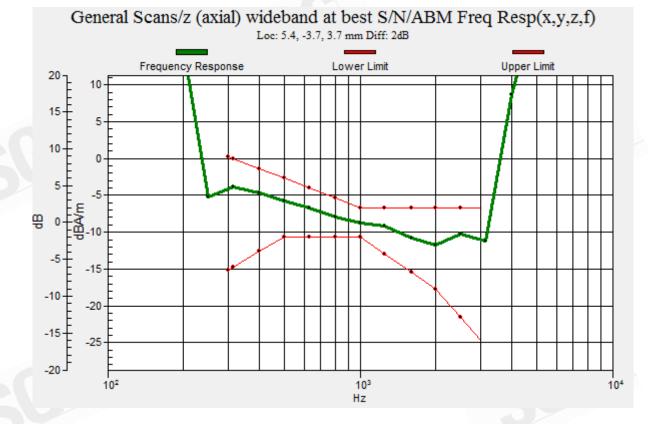

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



T-Coil-LTE Band 4 (20MHz) CH 20175 QPSK 1-0


Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k voice 1kHz 1s.wav ABM1/ABM2 = 27.47 dB ABM1 comp = -6.29 dBA/mBWC Factor = 0.15 dB Location: 8.3, -4.2, 3.7 mm

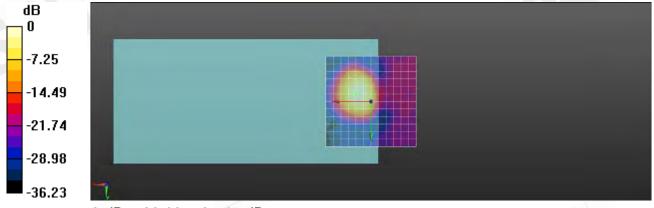

0 dB = 23.63 = 27.47 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279



T-Coil-LTE Band 4 (20MHz) CH 20175 QPSK 1-0


Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 25.44 dBABM1 comp = -14.67 dBA/m BWC Factor = 0.15 dB Location: 8.3, -8.3, 3.7 mm

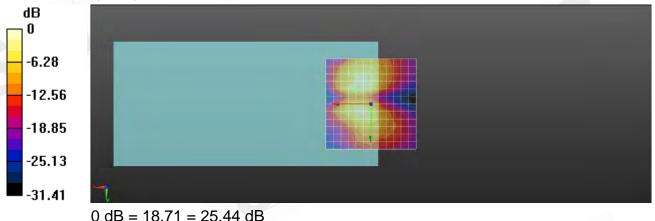

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



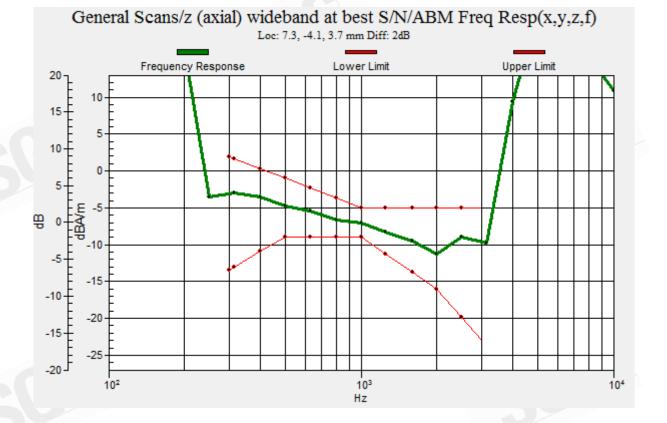

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



T-Coil-LTE Band 5 (10MHz) CH 20525 QPSK 1-0


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 27.69 dBABM1 comp = -6.22 dBA/m BWC Factor = 0.15 dB Location: 8.3, -4.2, 3.7 mm

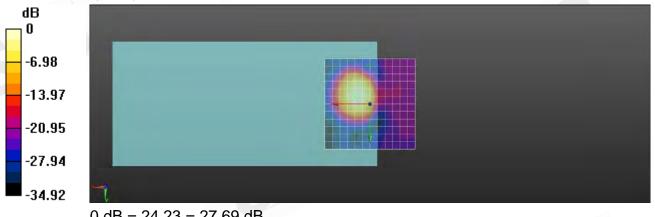

0 dB = 24.23 = 27.69 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



T-Coil-LTE Band 5 (10MHz) CH 20525 QPSK 1-0


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 25.67 dBABM1 comp = -14.92 dBA/m BWC Factor = 0.15 dB Location: 8.3, -8.3, 3.7 mm

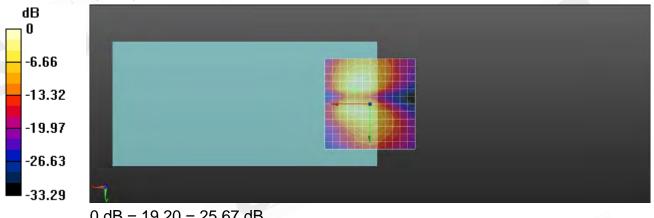

0 dB = 19.20 = 25.67 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279

```
Member of SGS Group
```



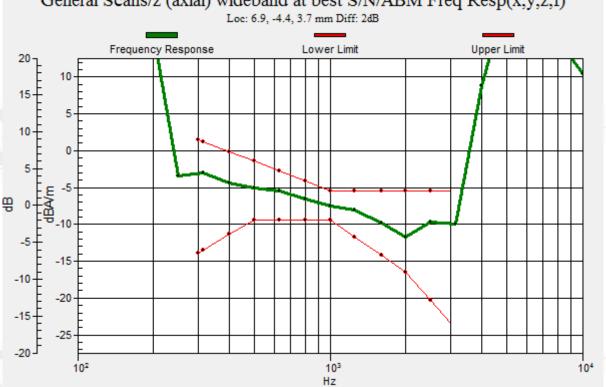

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279 www.tw.sas.com

f (886-2) 2298-0488



T-Coil-LTE Band 13 (10MHz) CH 23230 QPSK 1-0


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 26.80 dBABM1 comp = -6.31 dBA/m BWC Factor = 0.15 dB Location: 8.3, -4.2, 3.7 mm

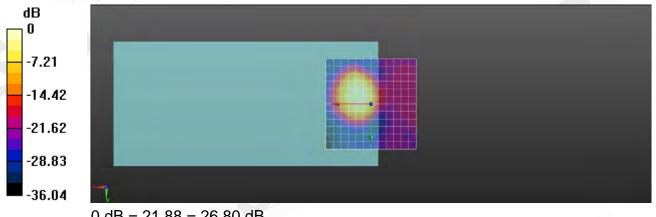

0 dB = 21.88 = 26.80 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



T-Coil-LTE Band 13 (10MHz) CH 23230 QPSK 1-0


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 26.40 dBABM1 comp = -16.82 dBA/m BWC Factor = 0.15 dB Location: 4.2, -12.5, 3.7 mm

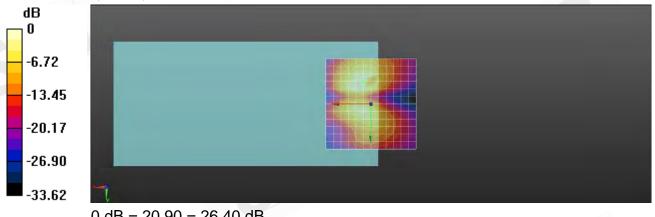

0 dB = 20.90 = 26.40 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



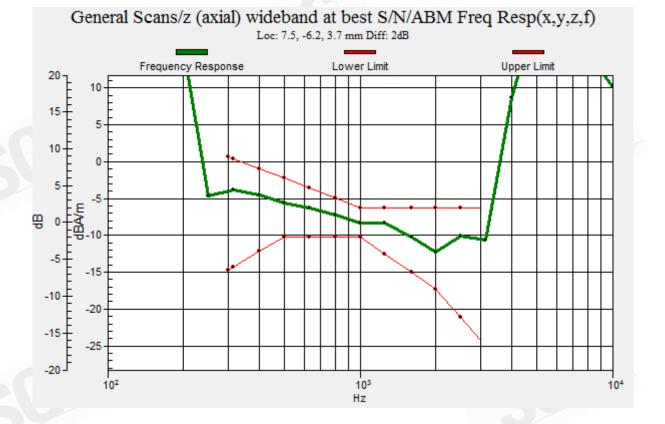

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



T-Coil-LTE Band 66 (20MHz) CH 132322 QPSK 1-0


Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 27.84 dB ABM1 comp = -6.18 dBA/m BWC Factor = 0.15 dB Location: 8.3, -4.2, 3.7 mm

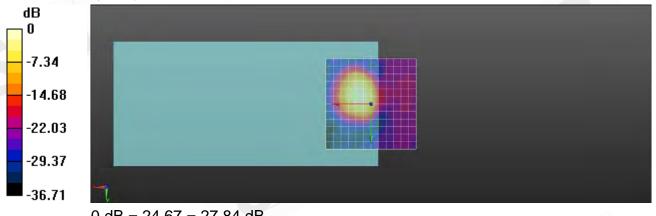

0 dB = 24.67 = 27.84 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



T-Coil-LTE Band 66 (20MHz) CH 132322 QPSK 1-0


Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 24.73 dB ABM1 comp = -16.87 dBA/m BWC Factor = 0.15 dB Location: 4.2, -12.5, 3.7 mm

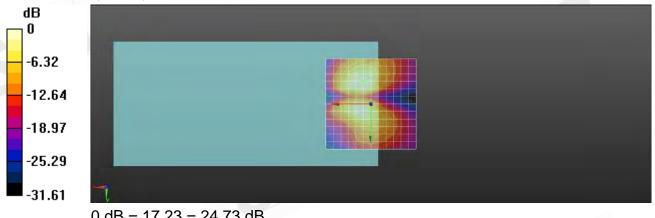

0 dB = 17.23 = 24.73 dB


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279



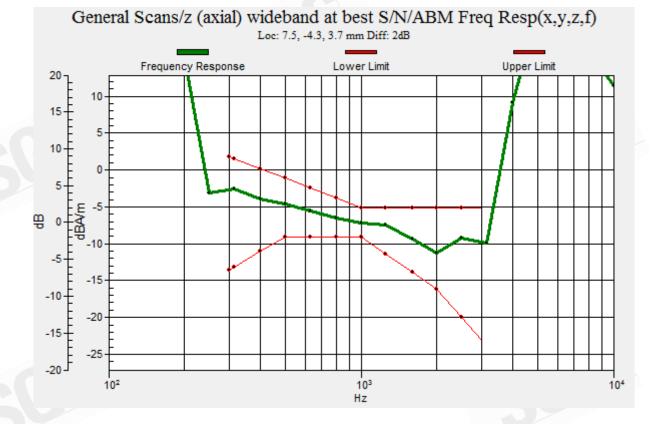

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



T-Coil-WLAN 802.11b_CH 6


Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 26.45 dBABM1 comp = -13.75 dBA/m BWC Factor = 0.16 dB Location: 4.2, -8.3, 3.7 mm

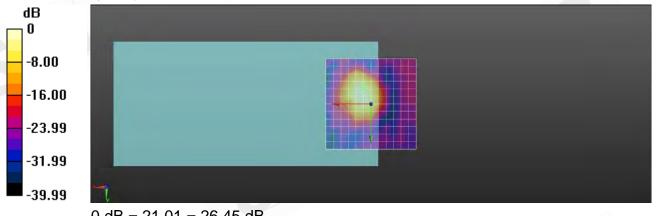

0 dB = 21.01 = 26.45 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```



T-Coil-WLAN 802.11b_CH 6


Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 3115; ; Calibrated: 2018/8/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/8/6
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm ABM1/ABM2 = 25.12 dBABM1 comp = -16.92 dBA/mBWC Factor = 0.15 dB Location: 4.2, -12.5, 3.7 mm

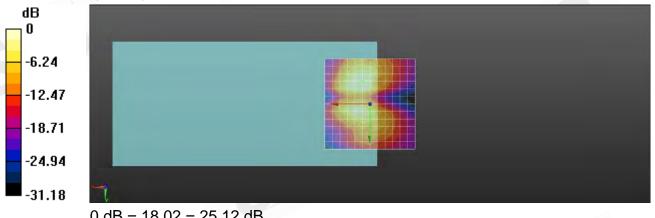


0 dB = 18.02 = 25.12 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sas.com

t (886-2) 2299-3279







General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



Report No. : E5/2018/C0011 Page: 59 of 67

19. DAE & Probe Calibration Certificate

According by the Swiss According The Swiss Accorditation Service Sulfilateral Agreement for the n	e is one of the signatories	to the EA	Servizio svizzero di taratura Swiss Calibration Service n No.: SCS 0108	
Silent SGS-TW (Aude			o: DAE4-1336_Aug18	
CALIBRATION C	CERTIFICATE			1
Otject	DAE4 - SD 000 D	04 BM - SN: 1336		
Calibration procedure(s)	OA CAL-06.v29 Calibration proces	dure for the data acquisition elec	ctronics (DAE)	
Calibration date:	August 06, 2018			0
		nal standards, which realize the prysical un obability are given on the following pages ar		5
The measurements and the unce All calibrations have been conclu- Calibration Equipment used (Mile	etainties with confidence pro clock in the closed laboratory TE ortical for calibration)	obability are given on the following pages ar (lacility: environment temperature (22 \pm 3)*	nd are part of the certificate C and numidity < 70%.	
The measurements and the unce All calibrations have been condu- Calibration Equipment used (Mic Primary Standards	ertainties with confidence pri cted in the closed laboratory	obability are given on the following pages ar	nd are part of the certificate.	X
The measurements and the unce All calibrations have been conclu Calibration Equipment used (M& Primary Standards Kethley Multimeter Type 2001	etainties with confidence on ctod in the closed laboratory TE critical for calibration) ED 4 SN: 0810278	clability are given on the following pages ar (facility: servicement temperature (22 ± 3)* Cal Date (Centificate No.) 31-Aug-17 (No:21062)	nd are part of the certificate. C and humidity < 70%. Scheduled Calibration Aug-18	
The measurements and the unce All culturations have been condu	In the closed laboratory TE ortical for calibration) ED # SN: 0810278 ED # SE UWS 053 AA 1001	obability are given on the following pages ar facility; servicement temperature (22 ± 3)* Cal Date (Certificate No.)	nd are part of the certificate. G and numidity < 70%. Scheduled Califoration	
The measurements and the unce All calibrations have been condu- Calibration Equipment used (Mis Primary Standards Kerthley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit	etainties with confidence on cted in the closed laborator) TE offical for calibration) D 4 SN: 0810278 D 4 SE UWIS 053 AA 1007 SE UWIS 006 AA 1002	obability are given on the following pages ar (laciily: sinvironment temperature (22 ± 3)* Cal Date (CentRoate No.) 31-Aug-17 (No:21082) Check Data (in house) 04-Jan-18 (in house check) (04-Jan-18 (in house check)	nd are part of the certificate. C and numidity < 70%. Scheduled Californiton Aug-18 Scheduled Check In house check: Jan-19 In house check: Jan-19	
The measurements and the unce All calibrations have been condu- Calibration Equipment used (Mis Primary Standards Kerthley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit	In the closed laboratory TE ortical for calibration) ED # SN: 0810278 ED # SE UWS 053 AA 1001	clability are given on the following pages ar facility: environment temperature (22 ± 3)* Cal Date (Centilicate No.) 31-Aug-17 (No.21082) Check Date (in house) 04-Jan-18 (in house check)	nd are part of the certificate. C and numidity < 70%. Screeduled Calibration Aug-18 Scheduled Check In house check: Jan-19	
The measurements and the unce All calibrations have been conclu- Calibration Equipment used (M& <u>Primary Standards</u> Kethley Multimeter Type 2001 Secondary Standards Auto DAE Calibraton Unit Calibrator Box V2:1	Intervention of the second sec	clability are given on the following pages ar (lacility: servicement temperature (22 ± 3)* Cal Date (CentReate No.) 31-Aug-17 (No.21002) Check Date (in house) 04-Jan-18 (in house check) 04-Jan-18 (in house check) 04-Jan-18 (in house check)	nd are part of the certificate. C and numidity < 70%. Scheduled Californiton Aug-18 Scheduled Check In house check: Jan-19 In house check: Jan-19	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sgs.com
```



Report No. : E5/2018/C0011 Page: 60 of 67

Calibration Laboratory of Schmid & Partner Engineering AG sstrasse 43, 5004 Zurich, Switzerland Zeugh

Accredited by the Swiss Accreditation Service (SAS)



Schweizerischer Kellbrierdienet Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

C

S

Accordination No.: SCS 0108



DAE Connector angle

data acquisition electronics information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters.

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certification

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle. The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity. Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1336 Aug18

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

```
www.tw.sas.com
```



DC Voltage Measurement

A/D - Converter Resolution nominal High Range: 1LSB -

 High Range:
 1LSB =
 6.1µV
 full range =
 -100...+900 mV

 Low Range:
 1LSB =
 61nV
 full range =
 -1.....+3mV

 DASY measurement parameters; Auto Zero Time: 3 sec; Measuring time: 3 sec
 5 sec
 -1......+3mV

Calibration Factors	X	¥.	Z
High Range	403.344 ± 0.02% (k=2)	403.624 ± 0.02% (k=2)	403.107 ± 0.02% (k=2)
Low Range	3.95102 ± 1.50% (k=2)	3,98703 ± 1,50% (k=2)	3.99683 ± 1.50% (k=2)

Connector Angle

0.0 = 1.0
ļ







Certilicate No: DAE4-1336_Aug16

Page 3 of 5


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sgs.com





Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200042.98	8.65	0.00
Channel X + Input	20006.34	1.71	0.01
Channel X - Input	-20005.65	-0.58	0.00
Channel Y + Input	200034.32	0.12	0.00
Channel Y + Input	20003.47	-1:57	0.01
Channel Y - Input	20008.39	-1.21	0.01
Channel Z + Input	200032.22	-2.05	-0.00
Channel Z + Input	20002.78	-2.14	-0.01
Channel Z - Input	-20007.34	-2.09	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Inpul	2001.47	0.30	0,01
Channel X + Input	201.92	0.79	0.39
Channel X - Input	-198.26	0.59	-0.30
Channel Y + Input	2001.55	0.37	0.02
Channel Y + Input	200.97	-0.11	-0.05
Channel Y - Input	-199.34	-0.43	0.22
Channel Z + Input	2001.12	0.04	0.00
Channel Z + Input	200.15	-0.89	-0.44
Channel Z - Input	-200.14	1.15	0.58

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec. Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	B:04	4.72
1.00	- 200	4.13	-4.79
Channel Y	200	-3.65	-3,78
	200	2.68	2.45
Channel Z	200	22.40	22.16
	- 200	-24.83	-25.10

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	+1	6.12	+1,64
Channel Y	200	9.19		6.46
Channel Z	200	8.44	6.31	

Certificate No: DAE4-1336_Aug18

Page 4 of 5




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15666	16509
Channel Y	15907	15587
Channel Z	15855	15507

Input Offset Measurement 5

DASY measurement parameters: Auto Zero Time: 3 sec: Measuring time: 3 sec Input 10MQ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.87	-0.00	2.62	0.36
Channel Y	3.53	2.67	4.58	0.34
Channel Z	-0.18	-1.34	1.53	0.54

6. Input Offset Current

Nominal Input circuitry offset current on all channels <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

Low Battery Alarm Voltage (Typical values for information) 8.

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	47.9	
Supply (- Vcc)	-7.6	

Power Concumption (Tunical values for information) 0

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	36	+14
Supply (- Vcc)	-0.01	В	-9



Certificate No: DAE4-1936_Aug18

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sas.com



Report No. : E5/2018/C0011 Page: 64 of 67

chmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich,	of Switzerland		Schweizerischer Kalibrierdienst Service suïsse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service
accredited by the Swiss Accreditation the Swiss Accreditation Service is Autiliateral Agreement for the reco	s one of the signato	ories to the EA	editation No.: SCS 0108
lient SGS-TW (Auden)	Cartificate No:	AM1DV3-3115_Mar18
CALIBRATION CI	ERTIFICA	TE	
Object	AM1DV3 - SN	:3115	
Calibration procedure(s)	OA CAL-24.v4 Calibration pro audio range	ocedure for AM1D magnetic field prob	es and TMFS in the
Calibration date:	March 15, 201	8	and the second se
The measurements and the uncerta	ainties with confidence	national standards, which realize the physical units to probability are given on the following pages and story facility: environment temperature $(22\pm3)^{\circ}C$	are part of the certificate.
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE	ainties with confidence of in the closed labor oritical for calibration	to probability are given on the following pages and atom facility: environment temperature $(22\pm3)^{\circ}C$ in	are part of the certificate. and humidity < 70%.
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001	ainties with confidence	te probability are given on the following pages and ratory facility: environment temperature (22 ± 3)°C in n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3	ainties with confidence of in the closed labor orthical for calibration ID # SN: 0810278	te probability are given on the following pages and ratory facility: environment temperature (22 ± 3)°C (n) Gal Date (Certificate No.)	are part of the certificate. and humidity < 70%.
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4	d in the closed labor ortical for calibration ID # SN: 0610278 SN: 3000	te probability are given on the following pages and ratory facility: environment temperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. AM1DV3-3000_Aug17)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Aug-18
The measurements and the uncerta	ainties with confidence of in the closed labor critical for calibration ID # SN: 0610278 SN: 0610278 SN: 3000 SN: 781	te probability are given on the following pages and ratory facility: environment (emperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. AM10V3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Aug-18 Jan-19
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4 Secondary Standards AMCC	In the closed labor ortical for calibration SN: 0610278 SN: 0610278 SN: 9000 SN: 761	te probability are given on the following pages and rationy facility: environment temperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. AM1DV3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18) Check Date (in house) 01-Oct-19 (in house check Oct-17)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Jan-19 Scheduled Check Oct-19
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4. Secondary Standards AMOC AMMI Audio Measuring Instrument	Antices with confidence ornical for calibration ornical for calibration ID # SN: 0610278 SN: 0610278 SN: 3000 SN: 781 ID # SN: 1050 SN: 1062 Name	te probability are given on the following pages and ratory facility: environment femperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. 21092) 24-Aug-17 (No. AM1DV3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18) Check Date (in house) 01-Oct-19 (in house check Oct-17) 26-Sep-12 (in house check Oct-17) Eurotion	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Jan-19 Scheduled Check Oct-19
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4 Secondary Standards AMCC	In the closed labor oritical for calibration ID # SN: 0610278 SN: 3000 SN: 781 ID # SN: 1050 SN: 1062	te probability are given on the following pages and ratory facility: environment temperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. AM1DV3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18) Check Date (m house) 01-Oct-19 (in house check Oct-17) 26-Sep-12 (in house check Oct-17)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Aug-18 Jan-19 Scheduled Check Oct-19 Oct-19
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4. Secondary Standards AMOC AMMI Audio Measuring Instrument	Antices with confidence ornical for calibration ornical for calibration ID # SN: 0610278 SN: 0610278 SN: 3000 SN: 781 ID # SN: 1050 SN: 1062 Name	te probability are given on the following pages and ratory facility: environment femperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. 21092) 24-Aug-17 (No. AM1DV3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18) Check Date (in house) 01-Oct-19 (in house check Oct-17) 26-Sep-12 (in house check Oct-17) Eurotion	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Aug-18 Jan-19 Scheduled Check Oct-19 Oct-19
The measurements and the uncerta All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards Keithley Multimeter Type 2001 Reference Probe AM1DV3 DAE4. Secondary Standards AMCC AMMI Audio Measuring Instrument Calibrated by:	Anties with confidence oritical for calibration ID # SN: 0610278 SN: 3000 SN: 781 ID # SN: 1050 SN: 1052 SN: 1062	Exprobability are given on the following pages and ratory facility: environment temperature (22 ± 3)°C i n) Cal Date (Certificate No.) 31-Aug-17 (No. 21092) 24-Aug-17 (No. 24092) 24-Aug-17 (No. AM1DV3-3000_Aug17) 17-Jan-18 (No. DAE4-781_Jan18) Check Date (m house) 01-Oct-19 (in house check Oct-17) 26-Sep-12 (in house check Oct-17) 26-Sep-12 (in house check Oct-17) 26-Sep-12 (in house check Oct-17)	are part of the certificate. and humidity < 70%. Scheduled Calibration Aug-18 Aug-18 Jan-19 Scheduled Check Oct-19 Oct-19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Company's sole except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 t (886-2) 2299-3279

f (886-2) 2298-0488

```
www.tw.sgs.com
```



References

- ANSI-C63.19-2007 [1]
- American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids. [2] ANSI-C63.19-2011
- American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a till angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below. The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- Coordinate System: The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- Functional Test: The functional test preceding calibration includes test of Noise level

RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.

- Connector Rotation: The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coll.
- Sensor Angle: The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.

Sensitivity: With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

Certificate No: AM1DV3-3115_Mar18

Page 2 of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



AM1D probe identification and configuration data


ltem	AM1DV3 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BB
Serial No	3115

Overall length	296 mm	
Tip diameter	6.0 mm (at the tip)	
Sensor offset	3.0 mm (centre of sensor from tip)	
Internal Amplifier	20 dB	

Manufacturer / Origin	Schmid & Partner Engineering AG, Zurich, Switzerland
Manufacturing date	November 15, 2011

Calibration data

Connector rotation angle	(in DASY system)	263.0°	+/+ 3.6 ^{//} (k=2)	
Sensor angle	(in DASY system)	0.32 *	+/- 0.5 ° (k=2)	
Sensitivity at 1 kHz	(in DASY system)	0.00791 V / (A/m)	+/- 2.2 % (k=2)	



Certificate No: AM1DV3-3115_Mar18

Page 3 of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

```
www.tw.sas.com
```



20. Uncertainty Budget

Error Description	Unc. Value	Prob. Dist.	Div.	$\binom{(c_i)}{\text{ABM1}}$	$\begin{pmatrix} (c_i) \\ ABM2 \end{pmatrix}$	Std. Unc. ABM1	Std. Unc. ABM2
Probe Sensitivity			122	1.1	1		
Reference Level	$\pm 3.0\%$	N	1	1	1	$\pm 3.0\%$	$\pm 3.0\%$
AMCC Geometry	$\pm 0.4\%$	R	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$
AMCC Current	±1.0%	R	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$
Probe Positioning during Calibr.	±0.1%	R	$\sqrt{3}$	1	1	$\pm 0.1,\%$	$\pm 0.1\%$
Noise Contribution	±0.7%	R	$\sqrt{3}$	0.0143	1	±0.0%	±0.4%
Frequency Slope	$\pm 5.9\%$	R	$\sqrt{3}$	0.1	1.0	$\pm 0.3\%$	$\pm 3.5\%$
Probe System		1	1000		1		
Repeatability / Drift	±1.0%	R	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$
Linearity / Dynamic Range	±0.6%	R	$\sqrt{3}$	1	1	$\pm 0.4\%$	$\pm 0.4\%$
Acoustic Noise	±1.0%	R	$\sqrt{3}$	0.1	1	±0.1%	±0.6%
Probe Angle	$\pm 2.3\%$	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Spectral Processing	±0.9%	R	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5\%$
Integration Time	$\pm 0.6\%$	N	1	1	5	$\pm 0.6\%$	$\pm 3.0\%$
Field Disturbation	$\pm 0.2\%$	R	$\sqrt{3}$	1	1	$\pm 0.1\%$	±0.1%
Test Signal	1						
Ref. Signal Spectral Response	$\pm 0.6\%$	R	$\sqrt{3}$	0	1	±0.0%	$\pm 0.4\%$
Positioning							
Probe Positioning	$\pm 1.9\%$	R	$\sqrt{3}$	1	1	±1.1%	±1.1%
Phantom Thickness	$\pm 0.9\%$	R	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$
DUT Positioning	$\pm 1.9\%$	R	$\sqrt{3}$	1	1	±1.1%	±1.1%
External Contributions	1	1.1	12.2		1	E	
RF Interference	±0.0%	R	$\sqrt{3}$	1	0.3	±0.0%	±0.0%
Test Signal Variation	$\pm 2.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$
Combined Uncertainty	1						
Combined Std. Uncertainty (ABM	4 Field)	Automatica S	-	1.000	,) i	$\pm 4.1\%$	$\pm 6.1\%$
Expanded Std. Uncertainty						$\pm 8.1 \%$	±12.39

End of report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com