



TEST REPORT

No. I19Z62100-EMC01

TCL Communication Ltd.

GSM/UMTS/LTE Mobile phone

Model Name: 5002M

FCC ID: 2ACCJH118

with

Hardware Version: PIO

Software Version: v3C77

Issued Date: 2019-12-25

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z62100-EMC01	Rev.0	1 st edition	2019-12-25

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
ANNEX B: PERSONS INVOLVED IN THIS TESTING	29

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-11-19
Testing End Date: 2019-12-05

1.5. Signature




Li Yan

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: /
Postal Code: /
Country: /
Contact: Gong Zhizhou
Email: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: /
Postal Code: /
Country: /
Contact: Gong Zhizhou
Email: zhizhou.gong@tcl.com
Telephone: 0086-755-36611722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE Mobile phone
Model Name	5002M
FCC ID	2ACCJH118
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT5	/	/	/
EUT6	353355110000040	PIO	v3C77

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Battery	/	/
AE3	Charger	/	/
AE4	Charger	/	/
AE5	USB cable	/	/
AE6	USB cable	/	/
AE7	Headset	/	/
AE8	Headset	/	/
AE9	Headset	/	No test
AE10	Headset	/	No test

AE1

Model	CAB2880001C1,
Manufacturer	BYD
Capacitance	3000mAh
Nominal voltage	/

AE2

Model	CAB2880000C7
Manufacturer	VK
Capacitance	3000mAh
Nominal voltage	/

AE3

Model	CBA0058AGAC5
Manufacturer	PUAN
Length of cable	/

AE4	
Model	CBA0058AGAC7
Manufacturer	CHENYANG
Length of cable	/
AE5	
Model	CDA3122005C8
Manufacturer	PUAN
Length of cable	/
AE6	
Model	CDA3122005C1
Manufacturer	JUWEI
Length of cable	/
AE7	
Model	CCB0046A10C4
Manufacturer	Meihao
Length of cable	/
AE8	
Model	CCB0046A10C1
Manufacturer	Juwei
Length of cable	/
AE9	
Model	CCB0049A10C1
Manufacturer	Juwei
Length of cable	/
AE10	
Model	CCB0049A10C4
Manufacturer	Meihao
Length of cable	/

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT5+ AE1/AE2 +AE3+ AE5/AE6	Charger+ MP3+GPS
Set.2	EUT5+ AE1/AE2 +AE4+ AE5/AE6	Charger+CAMERA
Set.3	EUT5+ AE1/AE2 +AE5/AE6+AE7/AE8	USB mode+ FM
Set.4	EUT6+ AE1/AE2 +AE5/AE6	USB mode +CAMERA

Note: 5002M is a variant model based on 5002A, According to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01; the following items are tested on Set.4.

Mode or Feature	EUT set-up No	Test Item
USB mode +CAMERA	Set.4	Radiated Emission

Other results share the initial model. The report number for initial model is I19Z62042-EMC01 (FCC ID: 2ACCJH118).

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17 meters×10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(BDA)
2	Conducted Emission	15.107(a)	A.2	BR	CTTL(BDA)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2020-10-30	1 year
2	Test Receiver	ESCI	100766	R&S	2020-03-20	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2020-01-19	1 year
4	Universal Radio Communication Tester	CMW500	159408	R&S	2020-03-03	1 year
5	LISN	ENV216	101459	R&S	2020-04-10	1 year
6	EMI Antenna	VULB9163	9163-514	Schwarzbeck	2020-02-03	1 year
7	EMI Antenna	3117	00119021	ETS-Lindgren	2020-01-04	1 year
8	Signal Generator	SMF100A	101295	R&S	2020-11-06	1 year
9	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
10	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
11	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. During the charging mode (set.1) the EUT is keeping on playing MP3 and the GNSS application is started up. During the charging mode (set.2) the camera is keeping on taking photos. During the USB mode the FM application is started up. The model of the PC is Lenovo M4000e-17, and the serial number of the PC is M706RMW2. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.40dB, 1GHz-18GHz: 4.32dB, $k=2$.

Measurement results for Set.1:

Charging Mode+ MP3+GNSS /Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17985.500	39.0	-25.8	41.3	23.53	54.0	15.0	V
17978.000	38.8	-25.9	41.3	23.31	54.0	15.2	V
17976.000	38.7	-25.9	41.3	23.31	54.0	15.3	V
17982.000	38.7	-25.8	41.3	23.28	54.0	15.3	V
17969.500	38.7	-25.9	41.3	23.32	54.0	15.3	V
17966.500	38.7	-25.9	41.3	23.32	54.0	15.3	V

Charging Mode+ MP3+GNSS /Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17889.000	51.2	-26.2	41.3	36.14	74.0	22.8	H
17382.500	51.1	-26.5	41.3	36.35	74.0	22.9	H
17896.500	51.0	-26.2	41.3	35.90	74.0	23.0	H
17960.500	50.9	-25.9	41.3	35.55	74.0	23.1	V
17965.000	50.8	-25.9	41.3	35.38	74.0	23.2	V
17612.000	50.7	-26.5	41.2	35.90	74.0	23.3	V

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

Measurement results for Set.2:
Charging Mode+ CAMERA /Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17969.000	38.8	-25.9	41.3	23.43	54.0	15.2	H
17984.000	38.8	-25.8	41.3	23.31	54.0	15.2	V
17985.500	38.8	-25.8	41.3	23.29	54.0	15.2	V
17988.000	38.7	-25.8	41.3	23.26	54.0	15.3	V
17935.500	38.7	-26.0	41.3	23.45	54.0	15.3	V
17989.000	38.7	-25.8	41.3	23.23	54.0	15.3	V

Charging Mode+ CAMERA /Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17885.500	51.1	-26.2	41.3	36.09	74.0	22.9	V
17077.500	51.1	-26.2	41.6	35.68	74.0	22.9	V
17852.500	51.0	-26.4	41.3	36.14	74.0	23.0	H
17948.500	51.0	-26.0	41.3	35.67	74.0	23.0	V
17979.500	50.9	-25.8	41.3	35.45	74.0	23.1	H
17511.000	50.9	-26.3	41.2	36.01	74.0	23.1	H

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

Measurement results for Set.3:
USB Mode +FM /Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17979.000	38.85	-25.8	41.3	23.41	54.0	15.1	V
17980.500	38.84	-25.8	41.3	23.38	54.0	15.2	V
17938.500	38.82	-26.0	41.3	23.55	54.0	15.2	V
17988.500	38.80	-25.8	41.3	23.33	54.0	15.2	V
17988.000	38.80	-25.8	41.3	23.32	54.0	15.2	V
17970.500	38.80	-25.9	41.3	23.39	54.0	15.2	V

USB Mode +FM /Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
3584.000	51.94	-35.2	33.2	53.96	74.0	22.1	H
3590.000	51.85	-35.2	33.2	53.89	74.0	22.1	H
17108.500	51.14	-26.0	41.6	35.56	74.0	22.9	H
17908.000	51.13	-26.1	41.3	36.00	74.0	22.9	V
17953.000	50.91	-26.0	41.3	35.58	74.0	23.1	V
17966.500	50.86	-25.9	41.3	35.47	74.0	23.1	H

Note:

The measurement results showed here are worst cases of the combinations of different USB cables and different headsets.

Measurement results for Set.4:
USB Mode +CAMERA /Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17985.000	38.7	-25.8	41.3	23.21	54.0	15.3	V
17990.500	38.7	-25.8	41.3	23.19	54.0	15.3	V
17988.500	38.6	-25.8	41.3	23.09	54.0	15.4	H
17987.000	38.5	-25.8	41.3	23.03	54.0	15.5	V
17985.500	38.5	-25.8	41.3	23.03	54.0	15.5	H
17987.500	38.5	-25.8	41.3	23.02	54.0	15.5	H

USB Mode +FM /Peak detector


Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
3593.500	53.5	-35.3	33.2	55.54	74.0	20.5	H
17980.000	51.5	-25.8	41.3	36.04	74.0	22.5	V
3585.500	51.5	-35.2	33.2	53.49	74.0	22.5	H
17561.500	51.2	-26.4	41.2	36.44	74.0	22.8	V
17897.000	50.9	-26.2	41.3	35.79	74.0	23.1	H
3590.000	50.8	-35.2	33.2	52.85	74.0	23.2	H

Note:

The measurement results showed here are worst cases of the combinations of different USB cables and different headsets.

Charging Mode + MP3+GNSS, Set.1

15B RE 30MHz-1GHz

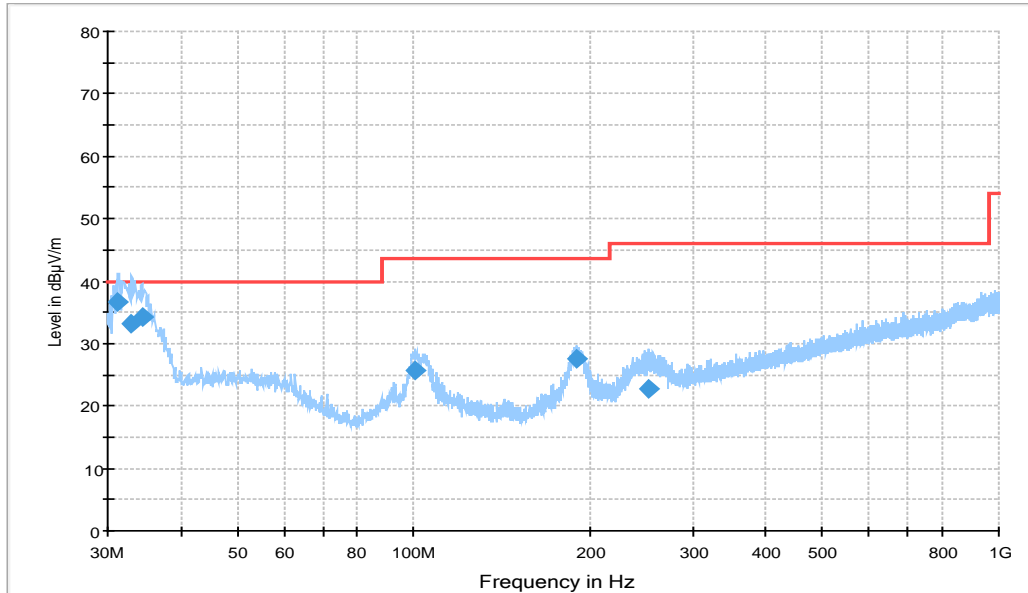

Note: the spike (98MHz) is coming from FM signal source.

Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.261000	36.6	100.0	V	124.0	-0.8	3.4	40.0
33.007000	33.1	100.0	V	55.0	-0.5	6.9	40.0
34.365000	34.2	100.0	V	135.0	-0.3	5.8	40.0
100.61600	25.6	100.0	V	211.0	-0.9	17.9	43.5
189.66200	27.5	100.0	H	203.0	-2.2	16.0	43.5
251.35400	22.8	125.0	H	69.0	0.4	23.2	46.0

15B RE - 1GHz-3GHz

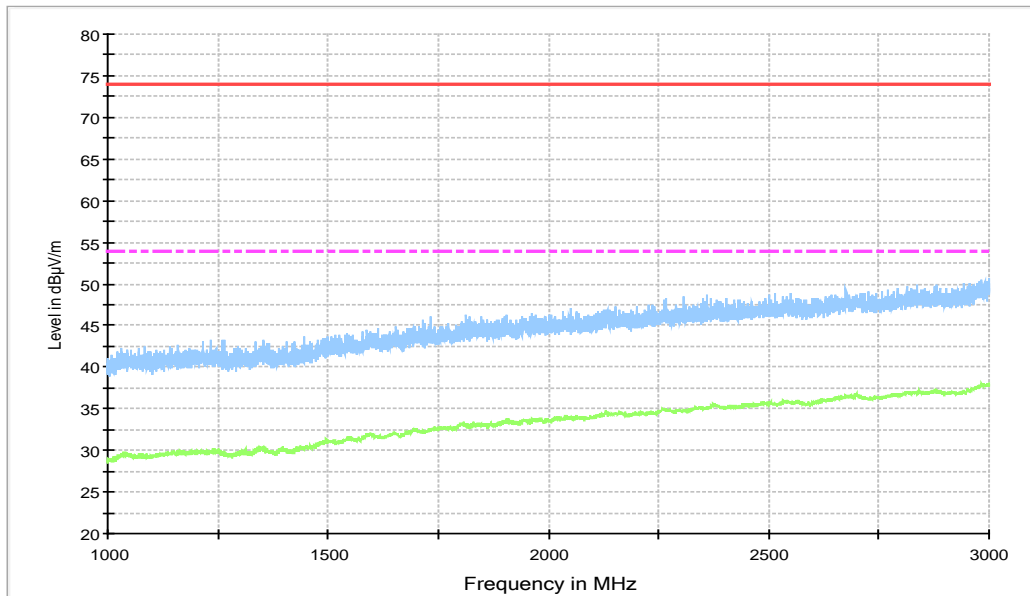


Figure A.2 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

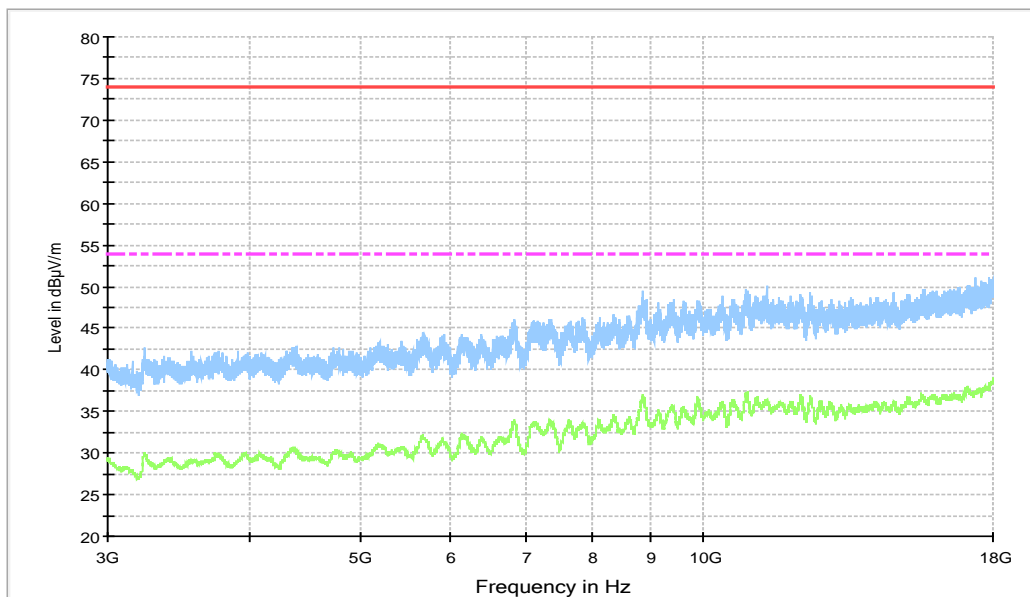


Figure A.3 Radiated Emission from 3GHz to 18GHz

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

Charging Mode+ CAMERA, Set.2

15B RE 30MHz-1GHz

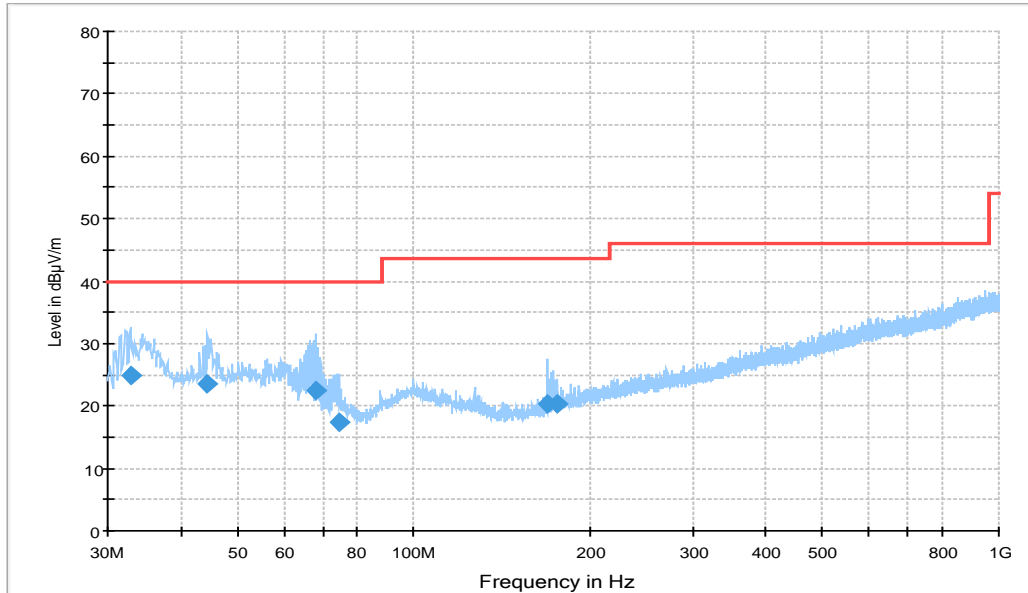


Figure A.4 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
32.813000	24.9	100.0	V	118.0	-0.5	15.1	40.0
44.453000	23.5	100.0	V	110.0	0.7	16.5	40.0
67.830000	22.4	100.0	V	-38.0	-3.4	17.6	40.0
74.523000	17.5	100.0	V	225.0	-5.0	22.5	40.0
169.58300	20.3	100.0	V	4.0	-3.3	23.2	43.5
175.98500	20.5	100.0	V	14.0	-3.0	23.0	43.5

15B RE - 1GHz-3GHz

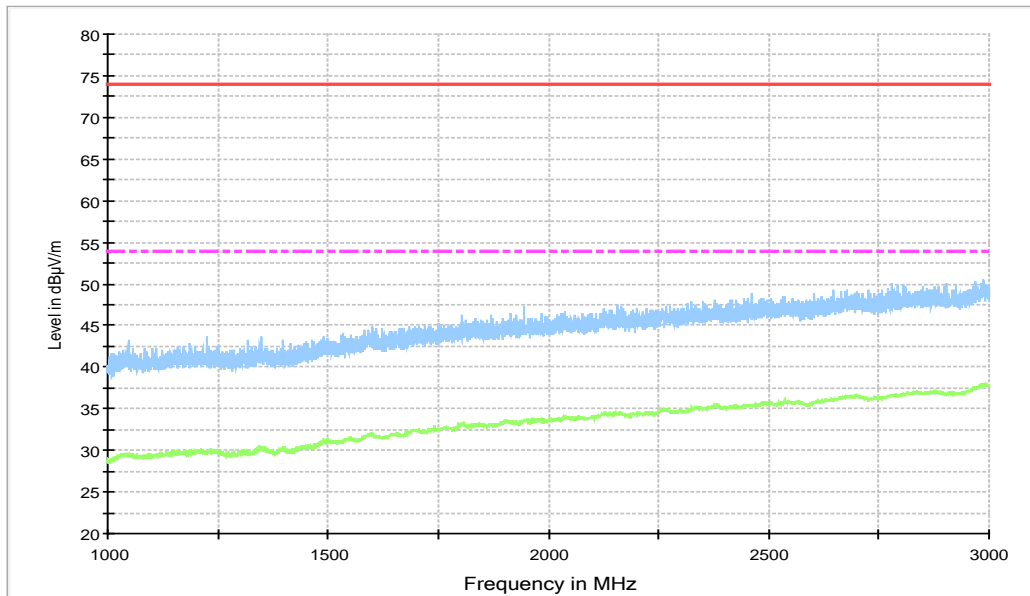


Figure A.5 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

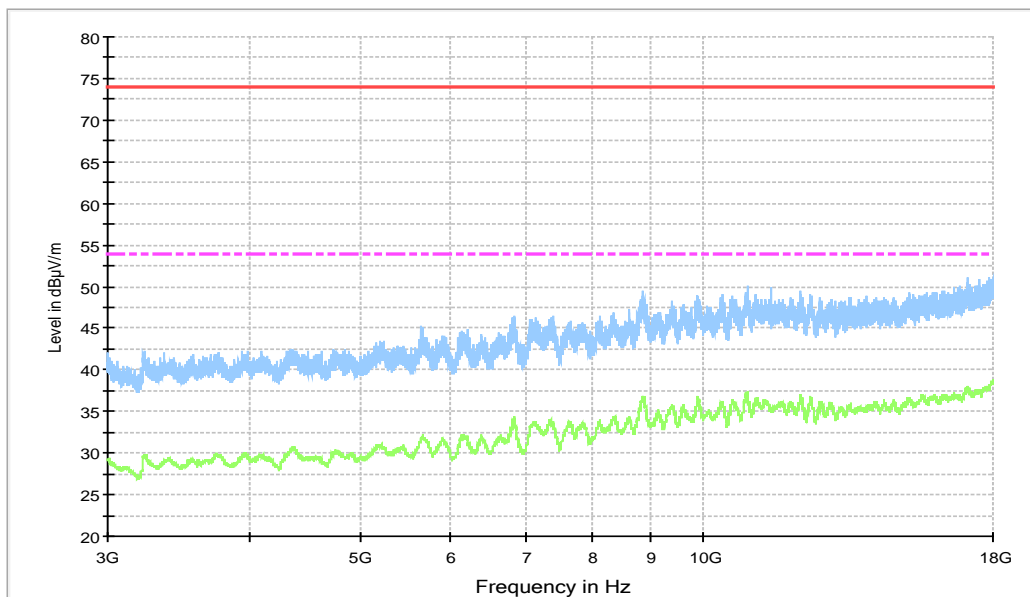


Figure A.6 Radiated Emission from 3GHz to 18GHz

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

USB Mode +FM, Set.3

15B RE 30MHz-1GHz

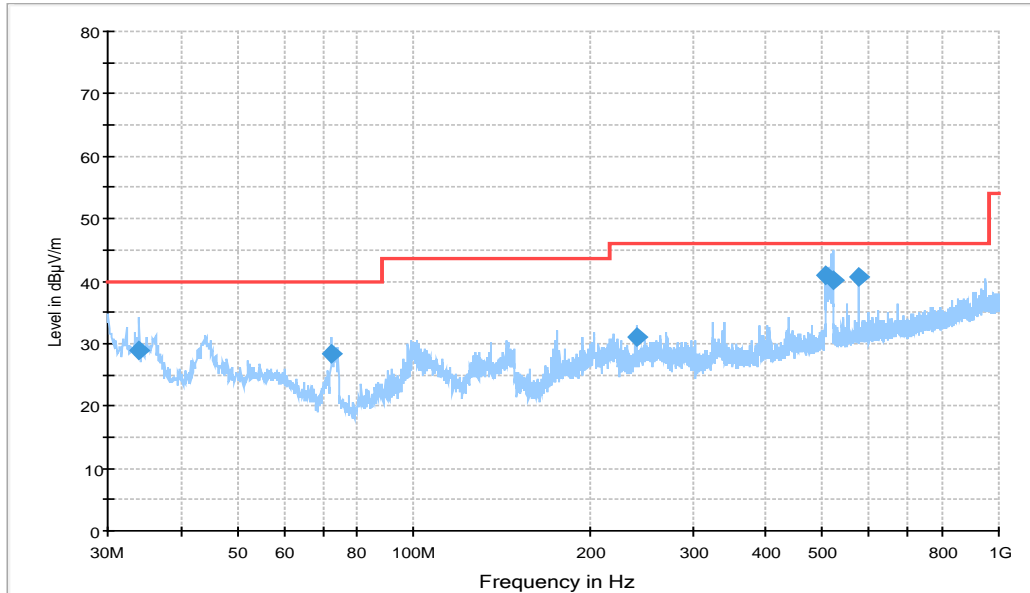


Figure A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
33.880000	29.0	100.0	V	301.0	-0.4	11.0	40.0
72.292000	28.4	100.0	V	-11.0	-4.7	11.6	40.0
240.00500	31.1	100.0	H	63.0	0.4	14.9	46.0
506.94900	41.0	100.0	V	-18.0	7.3	5.0	46.0
519.85000	40.2	100.0	V	0.0	7.5	5.8	46.0
576.01300	40.7	119.0	H	45.0	8.7	5.3	46.0

15B RE - 1GHz-3GHz

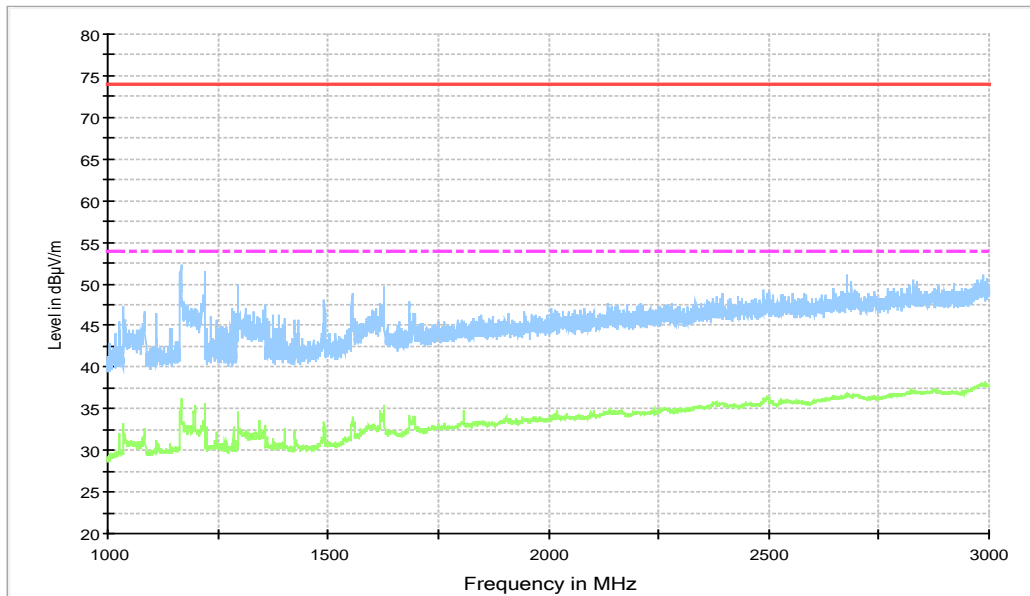


Figure A.8 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

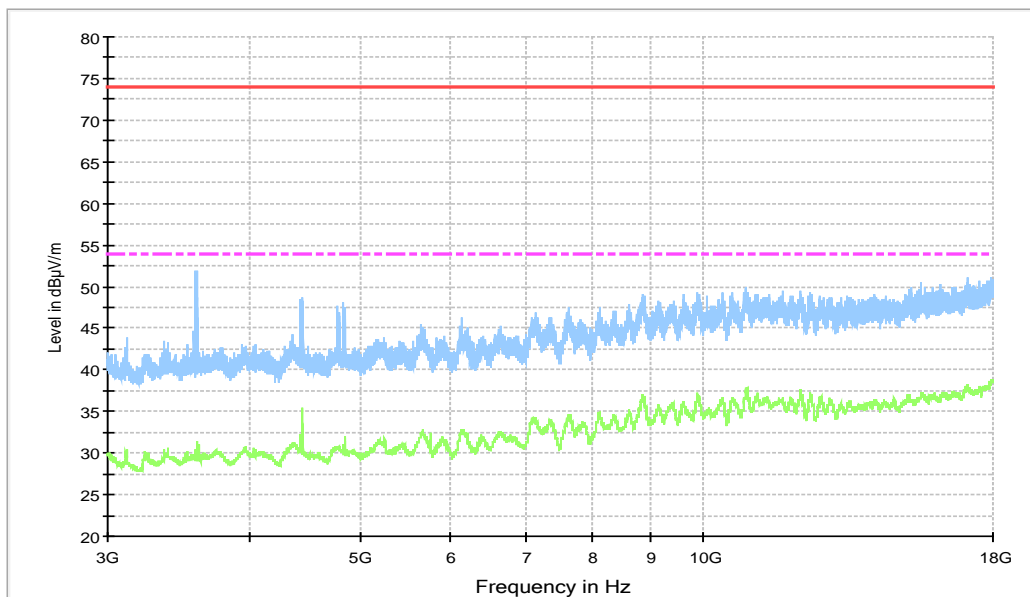


Figure A.9 Radiated Emission from 3GHz to 18GHz

Note: The measurement results showed here are worst cases of the combinations of different USB cables and different headsets.

USB Mode +CAMERA, Set.4

15B RE 30MHz-1GHz

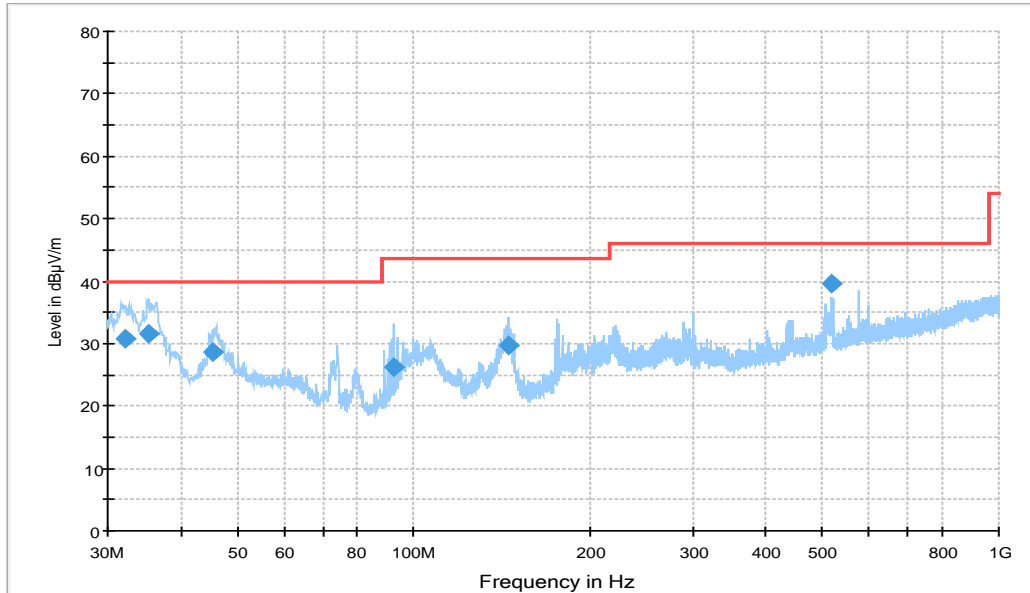


Figure A.10 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
32.037000	30.7	100.0	V	210.0	-0.7	9.3	40.0
35.238000	31.6	100.0	V	270.0	-0.1	8.4	40.0
45.326000	28.6	110.0	V	131.0	0.7	11.4	40.0
92.371000	26.1	125.0	H	270.0	-2.5	17.4	43.5
145.13900	29.7	125.0	H	277.0	-4.4	13.8	43.5
518.88000	39.5	125.0	V	-42.0	7.5	6.5	46.0

15B RE - 1GHz-3GHz

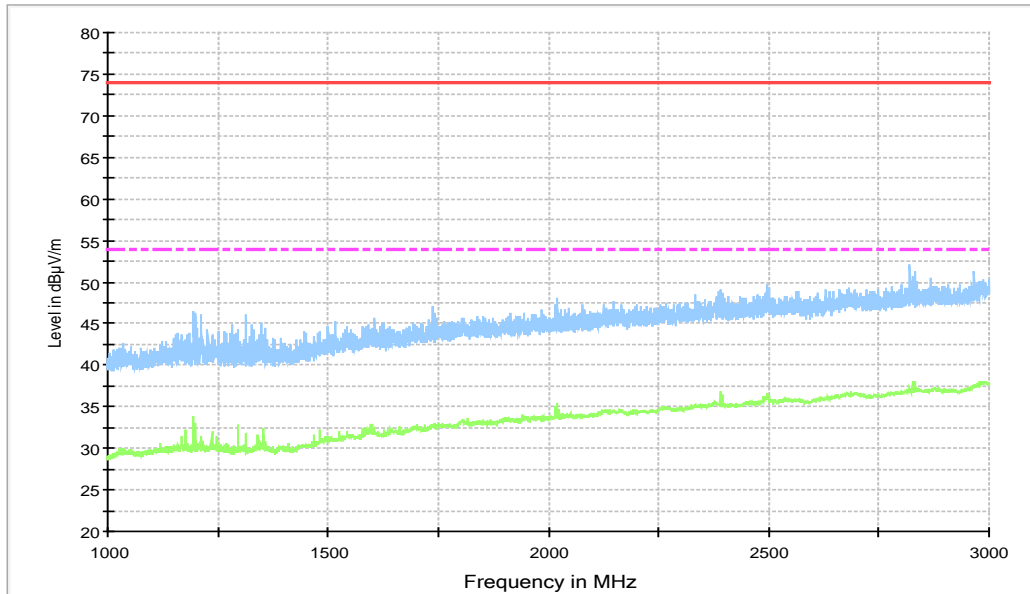


Figure A.11 Radiated Emission from 1GHz to 3GHz

15B RE - 1GHz-3GHz

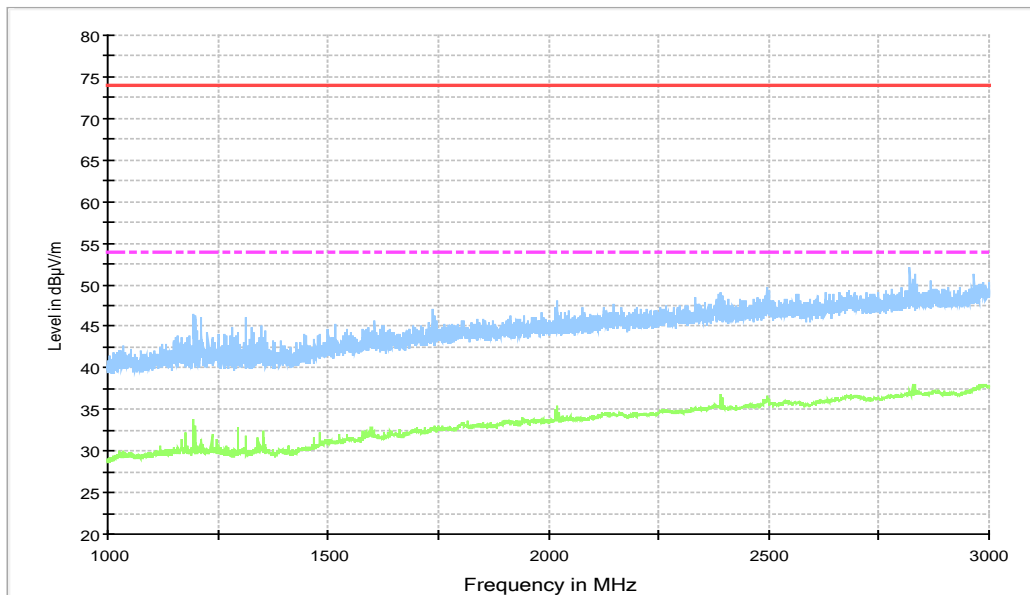


Figure A.12 Radiated Emission from 3GHz to 18GHz

Note: The measurement results showed here are worst cases of the combinations of different USB cables and different headsets.

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. During the charging mode (set.1) the EUT is keeping on playing MP3 and the GNSS application is started up. During the charging mode (set.2) the camera is keeping on taking photos. During the USB mode the FM application is started up. The model of the PC is Lenovo M4000e-17, and the serial number of the PC is M706RMW2. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.10$ dB, $k=2$.

Charging Mode +MP3+GNSS, Set.1

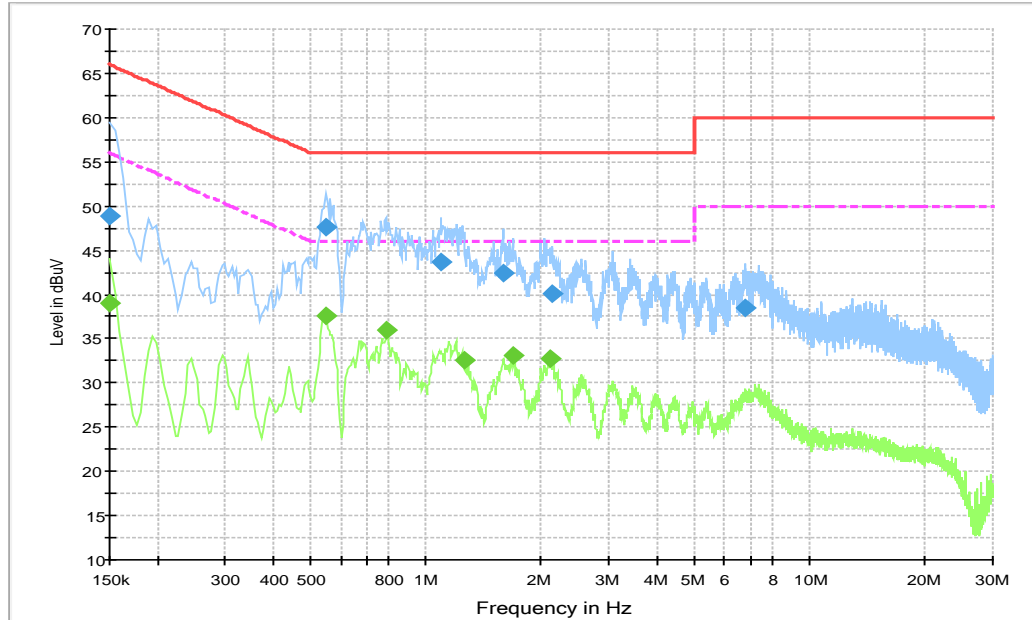


Figure A.13 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	48.9	10000.0	9.000	On	N	28.9	17.1	66.0
0.550500	47.6	10000.0	9.000	On	L1	20.0	8.4	56.0
1.095000	43.6	10000.0	9.000	On	L1	19.9	12.4	56.0
1.594500	42.4	10000.0	9.000	On	L1	19.8	13.6	56.0
2.125500	40.1	10000.0	9.000	On	L1	19.8	15.9	56.0
6.823500	38.4	10000.0	9.000	On	L1	19.9	21.6	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.0	10000.0	9.000	On	L1	28.9	17.0	56.0
0.550500	37.5	10000.0	9.000	On	L1	20.0	8.5	46.0
0.793500	36.0	10000.0	9.000	On	L1	19.9	10.0	46.0
1.257000	32.6	10000.0	9.000	On	L1	19.8	13.4	46.0
1.684500	33.1	10000.0	9.000	On	L1	19.8	12.9	46.0
2.098500	32.7	10000.0	9.000	On	L1	19.8	13.3	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

. Charging Mode + CAMERA, Set.2

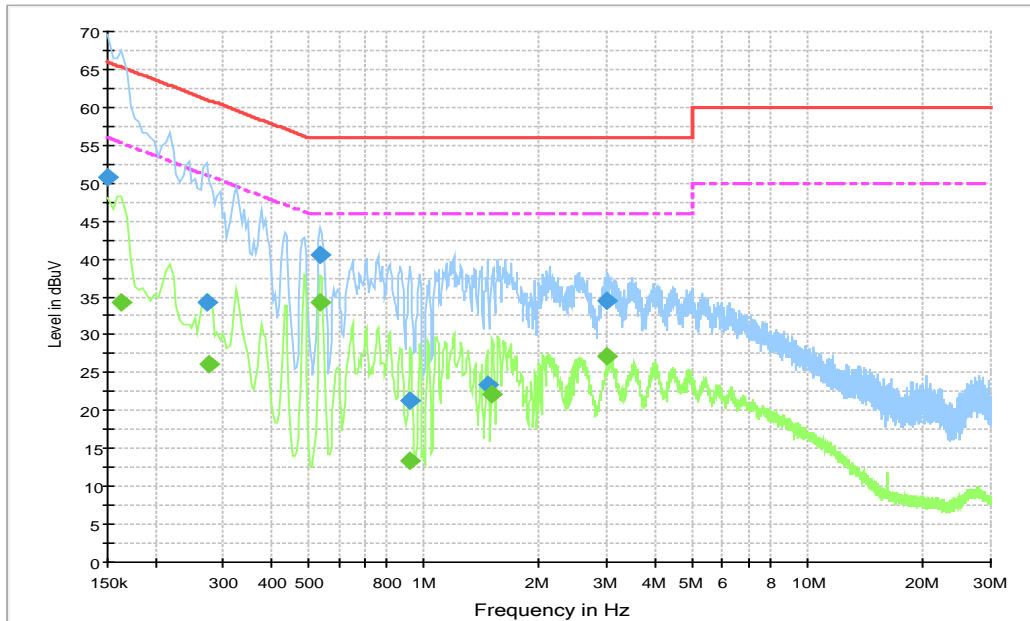


Figure A.14 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	50.8	10000.0	9.000	On	L1	28.9	15.2	66.0
0.271500	34.2	10000.0	9.000	On	N	19.9	26.8	61.1
0.537000	40.5	10000.0	9.000	On	L1	20.0	15.5	56.0
0.924000	21.3	10000.0	9.000	On	L1	19.9	34.7	56.0
1.464000	23.3	10000.0	9.000	On	L1	19.8	32.7	56.0
3.012000	34.5	10000.0	9.000	On	L1	19.8	21.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.163500	34.2	10000.0	9.000	On	L1	26.3	21.1	55.3
0.276000	26.2	10000.0	9.000	On	L1	20.0	24.7	50.9
0.537000	34.3	10000.0	9.000	On	L1	20.0	11.7	46.0
0.924000	13.4	10000.0	9.000	On	L1	19.9	32.6	46.0
1.509000	22.1	10000.0	9.000	On	L1	19.8	23.9	46.0
3.007500	27.2	10000.0	9.000	On	L1	19.8	18.8	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

.USB Mode +FM, Set.3

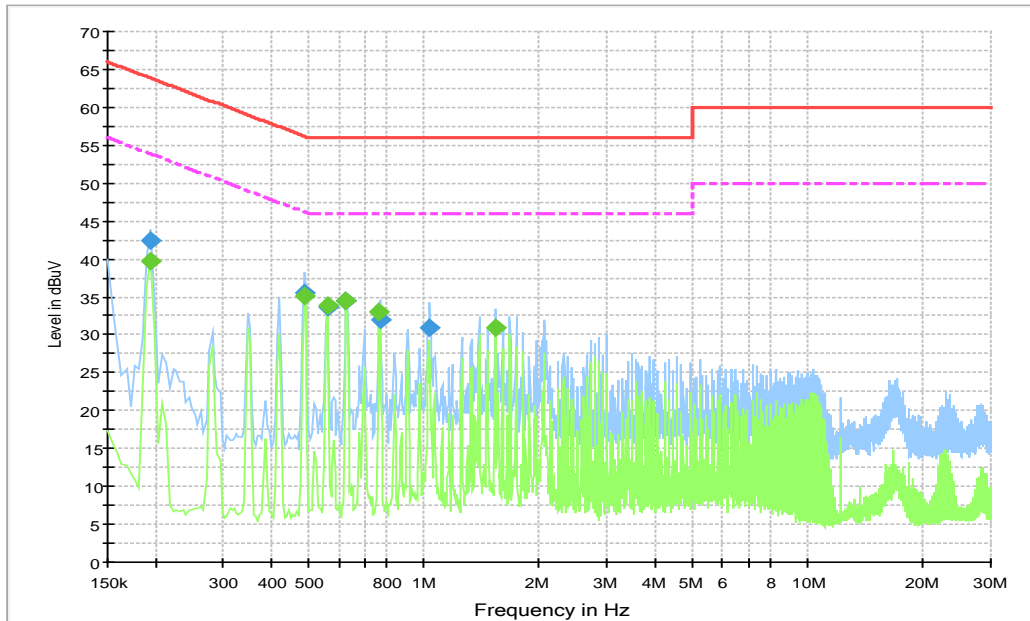


Figure A.15 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.195000	42.3	10000.0	9.000	On	L1	20.8	21.5	63.8
0.487500	35.6	10000.0	9.000	On	N	20.0	20.6	56.2
0.559500	33.6	10000.0	9.000	On	N	20.0	22.4	56.0
0.627000	34.5	10000.0	9.000	On	L1	20.0	21.5	56.0
0.771000	32.0	10000.0	9.000	On	N	19.9	24.0	56.0
1.036500	30.9	10000.0	9.000	On	N	19.9	25.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.195000	39.7	10000.0	9.000	On	L1	20.8	14.1	53.8
0.487500	35.0	10000.0	9.000	On	N	20.0	11.2	46.2
0.559500	33.8	10000.0	9.000	On	N	20.0	12.2	46.0
0.627000	34.5	10000.0	9.000	On	N	20.0	11.5	46.0
0.766500	33.1	10000.0	9.000	On	N	19.9	12.9	46.0
1.536000	31.0	10000.0	9.000	On	L1	19.8	15.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables and different headsets.



ANNEX B: Persons involved in this testing

Test Item	Tester
Radiated Emission	Zhao Wenhui
Conducted Emission	Guo Qian

*****END OF REPORT*****