



# FCC 15B TEST REPORT

## No. I20Z60553-EMC01

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE Mobile phone**

**Model Name: 5062W,5062Z**

**FCC ID: 2ACCJH122**

with

**Hardware Version: 06**

**Software Version: 2ASC**

**Issued Date: 2020-06-12**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I20Z60553-EMC01	Rev.0	1 <sup>st</sup> edition	2020-06-05
I20Z60553-EMC01	Rev.1	2 <sup>ND</sup> edition	2020-06-12



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>23</b>

## 1. Test Laboratory

### 1.1. Testing Location

#### Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2020-04-26

Testing End Date: 2020-06-04

### 1.4. Signature



---

An Hui


(Prepared this test report)



---

Zhang Ying

(Reviewed this test report)



---

Liu Baodian

(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE Mobile phone
Model Name	5062W,5062Z
FCC ID	2ACCJH122

The Equipment under Test (EUT) is a model of GSM/UMTS/LTE Mobile phone with integrated antenna and inbuilt battery.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	015702000204648	06	2ASC

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	USB Cable	/	/
AE5	Headset	/	/

##### AE1

Model	CAC3860024C1
Manufacturer	BYD
Capacitance	3860 mAh/Typ4000mAh
Nominal voltage	/

##### AE2

Model	CBA0064BGMC
Manufacturer	BYD
Capacitance	/
Nominal voltage	/



AE3

Model CDA0000150C2  
Manufacturer SHENGHUA  
Length of cable /

AE4

Model CDA0000150C1  
Manufacturer JUWEI  
Length of cable /

AE5

Model Headset  
Manufacturer /  
Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

**3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT2+ AE1 + AE2 + AE3/AE4	Charger+MP3+GNSS + GSM850 idle
Set.2	EUT2+ AE1 + AE2 + AE3/AE4	Charger+CAMERA + WCDMA850 idle
Set.3	EUT2+ AE1 + AE2 + AE3/AE4+ AE5	USB mode +FM + LTE FDD Band 5/12/13/17/26/71

Note:

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM850, WCDMA850, LTE B5, LTE B12, LTE B13, LTE B26 and LTE B71.

The EUT was tested while operating in licensed band RX mode. All licensed band receivers are investigated. Only the worst case emissions are reported.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-16 Edition
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	1/2/4	The test is performed in test location 1/2/4 which is described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	1
2	Conducted Emission	15.107(a)	A.2	P	1



## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	LISN	ENV216	101200	Rohde & Schwarz	1 year	2021-05-17
2	Test Receiver	ESCI 7	100344	Rohde & Schwarz	1 Year	2021-02-26
3	Universal Radio Communication Tester	CMW500	116588	R&S	1 Years	2020-12-05
4	Test Receiver	ESU26	100235	Rohde & Schwarz	1 Years	2021-03-03
5	BiLog Antenna	VULB9163	9163-483	Schwarzbeck	1 Years	2020-09-17
6	EMI Antenna	3115	167250	ETS-Lindgren	1 Years	2020-05-15
7	PC	M4000e-17	M706GWXD	Lenovo	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A

Note: The EMI Antenna with series number 167250 was used before Cal. Due Date.

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01.0	R&S
Conducted Emission	EMC32 V8.52.0	R&S

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (charging mode and FM mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Section 2.2, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.16dB, 1GHz-18GHz: 5.44dB,  $k=2$ .

#### Measurement results for Set.1:

##### Charger+MP3+GNSS + GSM850 idle

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
50.158000	12.65	30.00	17.35	121.0	V	-3.0
55.483000	15.03	30.00	14.97	314.0	V	210.0
58.841000	13.78	30.00	16.22	117.0	V	-28.0
82.010000	13.01	30.00	16.99	125.0	V	70.0
85.784000	14.45	30.00	15.55	177.0	V	199.0
168.239000	10.40	33.50	23.12	100.0	V	-19.0

##### Charger+MP3+GNSS + GSM850 idle Average detector

Frequency (MHz)	Result (dB $\mu$ V/m)	$G_{\text{PL}}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17990.367	47.0	-5.4	33.8	18.616	H	54	7.0
17998.300	46.8	-5.4	33.8	18.416	H	54	7.2
17989.800	46.5	-5.4	33.8	18.116	V	54	7.5
17988.100	46.5	-5.4	33.8	18.116	H	54	7.5
17994.333	46.5	-5.4	33.8	18.116	H	54	7.5
17963.733	46.2	-5.4	33.8	17.816	H	54	7.8

##### Charger+MP3+GNSS + GSM850 idle Peak detector

Frequency (MHz)	Result (dB $\mu$ V/m)	$G_{\text{PL}}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17981.300	55.4	-5.4	33.8	27.016	H	74	18.6
17864.567	55.4	-5.7	33.8	27.338	H	74	18.6
17998.300	55.2	-5.4	33.8	26.816	V	74	18.8
17997.733	55.1	-5.4	33.8	26.716	H	74	18.9
17971.667	55.0	-5.4	33.8	26.616	H	74	19.0
17982.433	54.8	-5.4	33.8	26.416	H	74	19.2

**Measurement results for Set.2:**

**USB & FM Mode QP detector**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
33.224000	15.15	30.00	14.85	410.0	V	120.0
37.109000	18.79	30.00	11.21	125.0	V	-16.0
67.945000	13.62	30.00	16.38	108.0	V	257.0
99.101000	15.81	33.50	17.71	221.0	V	155.0
216.009000	17.73	36.00	18.29	103.0	V	170.0
673.124000	27.28	36.00	8.74	198.0	V	-14.0

**USB & FM Mode /Average detector**

Frequency (MHz)	Result (dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17985.833	46.6	-5.4	33.8	18.216	H	54	7.4
17891.200	46.0	-5.7	33.8	17.938	H	54	8.0
17979.033	45.9	-5.4	33.8	17.516	V	54	8.1
17972.800	45.9	-5.4	33.8	17.516	H	54	8.1
17991.500	45.8	-5.4	33.8	17.416	H	54	8.2
17993.200	45.7	-5.4	33.8	17.316	H	54	8.3

**USB & FM Mode /Peak detector**

Frequency (MHz)	Result (dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17977.333	54.8	-5.4	33.8	26.416	H	74	19.2
17999.433	54.5	-5.4	33.8	26.116	H	74	19.5
17984.700	54.4	-5.4	33.8	26.016	V	74	19.6
17967.133	54.4	-5.4	33.8	26.016	H	74	19.6
17986.967	54.3	-5.4	33.8	25.916	H	74	19.7
17857.200	54.2	-5.7	33.8	26.138	H	74	19.8

**Measurement results for Set.3:**

**USB & FM Mode QP detector**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
47.502000	10.43	30.00	19.57	305.0	V	161.0
50.185000	13.50	30.00	16.50	100.0	V	23.0
59.821000	13.24	30.00	16.76	207.0	V	188.0
86.509000	12.28	30.00	17.72	225.0	V	92.0
168.382000	11.58	33.50	21.94	118.0	V	120.0
183.731000	11.46	33.50	22.06	100.0	V	79.0

**USB & FM Mode Average detector**

Frequency (MHz)	Result (dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
2244.967	49.1	-38.1	27.7	59.500	H	54	4.9
2245.533	48.7	-38.1	27.7	59.100	H	54	5.3
2244.400	48.4	-38.1	27.7	58.800	V	54	5.6
17980.167	46.4	-17.7	45.6	18.500	H	54	7.6
17993.200	46.1	-17.7	45.6	18.200	H	54	7.9
17994.333	45.9	-17.7	45.6	18.000	H	54	8.1

**USB & FM Mode Peak detector**

Frequency (MHz)	Result (dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17994.333	55.3	-17.7	45.6	27.400	H	74	18.7
17993.200	55.1	-17.7	45.6	27.200	H	74	18.9
17874.200	54.9	-18.5	45.6	27.800	V	74	19.1
17980.167	54.7	-17.7	45.6	26.800	H	74	19.3
17684.933	54.3	-18.9	45.6	27.600	H	74	19.7
17998.867	54.2	-17.7	45.6	26.300	H	74	19.8

Sample calculation: Peak detector, 2244.967MHz

Result =P<sub>Mea</sub> (59.5dB $\mu$ V)+ G<sub>A</sub> (27.7dB/m)+ G<sub>PL</sub>(-38.1 dB) =49.1 dB $\mu$ V/m

Charger+MP3+GNSS + GSM850 idle, Set.1

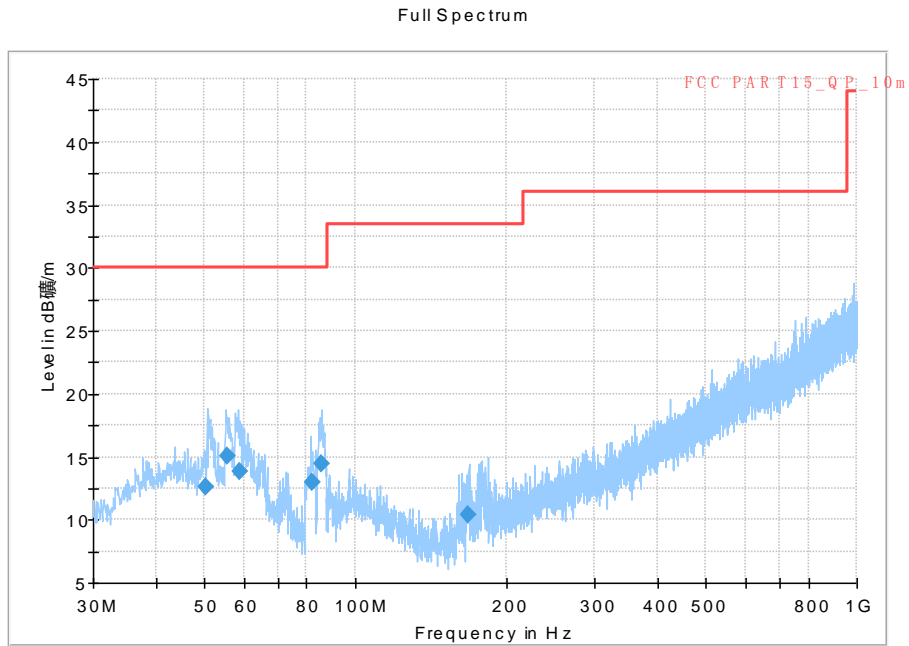


Figure A.1 Radiated Emission from 30MHz to 1GHz

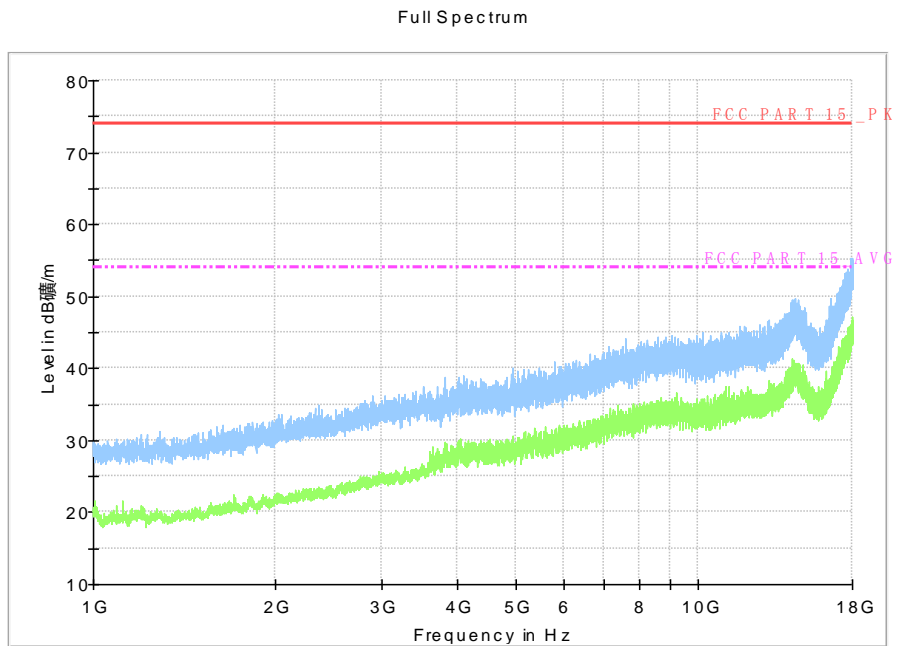


Figure A.2 Radiated Emission from 1GHz to 18GHz



Charger+CAMERA + WCDMA850 idle, Set.2

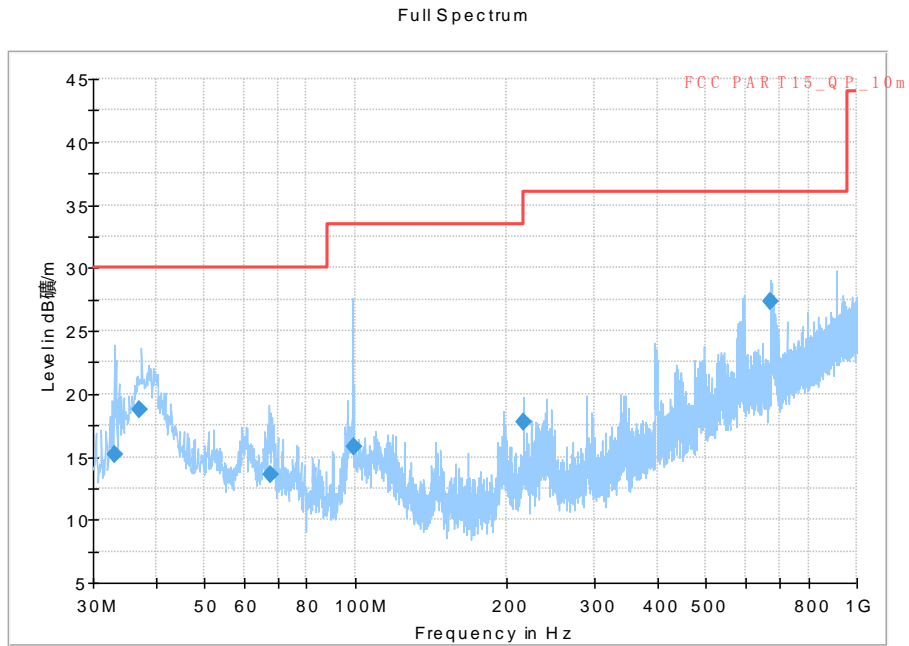


Figure A.3 Radiated Emission from 30MHz to 1GHz

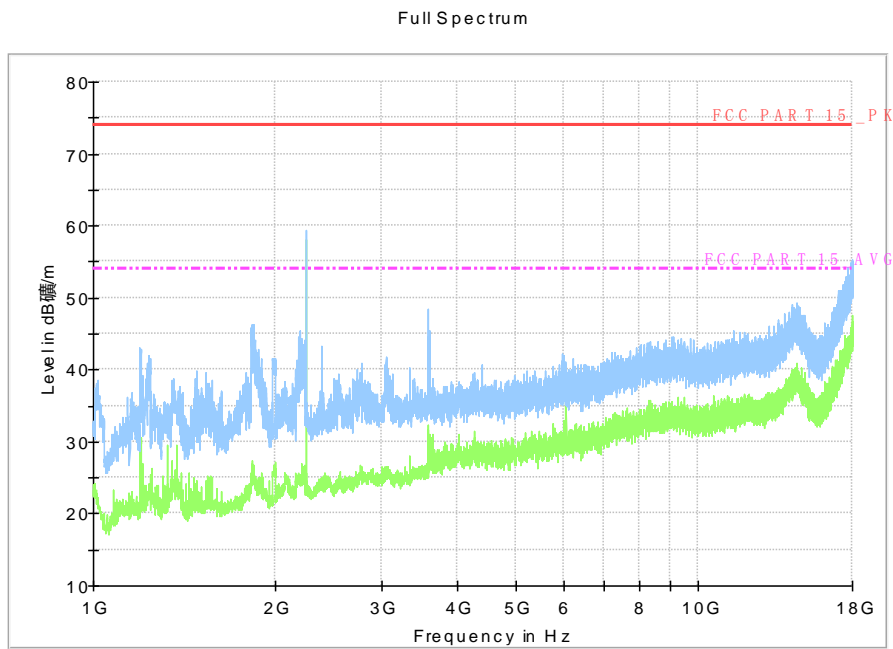


Figure A.4 Radiated Emission from 1GHz to 18GHz

USB mode +FM + LTE FDD Band 13, Set.3

Full Spectrum

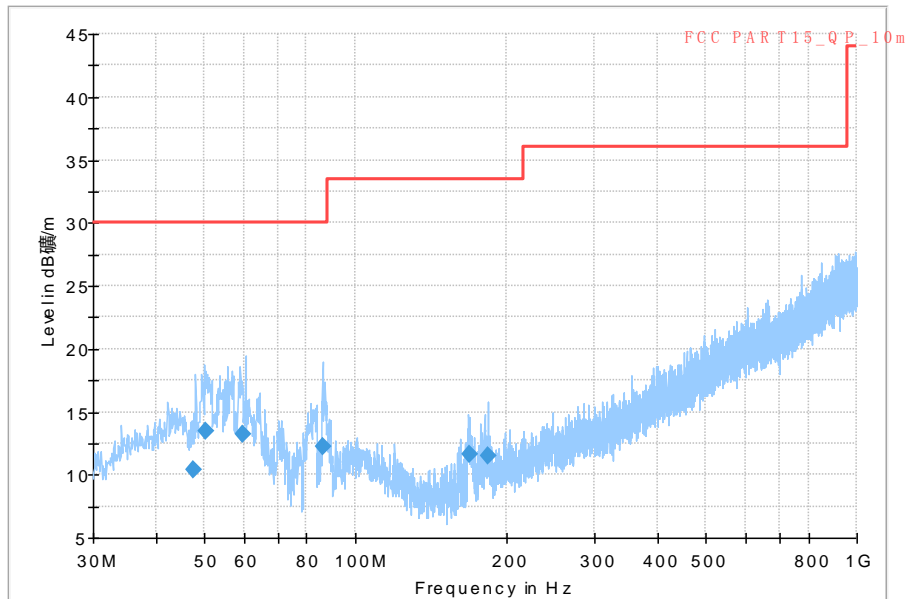


Figure A.5 Radiated Emission from 30MHz to 1GHz

Full Spectrum

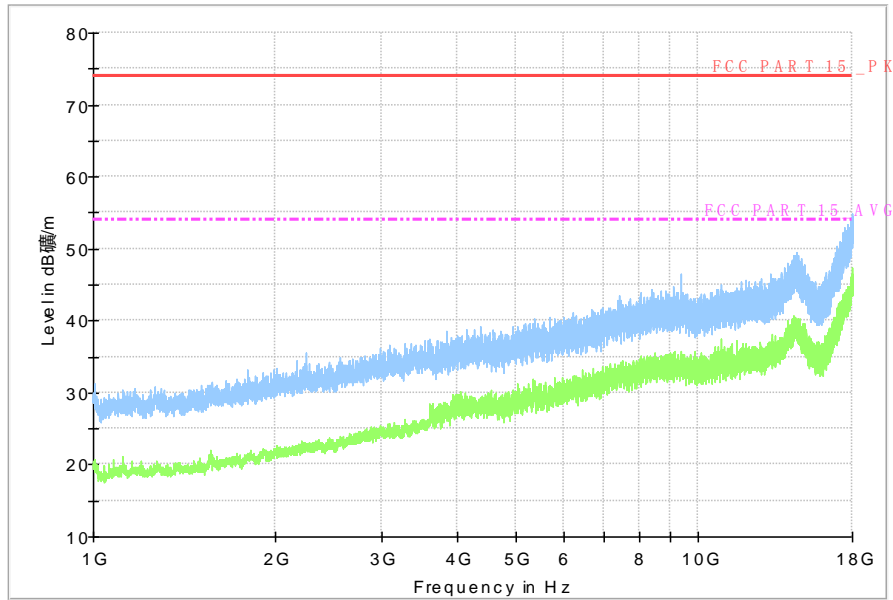


Figure A.6 Radiated Emission from 1GHz to 18GHz

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U=3.08\text{dB}$ ,  $k=2$ .

Charger+MP3+GNSS + GSM850 idle, Set.1

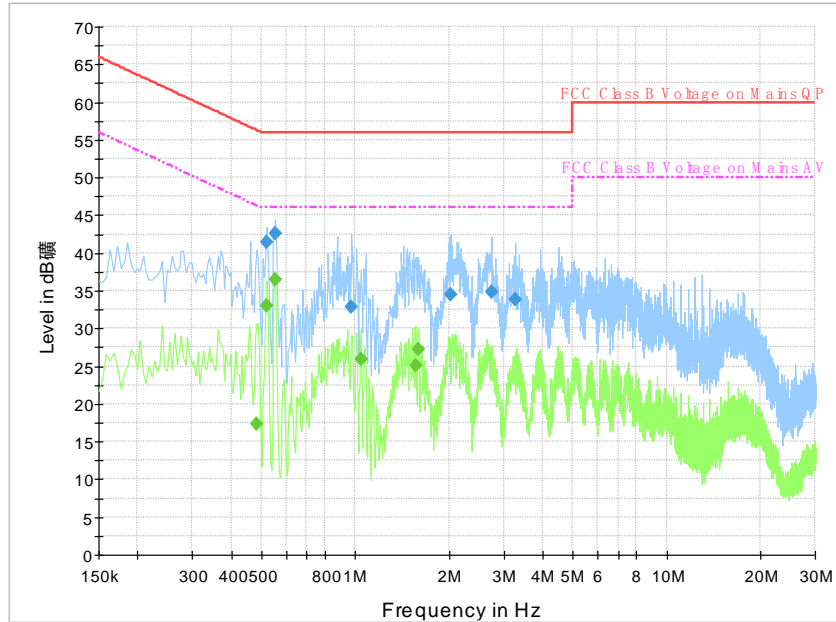


Figure A.11 Conducted Emission


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.519000	41.4	L1	10.0	14.6	56.0
0.555000	42.5	L1	10.0	13.5	56.0
0.973500	32.9	N	10.1	23.1	56.0
2.031000	34.5	N	10.1	21.5	56.0
2.733000	34.8	N	9.6	21.2	56.0
3.268500	33.9	N	9.8	22.1	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.483000	17.4	L1	10.0	28.9	46.3
0.519000	33.0	L1	10.0	13.0	46.0
0.555000	36.4	L1	10.0	9.6	46.0
1.041000	25.9	L1	10.0	20.1	46.0
1.563000	25.2	N	10.1	20.8	46.0
1.599000	27.2	N	10.1	18.8	46.0

**Charger+CAMERA + WCDMA850 idle, Set.2**

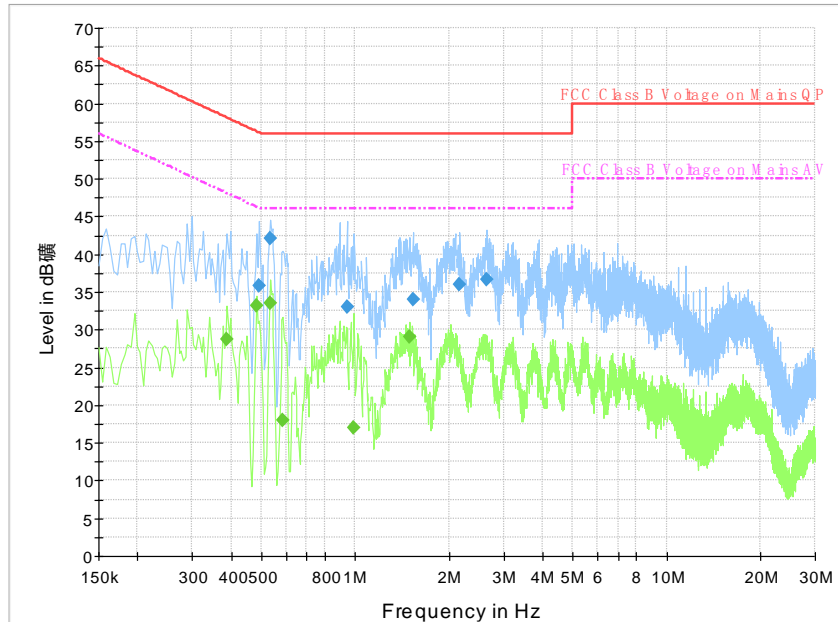

**Figure A.12 Conducted Emission**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.492000	35.9	N	10.0	20.3	56.1
0.532500	42.2	L1	10.0	13.8	56.0
0.942000	32.9	N	10.1	23.1	56.0
1.531500	34.0	N	10.1	22.0	56.0
2.170500	36.1	N	9.8	19.9	56.0
2.656500	36.7	N	9.8	19.4	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.388500	28.8	L1	10.0	19.3	48.1
0.483000	33.1	L1	10.0	13.2	46.3
0.532500	33.6	L1	10.0	12.4	46.0
0.586500	18.0	L1	10.0	28.0	46.0
0.991500	16.9	N	10.1	29.1	46.0
1.500000	29.0	L1	10.1	17.0	46.0

USB mode +FM + LTE FDD Band 13, Set.3

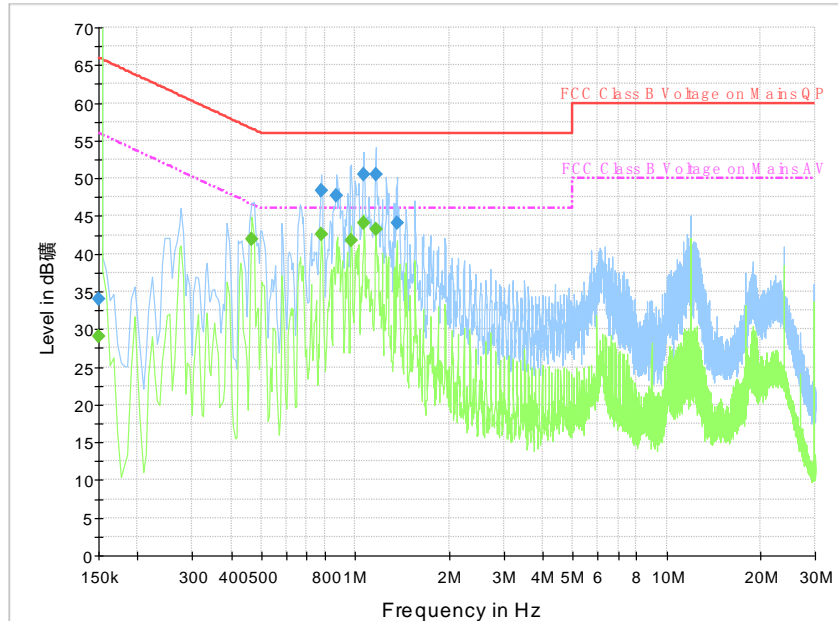


Figure A.13 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	34.0	N	10.1	32.0	66.0
0.775500	48.3	N	10.1	7.7	56.0
0.870000	47.7	L1	10.0	8.3	56.0
1.063500	50.5	L1	10.0	5.5	56.0
1.162500	50.5	N	10.1	5.5	56.0
1.365000	44.1	L1	10.1	11.9	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	29.1	N	10.1	26.9	56.0
0.465000	41.9	N	10.0	4.8	46.6
0.775500	42.6	L1	10.0	3.4	46.0
0.973500	41.8	N	10.1	4.2	46.0
1.068000	44.0	N	10.1	2.0	46.0
1.162500	43.3	N	10.1	2.7	46.0



**ANNEX B: Persons involved in this testing**

Test Item	Tester
Conducted Continuous Emission	Wang Huan
Radiated Continuous Emission	Li Pengfei

**\*\*\*END OF REPORT\*\*\***