



SAR TEST REPORT

No. I20Z60986-SEM02

For

TCL Communication Ltd.

LTE/UMTS/GSM Mobile Phone

Model Name: T766A

With

Hardware Version: PIO

Software Version: 6J57

FCC ID: 2ACCJH126

Issued Date: 2020-7-17

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

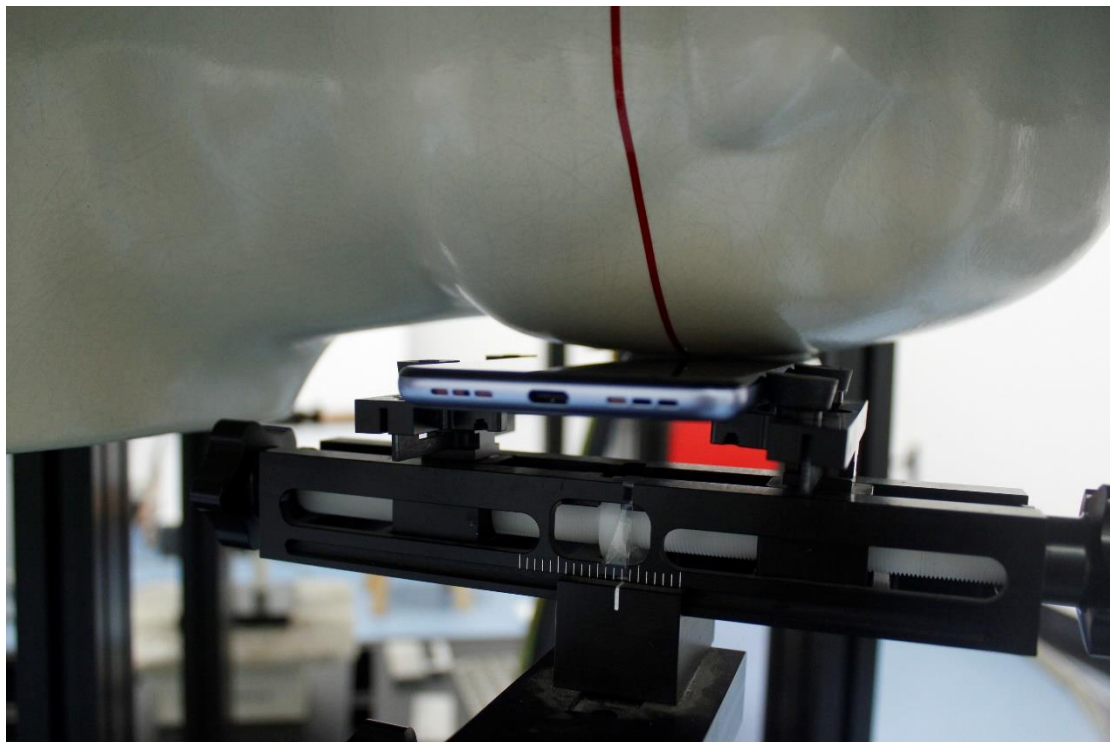


Picture 2: Left Head Touch Cheek Position

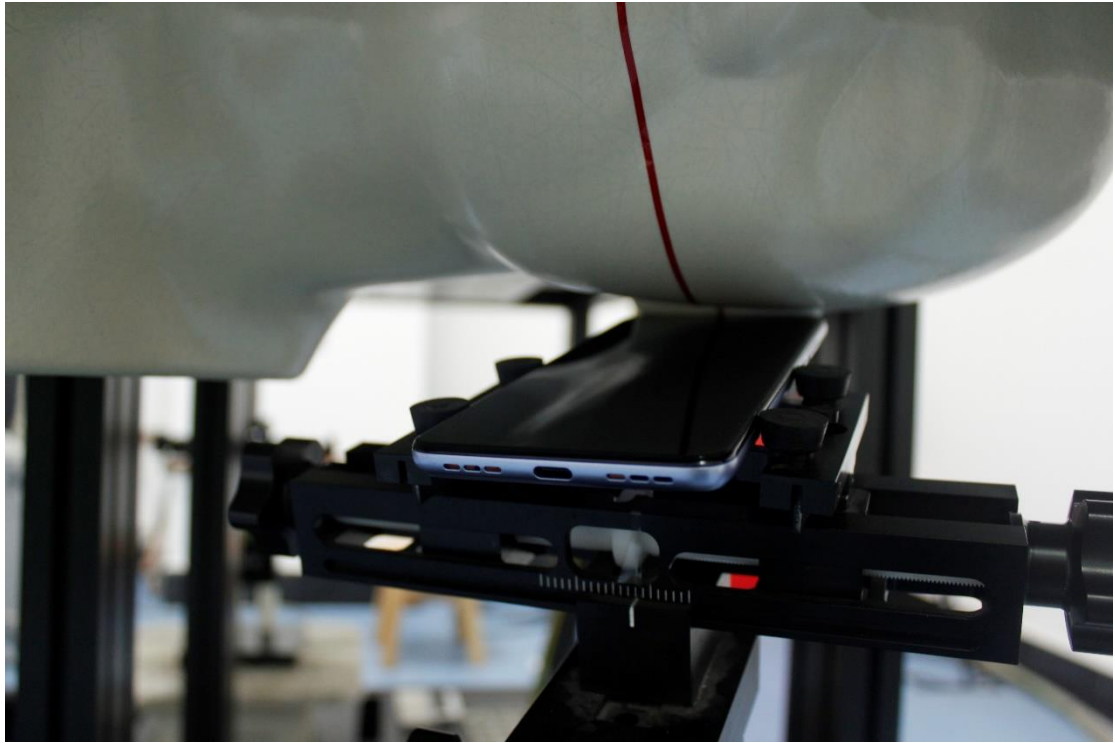

Picture 3: Left Head Tilt 15° Position

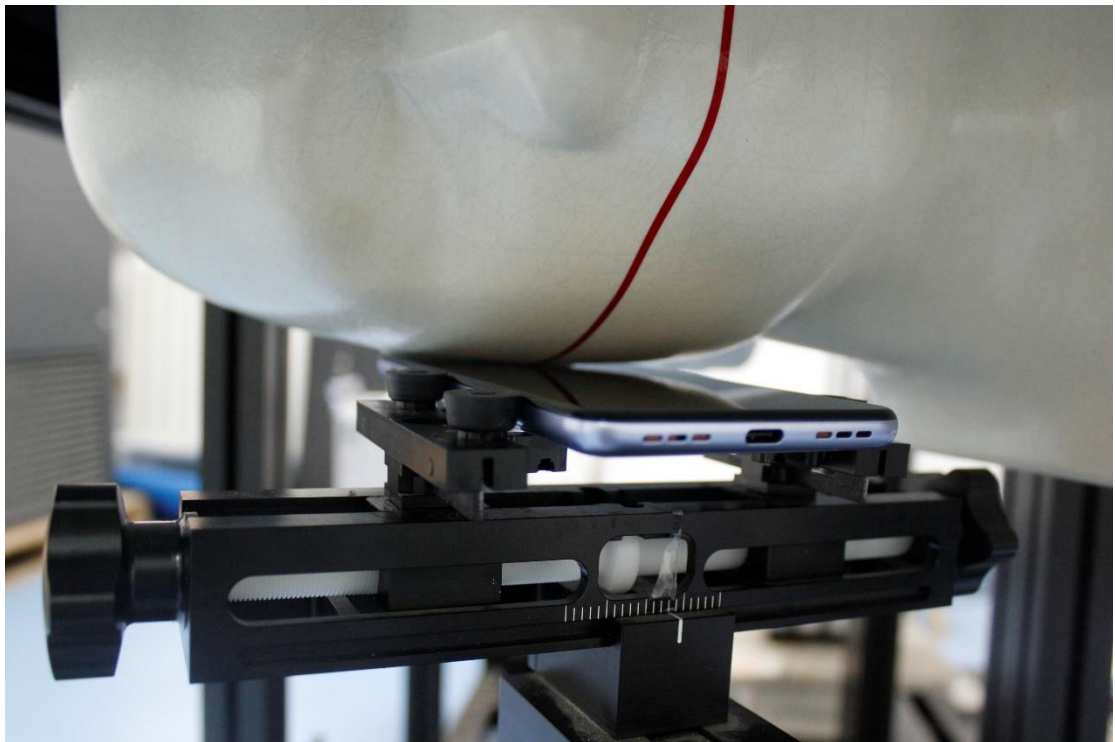

Picture 4: Right Head Touch Cheek Position

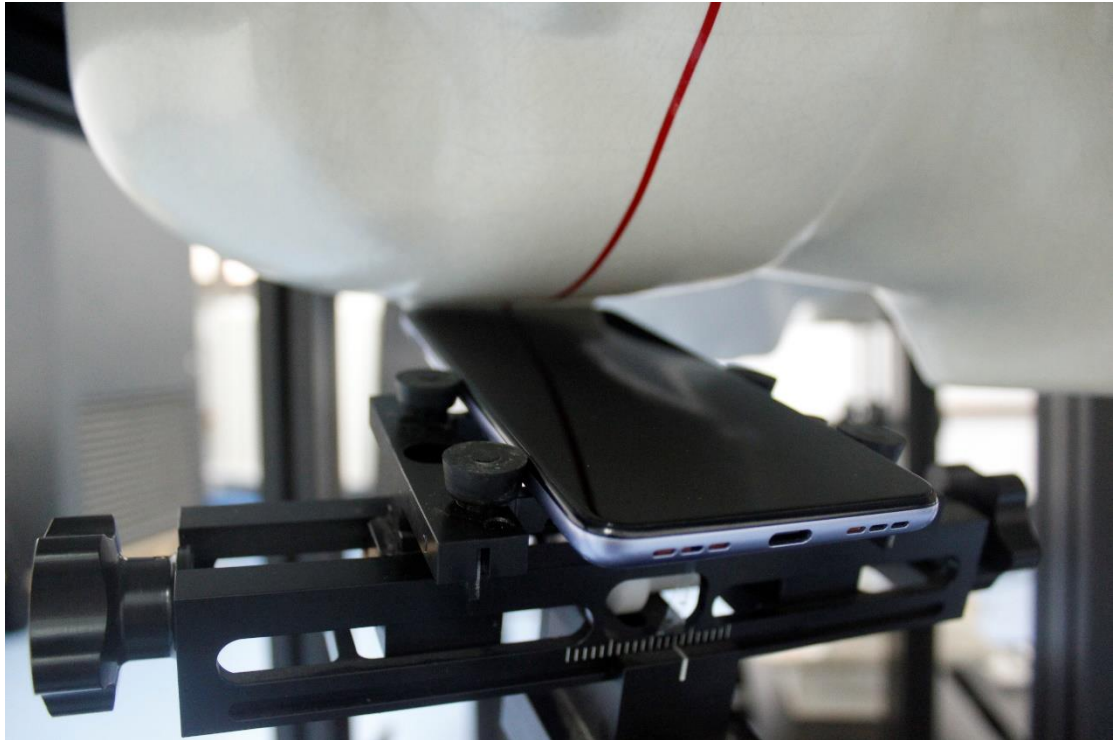

Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 5 test positions , with the distance 10/15/0mm between the EUT and the phantom bottom:




Picture 6: Front 10mm



Picture 7: Rear 10mm




Picture 8: Left 10mm

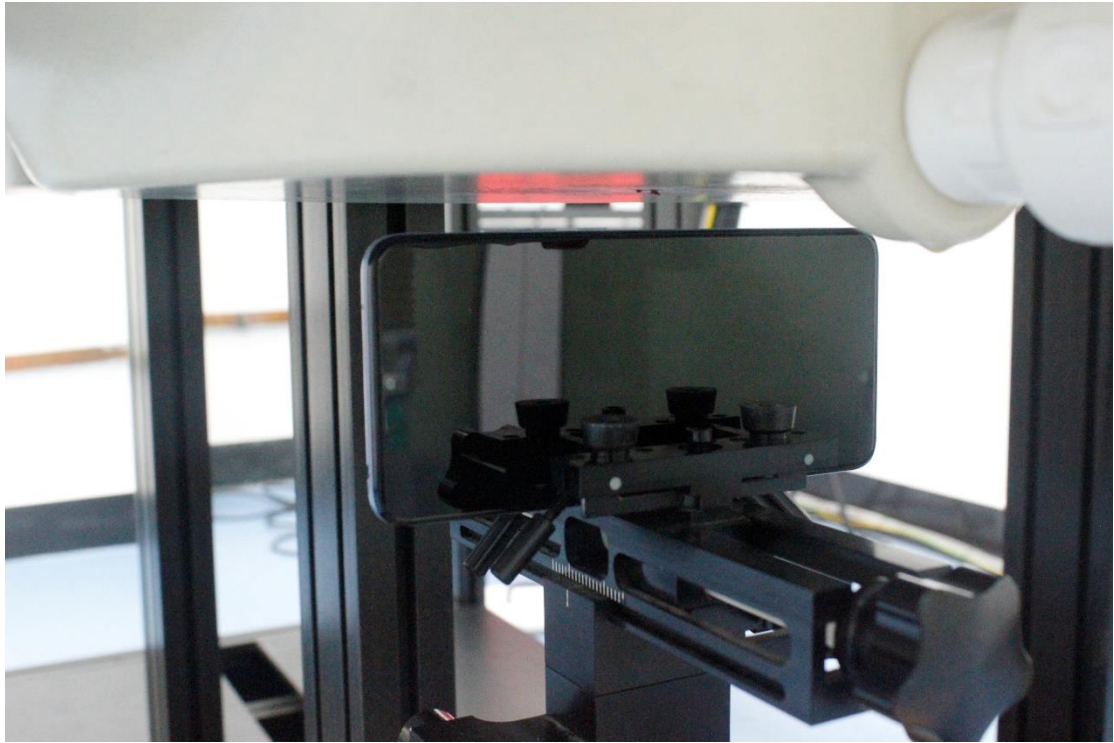

Picture 9: Right 10mm




Picture 10: Top 10mm

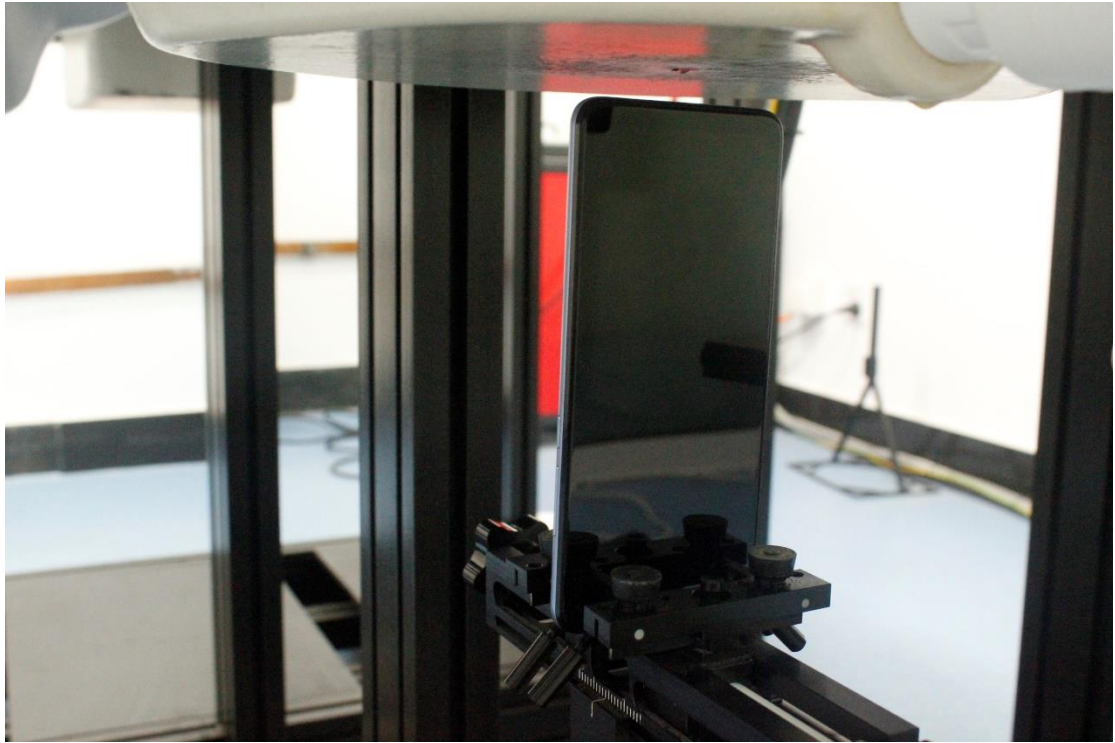


Picture 11: Bottom 10mm



Picture 12: Front 15mm

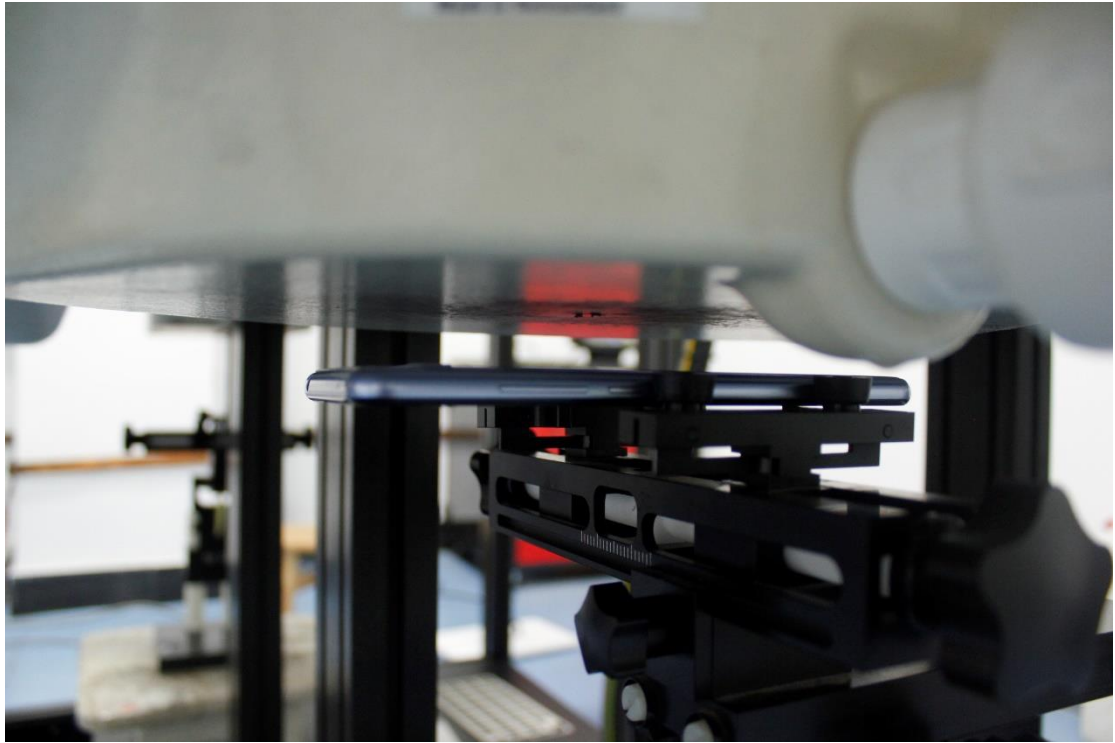

Picture 13: Rear 15mm

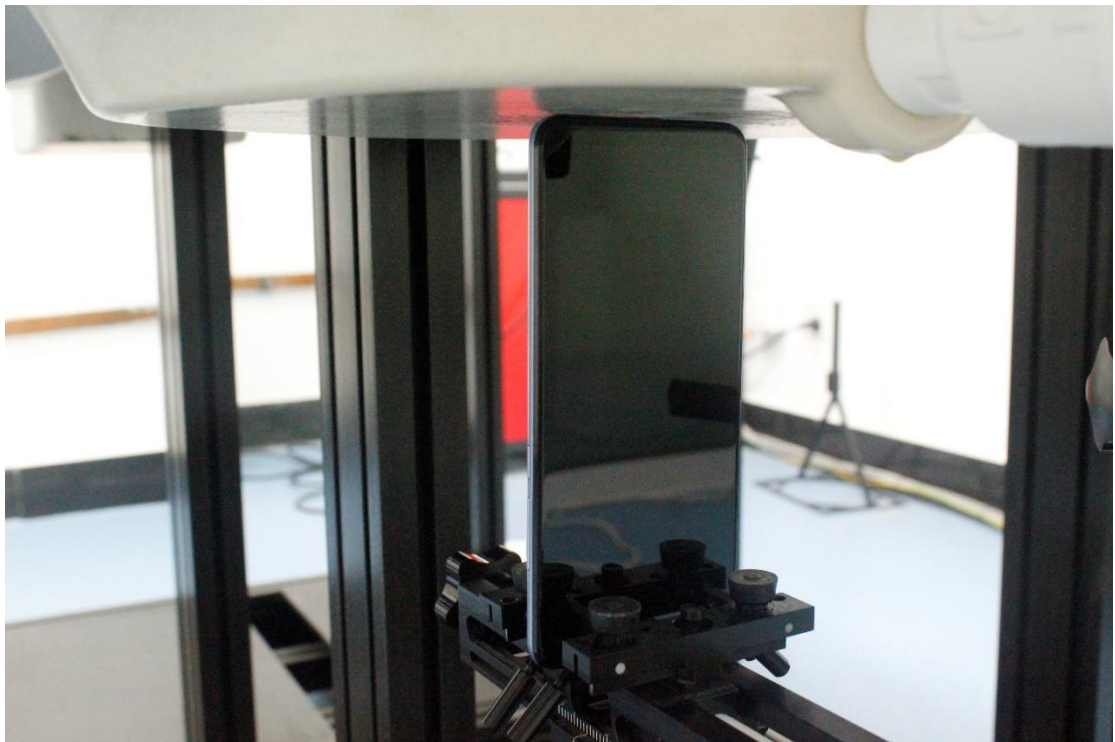

Picture 14: Bottom 0mm