





No. I21Z61051-SEM03

For

TCL Communication Ltd.

GSM/UMTS/LTE/NR Mobile phone

Model Name: T767H

with

Hardware Version: PIO

Software Version: 2B56

FCC ID: 2ACCJH140

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: cttl terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

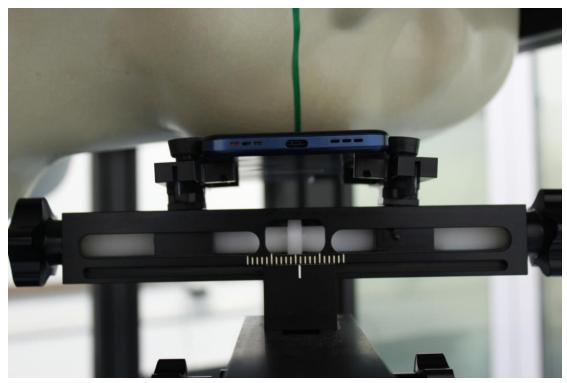

Picture 2: Left Head Touch Cheek Position

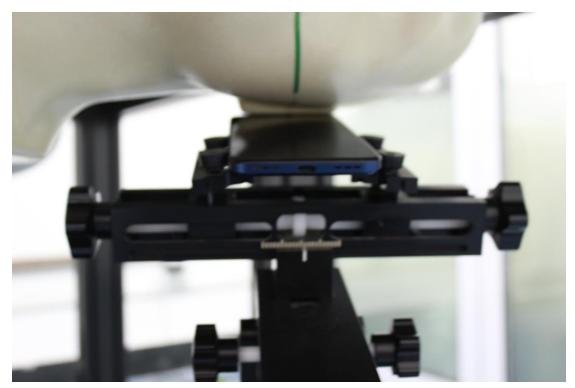

Picture 3: Left Head Tilt 15° Position

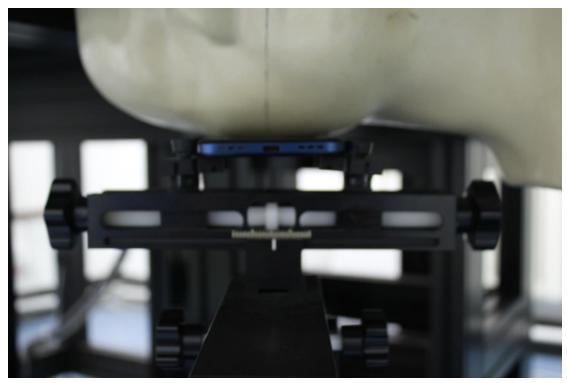


Picture 4: Right Head Touch Cheek Position




Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 10 test positions all with the distance =0/10mm between the EUT and the phantom bottom:

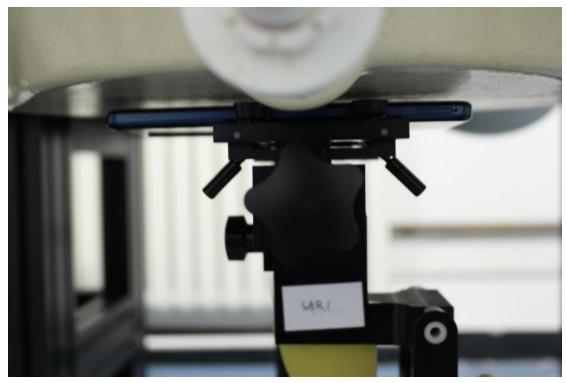

Picture 6: Front 10mm

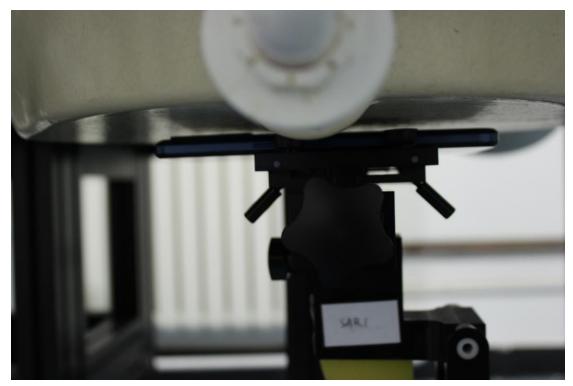


Picture 7: Rear 10mm




Picture 8: Left 10mm



Picture 9: Right 10mm

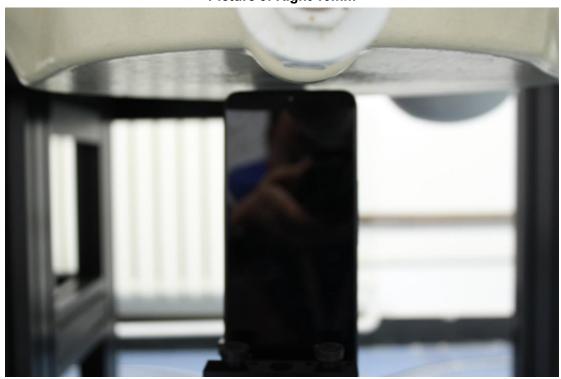

Picture 10: Top 10mm

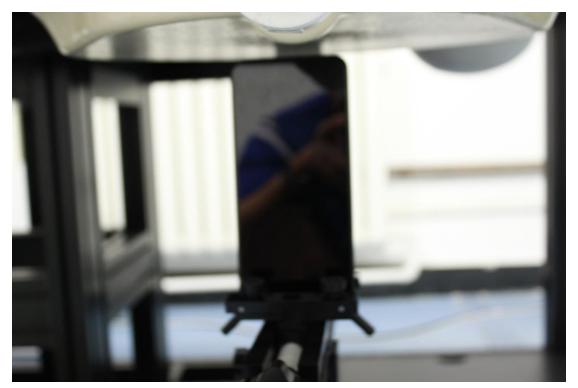


Picture 11: Bottom 10mm




Picture 12: Rear 0mm



Picture 13: Left 0mm

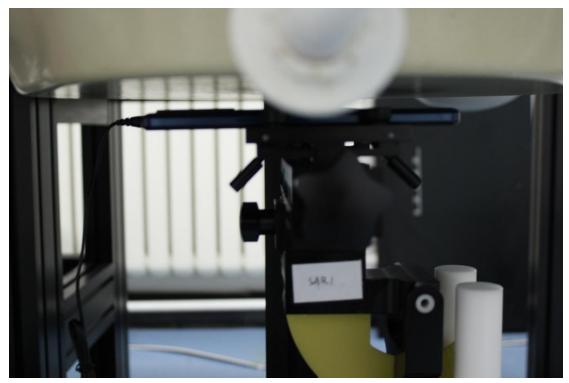

Picture 14: Rear 10mm with headset

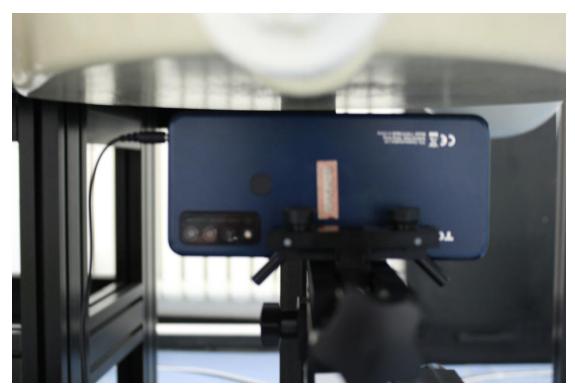

Picture 15: Left 10mm with headset