

**802.11n-HT20**
**Ch1**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.620	47.61	2.87	32.00	12.75	54.00	6.39	V
2389.980	47.63	2.87	32.00	12.76	54.00	6.37	V
4824.000	28.75	-33.24	34.13	27.85	54.00	25.25	H
7236.000	31.10	-30.88	35.80	26.18	54.00	22.90	V
9648.000	31.88	-30.46	36.71	25.63	54.00	22.12	V
12060.000	33.27	-28.70	38.74	23.24	54.00	20.73	H


**Ch6**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2414.820	48.30	2.88	32.02	13.39	54.00	5.70	V
2459.400	48.77	2.91	32.06	13.79	54.00	5.23	V
4874.000	28.58	-33.30	34.15	27.73	54.00	25.42	V
7311.000	30.82	-30.82	35.83	25.81	54.00	23.18	H
9748.000	31.66	-30.33	36.85	25.14	54.00	22.34	H
12185.000	34.64	-28.11	38.81	23.94	54.00	19.36	H


**Ch11**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	47.46	2.93	32.09	12.44	54.00	6.54	V
2483.580	47.45	2.93	32.09	12.43	54.00	6.55	V
4924.000	29.09	-33.53	34.17	28.45	54.00	24.91	H
7386.000	30.75	-31.45	35.86	26.35	54.00	23.25	V
9848.000	31.52	-30.18	36.99	24.71	54.00	22.48	V
12310.000	33.93	-27.75	38.89	22.79	54.00	20.07	V


Test graphs as below:

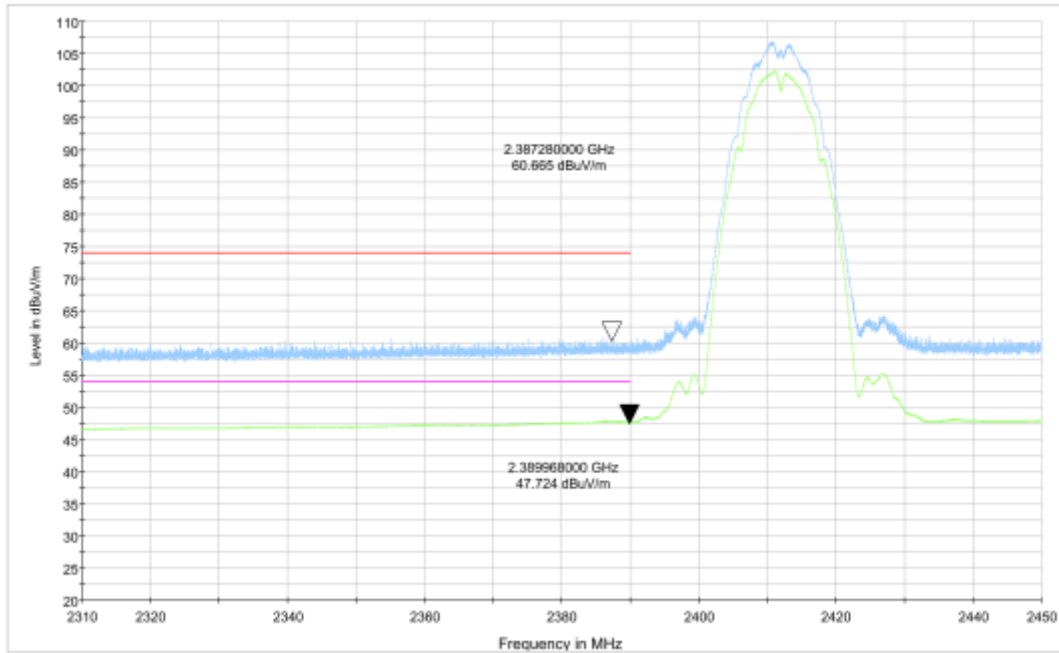


**Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.45GHz**

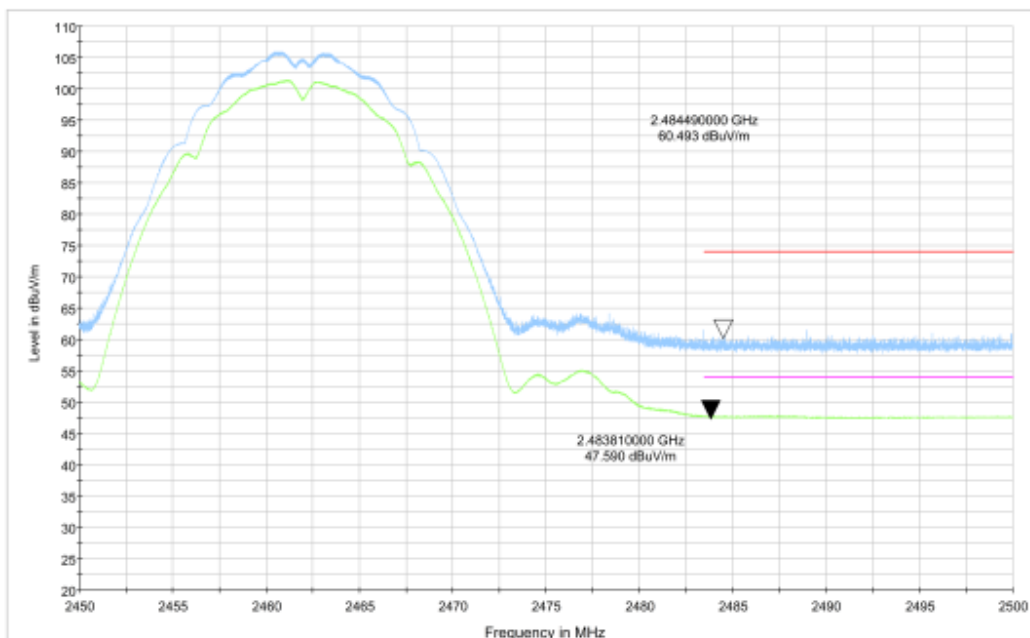


**Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.5GHz**

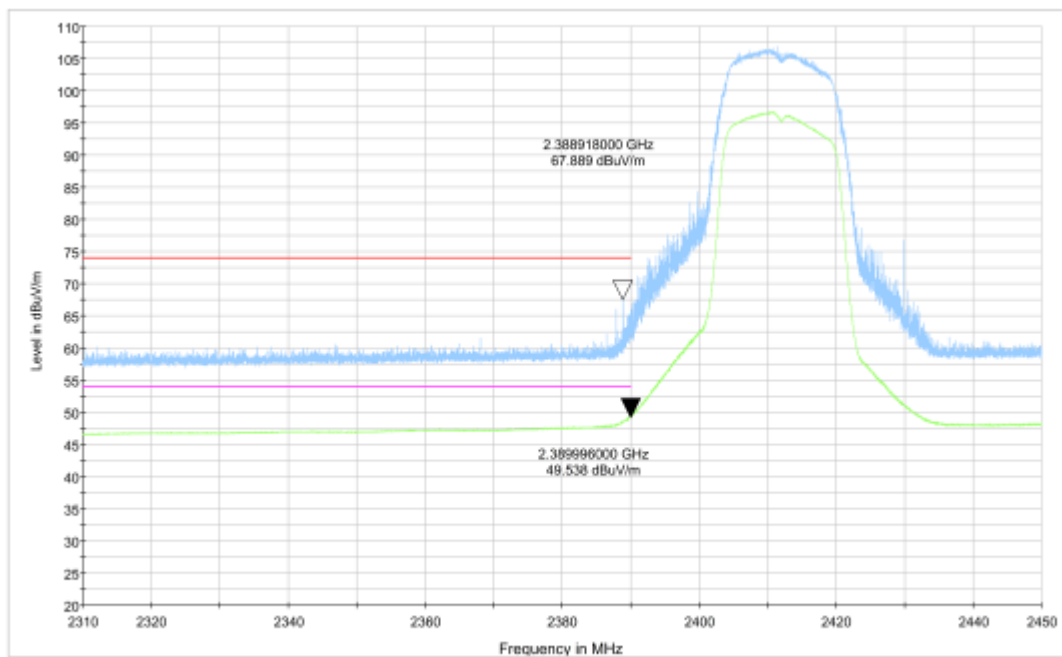


**Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.45GHz**

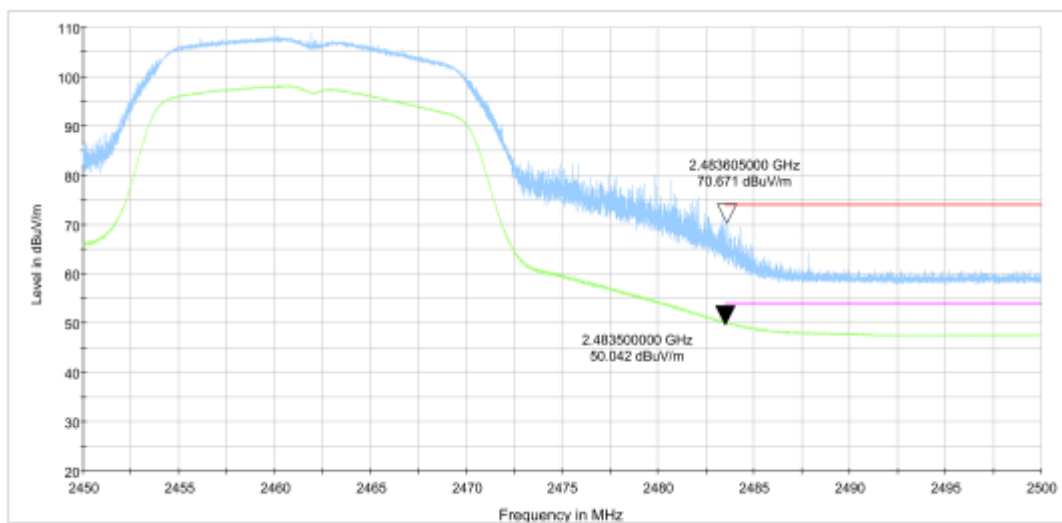

**Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

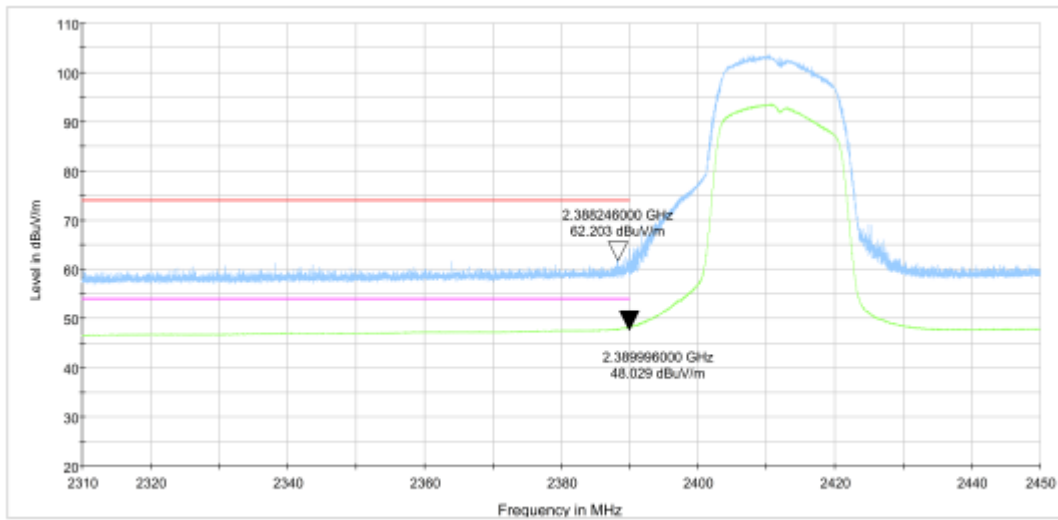

**Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz**

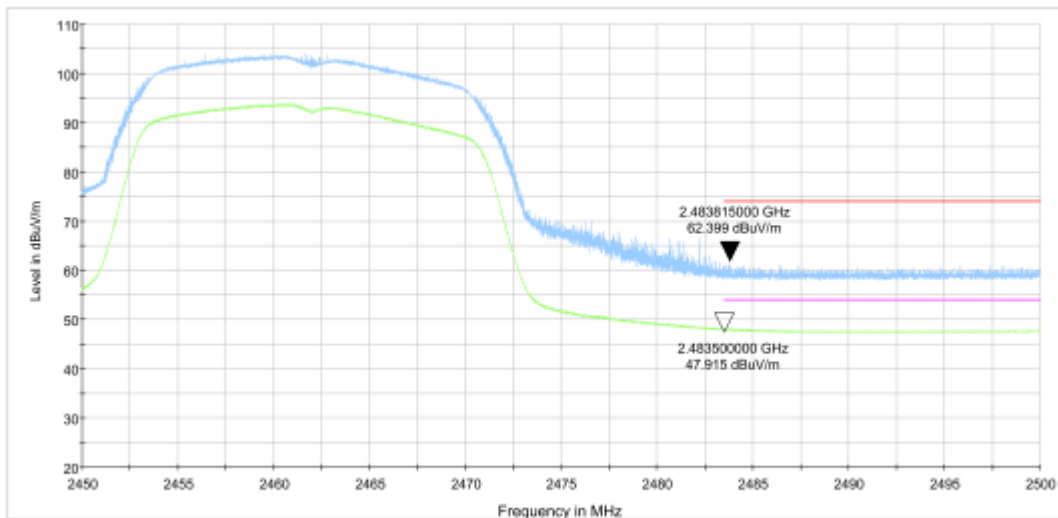

**Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz**

## **A.7. AC Power-line Conducted Emission**

### **Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### **Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

## WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger AE2		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger AE2		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

**Test graphs as below:**

**Measurement results for Set.1:**

**Result for Traffic:**

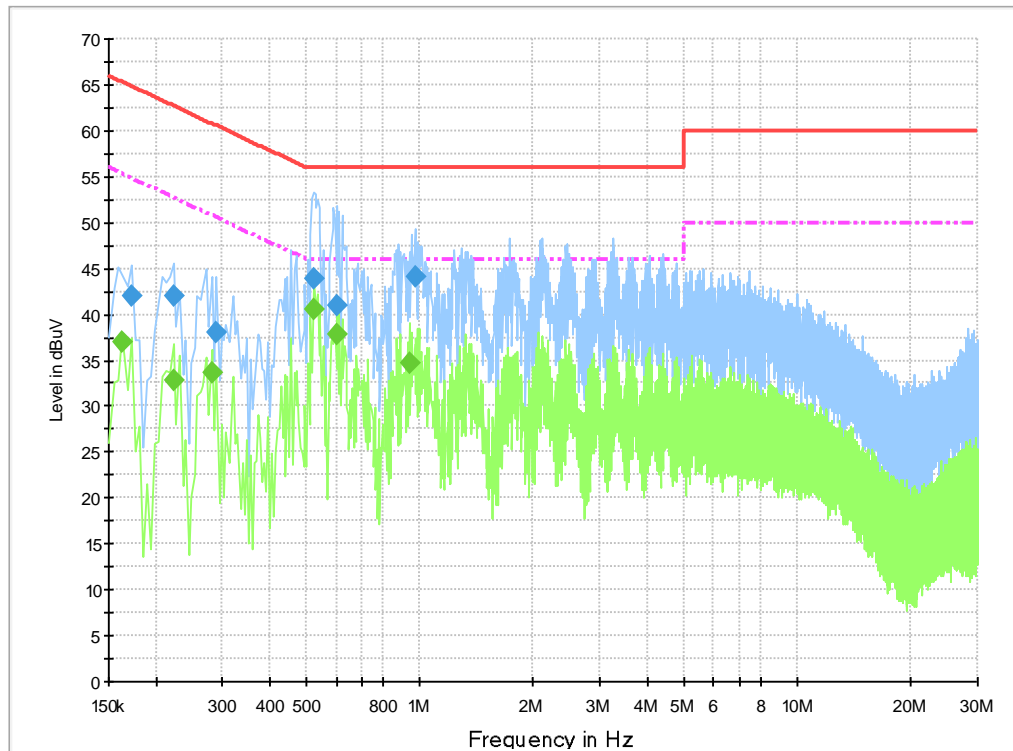

**Fig.A.7.1 AC Powerline Conducted Emission-802.11b**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.172500	42.0	3000.0	9.000	On	L1	19.6	22.8	64.8	
0.222000	42.1	3000.0	9.000	On	L1	19.7	20.7	62.7	
0.289500	37.9	3000.0	9.000	On	N	19.7	22.6	60.5	
0.523500	43.8	3000.0	9.000	On	N	19.8	12.2	56.0	
0.604500	41.1	3000.0	9.000	On	N	19.7	14.9	56.0	
0.969000	44.1	3000.0	9.000	On	L1	19.7	11.9	56.0	

**Final Result 2**

Frequency (MHz)	Average (dBuV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.163500	37.0	3000.0	9.000	On	L1	19.7	18.3	55.3	
0.222000	32.9	3000.0	9.000	On	L1	19.7	19.9	52.7	
0.280500	33.7	3000.0	9.000	On	L1	19.7	17.1	50.8	
0.523500	40.6	3000.0	9.000	On	L1	19.8	5.4	46.0	
0.604500	37.8	3000.0	9.000	On	L1	19.7	8.2	46.0	
0.937500	34.7	3000.0	9.000	On	L1	19.7	11.3	46.0	

**Measurement results for Set.1:**

**Result for Idle:**

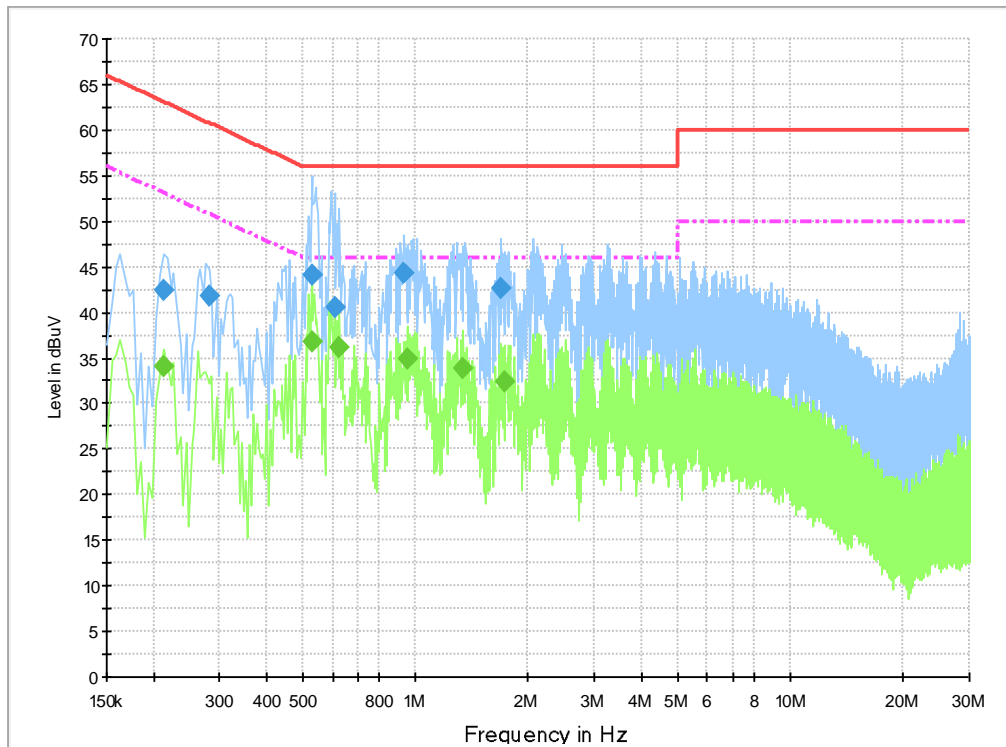

**Fig.A.7.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.213000	42.4	3000.0	9.000	On	L1	19.7	20.6	63.1	
0.280500	41.8	3000.0	9.000	On	L1	19.7	19.0	60.8	
0.528000	44.1	3000.0	9.000	On	N	19.8	11.9	56.0	
0.609000	40.6	3000.0	9.000	On	N	19.7	15.4	56.0	
0.933000	44.3	3000.0	9.000	On	L1	19.7	11.7	56.0	
1.684500	42.5	3000.0	9.000	On	L1	19.7	13.5	56.0	

**Final Result 2**

Frequency (MHz)	Average (dBuV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.213000	34.2	3000.0	9.000	On	L1	19.7	18.9	53.1	
0.528000	36.8	3000.0	9.000	On	N	19.8	9.2	46.0	
0.627000	36.1	3000.0	9.000	On	L1	19.7	9.9	46.0	
0.951000	35.0	3000.0	9.000	On	L1	19.7	11.0	46.0	
1.342500	33.8	3000.0	9.000	On	L1	19.7	12.2	46.0	
1.734000	32.4	3000.0	9.000	On	L1	19.7	13.6	46.0	



## ANNEX B: Accreditation Certificate





<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

\*\*\*END OF REPORT\*\*\*

## ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2020-09-29 through 2021-09-30 <i>Effective Dates</i>	  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\*END OF REPORT\*\*\*