



FCC PART 15C TEST REPORT No.I21Z61774-IOT07

for

TCL Communication Ltd.

GSM/UMTS/LTE /NR Mobile phone

T767W

With

FCC ID: 2ACCJH155

Hardware Version: 03

Software Version: 3CS9

Issued Date: 2021-11-04

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21Z61774-IOT07	Rev.0	1st edition	2021-11-04

CONTENTS

CONTENTS	3
1. TEST LATORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION.....	8
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS.....	9
6.3. TEST CONDITIONS	9
7. TEST EQUIPMENTS UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
6.1. TRANSMITTER OUTPUT POWER	11
6.1. PEAK POWER SPECTRAL DENSITY	11
6.1. OCCUPIED 6DB BANDWIDTH.....	11
6.1. BAND EDGES COMPLIANCE	11
6.1. SPURIOUS EMISSIONS	11
6.1. AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM PEAK OUTPUT POWER	13
A.2.1 ANTENNA GAIN	13
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	13

A.3. PEAK POWER SPECTRAL DENSITY	15
A.4. OCCUPIED 6DB BANDWIDTH	16
A.5. TRANSMITTER SPURIOUS EMISSION	21
A.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED	21
A.6. BAND EDGES COMPLIANCE	34
A6.1 BAND EDGES - RADIATED	34
FIG. 10 BAND EDGES (802.11A CH149,5745MHZ).....	35
FIG. 11 BAND EDGES (802.11A CH165, 5825MHZ).....	35
FIG. 12 BAND EDGES (802.11N-HT20 CH149, 5745MHZ)	35
FIG. 13 BAND EDGES (802.11N-HT20 CH165, 5825MHZ)	36
FIG. 14 BAND EDGES (802.11N-HT40 CH151, 5755MHZ)	36
FIG. 15 BAND EDGES (802.11N-HT40 CH159, 5795MHZ)	36
FIG. 16 BAND EDGES (802.11AC-HT20 CH149, 5745MHZ)	37
FIG. 17 BAND EDGES (802.11AC-HT20 CH165, 5825MHZ)	37
FIG. 18 BAND EDGES (802.11AC-HT40 CH151, 5755MHZ)	37
FIG. 19 BAND EDGES (802.11AC-HT40 CH159, 5795MHZ)	38
FIG. 20 BAND EDGES (802.11AC-HT80 CH155, 5775MHZ)	38
FIG. 21 BAND EDGES (802.11AC-HT80 CH155, 5775MHZ)	38
A.7. AC POWERLINE CONDUCTED EMISSION	39
FIG. 22 AC POWER LINE CONDUCTED EMISSION-802.11A	40
FIG. 23 AC POWER LINE CONDUCTED EMISSION-IDLE.....	41
ANNEX B: EUT PARAMETERS.....	42
ANNEX C: ACCREDITATION CERTIFICATE	42

1. TEST LABORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2021-09-06


Testing End Date: 2021-11-04

1.5. Signature




Xie Xiuzhen

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: 0086-755-36611722
Fax: /

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: 0086-755-36611722
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	GSM/UMTS/LTE /NR Mobile phone
Model name	T767W
FCC ID	2ACCJH155
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.8V

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	016062000204661	03	3CS9
EUT2	016062000204653	03	3CS9

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Battery	/
AE3	USB Cable	
AE4	Charger	

AE1

Model	TLp043E7
Manufacturer	VEKEN
Capacity	4500mAh
Nominal Voltage	

AE2

Model	TLp043E1
Manufacturer	BYD
Capacity	4500mAh
Nominal Voltage	

AE3

Model	CDA0000128C1
Manufacturer	JUWEI
Length of cable	/

AE4

Model	CBA0064BGTC5
Manufacturer	PUAN
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of GSM/UMTS/LTE /NR Mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

6.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/matrix as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	R&S	1 year	2022-05-30
3	Test Receiver	ESCI	100344	R&S	1 year	2022-02-23
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU 26	100235	R&S	1 year	2022-02-23
2	EMI Antenna	VULB 9163	01223	SCHWARZBECK	1 year	2022-03-22
3	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-23

8. Measurement Uncertainty

6.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

6.1. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

6.1. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

6.1. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

6.1. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.40
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.32
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

6.1. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

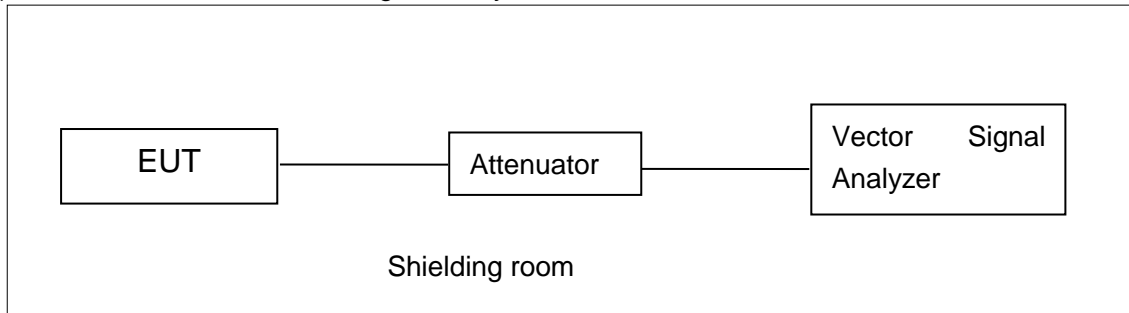


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

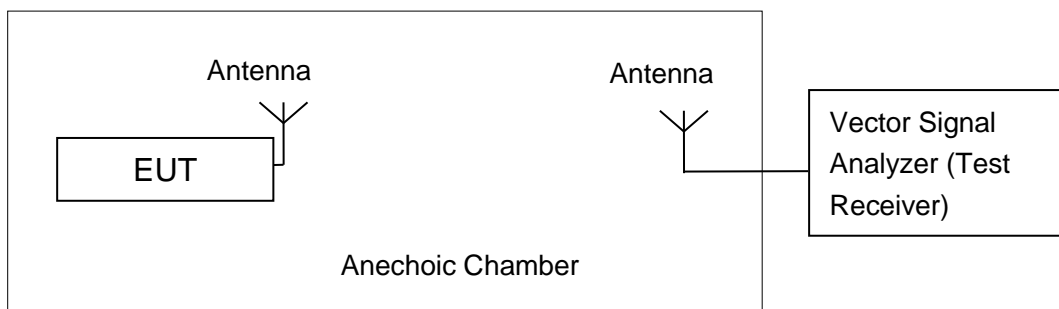

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1 Antenna Gain

Antenna gain is -0.6dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Average Output Power-Conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	18.32	18.08	17.81

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n(20MHz)	MCS0	18.45	17.81	17.88

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac(20MHz)	MCS0	18.36	18.14	17.90

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n(40MHz)	MCS0	18.73	18.54

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac(40MHz)	MCS0	18.72	18.54

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac(80MHz)	MCS0	18.52

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	4.28	P
	157	4.30	P
	165	4.16	P
802.11n HT20	149	4.07	P
	157	3.97	P
	165	3.86	P
802.11n HT40	151	1.60	P
	159	1.60	P
802.11ac HT80	155	-2.19	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
		Fig.	Value	
802.11a	149	Fig.1	16.35	P
	157	Fig.2	16.35	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	17.55	P
	157	Fig.5	17.55	P
	165	Fig.6	17.55	P
802.11n HT40	151	Fig.7	36.32	P
	159	Fig.8	36.00	P
802.11ac HT80	155	Fig.9	76.32	P

Conclusion: PASS

Test graphs as below:

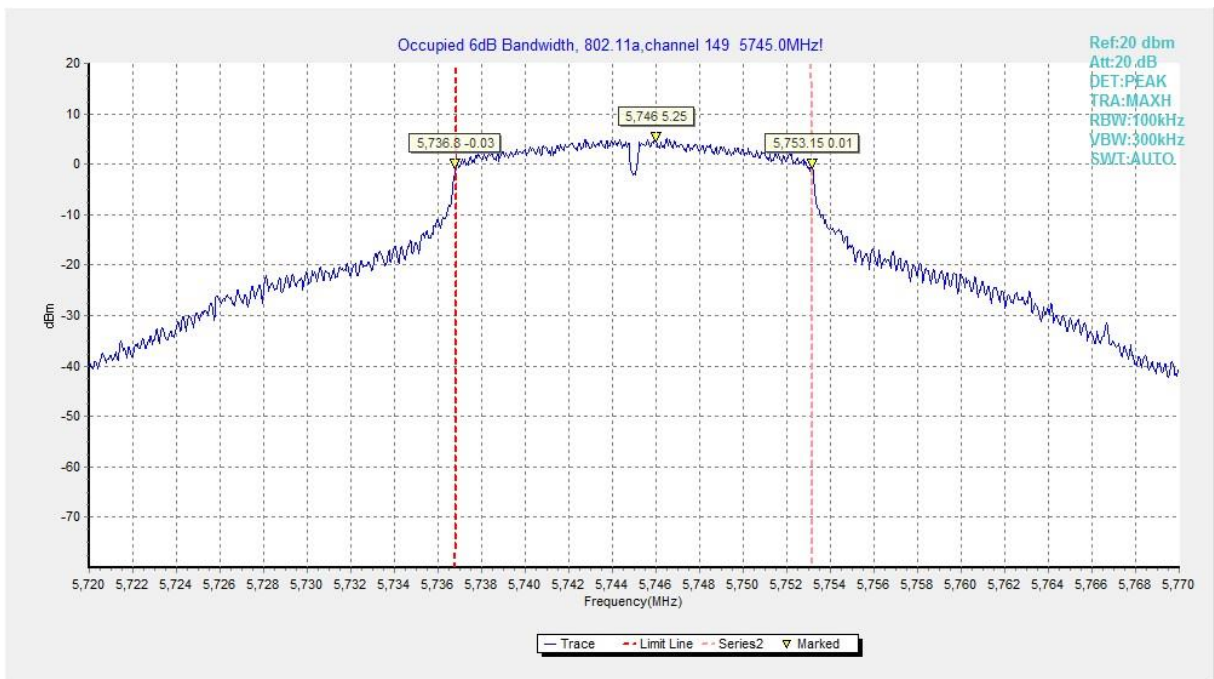


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

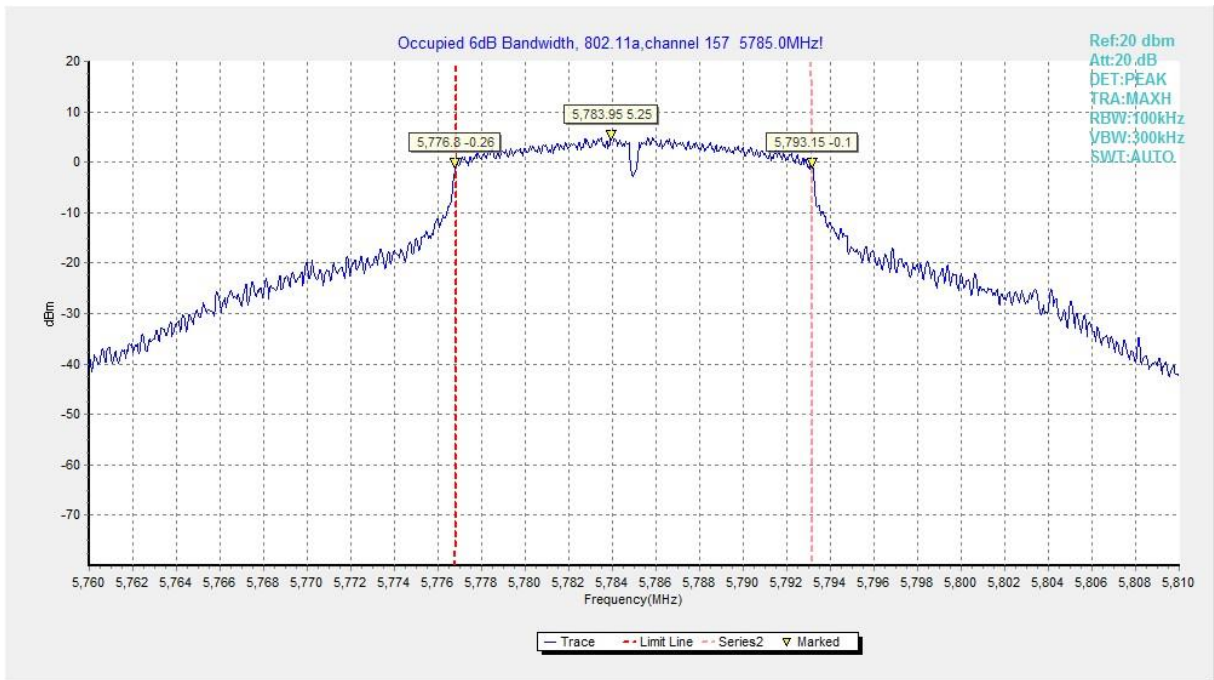


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

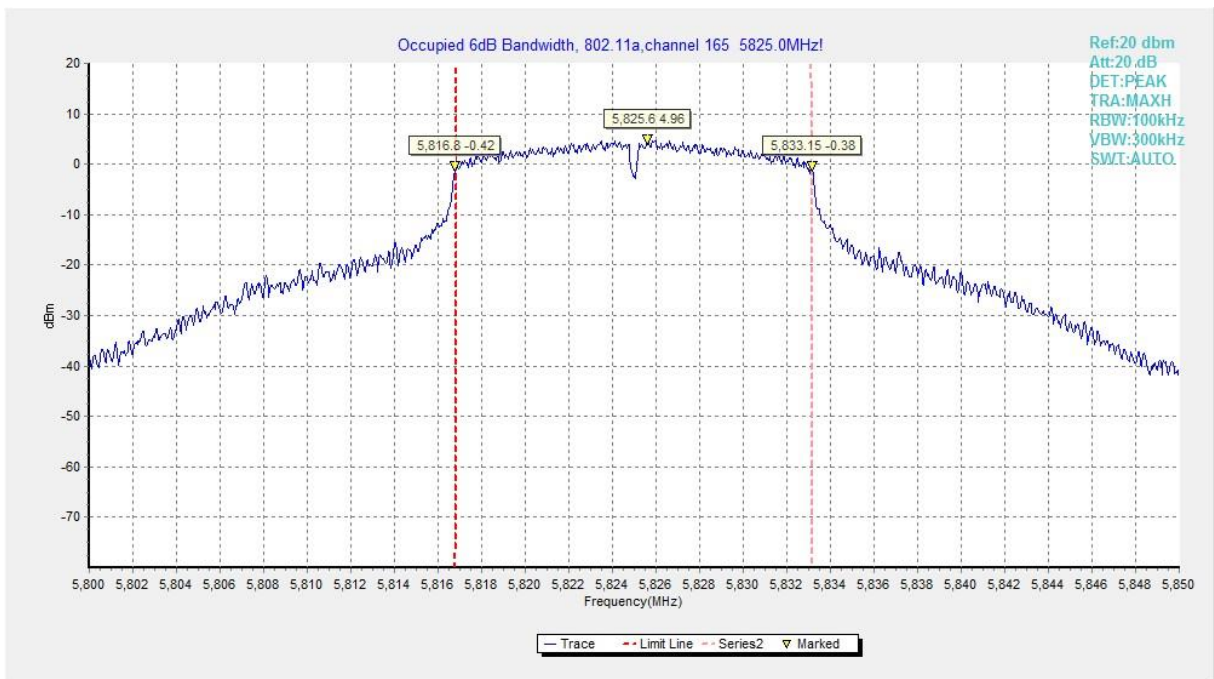


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

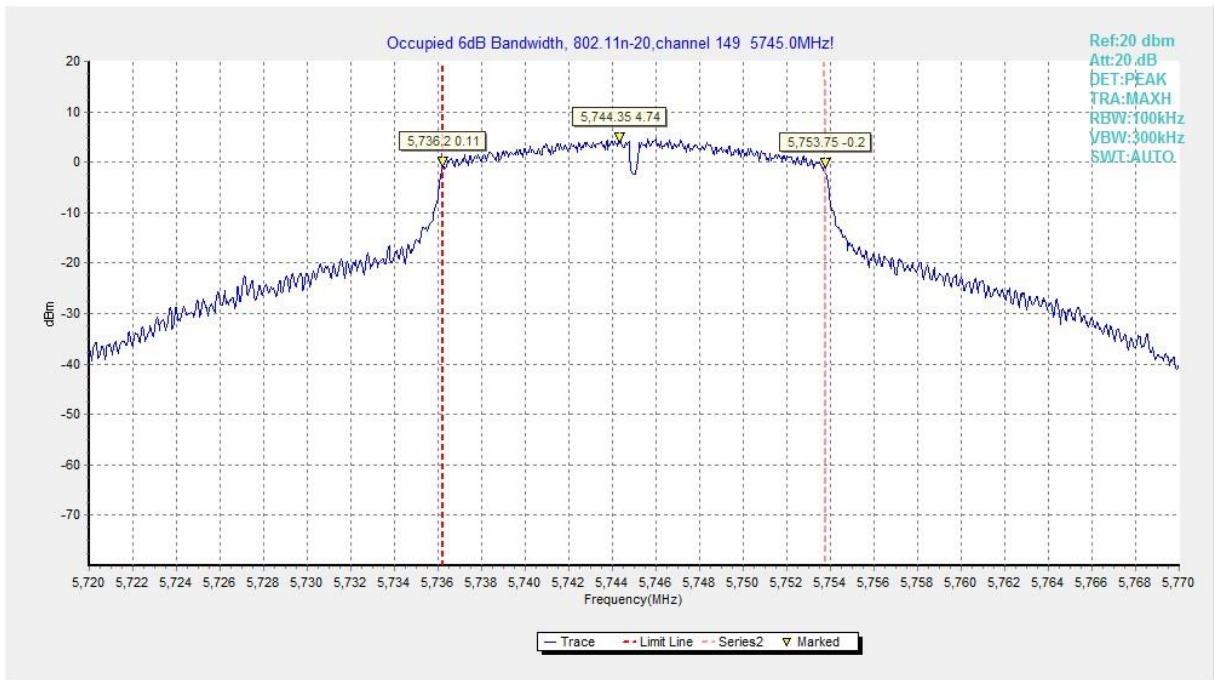


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

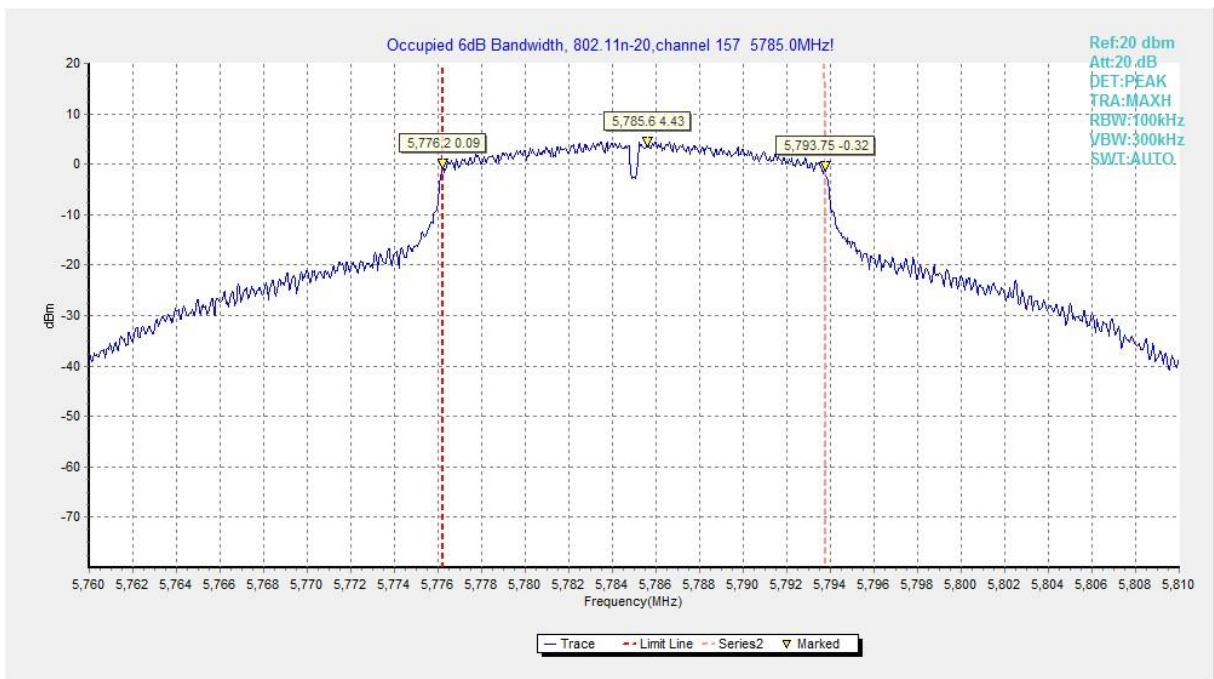


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

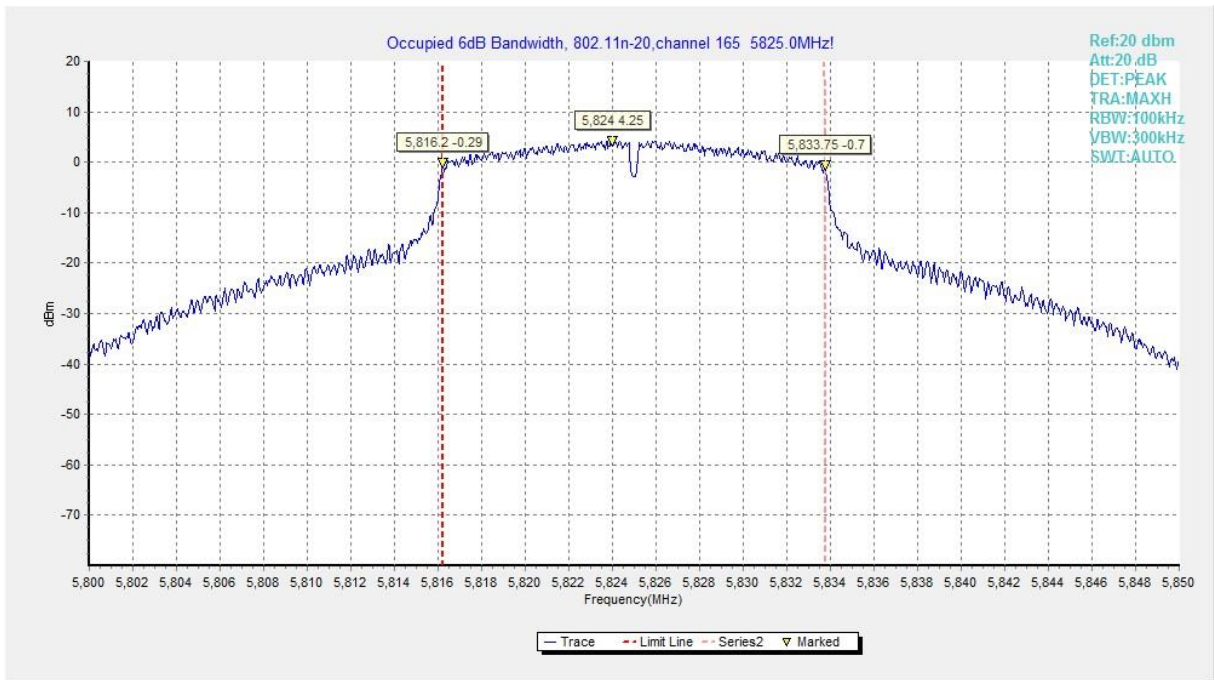


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

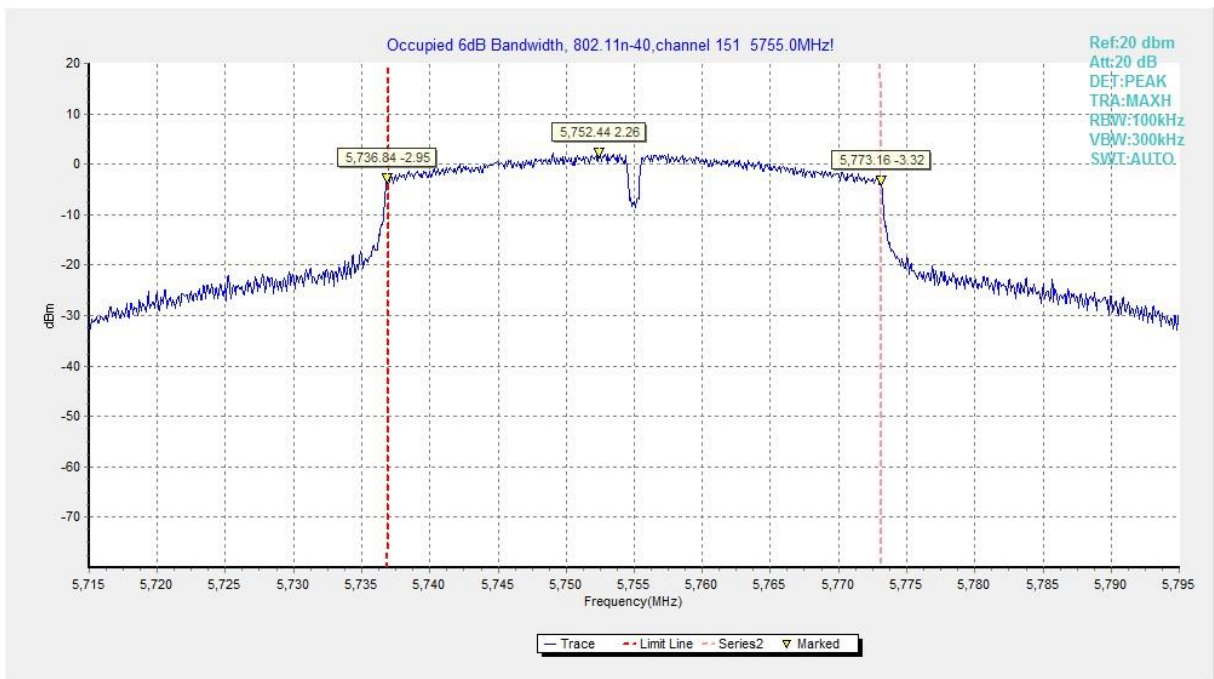


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

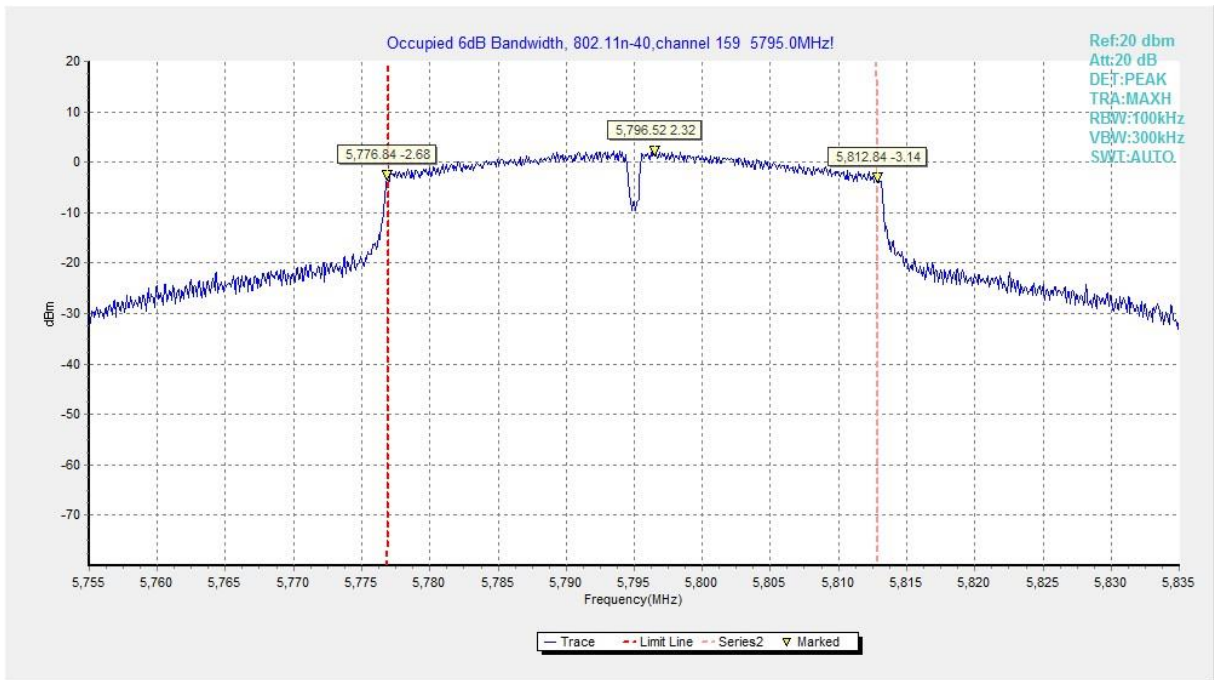


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)



Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

A.5. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

A.5.1 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: Increasing linearly from point to point.	

The measurement is made according to KDB 789033

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~ 1 GHz	---	P
		1 GHz ~ 3 GHz	---	P

		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	165	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	165	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT80 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT80)	155	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.
 P_{Mea} is the field strength recorded from the instrument.

Average Results:
802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17975.800	45.21	-25.50	46.66	24.05	54.00	8.79	V
17991.200	44.97	-25.50	46.66	23.81	54.00	9.03	V
14474.500	37.93	-28.59	42.46	24.06	54.00	16.07	V
14491.000	37.81	-28.59	42.46	23.94	54.00	16.19	V
11830.700	32.90	-31.85	39.05	25.70	54.00	21.10	V
11816.900	32.80	-31.85	39.05	25.60	54.00	21.20	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17975.800	44.76	-25.50	46.66	23.60	54.00	9.24	V
17995.000	44.76	-25.50	46.66	23.60	54.00	9.24	H
14496.000	37.94	-28.59	42.46	24.07	54.00	16.06	H
14487.100	37.88	-28.59	42.46	24.01	54.00	16.12	V
11832.300	32.60	-31.85	39.05	25.40	54.00	21.40	V
11918.100	32.56	-31.48	39.09	24.95	54.00	21.44	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.200	44.91	-25.50	46.66	23.75	54.00	9.09	V
17977.500	44.84	-25.50	46.66	23.68	54.00	9.16	V
14489.400	35.64	-28.59	42.46	21.77	54.00	18.36	V
14491.500	35.63	-28.59	42.46	21.76	54.00	18.37	H
11812.500	32.92	-31.85	39.05	25.72	54.00	21.08	V
11827.400	32.92	-31.85	39.05	25.72	54.00	21.08	V

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.200	44.92	-25.50	46.66	23.76	54.00	9.08	V
17985.200	44.90	-25.50	46.66	23.74	54.00	9.10	H
14478.900	37.95	-28.59	42.46	24.08	54.00	16.05	V
14496.500	37.95	-28.59	42.46	24.08	54.00	16.05	H
11817.500	32.74	-31.85	39.05	25.54	54.00	21.26	V
11853.800	32.64	-31.85	39.05	25.44	54.00	21.36	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	44.89	-25.50	46.66	23.73	54.00	9.11	V
17986.200	44.83	-25.50	46.66	23.67	54.00	9.17	V
14498.100	38.09	-28.59	42.46	24.22	54.00	15.91	V
14499.800	38.00	-28.59	42.46	24.13	54.00	16.00	H
11814.700	32.77	-31.85	39.05	25.57	54.00	21.23	H
11823.500	32.71	-31.85	39.05	25.51	54.00	21.29	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.700	44.80	-25.50	46.66	23.64	54.00	9.20	V
17993.400	44.78	-25.50	46.66	23.62	54.00	9.22	V
14498.700	35.78	-28.59	42.46	21.91	54.00	18.22	V
14489.900	35.56	-28.59	42.46	21.69	54.00	18.44	V
11834.000	33.31	-31.85	39.05	26.11	54.00	20.69	V
11818.000	33.04	-31.85	39.05	25.84	54.00	20.96	H

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.400	45.36	-25.50	46.66	24.20	54.00	8.64	H
17972.500	45.21	-25.50	46.66	24.05	54.00	8.79	H
14486.600	38.30	-28.59	42.46	24.43	54.00	15.70	H
14493.200	38.15	-28.59	42.46	24.28	54.00	15.85	V
11819.100	33.54	-31.85	39.05	26.34	54.00	20.46	H
11848.300	33.43	-31.85	39.05	26.23	54.00	20.57	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	45.35	-25.50	46.66	24.19	54.00	8.65	V
17982.400	45.10	-25.50	46.66	23.94	54.00	8.90	V
14498.700	38.34	-28.59	42.46	24.47	54.00	15.66	H
14474.000	38.26	-28.59	42.46	24.39	54.00	15.74	H
11896.100	33.52	-31.85	39.05	26.32	54.00	20.48	H
11810.300	33.46	-31.85	39.05	26.26	54.00	20.54	H

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.600	45.00	-25.50	46.66	23.84	54.00	9.00	H
17975.800	44.97	-25.50	46.66	23.81	54.00	9.03	V
14490.500	37.89	-28.59	42.46	24.02	54.00	16.11	V
14498.100	37.87	-28.59	42.46	24.00	54.00	16.13	V
11847.700	33.00	-31.85	39.05	25.80	54.00	21.00	H
11815.800	32.80	-31.85	39.05	25.60	54.00	21.20	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.400	44.93	-25.50	46.66	23.77	54.00	9.07	H
17997.200	44.85	-25.50	46.66	23.69	54.00	9.15	V
14496.000	38.19	-28.59	42.46	24.32	54.00	15.81	H
14499.800	37.96	-28.59	42.46	24.09	54.00	16.04	V
11845.000	33.14	-31.85	39.05	25.94	54.00	20.86	H
11820.800	32.91	-31.85	39.05	25.71	54.00	21.09	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.900	44.99	-25.50	46.66	23.83	54.00	9.01	V
17973.000	44.79	-25.50	46.66	23.63	54.00	9.21	V
14499.200	35.63	-28.59	42.46	21.76	54.00	18.37	H
14498.700	35.55	-28.59	42.46	21.68	54.00	18.45	V
11824.100	32.91	-31.85	39.05	25.71	54.00	21.09	H
11829.000	32.81	-31.85	39.05	25.61	54.00	21.19	H

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.200	45.09	-25.50	46.66	23.93	54.00	8.91	V
17998.900	45.05	-25.50	46.66	23.89	54.00	8.95	V
14489.400	38.19	-28.59	42.46	24.32	54.00	15.81	H
14497.000	38.18	-28.59	42.46	24.31	54.00	15.82	V
11928.000	33.55	-31.48	39.09	25.94	54.00	20.45	H
11819.100	33.41	-31.85	39.05	26.21	54.00	20.59	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	45.31	-25.50	46.66	24.15	54.00	8.69	V
17993.400	45.29	-25.50	46.66	24.13	54.00	8.71	V
14499.200	38.55	-28.59	42.46	24.68	54.00	15.45	H
14493.800	38.48	-28.59	42.46	24.61	54.00	15.52	V
11904.400	33.98	-31.85	39.05	26.78	54.00	20.02	V
11820.200	33.93	-31.85	39.05	26.73	54.00	20.07	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.500	45.21	-25.50	46.66	24.05	54.00	8.79	H
17988.500	45.17	-25.50	46.66	24.01	54.00	8.83	H
14494.900	38.43	-28.59	42.46	24.56	54.00	15.57	V
14490.500	38.37	-28.59	42.46	24.50	54.00	15.63	V
11826.800	33.67	-31.85	39.05	26.47	54.00	20.33	H
11720.100	33.44	-31.99	38.98	26.45	54.00	20.56	V

Peak Results:
802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.000	56.88	-25.50	46.66	35.72	74.00	17.12	V
17994.000	56.51	-25.50	46.66	35.35	74.00	17.49	H
14390.900	50.57	-28.42	42.34	36.65	68.30	17.73	H
14594.400	50.06	-27.29	41.90	35.45	68.30	18.24	V
11814.200	44.98	-31.85	39.05	37.78	74.00	29.02	H
11860.900	44.64	-31.85	39.05	37.44	74.00	29.36	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.800	56.38	-25.50	46.66	35.22	74.00	17.62	H
17978.000	56.34	-25.50	46.66	35.18	74.00	17.66	V
14292.500	50.27	-28.42	42.34	36.35	68.30	18.03	H
14324.400	50.15	-28.42	42.34	36.23	68.30	18.15	V
11846.600	45.23	-31.85	39.05	38.03	74.00	28.77	H
11999.500	44.81	-31.48	39.09	37.20	74.00	29.19	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.200	56.84	-25.50	46.66	35.68	74.00	17.16	H
17981.800	56.77	-25.50	46.66	35.61	74.00	17.23	H
14202.800	48.55	-28.99	42.00	35.53	68.30	19.75	V
14197.900	48.43	-28.99	42.00	35.41	68.30	19.87	V
11801.000	45.13	-31.85	39.05	37.93	74.00	28.87	H
11820.800	44.94	-31.85	39.05	37.74	74.00	29.06	H

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.600	56.30	-25.50	46.66	35.14	74.00	17.70	V
17991.200	56.22	-25.50	46.66	35.06	74.00	17.78	V
14311.100	50.14	-28.42	42.34	36.22	68.30	18.16	V
14324.900	49.87	-28.42	42.34	35.95	68.30	18.43	H
11714.100	45.40	-31.99	38.98	38.41	74.00	28.60	H
11993.500	45.01	-31.48	39.09	37.40	74.00	28.99	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.700	56.17	-25.50	46.66	35.01	74.00	17.83	H
17874.000	56.01	-25.50	46.66	34.85	74.00	17.99	H
14353.000	50.61	-28.42	42.34	36.69	68.30	17.69	H
14406.300	49.86	-28.59	42.46	35.99	68.30	18.44	H
11842.800	44.85	-31.85	39.05	37.65	74.00	29.15	V
11927.500	44.74	-31.48	39.09	37.13	74.00	29.26	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.800	57.41	-25.50	46.66	36.25	74.00	16.59	V
17976.300	56.75	-25.50	46.66	35.59	74.00	17.25	V
14284.200	48.62	-28.42	42.34	34.70	68.30	19.68	H
14728.000	48.23	-28.32	41.35	35.21	68.30	20.07	H
11815.300	46.22	-31.85	39.05	39.02	74.00	27.78	H
11819.100	45.06	-31.85	39.05	37.86	74.00	28.94	H

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.000	56.85	-25.50	46.66	35.69	74.00	17.15	V
17998.900	56.74	-25.50	46.66	35.58	74.00	17.26	H
14698.900	50.39	-28.32	41.35	37.37	68.30	17.91	H
14477.800	50.13	-28.59	42.46	36.26	74.00	23.87	V
11847.700	45.76	-31.85	39.05	38.56	74.00	28.24	H
11686.000	45.55	-31.99	38.98	38.56	74.00	28.45	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.400	57.06	-25.50	46.66	35.90	74.00	16.94	H
17995.000	56.76	-25.50	46.66	35.60	74.00	17.24	V
14816.000	50.26	-28.32	41.35	37.24	68.30	18.04	V
14392.000	50.25	-28.42	42.34	36.33	68.30	18.05	H
11583.200	45.45	-32.31	38.91	38.86	74.00	28.55	H
11922.000	45.14	-31.48	39.09	37.53	74.00	28.86	H

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.300	57.77	-25.50	46.66	36.61	74.00	16.23	V
17989.000	57.32	-25.50	46.66	36.16	74.00	16.68	H
14360.100	50.49	-28.42	42.34	36.57	68.30	17.81	H
14418.400	49.96	-28.59	42.46	36.09	68.30	18.34	H
11716.800	44.76	-31.99	38.98	37.77	74.00	29.24	V
11924.700	44.42	-31.48	39.09	36.81	74.00	29.58	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17963.700	56.38	-25.50	46.66	35.22	74.00	17.62	V
17927.400	56.04	-25.50	46.66	34.88	74.00	17.96	V
14381.000	49.99	-28.42	42.34	36.07	68.30	18.31	V
14418.400	49.83	-28.59	42.46	35.96	68.30	18.47	H
11858.700	44.75	-31.85	39.05	37.55	74.00	29.25	H
11828.500	44.51	-31.85	39.05	37.31	74.00	29.49	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.200	56.82	-25.50	46.66	35.66	74.00	17.18	V
17991.800	56.50	-25.50	46.66	35.34	74.00	17.50	H
14177.500	48.59	-28.99	42.00	35.57	68.30	19.71	V
15022.900	48.20	-27.85	40.21	35.84	68.30	20.10	V
11814.700	45.01	-31.85	39.05	37.81	74.00	28.99	V
11814.200	44.70	-31.85	39.05	37.50	74.00	29.30	V

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	57.05	-25.50	46.66	35.89	74.00	16.95	H
17979.100	56.36	-25.50	46.66	35.20	74.00	17.64	H
14112.600	50.21	-28.99	42.00	37.19	68.30	18.09	V
14492.600	50.07	-28.59	42.46	36.20	74.00	23.93	V
11820.800	45.52	-31.85	39.05	38.32	74.00	28.48	V
11736.600	45.16	-31.99	38.98	38.17	74.00	28.84	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.600	57.60	-25.50	46.66	36.44	74.00	16.40	H
17973.000	57.09	-25.50	46.66	35.93	74.00	16.91	V
14293.500	50.64	-28.42	42.34	36.72	68.30	17.66	H
14813.900	50.45	-28.32	41.35	37.43	68.30	17.85	V
11609.600	45.80	-32.31	38.91	39.21	74.00	28.20	H
11518.300	45.35	-32.26	38.84	38.78	74.00	28.65	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17928.500	56.74	-25.50	46.66	35.58	74.00	17.26	V
17981.800	56.49	-25.50	46.66	35.33	74.00	17.51	H
14313.400	50.71	-28.42	42.34	36.79	68.30	17.59	H
14596.000	50.55	-27.29	41.90	35.94	68.30	17.75	H
11592.000	45.29	-32.31	38.91	38.70	74.00	28.71	V
11845.500	45.19	-31.85	39.05	37.99	74.00	28.81	H

A.6. Band Edges Compliance

A6.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
	FCC 47 CFR Part 15.407	at the band edge
at 5 MHz above or below the band edge		15.6
at 25 MHz above or below the band edge		10
at 75 MHz or more above or below the band edge		-27
Note: increasing linearly from point to point.		

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.10	P
	5825 MHz	Fig.11	P
802.11n HT20	5745 MHz	Fig.12	P
	5825 MHz	Fig.13	P
802.11n HT40	5755 MHz	Fig.14	P
	5795 MHz	Fig.15	P
802.11ac HT20	5745 MHz	Fig.16	P
	5825 MHz	Fig.17	P
802.11ac HT40	5755 MHz	Fig.18	P
	5795 MHz	Fig.19	P
802.11ac HT80	5775 MHz	Fig.20 Fig.21	P

Conclusion: PASS

Test graphs as below:

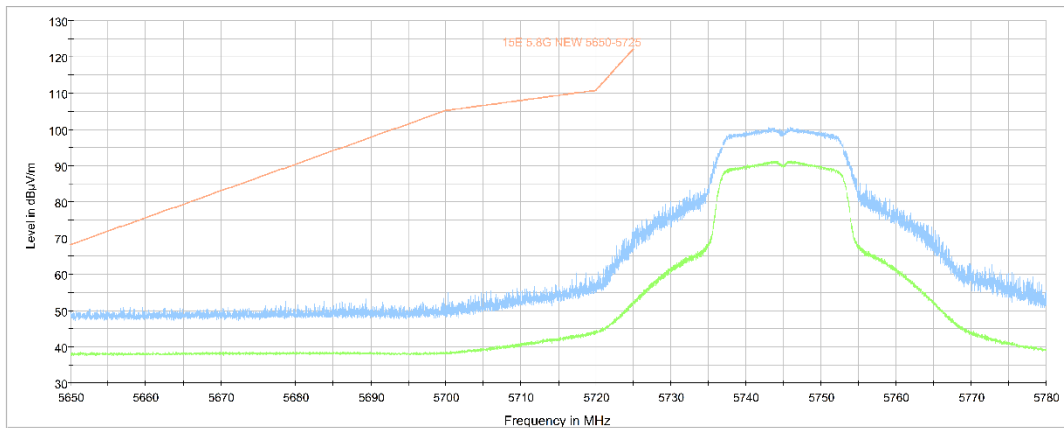


Fig. 10 Band Edges (802.11a Ch149,5745MHz)

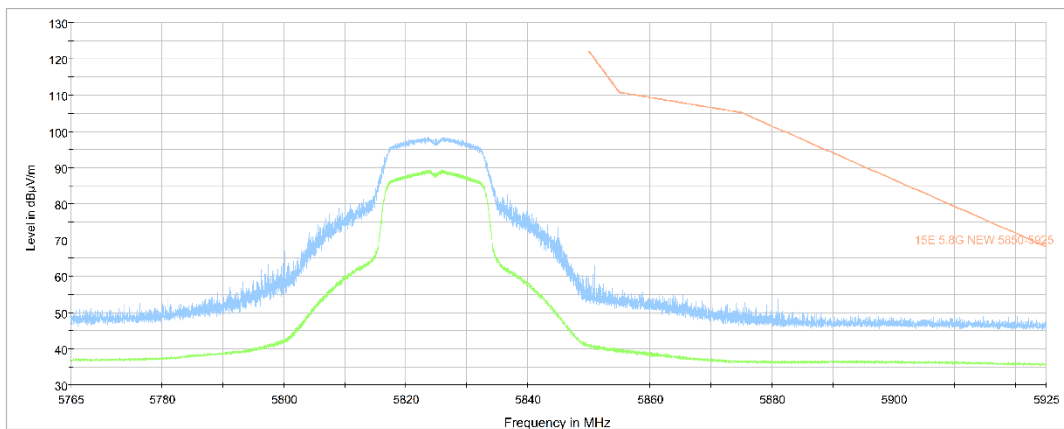


Fig. 11 Band Edges (802.11a Ch165, 5825MHz)

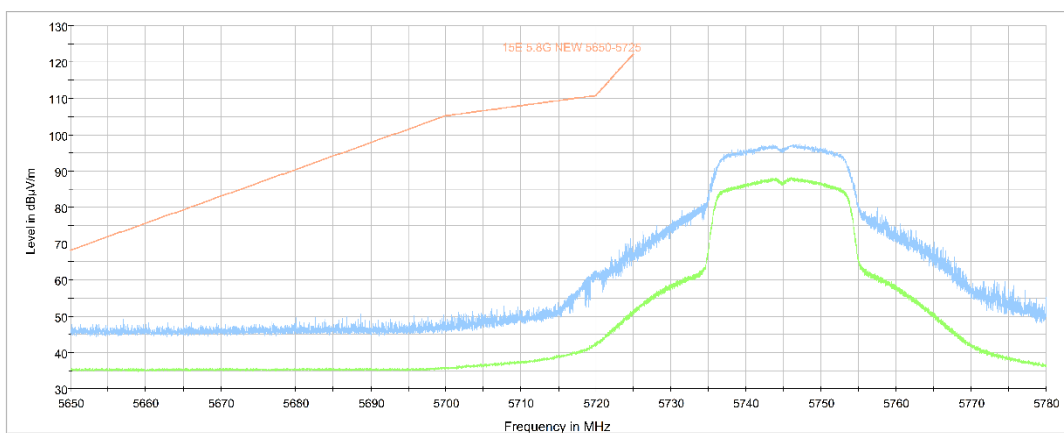


Fig. 12 Band Edges (802.11n-HT20 Ch149, 5745MHz)

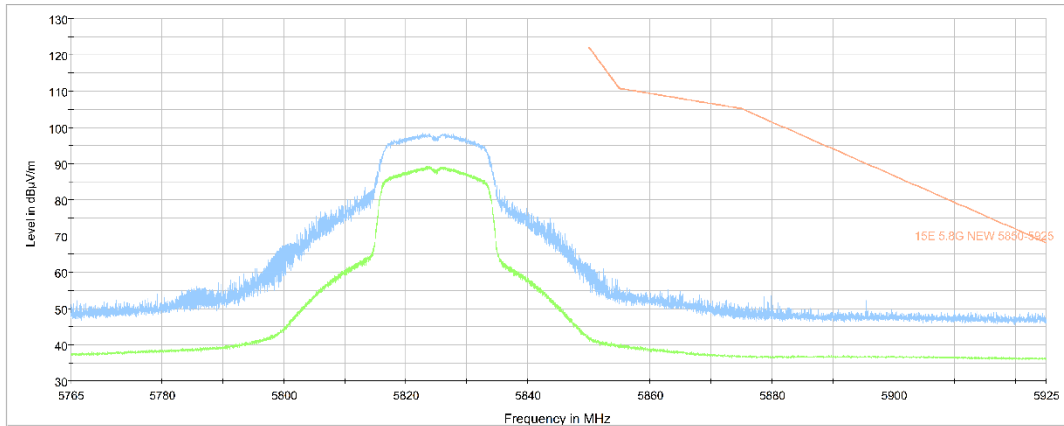


Fig. 13 Band Edges (802.11n-HT20 Ch165, 5825MHz)

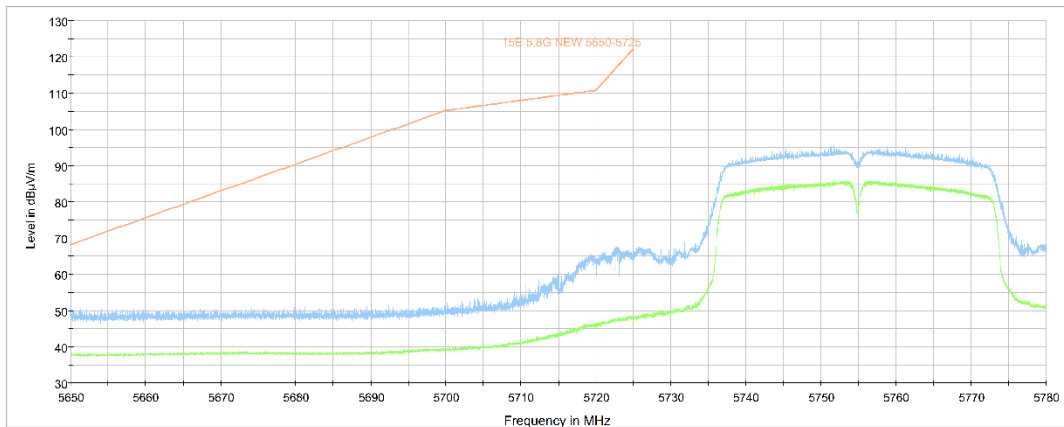


Fig. 14 Band Edges (802.11n-HT40 Ch151, 5755MHz)

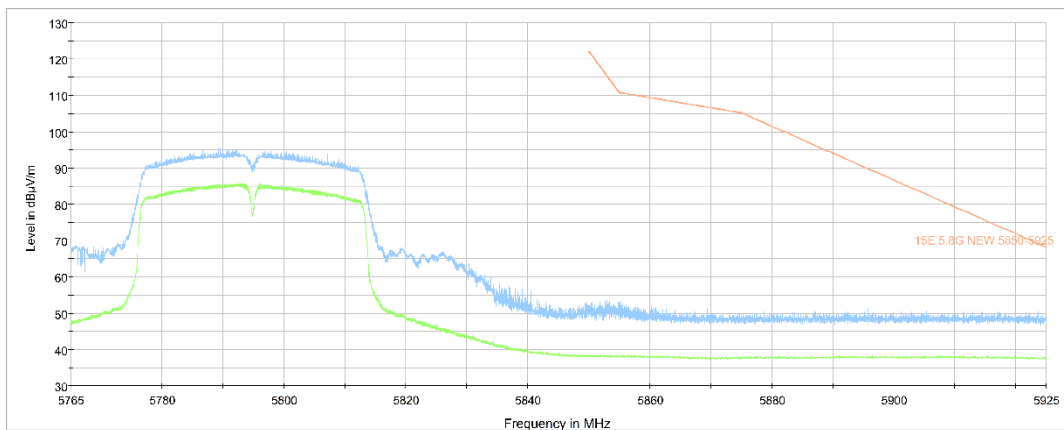


Fig. 15 Band Edges (802.11n-HT40 Ch159, 5795MHz)

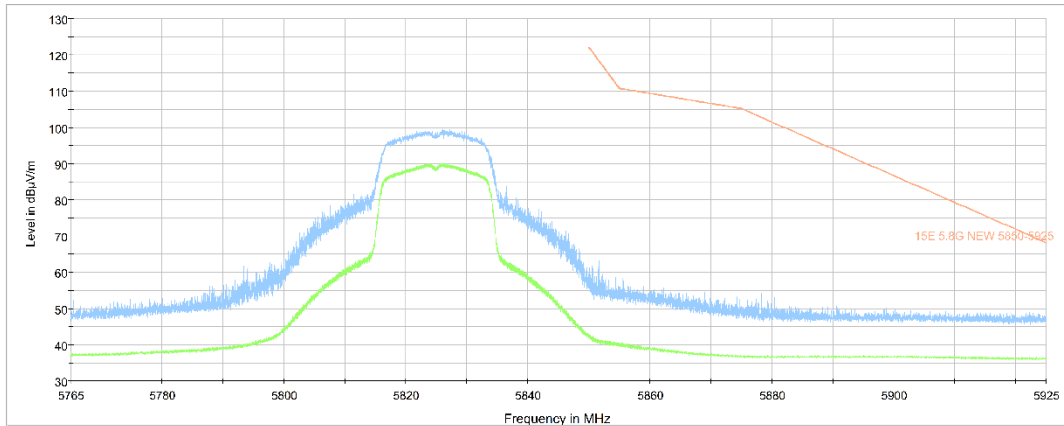


Fig. 16 Band Edges (802.11ac-HT20 Ch149, 5745MHz)

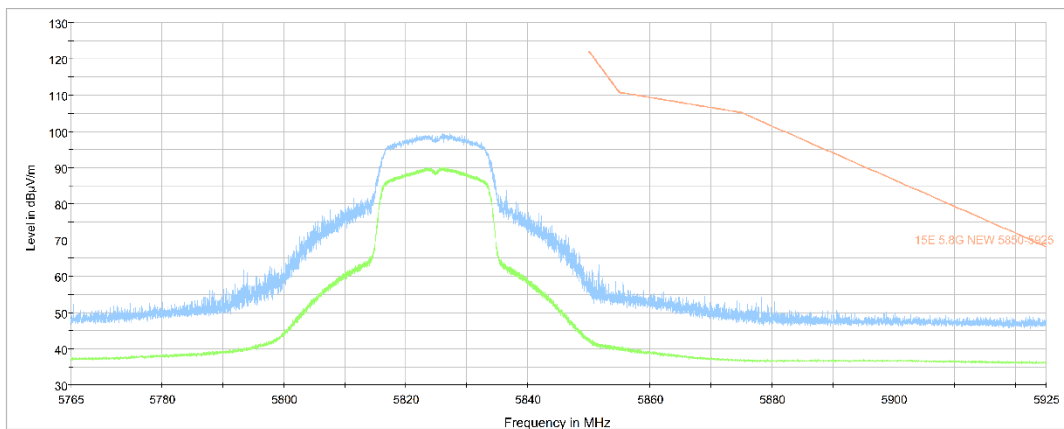


Fig. 17 Band Edges (802.11ac-HT20 Ch165, 5825MHz)

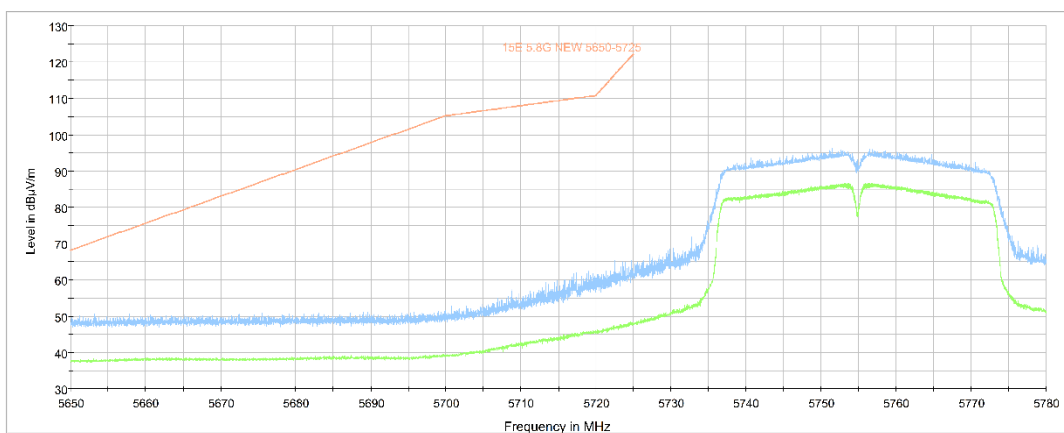


Fig. 18 Band Edges (802.11ac-HT40 Ch151, 5755MHz)

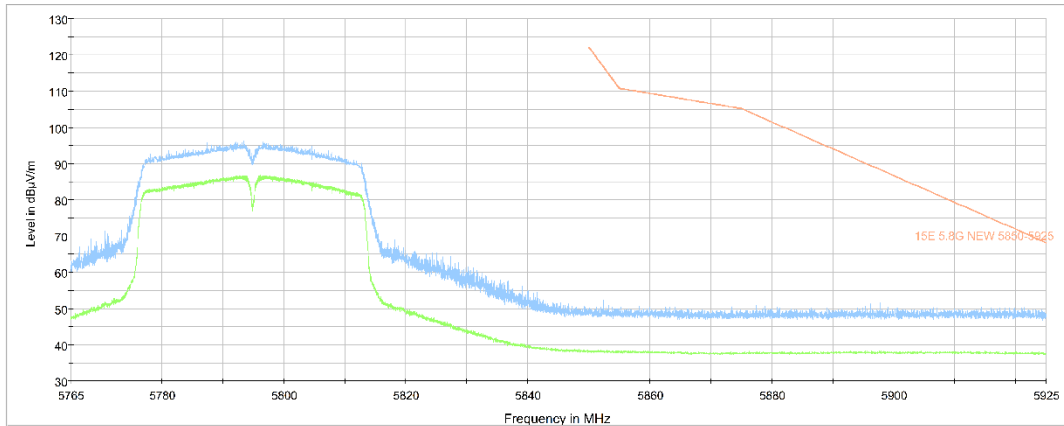


Fig. 19 Band Edges (802.11ac-HT40 Ch159, 5795MHz)

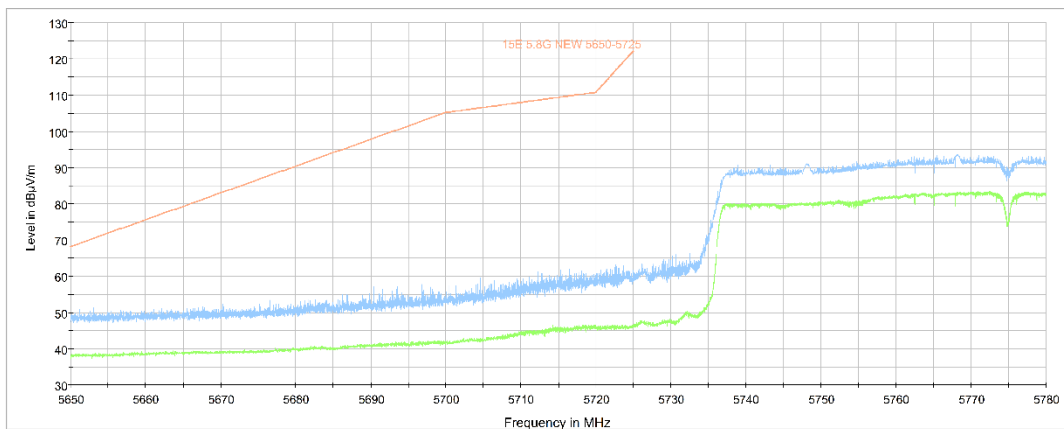


Fig. 20 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

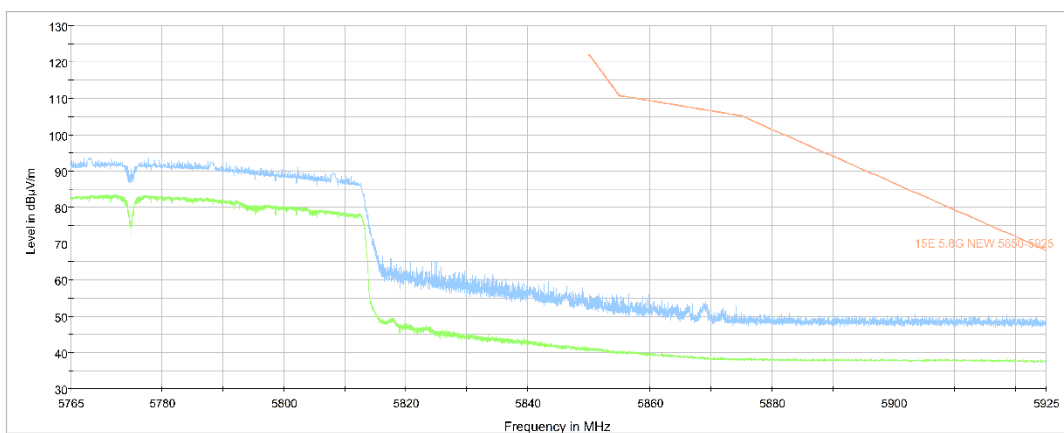


Fig. 21 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.08\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.22	Fig.23	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.22	Fig.23	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS

Test graphs as below:

Traffic:

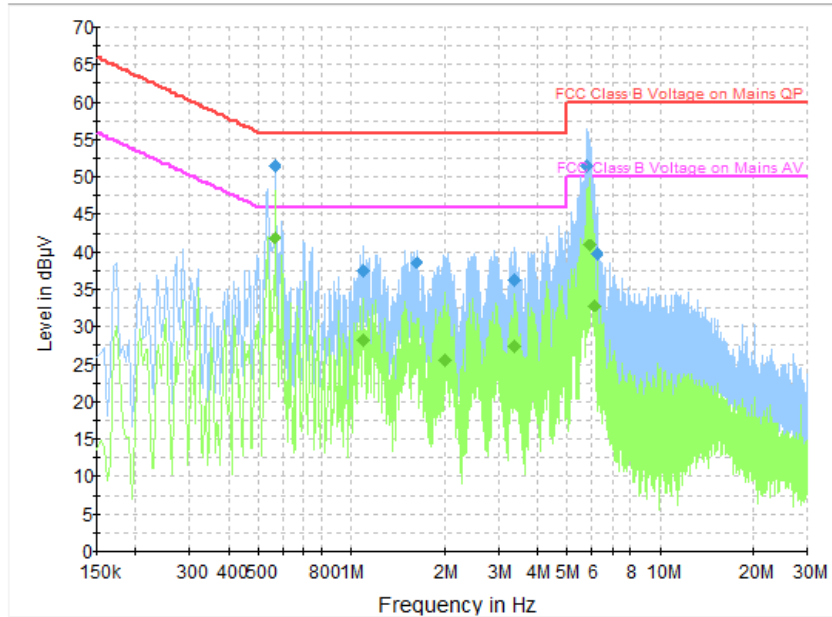


Fig. 22 AC Power line Conducted Emission-802.11a

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	51.6	2000.0	9.000	On	L1	19.8	4.4	56.0	
1.094000	37.4	2000.0	9.000	On	L1	19.5	18.6	56.0	
1.630000	38.6	2000.0	9.000	On	L1	19.5	17.4	56.0	
3.374000	36.3	2000.0	9.000	On	L1	19.5	19.7	56.0	
5.774000	51.5	2000.0	9.000	On	L1	19.5	8.5	60.0	
6.198000	39.7	2000.0	9.000	On	L1	19.6	20.3	60.0	

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	42.0	2000.0	9.000	On	L1	19.8	4.0	46.0	
1.098000	28.2	2000.0	9.000	On	L1	19.5	17.8	46.0	
2.002000	25.6	2000.0	9.000	On	L1	19.4	20.4	46.0	
3.374000	27.4	2000.0	9.000	On	L1	19.5	18.6	46.0	
5.878000	41.0	2000.0	9.000	On	L1	19.5	9.0	50.0	
6.126000	32.9	2000.0	9.000	On	L1	19.6	17.1	50.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

Idle:

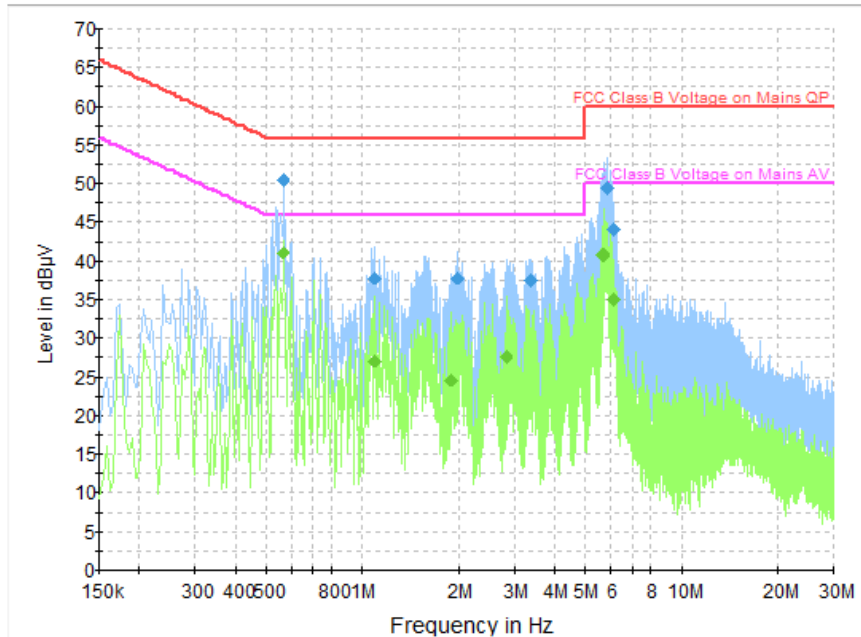


Fig. 23 AC Power line Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	50.5	2000.0	9.000	On	L1	19.8	5.5	56.0	
1.098000	37.7	2000.0	9.000	On	L1	19.5	18.3	56.0	
1.986000	37.8	2000.0	9.000	On	L1	19.4	18.2	56.0	
3.370000	37.5	2000.0	9.000	On	L1	19.5	18.5	56.0	
5.814000	49.5	2000.0	9.000	On	L1	19.5	10.5	60.0	
6.122000	44.0	2000.0	9.000	On	L1	19.6	16.0	60.0	

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	41.2	2000.0	9.000	On	N	19.9	4.8	46.0	
1.098000	27.0	2000.0	9.000	On	L1	19.5	19.0	46.0	
1.906000	24.5	2000.0	9.000	On	L1	19.4	21.5	46.0	
2.834000	27.6	2000.0	9.000	On	L1	19.5	18.4	46.0	
5.698000	40.7	2000.0	9.000	On	L1	19.5	9.3	50.0	
6.122000	35.0	2000.0	9.000	On	L1	19.6	15.0	50.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology	
	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 Effective Dates	 For the National Voluntary Laboratory Accreditation Program

*** END OF REPORT BODY ***