

| 5G n70-DSI1 |             |                       |                 |       |                     |             |                     |
|-------------|-------------|-----------------------|-----------------|-------|---------------------|-------------|---------------------|
| SCS (kHz)   | NR BW (MHz) | Modulation            | RB allocation   |       | NR Test Freq. (MHz) | NR Test CH. | Power Results (dBm) |
| 15          | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1707.5              | 341500      | 22.48               |
| 15          | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1702.5              | 340500      | 22.57               |
| 15          | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1697.5              | 339500      | 22.51               |
| 15          | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1705                | 341000      | 22.28               |
| 15          | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1702.5              | 340500      | 22.37               |
| 15          | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1700                | 340000      | 22.32               |
| 15          | 5           | DFT-s-OFDM PI/2 BPSK1 | Inner_Full      | 12_6  | 1702.5              | 340500      | 22.56               |
| 15          | 5           | DFT-s-OFDM 16QAM      | Inner_Full      | 12_6  | 1702.5              | 340500      | 21.73               |
| 15          | 5           | DFT-s-OFDM 64QAM      | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.18               |
| 15          | 5           | DFT-s-OFDM 256QAM     | Inner_Full      | 12_6  | 1702.5              | 340500      | 18.15               |
| 15          | 5           | CP-OFDM QPSK          | Inner_Full      | 12_6  | 1702.5              | 340500      | 21.16               |
| 15          | 5           | CP-OFDM 16QAM         | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.72               |
| 15          | 5           | CP-OFDM 64QAM         | Inner_Full      | 12_6  | 1702.5              | 340500      | 19.16               |
| 15          | 5           | CP-OFDM 256QAM        | Inner_Full      | 12_6  | 1702.5              | 340500      | 17.29               |
| 15          | 5           | DFT-s-OFDM QPSK       | Edge_Full_Right | 2_23  | 1702.5              | 340500      | 21.42               |
| 15          | 5           | DFT-s-OFDM QPSK       | Edge_Full_Left  | 2_0   | 1702.5              | 340500      | 21.18               |
| 15          | 5           | DFT-s-OFDM QPSK       | Edge_1RB_Right  | 1_24  | 1702.5              | 340500      | 21.17               |
| 15          | 5           | DFT-s-OFDM QPSK       | Edge_1RB_Left   | 1_0   | 1702.5              | 340500      | 21.24               |
| 15          | 5           | DFT-s-OFDM QPSK       | Inner_1RB_Right | 1_23  | 1702.5              | 340500      | 22.16               |
| 15          | 5           | DFT-s-OFDM QPSK       | Inner_1RB_Left  | 1_1   | 1702.5              | 340500      | 22.21               |
| 15          | 5           | DFT-s-OFDM QPSK       | Outer_Full      | 25_0  | 1702.5              | 340500      | 21.03               |
| 15          | 15          | DFT-s-OFDM QPSK       | Inner_Full      | 36_18 | 1702.5              | 340500      | 22.11               |

| 5G n70-DSI2/DSI3 |             |                       |                 |       |                     |             |                     |
|------------------|-------------|-----------------------|-----------------|-------|---------------------|-------------|---------------------|
| SCS (kHz)        | NR BW (MHz) | Modulation            | RB allocation   |       | NR Test Freq. (MHz) | NR Test CH. | Power Results (dBm) |
| 15               | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1707.5              | 341500      | 20.09               |
| 15               | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.15               |
| 15               | 5           | DFT-s-OFDM QPSK       | Inner_Full      | 12_6  | 1697.5              | 339500      | 20.10               |
| 15               | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1705                | 341000      | 19.88               |
| 15               | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1702.5              | 340500      | 19.91               |
| 15               | 10          | DFT-s-OFDM QPSK       | Inner_Full      | 25_12 | 1700                | 340000      | 19.91               |
| 15               | 5           | DFT-s-OFDM PI/2 BPSK1 | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.12               |
| 15               | 5           | DFT-s-OFDM 16QAM      | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.12               |
| 15               | 5           | DFT-s-OFDM 64QAM      | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.09               |
| 15               | 5           | DFT-s-OFDM 256QAM     | Inner_Full      | 12_6  | 1702.5              | 340500      | 18.60               |
| 15               | 5           | CP-OFDM QPSK          | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.07               |
| 15               | 5           | CP-OFDM 16QAM         | Inner_Full      | 12_6  | 1702.5              | 340500      | 20.13               |
| 15               | 5           | CP-OFDM 64QAM         | Inner_Full      | 12_6  | 1702.5              | 340500      | 19.57               |
| 15               | 5           | CP-OFDM 256QAM        | Inner_Full      | 12_6  | 1702.5              | 340500      | 16.49               |
| 15               | 5           | DFT-s-OFDM QPSK       | Edge_Full_Right | 2_23  | 1702.5              | 340500      | 19.98               |
| 15               | 5           | DFT-s-OFDM QPSK       | Edge_Full_Left  | 2_0   | 1702.5              | 340500      | 20.03               |
| 15               | 5           | DFT-s-OFDM QPSK       | Edge_1RB_Right  | 1_24  | 1702.5              | 340500      | 19.98               |
| 15               | 5           | DFT-s-OFDM QPSK       | Edge_1RB_Left   | 1_0   | 1702.5              | 340500      | 20.05               |
| 15               | 5           | DFT-s-OFDM QPSK       | Inner_1RB_Right | 1_23  | 1702.5              | 340500      | 20.04               |
| 15               | 5           | DFT-s-OFDM QPSK       | Inner_1RB_Left  | 1_1   | 1702.5              | 340500      | 20.07               |
| 15               | 5           | DFT-s-OFDM QPSK       | Outer_Full      | 25_0  | 1702.5              | 340500      | 20.09               |
| 15               | 15          | DFT-s-OFDM QPSK       | Inner_Full      | 36_18 | 1702.5              | 340500      | 20.05               |

### I.3 SAR Test Results

**Table I.3-1: SAR Values (5G NR n2-Head)**

| Frequency  |        | Side  | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|--|--------|-------|---------------|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Ch.  | MHz    |       |               |                 |                       |                          |                          |                          |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5°C |        |       |               |                 |                       |                          |                          |                          |                         |                         |                  |
| 370500   | 1852.5 | Left  | Cheek         | /               | 19.51                 | 20                       | 0.120                    | <b>0.13</b>              | 0.225                   | <b>0.25</b>             | 0.02             |
| 370500   | 1852.5 | Left  | Tilt          | /               | 19.51                 | 20                       | 0.071                    | <b>0.08</b>              | 0.119                   | <b>0.13</b>             | 0.04             |
| 370500   | 1852.5 | Right | Cheek         | Fig.1           | 19.51                 | 20                       | 0.258                    | <b>0.29</b>              | 0.552                   | <b>0.62</b>             | 0.15             |
| 370500   | 1852.5 | Right | Tilt          | /               | 19.51                 | 20                       | 0.081                    | <b>0.09</b>              | 0.143                   | <b>0.16</b>             | -0.14            |

Note1: The results are for SA&ENDC.

**Table I.3-2: SAR Values (5G NR n2-Body worn)**

| Frequency  |        | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|--|--------|---------------|-----------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|------------------|
| Ch.  | MHz    |               |                 |                       |                          |                          |                         |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5°C |        |               |                 |                       |                          |                          |                         |                         |                         |                  |
| 370500   | 1852.5 | Front         | /               | 22.72                 | 22.8                     | 0.077                    | <b>0.08</b>             | 0.135                   | <b>0.14</b>             | -0.05            |
| 370500   | 1852.5 | Rear          | Fig.2           | 22.72                 | 22.8                     | 0.190                    | <b>0.19</b>             | 0.348                   | <b>0.35</b>             | 0.08             |

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The results are for SA&ENDC.

**Table I.3-3: SAR Values (5G NR n2-Hotspot)**

| Frequency  |        | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|--|--------|---------------|-----------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|------------------|
| Ch.  | MHz    |               |                 |                       |                          |                          |                         |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5°C |        |               |                 |                       |                          |                          |                         |                         |                         |                  |
| 370500   | 1852.5 | Front         | /               | 19.51                 | 20                       | 0.074                    | <b>0.08</b>             | 0.131                   | <b>0.15</b>             | -0.11            |
| 370500   | 1852.5 | Rear          | /               | 19.51                 | 20                       | 0.183                    | <b>0.20</b>             | 0.366                   | <b>0.41</b>             | 0.18             |
| 370500   | 1852.5 | Left          | Fig.3           | 19.51                 | 20                       | 0.240                    | <b>0.27</b>             | 0.386                   | <b>0.43</b>             | -0.05            |
| 370500   | 1852.5 | Top           | /               | 19.51                 | 20                       | 0.036                    | <b>0.04</b>             | 0.062                   | <b>0.07</b>             | 0.09             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The results are for SA&ENDC.

**Table I.3-4: SAR Values (5G NR n5-Head)**

| Frequency   |       | Side  | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|---|-------|-------|---------------|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Ch.   | MHz   |       |               |                 |                       |                          |                          |                          |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |       |       |               |                 |                       |                          |                          |                          |                         |                         |                  |
| 169300  | 846.5 | Left  | Cheek         | /               | 23.85                 | 24.2                     | 0.575                    | <b>0.62</b>              | 0.780                   | <b>0.85</b>             | -0.02            |
| 167300  | 836.5 | Left  | Cheek         | /               | 23.82                 | 24.2                     | 0.558                    | <b>0.61</b>              | 0.752                   | <b>0.82</b>             | -0.05            |
| 165300  | 826.5 | Left  | Cheek         | Fig.4           | 23.99                 | 24.2                     | 0.599                    | <b>0.63</b>              | 0.824                   | <b>0.86</b>             | -0.03            |
| 165300  | 826.5 | Left  | Tilt          | /               | 23.99                 | 24.2                     | 0.358                    | <b>0.38</b>              | 0.686                   | <b>0.72</b>             | 0.04             |
| 165300  | 826.5 | Right | Cheek         | /               | 23.99                 | 24.2                     | 0.333                    | <b>0.35</b>              | 0.567                   | <b>0.60</b>             | -0.15            |
| 165300  | 826.5 | Right | Tilt          | /               | 23.99                 | 24.2                     | 0.292                    | <b>0.31</b>              | 0.544                   | <b>0.57</b>             | 0.09             |
| 165300  | 826.5 | Left  | Cheek         | Note1           | 20.89                 | 21                       | 0.197                    | <b>0.20</b>              | 0.335                   | <b>0.34</b>             | 0.15             |
| 165300  | 826.5 | Left  | Tilt          | Note1           | 20.89                 | 21                       | 0.179                    | <b>0.18</b>              | 0.349                   | <b>0.36</b>             | 0.02             |
| 165300  | 826.5 | Right | Cheek         | Note1           | 20.89                 | 21                       | 0.181                    | <b>0.19</b>              | 0.305                   | <b>0.31</b>             | 0.11             |
| 165300  | 826.5 | Right | Tilt          | Note1           | 20.89                 | 21                       | 0.144                    | <b>0.15</b>              | 0.264                   | <b>0.27</b>             | -0.04            |

Note1: The results are for ENDC only. The other results are for SA.

**Table I.3-5: SAR Values (5G NR n5-Body worn)**

| Frequency   |       | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|---|-------|---------------|-----------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|------------------|
| Ch.   | MHz   |               |                 |                       |                          |                          |                         |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |       |               |                 |                       |                          |                          |                         |                         |                         |                  |
| 165300  | 826.5 | Front         | /               | 23.99                 | 24.2                     | 0.164                    | <b>0.17</b>             | 0.211                   | <b>0.22</b>             | 0.16             |
| 165300  | 826.5 | Rear          | Fig.5           | 23.99                 | 24.2                     | 0.203                    | <b>0.21</b>             | 0.263                   | <b>0.28</b>             | -0.10            |

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The results are for SA&ENDC.

**Table I.3-6: SAR Values (5G NR n5-Hotspot)**

| Frequency   |       | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|---|-------|---------------|-----------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|------------------|
| Ch.   | MHz   |               |                 |                       |                          |                          |                         |                         |                         |                  |
| Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |       |               |                 |                       |                          |                          |                         |                         |                         |                  |
| 165300  | 826.5 | Front         | /               | 23.99                 | 24.2                     | 0.164                    | <b>0.17</b>             | 0.273                   | <b>0.29</b>             | -0.07            |
| 165300  | 826.5 | Rear          | /               | 23.99                 | 24.2                     | 0.186                    | <b>0.20</b>             | 0.296                   | <b>0.31</b>             | 0.15             |
| 165300  | 826.5 | Left          | /               | 23.99                 | 24.2                     | 0.132                    | <b>0.14</b>             | 0.195                   | <b>0.20</b>             | 0.02             |
| 165300  | 826.5 | Right         | /               | 23.99                 | 24.2                     | 0.224                    | <b>0.24</b>             | 0.332                   | <b>0.35</b>             | 0.08             |
| 165300  | 826.5 | Top           | Fig.6           | 23.99                 | 24.2                     | 0.181                    | <b>0.19</b>             | 0.336                   | <b>0.35</b>             | 0.03             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The results are for SA&ENDC.

**Table I.3-7: SAR Values (5G NR n70-Head)**

| Frequency |        | Side  | Test Position | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|--------|---|---------------|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Ch.       | MHz    |   |               |                 |                       |                          |                          |                          |                         |                         |                  |
|           |        | Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |               |                 |                       |                          |                          |                          |                         |                         |                  |
| 340500    | 1702.5 | Left  | Cheek         | /               | 20.15                 | 21.5                     | 0.128                    | <b>0.17</b>              | 0.226                   | <b>0.31</b>             | 0.02             |
| 340500    | 1702.5 | Left  | Tilt          | /               | 20.15                 | 21.5                     | 0.068                    | <b>0.09</b>              | 0.116                   | <b>0.16</b>             | 0.16             |
| 340500    | 1702.5 | Right   | Cheek         | Fig.7           | 20.15                 | 21.5                     | 0.276                    | <b>0.38</b>              | 0.577                   | <b>0.79</b>             | 0.15             |
| 340500    | 1702.5 | Right   | Tilt          | /               | 20.15                 | 21.5                     | 0.094                    | <b>0.13</b>              | 0.175                   | <b>0.24</b>             | -0.01            |

Note: All the results are for SA only.

**Table I.3-8: SAR Values (5G NR n70-Body worn)**

| Frequency |        | Test Position   | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Report ed SAR(10g)(W/kg) | Measure d SAR(1g) (W/kg) | Reporte d SAR(1g) (W/kg) | Power Drift (dB) |  |
|-----------|--------|---|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|------------------|--|
| Ch.       | MHz    |   |                 |                       |                          |                          |                          |                          |                          |                  |  |
|           |        | Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |                 |                       |                          |                          |                          |                          |                          |                  |  |
| 340500    | 1702.5 | Front   | /               | 22.57                 | 22.8                     | 0.080                    | <b>0.08</b>              | 0.139                    | <b>0.15</b>              | -0.01            |  |
| 340500    | 1702.5 | Rear  | Fig.8           | 22.57                 | 22.8                     | 0.198                    | <b>0.21</b>              | 0.352                    | <b>0.37</b>              | -0.04            |  |

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: All the results are for SA only.

**Table I.3-9: SAR Values (5G NR n70-Hotspot)**

| Frequency |        | Test Position   | Figure No./Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Report ed SAR(10g)(W/kg) | Measure d SAR(1g) (W/kg) | Reporte d SAR(1g) (W/kg) | Power Drift (dB) |  |
|-----------|--------|---|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|------------------|--|
| Ch.       | MHz    |   |                 |                       |                          |                          |                          |                          |                          |                  |  |
|           |        | Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C |                 |                       |                          |                          |                          |                          |                          |                  |  |
| 340500    | 1702.5 | Front   | /               | 20.15                 | 21.5                     | 0.087                    | <b>0.12</b>              | 0.159                    | <b>0.22</b>              | -0.18            |  |
| 340500    | 1702.5 | Rear  | Fig.9           | 20.15                 | 21.5                     | 0.210                    | <b>0.29</b>              | 0.408                    | <b>0.56</b>              | 0.01             |  |
| 340500    | 1702.5 | Left  | /               | 20.15                 | 21.5                     | 0.133                    | <b>0.18</b>              | 0.263                    | <b>0.36</b>              | -0.05            |  |
| 340500    | 1702.5 | Top   | /               | 20.15                 | 21.5                     | 0.037                    | <b>0.05</b>              | 0.061                    | <b>0.08</b>              | -0.09            |  |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: All the results are for SA only.

**I.4 Evaluation of simultaneous for ENDC**
**Table I.4-1: The SAR values for newly add ENDC**

|      | LTE          | NR       | Mode | Position    | Reported SAR 1g(W/kg) |
|------|--------------|----------|------|-------------|-----------------------|
| ENDC | LTE B2-ANT6  | n2-ANT4  | Head | Right Cheek | <b>0.71</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.56</b>           |
|      |              | n5-ANT2  | Head | Left Tilt   | <b>0.41</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.46</b>           |
|      |              | n77-ANT1 | Head | Right Cheek | <b>0.22</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.29</b>           |
|      | LTE B12-ANT2 | n2-ANT4  | Head | Right Cheek | <b>0.78</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.70</b>           |
|      |              | n77-ANT1 | Head | Left Cheek  | <b>0.33</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.79</b>           |
|      | LTE B66-ANT6 | n2-ANT4  | Head | Right Cheek | <b>0.75</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.52</b>           |
|      |              | n5-ANT2  | Head | Right Cheek | <b>0.44</b>           |
|      |              |          | Body | Right 10mm  | <b>0.46</b>           |
|      |              | n66-ANT4 | Head | Right Cheek | <b>0.61</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.54</b>           |
|      |              | n77-ANT1 | Head | Right Cheek | <b>0.26</b>           |
|      |              |          | Body | Rear 10mm   | <b>0.61</b>           |

### I.5 Graph results

#### 5G n2\_CH370500 Right Cheek

Date: 2/20/2022

Electronics: DAE4 Sn1331

Medium: head 1900 MHz

Medium parameters used:  $f = 1852.5$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 42.203$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n2 1852.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.88,7.88,7.88)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.730 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.124 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (measured) = 0.896 W/kg

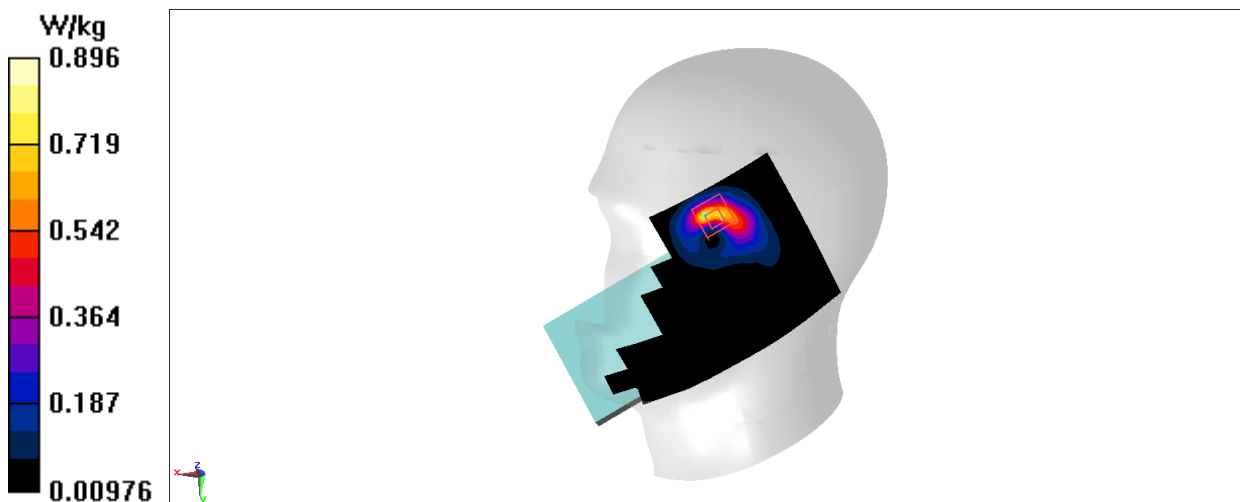


Fig I.5-1

**5G n2\_CH370500 Rear 15mm**

Date: 2/20/2022

Electronics: DAE4 Sn1331

Medium: head 1900 MHz

Medium parameters used:  $f = 1852.5$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 42.203$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n2 1852.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.88,7.88,7.88)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.478 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.367 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.610 W/kg

**SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.509 W/kg

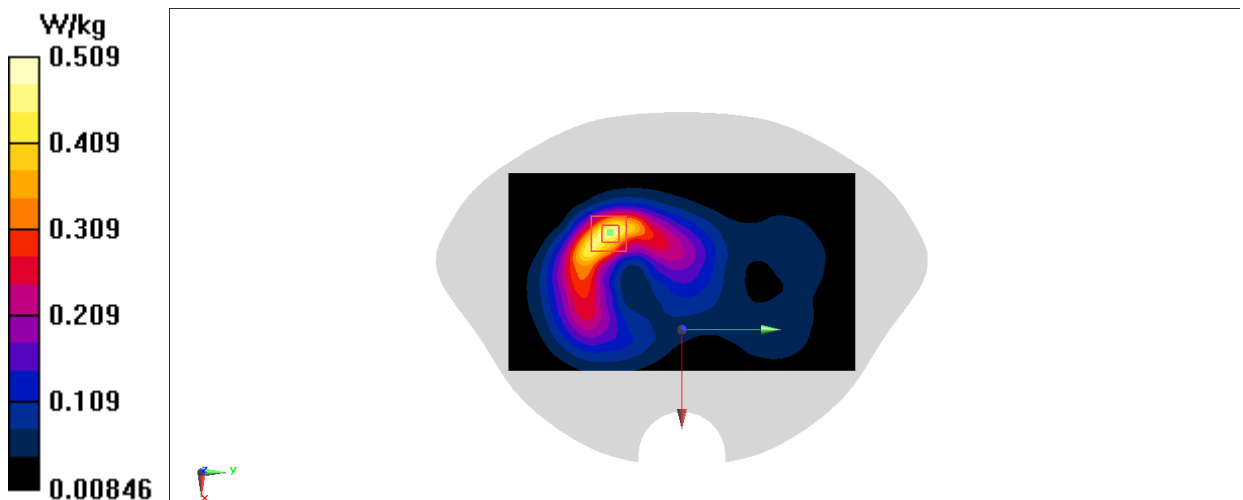

**Fig I.5-2**

**5G n2\_CH370500 Left 10mm**

Date: 2/20/2022

Electronics: DAE4 Sn1331

Medium: head 1900 MHz

Medium parameters used:  $f = 1852.5$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 42.203$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n2 1852.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.88,7.88,7.88)

**Area Scan (41x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.577 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.32 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.705 W/kg

**SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.195 W/kg**

Maximum value of SAR (measured) = 0.598 W/kg

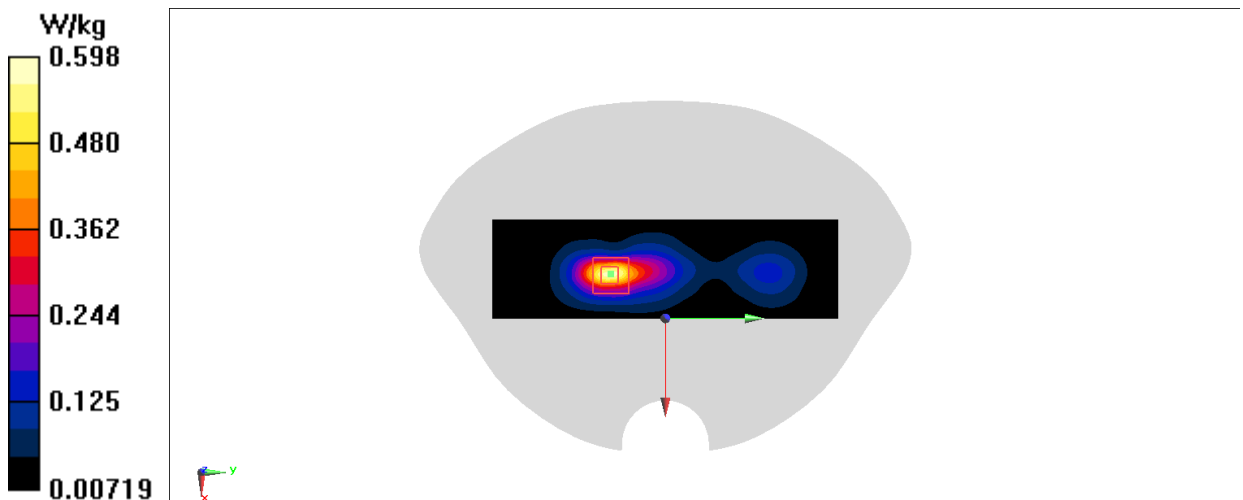**Fig I.5-3**



**5G n5\_CH165300 Left Cheek**

Date: 2/18/2022

Electronics: DAE4 Sn1331

Medium: head 835 MHz

Medium parameters used:  $f = 826.5$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 44.774$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n5 826.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(10.36,10.36,10.36)

**Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.56 W/kg


**Zoom Scan (11x12x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.68 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.599 W/kg**

Maximum value of SAR (measured) = 1.48 W/kg

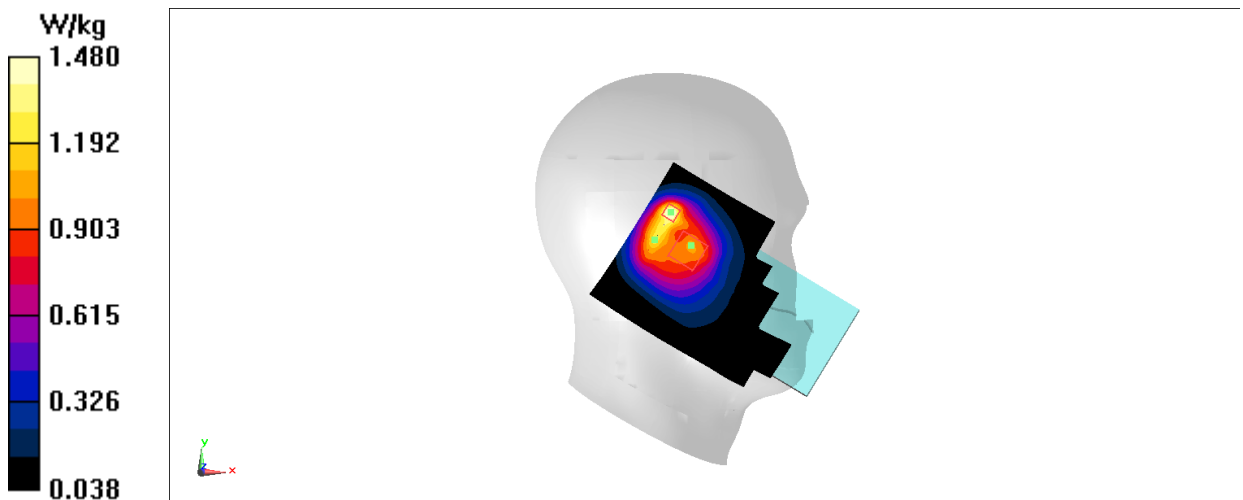**Fig I.5-4**

**5G n5\_CH165300 Rear 15mm**

Date: 2/18/2022

Electronics: DAE4 Sn1331

Medium: head 835 MHz

Medium parameters used:  $f = 826.5$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 44.774$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n5 826.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(10.36,10.36,10.36)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.417 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.31 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.496 W/kg

**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.412 W/kg

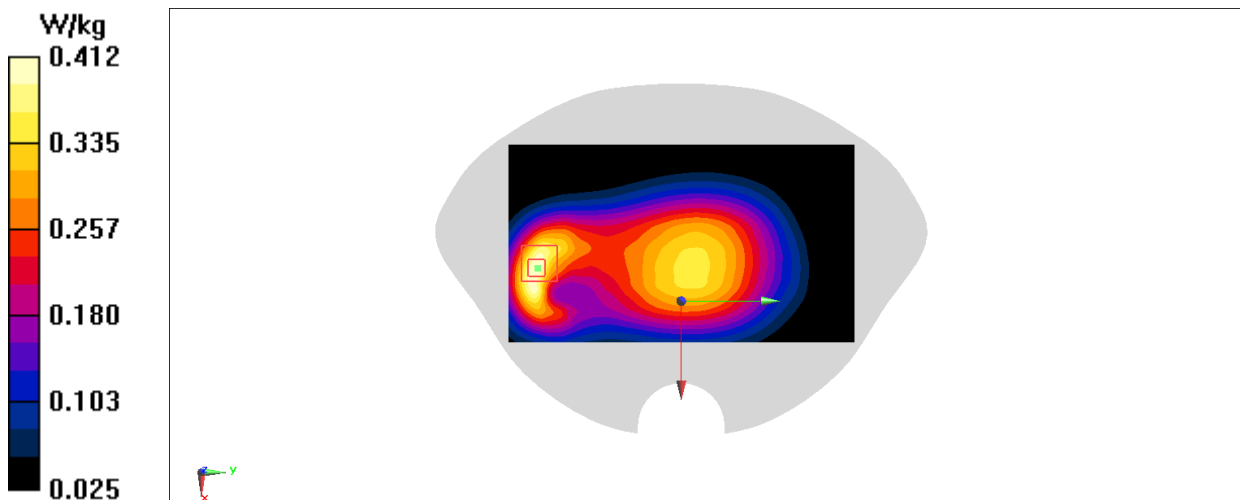

**Fig I.5-5**

**5G n5\_CH165300 Top 10mm**

Date: 2/18/2022

Electronics: DAE4 Sn1331

Medium: head 835 MHz

Medium parameters used:  $f = 826.5$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 44.774$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n5 826.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(10.36,10.36,10.36)

**Area Scan (41x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.479 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.52 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.691 W/kg

**SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.530 W/kg

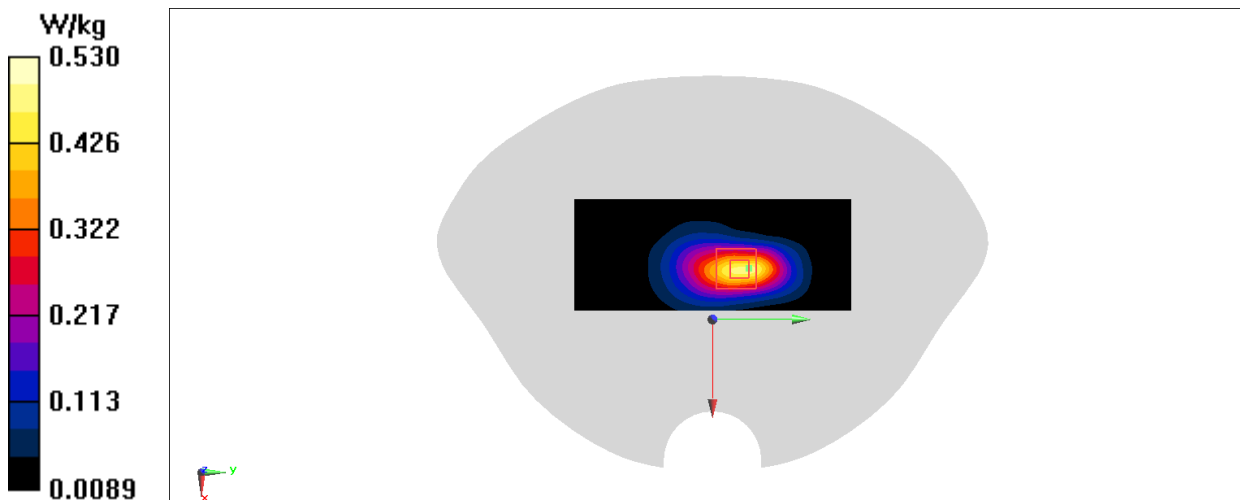

**Fig I.5-6**

**5G n70\_CH340500 Right Cheek**

Date: 2/19/2022

Electronics: DAE4 Sn1331

Medium: head 1750 MHz

Medium parameters used:  $f = 1702.5$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 42.436$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n70 1702.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(8.14,8.14,8.14)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.721 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.023 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.276 W/kg**

Maximum value of SAR (measured) = 0.892 W/kg

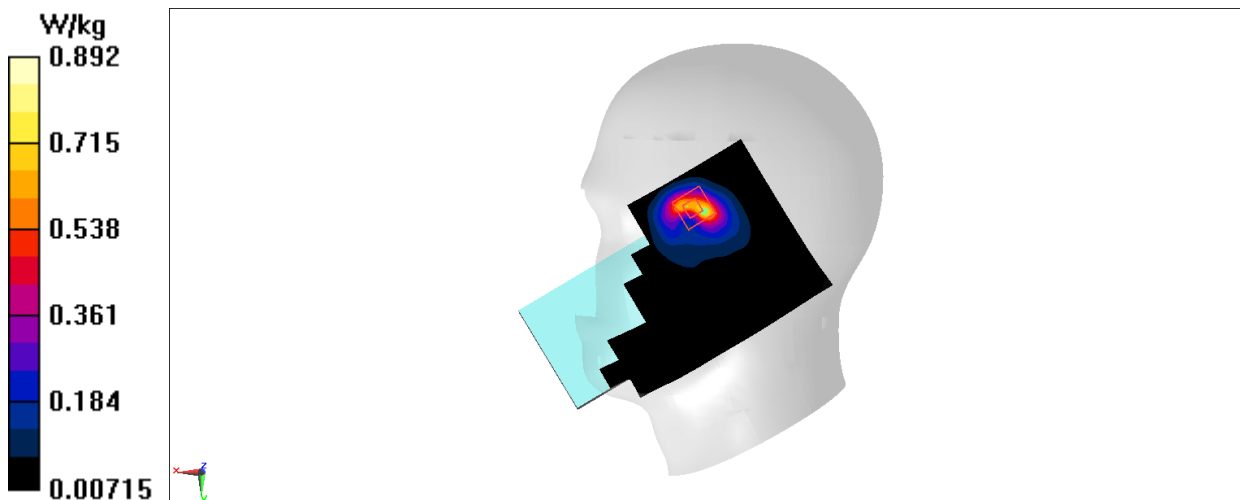

**Fig I.5-7**

**5G n70\_CH340500 Rear 15mm**

Date: 2/19/2022

Electronics: DAE4 Sn1331

Medium: head 1750 MHz

Medium parameters used:  $f = 1702.5$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 42.436$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n70 1702.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(8.14,8.14,8.14)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.515 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.208 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.612 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.510 W/kg

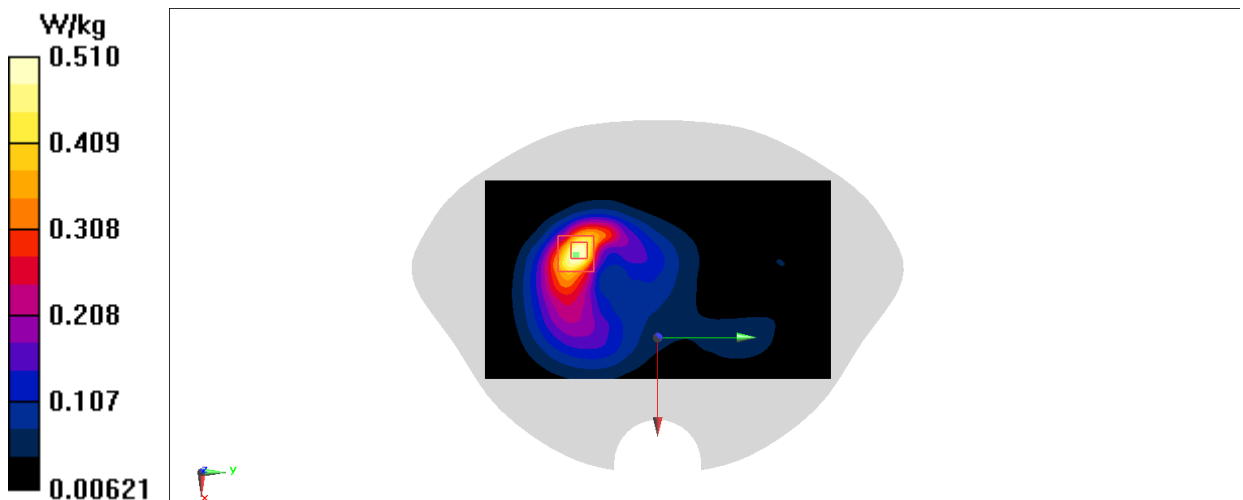

**Fig I.5-8**

**5G n70\_CH340500 Rear 10mm**

Date: 2/19/2022

Electronics: DAE4 Sn1331

Medium: head 1750 MHz

Medium parameters used:  $f = 1702.5$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 42.436$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: 5G n70 1702.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(8.14,8.14,8.14)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.578 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.521 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.794 W/kg

**SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.210 W/kg**


Maximum value of SAR (measured) = 0.611 W/kg

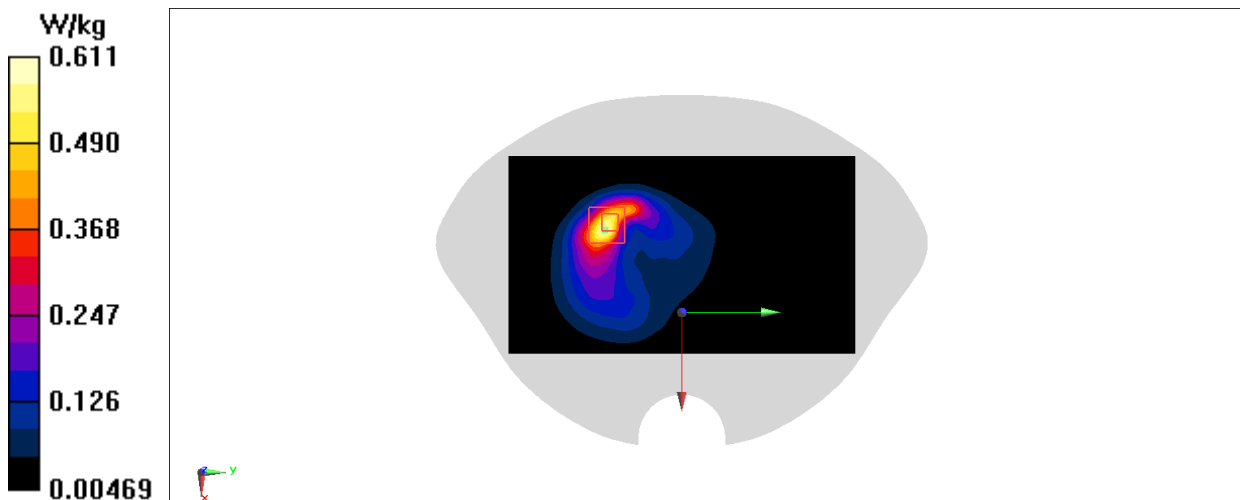

**Fig I.5-9**

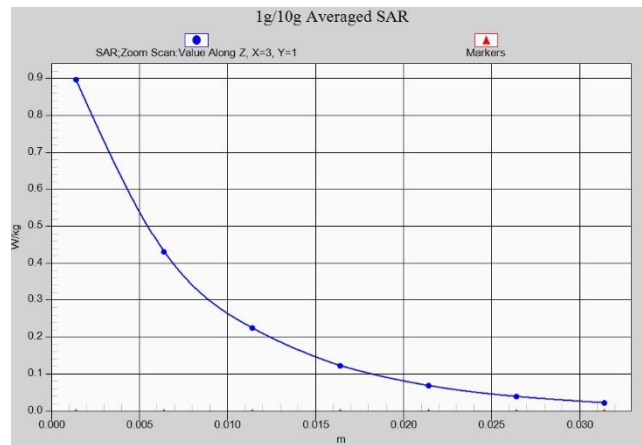


**Z-Scan at power reference point (n2)**

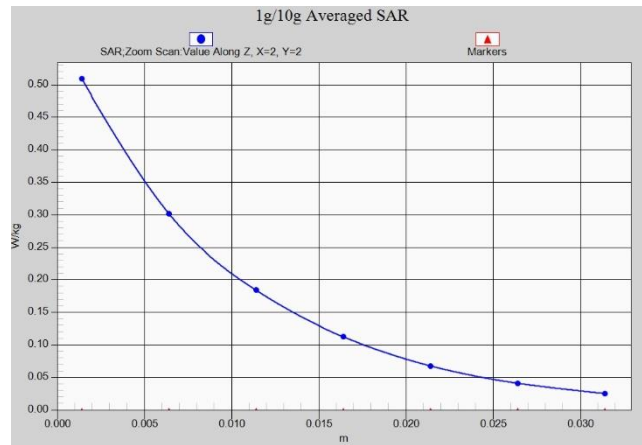


**Z-Scan at power reference point (n2)**




**Z-Scan at power reference point (n2)**

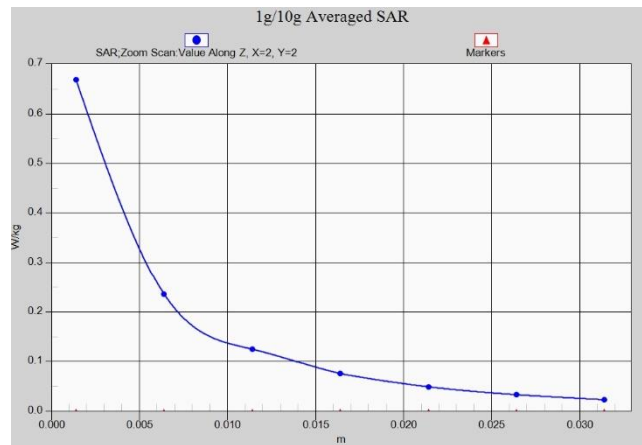

**Z-Scan at power reference point (n5)**

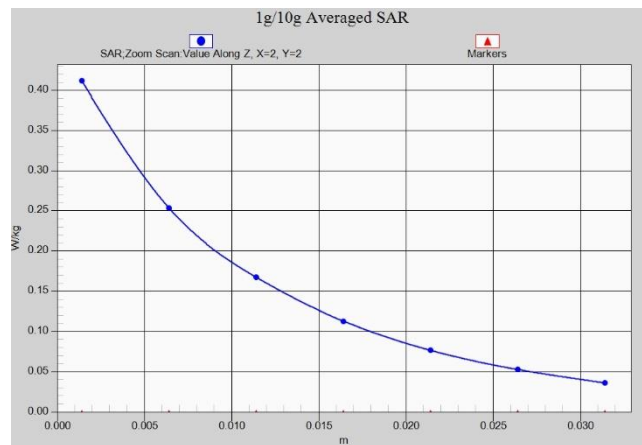


**Z-Scan at power reference point (n5)**

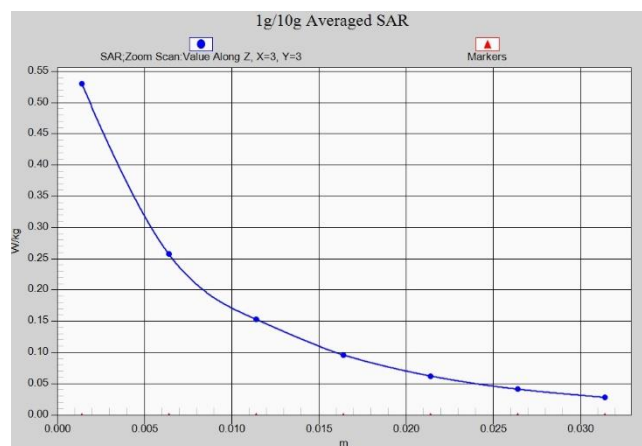


**Z-Scan at power reference point (n5)**




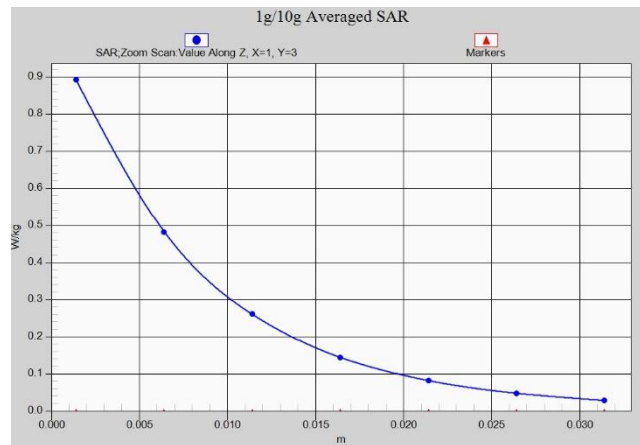

**Z-Scan at power reference point (n70)**

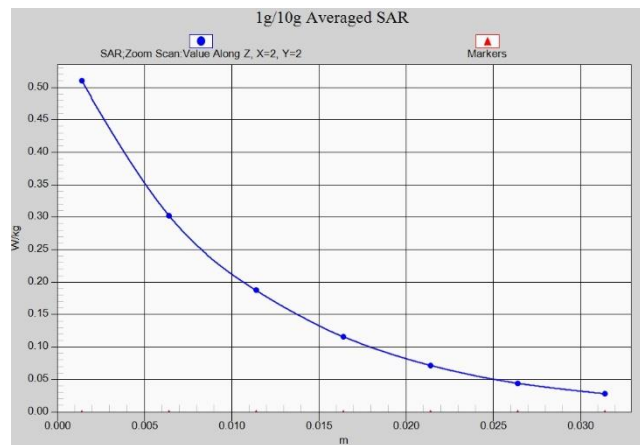

**Z-Scan at power reference point (n70)**

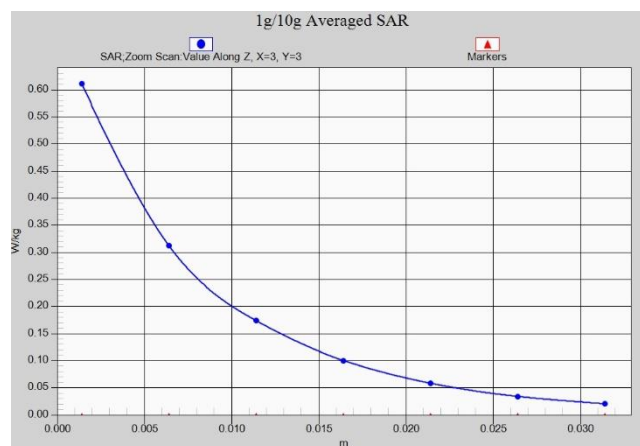

**Z-Scan at power reference point (n70)**

## I.6 System Verification results

### 835MHz

Date: 2022-2-18

Electronics: DAE4 Sn1331

Medium: Head 835MHz

Medium parameters used:  $f = 835\text{MHz}$ ;  $\sigma = 0.8571 \text{ mho/m}$ ;  $\epsilon_r = 44.69$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.2^\circ\text{C}$  Liquid Temperature:  $22^\circ\text{C}$

Communication System: CW Frequency:  $835\text{MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(10.36, 10.36, 10.36)

**System Validation /Area Scan (81x191x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $64.79 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$

**Fast SAR: SAR(1 g) =  $2.43 \text{ W/kg}$ ; SAR(10 g) =  $1.54 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $3.64 \text{ W/kg}$


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $64.79 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$

Peak SAR (extrapolated) =  $3.57\text{W/kg}$

**SAR(1 g) =  $2.46 \text{ W/kg}$ ; SAR(10 g) =  $1.59 \text{ W/kg}$**

Maximum value of SAR (measured) =  $3.77 \text{ W/kg}$

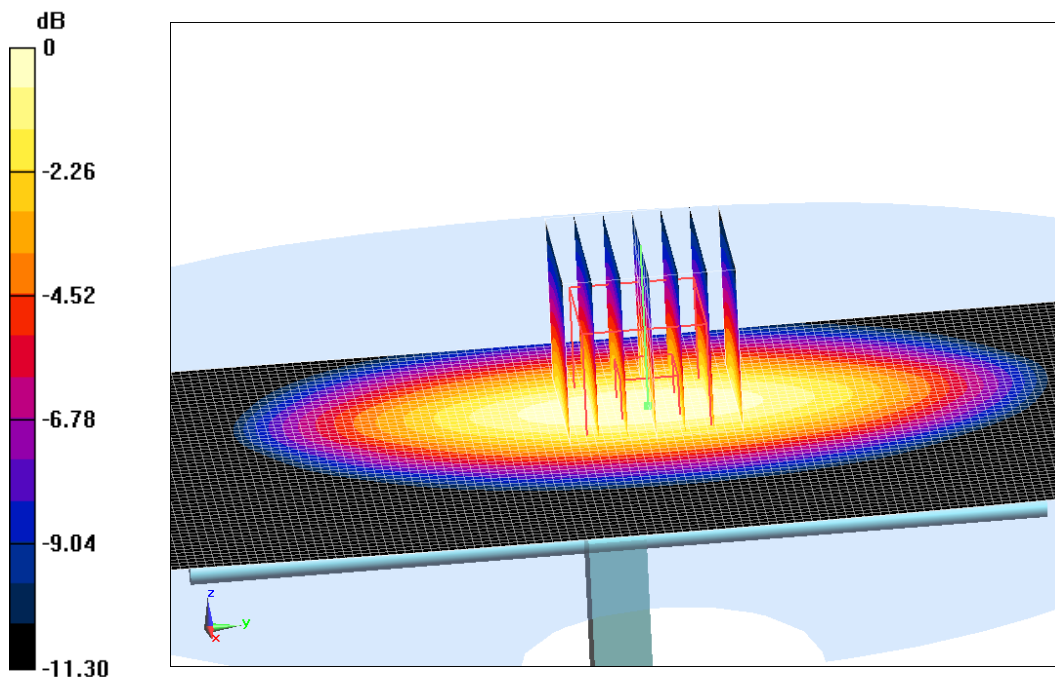

0 dB =  $3.77 \text{ W/kg} = 5.76 \text{ dB W/kg}$

**Fig I.6-1 validation 835MHz 250mW**

## 1750 MHz

Date: 2/19/2022

Electronics: DAE4 Sn1331

Medium: Head 1750 MHz

Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.373 \text{ mho/m}$ ;  $\epsilon_r = 42.37$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(8.14,8.14,8.14)

**System Validation /Area Scan (81x191x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 107.24 V/m; Power Drift = 0.07

**Fast SAR: SAR(1 g) = 9.08 W/kg; SAR(10 g) = 4.75 W/kg**

Maximum value of SAR (interpolated) = 14.35 W/kg


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 107.24 V/m; Power Drift = 0.07

Peak SAR (extrapolated) = 15.27 W/kg

**SAR(1 g) = 9.03 W/kg; SAR(10 g) = 4.71 W/kg**

Maximum value of SAR (measured) = 14.25 W/kg

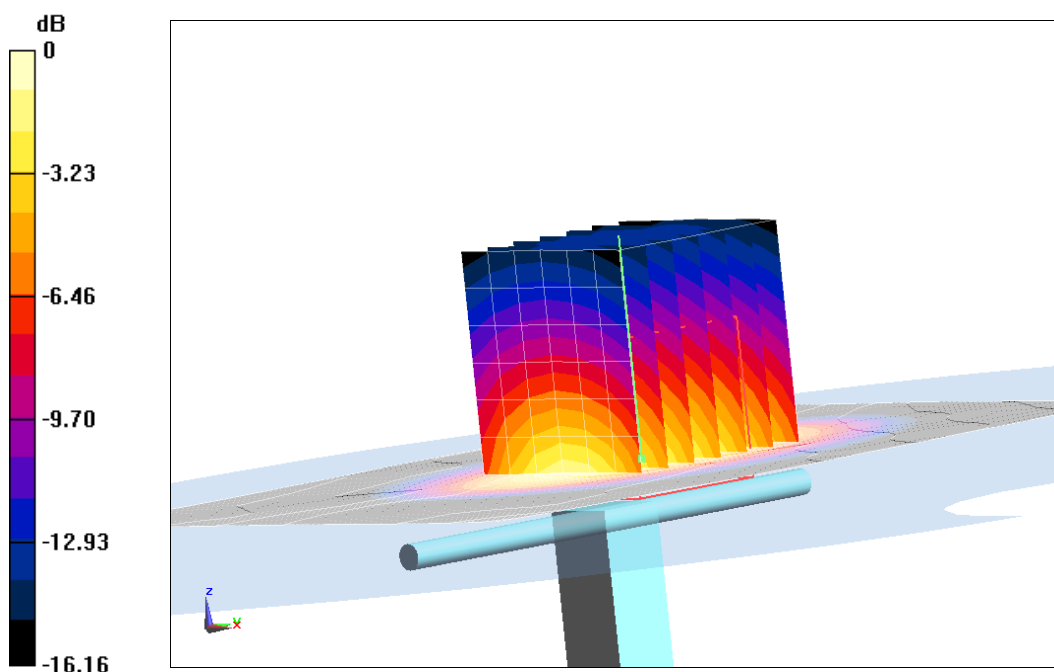

0 dB = 14.25 W/kg = 11.54 dB W/kg

**Fig I.6-2 validation 1800MHz 250mW**

## 1900MHz

Date: 2022-2-20

Electronics: DAE4 Sn1331

Medium: Head 1900MHz

Medium parameters used:  $f = 1900\text{MHz}$ ;  $\sigma = 1.481 \text{ mho/m}$ ;  $\epsilon_r = 42.08$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.2^\circ\text{C}$  Liquid Temperature:  $22^\circ\text{C}$

Communication System: CW Frequency:  $1900\text{MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.88,7.88,7.88)

**System Validation /Area Scan (81x191x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $106.78 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$

**Fast SAR: SAR(1 g) =  $9.85 \text{ W/kg}$ ; SAR(10 g) =  $5.17 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $15.91 \text{ W/kg}$


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $106.78 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$

Peak SAR (extrapolated) =  $18.62 \text{ W/kg}$

**SAR(1 g) =  $9.82 \text{ W/kg}$ ; SAR(10 g) =  $5.14 \text{ W/kg}$**

Maximum value of SAR (measured) =  $15.76 \text{ W/kg}$

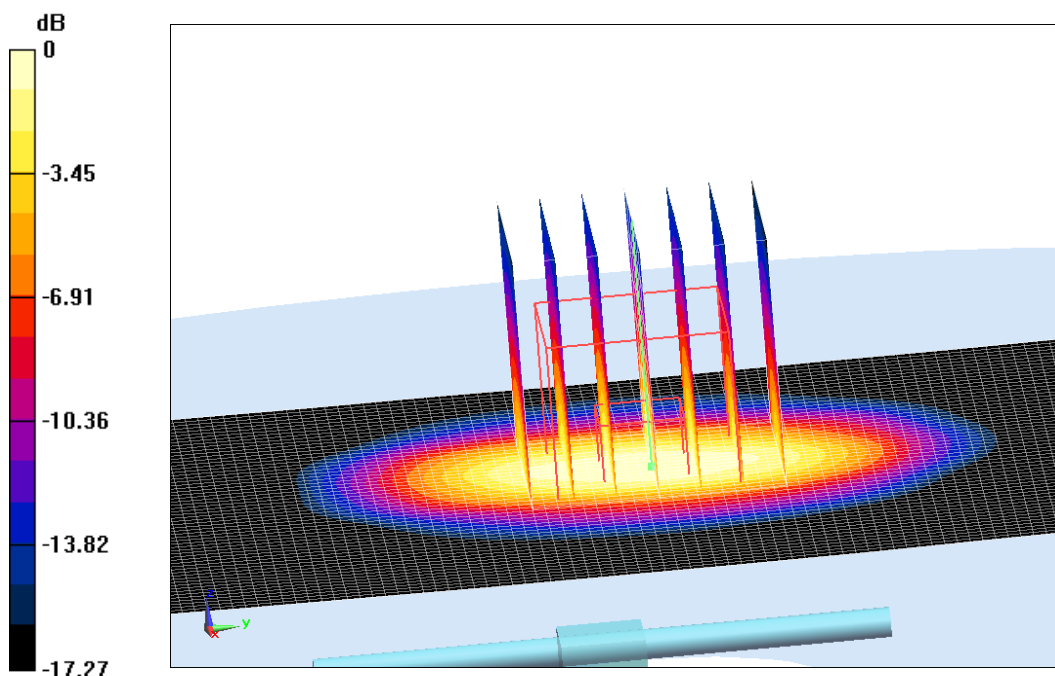

0 dB =  $15.76 \text{ W/kg}$  =  $11.98 \text{ dB W/kg}$

**Fig I.6-3 validation 1900MHz 250mW**

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.

**Table I.6-1 Comparison between area scan and zoom scan for system verification**

| <b>Date</b> | <b>Band</b> | <b>Position</b> | <b>Area scan<br/>(1g)</b> | <b>Zoom scan<br/>(1g)</b> | <b>Drift (%)</b> |
|-------------|-------------|-----------------|---------------------------|---------------------------|------------------|
| 2022-2-18   | 835 MHz     | Head            | 2.43                      | 2.46                      | -1.22            |
| 2022-2-19   | 1750 MHz    | Head            | 9.08                      | 9.03                      | 0.55             |
| 2022-2-20   | 1900 MHz    | Head            | 9.85                      | 9.82                      | 0.31             |

## I.6 System Validation

**Table I.6: System Validation for 7548**


| Probe SN. | Liquid name  | Validation date | Frequency point | Status (OK or Not) |
|-----------|--------------|-----------------|-----------------|--------------------|
| 7548      | Head 750MHz  | July.8,2021     | 750 MHz         | OK                 |
| 7548      | Head 900MHz  | July.8,2021     | 900 MHz         | OK                 |
| 7548      | Head 1450MHz | July.8,2021     | 1450 MHz        | OK                 |
| 7548      | Head 1750MHz | July.8,2021     | 1750 MHz        | OK                 |
| 7548      | Head 1810MHz | July.8,2021     | 1810 MHz        | OK                 |
| 7548      | Head 1900MHz | July.9,2021     | 1900 MHz        | OK                 |
| 7548      | Head 2000MHz | July.9,2021     | 2000 MHz        | OK                 |
| 7548      | Head 2300MHz | July.9,2021     | 2300 MHz        | OK                 |
| 7548      | Head 2450MHz | July.9,2021     | 2450 MHz        | OK                 |
| 7548      | Head 2600MHz | July.9,2021     | 2600 MHz        | OK                 |
| 7548      | Head 3300MHz | July.10,2021    | 3300 MHz        | OK                 |
| 7548      | Head 3500MHz | July.10,2021    | 3500 MHz        | OK                 |
| 7548      | Head 3700MHz | July.10,2021    | 3700 MHz        | OK                 |
| 7548      | Head 5250MHz | July.10,2021    | 5250 MHz        | OK                 |
| 7548      | Head 5600MHz | July.10,2021    | 5600 MHz        | OK                 |
| 7548      | Head 5750MHz | July.10,2021    | 5750 MHz        | OK                 |





### I.7 Probe Calibration Certificate

#### Probe 7548 Calibration Certificate



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

CTTL

Certificate No: Z21-60231

### CALIBRATION CERTIFICATE

Object EX3DV4 - SN : 7548

Calibration Procedure(s) FF-Z11-004-02  
Calibration Procedures for Dosimetric E-field Probes

Calibration date: June 25, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)


| Primary Standards        | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|--------------------------|-------------|--|-----------------------|
| Power Meter NRP2         | 101919      | 15-Jun-21(CTTL, No.J21X04466)            | Jun-22                |
| Power sensor NRP-Z91     | 101547      | 15-Jun-21(CTTL, No.J21X04466)            | Jun-22                |
| Power sensor NRP-Z91     | 101548      | 15-Jun-21(CTTL, No.J21X04466)            | Jun-22                |
| Reference 10dBAttenuator | 18N50W-10dB | 10-Feb-20(CTTL, No.J20X00525)            | Feb-22                |
| Reference 20dBAttenuator | 18N50W-20dB | 10-Feb-20(CTTL, No.J20X00526)            | Feb-22                |
| Reference Probe EX3DV4   | SN 3617     | 27-Jan-21(SPEAG, No.EX3-3617_Jan21)      | Jan-22                |
| DAE4                     | SN 1556     | 15-Jan-21(SPEAG, No.DAE4-1556_Jan21)     | Jan-22                |

| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|--|-----------------------|
| SignalGenerator MG3700A | 6201052605 | 16-Jun-21(CTTL, No.J21X04467)            | Jun-22                |
| Network Analyzer E5071C | MY46110673 | 21-Jan-21(CTTL, No.J20X00515)            | Jan-22                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 27, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

**Glossary:**

|                       |  |
|-----------------------|--|
| TSL                   | tissue simulating liquid   |
| NORM <sub>x,y,z</sub> | sensitivity in free space  |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>   |
| DCP                   | diode compression point  |
| CF                    | crest factor (1/duty_cycle) of the RF signal   |
| A,B,C,D               | modulation dependent linearization parameters  |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis  |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system


**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub>\* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>: A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub>\* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

### Basic Calibration Parameters

|  | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|-----------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.61     | 0.69     | 0.62     | ±10.0%    |
| DCP(mV) <sup>B</sup>                                     | 100.7    | 101.3    | 102.5    |           |

### Modulation Calibration Parameters


| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 212.9    | ±2.0%                     |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 221.6    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 208.4    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 4).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548


### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.36   | 10.36   | 10.36   | 0.40               | 0.70                    | ±12.1%      |
| 900                  | 41.5                               | 0.97                            | 9.74    | 9.74    | 9.74    | 0.16               | 1.28                    | ±12.1%      |
| 1450                 | 40.5                               | 1.20                            | 8.55    | 8.55    | 8.55    | 0.41               | 0.73                    | ±12.1%      |
| 1750                 | 40.1                               | 1.37                            | 8.14    | 8.14    | 8.14    | 0.31               | 0.93                    | ±12.1%      |
| 1900                 | 40.0                               | 1.40                            | 7.88    | 7.88    | 7.88    | 0.29               | 0.99                    | ±12.1%      |
| 2000                 | 40.0                               | 1.40                            | 7.95    | 7.95    | 7.95    | 0.21               | 1.17                    | ±12.1%      |
| 2300                 | 39.5                               | 1.67                            | 7.60    | 7.60    | 7.60    | 0.64               | 0.67                    | ±12.1%      |
| 2450                 | 39.2                               | 1.80                            | 7.35    | 7.35    | 7.35    | 0.64               | 0.68                    | ±12.1%      |
| 2600                 | 39.0                               | 1.96                            | 7.11    | 7.11    | 7.11    | 0.49               | 0.81                    | ±12.1%      |
| 3300                 | 38.2                               | 2.71                            | 6.79    | 6.79    | 6.79    | 0.47               | 0.89                    | ±13.3%      |
| 3500                 | 37.9                               | 2.91                            | 6.64    | 6.64    | 6.64    | 0.40               | 1.05                    | ±13.3%      |
| 3700                 | 37.7                               | 3.12                            | 6.42    | 6.42    | 6.42    | 0.42               | 1.03                    | ±13.3%      |
| 3900                 | 37.5                               | 3.32                            | 6.27    | 6.27    | 6.27    | 0.35               | 1.40                    | ±13.3%      |
| 4100                 | 37.2                               | 3.53                            | 6.30    | 6.30    | 6.30    | 0.40               | 1.15                    | ±13.3%      |
| 4200                 | 37.1                               | 3.63                            | 6.15    | 6.15    | 6.15    | 0.35               | 1.35                    | ±13.3%      |
| 4400                 | 36.9                               | 3.84                            | 6.05    | 6.05    | 6.05    | 0.35               | 1.35                    | ±13.3%      |
| 4600                 | 36.7                               | 4.04                            | 5.98    | 5.98    | 5.98    | 0.40               | 1.30                    | ±13.3%      |
| 4800                 | 36.4                               | 4.25                            | 5.93    | 5.93    | 5.93    | 0.40               | 1.30                    | ±13.3%      |
| 4950                 | 36.3                               | 4.40                            | 5.74    | 5.74    | 5.74    | 0.40               | 1.35                    | ±13.3%      |
| 5250                 | 35.9                               | 4.71                            | 5.05    | 5.05    | 5.05    | 0.45               | 1.30                    | ±13.3%      |
| 5600                 | 35.5                               | 5.07                            | 4.68    | 4.68    | 4.68    | 0.45               | 1.40                    | ±13.3%      |
| 5750                 | 35.4                               | 5.22                            | 4.73    | 4.73    | 4.73    | 0.50               | 1.35                    | ±13.3%      |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

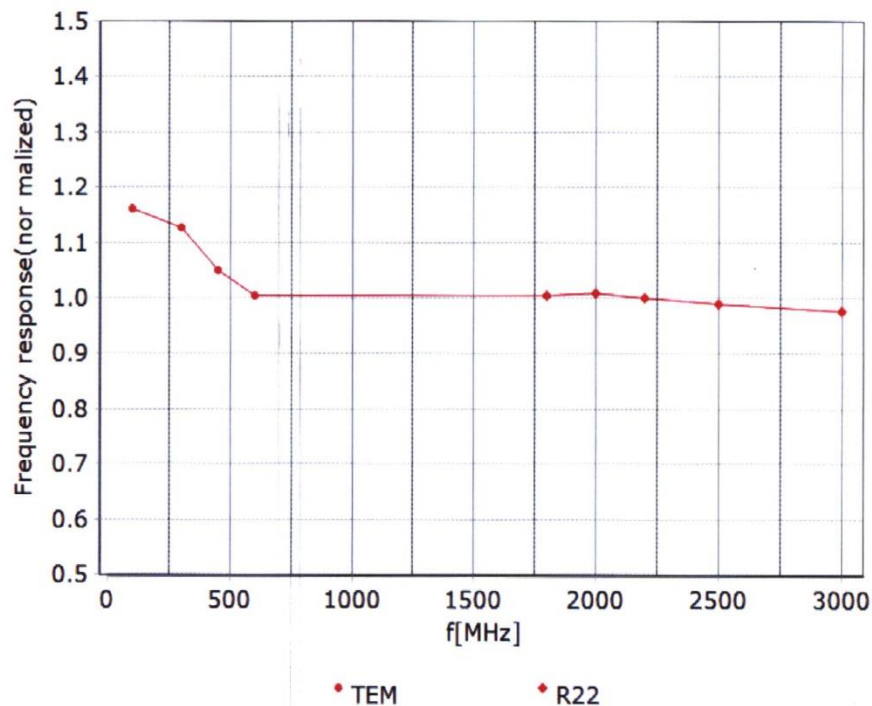

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )








Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

### Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

**f=1800 MHz, R22**

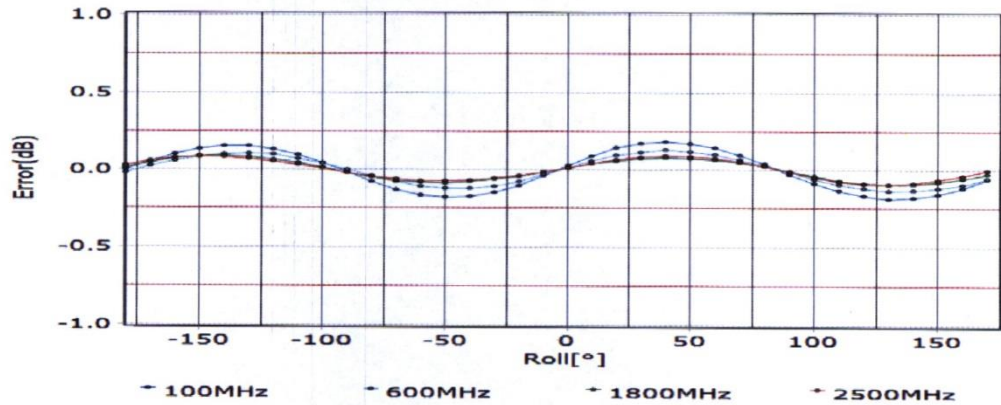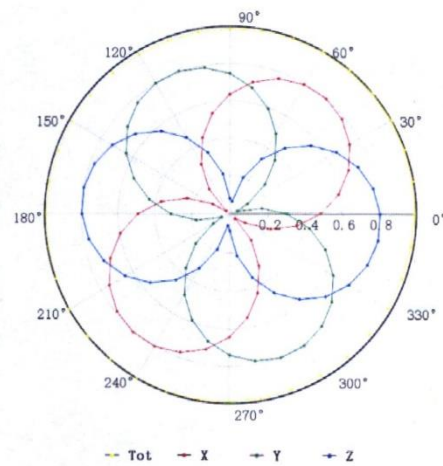
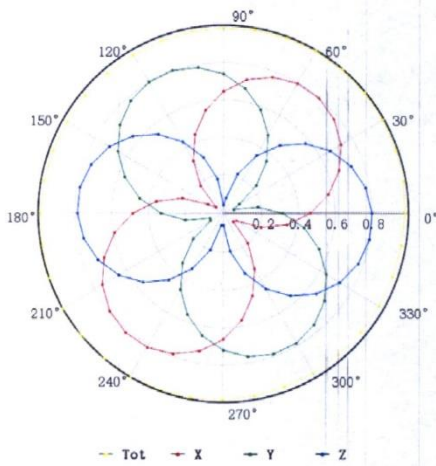


Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

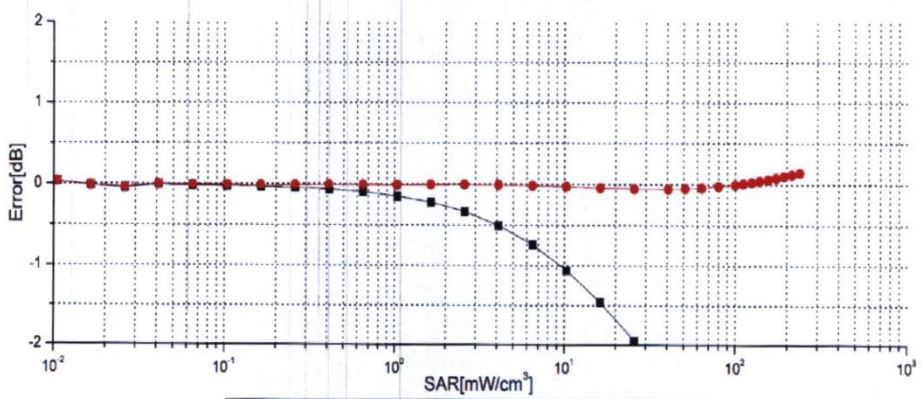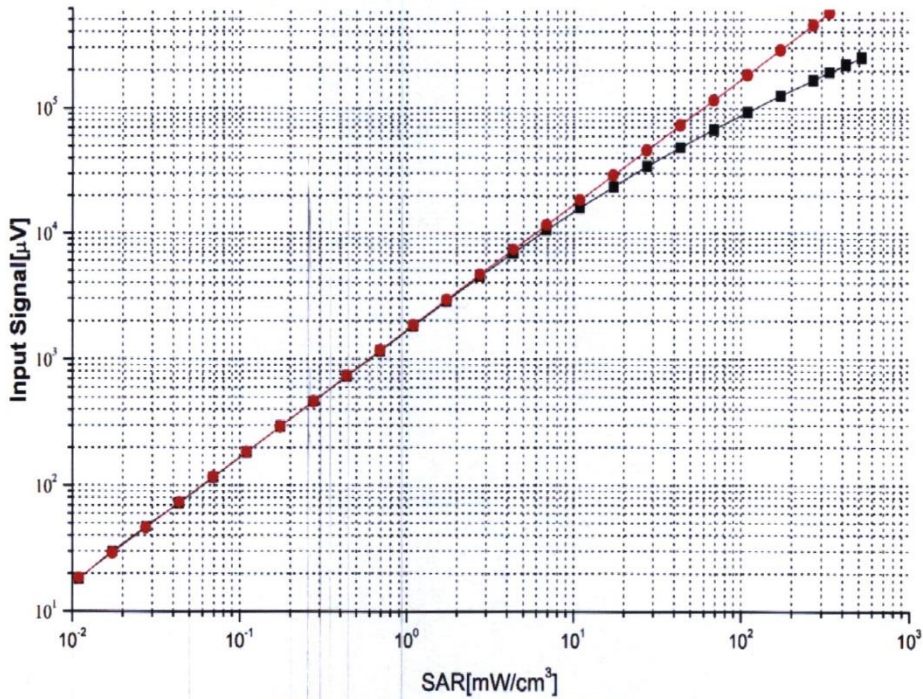

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

f=750 MHz,WGLS R9(H\_convF)

f=1750 MHz,WGLS R22(H\_convF)

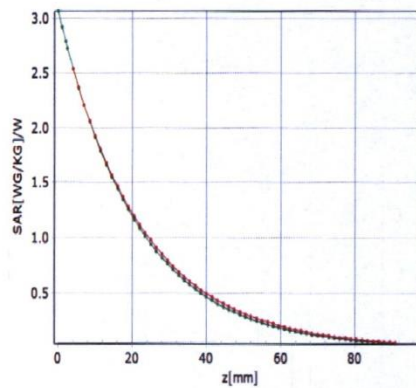


\* analytical \* measured

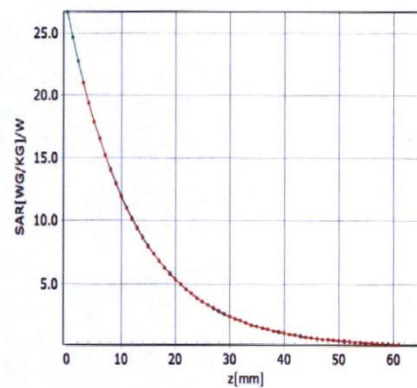


\* analytical \* measured

## Deviation from Isotropy in Liquid

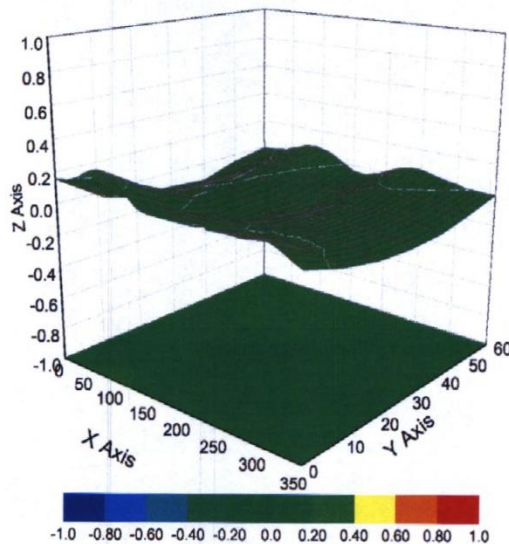

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

### Other Probe Parameters

|   |            |
|---|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 152.2      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 9mm        |
| Tip Diameter                                  | 2.5mm      |
| Probe Tip to Sensor X Calibration Point       | 1mm        |
| Probe Tip to Sensor Y Calibration Point       | 1mm        |
| Probe Tip to Sensor Z Calibration Point       | 1mm        |
| Recommended Measurement Distance from Surface | 1.4mm      |

## ANNEX J Accreditation Certificate

|   |   |
|---|---|
| <p>United States Department of Commerce<br/>National Institute of Standards and Technology</p>    |   |
| <hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>   |   |
| NVLAP LAB CODE: 600118-0  |   |
| <b>Telecommunication Technology Labs, CAICT</b><br>Beijing<br>China   |   |
| <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services,<br/>listed on the Scope of Accreditation, for:</i>   |   |
| <b>Electromagnetic Compatibility &amp; Telecommunications</b>   |   |
| <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.<br/>This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality<br/>management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i> |   |
| <hr/> 2021-09-29 through 2022-09-30<br><i>Effective Dates</i>   | <br><br><hr/> <i>For the National Voluntary Laboratory Accreditation Program</i> |