

Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

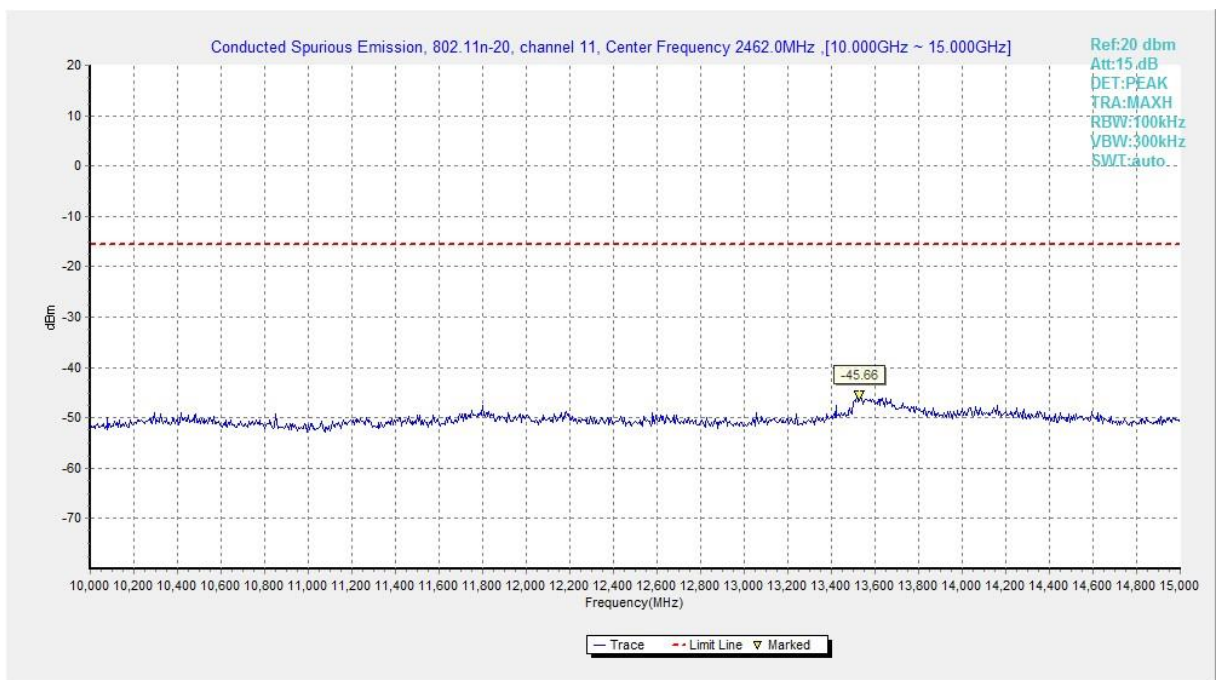


Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)

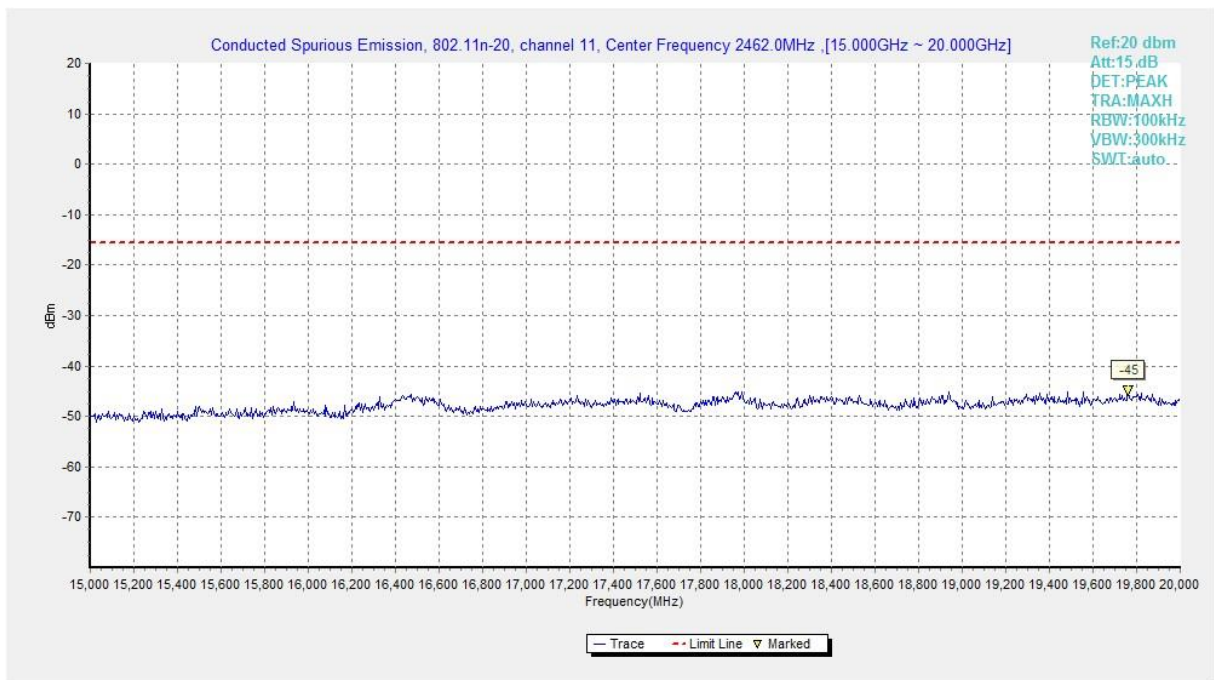


Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

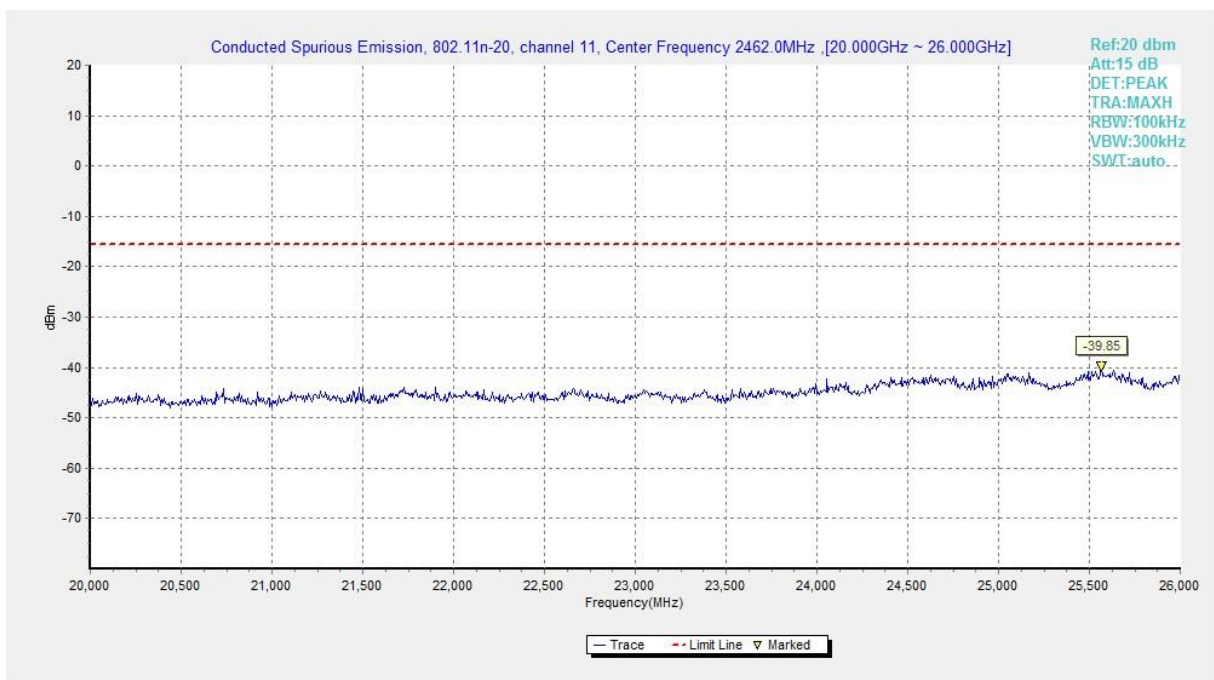


Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)

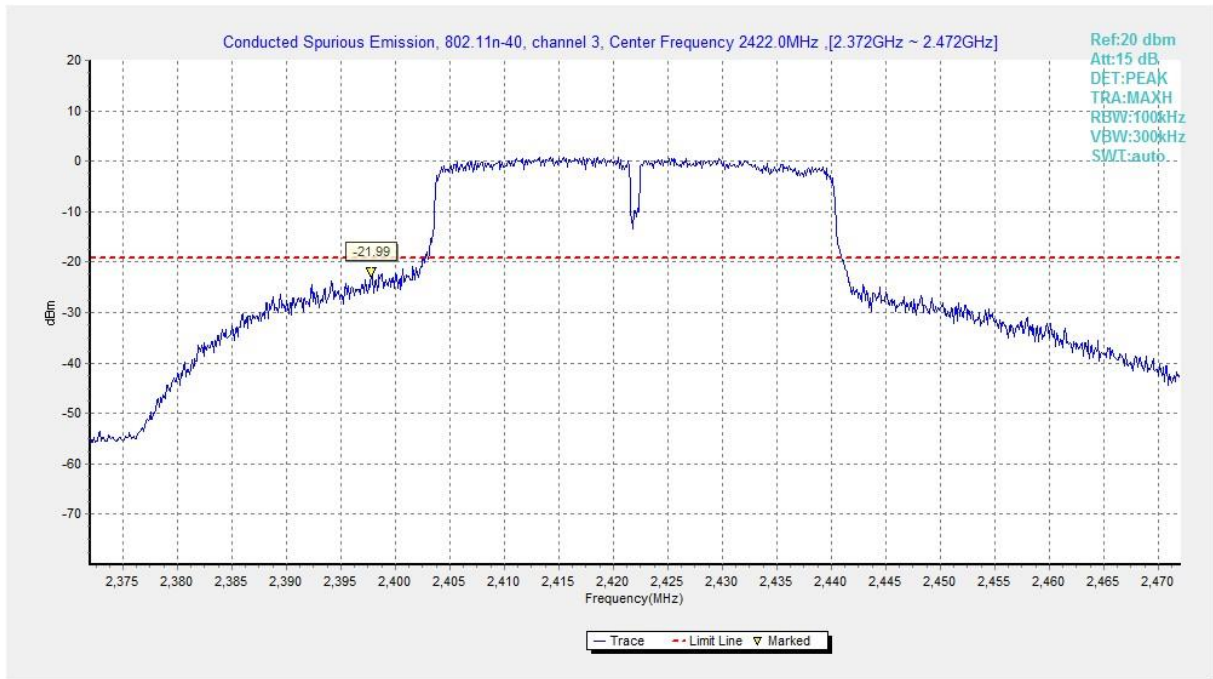


Fig.A.6.1.73 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, Center Frequency)

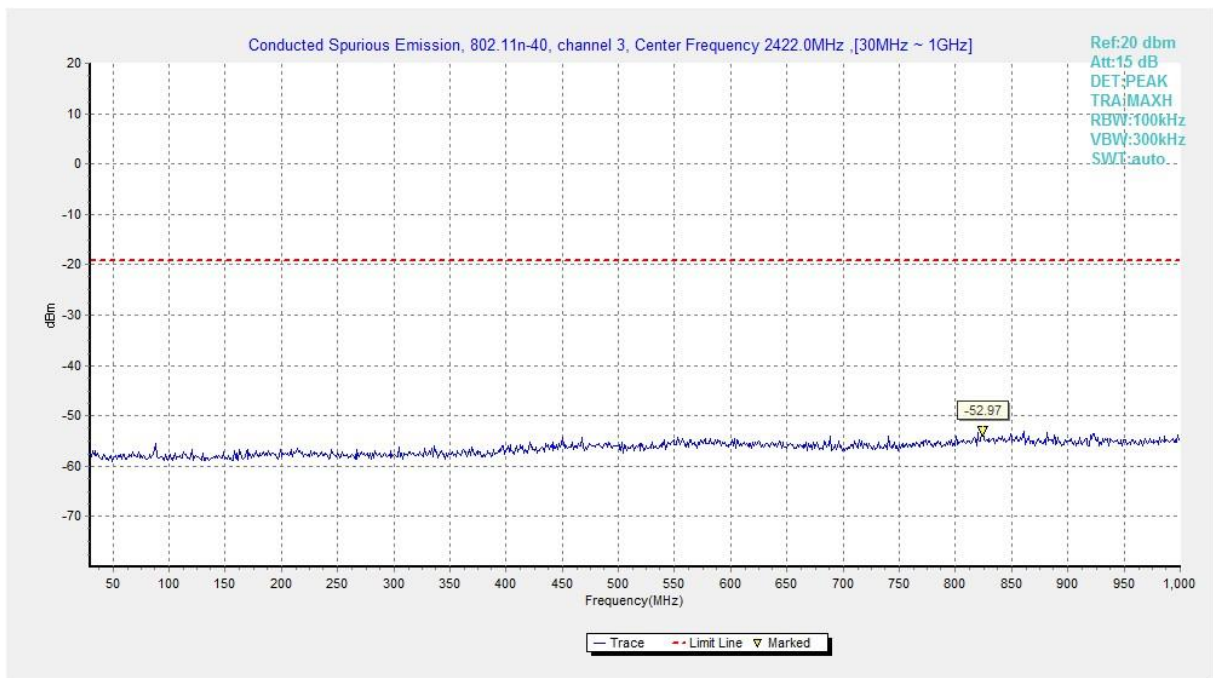


Fig.A.6.1.74 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 30 MHz-1 GHz)

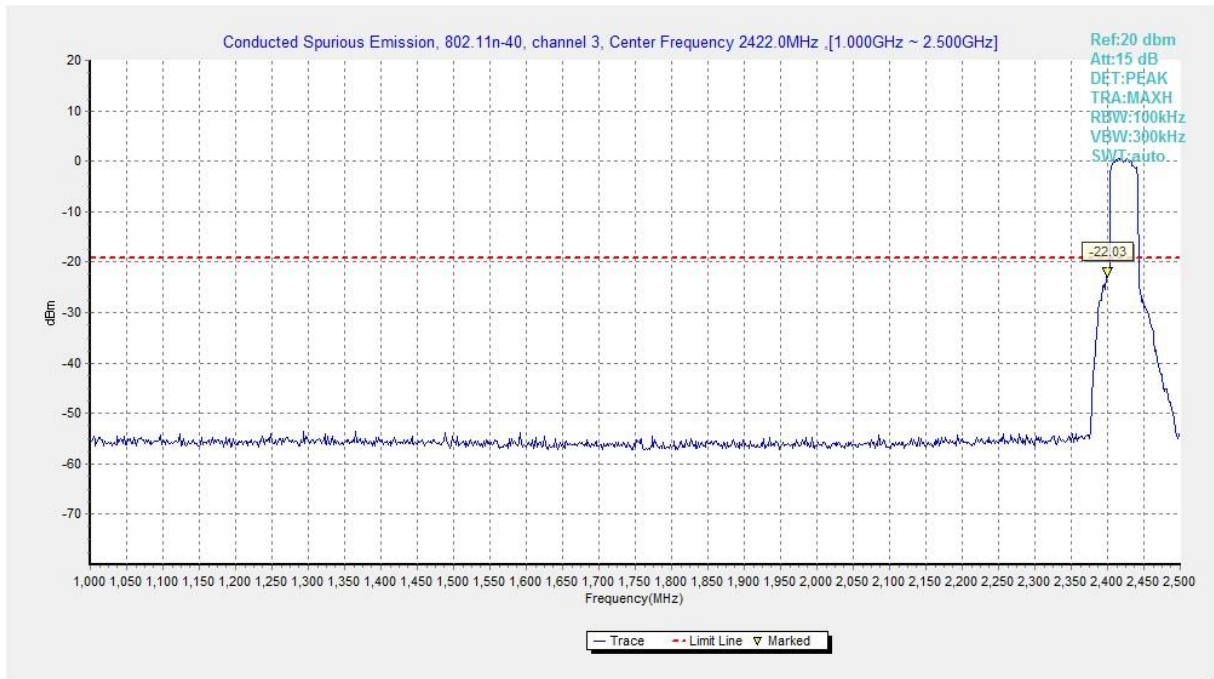


Fig.A.6.1.75 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 1 GHz-2.5 GHz)

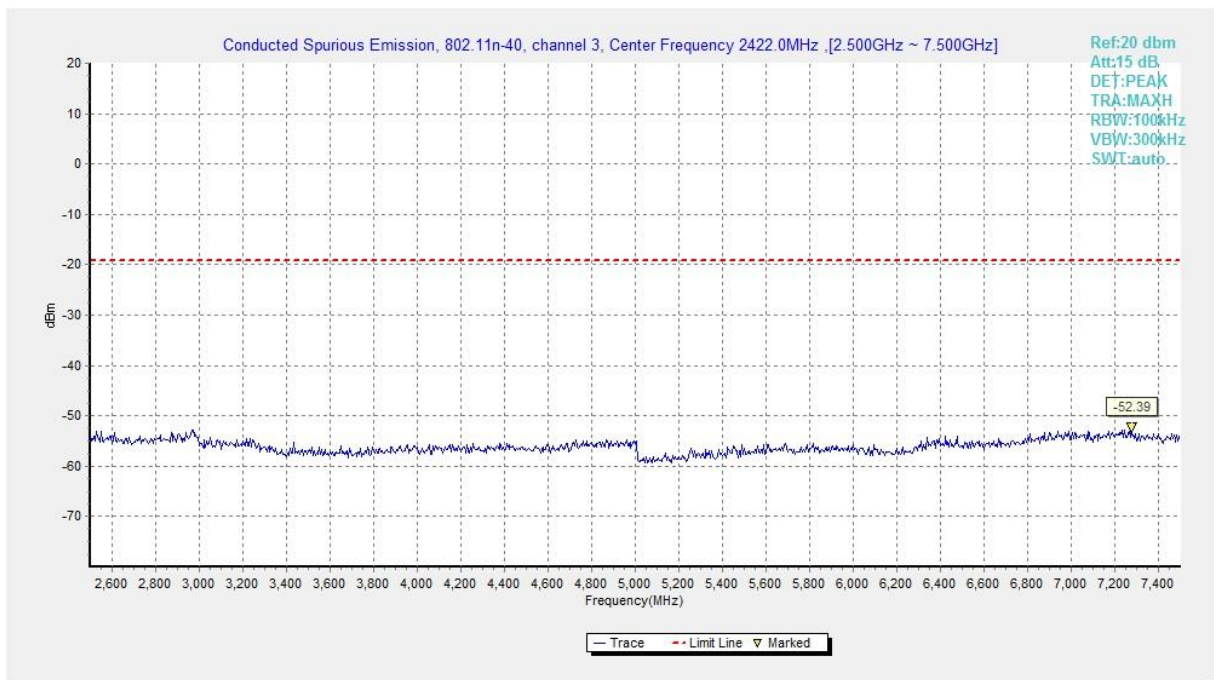


Fig.A.6.1.76 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 2.5 GHz-7.5 GHz)

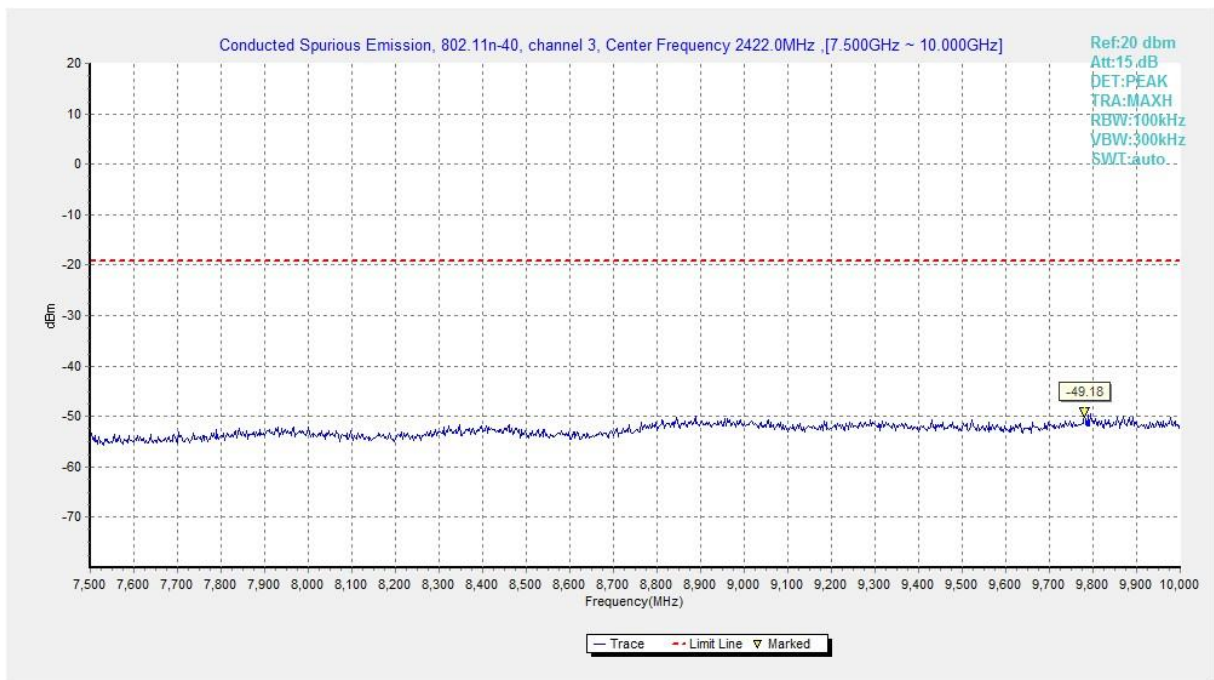


Fig.A.6.1.77 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 7.5 GHz-10 GHz)

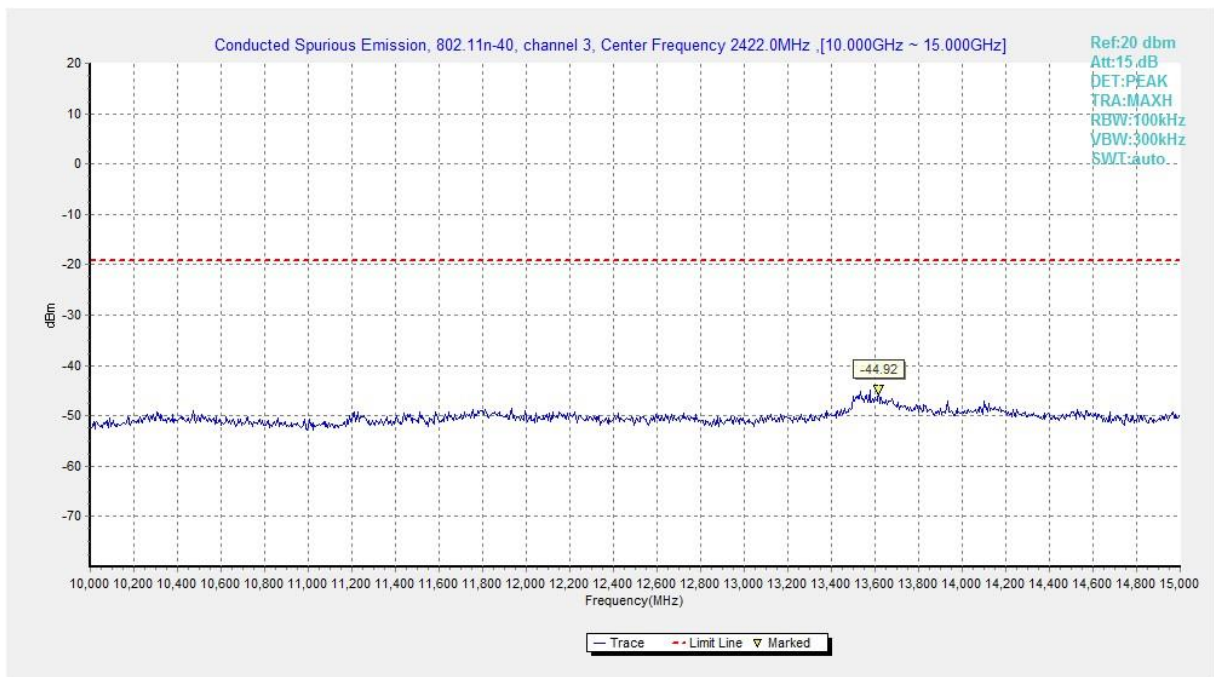


Fig.A.6.1.78 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 10 GHz-15 GHz)

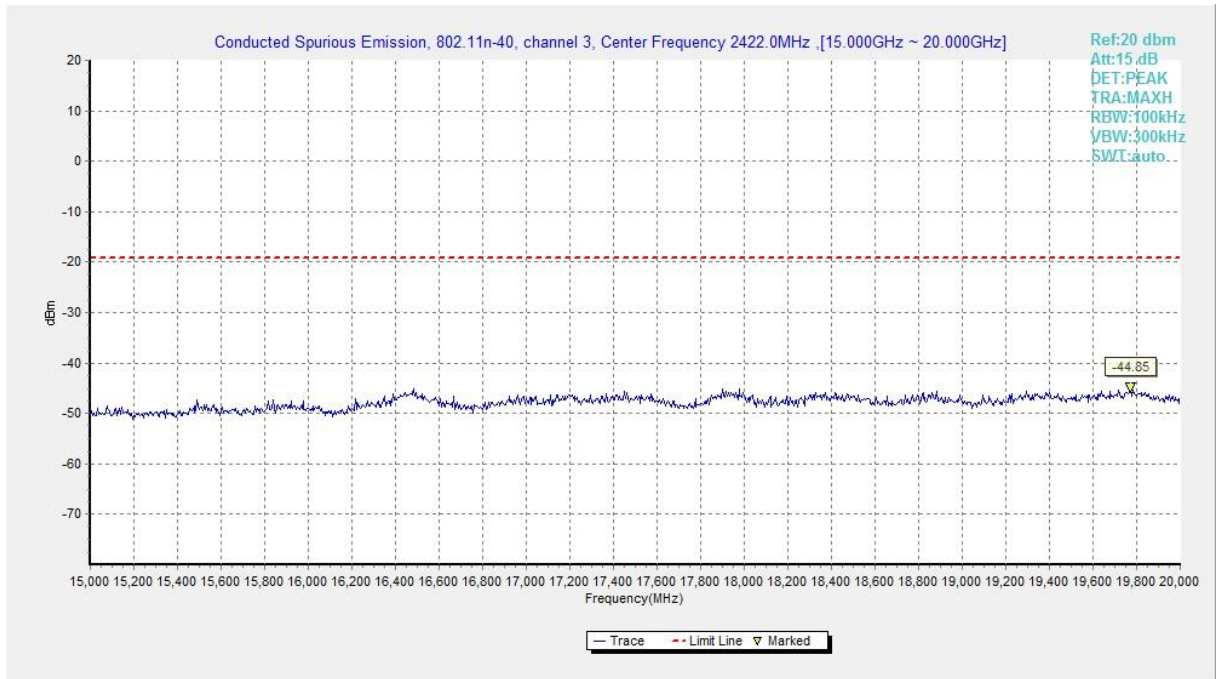


Fig.A.6.1.79 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 15 GHz-20 GHz)

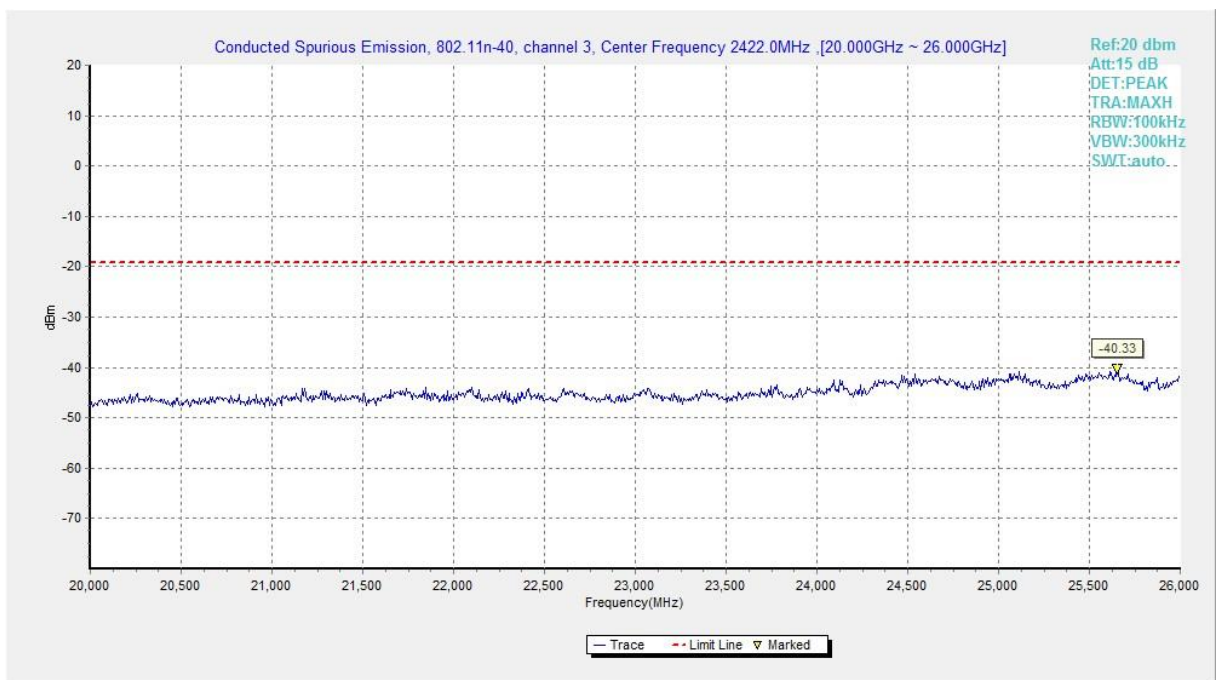


Fig.A.6.1.80 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 20 GHz-26 GHz)

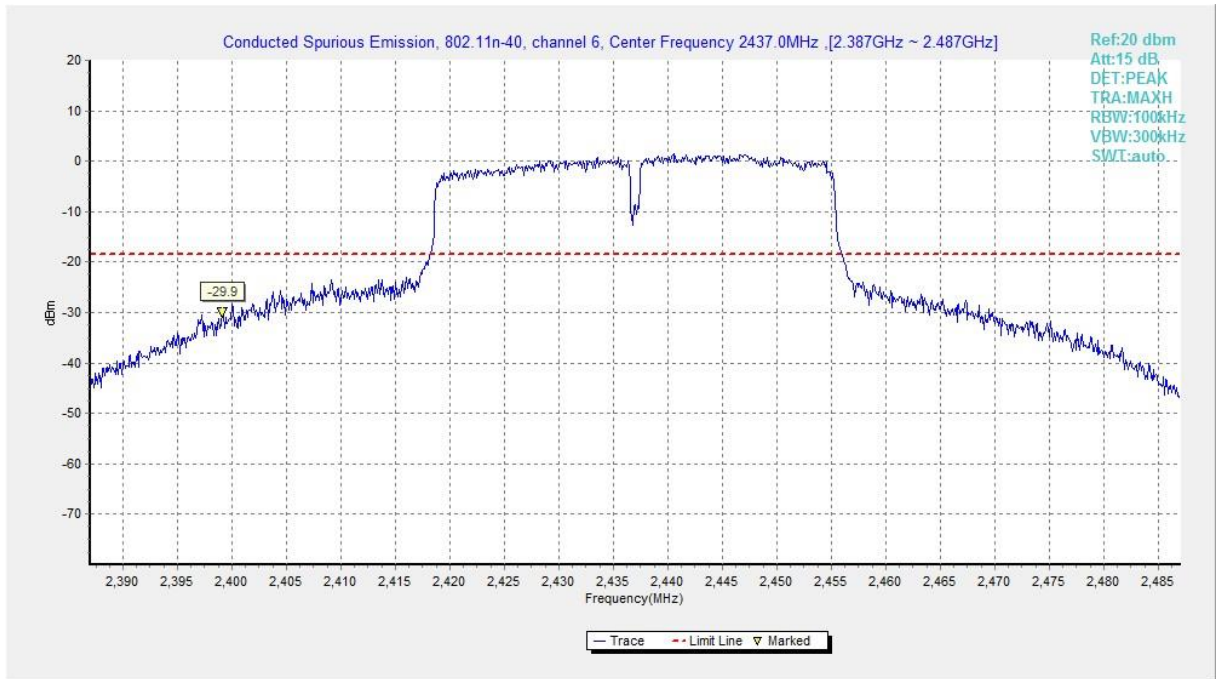


Fig.A.6.1.81 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, Center Frequency)

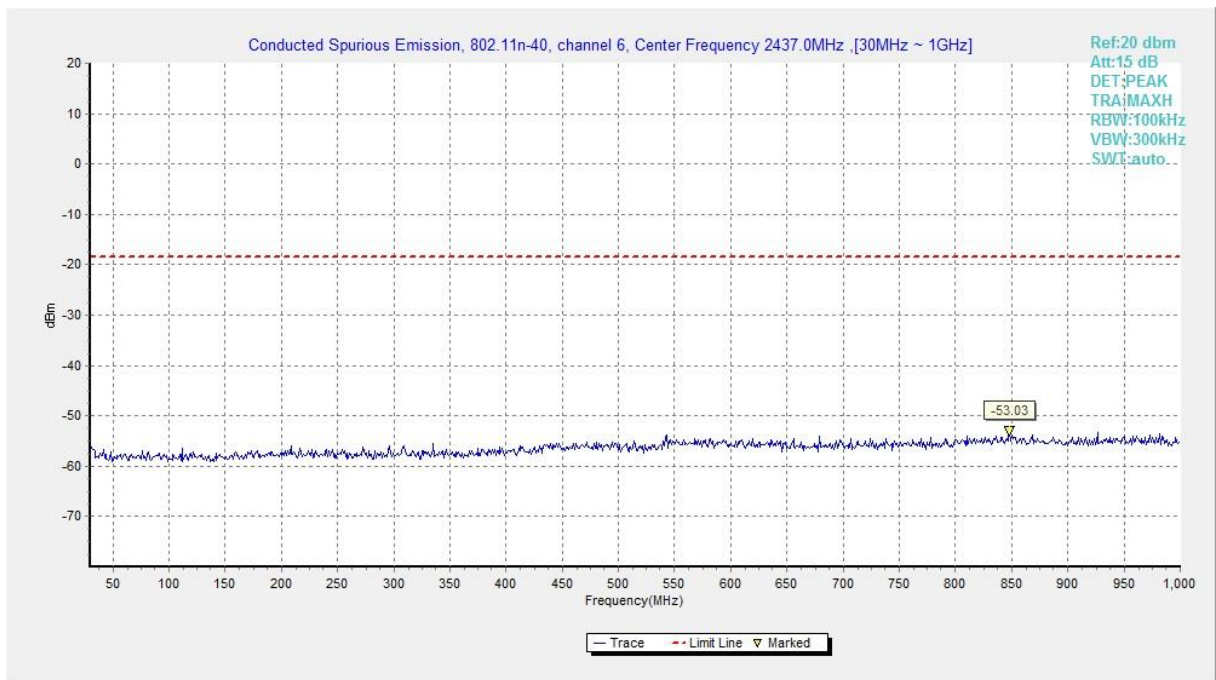


Fig.A.6.1.82 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 30 MHz-1 GHz)

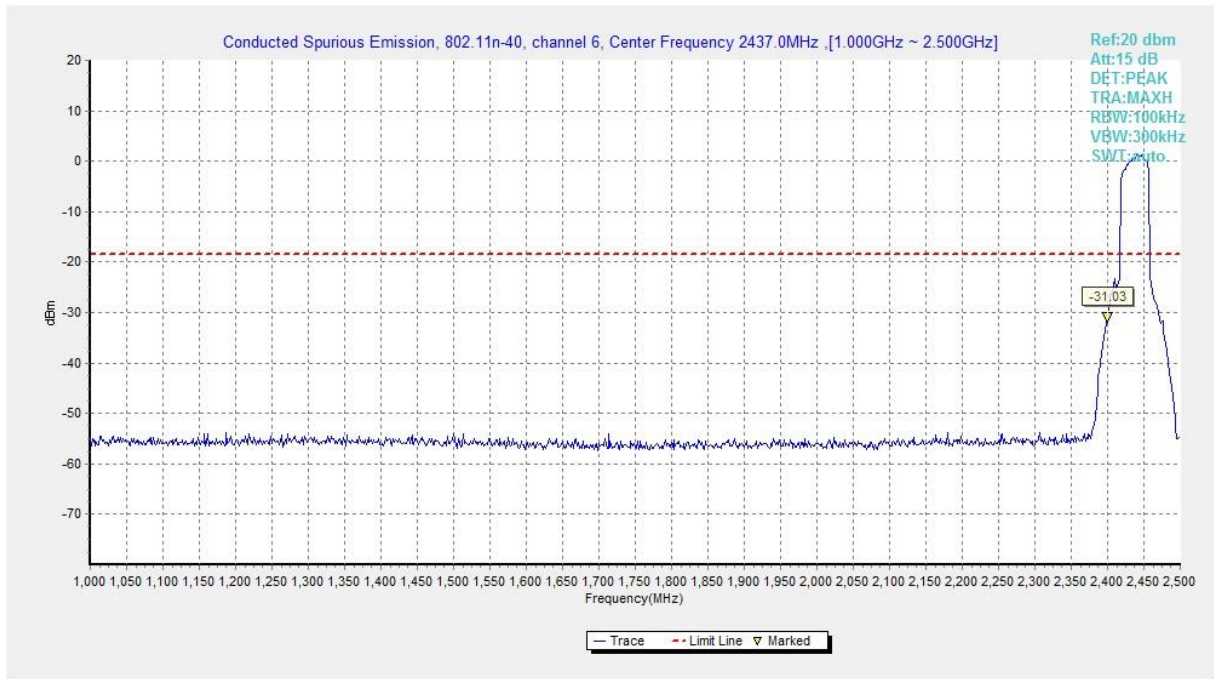


Fig.A.6.1.83 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 1 GHz-2.5 GHz)

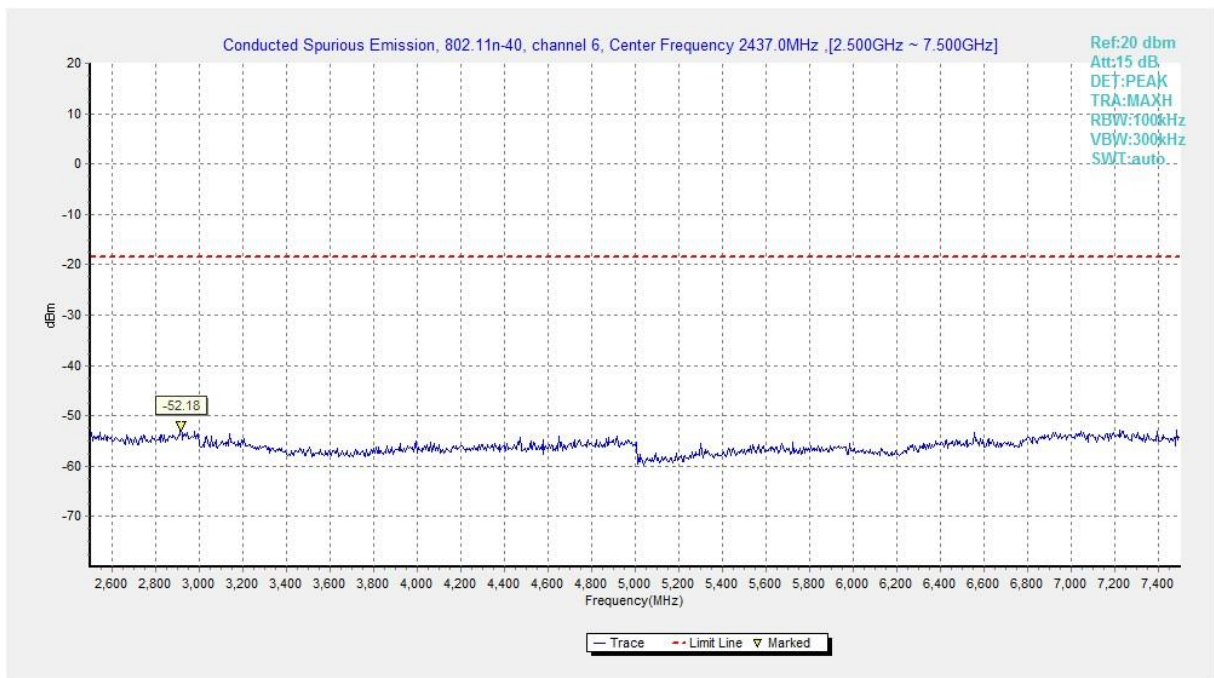


Fig.A.6.1.84 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 2.5 GHz-7.5 GHz)

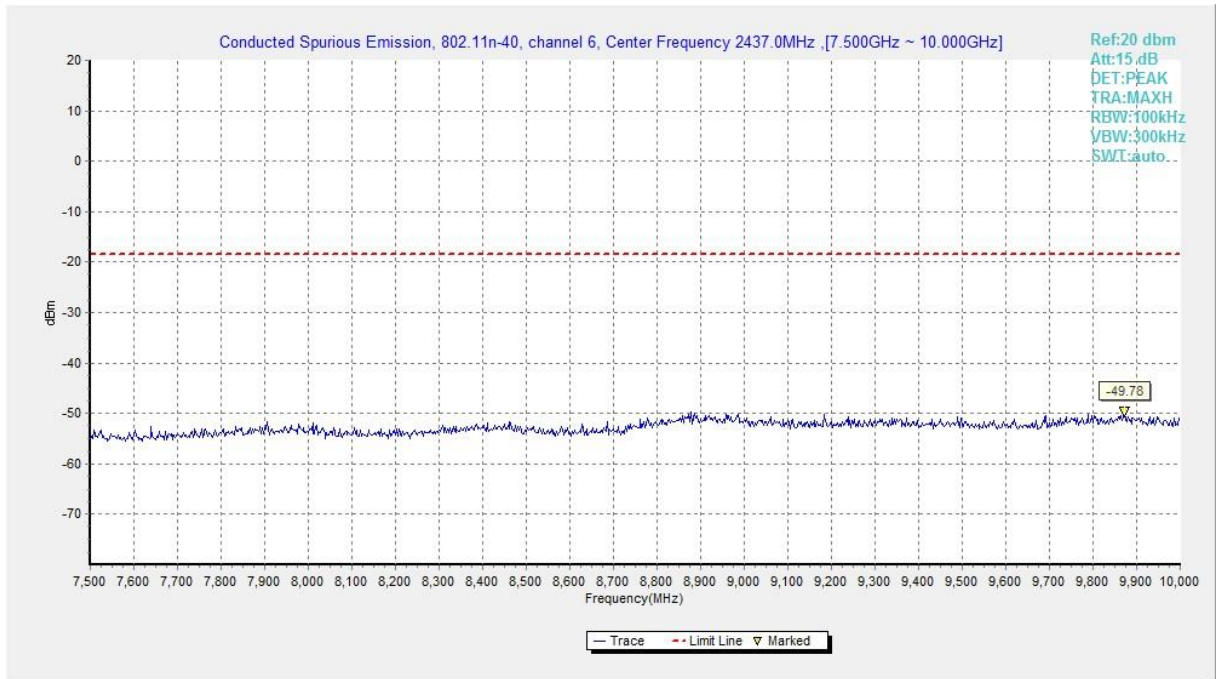


Fig.A.6.1.85 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 7.5 GHz-10 GHz)

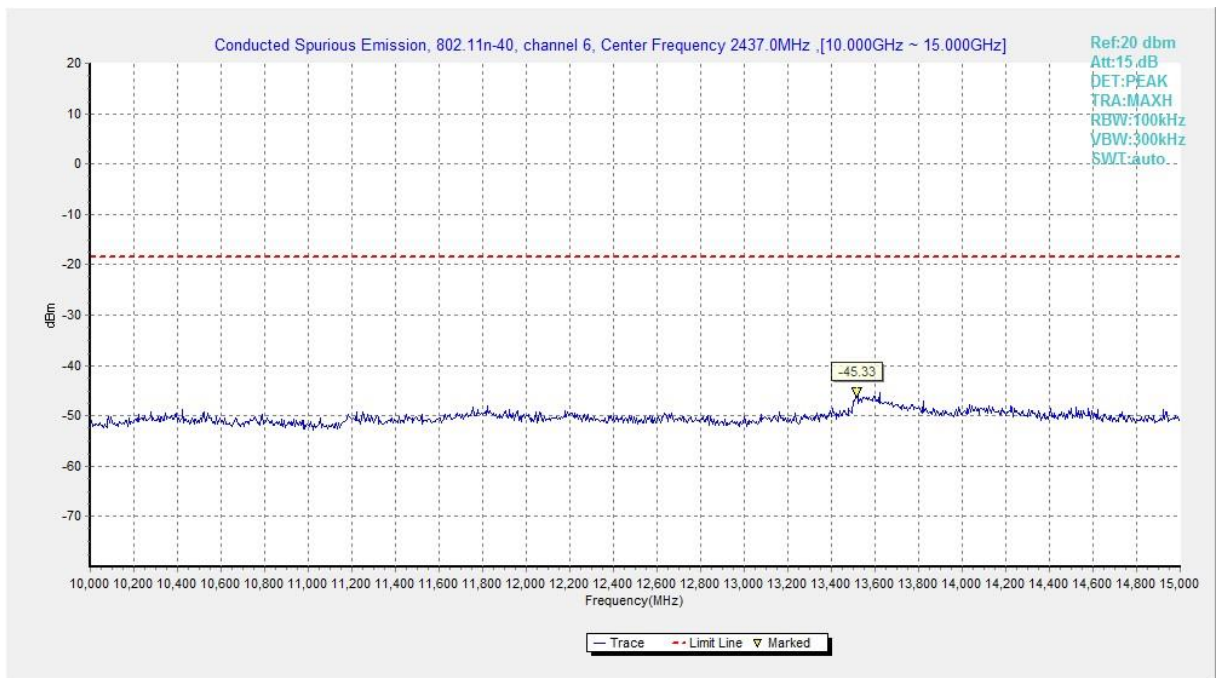


Fig.A.6.1.86 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 10 GHz-15 GHz)

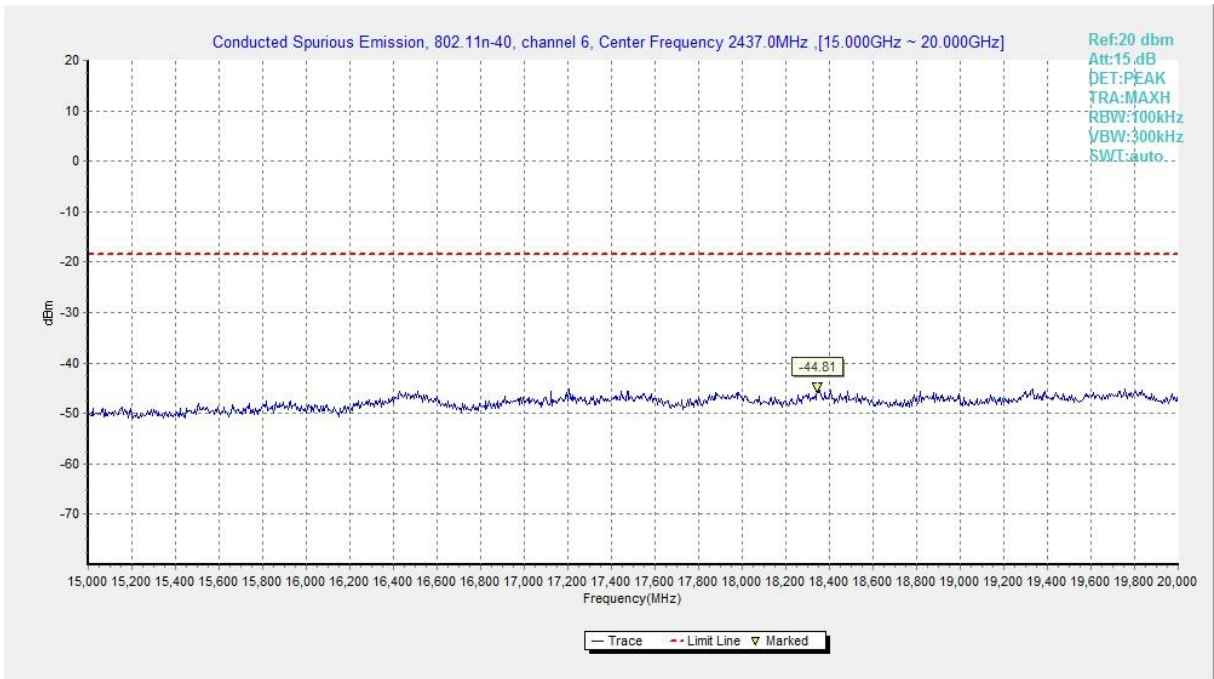


Fig.A.6.1.87 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 15 GHz-20 GHz)

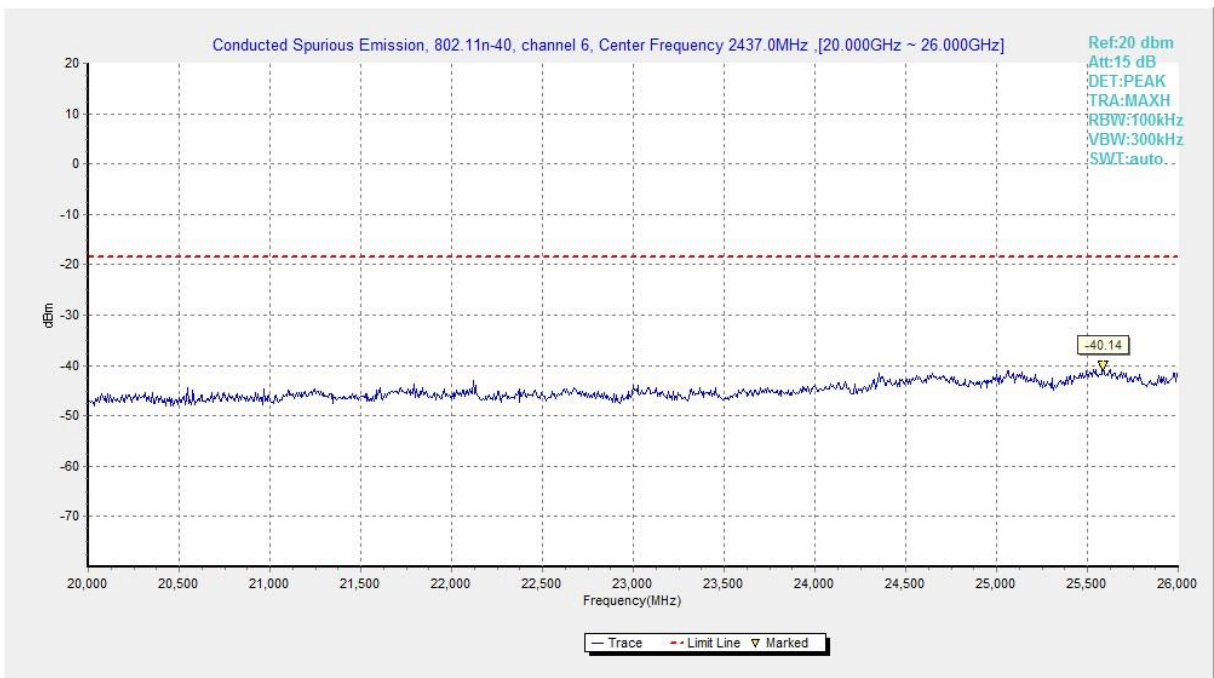


Fig.A.6.1.88 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 20 GHz-26 GHz)

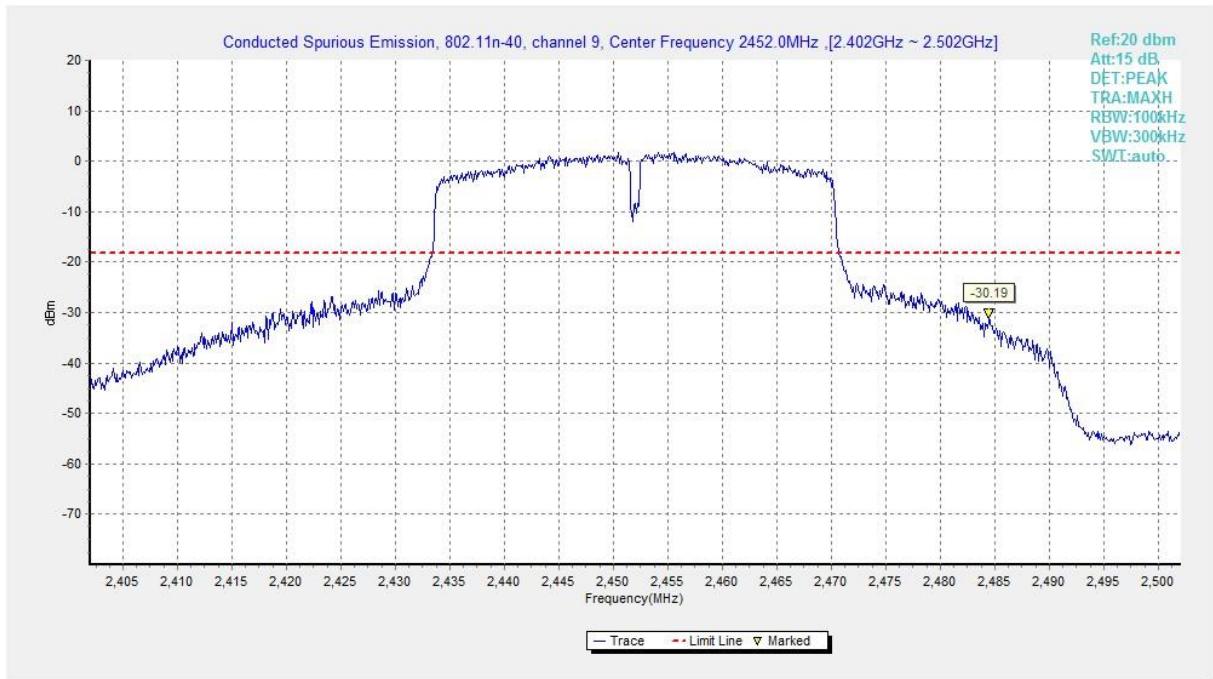


Fig.A.6.1.89 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, Center Frequency)

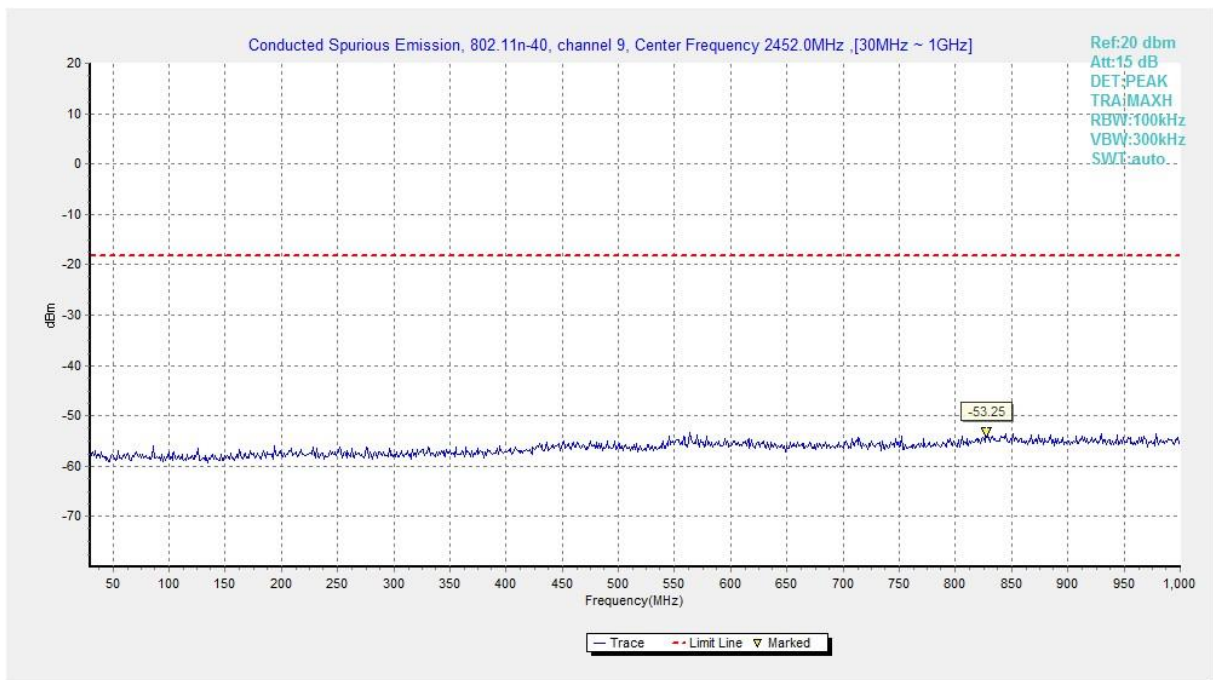


Fig.A.6.1.90 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 30 MHz-1 GHz)

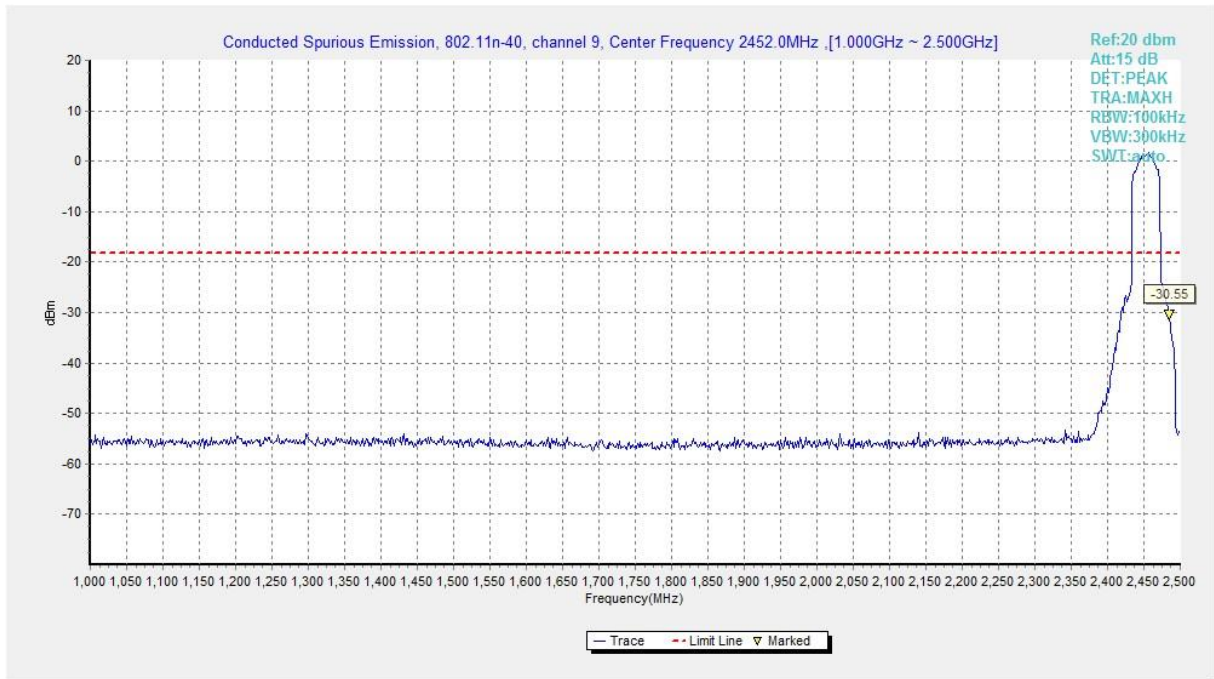


Fig.A.6.1.91 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 1 GHz-2.5 GHz)

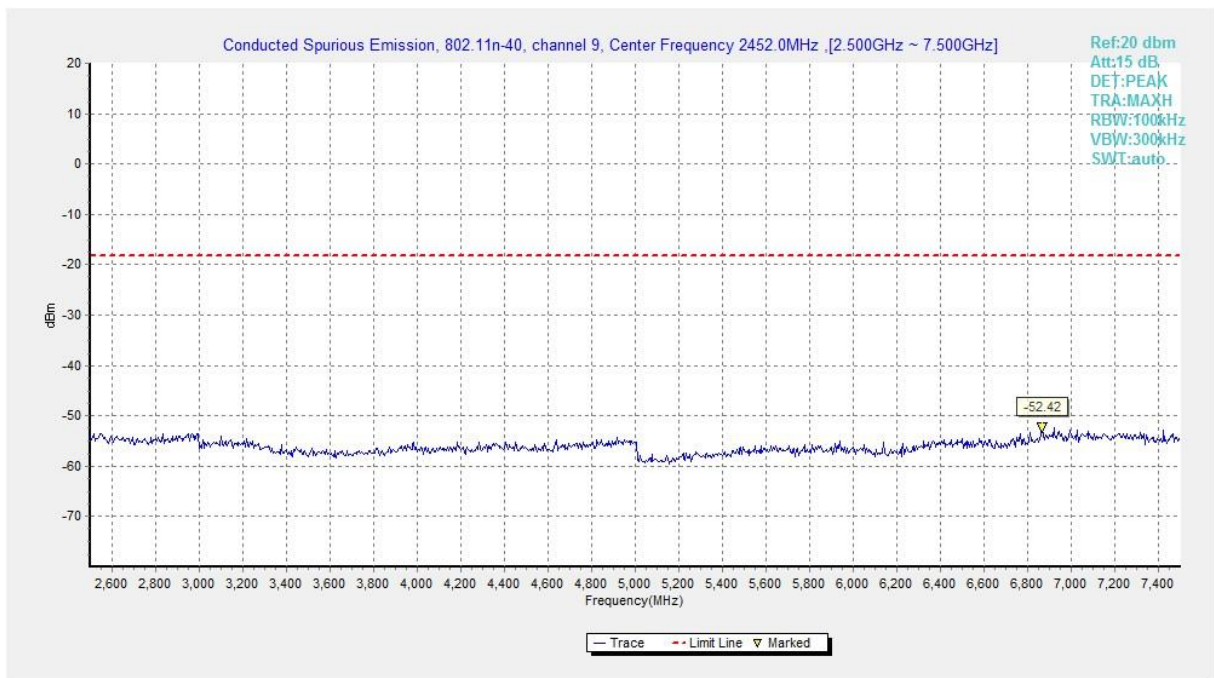


Fig.A.6.1.92 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 2.5 GHz-7.5 GHz)

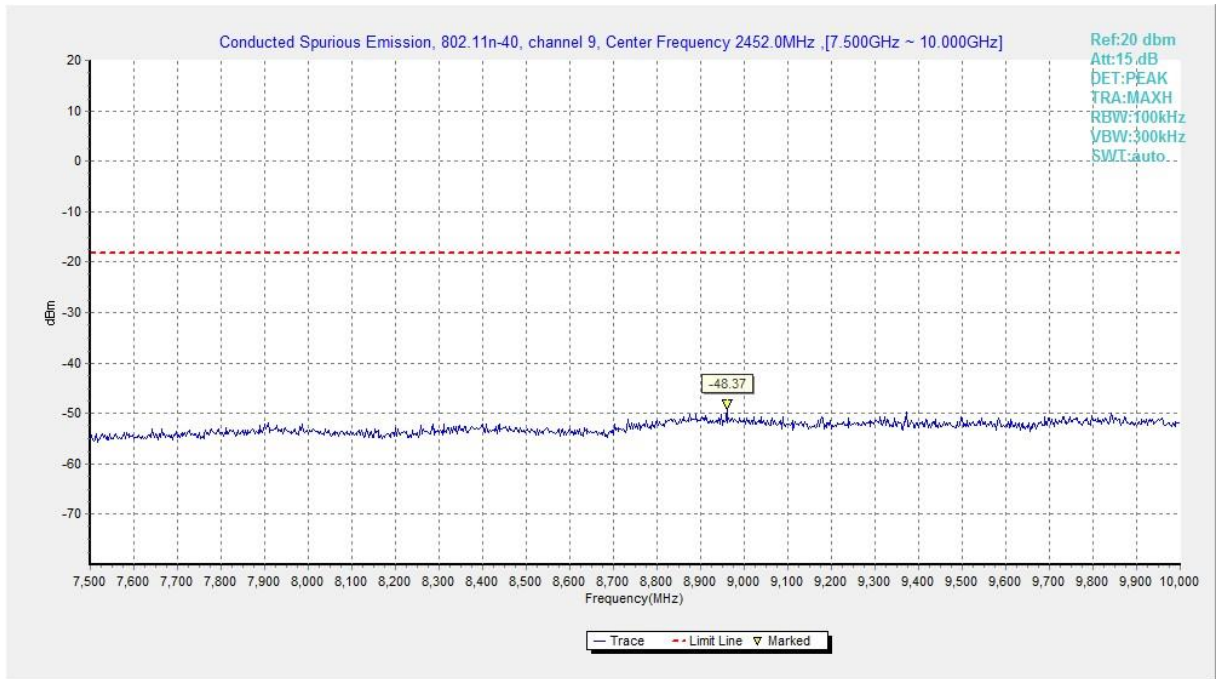


Fig.A.6.1.93 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 7.5 GHz-10 GHz)

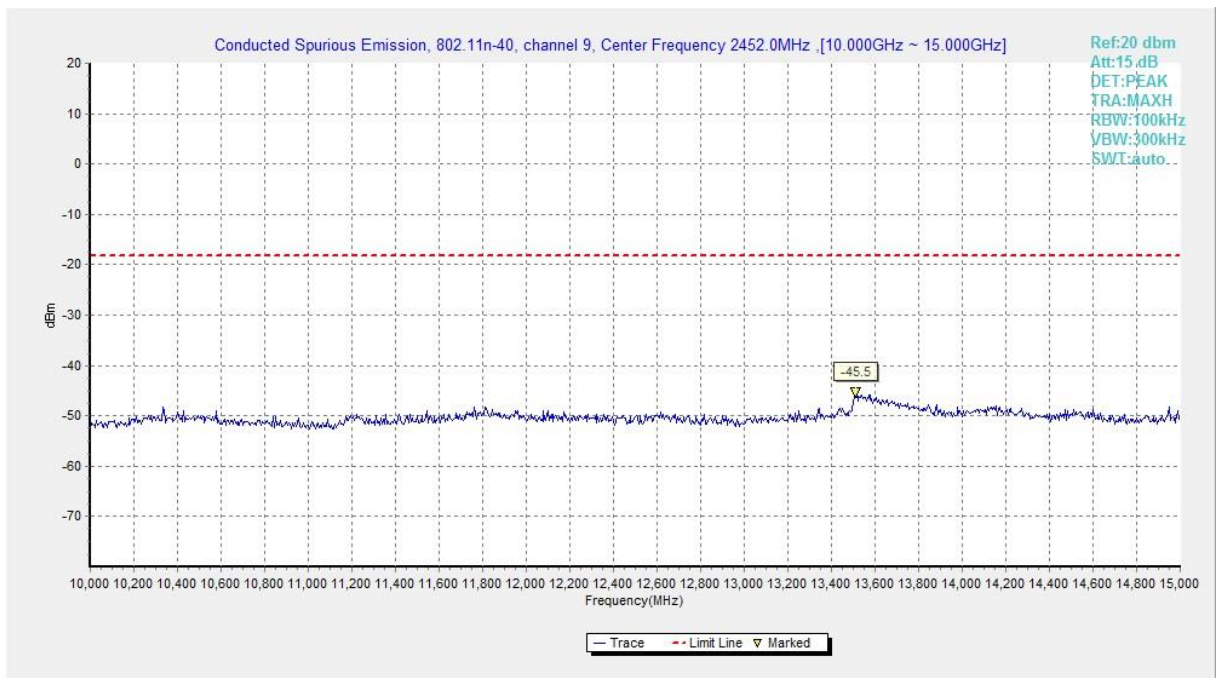


Fig.A.6.1.94 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 10 GHz-15 GHz)

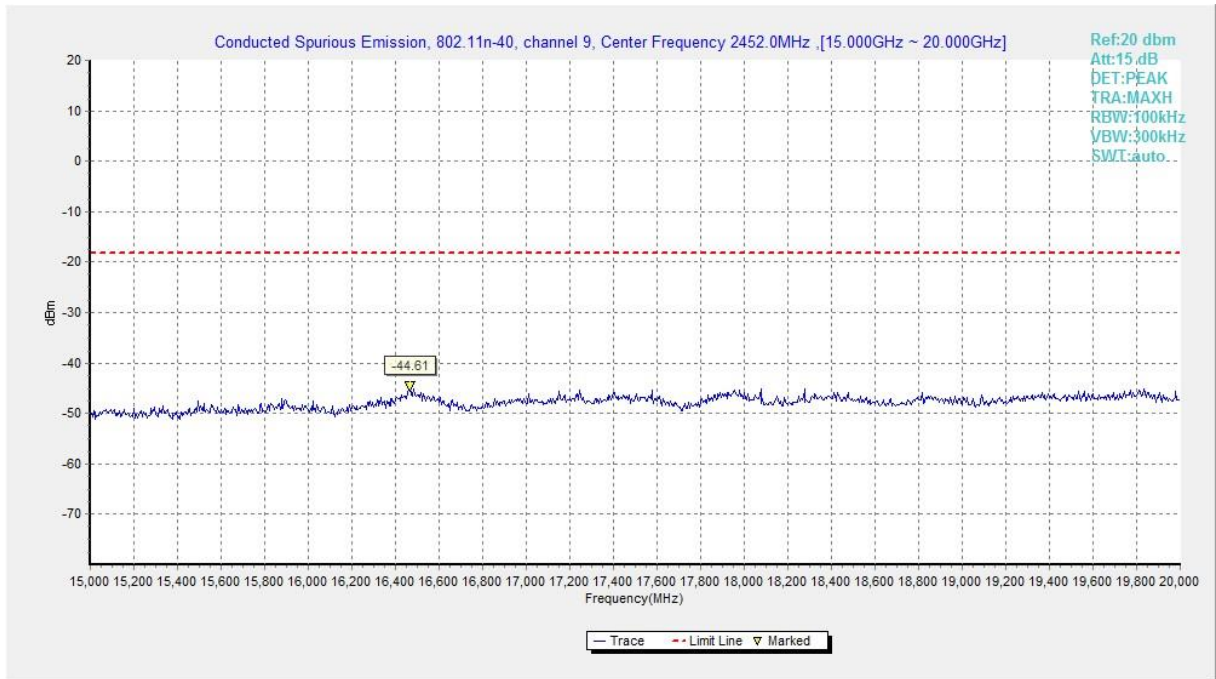


Fig.A.6.1.95 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 15 GHz-20 GHz)

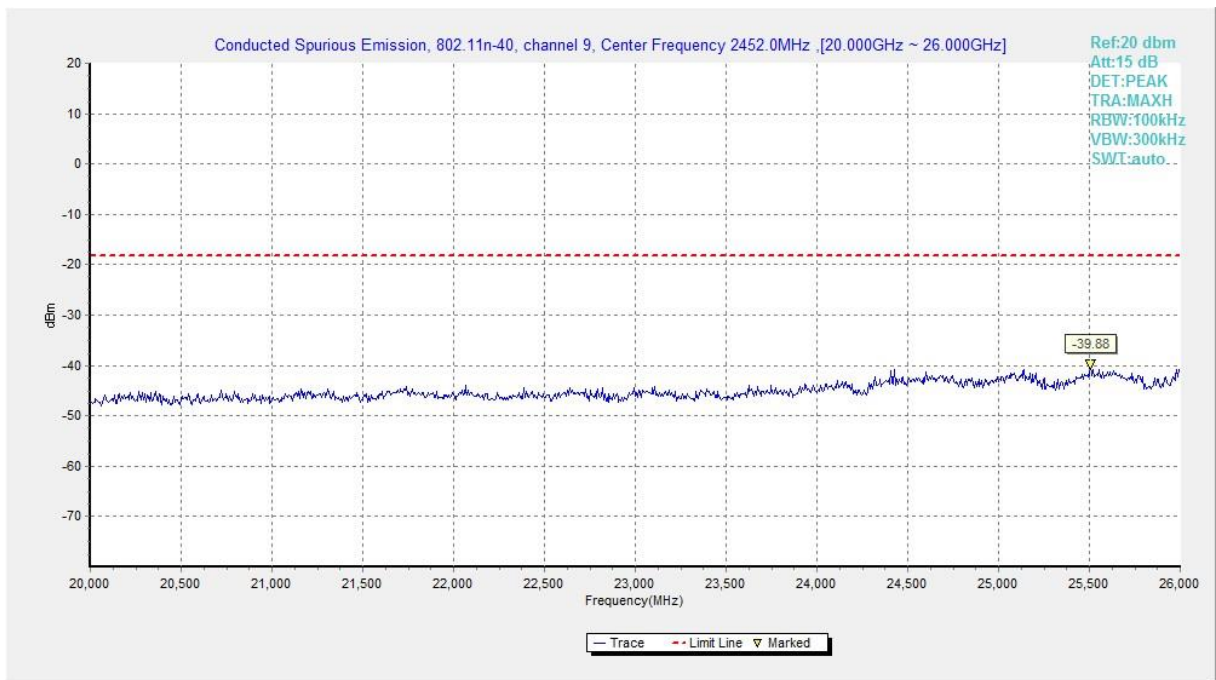


Fig.A.6.1.96 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

EUT ID: EUT1

Measurement results for Set.1:
802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.45GHz---L	Fig.A.6.2.1	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.45GHz---L	Fig.A.6.2.3	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.45GHz---L	Fig.A.6.2.5	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.6	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.31GHz~2.45GHz---L	Fig.A.6.2.7	P
	9	2.45GHz~2.50GHz---H	Fig.A.6.2.8	P

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2387.532	60.66	3.5	31.9	25.30	74.0	13.3	H
2388.736	60.33	3.5	31.9	24.97	74.0	13.7	H
4824.000	42.11	-26.0	33.9	34.21	74.0	31.9	V
7236.000	44.96	-24.2	35.6	33.56	74.0	29.0	H
9648.000	45.68	-24.3	37.0	32.99	74.0	28.3	H
12060.000	49.67	-22.4	38.9	33.18	74.0	24.3	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2343.600	48.14	-31.6	31.8	47.91	74.0	25.9	H
2503.400	50.20	-29.9	32.0	48.14	74.0	23.8	H
4874.000	40.16	-26.3	34.0	32.51	74.0	33.8	H
7311.000	42.51	-25.0	35.6	31.92	74.0	31.5	V
9748.000	46.14	-24.1	37.1	33.14	74.0	27.9	H
12185.000	48.44	-22.5	38.9	32.05	74.0	25.6	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.565	61.48	3.4	32.0	26.08	74.0	12.5	H
2483.845	61.20	3.4	32.0	25.81	74.0	12.8	H
4924.000	41.34	-26.5	34.0	33.90	74.0	32.7	H
7386.000	44.17	-24.6	35.6	33.13	74.0	29.8	H
9848.000	46.09	-24.0	37.2	32.92	74.0	27.9	H
12310.000	50.22	-21.3	38.9	32.58	74.0	23.8	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.842	69.33	3.5	31.9	33.97	74.0	4.7	H
2389.912	69.40	3.5	31.9	34.04	74.0	4.6	H
4824.000	42.11	-26.0	33.9	34.20	74.0	31.9	V
7236.000	45.27	-24.2	35.6	33.86	74.0	28.7	H
9648.000	45.84	-24.3	37.0	33.15	74.0	28.2	H
12060.000	48.60	-22.4	38.9	32.11	74.0	25.4	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2347.800	47.90	-31.6	31.8	47.63	74.0	26.1	H
2513.800	50.43	-30.1	32.0	48.48	74.0	23.6	H
4874.000	41.23	-26.3	34.0	33.58	74.0	32.8	H
7311.000	42.34	-25.0	35.6	31.75	74.0	31.7	V
9748.000	46.28	-24.1	37.1	33.28	74.0	27.7	H
12185.000	49.45	-22.5	38.9	33.07	74.0	24.6	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.595	71.94	3.4	32.0	36.54	74.0	2.1	H
2483.640	70.95	3.4	32.0	35.55	74.0	3.1	H
4924.000	41.98	-26.5	34.0	34.53	74.0	32.0	V
7386.000	45.18	-24.6	35.6	34.14	74.0	28.8	V
9848.000	45.66	-24.0	37.2	32.48	74.0	28.3	V
12310.000	49.49	-21.3	38.9	31.86	74.0	24.5	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.422	67.27	3.5	31.9	31.91	74.0	6.7	H
2389.464	67.80	3.5	31.9	32.44	74.0	6.2	H
4824.000	40.85	-26.0	33.9	32.95	74.0	33.1	V
7236.000	44.47	-24.2	35.6	33.06	74.0	29.5	V
9648.000	45.47	-24.3	37.0	32.78	74.0	28.5	V
12060.000	49.72	-22.4	38.9	33.23	74.0	24.3	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2346.200	47.95	-31.6	31.8	47.70	74.0	26.0	H
2509.200	50.94	-30.0	32.0	48.94	74.0	23.1	H
4874.000	40.37	-26.3	34.0	32.72	74.0	33.6	H
7311.000	43.25	-25.0	35.6	32.66	74.0	30.7	H
9748.000	45.37	-24.1	37.1	32.38	74.0	28.6	H
12185.000	49.13	-22.5	38.9	32.75	74.0	24.9	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.660	67.53	3.4	32.0	32.14	74.0	6.5	H
2483.760	65.97	3.4	32.0	30.57	74.0	8.0	H
4924.000	41.17	-26.5	34.0	33.72	74.0	32.8	H
7386.000	43.91	-24.6	35.6	32.87	74.0	30.1	H
9848.000	47.30	-24.0	37.2	34.12	74.0	26.7	H
12310.000	50.02	-21.3	38.9	32.38	74.0	24.0	V

802.11n-HT40
Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.660	67.53	3.4	32.0	32.14	74.0	6.5	H
2483.760	65.97	3.4	32.0	30.57	74.0	8.0	H
4844.000	41.52	-26.2	33.9	33.81	74.0	32.5	H
7266.000	44.07	-24.4	35.6	32.82	74.0	29.9	H
9688.000	45.84	-24.1	37.0	32.94	74.0	28.2	H
12110.000	49.97	-22.1	38.9	33.18	74.0	24.0	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2348.400	48.20	-31.6	31.8	47.92	74.0	25.8	H
2503.800	50.35	-30.0	32.0	48.29	74.0	23.7	H
4874.000	39.68	-26.3	34.0	32.03	74.0	34.3	V
7311.000	43.17	-25.0	35.6	32.58	74.0	30.8	V
9748.000	46.47	-24.1	37.1	33.48	74.0	27.5	V
12185.000	49.71	-22.5	38.9	33.33	74.0	24.3	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.615	72.85	3.4	32.0	37.46	74.0	1.2	H
2484.880	72.69	3.4	32.0	37.30	74.0	1.3	H
4904.000	40.50	-26.4	34.0	32.88	74.0	33.5	V
7356.000	44.42	-24.6	35.6	33.45	74.0	29.6	V
9808.000	46.64	-23.9	37.2	33.34	74.0	27.4	V
12260.000	50.12	-21.5	38.9	32.70	74.0	23.9	H

Average
802.11b
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2387.235	47.18	3.5	31.9	11.82	54.0	6.8	H
2387.862	47.24	3.5	31.9	11.88	54.0	6.8	H
4824.000	31.00	-26.0	33.9	23.10	54.0	23.0	V
7236.000	33.80	-24.2	35.6	22.39	54.0	20.2	V
9648.000	35.08	-24.3	37.0	22.39	54.0	18.9	H
12060.000	38.29	-22.4	38.9	21.81	54.0	15.7	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2407.960	48.24	3.4	31.9	12.95	54.0	5.8	H
2470.380	48.52	3.5	32.0	13.05	54.0	5.5	H
4874.250	30.72	-26.3	34.0	23.07	54.0	23.3	V
7311.000	32.54	-25.0	35.6	21.95	54.0	21.5	H
9747.750	35.39	-24.1	37.1	22.40	54.0	18.6	V
12185.250	38.22	-22.5	38.9	21.84	54.0	15.8	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.527	48.44	3.4	32.0	13.04	54.0	5.6	H
2483.622	48.41	3.4	32.0	13.01	54.0	5.6	H
4923.750	31.07	-26.5	34.0	23.62	54.0	22.9	H
7386.000	33.50	-24.6	35.6	22.46	54.0	20.5	H
9848.250	35.38	-24.0	37.2	22.21	54.0	18.6	H
12309.750	38.64	-21.3	38.9	21.00	54.0	15.4	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.895	49.73	3.5	31.9	14.37	54.0	4.3	H
2389.952	49.47	3.5	31.9	14.10	54.0	4.5	H
4824.000	31.30	-26.0	33.9	23.39	54.0	22.7	H
7236.000	33.90	-24.2	35.6	22.50	54.0	20.1	H
9648.000	35.16	-24.3	37.0	22.48	54.0	18.8	H
12060.000	38.44	-22.4	38.9	21.95	54.0	15.6	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2404.520	52.03	3.4	31.9	16.76	54.0	2.0	V
2459.680	52.26	3.5	32.0	16.85	54.0	1.7	V
4874.250	30.93	-26.3	34.0	23.28	54.0	23.1	H
7311.000	32.71	-25.0	35.6	22.12	54.0	21.3	H
9747.750	35.52	-24.1	37.1	22.52	54.0	18.5	H
12185.250	38.35	-22.5	38.9	21.97	54.0	15.7	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.508	50.17	3.4	32.0	14.77	54.0	3.8	H
2483.698	50.12	3.4	32.0	14.72	54.0	3.9	H
4923.750	31.41	-26.5	34.0	23.96	54.0	22.6	H
7386.000	33.78	-24.6	35.6	22.75	54.0	20.2	H
9848.250	35.52	-24.0	37.2	22.35	54.0	18.5	H
12309.750	38.76	-21.3	38.9	21.12	54.0	15.2	H

802.11n-HT20
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.838	48.92	3.5	31.9	13.56	54.0	5.1	H
2389.971	48.96	3.5	31.9	13.60	54.0	5.0	H
4824.000	31.65	-26.0	33.9	23.74	54.0	22.3	V
7236.000	34.23	-24.2	35.6	22.83	54.0	19.8	H
9648.000	35.50	-24.3	37.0	22.81	54.0	18.5	H
12060.000	38.61	-22.4	38.9	22.12	54.0	15.4	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2405.680	50.37	3.4	31.9	15.10	54.0	3.6	H
2462.850	51.28	3.5	32.0	15.85	54.0	2.7	H
4874.250	31.31	-26.3	34.0	23.66	54.0	22.7	H
7311.000	32.97	-25.0	35.6	22.38	54.0	21.0	V
9747.075	35.66	-24.1	37.1	22.67	54.0	18.3	V
12185.250	38.45	-22.5	38.9	22.07	54.0	15.6	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.546	48.66	3.4	32.0	13.26	54.0	5.3	H
2483.603	48.63	3.4	32.0	13.23	54.0	5.4	H
4923.750	31.80	-26.5	34.0	24.35	54.0	22.2	H
7386.000	33.92	-24.6	35.6	22.89	54.0	20.1	H
9848.250	35.74	-24.0	37.2	22.56	54.0	18.3	H
12309.750	38.88	-21.3	38.9	21.25	54.0	15.1	H

802.11n-HT40
Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.546	48.66	3.4	32.0	13.26	54.0	5.3	H
2483.603	48.63	3.4	32.0	13.23	54.0	5.4	H
4844.250	31.17	-26.2	33.9	23.47	54.0	22.8	H
7266.000	33.90	-24.4	35.6	22.65	54.0	20.1	V
9687.750	35.18	-24.1	37.0	22.28	54.0	18.8	H
12110.250	38.61	-22.1	38.9	21.83	54.0	15.4	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2396.773	50.06	3.4	31.9	14.78	54.0	3.9	H
2481.532	52.88	3.4	32.0	17.46	54.0	1.1	H
4874.250	31.10	-26.3	34.0	23.45	54.0	22.9	H
7311.000	32.89	-25.0	35.6	22.30	54.0	21.1	H
9747.750	35.60	-24.1	37.1	22.60	54.0	18.4	V
12185.250	38.35	-22.5	38.9	21.97	54.0	15.7	V

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.565	51.15	3.4	32.0	15.76	54.0	2.8	H
2483.717	51.11	3.4	32.0	15.72	54.0	2.9	H
4904.250	31.78	-26.4	34.0	24.17	54.0	22.2	V
7356.000	33.92	-24.6	35.6	22.94	54.0	20.1	V
9807.750	35.52	-23.9	37.2	22.22	54.0	18.5	V
12260.250	38.89	-21.5	38.9	21.47	54.0	15.1	H

Test graphs as below:

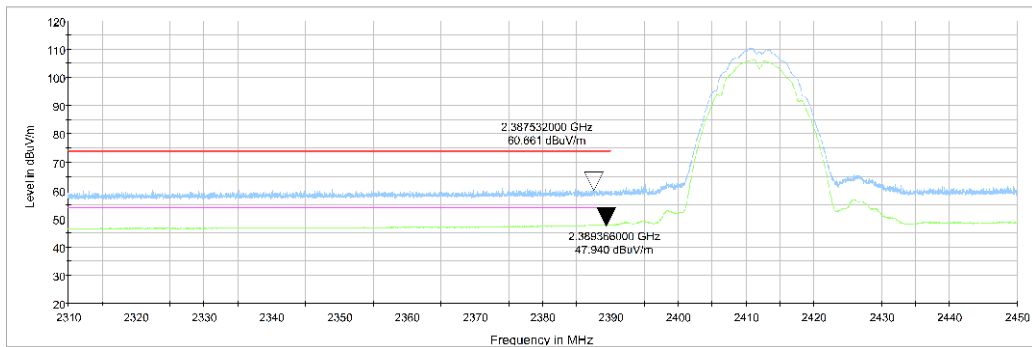


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.45GHz

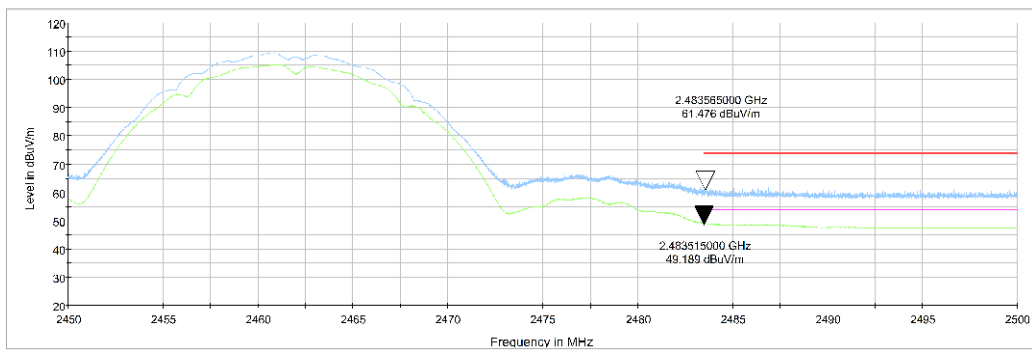


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

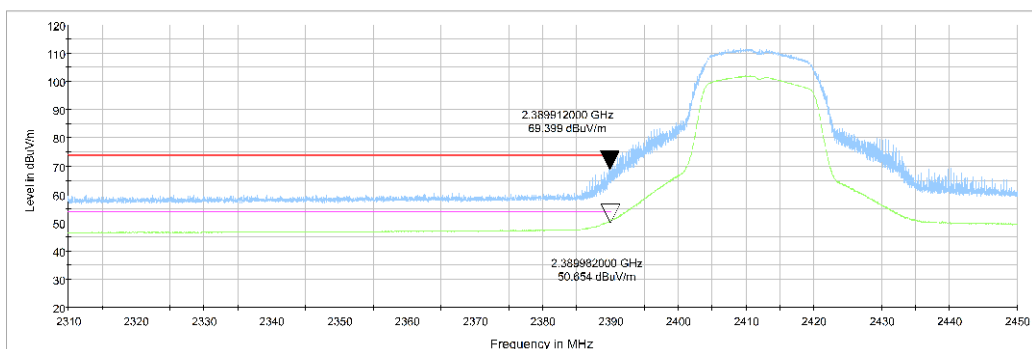


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.45GHz

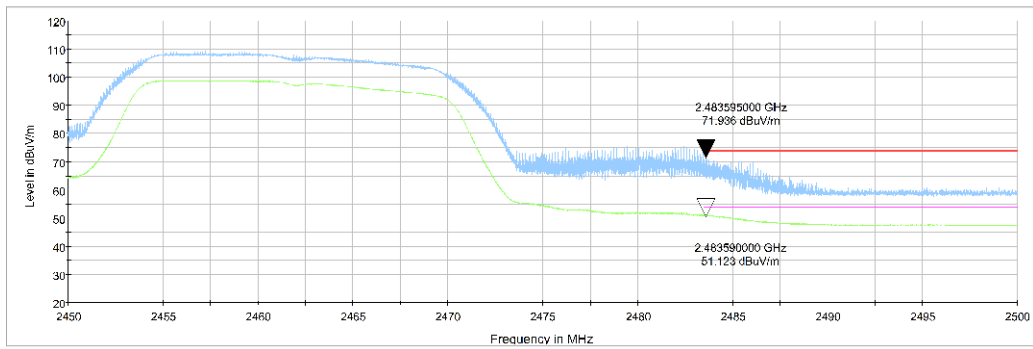


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

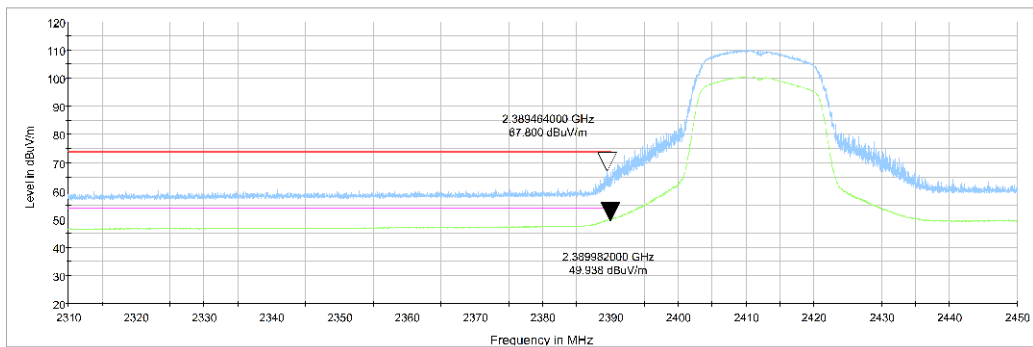


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz

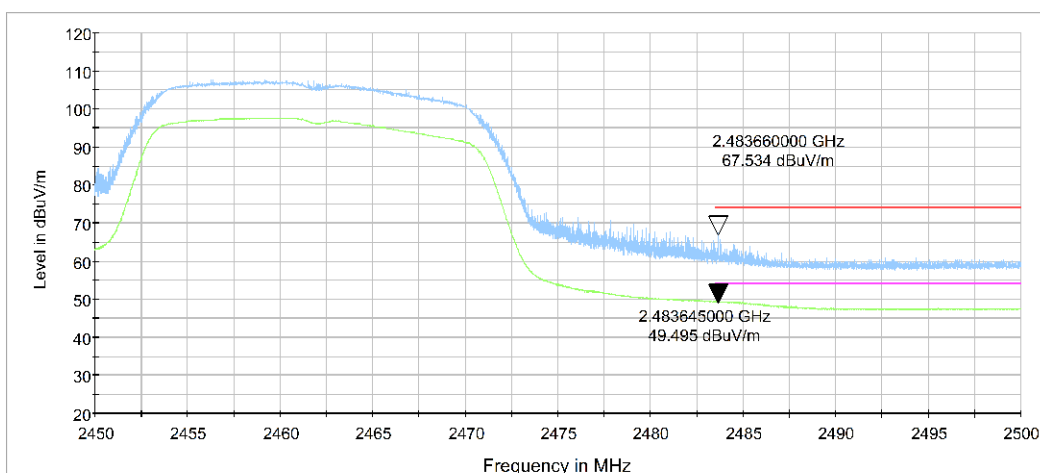


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

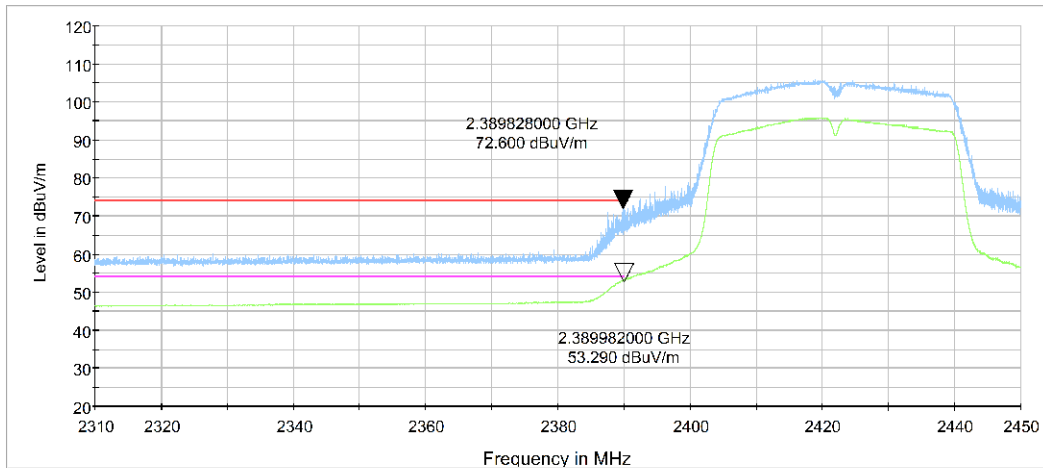


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.45GHz

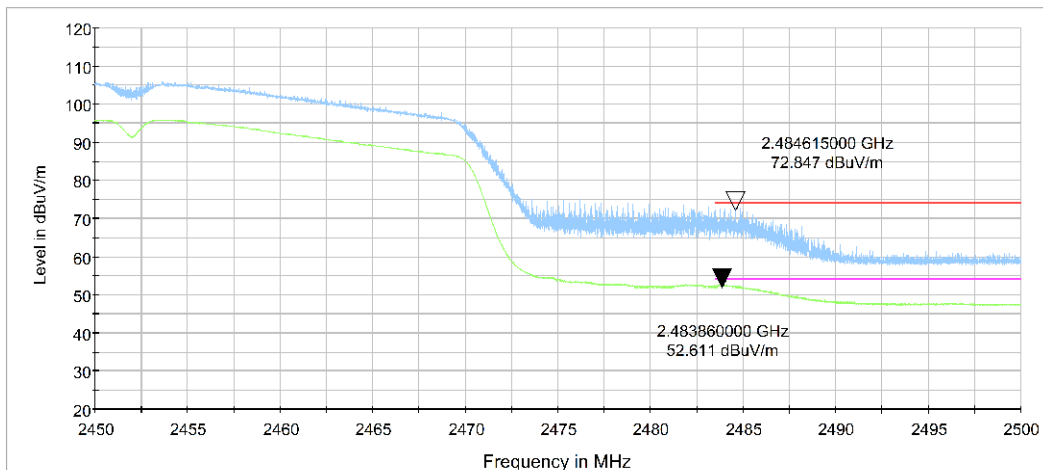


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:
WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE1-1		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE1-1		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

Measurement results for Set.1-1 and Set.1-2:

The measurement results showed here are worst cases of the combinations of different chargers and cables

Result for Traffic:

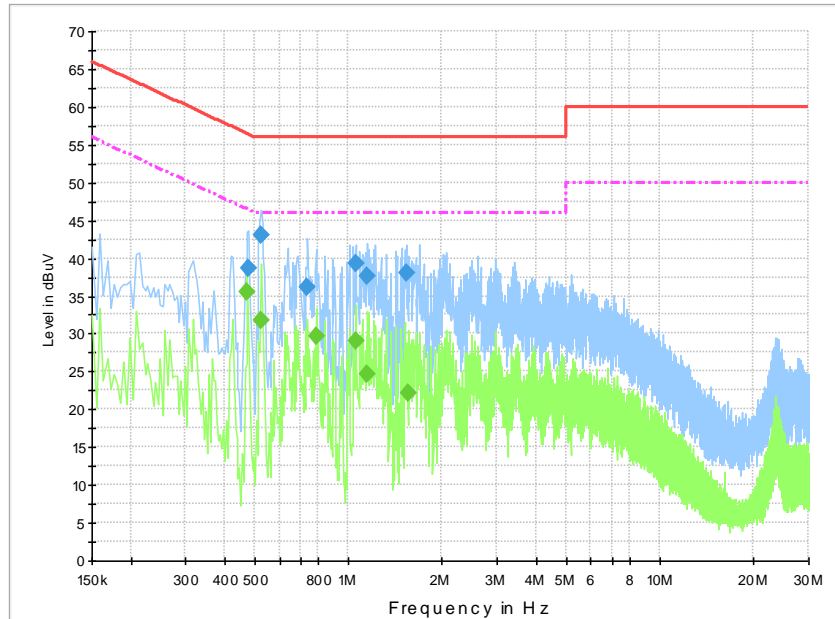


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.478500	38.6	5000.0	9.000	On	L1	19.9	17.8	56.4
0.523500	43.0	5000.0	9.000	On	L1	19.9	13.0	56.0
0.739500	36.2	5000.0	9.000	On	L1	19.8	19.8	56.0
1.054500	39.4	5000.0	9.000	On	L1	19.7	16.6	56.0
1.153500	37.5	5000.0	9.000	On	L1	19.7	18.5	56.0
1.531500	38.1	5000.0	9.000	On	L1	19.7	17.9	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.474000	35.6	5000.0	9.000	On	L1	19.9	10.8	46.4
0.523500	31.7	5000.0	9.000	On	N	19.9	14.3	46.0
0.789000	29.7	5000.0	9.000	On	L1	19.8	16.3	46.0
1.054500	29.0	5000.0	9.000	On	L1	19.7	17.0	46.0
1.153500	24.6	5000.0	9.000	On	N	19.7	21.4	46.0
1.563000	22.2	5000.0	9.000	On	N	19.7	23.8	46.0

Result for Idle:

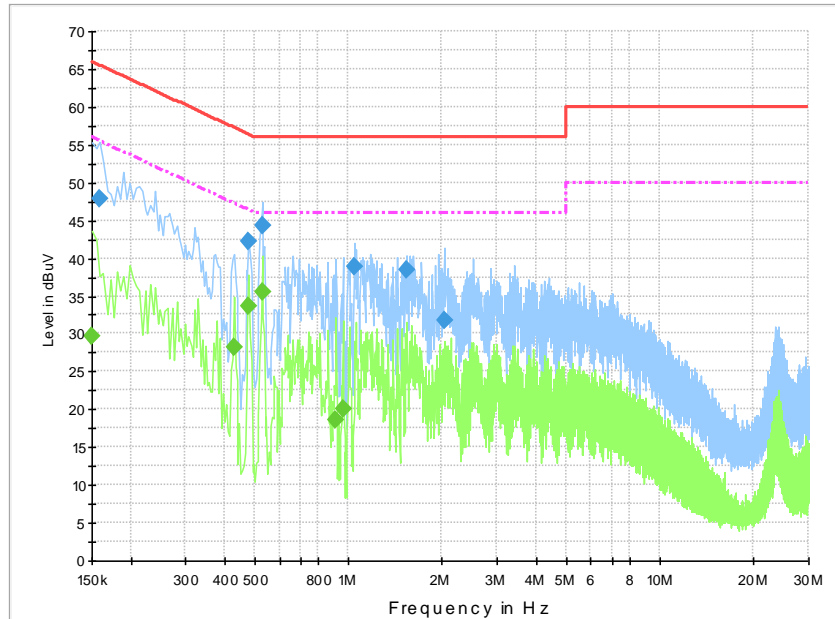


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	47.8	5000.0	9.000	On	L1	20.0	17.8	65.5
0.478500	42.3	5000.0	9.000	On	L1	19.9	14.1	56.4
0.528000	44.3	5000.0	9.000	On	L1	19.8	11.7	56.0
1.045500	38.9	5000.0	9.000	On	L1	19.7	17.1	56.0
1.536000	38.4	5000.0	9.000	On	L1	19.7	17.6	56.0
2.026500	31.7	5000.0	9.000	On	L1	19.7	24.3	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	29.6	5000.0	9.000	On	N	19.8	26.4	56.0
0.429000	28.2	5000.0	9.000	On	L1	19.9	19.1	47.3
0.478500	33.7	5000.0	9.000	On	L1	19.9	12.7	46.4
0.528000	35.6	5000.0	9.000	On	L1	19.8	10.4	46.0
0.910500	18.5	5000.0	9.000	On	L1	19.7	27.5	46.0
0.960000	20.1	5000.0	9.000	On	L1	19.8	25.9	46.0

ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



END OF REPORT