



# FCC 15B TEST REPORT

No. I22Z61716-EMC01

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE mobile phone**

**Model Name: T607DL,T430M,T430V**

**FCC ID: 2ACCJH167**

with

**Hardware Version: 04**

**Software Version: UH3F**

**Issued Date: 2022-12-28**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z61716-EMC01	Rev.0	1 <sup>st</sup> edition	2022-12-28

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>23</b>
<b>ANNEX C: TEST LAYOUT .....</b>	<b>24</b>

## 1. Test Laboratory

### 1.1. Testing Location

#### Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
100191, P. R. China

### 1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2022-08-29

Testing End Date: 2022-10-09

### 1.4. Signature



---

An Hui  
(Prepared this test report)



---

Zhang Ying  
(Reviewed this test report)



---

Zhang Xia  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE mobile phone
Model Name	T607DL,T430M,T430V
FCC ID	2ACCJH167

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT2	016324000010781	04	UH3F

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>	<b>Note</b>
AE1	Battery	/	/
AE2	Battery	/	/
AE3	USB Cable	/	/
AE5	Charger1	/	/
AE6	Charger2	/	/

##### AE1

Model	TLi028D7
Manufacturer	NINGBO VEKEN BATTERY CO., LTD.
Capacity	min2880mAh/type 3000mAh
Nominal Voltage	3.85V

##### AE2

Model	TLi028C7
Manufacturer	NINGBO VEKEN BATTERY CO., LTD.
Capacity	min2880mAh/type 3000mAh
Nominal Voltage	3.85V

##### AE3

Model	CDA0000141C1
Manufacturer	JUWEI ELECTRONICS CO.,LTD
Length of cable	/

##### AE5

Model	UC13US
Manufacturer	HUIZHOU PUAN ELECTRONICS CO.,LTD
Length of cable	/



AE6

Model UC13US  
Manufacturer HUIZHOU BYD ELECTRONIC CO LTD  
Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT2+ AE1/2+ AE3+AE5	/
Set.2	EUT2+ AE1/2+ AE3+AE6	/
Set.3	EUT2+ AE1/2+ AE3+Headset	/

Note:

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM 850MHz,WCDMA Band5, LTE Bands B5/12/13/26/71. The measurement results showed here are worst cases of different bands.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2020
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters × 17meters × 10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	A.2	P	CTTL(huayuan North Road)

T607DL,T430M,T430V is a variant model based on T430W, According to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01; the following test items and test modes were performed:

Test Item	Mode or Feature	EUT Set-up
Radiated Emission	Charging, USB, FM	Set.1, Set.2, Set.3
Conducted Emission	Charging, USB, FM	Set.1, Set.2, Set.3

Other results are inherited from the initial model. The report number for initial model is I22Z61716-EMC01 (FCC ID: 2AJOTTA-1207).

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100344	R&S	2023-03-21	1 Year
2	LISN	ENV216	101200	R&S	2023-05-30	1 year
3	Universal Radio Communication Tester	CMW500	116588	R&S	2022-12-20	1 year
4	Test Receiver	ESW44	103015	R&S	2023-01-23	1 Year
5	EMI Antenna	VULB 9163	01223	Schwarzbeck	2022-12-28	1 year
6	EMI Antenna	3115	00167250	ETS-Lindgren	2023-01-20	1 year
7	Signal Generator	MBV100A	260613	R&S	2023-01-09	1 year
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
10	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A
11	PC	M4000e-17	M706RMW2	Lenovo	N/A	N/A

### Test Software

Radiated Emission	EMC32 V10.60.20
Conducted Emission	EMC32 V8.53.0

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (charging mode) at distances of 10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

$$\text{Limit}(10\text{m}) = \text{Limit}(3\text{m}) + 20[\log(3/10)]$$

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.40dB, 1GHz-18GHz: 4.32dB,  $k=2$ .

Note: The measurement results showed here are worst cases of the combinations of different Battery, cables and Headset.

Note: The measurement results showed here are worst cases.

#### Measurement results for Set.1:

##### EUT1 Charger1 + Back Camera +GSM 850MHz idle Mode/QP detector

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
30.582000	22.3	110.0	V	0.0	-15.0	7.7	30.0
32.910000	18.2	275.0	V	270.0	-14.3	11.8	30.0
56.384000	19.3	110.0	V	-23.0	-11.4	10.7	30.0
98.385000	18.5	126.0	V	-45.0	-12.6	15.0	33.5
110.704000	15.6	275.0	V	182.0	-12.8	17.9	33.5
190.729000	14.5	100.0	V	90.0	-12.6	19.0	33.5

##### EUT1 Charger1 + Back Camera +GSM 850MHz idle Mode/Average detector

Frequency (MHz)	Result (dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17984.700	42.8	-29.1	46.7	25.2	H	54.0	11.2
17999.320	42.4	-29.1	46.7	24.8	V	54.0	11.6
17981.300	42.2	-29.1	46.7	24.6	V	54.0	11.8
17632.800	42.1	-29.4	45.2	26.3	V	54.0	11.9
17988.100	42.0	-29.1	46.7	24.4	H	54.0	12.0
17982.660	42.0	-29.1	46.7	24.4	V	54.0	12.0

##### EUT1 Charger1 + Back Camera +GSM 850MHz idle Mode/Peak detector

Frequency (MHz)	Result (dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity	Limit (dB $\mu$ V/m)	Margin (dB)
17897.320	53.4	-29.5	46.0	37.0	V	74.0	20.6
17993.880	53.1	-29.1	46.7	35.5	V	74.0	20.9
17994.900	53.0	-29.1	46.7	35.4	V	74.0	21.0
17565.480	52.8	-29.8	45.2	37.3	V	74.0	21.2
17673.940	52.7	-29.9	45.2	37.3	V	74.0	21.3
17969.400	52.5	-29.1	46.7	34.9	V	74.0	21.5

**Measurement results for Set.2:**
**EUT1 Charger2 +MP4 + WCDMA 850MHz idle Mode /QP detector**

Frequency (MHz)	QuasiPeak (dB <sub>i</sub> ÷V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB <sub>i</sub> ÷V/m)
30. 873000	15. 5	126. 0	V	225. 0	-14. 9	14. 5	30. 0
56. 093000	17. 6	185. 0	V	0. 0	-11. 4	12. 4	30. 0
61. 137000	17. 2	210. 0	V	-45. 0	-12. 4	12. 8	30. 0
99. 840000	12. 3	210. 0	V	208. 0	-12. 3	21. 2	33. 5
163. 472000	11. 0	235. 0	V	2. 0	-14. 9	22. 5	33. 5
193. 348000	14. 6	100. 0	V	68. 0	-12. 4	18. 9	33. 5

**EUT1 Charger2 +MP4 + WCDMA 850MHz idle Mode /Average detector**

Frequency (MHz)	Result (dB <sub>μ</sub> V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB <sub>μ</sub> V)	Polarity	Limit (dB <sub>μ</sub> V/m)	Margin (dB)
17904. 800	42. 7	-29. 3	46. 0	26. 1	H	54. 0	11. 3
17990. 480	42. 4	-29. 1	46. 7	24. 8	V	54. 0	11. 6
17921. 460	42. 3	-29. 4	46. 7	25. 0	V	54. 0	11. 7
17997. 960	42. 2	-29. 1	46. 7	24. 6	V	54. 0	11. 8
17906. 160	42. 0	-29. 3	46. 0	25. 4	V	54. 0	12. 0
17647. 760	41. 9	-29. 6	45. 2	26. 3	H	54. 0	12. 1

**EUT1 Charger2 +MP4 + WCDMA 850MHz idle Mode /Peak detector**

Frequency (MHz)	Result (dB <sub>μ</sub> V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB <sub>μ</sub> V)	Polarity	Limit (dB <sub>μ</sub> V/m)	Margin (dB)
17545. 420	53. 0	-29. 5	44. 4	38. 1	H	74. 0	21. 0
17462. 800	52. 6	-30. 1	44. 4	38. 3	H	74. 0	21. 4
17264. 920	52. 6	-29. 7	43. 4	39. 0	V	74. 0	21. 4
17990. 820	52. 5	-29. 1	46. 7	34. 9	H	74. 0	21. 5
17983. 000	52. 5	-29. 1	46. 7	34. 9	H	74. 0	21. 5
17978. 240	52. 4	-29. 1	46. 7	34. 8	V	74. 0	21. 6

**Measurement results for Set.3:**
**EUT1 USB + Front Camera +FM + LTE Band 5 idle Mode/QP detector**

Frequency (MHz)	QuasiPeak (dB <sub>i</sub> ÷V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB <sub>i</sub> ÷V/m)
39.991000	16.3	300.0	V	315.0	-12.1	13.7	30.0
58.130000	22.2	100.0	V	315.0	-11.7	7.8	30.0
216.240000	27.5	325.0	H	170.0	-11.3	8.5	36.0
288.311000	23.8	325.0	H	28.0	-9.1	12.2	36.0
528.968000	25.8	210.0	V	2.0	-3.0	10.2	36.0
595.704000	25.5	185.0	V	2.0	-1.2	10.5	36.0

**EUT1 USB+Front Camera +FM+ LTE Band 5 idle Mode/Average detector**


Frequency (MHz)	Result (dB <sub>μ</sub> V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB <sub>μ</sub> V)	Polarity	Limit (dB <sub>μ</sub> V/m)	Margin (dB)
17904.800	42.7	-29.3	46.0	26.1	H	54.0	11.3
17990.480	42.4	-29.1	46.7	24.8	V	54.0	11.6
17921.460	42.3	-29.4	46.7	25.0	V	54.0	11.7
17997.960	42.2	-29.1	46.7	24.6	V	54.0	11.8
17906.160	42.0	-29.3	46.0	25.4	V	54.0	12.0
17647.760	41.9	-29.6	45.2	26.3	H	54.0	12.1

**EUT1 USB+Front Camera +FM+ LTE Band 5 idle Mode/Peak detector**


Frequency (MHz)	Result (dB <sub>μ</sub> V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB <sub>μ</sub> V)	Polarity	Limit (dB <sub>μ</sub> V/m)	Margin (dB)
17964.300	53.9	-29.1	46.7	36.3	H	74.0	20.1
17569.220	53.5	-29.8	45.2	38.0	H	74.0	20.5
17924.180	53.3	-29.4	46.7	36.0	V	74.0	20.7
17350.260	53.3	-30.0	43.4	39.9	V	74.0	20.7
17631.440	53.1	-29.4	45.2	37.3	V	74.0	20.9
17997.280	53.0	-29.1	46.7	35.4	V	74.0	21.0

**EUT1 Charger1+Back Camera+GSM 850MHz idle Mode, Set.1**

RE FCC\_30MHz-1GHz\_10m\_Direct\_testing\_FP5b

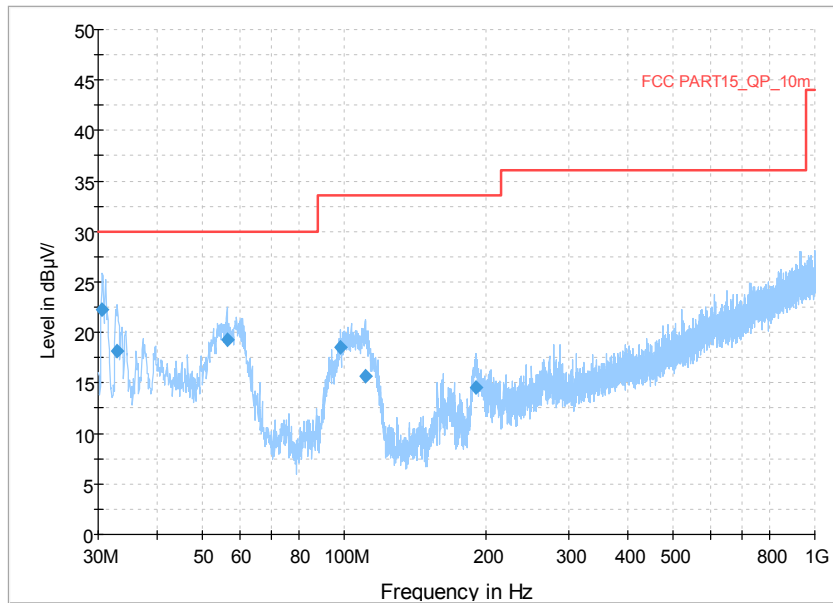

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

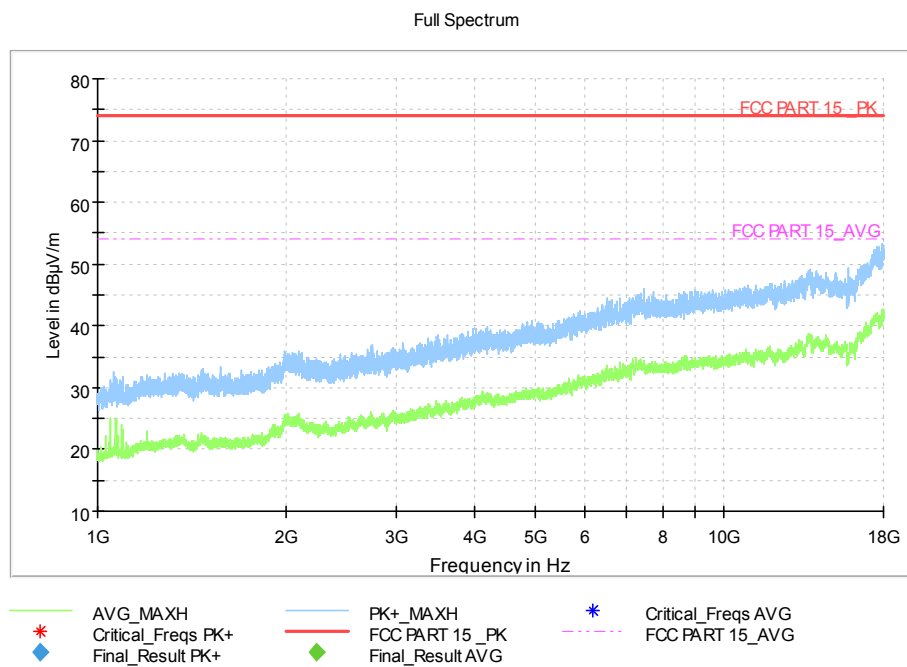


**Figure A.2 Radiated Emission from 1GHz to 18GHz**




**EUT1 Charger2 +MP4 + WCDMA 850MHz idle Mode, Set.2**

RE FCC\_30MHz-1GHz\_10m\_Direct\_testing\_FP5b

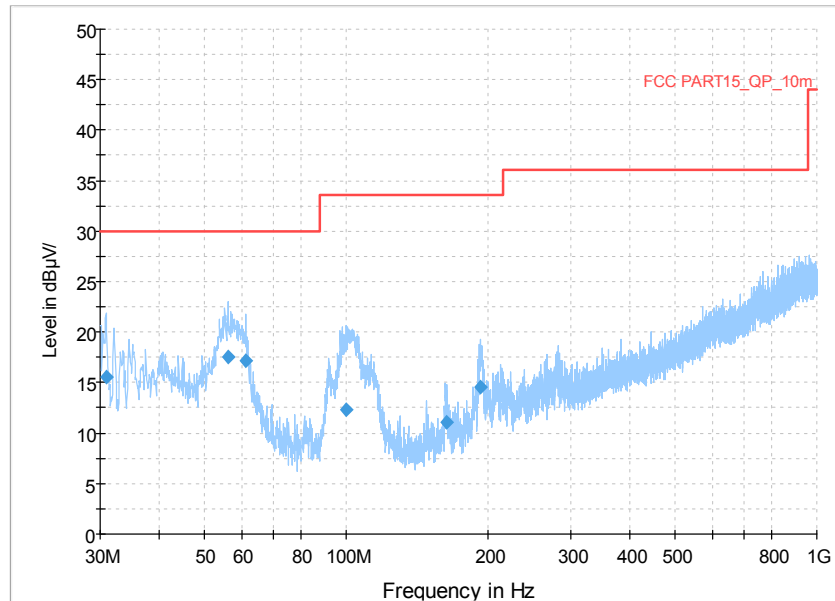


**Figure A.3 Radiated Emission from 30MHz to 1GHz**

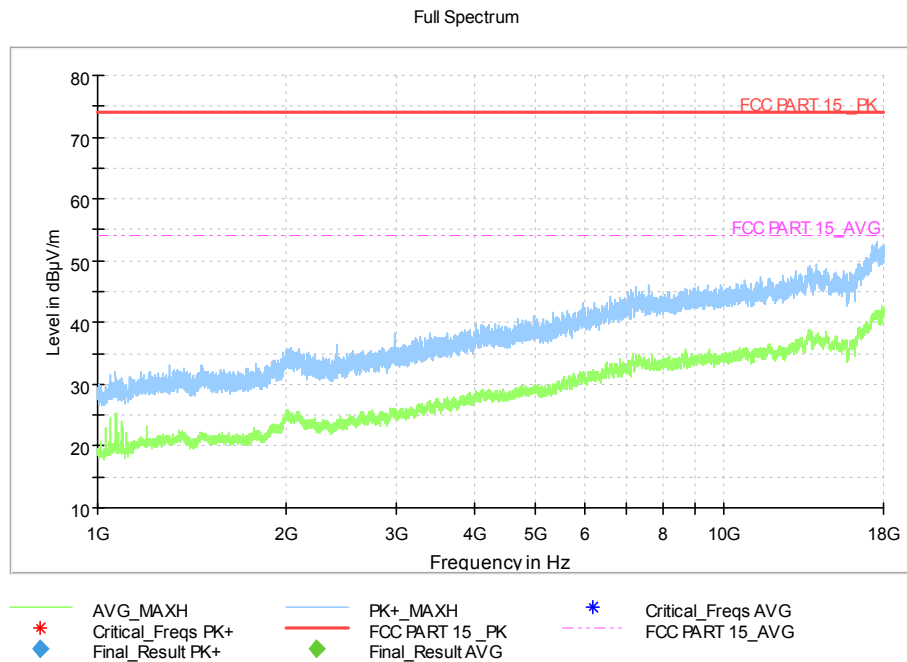


**Figure A.4 Radiated Emission from 1GHz to 18GHz**

**EUT1 USB + Front Camera +FM + LTE Band 5 idle Mode, Set.3**

RE FCC\_30MHz-1GHz\_10m\_Direct\_testing\_FP5b

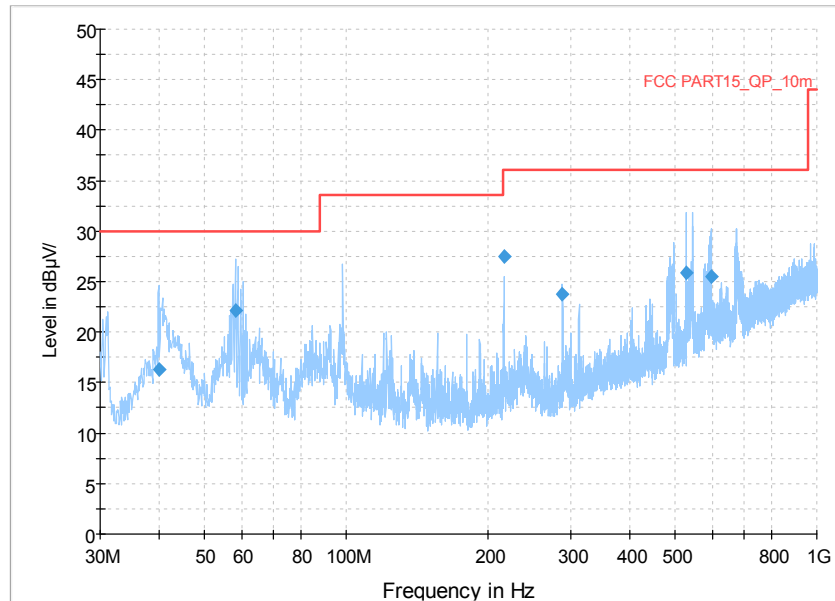

**Figure A.5 Radiated Emission from 30MHz to 1GHz**

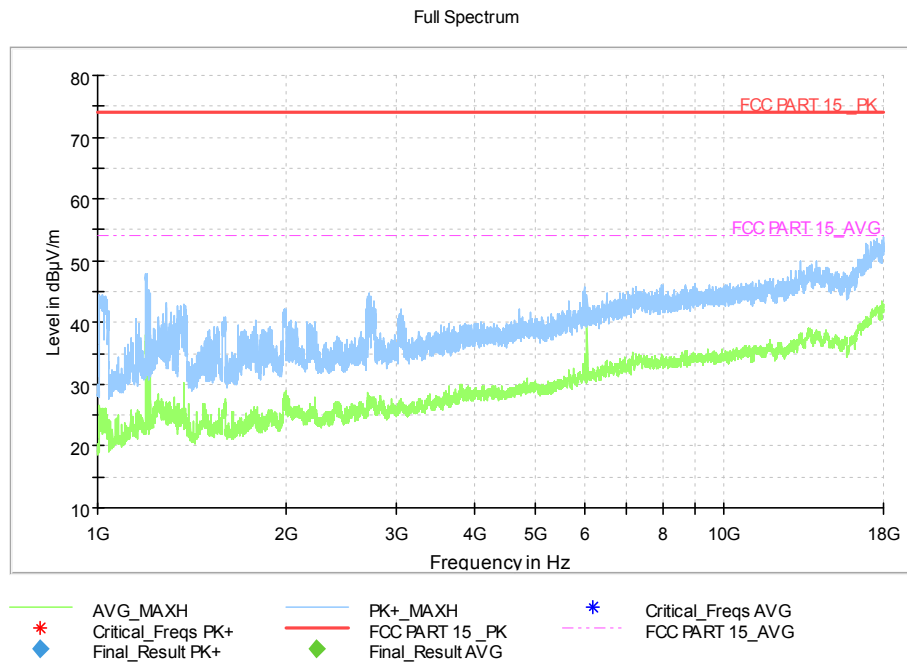

**Figure A.6 Radiated Emission from 1GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U=3.10\text{dB}$ ,  $k=2$ .

Note: The measurement results showed here are worst cases of the combinations of different Battery, cables and Headset.

Note: The measurement results showed here are worst cases.

#### EUT1 Charger1+Back Camera+GSM 850MHz idle Mode, Set.1

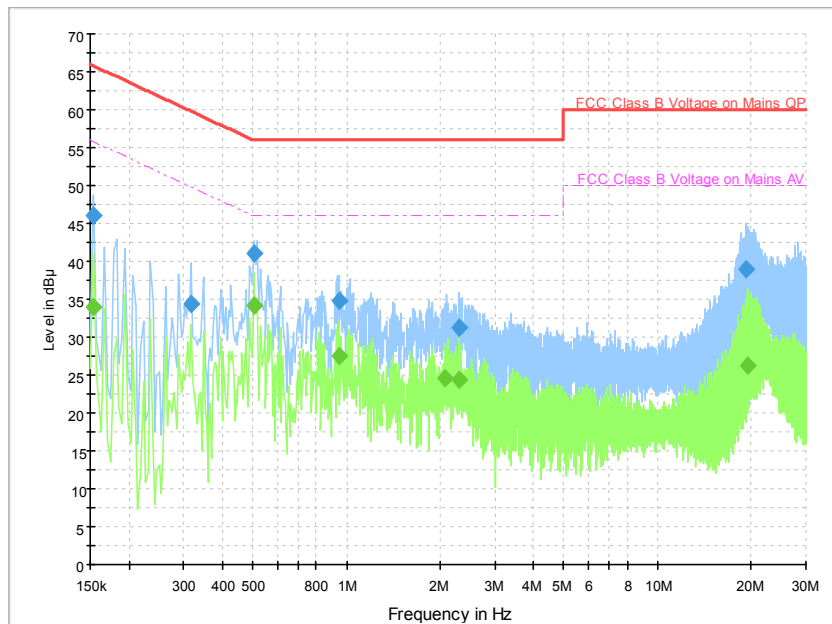



Figure A.7 Conducted Emission

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	46.0	2000.0	9.000	On	L1	19.9	19.8	65.8
0.318000	34.4	2000.0	9.000	On	N	19.7	25.3	59.8
0.506000	41.1	2000.0	9.000	On	L1	19.7	14.9	56.0
0.946000	34.7	2000.0	9.000	On	L1	19.7	21.3	56.0
2.294000	31.2	2000.0	9.000	On	L1	19.6	24.8	56.0
19.270000	38.9	2000.0	9.000	On	L1	19.7	21.1	60.0

#### Final Result 2


Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	33.9	2000.0	9.000	On	L1	19.9	21.9	55.8
0.502000	34.3	2000.0	9.000	On	L1	19.7	11.7	46.0
0.946000	27.5	2000.0	9.000	On	L1	19.7	18.5	46.0
2.062000	24.7	2000.0	9.000	On	L1	19.6	21.3	46.0
2.306000	24.4	2000.0	9.000	On	L1	19.6	21.6	46.0
19.458000	26.3	2000.0	9.000	On	L1	19.7	23.7	50.0

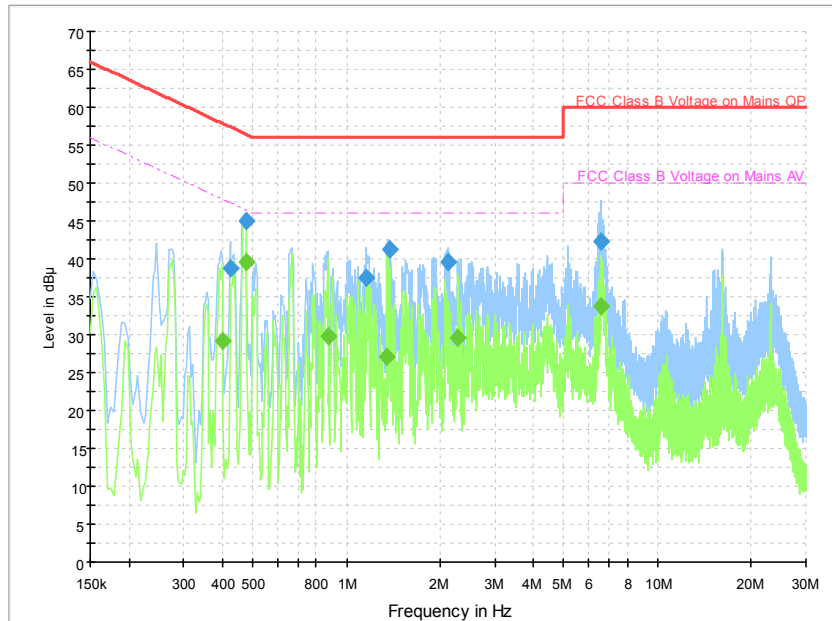**EUT1 Charger2 +MP4 + WCDMA 850MHz idle Mode, Set.2**

**Figure A.8 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.422000	38.7	2000.0	9.000	On	L1	19.7	18.7	57.4
0.474000	45.0	2000.0	9.000	On	N	19.7	11.4	56.4
1.154000	37.4	2000.0	9.000	On	L1	19.7	18.6	56.0
1.370000	41.2	2000.0	9.000	On	L1	19.6	14.8	56.0
2.130000	39.7	2000.0	9.000	On	N	19.6	16.3	56.0
6.542000	42.2	2000.0	9.000	On	N	19.6	17.8	60.0

**Final Result 2**

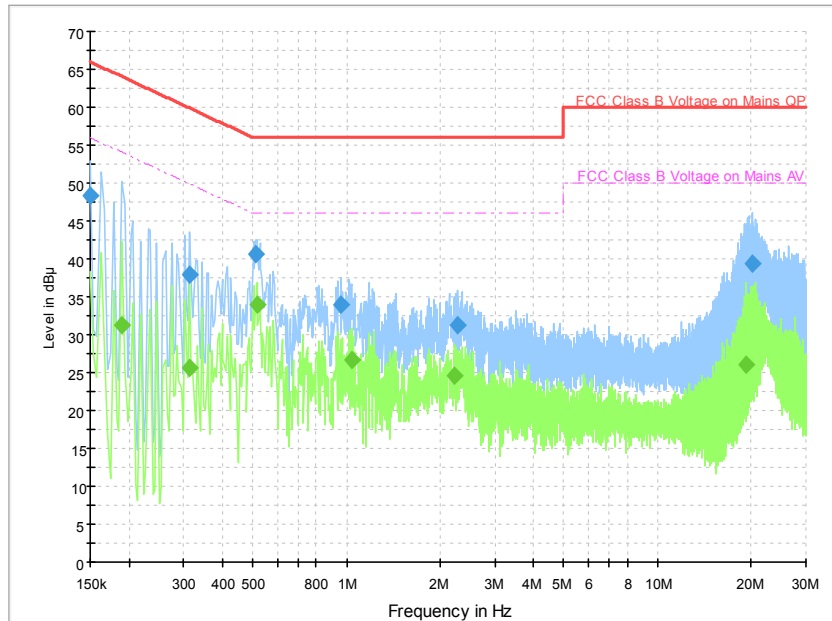Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.398000	29.2	2000.0	9.000	On	L1	19.7	18.7	47.9
0.474000	39.6	2000.0	9.000	On	N	19.7	6.8	46.4
0.870000	29.9	2000.0	9.000	On	N	19.6	16.1	46.0
1.350000	27.1	2000.0	9.000	On	L1	19.6	18.9	46.0
2.286000	29.6	2000.0	9.000	On	N	19.6	16.4	46.0
6.542000	33.8	2000.0	9.000	On	N	19.6	16.2	50.0

**EUT1 USB + Front Camera +FM + LTE Band 5 idle Mode, Set.3**

**Figure A.9 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.3	2000.0	9.000	On	L1	20.0	17.7	66.0
0.314000	37.9	2000.0	9.000	On	N	19.7	21.9	59.9
0.510000	40.7	2000.0	9.000	On	L1	19.7	15.3	56.0
0.958000	34.0	2000.0	9.000	On	L1	19.6	22.0	56.0
2.282000	31.2	2000.0	9.000	On	L1	19.6	24.8	56.0
20.206000	39.4	2000.0	9.000	On	L1	19.8	20.6	60.0

**Final Result 2**


Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.190000	31.2	2000.0	9.000	On	L1	19.7	22.8	54.0
0.314000	25.7	2000.0	9.000	On	N	19.7	24.2	49.9
0.514000	33.9	2000.0	9.000	On	L1	19.7	12.1	46.0
1.038000	26.6	2000.0	9.000	On	L1	19.7	19.4	46.0
2.234000	24.6	2000.0	9.000	On	L1	19.6	21.4	46.0
19.254000	26.0	2000.0	9.000	On	L1	19.7	24.0	50.0




**ANNEX B: Persons involved in this testing**

Test Item	Tester
Conducted Continuous Emission	Zhang Tianli
Radiated Continuous Emission	Yan Hanchen, Zhang Tianli

## ANNEX C: TEST LAYOUT

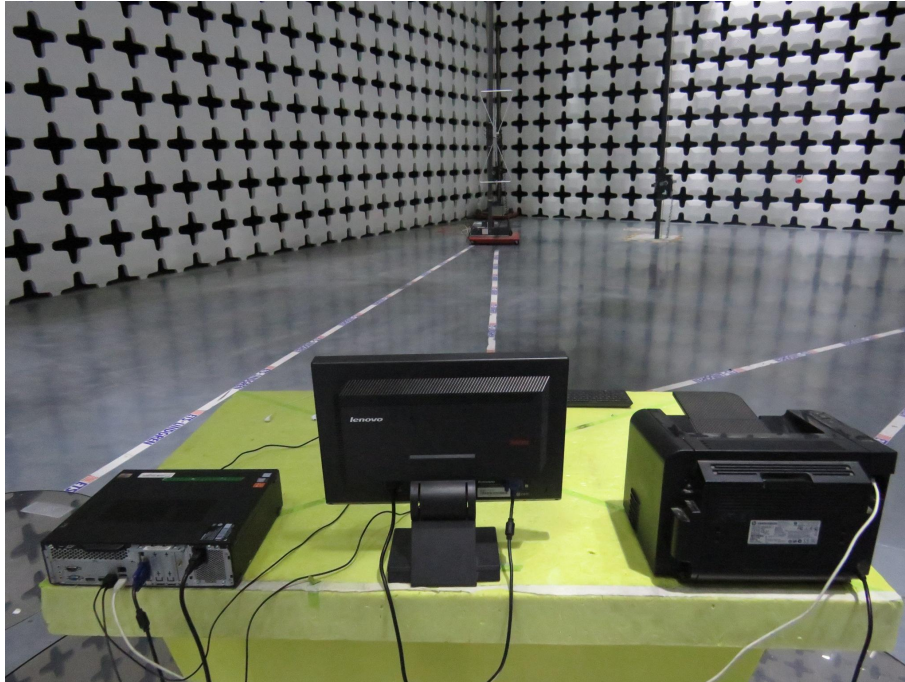

**Radiated Continuous Emission(30MHz-1GHz)**

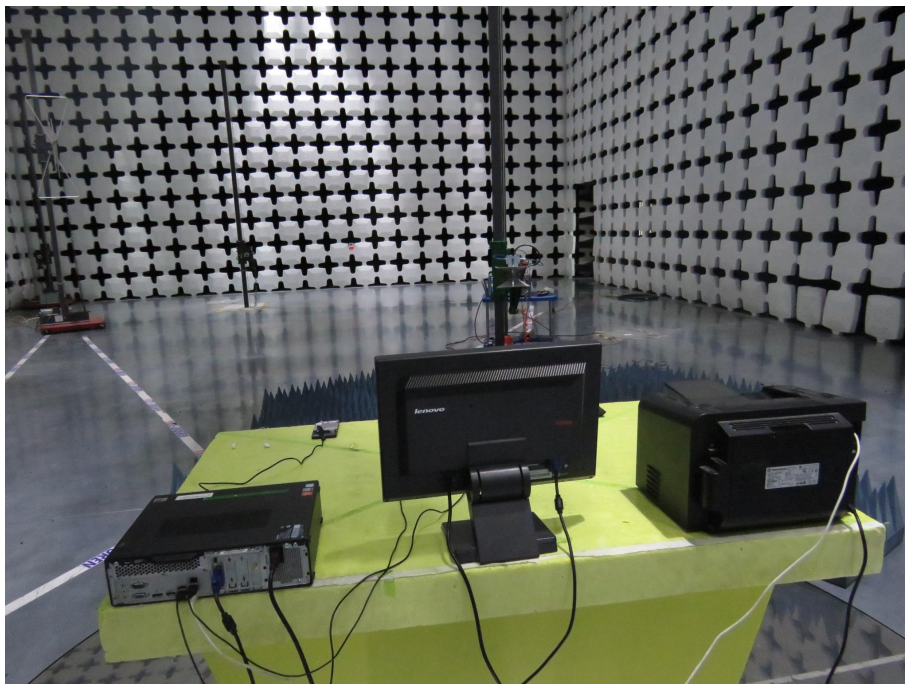

**Radiated Continuous Emission((1GHz-18GHz)**





**Conducted Continuous Emission**

**\*\*\*END OF REPORT\*\*\***