



	29																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																															
ANT	7																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5600.73</td> <td>49.83</td> <td>68.30</td> <td>-18.47</td> <td>39.15</td> <td>34.96</td> <td>8.22</td> <td>32.50</td> <td>262</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>48.14</td> <td>68.32</td> <td>-20.18</td> <td>37.25</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>262</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.36</td> <td>49.79</td> <td>105.58</td> <td>-55.79</td> <td>38.68</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>262</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.37</td> <td>57.02</td> <td>113.91</td> <td>-56.89</td> <td>45.83</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>262</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5600.73	49.83	68.30	-18.47	39.15	34.96	8.22	32.50	262	87	PEAK	2	5650.03	48.14	68.32	-20.18	37.25	34.99	8.40	32.50	262	87	PEAK	3	5701.36	49.79	105.58	-55.79	38.68	35.02	8.59	32.50	262	87	PEAK	4	5721.37	57.02	113.91	-56.89	45.83	35.03	8.66	32.50	262	87	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>93.13</td> <td>-----</td> <td>-----</td> <td>81.81</td> <td>35.05</td> <td>8.77</td> <td>32.50</td> <td>262</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	93.13	-----	-----	81.81	35.05	8.77	32.50	262	87	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5600.73	49.83	68.30	-18.47	39.15	34.96	8.22	32.50	262	87	PEAK																																																																																																					
2	5650.03	48.14	68.32	-20.18	37.25	34.99	8.40	32.50	262	87	PEAK																																																																																																					
3	5701.36	49.79	105.58	-55.79	38.68	35.02	8.59	32.50	262	87	PEAK																																																																																																					
4	5721.37	57.02	113.91	-56.89	45.83	35.03	8.66	32.50	262	87	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	93.13	-----	-----	81.81	35.05	8.77	32.50	262	87	PEAK																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>87.15</td> <td>-----</td> <td>-----</td> <td>75.85</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>262</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	87.15	-----	-----	75.85	35.05	8.75	32.50	262	87	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	87.15	-----	-----	75.85	35.05	8.75	32.50	262	87	AVERAGE																																																																																																					



Mode	29																																																																																																										
	Harmonic																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																										
ANT	7																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>56.05</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.21</td> <td>68.30</td> <td>-21.09</td> <td>51.74</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	47.53	74.00	-26.47	56.05	37.79	11.45	57.76	--	--	Peak	2	17235.00	47.21	68.30	-21.09	51.74	40.27	13.17	57.97	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>46.72</td> <td>74.00</td> <td>-27.28</td> <td>55.24</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.31</td> <td>68.30</td> <td>-19.99</td> <td>52.84</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	46.72	74.00	-27.28	55.24	37.79	11.45	57.76	--	--	Peak	2	17235.00	48.31	68.30	-19.99	52.84	40.27	13.17	57.97	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11490.00	47.53	74.00	-26.47	56.05	37.79	11.45	57.76	--	--	Peak																																																																																																
2	17235.00	47.21	68.30	-21.09	51.74	40.27	13.17	57.97	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11490.00	46.72	74.00	-27.28	55.24	37.79	11.45	57.76	--	--	Peak																																																																																																
2	17235.00	48.31	68.30	-19.99	52.84	40.27	13.17	57.97	--	--	Peak																																																																																																



Mode	30																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																
ANT	7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>47.05</td> <td>74.00</td> <td>-26.95</td> <td>55.38</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 17355.00</td> <td>47.46</td> <td>68.30</td> <td>-20.84</td> <td>51.60</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	47.05	74.00	-26.95	55.38	37.85	11.49	57.67	--	-- Peak	2 17355.00	47.46	68.30	-20.84	51.60	40.46	13.20	57.80	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>47.05</td> <td>74.00</td> <td>-26.95</td> <td>55.38</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 17355.00</td> <td>48.60</td> <td>68.30</td> <td>-19.70</td> <td>52.74</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	47.05	74.00	-26.95	55.38	37.85	11.49	57.67	--	-- Peak	2 17355.00	48.60	68.30	-19.70	52.74	40.46	13.20	57.80	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11570.00	47.05	74.00	-26.95	55.38	37.85	11.49	57.67	--	-- Peak																																																																																								
2 17355.00	47.46	68.30	-20.84	51.60	40.46	13.20	57.80	--	-- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11570.00	47.05	74.00	-26.95	55.38	37.85	11.49	57.67	--	-- Peak																																																																																								
2 17355.00	48.60	68.30	-19.70	52.74	40.46	13.20	57.80	--	-- Peak																																																																																								



	31																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<p style="text-align: right;">Date: 2024-03-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>58.10</td> <td>112.22</td> <td>-54.12</td> <td>46.62</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>236</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5858.50</td> <td>55.72</td> <td>109.82</td> <td>-54.10</td> <td>44.23</td> <td>35.12</td> <td>8.87</td> <td>32.50</td> <td>236</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>49.77</td> <td>68.38</td> <td>-18.61</td> <td>38.32</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>236</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.00</td> <td>50.69</td> <td>68.30</td> <td>-17.61</td> <td>39.24</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>236</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.38	58.10	112.22	-54.12	46.62	35.11	8.87	32.50	236	0	PEAK	2	5858.50	55.72	109.82	-54.10	44.23	35.12	8.87	32.50	236	0	PEAK	3	5924.75	49.77	68.38	-18.61	38.32	35.16	8.79	32.50	236	0	PEAK	4	5926.00	50.69	68.30	-17.61	39.24	35.16	8.79	32.50	236	0	PEAK	<p style="text-align: right;">Date: 2024-03-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.07</td> <td>-----</td> <td>-----</td> <td>90.57</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>236</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	102.07	-----	-----	90.57	35.09	8.91	32.50	236	0	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.38	58.10	112.22	-54.12	46.62	35.11	8.87	32.50	236	0	PEAK																																																																																																			
2	5858.50	55.72	109.82	-54.10	44.23	35.12	8.87	32.50	236	0	PEAK																																																																																																			
3	5924.75	49.77	68.38	-18.61	38.32	35.16	8.79	32.50	236	0	PEAK																																																																																																			
4	5926.00	50.69	68.30	-17.61	39.24	35.16	8.79	32.50	236	0	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	102.07	-----	-----	90.57	35.09	8.91	32.50	236	0	PEAK																																																																																																			
Avg	Blank	<p style="text-align: right;">Date: 2024-03-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>95.85</td> <td>-----</td> <td>-----</td> <td>84.35</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>236</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	95.85	-----	-----	84.35	35.09	8.91	32.50	236	0	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	95.85	-----	-----	84.35	35.09	8.91	32.50	236	0	AVERAGE																																																																																																			



	31																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>50.42</td> <td>110.80</td> <td>-60.38</td> <td>38.94</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>142</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5867.50</td> <td>52.11</td> <td>107.30</td> <td>-55.19</td> <td>40.63</td> <td>35.12</td> <td>8.86</td> <td>32.50</td> <td>142</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>49.17</td> <td>68.20</td> <td>-19.03</td> <td>37.72</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>142</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.13</td> <td>50.10</td> <td>68.30</td> <td>-18.20</td> <td>38.65</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>142</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5855.00	50.42	110.80	-60.38	38.94	35.11	8.87	32.50	142	0	PEAK	2	5867.50	52.11	107.30	-55.19	40.63	35.12	8.86	32.50	142	0	PEAK	3	5925.00	49.17	68.20	-19.03	37.72	35.16	8.79	32.50	142	0	PEAK	4	5926.13	50.10	68.30	-18.20	38.65	35.16	8.79	32.50	142	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.79</td> <td>-----</td> <td>-----</td> <td>85.29</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>142</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	96.79	-----	-----	85.29	35.09	8.91	32.50	142	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5855.00	50.42	110.80	-60.38	38.94	35.11	8.87	32.50	142	0	PEAK																																																																																																			
2	5867.50	52.11	107.30	-55.19	40.63	35.12	8.86	32.50	142	0	PEAK																																																																																																			
3	5925.00	49.17	68.20	-19.03	37.72	35.16	8.79	32.50	142	0	PEAK																																																																																																			
4	5926.13	50.10	68.30	-18.20	38.65	35.16	8.79	32.50	142	0	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	96.79	-----	-----	85.29	35.09	8.91	32.50	142	0	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>90.39</td> <td>-----</td> <td>-----</td> <td>78.89</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>142</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	90.39	-----	-----	78.89	35.09	8.91	32.50	142	0	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	90.39	-----	-----	78.89	35.09	8.91	32.50	142	0	AVERAGE																																																																																																			



Mode	31																																																																																																						
	Harmonic																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																						
ANT	7																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.14</td> <td>74.00</td> <td>-25.86</td> <td>56.27</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.25</td> <td>68.30</td> <td>-20.05</td> <td>52.00</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	48.14	74.00	-25.86	56.27	37.92	11.53	57.58	--	-- Peak	2	17475.00	48.25	68.30	-20.05	52.00	40.65	13.23	57.63	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.43</td> <td>74.00</td> <td>-25.57</td> <td>56.56</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>47.57</td> <td>68.30</td> <td>-20.73</td> <td>51.32</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	48.43	74.00	-25.57	56.56	37.92	11.53	57.58	--	-- Peak	2	17475.00	47.57	68.30	-20.73	51.32	40.65	13.23	57.63	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11650.00	48.14	74.00	-25.86	56.27	37.92	11.53	57.58	--	-- Peak																																																																																													
2	17475.00	48.25	68.30	-20.05	52.00	40.65	13.23	57.63	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11650.00	48.43	74.00	-25.57	56.56	37.92	11.53	57.58	--	-- Peak																																																																																													
2	17475.00	47.57	68.30	-20.73	51.32	40.65	13.23	57.63	--	-- Peak																																																																																													



		32																																																																																																																
Mode		Band Edge																																																																																																																
		U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																
ANT		7																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.87</td> <td>50.34</td> <td>68.30</td> <td>-17.96</td> <td>39.46</td> <td>34.99</td> <td>8.39</td> <td>32.50</td> <td>221</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>48.59</td> <td>68.43</td> <td>-19.84</td> <td>37.70</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>221</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.81</td> <td>59.18</td> <td>108.79</td> <td>-49.61</td> <td>48.02</td> <td>35.03</td> <td>8.63</td> <td>32.50</td> <td>221</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.66</td> <td>60.71</td> <td>114.57</td> <td>-53.86</td> <td>49.52</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>221</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.87	50.34	68.30	-17.96	39.46	34.99	8.39	32.50	221	0	PEAK	2	5650.17	48.59	68.43	-19.84	37.70	34.99	8.40	32.50	221	0	PEAK	3	5712.81	59.18	108.79	-49.61	48.02	35.03	8.63	32.50	221	0	PEAK	4	5721.66	60.71	114.57	-53.86	49.52	35.03	8.66	32.50	221	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.43</td> <td>-----</td> <td>-----</td> <td>89.13</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>221</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	100.43	-----	-----	89.13	35.05	8.75	32.50	221	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	5648.87	50.34	68.30	-17.96	39.46	34.99	8.39	32.50	221	0	PEAK																																																																																																							
2	5650.17	48.59	68.43	-19.84	37.70	34.99	8.40	32.50	221	0	PEAK																																																																																																							
3	5712.81	59.18	108.79	-49.61	48.02	35.03	8.63	32.50	221	0	PEAK																																																																																																							
4	5721.66	60.71	114.57	-53.86	49.52	35.03	8.66	32.50	221	0	PEAK																																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	5745.00	100.43	-----	-----	89.13	35.05	8.75	32.50	221	0	PEAK																																																																																																							
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>94.63</td> <td>-----</td> <td>-----</td> <td>83.33</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>221</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	94.63	-----	-----	83.33	35.05	8.75	32.50	221	0	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	5745.00	94.63	-----	-----	83.33	35.05	8.75	32.50	221	0	AVERAGE																																																																																																							



	32																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																															
ANT	7																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.00</td> <td>49.76</td> <td>68.30</td> <td>-18.54</td> <td>38.96</td> <td>34.98</td> <td>8.32</td> <td>32.50</td> <td>400</td> <td>288</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>48.23</td> <td>68.43</td> <td>-20.20</td> <td>37.34</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>400</td> <td>288</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.25</td> <td>55.10</td> <td>108.91</td> <td>-53.81</td> <td>43.94</td> <td>35.03</td> <td>8.63</td> <td>32.50</td> <td>400</td> <td>288</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.35</td> <td>53.67</td> <td>111.60</td> <td>-57.93</td> <td>42.48</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>400</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5629.00	49.76	68.30	-18.54	38.96	34.98	8.32	32.50	400	288	PEAK	2	5650.17	48.23	68.43	-20.20	37.34	34.99	8.40	32.50	400	288	PEAK	3	5713.25	55.10	108.91	-53.81	43.94	35.03	8.63	32.50	400	288	PEAK	4	5720.35	53.67	111.60	-57.93	42.48	35.03	8.66	32.50	400	288	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>97.77</td> <td>-----</td> <td>-----</td> <td>86.47</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>400</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	97.77	-----	-----	86.47	35.05	8.75	32.50	400	288	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5629.00	49.76	68.30	-18.54	38.96	34.98	8.32	32.50	400	288	PEAK																																																																																																					
2	5650.17	48.23	68.43	-20.20	37.34	34.99	8.40	32.50	400	288	PEAK																																																																																																					
3	5713.25	55.10	108.91	-53.81	43.94	35.03	8.63	32.50	400	288	PEAK																																																																																																					
4	5720.35	53.67	111.60	-57.93	42.48	35.03	8.66	32.50	400	288	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	97.77	-----	-----	86.47	35.05	8.75	32.50	400	288	PEAK																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>90.71</td> <td>-----</td> <td>-----</td> <td>79.41</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>400</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	90.71	-----	-----	79.41	35.05	8.75	32.50	400	288	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	90.71	-----	-----	79.41	35.05	8.75	32.50	400	288	AVERAGE																																																																																																					



Mode	32																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																											
ANT	7																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>46.90</td> <td>74.00</td> <td>-27.10</td> <td>55.42</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.25</td> <td>68.30</td> <td>-21.05</td> <td>51.78</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	46.90	74.00	-27.10	55.42	37.79	11.45	57.76	--	--	Peak	2	17235.00	47.25	68.30	-21.05	51.78	40.27	13.17	57.97	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>56.20</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.77</td> <td>68.30</td> <td>-20.53</td> <td>52.30</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	47.68	74.00	-26.32	56.20	37.79	11.45	57.76	--	--	Peak	2	17235.00	47.77	68.30	-20.53	52.30	40.27	13.17	57.97	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11490.00	46.90	74.00	-27.10	55.42	37.79	11.45	57.76	--	--	Peak																																																																																																	
2	17235.00	47.25	68.30	-21.05	51.78	40.27	13.17	57.97	--	--	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11490.00	47.68	74.00	-26.32	56.20	37.79	11.45	57.76	--	--	Peak																																																																																																	
2	17235.00	47.77	68.30	-20.53	52.30	40.27	13.17	57.97	--	--	Peak																																																																																																	



Mode	33																																																																																																						
	Harmonic																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																						
ANT	7																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>46.63</td> <td>74.00</td> <td>-27.37</td> <td>54.96</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>47.19</td> <td>68.30</td> <td>-21.11</td> <td>51.33</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.63	74.00	-27.37	54.96	37.85	11.49	57.67	--	-- Peak	2	17355.00	47.19	68.30	-21.11	51.33	40.46	13.20	57.80	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.04</td> <td>74.00</td> <td>-26.96</td> <td>55.37</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.27</td> <td>68.30</td> <td>-20.03</td> <td>52.41</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	47.04	74.00	-26.96	55.37	37.85	11.49	57.67	--	-- Peak	2	17355.00	48.27	68.30	-20.03	52.41	40.46	13.20	57.80	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11570.00	46.63	74.00	-27.37	54.96	37.85	11.49	57.67	--	-- Peak																																																																																													
2	17355.00	47.19	68.30	-21.11	51.33	40.46	13.20	57.80	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11570.00	47.04	74.00	-26.96	55.37	37.85	11.49	57.67	--	-- Peak																																																																																													
2	17355.00	48.27	68.30	-20.03	52.41	40.46	13.20	57.80	--	-- Peak																																																																																													



	34																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.13</td> <td>57.46</td> <td>112.79</td> <td>-55.33</td> <td>45.98</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.38</td> <td>56.77</td> <td>110.69</td> <td>-53.92</td> <td>45.29</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>50.15</td> <td>68.38</td> <td>-18.23</td> <td>38.70</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.38</td> <td>51.50</td> <td>68.30</td> <td>-16.80</td> <td>40.06</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.13	57.46	112.79	-55.33	45.98	35.11	8.87	32.50	300	10	PEAK	2	5855.38	56.77	110.69	-53.92	45.29	35.11	8.87	32.50	300	10	PEAK	3	5924.75	50.15	68.38	-18.23	38.70	35.16	8.79	32.50	300	10	PEAK	4	5932.38	51.50	68.30	-16.80	40.06	35.16	8.78	32.50	300	10	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.90</td> <td>-----</td> <td>-----</td> <td>90.40</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	101.90	-----	-----	90.40	35.09	8.91	32.50	300	10	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.13	57.46	112.79	-55.33	45.98	35.11	8.87	32.50	300	10	PEAK																																																																																																			
2	5855.38	56.77	110.69	-53.92	45.29	35.11	8.87	32.50	300	10	PEAK																																																																																																			
3	5924.75	50.15	68.38	-18.23	38.70	35.16	8.79	32.50	300	10	PEAK																																																																																																			
4	5932.38	51.50	68.30	-16.80	40.06	35.16	8.78	32.50	300	10	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	101.90	-----	-----	90.40	35.09	8.91	32.50	300	10	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>95.70</td> <td>-----</td> <td>-----</td> <td>84.20</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>300</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	95.70	-----	-----	84.20	35.09	8.91	32.50	300	10	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	95.70	-----	-----	84.20	35.09	8.91	32.50	300	10	AVERAGE																																																																																																			



	34																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.63</td> <td>54.42</td> <td>113.93</td> <td>-59.51</td> <td>42.94</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>200</td> <td>226</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.63</td> <td>50.78</td> <td>105.58</td> <td>-54.80</td> <td>39.31</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>200</td> <td>226</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>49.12</td> <td>68.48</td> <td>-19.36</td> <td>37.67</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>200</td> <td>226</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.63</td> <td>50.60</td> <td>68.30</td> <td>-17.70</td> <td>39.16</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>200</td> <td>226</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5853.63	54.42	113.93	-59.51	42.94	35.11	8.87	32.50	200	226	PEAK	2	5873.63	50.78	105.58	-54.80	39.31	35.12	8.85	32.50	200	226	PEAK	3	5924.63	49.12	68.48	-19.36	37.67	35.16	8.79	32.50	200	226	PEAK	4	5928.63	50.60	68.30	-17.70	39.16	35.16	8.78	32.50	200	226	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>95.50</td> <td>-----</td> <td>-----</td> <td>84.00</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>200</td> <td>226</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	95.50	-----	-----	84.00	35.09	8.91	32.50	200	226	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5853.63	54.42	113.93	-59.51	42.94	35.11	8.87	32.50	200	226	PEAK																																																																																																			
2	5873.63	50.78	105.58	-54.80	39.31	35.12	8.85	32.50	200	226	PEAK																																																																																																			
3	5924.63	49.12	68.48	-19.36	37.67	35.16	8.79	32.50	200	226	PEAK																																																																																																			
4	5928.63	50.60	68.30	-17.70	39.16	35.16	8.78	32.50	200	226	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	95.50	-----	-----	84.00	35.09	8.91	32.50	200	226	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>88.53</td> <td>-----</td> <td>-----</td> <td>77.03</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>200</td> <td>226</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	88.53	-----	-----	77.03	35.09	8.91	32.50	200	226	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	88.53	-----	-----	77.03	35.09	8.91	32.50	200	226	AVERAGE																																																																																																			



Mode	34																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																
ANT	7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.85</td> <td>74.00</td> <td>-26.15</td> <td>55.98</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.86</td> <td>68.30</td> <td>-19.44</td> <td>52.61</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11650.00	47.85	74.00	-26.15	55.98	37.92	11.53	57.58	-- -- Peak	2	17475.00	48.86	68.30	-19.44	52.61	40.65	13.23	57.63	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>55.81</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>47.49</td> <td>68.30</td> <td>-20.81</td> <td>51.24</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11650.00	47.68	74.00	-26.32	55.81	37.92	11.53	57.58	-- -- Peak	2	17475.00	47.49	68.30	-20.81	51.24	40.65	13.23	57.63
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11650.00	47.85	74.00	-26.15	55.98	37.92	11.53	57.58	-- -- Peak																																																																																								
2	17475.00	48.86	68.30	-19.44	52.61	40.65	13.23	57.63	-- -- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11650.00	47.68	74.00	-26.32	55.81	37.92	11.53	57.58	-- -- Peak																																																																																								
2	17475.00	47.49	68.30	-20.81	51.24	40.65	13.23	57.63	-- -- Peak																																																																																								



	35																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5606.51</td> <td>50.42</td> <td>68.30</td> <td>-17.88</td> <td>39.72</td> <td>34.96</td> <td>8.24</td> <td>32.50</td> <td>259</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.38</td> <td>49.78</td> <td>68.58</td> <td>-18.80</td> <td>38.89</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>259</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.04</td> <td>69.00</td> <td>110.53</td> <td>-41.53</td> <td>57.82</td> <td>35.03</td> <td>8.65</td> <td>32.50</td> <td>259</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.52</td> <td>69.50</td> <td>114.27</td> <td>-44.77</td> <td>58.31</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>259</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5606.51	50.42	68.30	-17.88	39.72	34.96	8.24	32.50	259	4	PEAK	2	5650.38	49.78	68.58	-18.80	38.89	34.99	8.40	32.50	259	4	PEAK	3	5719.04	69.00	110.53	-41.53	57.82	35.03	8.65	32.50	259	4	PEAK	4	5721.52	69.50	114.27	-44.77	58.31	35.03	8.66	32.50	259	4	PEAK	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>98.89</td> <td>-----</td> <td>-----</td> <td>87.59</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>259</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	98.89	-----	-----	87.59	35.05	8.75	32.50	259	4	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5606.51	50.42	68.30	-17.88	39.72	34.96	8.24	32.50	259	4	PEAK																																																																																																			
2	5650.38	49.78	68.58	-18.80	38.89	34.99	8.40	32.50	259	4	PEAK																																																																																																			
3	5719.04	69.00	110.53	-41.53	57.82	35.03	8.65	32.50	259	4	PEAK																																																																																																			
4	5721.52	69.50	114.27	-44.77	58.31	35.03	8.66	32.50	259	4	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5755.00	98.89	-----	-----	87.59	35.05	8.75	32.50	259	4	PEAK																																																																																																			
Avg	Blank	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>91.44</td> <td>-----</td> <td>-----</td> <td>80.12</td> <td>35.05</td> <td>8.77</td> <td>32.50</td> <td>259</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	91.44	-----	-----	80.12	35.05	8.77	32.50	259	4	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5755.00	91.44	-----	-----	80.12	35.05	8.77	32.50	259	4	AVERAGE																																																																																																			



Mode	35																																																															
	Band Edge - R																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																															
ANT	7																																																															
Pol.	Horizontal	Fundamental																																																														
Peak	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.26</td> <td>51.27</td> <td>112.50</td> <td>-61.23</td> <td>39.79</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>259</td> <td>4 PEAK</td> </tr> <tr> <td>2</td> <td>5874.15</td> <td>50.68</td> <td>105.44</td> <td>-54.76</td> <td>39.21</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>259</td> <td>4 PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>48.60</td> <td>68.31</td> <td>-19.71</td> <td>37.15</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>259</td> <td>4 PEAK</td> </tr> <tr> <td>4</td> <td>5944.74</td> <td>50.44</td> <td>68.30</td> <td>-17.86</td> <td>39.00</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>259</td> <td>4 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5854.26	51.27	112.50	-61.23	39.79	35.11	8.87	32.50	259	4 PEAK	2	5874.15	50.68	105.44	-54.76	39.21	35.12	8.85	32.50	259	4 PEAK	3	5924.85	48.60	68.31	-19.71	37.15	35.16	8.79	32.50	259	4 PEAK	4	5944.74	50.44	68.30	-17.86	39.00	35.17	8.77	32.50	259	4 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																						
1	5854.26	51.27	112.50	-61.23	39.79	35.11	8.87	32.50	259	4 PEAK																																																						
2	5874.15	50.68	105.44	-54.76	39.21	35.12	8.85	32.50	259	4 PEAK																																																						
3	5924.85	48.60	68.31	-19.71	37.15	35.16	8.79	32.50	259	4 PEAK																																																						
4	5944.74	50.44	68.30	-17.86	39.00	35.17	8.77	32.50	259	4 PEAK																																																						



	35																																																																																																															
Mode	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																															
ANT	7																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.92</td> <td>49.78</td> <td>68.30</td> <td>-18.52</td> <td>38.98</td> <td>34.98</td> <td>8.32</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.24</td> <td>48.50</td> <td>69.96</td> <td>-21.46</td> <td>37.60</td> <td>34.99</td> <td>8.41</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.27</td> <td>63.61</td> <td>110.32</td> <td>-46.71</td> <td>52.43</td> <td>35.03</td> <td>8.65</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.06</td> <td>64.38</td> <td>113.21</td> <td>-48.83</td> <td>53.19</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5629.92	49.78	68.30	-18.52	38.98	34.98	8.32	32.50	201	194	PEAK	2	5652.24	48.50	69.96	-21.46	37.60	34.99	8.41	32.50	201	194	PEAK	3	5718.27	63.61	110.32	-46.71	52.43	35.03	8.65	32.50	201	194	PEAK	4	5721.06	64.38	113.21	-48.83	53.19	35.03	8.66	32.50	201	194	PEAK	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.05</td> <td>-----</td> <td>-----</td> <td>82.70</td> <td>35.05</td> <td>8.80</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	94.05	-----	-----	82.70	35.05	8.80	32.50	201	194	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5629.92	49.78	68.30	-18.52	38.98	34.98	8.32	32.50	201	194	PEAK																																																																																																					
2	5652.24	48.50	69.96	-21.46	37.60	34.99	8.41	32.50	201	194	PEAK																																																																																																					
3	5718.27	63.61	110.32	-46.71	52.43	35.03	8.65	32.50	201	194	PEAK																																																																																																					
4	5721.06	64.38	113.21	-48.83	53.19	35.03	8.66	32.50	201	194	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5755.00	94.05	-----	-----	82.70	35.05	8.80	32.50	201	194	PEAK																																																																																																					
Avg	Blank	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>88.13</td> <td>-----</td> <td>-----</td> <td>76.81</td> <td>35.05</td> <td>8.77</td> <td>32.50</td> <td>201</td> <td>194</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	88.13	-----	-----	76.81	35.05	8.77	32.50	201	194	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5755.00	88.13	-----	-----	76.81	35.05	8.77	32.50	201	194	AVERAGE																																																																																																					



Mode	35																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																									
ANT	7																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>48.84</td> <td>111.61</td> <td>-62.77</td> <td>37.36</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.95</td> <td>49.98</td> <td>105.49</td> <td>-55.51</td> <td>38.51</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>48.61</td> <td>68.31</td> <td>-19.70</td> <td>37.16</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.92</td> <td>50.41</td> <td>68.30</td> <td>-17.89</td> <td>38.97</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>201</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.65	48.84	111.61	-62.77	37.36	35.11	8.87	32.50	201	194	PEAK	2	5873.95	49.98	105.49	-55.51	38.51	35.12	8.85	32.50	201	194	PEAK	3	5924.85	48.61	68.31	-19.70	37.16	35.16	8.79	32.50	201	194	PEAK	4	5929.92	50.41	68.30	-17.89	38.97	35.16	8.78	32.50	201	194	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.65	48.84	111.61	-62.77	37.36	35.11	8.87	32.50	201	194	PEAK																																																															
2	5873.95	49.98	105.49	-55.51	38.51	35.12	8.85	32.50	201	194	PEAK																																																															
3	5924.85	48.61	68.31	-19.70	37.16	35.16	8.79	32.50	201	194	PEAK																																																															
4	5929.92	50.41	68.30	-17.89	38.97	35.16	8.78	32.50	201	194	PEAK																																																															



	36																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.08</td> <td>50.27</td> <td>68.30</td> <td>-18.03</td> <td>39.48</td> <td>34.97</td> <td>8.32</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>48.43</td> <td>68.67</td> <td>-20.24</td> <td>37.54</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.23</td> <td>50.03</td> <td>105.26</td> <td>-55.23</td> <td>38.93</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>49.30</td> <td>111.07</td> <td>-61.77</td> <td>38.11</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5628.08	50.27	68.30	-18.03	39.48	34.97	8.32	32.50	238	3	PEAK	2	5650.51	48.43	68.67	-20.24	37.54	34.99	8.40	32.50	238	3	PEAK	3	5700.23	50.03	105.26	-55.23	38.93	35.02	8.58	32.50	238	3	PEAK	4	5720.12	49.30	111.07	-61.77	38.11	35.03	8.66	32.50	238	3	PEAK	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>99.64</td> <td>-----</td> <td>-----</td> <td>88.13</td> <td>35.08</td> <td>8.93</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	99.64	-----	-----	88.13	35.08	8.93	32.50	238	3	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5628.08	50.27	68.30	-18.03	39.48	34.97	8.32	32.50	238	3	PEAK																																																																																																			
2	5650.51	48.43	68.67	-20.24	37.54	34.99	8.40	32.50	238	3	PEAK																																																																																																			
3	5700.23	50.03	105.26	-55.23	38.93	35.02	8.58	32.50	238	3	PEAK																																																																																																			
4	5720.12	49.30	111.07	-61.77	38.11	35.03	8.66	32.50	238	3	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	99.64	-----	-----	88.13	35.08	8.93	32.50	238	3	PEAK																																																																																																			
Avg	Blank	<p style="text-align: right;">Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>92.54</td> <td>-----</td> <td>-----</td> <td>81.03</td> <td>35.08</td> <td>8.93</td> <td>32.50</td> <td>238</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	92.54	-----	-----	81.03	35.08	8.93	32.50	238	3	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	92.54	-----	-----	81.03	35.08	8.93	32.50	238	3	AVERAGE																																																																																																			



Mode	36																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																									
ANT	7																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5795 to 5950 MHz. A red line represents the limit, and a blue line represents the signal. A peak is labeled PEAK_BE(B4)_16-24.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.37</td> <td>52.26</td> <td>112.25</td> <td>-59.99</td> <td>40.78</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.98</td> <td>51.01</td> <td>105.21</td> <td>-54.20</td> <td>39.53</td> <td>35.13</td> <td>8.85</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>48.85</td> <td>68.40</td> <td>-19.55</td> <td>37.40</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.71</td> <td>51.00</td> <td>68.30</td> <td>-17.30</td> <td>39.56</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>238</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.37	52.26	112.25	-59.99	40.78	35.11	8.87	32.50	238	3	PEAK	2	5874.98	51.01	105.21	-54.20	39.53	35.13	8.85	32.50	238	3	PEAK	3	5924.74	48.85	68.40	-19.55	37.40	35.16	8.79	32.50	238	3	PEAK	4	5931.71	51.00	68.30	-17.30	39.56	35.16	8.78	32.50	238	3	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.37	52.26	112.25	-59.99	40.78	35.11	8.87	32.50	238	3	PEAK																																																															
2	5874.98	51.01	105.21	-54.20	39.53	35.13	8.85	32.50	238	3	PEAK																																																															
3	5924.74	48.85	68.40	-19.55	37.40	35.16	8.79	32.50	238	3	PEAK																																																															
4	5931.71	51.00	68.30	-17.30	39.56	35.16	8.78	32.50	238	3	PEAK																																																															



	36																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.51</td> <td>49.39</td> <td>68.30</td> <td>-18.91</td> <td>38.67</td> <td>34.96</td> <td>8.26</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>48.25</td> <td>68.96</td> <td>-20.71</td> <td>37.36</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.21</td> <td>48.40</td> <td>105.54</td> <td>-57.14</td> <td>37.29</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>49.41</td> <td>111.52</td> <td>-62.11</td> <td>38.22</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5611.51	49.39	68.30	-18.91	38.67	34.96	8.26	32.50	324	211	PEAK	2	5650.90	48.25	68.96	-20.71	37.36	34.99	8.40	32.50	324	211	PEAK	3	5701.21	48.40	105.54	-57.14	37.29	35.02	8.59	32.50	324	211	PEAK	4	5720.32	49.41	111.52	-62.11	38.22	35.03	8.66	32.50	324	211	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>94.22</td> <td>-----</td> <td>-----</td> <td>82.70</td> <td>35.08</td> <td>8.94</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	94.22	-----	-----	82.70	35.08	8.94	32.50	324	211	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5611.51	49.39	68.30	-18.91	38.67	34.96	8.26	32.50	324	211	PEAK																																																																																																			
2	5650.90	48.25	68.96	-20.71	37.36	34.99	8.40	32.50	324	211	PEAK																																																																																																			
3	5701.21	48.40	105.54	-57.14	37.29	35.02	8.59	32.50	324	211	PEAK																																																																																																			
4	5720.32	49.41	111.52	-62.11	38.22	35.03	8.66	32.50	324	211	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	94.22	-----	-----	82.70	35.08	8.94	32.50	324	211	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>87.31</td> <td>-----</td> <td>-----</td> <td>75.80</td> <td>35.08</td> <td>8.93</td> <td>32.50</td> <td>324</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	87.31	-----	-----	75.80	35.08	8.93	32.50	324	211	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	87.31	-----	-----	75.80	35.08	8.93	32.50	324	211	AVERAGE																																																																																																			



Mode	36																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																									
ANT	7																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>50.42</td> <td>111.19</td> <td>-60.77</td> <td>38.94</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.21</td> <td>49.16</td> <td>105.42</td> <td>-56.26</td> <td>37.69</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>50.62</td> <td>68.28</td> <td>-17.66</td> <td>39.17</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.79</td> <td>51.12</td> <td>68.30</td> <td>-17.18</td> <td>39.68</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>324</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.83	50.42	111.19	-60.77	38.94	35.11	8.87	32.50	324	211	PEAK	2	5874.21	49.16	105.42	-56.26	37.69	35.12	8.85	32.50	324	211	PEAK	3	5924.89	50.62	68.28	-17.66	39.17	35.16	8.79	32.50	324	211	PEAK	4	5941.79	51.12	68.30	-17.18	39.68	35.17	8.77	32.50	324	211	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.83	50.42	111.19	-60.77	38.94	35.11	8.87	32.50	324	211	PEAK																																																															
2	5874.21	49.16	105.42	-56.26	37.69	35.12	8.85	32.50	324	211	PEAK																																																															
3	5924.89	50.62	68.28	-17.66	39.17	35.16	8.79	32.50	324	211	PEAK																																																															
4	5941.79	51.12	68.30	-17.18	39.68	35.17	8.77	32.50	324	211	PEAK																																																															



		37																																																																																																												
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak																																																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.33</td> <td>50.00</td> <td>68.30</td> <td>-18.30</td> <td>39.23</td> <td>34.97</td> <td>8.30</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>47.78</td> <td>68.34</td> <td>-20.56</td> <td>36.89</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.98</td> <td>55.91</td> <td>105.47</td> <td>-49.56</td> <td>44.80</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>58.49</td> <td>110.91</td> <td>-52.42</td> <td>47.30</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5624.33	50.00	68.30	-18.30	39.23	34.97	8.30	32.50	249	4	PEAK	2	5650.05	47.78	68.34	-20.56	36.89	34.99	8.40	32.50	249	4	PEAK	3	5700.98	55.91	105.47	-49.56	44.80	35.02	8.59	32.50	249	4	PEAK	4	5720.05	58.49	110.91	-52.42	47.30	35.03	8.66	32.50	249	4	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.14</td> <td>-----</td> <td>-----</td> <td>81.66</td> <td>35.07</td> <td>8.91</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	93.14	-----	-----	81.66	35.07	8.91	32.50	249	4
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5624.33	50.00	68.30	-18.30	39.23	34.97	8.30	32.50	249	4	PEAK																																																																																																			
2	5650.05	47.78	68.34	-20.56	36.89	34.99	8.40	32.50	249	4	PEAK																																																																																																			
3	5700.98	55.91	105.47	-49.56	44.80	35.02	8.59	32.50	249	4	PEAK																																																																																																			
4	5720.05	58.49	110.91	-52.42	47.30	35.03	8.66	32.50	249	4	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5775.00	93.14	-----	-----	81.66	35.07	8.91	32.50	249	4	PEAK																																																																																																			
Avg	Blank																																																																																																													
			<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>86.70</td> <td>-----</td> <td>-----</td> <td>75.30</td> <td>35.06</td> <td>8.84</td> <td>32.50</td> <td>249</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	86.70	-----	-----	75.30	35.06	8.84	32.50	249	4	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5775.00	86.70	-----	-----	75.30	35.06	8.84	32.50	249	4	AVERAGE																																																																																																			



Mode	37																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																			
ANT	7																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>52.52</td> <td>110.86</td> <td>-58.34</td> <td>41.04</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5865.83</td> <td>54.05</td> <td>107.77</td> <td>-53.72</td> <td>42.57</td> <td>35.12</td> <td>8.86</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.45</td> <td>49.00</td> <td>68.61</td> <td>-19.61</td> <td>37.55</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.50</td> <td>50.33</td> <td>68.30</td> <td>-17.97</td> <td>38.88</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>249</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5854.98	52.52	110.86	-58.34	41.04	35.11	8.87	32.50	249	4	PEAK	2	5865.83	54.05	107.77	-53.72	42.57	35.12	8.86	32.50	249	4	PEAK	3	5924.45	49.00	68.61	-19.61	37.55	35.16	8.79	32.50	249	4	PEAK	4	5925.50	50.33	68.30	-17.97	38.88	35.16	8.79	32.50	249	4	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5854.98	52.52	110.86	-58.34	41.04	35.11	8.87	32.50	249	4	PEAK																																																									
2	5865.83	54.05	107.77	-53.72	42.57	35.12	8.86	32.50	249	4	PEAK																																																									
3	5924.45	49.00	68.61	-19.61	37.55	35.16	8.79	32.50	249	4	PEAK																																																									
4	5925.50	50.33	68.30	-17.97	38.88	35.16	8.79	32.50	249	4	PEAK																																																									



	37																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	7																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.68</td> <td>49.49</td> <td>68.30</td> <td>-18.81</td> <td>38.62</td> <td>34.99</td> <td>8.38</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>47.50</td> <td>68.34</td> <td>-20.84</td> <td>36.61</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.03</td> <td>51.18</td> <td>105.77</td> <td>-54.59</td> <td>40.07</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.23</td> <td>54.66</td> <td>111.31</td> <td>-56.65</td> <td>43.47</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5645.68	49.49	68.30	-18.81	38.62	34.99	8.38	32.50	338	188	PEAK	2	5650.05	47.50	68.34	-20.84	36.61	34.99	8.40	32.50	338	188	PEAK	3	5702.03	51.18	105.77	-54.59	40.07	35.02	8.59	32.50	338	188	PEAK	4	5720.23	54.66	111.31	-56.65	43.47	35.03	8.66	32.50	338	188	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>87.33</td> <td>-----</td> <td>-----</td> <td>75.88</td> <td>35.07</td> <td>8.88</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	87.33	-----	-----	75.88	35.07	8.88	32.50	338	188	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5645.68	49.49	68.30	-18.81	38.62	34.99	8.38	32.50	338	188	PEAK																																																																																																			
2	5650.05	47.50	68.34	-20.84	36.61	34.99	8.40	32.50	338	188	PEAK																																																																																																			
3	5702.03	51.18	105.77	-54.59	40.07	35.02	8.59	32.50	338	188	PEAK																																																																																																			
4	5720.23	54.66	111.31	-56.65	43.47	35.03	8.66	32.50	338	188	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	87.33	-----	-----	75.88	35.07	8.88	32.50	338	188	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>81.53</td> <td>-----</td> <td>-----</td> <td>70.08</td> <td>35.07</td> <td>8.88</td> <td>32.50</td> <td>338</td> <td>188</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	81.53	-----	-----	70.08	35.07	8.88	32.50	338	188	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	81.53	-----	-----	70.08	35.07	8.88	32.50	338	188	AVERAGE																																																																																																			



Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	7																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>48.54</td> <td>110.86</td> <td>-62.32</td> <td>37.06</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.53</td> <td>50.12</td> <td>105.61</td> <td>-55.49</td> <td>38.65</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>49.43</td> <td>68.22</td> <td>-18.79</td> <td>37.98</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5940.55</td> <td>50.19</td> <td>68.30</td> <td>-18.11</td> <td>38.75</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>338</td> <td>188</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.98	48.54	110.86	-62.32	37.06	35.11	8.87	32.50	338	188	PEAK	2	5873.53	50.12	105.61	-55.49	38.65	35.12	8.85	32.50	338	188	PEAK	3	5924.98	49.43	68.22	-18.79	37.98	35.16	8.79	32.50	338	188	PEAK	4	5940.55	50.19	68.30	-18.11	38.75	35.17	8.77	32.50	338	188	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.98	48.54	110.86	-62.32	37.06	35.11	8.87	32.50	338	188	PEAK																																																															
2	5873.53	50.12	105.61	-55.49	38.65	35.12	8.85	32.50	338	188	PEAK																																																															
3	5924.98	49.43	68.22	-18.79	37.98	35.16	8.79	32.50	338	188	PEAK																																																															
4	5940.55	50.19	68.30	-18.11	38.75	35.17	8.77	32.50	338	188	PEAK																																																															



Mode	38																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																										
ANT	7																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.17</td> <td>74.00</td> <td>-26.83</td> <td>55.79</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.83</td> <td>68.30</td> <td>-20.47</td> <td>52.58</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	47.17	74.00	-26.83	55.79	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.83	68.30	-20.47	52.58	40.16	13.16	58.07	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.03</td> <td>74.00</td> <td>-25.97</td> <td>56.65</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.02</td> <td>68.30</td> <td>-21.28</td> <td>51.77</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	48.03	74.00	-25.97	56.65	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.02	68.30	-21.28	51.77	40.16	13.16	58.07	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11440.00	47.17	74.00	-26.83	55.79	37.77	11.42	57.81	--	--	Peak																																																																																																
2	17160.00	47.83	68.30	-20.47	52.58	40.16	13.16	58.07	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11440.00	48.03	74.00	-25.97	56.65	37.77	11.42	57.81	--	--	Peak																																																																																																
2	17160.00	47.02	68.30	-21.28	51.77	40.16	13.16	58.07	--	--	Peak																																																																																																



Mode	39																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																													
ANT	7																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Blank	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.55</td> <td>48.58</td> <td>74.00</td> <td>-25.42</td> <td>37.82</td> <td>34.86</td> <td>8.42</td> <td>32.52</td> <td>248</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5465.50</td> <td>48.71</td> <td>68.30</td> <td>-19.59</td> <td>37.95</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>248</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>104.49</td> <td>-----</td> <td>-----</td> <td>93.30</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>248</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5878.55</td> <td>50.54</td> <td>68.30</td> <td>-17.76</td> <td>39.07</td> <td>35.13</td> <td>8.84</td> <td>32.50</td> <td>248</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5449.55	48.58	74.00	-25.42	37.82	34.86	8.42	32.52	248	360	Peak	2	5465.50	48.71	68.30	-19.59	37.95	34.87	8.40	32.51	248	360	Peak	3	5720.00	104.49	-----	-----	93.30	35.03	8.66	32.50	248	360	Peak	4	5878.55	50.54	68.30	-17.76	39.07	35.13	8.84	32.50	248	360	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5449.55	48.58	74.00	-25.42	37.82	34.86	8.42	32.52	248	360	Peak																																																																			
2	5465.50	48.71	68.30	-19.59	37.95	34.87	8.40	32.51	248	360	Peak																																																																			
3	5720.00	104.49	-----	-----	93.30	35.03	8.66	32.50	248	360	Peak																																																																			
4	5878.55	50.54	68.30	-17.76	39.07	35.13	8.84	32.50	248	360	Peak																																																																			
Avg	Blank	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.20</td> <td>39.55</td> <td>54.00</td> <td>-14.45</td> <td>28.78</td> <td>34.82</td> <td>8.48</td> <td>32.53</td> <td>248</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>98.15</td> <td>-----</td> <td>-----</td> <td>86.96</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>248</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5407.20	39.55	54.00	-14.45	28.78	34.82	8.48	32.53	248	360	Average	2	5720.00	98.15	-----	-----	86.96	35.03	8.66	32.50	248	360	Average																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5407.20	39.55	54.00	-14.45	28.78	34.82	8.48	32.53	248	360	Average																																																																			
2	5720.00	98.15	-----	-----	86.96	35.03	8.66	32.50	248	360	Average																																																																			



Mode	39																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																													
ANT	7																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Blank	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5435.25</td> <td>49.75</td> <td>74.00</td> <td>-24.25</td> <td>38.98</td> <td>34.85</td> <td>8.44</td> <td>32.52</td> <td>167</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.05</td> <td>48.50</td> <td>68.30</td> <td>-19.80</td> <td>37.74</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>167</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>98.96</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>167</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5892.85</td> <td>51.46</td> <td>68.30</td> <td>-16.84</td> <td>39.99</td> <td>35.14</td> <td>8.83</td> <td>32.50</td> <td>167</td> <td>351</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5435.25	49.75	74.00	-24.25	38.98	34.85	8.44	32.52	167	351	Peak	2	5466.05	48.50	68.30	-19.80	37.74	34.87	8.40	32.51	167	351	Peak	3	5720.00	98.96	-----	-----	87.77	35.03	8.66	32.50	167	351	Peak	4	5892.85	51.46	68.30	-16.84	39.99	35.14	8.83	32.50	167	351	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5435.25	49.75	74.00	-24.25	38.98	34.85	8.44	32.52	167	351	Peak																																																																			
2	5466.05	48.50	68.30	-19.80	37.74	34.87	8.40	32.51	167	351	Peak																																																																			
3	5720.00	98.96	-----	-----	87.77	35.03	8.66	32.50	167	351	Peak																																																																			
4	5892.85	51.46	68.30	-16.84	39.99	35.14	8.83	32.50	167	351	Peak																																																																			
Avg	Blank	<p>Date: 2024-03-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5388.50</td> <td>39.41</td> <td>54.00</td> <td>-14.59</td> <td>28.71</td> <td>34.81</td> <td>8.43</td> <td>32.54</td> <td>167</td> <td>351</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>92.07</td> <td>-----</td> <td>-----</td> <td>80.88</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>167</td> <td>351</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5388.50	39.41	54.00	-14.59	28.71	34.81	8.43	32.54	167	351	Average	2	5720.00	92.07	-----	-----	80.88	35.03	8.66	32.50	167	351	Average																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5388.50	39.41	54.00	-14.59	28.71	34.81	8.43	32.54	167	351	Average																																																																			
2	5720.00	92.07	-----	-----	80.88	35.03	8.66	32.50	167	351	Average																																																																			



Mode	39																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																																																										
ANT	7																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.15</td> <td>74.00</td> <td>-25.85</td> <td>56.77</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>48.21</td> <td>68.30</td> <td>-20.09</td> <td>52.96</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	48.15	74.00	-25.85	56.77	37.77	11.42	57.81	--	--	Peak	2	17160.00	48.21	68.30	-20.09	52.96	40.16	13.16	58.07	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.67</td> <td>74.00</td> <td>-26.33</td> <td>56.29</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>48.00</td> <td>68.30</td> <td>-20.30</td> <td>52.75</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	47.67	74.00	-26.33	56.29	37.77	11.42	57.81	--	--	Peak	2	17160.00	48.00	68.30	-20.30	52.75	40.16	13.16	58.07	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11440.00	48.15	74.00	-25.85	56.77	37.77	11.42	57.81	--	--	Peak																																																																																																
2	17160.00	48.21	68.30	-20.09	52.96	40.16	13.16	58.07	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11440.00	47.67	74.00	-26.33	56.29	37.77	11.42	57.81	--	--	Peak																																																																																																
2	17160.00	48.00	68.30	-20.30	52.75	40.16	13.16	58.07	--	--	Peak																																																																																																



Mode	40																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																																																													
ANT	7																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.75</td> <td>49.54</td> <td>74.00</td> <td>-24.46</td> <td>38.77</td> <td>34.84</td> <td>8.45</td> <td>32.52</td> <td>250</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5461.65</td> <td>48.14</td> <td>68.30</td> <td>-20.16</td> <td>37.37</td> <td>34.87</td> <td>8.41</td> <td>32.51</td> <td>250</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>100.91</td> <td>-----</td> <td>-----</td> <td>89.77</td> <td>35.02</td> <td>8.62</td> <td>32.50</td> <td>250</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5888.45</td> <td>50.89</td> <td>68.30</td> <td>-17.41</td> <td>39.43</td> <td>35.13</td> <td>8.83</td> <td>32.50</td> <td>250</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5429.75	49.54	74.00	-24.46	38.77	34.84	8.45	32.52	250	360	Peak	2	5461.65	48.14	68.30	-20.16	37.37	34.87	8.41	32.51	250	360	Peak	3	5710.00	100.91	-----	-----	89.77	35.02	8.62	32.50	250	360	Peak	4	5888.45	50.89	68.30	-17.41	39.43	35.13	8.83	32.50	250	360	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5429.75	49.54	74.00	-24.46	38.77	34.84	8.45	32.52	250	360	Peak																																																																			
2	5461.65	48.14	68.30	-20.16	37.37	34.87	8.41	32.51	250	360	Peak																																																																			
3	5710.00	100.91	-----	-----	89.77	35.02	8.62	32.50	250	360	Peak																																																																			
4	5888.45	50.89	68.30	-17.41	39.43	35.13	8.83	32.50	250	360	Peak																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.80</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>29.39</td> <td>34.84</td> <td>8.46</td> <td>32.53</td> <td>250</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>94.46</td> <td>-----</td> <td>-----</td> <td>83.32</td> <td>35.02</td> <td>8.62</td> <td>32.50</td> <td>250</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5424.80	40.16	54.00	-13.84	29.39	34.84	8.46	32.53	250	360	Average	2	5710.00	94.46	-----	-----	83.32	35.02	8.62	32.50	250	360	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5424.80	40.16	54.00	-13.84	29.39	34.84	8.46	32.53	250	360	Average																																																																			
2	5710.00	94.46	-----	-----	83.32	35.02	8.62	32.50	250	360	Average																																																																			



Mode	40																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																																																													
ANT	7																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5403.90</td> <td>48.88</td> <td>74.00</td> <td>-25.12</td> <td>38.12</td> <td>34.82</td> <td>8.47</td> <td>32.53</td> <td>175</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5467.15</td> <td>48.38</td> <td>68.30</td> <td>-19.92</td> <td>37.62</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>175</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>95.34</td> <td>-----</td> <td>-----</td> <td>84.20</td> <td>35.02</td> <td>8.62</td> <td>32.50</td> <td>175</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5856.55</td> <td>50.39</td> <td>68.30</td> <td>-17.91</td> <td>38.91</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>175</td> <td>339</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5403.90	48.88	74.00	-25.12	38.12	34.82	8.47	32.53	175	339	Peak	2	5467.15	48.38	68.30	-19.92	37.62	34.87	8.40	32.51	175	339	Peak	3	5710.00	95.34	-----	-----	84.20	35.02	8.62	32.50	175	339	Peak	4	5856.55	50.39	68.30	-17.91	38.91	35.11	8.87	32.50	175	339	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5403.90	48.88	74.00	-25.12	38.12	34.82	8.47	32.53	175	339	Peak																																																																			
2	5467.15	48.38	68.30	-19.92	37.62	34.87	8.40	32.51	175	339	Peak																																																																			
3	5710.00	95.34	-----	-----	84.20	35.02	8.62	32.50	175	339	Peak																																																																			
4	5856.55	50.39	68.30	-17.91	38.91	35.11	8.87	32.50	175	339	Peak																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.15</td> <td>39.88</td> <td>54.00</td> <td>-14.12</td> <td>29.11</td> <td>34.83</td> <td>8.47</td> <td>32.53</td> <td>175</td> <td>339</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>88.39</td> <td>-----</td> <td>-----</td> <td>77.25</td> <td>35.02</td> <td>8.62</td> <td>32.50</td> <td>175</td> <td>339</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5412.15	39.88	54.00	-14.12	29.11	34.83	8.47	32.53	175	339	Average	2	5710.00	88.39	-----	-----	77.25	35.02	8.62	32.50	175	339	Average																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5412.15	39.88	54.00	-14.12	29.11	34.83	8.47	32.53	175	339	Average																																																																			
2	5710.00	88.39	-----	-----	77.25	35.02	8.62	32.50	175	339	Average																																																																			



Mode	41																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																																																													
ANT	7																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.40</td> <td>49.18</td> <td>74.00</td> <td>-24.82</td> <td>38.42</td> <td>34.83</td> <td>8.46</td> <td>32.53</td> <td>251</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>47.76</td> <td>68.30</td> <td>-20.54</td> <td>37.00</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>251</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>95.74</td> <td>-----</td> <td>-----</td> <td>84.69</td> <td>35.01</td> <td>8.54</td> <td>32.50</td> <td>251</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5861.50</td> <td>50.39</td> <td>68.30</td> <td>-17.91</td> <td>38.91</td> <td>35.12</td> <td>8.86</td> <td>32.50</td> <td>251</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5420.40	49.18	74.00	-24.82	38.42	34.83	8.46	32.53	251	360	Peak	2	5460.00	47.76	68.30	-20.54	37.00	34.86	8.41	32.51	251	360	Peak	3	5690.00	95.74	-----	-----	84.69	35.01	8.54	32.50	251	360	Peak	4	5861.50	50.39	68.30	-17.91	38.91	35.12	8.86	32.50	251	360	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5420.40	49.18	74.00	-24.82	38.42	34.83	8.46	32.53	251	360	Peak																																																																			
2	5460.00	47.76	68.30	-20.54	37.00	34.86	8.41	32.51	251	360	Peak																																																																			
3	5690.00	95.74	-----	-----	84.69	35.01	8.54	32.50	251	360	Peak																																																																			
4	5861.50	50.39	68.30	-17.91	38.91	35.12	8.86	32.50	251	360	Peak																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5387.95</td> <td>41.63</td> <td>54.00</td> <td>-12.37</td> <td>30.93</td> <td>34.81</td> <td>8.43</td> <td>32.54</td> <td>251</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>90.21</td> <td>-----</td> <td>-----</td> <td>79.16</td> <td>35.01</td> <td>8.54</td> <td>32.50</td> <td>251</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5387.95	41.63	54.00	-12.37	30.93	34.81	8.43	32.54	251	360	Average	2	5690.00	90.21	-----	-----	79.16	35.01	8.54	32.50	251	360	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5387.95	41.63	54.00	-12.37	30.93	34.81	8.43	32.54	251	360	Average																																																																			
2	5690.00	90.21	-----	-----	79.16	35.01	8.54	32.50	251	360	Average																																																																			



Mode	41																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																																																													
ANT	7																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5435.25</td> <td>48.23</td> <td>74.00</td> <td>-25.77</td> <td>37.46</td> <td>34.85</td> <td>8.44</td> <td>32.52</td> <td>165</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5464.40</td> <td>48.29</td> <td>68.30</td> <td>-20.01</td> <td>37.53</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>165</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>89.76</td> <td>-</td> <td>-</td> <td>78.71</td> <td>35.01</td> <td>8.54</td> <td>32.50</td> <td>165</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5850.00</td> <td>49.99</td> <td>68.30</td> <td>-18.31</td> <td>38.50</td> <td>35.11</td> <td>8.88</td> <td>32.50</td> <td>165</td> <td>339</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5435.25	48.23	74.00	-25.77	37.46	34.85	8.44	32.52	165	339	Peak	2	5464.40	48.29	68.30	-20.01	37.53	34.87	8.40	32.51	165	339	Peak	3	5690.00	89.76	-	-	78.71	35.01	8.54	32.50	165	339	Peak	4	5850.00	49.99	68.30	-18.31	38.50	35.11	8.88	32.50	165	339	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5435.25	48.23	74.00	-25.77	37.46	34.85	8.44	32.52	165	339	Peak																																																																			
2	5464.40	48.29	68.30	-20.01	37.53	34.87	8.40	32.51	165	339	Peak																																																																			
3	5690.00	89.76	-	-	78.71	35.01	8.54	32.50	165	339	Peak																																																																			
4	5850.00	49.99	68.30	-18.31	38.50	35.11	8.88	32.50	165	339	Peak																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.15</td> <td>41.48</td> <td>54.00</td> <td>-12.52</td> <td>30.86</td> <td>34.79</td> <td>8.38</td> <td>32.55</td> <td>165</td> <td>339</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>84.19</td> <td>-</td> <td>-</td> <td>73.14</td> <td>35.01</td> <td>8.54</td> <td>32.50</td> <td>165</td> <td>339</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5368.15	41.48	54.00	-12.52	30.86	34.79	8.38	32.55	165	339	Average	2	5690.00	84.19	-	-	73.14	35.01	8.54	32.50	165	339	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5368.15	41.48	54.00	-12.52	30.86	34.79	8.38	32.55	165	339	Average																																																																			
2	5690.00	84.19	-	-	73.14	35.01	8.54	32.50	165	339	Average																																																																			



Mode	42																																																																																																																																																																														
	LF																																																																																																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT20_LF																																																																																																																																																																														
ANT	7																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																													
QP/ Peak	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>38.73</td> <td>19.99</td> <td>40.00</td> <td>-20.01</td> <td>35.11</td> <td>19.16</td> <td>0.62</td> <td>34.90</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>106.63</td> <td>23.83</td> <td>43.50</td> <td>-19.67</td> <td>42.08</td> <td>15.45</td> <td>1.09</td> <td>34.79</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>196.84</td> <td>22.68</td> <td>43.50</td> <td>-20.82</td> <td>39.74</td> <td>16.17</td> <td>1.47</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>265.71</td> <td>24.74</td> <td>46.00</td> <td>-21.26</td> <td>39.66</td> <td>18.06</td> <td>1.69</td> <td>34.67</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>341.37</td> <td>25.56</td> <td>46.00</td> <td>-20.44</td> <td>38.21</td> <td>20.03</td> <td>1.92</td> <td>34.60</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>30.76</td> <td>46.00</td> <td>-15.24</td> <td>32.06</td> <td>29.74</td> <td>3.26</td> <td>34.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	38.73	19.99	40.00	-20.01	35.11	19.16	0.62	34.90	-- -- Peak	2	106.63	23.83	43.50	-19.67	42.08	15.45	1.09	34.79	-- -- Peak	3	196.84	22.68	43.50	-20.82	39.74	16.17	1.47	34.70	-- -- Peak	4	265.71	24.74	46.00	-21.26	39.66	18.06	1.69	34.67	-- -- Peak	5	341.37	25.56	46.00	-20.44	38.21	20.03	1.92	34.60	-- -- Peak	6	948.59	30.76	46.00	-15.24	32.06	29.74	3.26	34.30	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.88</td> <td>23.33</td> <td>40.00</td> <td>-16.67</td> <td>39.17</td> <td>18.46</td> <td>0.57</td> <td>34.87</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>98.87</td> <td>24.23</td> <td>43.50</td> <td>-19.27</td> <td>43.21</td> <td>14.78</td> <td>1.04</td> <td>34.80</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>141.55</td> <td>24.26</td> <td>43.50</td> <td>-19.24</td> <td>39.46</td> <td>18.27</td> <td>1.25</td> <td>34.72</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>270.56</td> <td>24.32</td> <td>46.00</td> <td>-21.68</td> <td>39.06</td> <td>18.21</td> <td>1.71</td> <td>34.66</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>376.29</td> <td>24.57</td> <td>46.00</td> <td>-21.43</td> <td>36.24</td> <td>20.85</td> <td>2.03</td> <td>34.55</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>915.61</td> <td>31.04</td> <td>46.00</td> <td>-14.96</td> <td>33.18</td> <td>28.98</td> <td>3.18</td> <td>34.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	33.88	23.33	40.00	-16.67	39.17	18.46	0.57	34.87	-- -- Peak	2	98.87	24.23	43.50	-19.27	43.21	14.78	1.04	34.80	-- -- Peak	3	141.55	24.26	43.50	-19.24	39.46	18.27	1.25	34.72	-- -- Peak	4	270.56	24.32	46.00	-21.68	39.06	18.21	1.71	34.66	-- -- Peak	5	376.29	24.57	46.00	-21.43	36.24	20.85	2.03	34.55	-- -- Peak	6	915.61	31.04	46.00	-14.96	33.18	28.98	3.18	34.30
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																							
1	38.73	19.99	40.00	-20.01	35.11	19.16	0.62	34.90	-- -- Peak																																																																																																																																																																						
2	106.63	23.83	43.50	-19.67	42.08	15.45	1.09	34.79	-- -- Peak																																																																																																																																																																						
3	196.84	22.68	43.50	-20.82	39.74	16.17	1.47	34.70	-- -- Peak																																																																																																																																																																						
4	265.71	24.74	46.00	-21.26	39.66	18.06	1.69	34.67	-- -- Peak																																																																																																																																																																						
5	341.37	25.56	46.00	-20.44	38.21	20.03	1.92	34.60	-- -- Peak																																																																																																																																																																						
6	948.59	30.76	46.00	-15.24	32.06	29.74	3.26	34.30	-- -- Peak																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																							
1	33.88	23.33	40.00	-16.67	39.17	18.46	0.57	34.87	-- -- Peak																																																																																																																																																																						
2	98.87	24.23	43.50	-19.27	43.21	14.78	1.04	34.80	-- -- Peak																																																																																																																																																																						
3	141.55	24.26	43.50	-19.24	39.46	18.27	1.25	34.72	-- -- Peak																																																																																																																																																																						
4	270.56	24.32	46.00	-21.68	39.06	18.21	1.71	34.66	-- -- Peak																																																																																																																																																																						
5	376.29	24.57	46.00	-21.43	36.24	20.85	2.03	34.55	-- -- Peak																																																																																																																																																																						
6	915.61	31.04	46.00	-14.96	33.18	28.98	3.18	34.30	-- -- Peak																																																																																																																																																																						






Mode	43																																																																																																																																																																																	
	LF																																																																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_LF																																																																																																																																																																																	
ANT	7																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
QP/ Peak	<p>Date: 2024-03-26</p>	<p>Date: 2024-03-26</p>																																																																																																																																																																																
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>56.19</td> <td>21.81</td> <td>40.00</td> <td>-18.19</td> <td>36.69</td> <td>19.26</td> <td>0.76</td> <td>34.90</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>141.55</td> <td>23.73</td> <td>43.50</td> <td>-19.77</td> <td>38.93</td> <td>18.27</td> <td>1.25</td> <td>34.72</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>196.84</td> <td>24.43</td> <td>43.50</td> <td>-19.07</td> <td>41.49</td> <td>16.17</td> <td>1.47</td> <td>34.70</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>283.17</td> <td>24.79</td> <td>46.00</td> <td>-21.21</td> <td>39.07</td> <td>18.60</td> <td>1.75</td> <td>34.63</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>351.07</td> <td>27.19</td> <td>46.00</td> <td>-18.81</td> <td>39.61</td> <td>20.24</td> <td>1.94</td> <td>34.60</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>30.61</td> <td>46.00</td> <td>-15.39</td> <td>31.91</td> <td>29.74</td> <td>3.26</td> <td>34.30</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Loss	Loss			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	56.19	21.81	40.00	-18.19	36.69	19.26	0.76	34.90	--	Peak	2	141.55	23.73	43.50	-19.77	38.93	18.27	1.25	34.72	--	Peak	3	196.84	24.43	43.50	-19.07	41.49	16.17	1.47	34.70	--	Peak	4	283.17	24.79	46.00	-21.21	39.07	18.60	1.75	34.63	--	Peak	5	351.07	27.19	46.00	-18.81	39.61	20.24	1.94	34.60	--	Peak	6	948.59	30.61	46.00	-15.39	31.91	29.74	3.26	34.30	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.88</td> <td>24.40</td> <td>40.00</td> <td>-15.60</td> <td>40.24</td> <td>18.46</td> <td>0.57</td> <td>34.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>98.87</td> <td>23.70</td> <td>43.50</td> <td>-19.80</td> <td>42.68</td> <td>14.78</td> <td>1.04</td> <td>34.80</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>141.55</td> <td>24.57</td> <td>43.50</td> <td>-18.93</td> <td>39.77</td> <td>18.27</td> <td>1.25</td> <td>34.72</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>197.81</td> <td>24.71</td> <td>43.50</td> <td>-18.79</td> <td>41.83</td> <td>16.11</td> <td>1.47</td> <td>34.70</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>831.22</td> <td>28.64</td> <td>46.00</td> <td>-17.36</td> <td>31.43</td> <td>28.44</td> <td>3.07</td> <td>34.30</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Loss	Loss			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	24.40	40.00	-15.60	40.24	18.46	0.57	34.87	--	Peak	2	98.87	23.70	43.50	-19.80	42.68	14.78	1.04	34.80	--	Peak	3	141.55	24.57	43.50	-18.93	39.77	18.27	1.25	34.72	--	Peak	4	197.81	24.71	43.50	-18.79	41.83	16.11	1.47	34.70	--	Peak	5	831.22	28.64	46.00	-17.36	31.43	28.44	3.07	34.30	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																											
Freq	Level	Line	Level	Loss	Loss			Remark																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	56.19	21.81	40.00	-18.19	36.69	19.26	0.76	34.90	--	Peak																																																																																																																																																																								
2	141.55	23.73	43.50	-19.77	38.93	18.27	1.25	34.72	--	Peak																																																																																																																																																																								
3	196.84	24.43	43.50	-19.07	41.49	16.17	1.47	34.70	--	Peak																																																																																																																																																																								
4	283.17	24.79	46.00	-21.21	39.07	18.60	1.75	34.63	--	Peak																																																																																																																																																																								
5	351.07	27.19	46.00	-18.81	39.61	20.24	1.94	34.60	--	Peak																																																																																																																																																																								
6	948.59	30.61	46.00	-15.39	31.91	29.74	3.26	34.30	--	Peak																																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																											
Freq	Level	Line	Level	Loss	Loss			Remark																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	33.88	24.40	40.00	-15.60	40.24	18.46	0.57	34.87	--	Peak																																																																																																																																																																								
2	98.87	23.70	43.50	-19.80	42.68	14.78	1.04	34.80	--	Peak																																																																																																																																																																								
3	141.55	24.57	43.50	-18.93	39.77	18.27	1.25	34.72	--	Peak																																																																																																																																																																								
4	197.81	24.71	43.50	-18.79	41.83	16.11	1.47	34.70	--	Peak																																																																																																																																																																								
5	831.22	28.64	46.00	-17.36	31.43	28.44	3.07	34.30	--	Peak																																																																																																																																																																								



	44																																																																							
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz& LTE Band 48Link																																																																							
ANT	7																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.22</td> <td>64.03</td> <td>68.30</td> <td>-4.27</td> <td>52.83</td> <td>35.03</td> <td>8.67</td> <td>32.50</td> <td>123</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5725.22	64.03	68.30	-4.27	52.83	35.03	8.67	32.50	123	360 PEAK	<p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>103.13</td> <td>-----</td> <td>-----</td> <td>92.01</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>123</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	103.13	-----	-----	92.01	35.02	8.60	32.50	123	360 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5725.22	64.03	68.30	-4.27	52.83	35.03	8.67	32.50	123	360 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	103.13	-----	-----	92.01	35.02	8.60	32.50	123	360 PEAK																																																															
Avg	Blank	<p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.96</td> <td>-----</td> <td>-----</td> <td>85.87</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>123</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	96.96	-----	-----	85.87	35.02	8.57	32.50	123	360 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	96.96	-----	-----	85.87	35.02	8.57	32.50	123	360 AVERAGE																																																															

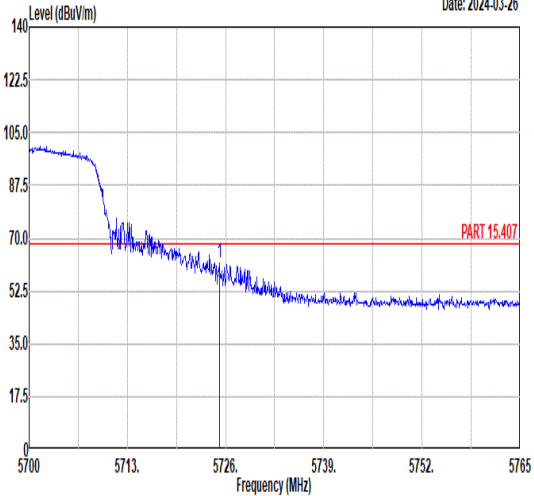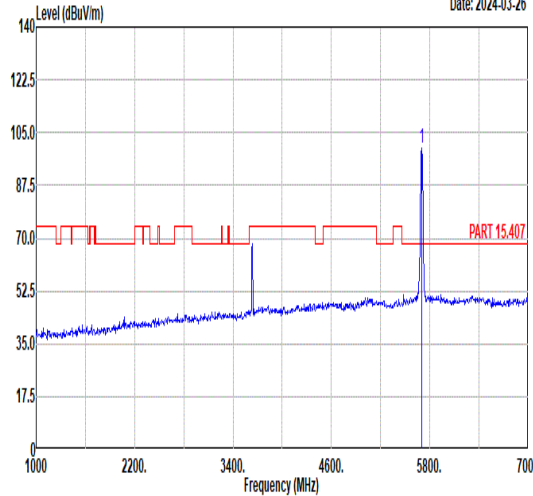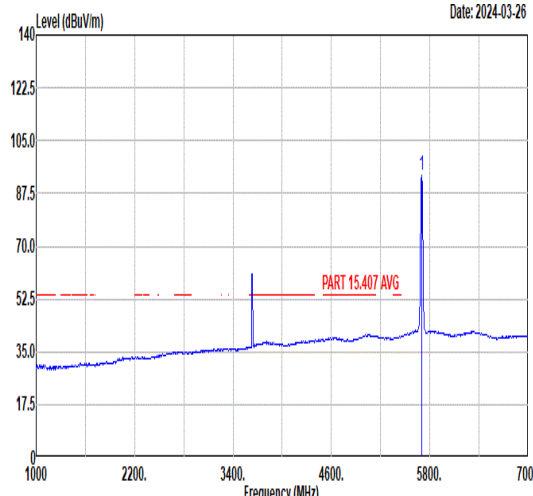

	44																																																																											
Mode	Band Edge																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz& LTE Band 48Link																																																																											
ANT	7																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>61.75</td> <td>68.30</td> <td>-6.55</td> <td>50.55</td> <td>35.03</td> <td>8.67</td> <td>32.50</td> <td>325</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5725.16	61.75	68.30	-6.55	50.55	35.03	8.67	32.50	325	79	PEAK	 <p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.83</td> <td>-----</td> <td>-----</td> <td>88.71</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>325</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	99.83	-----	-----	88.71	35.02	8.60	32.50	325	79	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5725.16	61.75	68.30	-6.55	50.55	35.03	8.67	32.50	325	79	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	99.83	-----	-----	88.71	35.02	8.60	32.50	325	79	PEAK																																																																	
Avg	Blank	 <p style="text-align: right;">Date: 2024-03-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>93.73</td> <td>-----</td> <td>-----</td> <td>82.64</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>325</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	93.73	-----	-----	82.64	35.02	8.57	32.50	325	79	AVERAGE																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	93.73	-----	-----	82.64	35.02	8.57	32.50	325	79	AVERAGE																																																																	



Mode	44																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz& LTE Band 48Link																																																																																																										
ANT	7																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.15</td> <td>74.00</td> <td>-26.85</td> <td>55.84</td> <td>37.76</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>45.91</td> <td>68.30</td> <td>-22.39</td> <td>50.87</td> <td>40.06</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.15	74.00	-26.85	55.84	37.76	11.41	57.86	--	--	Peak	2	17100.00	45.91	68.30	-22.39	50.87	40.06	13.14	58.16	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.36</td> <td>74.00</td> <td>-27.64</td> <td>55.05</td> <td>37.76</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.49</td> <td>68.30</td> <td>-21.81</td> <td>51.45</td> <td>40.06</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.36	74.00	-27.64	55.05	37.76	11.41	57.86	--	--	Peak	2	17100.00	46.49	68.30	-21.81	51.45	40.06	13.14	58.16	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11400.00	47.15	74.00	-26.85	55.84	37.76	11.41	57.86	--	--	Peak																																																																																																
2	17100.00	45.91	68.30	-22.39	50.87	40.06	13.14	58.16	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11400.00	46.36	74.00	-27.64	55.05	37.76	11.41	57.86	--	--	Peak																																																																																																
2	17100.00	46.49	68.30	-21.81	51.45	40.06	13.14	58.16	--	--	Peak																																																																																																

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.56	1.392	0.718	1kHz
802.11n HT20	97.40	1.304	0.767	1kHz
802.11n HT40	94.92	0.649	1.541	3kHz
802.11ac VHT80	90.32	0.324	3.086	10kHz



802.11a

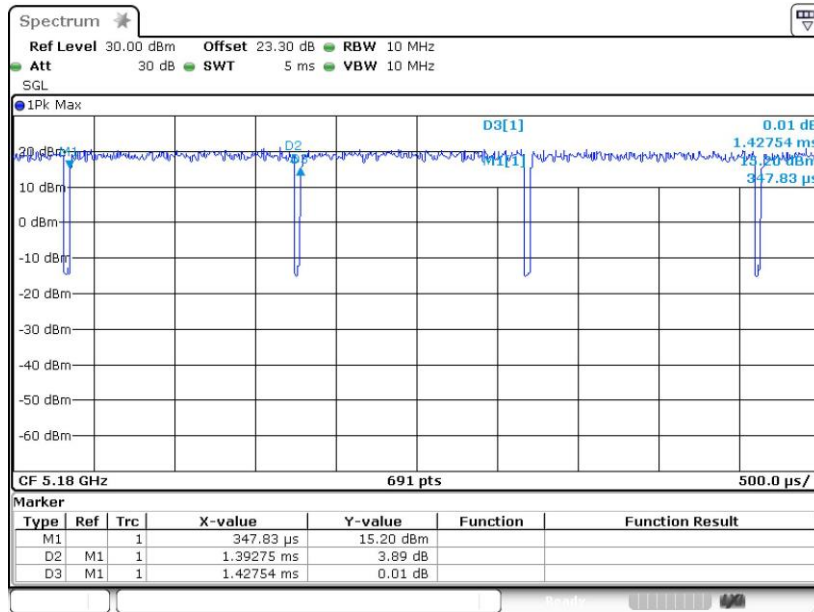


802.11n HT20

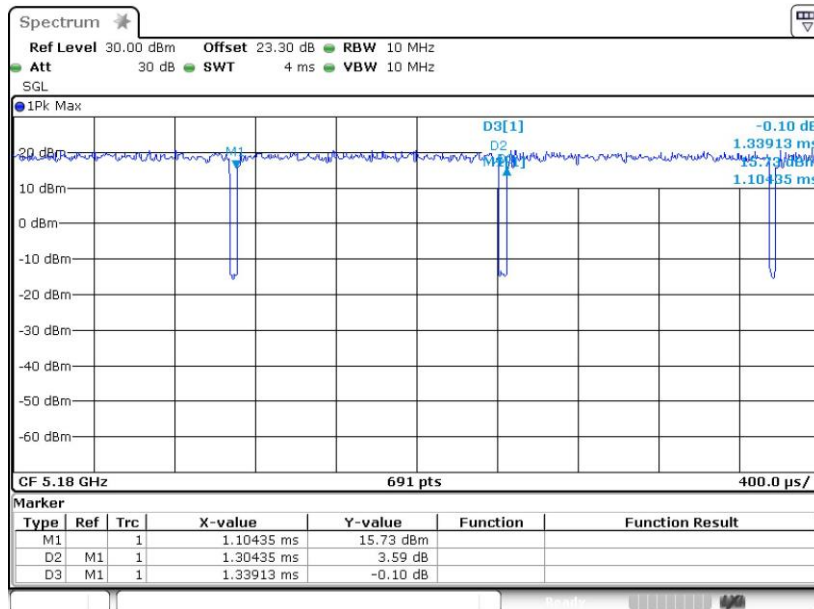



802.11n HT40

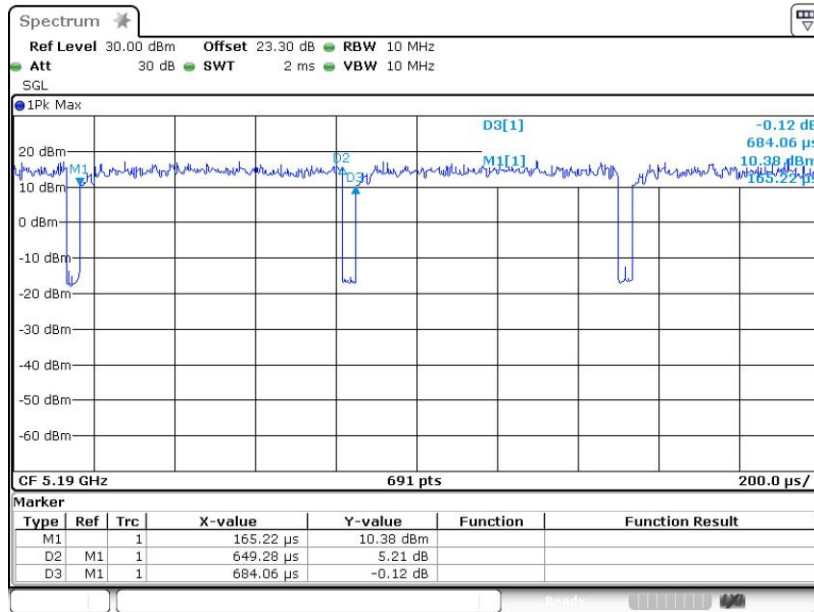

802.11ac VHT80

